

# C++ Fundamentals

HS2021

**Marco Agostinis**

`marco.agostini@ost.ch`



Computer Science  
University of Applied Sciences of Eastern Switzerland  
September 2021

## Contents

<b>1</b>	<b>Introduction</b>	<b>4</b>
1.1	Why C++? . . . . .	4
1.2	Features . . . . .	4
1.3	Terminology . . . . .	4
1.4	Undefined Behaviour . . . . .	4
1.5	C++ Compilation Process . . . . .	4
1.6	Declarations and Definitions . . . . .	5
<b>2</b>	<b>Variables</b>	<b>6</b>
2.1	Definitions . . . . .	6
2.2	Values and Expressions . . . . .	6
2.3	Const . . . . .	7
2.4	Auto . . . . .	7
2.5	Strings . . . . .	7
<b>3</b>	<b>Streams</b>	<b>8</b>
3.1	Input and Output Streams . . . . .	8
3.2	Stream States . . . . .	9
3.3	Manipulators . . . . .	9
<b>4</b>	<b>Iterators</b>	<b>10</b>
4.1	Iteration . . . . .	10
4.2	Using Iterators with Algorithms . . . . .	10
4.3	Iterators for I/O . . . . .	11
4.4	Types . . . . .	11
4.4.1	Input Iterator . . . . .	12
4.4.2	Forward Iterator . . . . .	12
4.4.3	Bidirectional Iterator . . . . .	12
4.4.4	Output Iterator . . . . .	12
<b>5</b>	<b>Functions</b>	<b>13</b>
5.1	Default Arguments . . . . .	13
5.2	Function Overloading . . . . .	13
5.3	Reference / Value Arguments . . . . .	13
5.4	Variadic Arguments . . . . .	14
5.5	Lambdas . . . . .	14
5.5.1	Captures . . . . .	14
5.6	Functor . . . . .	15
<b>6</b>	<b>Exceptions</b>	<b>16</b>
6.1	Failing Functions . . . . .	16
6.2	Catching Exceptions . . . . .	16
6.3	Keyword noexcept . . . . .	17
<b>7</b>	<b>Classes and Operators</b>	<b>18</b>
7.1	Access Specifier . . . . .	19
7.2	Constructors . . . . .	19
7.3	Defaulted Constructor . . . . .	19
7.4	Inline Functions . . . . .	20
7.5	Friend Functions . . . . .	20
7.6	Inheritance . . . . .	20

<b>8</b>	<b>Operator Overloading</b>	<b>21</b>
8.1	Free Operator . . . . .	21
8.2	Member Operator . . . . .	21
8.3	Greater / smaller than / same Overload . . . . .	22
<b>9</b>	<b>Enums</b>	<b>24</b>
<b>10</b>	<b>Namespaces</b>	<b>25</b>
10.1	Using Declaration . . . . .	25
10.2	Anonymous Namespaces . . . . .	25
10.3	Name Resolution of Namespace Members . . . . .	26
10.4	Arithmetic Types . . . . .	26
<b>11</b>	<b>Container and Collections</b>	<b>27</b>
11.1	Common Container Constructors . . . . .	27
11.2	Array . . . . .	27
11.3	Vector . . . . .	28
11.4	Double-Linked List . . . . .	29
11.5	Double-ended Queue, Deque . . . . .	29
11.6	Queue, FIFO Adapter . . . . .	29
11.7	Stack, LIFO Adapter . . . . .	30
11.8	Set . . . . .	30
11.9	Multiset . . . . .	31
11.10	Map . . . . .	31
11.11	Multimap . . . . .	31
<b>12</b>	<b>STL Algorithms</b>	<b>32</b>
12.1	Functor . . . . .	32
12.2	Examples . . . . .	32
12.3	Pitfalls . . . . .	32
<b>13</b>	<b>Function Templates</b>	<b>33</b>
13.1	Variadic Templates . . . . .	33
<b>14</b>	<b>Class Templates</b>	<b>34</b>
14.1	Type Aliases (C++11) . . . . .	35
<b>15</b>	<b>Dynamic Heap Memory Management</b>	<b>36</b>
15.1	Smart Pointers . . . . .	36
15.1.1	std::unique_ptr<T> . . . . .	36
15.1.2	std::shared_ptr<T> . . . . .	36
15.1.3	std::weak_ptr<T> . . . . .	37
<b>16</b>	<b>Inheritance</b>	<b>38</b>

# 1 Introduction

## 1.1 Why C++?

- Work al almost all platforms from a micro controller to the main frame
- Multi-paradigm language with zero-cost abstraction
- High-level abstraction facilities
- The concepts from C++ can mostly be applied to any other programming language

## 1.2 Features

- C++ doesn't has no methods only functions. A function does not have to be a member of an object. If a function belongs to an object it's a member function.
- Please do not write your own loops in C++ try to use the STL (Standard Template Library).
- C++ is compatible with standard C.
- There is no Garbage Collector!
- With a library we can publish functionalities to another program.

## 1.3 Terminology

<b>Value</b> 42	<b>Statement</b> while ( true );
<b>Type</b> int, char, bool, long, float	<b>Declaration</b> int foo();
<b>Variable</b> int const i{42}	<b>Definition</b> int j;
<b>Expression</b> (2+4)*3	<b>Function</b> void bar ( ) { }

## 1.4 Undefined Behaviour

The undefined behaviour is defined in the C++ standard (funny, isn't it?). Because of the fact, that C++ doesn't have a garbage collection, if in C++ something is written wrong and the compiler doesn't detect it: undefined behaviour can occur.

## 1.5 C++ Compilation Process

C++ has the advantage of direct compilation into machine code. This eliminates the overhead for a virtual machine in comparison to Java.

### \*.cpp files for source code

- Also called "Implementation File"
- Function implementations (can be in .h files as well)
- Source of compilation - aka "Translation Unit"

### \*.h files for interfaces and templates

- Called "Header File"
- Declarations and definitions to be used in other implementation files.
- Textual inclusion through a pre-processor (C++20 will incorporate a "Module" mechanism)
- `#include "header.h"`

## 3 Phases of Compilation

- **Preprocessor** Textual replacement of preprocessor directives, results in (\*.i) files. (`#include`)
- **Compiler** Translation of C++ code into machine code (source file (\*.i) to object file (\*.o))
- **Linker** - Combination of object files (\*.o) and libraries into libraries and executables (\*.exe).

## 1.6 Declarations and Definitions

*All things with a name that you use in a C++ program must be declared before you can do so!*

### Defining Functions

$$< \text{return - type} > < \text{function - name} > (< \text{parameters} >) \{ / * \text{body} * / \}$$

Tells the compiler that there is a function named  $< \text{function - name} >$  that takes the parameters  $< \text{parameters} >$  and returns a value of type  $< \text{return - type} >$ . The Signature of a function is just the combination of name and the parameter types.

### One Definition Rule

While a program element can be declared several times without problem there can be only one definition of it. (**ODR = One Definition Rule**)

### Include Guard

Include guards ensure that a header file is only included once. Multiple inclusions could violate the One Definition Rule when the header contains definitions.

---

```
1 #ifndef SAYHELLO_H_
2 #define SAYHELLO_H_
3 #include <iosfwd>
4 struct Greeter {
5 };
6 #endif /* SAYHELLO_H_ */
```

---

## 2 Variables

- Variables always start with a lower case character
- Local variables must always contain a default value (Curly brackets or =).
- A global variable must never be mutable! (Hard to test and can cause problems when multi-threading is used)
- Variables are as default value types and therefore declared on the stack.

### 2.1 Definitions

Defining a variable consists of specifying its `<type>`, its `<variable-name>` and its `<initial value>`. Empty braces mean default initialisation. Using `=` for initialisation we can have the compiler determine its type (do not combine with braces!).

`< type > < variable - name > < initial - value >;`

#### Constants

Adding the `const` keyword in front of the name makes the variable a single-assignment variable, aka a constant. A `const` must be initialised and is immutable.

#### When should `const` be used?

- A lot of code needs names for values, but often does not intend to change it
- It helps to avoid reusing the same variable for different purposes (code smell)
- It creates safer code, because a `const` variable cannot be inadvertently changed
- It makes reasoning about code easier
- Constness is checked by the compiler
- It improves optimization and parallelization (shared mutable state is dangerous)

#### Where to place Variable definition?

Do not practice to define all (potentially) needed variables up front (that style is long obsolete!). Every mutable global variable you define is a design error!

#### A Note on Naming

The C++ convention is to begin variable names with a lower case letter. Spell out what the variable is for and do not abbreviate!

#### Types for Variables

Are part of the language and don't need an include.

- `short`, `int`, `long`, `long long` each also available as unsigned version
- `bool`, `char`, `unsigned char`, `signed char` - are treated as integral numbers as well
- `float`, `double`, `long double`

### 2.2 Values and Expressions

C++ provides automatic type conversion if values of different types are combined into an expression. Dividing integers by zero is undefined behaviour.

---

```

1 (5 + 10 * 3 - 6 / 2) // precedence as in normal mathematics = 32
2 auto x = 3; / 3 // Fractions results of int operations always rundet
  down! 1
3 auto y = x%2 ? 1 : 0; // int boolean conversion 0=false, others are
  true.=1

```

---

Literal Example	Type	Value
'a'	char	Letter a, value: 97
'\n'	char	<NL> character, value: 10
'\x0a'	char	<NL> character, value: 10
1	int	1
42L	long (precision)	42
5LL	long long	5
int{} (not really a literal)	int	0 (default value)
1u	unsigned int	1
42uL	unsigned long	42
5uLL	unsigned long long	5
020	int	16 (octal 20)
0x1f	int	31 (hex 1F)
0xFULL	unsigned long long	15 (hex F)
0.f	float	0
.33	double	0.33
1e9	double	1000000000 (10 <sup>9</sup> )
42.E-12L	long double	0.00000000042 (42*10 <sup>-12</sup> )
.3l	long double	0.3
"hello" (n+1)	char const [6]	Array of 6 chars: h e l l o <NUL>
"\012\n\"	char const [4]	Array of 4 chars: <NL> <NL> \ <NUL>

Figure 1: C++ Variable Types

## 2.3 Const

- Const should be used as often as possible, because it optimises the code.
- Const is comparable with the final from Java, although it has a higher guarantee that the variable is not changed.
- Const variables must be initialized!
- To set const vars at compile time the keyword "constexpr" must be used.

## 2.4 Auto

The keyword auto can be used to deduct the type of a variable automatically at the declaration.

---

```
1 auto const yearOfBirth = 2049; // int
2 auto const name = "Rick Deckard" // std::string
```

---

## 2.5 Strings

std::string is C++'s type for representing sequences of char (which is often only 8 bit). This Strings are mutable in C++ in contrast to Java. Literals like "ab" are not of type std::string they consist of const chars in a null terminated array.

To have a std::string we need to append an s. This requires using namespace std::literals;.

---

```
1 void printName(std::string name) {
2     using namespace std::literals;
3     std::cout << "my name is: "s << name;
4 }
```

---

### String Capabilities

You can iterate over the contents of a string.

---

```
1 void toUpper(std::string & value) {
2     for (char & c : value) {
3         c = toupper(c);
4     }
5 }
```

---

### 3 Streams

- In the header files the inclusion of `#include <iosfwd>` forward declaration header. This is sufficient for function declarations.
- In a source file for `"std::cin"` and `"std::cout"` the `#include <iostream>` should be used. This contains all the definitions needed for `"std::cin"` etc. If just one of the two stream objects is needed use either `#include <ostream>` or `#include <istream>`. The last two don't include the `"std::cin"` and `"std::cout"`.
- In the main function `"std::cin"` and `"std::cout"` is used with the corresponding shift operators `"<"`, `">"`.
- `"std::istream"` objects do return false if we are in an invalid stream state.
- `"std::endl"` flushes a buffered out stream. Better use `"\n"`.

#### 3.1 Input and Output Streams

Functions taking a stream object must take it as a reference, because they provide a side-effect to the stream (i.e., output characters).

##### Simple I/O

Stream objects provide C++'s I/O mechanism with the help of the pre-defined globals: `std::cin` `std::cout`. Streams have a state that denotes if I/O was successful or not.

- Only `.good()` streams actually do I/O
- You need to `.clear()` the state in case of an error
- Reading a `std::string` can not go wrong, unless the stream is already `!good()`.

##### Reading a `std::string` Value

---

```
1 #include <iostream>
2 #include <string>
3 std::string inputName(std::istream & in) {
4     std::string name{};
5     in >> name;
6     return name;
7 }
```

---

##### Reading an int Value

---

```
1 int inputAge(std::istream& in) {
2     int age{-1};
3     if (in >> age) { // Boolean conversion
4         return age;
5     }
6     return -1;
7 }
```

---

##### Chaining Input Operations

- Multiple subsequent reads are possible
- If a previous read already failed, subsequent reads fail as well

---

```
1 std::string readSymbols(std::istream& in) {
2     char symbol{};
3     int count{-1};
4     if (in >> symbol >> count) {
5         return std::string(count, symbol);
6     }
7 }
```



```
7     return "error";  
8 }
```

---

### 3.2 Stream States

Formatted input on stream is must check for `is.fail()` and `is.bad()`. If failed, `is.clear()` the stream and consume invalid input characters before continue.

State Bit Set	Query	Entered
<none>	<code>is.good()</code>	initial <code>is.clear()</code>
failbit	<code>is.fail()</code>	formatted input failed
eofbit	<code>is.eof()</code>	trying to read at end of input
badbit	<code>is.bad()</code>	unrecoverable I/O error

Figure 2: Stream States in C++

### 3.3 Manipulators

For the formatting of the output a vide variety of manipulator can be used.

## 4 Iterators

There are always two iterators used (`begin()` und `end()`). There is also the possibility to traverse a list from front to back (`rbegin()` and `rend()`). If the members are only read the `const` version (`cbegin()` and `cend()`) can be used.

### 4.1 Iteration

Its possible to index a vector like an array but there is no bounds check. Accessing an element outside the valid range is Undefined Behavior.

#### Bad Style Iteration!

---

```
1 for (size_t i = 0; i < v.size(); ++i) { //Index is "unsigned" 0-1=
    MAX_INT
2     std::cout << "v[" << i << "] = " << v[i] << '\n'; }
3 }
```

---

#### Element Iteration (Range-Based for)

- Advantage: No index error possible
- Works with all containers, even value lists 1, 2, 3

	<b>const:</b> • element cannot be changed	<b>non-const:</b> • element can be changed
<b>reference:</b> • element in vector is accessed	<pre>for (auto const &amp; cref : v) {     std::cout &lt;&lt; cref &lt;&lt; '\n'; }</pre>	<pre>for (auto &amp; ref : v) {     ref *= 2; }</pre>
<b>copy:</b> • loop has own copy of the element	<pre>for (auto const ccopy : v) {     std::cout &lt;&lt; ccopy &lt;&lt; '\n'; }</pre>	<pre>for (auto copy : v) {     copy *= 2;     std::cout &lt;&lt; copy &lt;&lt; '\n'; }</pre>

#### Iteration with Iterators

---

```
1 for (auto it = std::begin(v); it != std::end(v); ++it) {
2     std::cout << (*it)++ << ", ";
3 }
4 // Guarantee to just have read-only access with std::cbegin() and std
   ::cend()
5 for (auto it = std::cbegin(v); it != std::cend(v); ++it) {
6     std::cout << *it << ", ";
7 }
```

---

### 4.2 Using Iterators with Algorithms

Each algorithm takes iterator arguments. The algorithm does what its name tells us.

---

```
1 // Counting blanks in a string
2 size_t count_blanks(std::string s) {
3     size_t count{0};
```

---

```

4   for (size_t = 0; i < s.size(); ++i) {
5       if (s[i] == ' ') {
6           ++count;
7       }
8   }
9   return count;
10 }
11
12 // Counting blanks in a string with algorithms
13 size_t count_blanks(std::string s) {
14     return std::count(s.begin(), s.end(), ' ');
15 }
16
17 // Summing up all values in a vector
18 std::vector<int> v{5, 4, 3, 2, 1};
19 std::cout << std::accumulate(s.begin(), s.end(), 0) << " = sum\
    n";
20
21 // Number of elements in range
22 void printDistanceAndLength(std::string s) {
23     std::cout << "distance: " << std::distance(s.begin(), s.end()) << '\n'
24     ;
25     std::cout << "in a string of length: " << s.size() << '\n';
26 }
27
28 // Printing all values of a vector
29 void printAll(std::vector<int> v) {
30     std::for_each(s.begin(), s.end(), print);
31 }
32
33 // For each with a Lambda
34 void printAll(std::vector<int> v, std::ostream & out) {
35     std::for_each(s.begin(), s.end(), [&out](auto x) {
36         out << "print: " << x << '\n';
37     });
38 }

```

---

### 4.3 Iterators for I/O

Iterators connect streams and algorithms. Streams (`std::istream` and `std::ostream`) cannot be used with algorithms directly.

- `std::ostream_iterator<T>` outputs values of type `T` to the given `std::ostream`
  - No `end()` marker needed for output, it ends when the input range ends.
- `|std::istream_iterator < T > |reads values of type T from the given std::istream`
  - End iterator is the default constructed `std::istream_iterator<T>{}`
  - It ends when the stream is no longer good().

### 4.4 Types

There are five different types of iterators in C++.

---

```
1 struct input_iterator_tag { };
2 struct output_iterator_tag { };
3 struct forward_iterator_tag : public input_iterator_tag { };
4 struct bidirectional_iterator_tag : public forward_iterator_tag { };
5 struct random_access_iterator_tag : public bidirectional_iterator_tag
    { };
```

---

#### 4.4.1 Input Iterator

- The element can be read only once and after that the iterator has to be incremented.
- Used for `std::istream_iterator` and `std::istreambuf_iterator`

#### 4.4.2 Forward Iterator

- Element can be read in and changed (Except element or container is `const`).
- Only allows forward iteration
- Sequenz can be iterated over multiple times

#### 4.4.3 Bidirectional Iterator

- Element can be read in and changed (Except element or container is `const`).
- Allows forward and backwards iteration
- Sequenz can be iterated over multiple times
- The random access iterator behaves as the bidirectional iterator with the addition that the can access elements over the index

#### 4.4.4 Output Iterator

- Current element can be changed once, after that the iterator has to be incremented.
- There is no end for this iterator (example console prints)
- Used for `std::ostream_iterator`
- Writes the result without knowing the result.

## 5 Functions

- Functions are always written in lower Camel Case
- A function must be declared always in a header file before the function is used
- A good function has a maximum of five parameters and does exactly one thing
- The call of the function parameters is not defined.
- The main function does implicit return a "0".
- Auto should not be used as a return type, exceptions are: inline, template or constexpr functions in header files.
- Void should not be used as a function parameter
- NEVER return a ref to a local variable since it produces a dangling Reference, because the value lives in the stack frame.

### 5.1 Default Arguments

A function declaration can provide default arguments for its parameters *from the right*.

---

```
1 void incr(int & var, unsigned delta = 1);
2 // Default arguments can be omitted calling
3 int counter {0};
4 incr(counter); // uses default for delta
```

---

### 5.2 Function Overloading

The same function name can be used for different functions if parameter number or types differ. Function can not be overloaded just by their return type! If only the parameter type is different there might be ambiguities. The resolution of overloads happens at compile-time = Ad hoc polymorphism.

---

```
1 void incr(int & var);
2 int incr(int & var); // doesn't compile because of same signature
3 void incr(int & var, unsigned delta);
```

---

### 5.3 Reference / Value Arguments

#### Parameter Declarations

	const: • Parameter cannot be changed	non-const: • Parameter can be changed
<b>reference:</b> • Argument on call-site is accessed	<pre>void f(std::string const &amp; s) {     //no modification     //efficient for large objects }</pre>	<pre>void f(std::string &amp; s) {     //modification possible     //side-effect also at call-site }</pre>
<b>copy:</b> • Function has its own copy of the parameter	<pre>void f(std::string const s) {     //no modification     //used for maximum constness }</pre>	<pre>void f(std::string s) {     //modification possible     //side-effect only locally }</pre>

- Value Parameter - Default void f(type par);
- Reference Parameter - side-effect void f(type & par);
- Const-Reference Parameter - optimisation void f(type const & par);
- Const Value Parameter - Prevent changing the para void f(type const par);

#### Function Return Type

- By (Const) Value - default type f(); or type const f();
- By Reference - Only return a reference parameter (or a call member variable from a member function) type & f(); or type const & f();

### Functions as Parameters

Functions are "first class" objects in C++. You can pass them as arguments and you can keep them in reference variables.

## 5.4 Variadic Arguments

Variadic functions take a variable number of arguments. This example is even a template function with variadic arguments.

---

```

1 template<typename First, typename...Types>
2 void printAll(First const & first, Types const &...rest) {
3     std::cout << first;
4     if (sizeof...(Types)) {
5         std::cout << ", ";
6     }
7     printAll(rest...);
8 }

```

---

## 5.5 Lambdas

- Can be written into variables `auto l = []() { 1(); };`
- The smallest lambda is `[](){};` the first two brackets are the function object and the round brackets the call.

Defining inline functions. `auto` const for function variable for Lambda. `[]` introduces a Lambda function. Can contain captures: `[=]` or `[&]` to access variables from scope.

---

```

1 auto const g = [](char c) -> {
2     return std::toupper(c);
3 };
4 g('a');

```

---

### 5.5.1 Captures

Captured variables are immutable default. To change them they have to be declared as `mutable`.

- `[=]` - default implicit capture variables used in body by value
- `[&]` - default capture variable used in body by reference
- `[var = value]` - introduce new capture variable with value
- `[=, & out]` - capture all by copy, out by reference
- `[&, = x]` - capture all by reference, but x by copy/value

---

```

1 // Capturing by value
2 int x = 5;
3 auto l = [x]() mutable {
4     std::cout << ++x;
5 };
6 // Capturing by reference
7 auto const l = [&x]() {
8     std::cout << ++x;

```

---

```
9 };
```

---

## 5.6 Functor

Functors are types which provide an operation. Functors have an overloaded call operator. Lambdas internally work with functors. The `operator()` function can theoretically be overload as often as needed.

---

```
1 struct Accumulator {
2     int count{0};
3     int accumulated_value{0};
4     void operator()(int value) {
5         count++;
6         accumulated_value += value;
7     }
8     int average() const {
9         return accumulated_value / count;
10    }
11    int sum() const;
12 };
13
14 int average(std::vector<int> values) {
15     Accumulator acc{};
16     for(auto v : values) { acc(v); }
17     return acc.average();
18 }
19 int main(int argc, char **argv) {
20     std::vector<int> values { 1, 2, 6, 4, 5, 3 };
21     std::cout << average(values);
22 }
```

---

## 6 Exceptions

An exception can throw any copyable type. No means to specify what could be thrown. No check if you catch an exception that might be thrown at call-site. No meta-information is available as part of the exception. Exception thrown while exception is propagated results in a program abort (not while caught).

### 6.1 Failing Functions

What should we do, if a function cannot fulfil its purpose?

1. Ignore the error and provide potentially undefined behaviour
2. Return a standard result to cover the error
3. Return an error code or error value
4. Provide an error status as a side-effect
5. Throw an Exception

#### Ignore the Error

- Relies on the caller to satisfy all preconditions.
- Viable only if not dependent on other resources.
- Most efficient implementation.
- Simple for the implementer but hard for the caller.

#### Error Value

- Only feasible if result domains is smaller than return type
- POSIX defines -1 to mark failure of system calls
- Burden on the caller to check the result

#### Cover the Error with a Standard Result

- Reliefs the caller from the need to care if it can continue with the default value
- Can hide underlying problems.
- Often better if caller can specify its own default value.

#### Cover the Error with a Standard Result

- Requires reference parameter
- (Bad!) Alternative: global variable (POSIX: `errno`)
- E.g: `std::istream` states (`good()`, `fail()`) is changed as a side-effect of input

### 6.2 Catching Exceptions

Principle: Throw by value, catch by const reference. This avoids unnecessary copying and allows dynamic polymorphism for class types.

---


```

1 #include <stdexcept> // contains some subclasses
2 try {
3     throw std::logic_error("message");
4 } catch (type const & e) {
5     //Handle type exception
6 } catch (type2 const & e) {
7     //Handle type2 exception
8 } catch (...) {
9     //Handle other exception types
10 }
```

---

The Standard Library has some pre-defined exception types that you can also use in `<stdexcept>`. All have a constructor parameter for the "reason" of type `std::string`. It provides the `what()` member function to obtain the "reason"



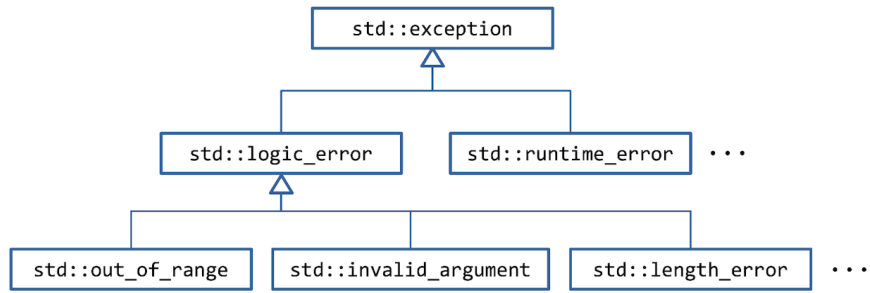

### 6.3 Keyword `noexcept`

Functions can be declared to explicitly not throw an exception with the `noexcept` keyword. The compiler does not need to check it. If an exception is thrown (directly or indirectly) from a `noexcept` function the program will terminate.

## 7 Classes and Operators

Are defined in header files and not in \*.cpp files! The implementation can then be done in a suitable file.

- Class members are implicitly inline.
- A class does one thing well and is named after that.
- A class consists of member functions with only a few lines.
- Has a class invariant: provides guarantee about its state (values of the member variables).
- Don't make member variables const as it prevents copy assignment. Don't add members to communicate between member function calls.
- Member functions should when possible be const, as long as they don't change the this object

---

```
1 class <GoodClassName> {
2     <member variables>
3     <constructor>
4     <member function>
5 };
```

---

Class type in a header file.

---

```
1 #ifndef DATE_H_
2 #define DATE_H_
3 class Date {
4
5     int year, month, day;
6
7 public:
8     Date() = default;
9     Date(int year, int month, int day) : year{year}, month{month}, day{
        day} { /*...*/ }
10    static bool isLeapYear(int year) { /*...*/ }
11
12 private:
13    bool isValidDate() const { /*...*/ }
14 };
15
16 #endif /* DATE_H_ */
```

---

Implementation of the class.

---

```
1 #include "Date.h"
2 Date::Date(int year, int month, int day) : year{year}, month{month},
    day{day} {
3     if (!isValidDate()) {
4         throw std::out_of_range{"invalid date"};
5     }
6 }
7
8 Date::Date() : Date{1980, 1, 1} { } // Default constructor
9
10 Date::Date(Date const & other) : Date{other.year, other.month, other.
    day} { } // copy constructor
11
12 bool Date::isLeapYear(int year) {
```

---

```

13  /* ... */
14  }

```

---

## 7.1 Access Specifier

- private: visible only inside the class (and friends); for hidden data members
- protected: also visible in subclasses
- public: visible from everywhere; for the interface of the class

### Static Member Functions and Variables

No *static* in \*.cpp file only in \*.h file!

## 7.2 Constructors

Function with name of the class and no return type.

- Default Constructor - No parameters. Implicitly available if there are no other explicit constructors. Has to initialize member variables with default values.
- Copy Constructor - Has one <own-type> const & parameter. Implicitly available (unless there is an explicit move constructor or assignment operator). Copies all member variables.
- Move Constructor - Has one <own-type> && parameter. Implicitly available (unless there is an explicit copy constructor or assignment operator). Moves all members
- Typeconversion Constructor - Has one <other-type> const & parameter. Converts the input type if possible. Declare explicit to avoid unexpected conversions.
- \_INITIALIZER List Constructor - Has one std::initializer\_list parameter. Does not need to be explicit, implicit conversion is usually desired.\_INITIALIZER List constructors are preferred if a variable is initialized with { }
- Destructor - Named like the default constructor but with a ~. Must release all resources. Implicitly available. Must not throw an exception. Called automatically at the end of the block for local instances.

---

```

1  class Date {
2  public:
3      Date(int year, int month, int day);
4      Date(); // Default-Constructor
5      Date() = default; // explicit Default-Constructor
6      Date(Date const &); // Copy-Constructor
7      Date(Date &&); // Move-Constructor
8      explicit Date(std::string const &); // Typeconversion-
    Constructor
9      Date(std::initializer_list<Element> elements); //_INITIALIZER List
    -Constructor
10     ~Date(); // Destructor
11     Date(Date const &) = delete; // delete implicit Copy-Constructor
12 };

```

---

## 7.3 Defaulted Constructor

In order not to state the default constructor explicitly in the cpp file it can be defined in the header file of the class. This is also possible for the move and the copy constructor.

---

```
1 #ifndef DATE_H_
2 #define DATE_H_
3 class Date {
4     int year{9999}, month{12}, day{31};
5     //...
6     Date() = default;
7     Date(int year, int month, int day);
8 };
9 #endif /* DATE_H_ */
```

---

## 7.4 Inline Functions

Inline function is a function that is expanded in line when it is called. When the inline function is called whole code of the inline function gets inserted or substituted at the point of inline function call. This substitution is performed by the C++ compiler at compile time. Inline function may increase efficiency if it is small (All the functions defined inside the class are implicitly inline).

## 7.5 Friend Functions

A friend function can be given a special grant to access private and protected members.

## 7.6 Inheritance

Base classes are specified after the name: *class < name >:< base1 >, ..., < baseN >*. Multiple inheritance is possible and inheritance can specify visibility. If no visibility is specified the default of the inheriting class is used.

---

```
1 class Base {
2     private:
3         int onlyInBase;
4     protected:
5         int baseAndInSubclasses;
6     public:
7         int everyoneCanFiddleWithMe
8 };
9 class Sub : public Base {
10     //Can see baseAndInSubclasses and
11     //everyoneCanFiddleWithMe
12 };
```

---

## 8 Operator Overloading

Custom operators can be overloaded for user-defined types. Declared like a function, with a special name: `<returntype> operator op(<parameters>);`. Unary operators -> one parameters and binary operators -> two parameters.

### 8.1 Free Operator

Free operator< uses two parameters of *Date* each *const* & return type *bool*. Is inline when defined in header. The only problem we have is that we don't have access to private members.

---

```

1 // File Any.cpp
2 #include "Date.h" Any.cpp
3 #include <iostream>
4 void foo() {
5     std::cout << Date::myBirthday;
6     Date d{};
7     std::cin >> d;
8     std::cout << "is d older? " << (d < Date::myBirthday);
9 }
10
11 // File Date.h
12 class Date {
13     int year, month, day; // private :-()
14 };
15 inline bool operator<(Date const & lhs, Date const & rhs) {
16     return lhs.year < rhs.year || // Does not WOKR!
17     (lhs.year == rhs.year && (lhs.month < rhs.month ||
18     (lhs.month == rhs.month && lhs.day == rhs.day)));
19 }

```

---

### 8.2 Member Operator

Member operator< uses one parameter of type *Date*, which is *const&*, return type *bool* and Right-hand side of operation. Implicit this object: *const* due to qualifier, left-hand side of operation.

---

```

1 // File Any.cpp
2 #include "Date.h"
3 #include <iostream>
4 void foo() {
5     std::cout << Date::myBirthday;
6     Date d{};
7     std::cin >> d;
8     std::cout << "is d older? " << (d < Date::myBirthday);
9 }
10 // File Date.h
11 class Date {
12     int year, month, day; // private :-()
13     bool operator<(Date const & rhs) const {
14     return year < rhs.year ||
15     (year == rhs.year && (month < rhs.month ||
16     (month == rhs.month && day == rhs.day)));

```

```

17     }
18 };

```

---

### 8.3 Greater / smaller than / same Overload

---

```

1 // word.h
2 class Word {
3 private:
4     std::string word;
5
6 public:
7     Word() = default;
8     Word(std::string word);
9
10    std::ostream & print(std::ostream & os) const;
11    std::istream & read(std::istream & is);
12
13    bool operator<(Word const & rhs) const;
14 };
15
16 inline std::ostream & operator<<(std::ostream & os, Word const & word)
17     {
18     return word.print(os);
19 }
20 inline std::istream & operator>>(std::istream & is, Word & word) {
21     return word.read(is);
22 }
23
24 inline bool operator>(Word const & lhs, Word const & rhs) {
25     return rhs < lhs;
26 }
27
28 inline bool operator>=(Word const & lhs, Word const & rhs) {
29     return !(lhs < rhs);
30 }
31
32 inline bool operator<=(Word const & lhs, Word const & rhs) {
33     return !(rhs < lhs);
34 }
35
36 inline bool operator==(Word const & lhs, Word const & rhs) {
37     return !(lhs < rhs) && !(rhs < lhs);
38 }
39
40 inline bool operator!=(Word const & lhs, Word const & rhs) {
41     return !(lhs == rhs);
42 }
43
44 // word.cpp
45 bool Word::operator<(Word const & rhs) const {

```

---

```
46     return std::lexicographical_compare(word.begin(), word.end(), rhs.  
    word.begin() ,rhs.word.end(), [](char lhs, char rhs) {  
47         return std::tolower(lhs) < std::tolower(rhs);  
48     });  
49 }
```

---

## 9 Enums

- Enums can be used for types that hold a few values.
- Every enum field can be converted into an int, starting with the 0.
- The names of an Enum cant be given out as default. For this a lookuptable is needed.
- With the class keyword (Scoped Enum) the type of the enum is not visible outside the namespace. The normal unscoped Enum is visible outside the namespace.

---

```
1 enum [class] <name> {  
2     <enumerators>  
3 };  
4  
5 enum class day_of_week {  
6     Mon, Tue, Wed, Thu, Fri, Sat, Sun // 0 - 6  
7  
8     day_of_week operator++ (day_of_week & aDay) {  
9         int day = (aDay + 1) % (Sun + 1); // Conversion to int  
10        aDay = static_cast<day_of_week>(day);  
11        return aDay;  
12    }  
13 };
```

---



## 10 Namespaces

- Namespaces are scopes for grouping and preventing name clashes.
- Global namespaces has the :: prefix.
- Nesting of namespaces is possible.
- Nesting of scopes allows hiding of names.
- Namespaces can only be defined outside of classes and functions.
- The same namespace can be opened and closed multiple times.
- Qualified names are. used to access names in a namespace: `demo::subdemo::foo()`
- A name with a leading :: is called fully qualified name: `::std::cout`.
- `using namespace` shouldn't be used.

---

```

1 namespace demo {
2 void foo(); //1
3 namespace subdemo {
4 void foo() { /*2*/ }
5 } // subdemo
6 } // demo
7
8 namespace demo {
9 void bar() {
10     foo(); //1
11     subdemo::foo(); //2
12 }
13 }
14
15 void demo::foo() { /*1*/ } // definition
16
17 int main() {
18     using demo::subdemo::foo;
19     foo(); //2
20     demo::foo(); //1
21     demo::bar();
22 }
23

```

---

### 10.1 Using Declaration

- Import a name from a namespace into the current scope
  - That name can be used without a namespace prefix
  - Useful if the name is used very often
- Alternative: using alias for types if name is long
- There are also using directives, which import ALL names of a namespace into the current scope.
  - Use them only in local scope to avoid "pollution" of your namespace.

### 10.2 Anonymous Namespaces

- Special case: omit name after namespace
- Implicit using directive for the chosen stream
- Hides modules internals
- Use them only in source files (\*.cpp)

### 10.3 Name Resolution of Namespace Members

Types and (non-member) functions belonging to that type should be placed in a common namespace. The Advantage is *Argument Dependent Lookup! ADL*: When the compiler encounter an unqualified function or operator call with an argument of a user-defined type it looks into the namespaces in which that type is defined to resolve the functionoperator. E.g. it is not necessary to write `std::` in front of `for_each` when `std::vector::begin()` is an argument of the function.

### 10.4 Arithmetic Types

Disclaimer: You usually do not want to implement your own arithmetic types! We will cover the basics.

- Arithmetic types must be equality comparable
- Boost can be used to get `!=` operator  $\rightarrow$  `boost::equality_comparable`
- It might be convenient to have the output operator
- Result must be in a specific range (Modulo)

## 11 Container and Collections

**Container** Contains objects with value (vector, string, set, map)

**Collection** Contains objects by reference

- Container can be copied easily using the constructor (deep copy). `std::vector<int> vv{};`
- Container support the "clear()" function which empty the container.
- There are three types of containers: Sequence Containers, Associative Containers and Hashed Containers.
- With containers member function should be preferred over STL.
- Two containers with the same type can be compared `c1 == c2`

Containers can be: default-constructed, copy-constructed from another container of the same type, equality compared, emptied with clear().

- Sequence Containers (vector, deque, list, array)
  - Elements are accessible in order as they were inserted/created.
  - Find in linear time through the algorithm find.
- Associative Containers (set, multiset, map, multimap)
  - Elements are accessible in sorted order
  - find as member function in logarithmic time
- Hashed Containers (unordered\_map, unordered\_multimap, unordered\_set, unordered\_multiset)
  - Elements are accessible in unspecified order
  - find as member function in constant time

Member Function	Purpose
begin() end()	Get iterators for algorithms and iteration in general
erase(iter)	Removes the element at position the iterator iter points to
insert(iter, value)	Inserts value at the position the iterator iter points to
size() empty()	Check the size of the container

Figure 3: Member Function of a Container

### 11.1 Common Container Constructors

---

```

1 // Constructor with Initializer List
2 std::vector<int> v{1,2,3,5,6,11};
3 // Construction with a number of elements, five times a 42
4 std::list<int> l(5,42);
5 // Range with a pair of iterators
6 std::deque<int> q{begin(v), end(v)};
```


---

### 11.2 Array

C++'s `std::array<T, N>` is a fixed-size Container. T is a template type parameter (= placeholder for type). N is a positive integer, template non-type parameter (= placeholder for a value). Elements can be accessed with a subscript operator `[]` or `at()`. The size is bound to the array object and can be queried using `.size()`. Avoid plain C-Array whenever possible: `int arr[]{1, 2, 3, 4, 5};`


- `at()` throws an exception on invalid index access

- `[]` has undefined behavior on invalid index access Behavior
- The size of an array must be known at compile-time and cannot be changed. Otherwise it contains N default-constructed elements: `std::array<int, 5> emptyArray;`

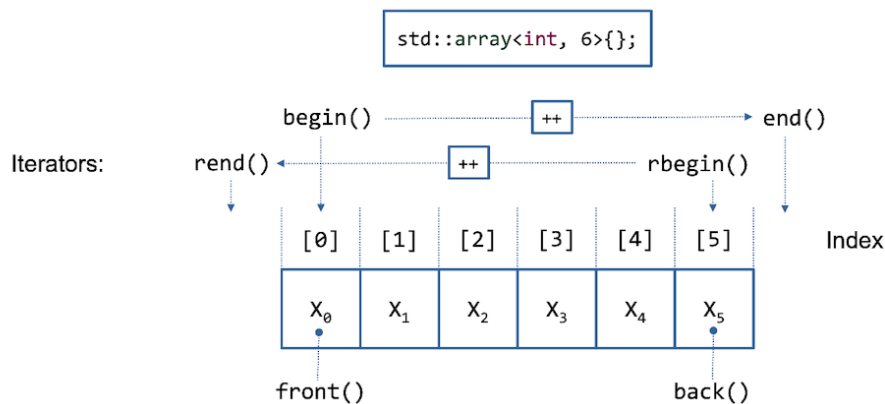

### 11.3 Vector

- C++'s `std::vector<T>` is a Container = contains its elements of type T (no need to allocate them).
- The elements are allocated on the heap.
- If a vector is passed to a function we can prevent a copy when we pass it as `const`.

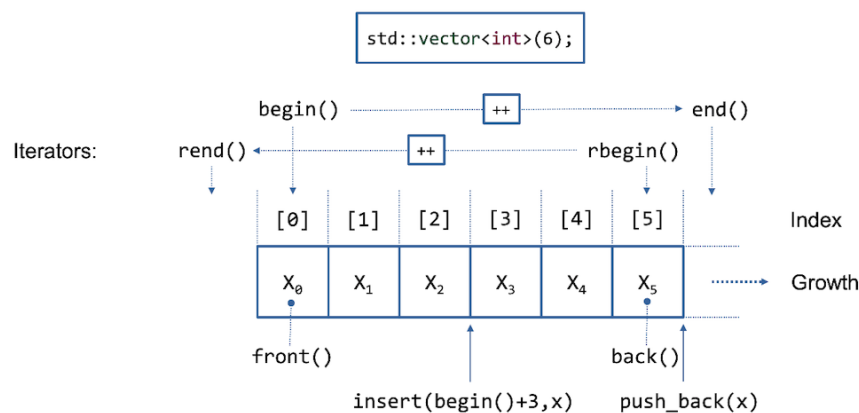

#### Append Elements to an `std::vector<T>`

- `v.push_back(<value>);`
- `v.insert (<iterator-position>, <value>);`

#### Filling a Vector with Values

```

1 std::vector<int> v{};
2 v.resize(10);
3 std::fill(std::begin(v), std::end(v), 2);
4
5 std::vector<int> v(10);
6 std::fill(std::begin(v), std::end(v), 2);
7
8 std::vector v(10, 2);
9

```

---

```

10 // Filling increased values with iota
11 std::vector<int> v(100); std::iota(std::begin(v), std::end(v), 1);

```

---

### Finding and counting elements of a vector

`std::find()` and `std::find_if()` return an iterator to the first element that matches the value or condition.

---

```

1 auto zero_it = std::find(std::begin(v), std::end(v), 0); if (zero_it
  == std::end(v)) {
2 std::cout << "no zero found \n"; }

```

---

## 11.4 Double-Linked List

- Very efficient inserting at any position.
- Lower efficiency in bulk operations.
- Only bi-directional iterators - no index access

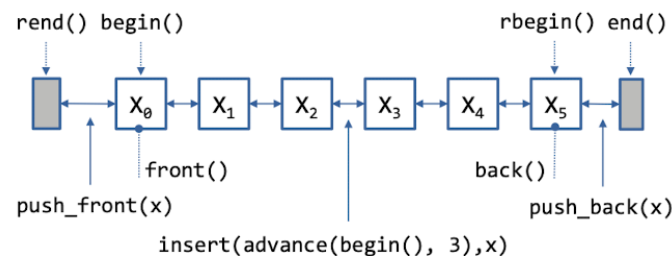


Figure 4: Double-Linked List

---

```

1 std::list<int> l = { 7, 5, 16, 8 };
2 l.push_front(25);
3 l.push_back(13);
4 // Insert an integer before 16 by searching
5 auto it = std::find(l.begin(), l.end(), 16);
6 if (it != l.end()) {
7     l.insert(it, 42);
8 }

```

---

## 11.5 Double-ended Queue, Deque

Are like a vector, but additionally elements can be added efficiently to the start of the container.

## 11.6 Queue, FIFO Adapter

In contrast to the Stack takes "pop()" the element from the begin of the Queue.

---

```

1 std::queue<int> q{};
2 q.push(42);
3 std::cout << q.front();
4 q.pop();

```

---

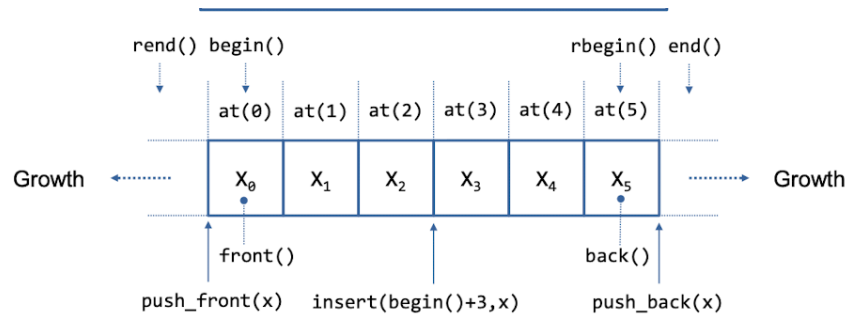


Figure 5: Deque

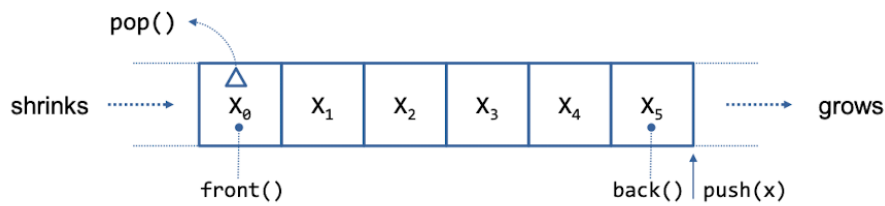


Figure 6: Queue

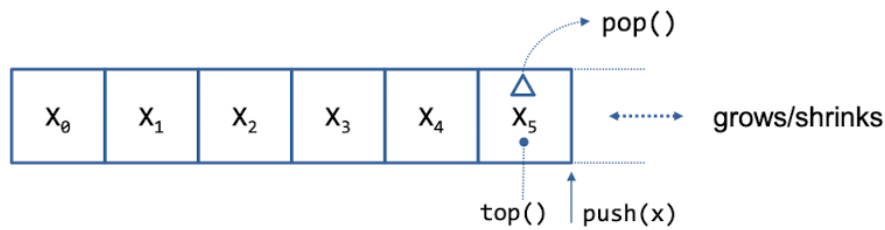


Figure 7: Stack

## 11.7 Stack, LIFO Adapter

## 11.8 Set

The set does save all the elements in a tree. As a result there are no duplicates and all the elements are sorted automatically.

---

```

1 #include <set>
2 std::set<int> s {7,1,4,3,2,5,6};
3
4 #include <string>
5 #include <algorithm> -> transform
6 #include <iostream> -> cout
7 #include <iterator> -> ostream_iterator
8 #include <cctype> -> lowercase
9
10 // insert
11 std::string const input{"test string"};
12 std::set<char> myset { };
13 std::transform(input.begin(), input.end(), inserter(myset, myset.begin
    ()), [](char c) {

```

---

```

14     return tolower(c);
15 });
16
17 // print
18 std::ostream_iterator<char> out {std::cout}
19 std::copy(myset.begin(), myset.end(), out);

```

---

## 11.9 Multiset

In contrast to the set does the multiset allow duplicates.

---

```

1 #include <iostream>
2 #include <iterator>
3 #include <string>
4 #include <set>
5
6 using in=std::istream_iterator<std::string>;
7 using out=std::ostream_iterator<std::string>;
8 std::multiset<std::string> words{in{std::cin},in{}};
9 copy(cbegin(words), cend(words), out(std::cout, "\n"));

```

---

## 11.10 Map

In a map key-value pairs are stored, where the value can be in the set multiple times but the key is unique. Also the keys are stored in ascending order. The over can be overwritten with a 3rd template parameter.

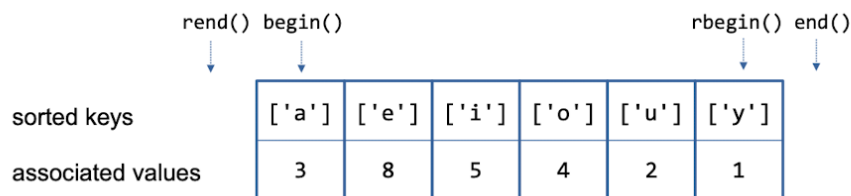


Figure 8: Map

---

```

1 std::map<char, size_t> vowels
2 {{{'a',0},{ 'e',0},{ 'i',0},{ 'o',0},{ 'u',0},{ 'y',0}}};
3
4 // Increment Value of Key
5 ++vowels['a'];
6
7 // Beim Iterieren ist jedes Element ein pair<char, size>
8 for(auto const &p:vowels) {
9     std::cout << p.first << " = " << p.second << "\n";
10 }

```

---

## 11.11 Multimap

Allows to have multiple keys.

## 12 STL Algorithms

The "algorithm.h" are the algorithms defined for general purpose. and in the "numeric.h" are the general numeric functions.

What are the advantages of the STL algorithms?

- Correctness
  - It is much easier to use an algorithm correctly than implementing loops correctly.
- Readability
  - Applying the correct algorithm expresses your intention much better than a loop.
  - Someone else will appreciate it when the code is readable and easily understandable.
- Performance
  - Algorithms might perform better than handwritten loops

### Iterator for Ranges

- First - Iterator pointing to the first element.
- Last - Iterator pointing to the last element.
- if First == Last the range is empty.

---

```
1 std::vector<int> values{54, 23, 17, 95, 85, 57, 12, 9};  
2 std::xxx(begin(values), end(values), ...);
```

---

### 12.1 Functor

### 12.2 Examples

### 12.3 Pitfalls



## 13 Function Templates

Can be compared as a Generic in Java. The keyword "template" is used to declare a template. The template parameter list contains one or more templates parameters. The compiler resolves the function template and figures out the template arguments. C++ uses duck-typing. So every type can be used as argument as long as it supports the used operations.

---

```

1 template <Template-Parameter-List>
2 FunctionDefinition

```

---

```

1 // file min.h
2 template <typename T>
3 T min(T left, T right) {
4     return left < right ? left : right;
5 }
6 // file smaller.cpp
7 #include "min.h" smaller.cpp
8 #include <iostream>
9 int main() {
10     int first;
11     int second;
12     if (std::cin >> first >> second) {
13         auto const smaller = min(first, second); std::cout << "Smaller of
            " << first << " and " << second << " is: " << smaller << '\n';
14     }
15 }

```

---

### Template Definition

- Templates are usually defined in a header file
  - A compiler needs to see the whole template definition to create an instance
  - Function template definitions are implicitly inline
- The definition in a source file is possible, but then it can only be used in that translation unit.
- Type checking happens twice
  - When the template is defined: only basic checks are performed: syntax and resolution of names that are independent of the template parameters.
  - When the template is instantiated (used): The compiler checks whether the template arguments can be used as required by the template.

### Template Argument Deduction

#### 13.1 Variadic Templates

## 14 Class Templates

- In addition to functions also class types can have template parameters
- Since C++17, similar to function templates, the compiler might deduce the template arguments
- Compile-time polymorphism
- Class templates can be specialized

### Rules

- Define class templates completely in header files
- Member functions of class templates
  - Either in class template directly
  - Or as inline function templates in the same header file
- When using language elements depending directly or indirectly on a template parameter, you must specify typename when it is naming a type.
- static member variables of a template class can be defined in header without violating ODR, even if included in several compilation units.

---

```

1  std::vector<int> oldValues{1, 2, 3};
2
2  std::vector<int> newValues{1, 2, 3};
3  std::vector<int> emptyValues{};
3

```

---

```

1  template <TemplateParameters>
2  class TemplateName { /*...*/ };
3
4  template <typename T>
5  class Stack { /*...*/ };

```

---

### Example

---

```

1  template <typename T>
2  class Sack {
3      using SackType = std::vector<T>;
4      using size_type = typename SackType::size_type;
5      SackType theSack{};
6
7  public:
8      bool empty() const {
9          return theSack.empty();
10     }
11     size_type size() const {
12         return theSack.size();
13     }
14     void putInto(T const & item) {
15         theSack.push_back(item);
16     }
17     T getOut();
18 };

```

---

### Definieren einer Funktion ausserhalb der Klassendefinition

---

```

1  template <typename T>

```

---

---

```
2 inline T Sack<T>::getOut() {
3     if (empty()) {
4         throw std::logic_error{"Empty Sack"};
5     }
6     auto index = static_cast<size_type>(rand() % size());
7     T retval{theSack.at(index)};
8     theSack.erase(theSack.begin() + index);
9     return retval;
10 }
```

---

### 14.1 Type Aliases (C++11)

It is common for template definitions to define type aliases in order to ease their use. This has the advantage of less typing and reading as also a single point to change the aliased type. Before used typedef.

---

```
1 using StackType = std::vector<T>;
```

---

## 15 Dynamic Heap Memory Management

- Stack memory is scarce
- It might be needed for creating object structures.
- Also needed for polymorphic factory functions to class hierarchies.
- Dont do it yourself! Always rely on library classes for managing the heap.
- Resource Acquisition Initialization (RAII) Idiom
  - Allocation in the constructor
  - Deallocation in the desctructor
  - Use RAIi wrapper as value in local scope
  - Destructor will be called when the scoped is exited({}, return or exception).

### 15.1 Smart Pointers

In the modern C++ world we can use smart pointers, which are C++ templates, to make memory management easier. With these smart pointers we dont have to call "delete ptr;" by ourselves. Still: always prefer storing the value locally as value-type variable (Stack-based or member).

- Delete Pointer - must never be called.
- Unique Pointer - for unshared Heap Memory (cant be copied).
- Shared Pointer - for shared Heap Memory (work as Java references, can be copied and moved).
- If the last "shared\_ptr" handle gets destroyed, the allocated object gets deleted.
- Shared Pointer have the problem of cycles. For this reason there is a "weak\_ptr" to break the cycles.

#### 15.1.1 std::unique\_ptr<T>

- defined in "<memory>"
- Used for unshared heap memory
  - Or for local stuff that must be on the heap
  - Can be returned from a factory function
- Only a single owner exists
- It can wrap to-be-freed pointers from C functions when interfacing legacy code.
- Not the best for class hierarchies
- Can not be copied

#### 15.1.2 std::shared\_ptr<T>

- Works more like a java reference and allows multiple owners.
- The pinter is "std::shared\_ptr" and associates objects of Type T using "Std::makeshared<T>(..)".

---

```

1 struct Article { Article(std::string title, std::string content);
2   //..
3 };
4 Article cppExam{"How to pass CPl?", "In order to pass the C++ exam,
   you have to..."};
5 std::shared_ptr<Article> abcPtr = std::make_shared<Article>("Alphabet"
   , "ABCDEFGHIJKLMNOPQRSTUVWXYZ");

```

---

#### What is it for?

- If you really need heap-allocated objects, because you create your own object networks you can use std::shared\_ptr<T>

- If you need to support run-time polymorphic container contents or class members that can not be passed as reference, e.g., because of lifetime issues
- Factory functions returning `std::shared_ptr` for heap allocated objects.
- But first check if alternatives are viable:
  - (const) references as parameter types or class members
  - Plain member objects or containers with plain class instances

The usage is counted on the referenced object to keep track of how many reference currently point to this object on the heap.

### 15.1.3 `std::weak_ptr<T>`

## 16 Inheritance