



Politecnico di Milano
A.A. 2015-2016

Software Engineering 2

Code Inspection

Matteo Bulloni (852676), Marco Cannici (852527)

5 January 2016

Contents

1	Assigned class	3
2	Functional Role	4
2.1	JTS Transaction Service	4
2.2	CurrentTransaction class	4
2.3	endAborted method	5
2.4	sendingReply method	7
3	Code Inspection	10
3.1	Class Analysis	10
3.2	Method analysis: “endAborted”	13
3.3	Method analysis: “sendingReply”	16
4	Appendix	22
4.1	Hours of work	22
4.2	Softwares and tools used	22

1 Assigned class

The class assigned to us is called “**CurrentTransaction**” (namespace: `com.sun.jts.CosTransactions.CurrentTransaction`) which is located in the following path relative to the root of GlassFish project: `appserver/transaction/jts/src/main/java/com/sun/jts/CosTransactions/CurrentTransaction.java`

The following are the methods of the “**CurrentTransaction**” class assigned to us:

- Name: ***endAborted***(*boolean [] aborted , boolean endAssociation*)
Start Line: 374
- Name: ***sendingReply***(*int id , PropagationContextHolder holder*)
Start Line: 1035

2 Functional Role

2.1 JTS Transaction Service

The class **CurrentTransaction** assigned to us is part of the Java™ Transaction Service (JTS) implementation by Oracle.

The “*Java™ Transaction Service (JTS) Specification*”[2] says:

JTS specifies the implementation of a transaction manager which supports the JTA (Java Transaction API) specification at the high-level and implements the Java mapping of the OMG Object Transaction Service (OTS) 1.1 Specification at the low-level.

The Object Transaction Service is a paradigm that allows distributed access to resorces and computation (remote method calls).[1]

2.2 CurrentTransaction class


The “CurrentTransaction” class is a static class that does not implement any interface and is used to keep track of the associations between transactions and threads.

The following is the JavaDoc of the class:

```
81  /**This class manages association of transactions with threads in a process,  
82   * and associated state/operations.  
83   *  
84   * @version 0.01  
85   *  
86   * @author Simon Holdsworth, IBM Corporation  
87   *  
88   * @see  
89   */
```

For each thread the class keeps track of the transactions with which it is associated to, the list of suspended transactions (which are transactions that have been suspended because a new request has been received while they were running) and the list of RegisteredStatics objects that will be informed of any changes in the associations of the thread with the transactions. The class exposes methods to modify the current association of the thread and the list of suspended transactions and to retrieve the list of transactions associated to the current thread. It also exposes methods to notify the Control object that a reply or a request has been (or is about to be) either received or sended. The Control object associated to each transaction allows access to a Terminator object (which provides methods for commit or rollback) and a Coordinator object (which involves Resource objects in a transaction when they are registered[1]).

The following is a class diagram showing the main classes with which CurrentTransaction class interact with:

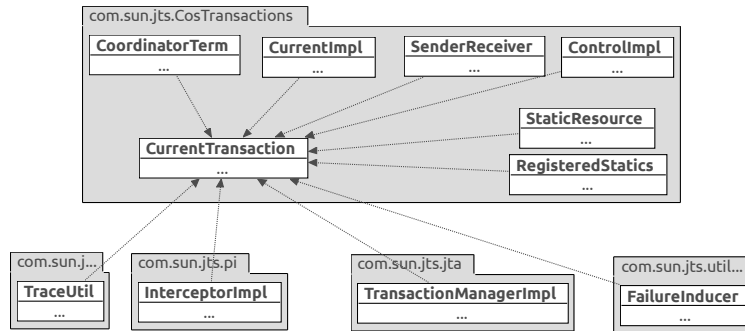

2.3 endAborted method

This is a private method of the class “CurrentTransaction”, it is used to ensure that the Control object associated with the current thread does not represent a transaction that has already been aborted, eventually terminating the current association and replacing it with an active one.

The following are the JavaDoc and the declaration of the method:


```

353  /**Ensures that an association with an aborted transaction is dealt with
354  ↪ cleanly.
355  *
356  *
357  * TN - do not dissociate thread even if it's aborted!!
358  *
359  * If the current Control object represents a transaction that has been
360  * aborted, this method replaces the association by one with the first
361  * ancestor that has not been aborted, if any, or no association, and the
362  * method returns true as the output parameter. Otherwise the method
363  ↪ returns
364  * false as the output parameter.
365  * <p>
366  * If there is a current Control object in either case it is returned,
367  * otherwise null is returned.
368  *
369  * @param aborted A 1-element array which will hold the aborted
370  ↪ indicator.
371  *
372  * @return The current Control object.
373  *
374  * @see
375  */
376  private static ControlImpl
377  endAborted( boolean[/1*/] aborted, boolean endAssociation) {

```

The method checks if the transaction associated with the current thread has already been aborted (communicating it to the caller through the boolean output parameter “**aborted**”) by checking his status. In that case, and if the method has been called with “**endAssociation**” argument set to true, the method replaces the association to the current thread with the first ancestor that has not been aborted by calling *popAborted()* ‘s Control method, resuming it. The method also deals with informing all the registered StaticResource objects that the old thread association has been terminated and a new one has

been established.

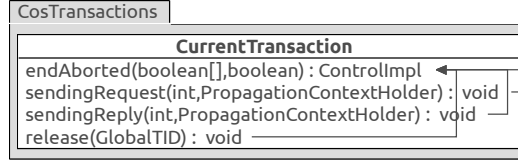

This method is used by the public and friendly methods *release()*, *sendingReply()* and *sendingRequest()* of CurrentTransaction class. To show how the method is actually used, we report the code snippets where it is called of the methods listed above:

```

776      // Ensure that the current Control object is valid. Return
777      ↪ immediately if
778      // not.
779
780      boolean[] outBoolean = new boolean[1];
781      ControlImpl current = endAborted(outBoolean, false);
782      if( outBoolean[0] ) {
783          TRANSACTION_ROLLEDBACK exc = new TRANSACTION_ROLLEDBACK(0,
784          ↪ CompletionStatus.COMPLETED_NO);
785          throw exc;
786      }
  
```

Listing 1: sendingRequest() calls endAborted()

```

1059     // Ensure that the current Control object is valid. Return
1060     ↪ immediately if not.
1061
1062     boolean[] outBoolean = new boolean[1];
1063     ControlImpl current = endAborted(outBoolean, true); // end
1064     ↪ association
1065     if( outBoolean[0] ) {
1066         importedTransactions.remove(Thread.currentThread());
1067         TRANSACTION_ROLLEDBACK exc = new TRANSACTION_ROLLEDBACK(0,
1068         ↪ CompletionStatus.COMPLETED_YES);
1069         throw exc;
1070     }
  
```

Listing 2: sendingReply() calls endAborted()

```

1256     // Ensure that the current Control object is valid.
1257     boolean[] outBoolean = new boolean[1];
1258     ControlImpl control = endAborted(outBoolean, true); // end
1259     ↪ association
1260     if( outBoolean[0] ) {
1261         importedTransactions.remove(Thread.currentThread());
1262         return; // thread is not associated with tx, simply return
1263     }
  
```

Listing 3: release() calls endAborted()

Whenever it is expected that the current thread is associated with an active transaction (not aborted) the method *endAborted()* is invoked to check it

by looking at the output parameter **outBoolean**. If the transaction has already been aborted the methods return, eventually by reasing an exception to communicate the unexpected behaviour.

2.4 sendingReply method

This is a public method of the “CurrentTransaction” class and it is called to inform the Coordinator of the current transaction that an imminent reply is about to be performed and so the association between the transaction and the current thread should be ended.

The following are the JavaDoc and the declaration of the method:

```


1021  /**Informs the object's Coordinator that a reply is being sent to the
1022  ↪ client.
1023  *
1024  * @param id      The request identifier.
1025  * @param holder  The context to be returned on the reply.
1026  *
1027  * @exception INVALID_TRANSACTION The current transaction has
1028  ↪ outstanding work
1029  *   on this reply, and has been marked rollback-only, or the reply is
1030  ↪ returning
1031  *   when a different transaction is active from the one active when the
1032  ↪ request
1033  *   was imported.
1034  * @exception TRANSACTION_ROLLEDBACK The current transaction has already
1035  ↪ been
1036  *   rolled back.
1037  * @see
1038  */
1039  static void sendingReply( int id,
1040                          PropagationContextHolder holder )
1041  throws INVALID_TRANSACTION , TRANSACTION_ROLLEDBACK {

```

The method is responsible to check that the current transaction is actually still active and there are no pending computation that must be terminated. To accomplish the first task the “**endAborted()**” method (see section 2.3 for a more detailed explanation) is called to check if the transaction has already been aborted, and if so a *TRANSACTION_ROLLBACK* exception is raised communicating that the transaction is already completed (*Completion-Status.COMPLETED_YES*) and the Coordinator is set is rollback only mode bu callid *rollback_only()* method. For what concern the second task, the method requests the status of the Coordinator by calling his *replyAction()* method:

- If there are still subtransactions that have not been completed yet (the value *CoordinatorImpl.activeChildren* has been returned) an *INVALID_TRANSACTION* exception is raised communicating the error code “*MinorCode.UnfinishedSubtransactions*”
- If the transaction is still associated to a thread different from the current one or there are outgoing requests of the Coordinator that have not been completed yet an *INVALID_TRANSACTION* exception is raised communicating the error code “*MinorCode.DeferredActivities*”

Finally, the method deals with terminating the association with the transaction keeping consistent the list of transactions associated with the current thread, and resuming the last transaction that had been suspended by calling “*endCurrent()*” method.

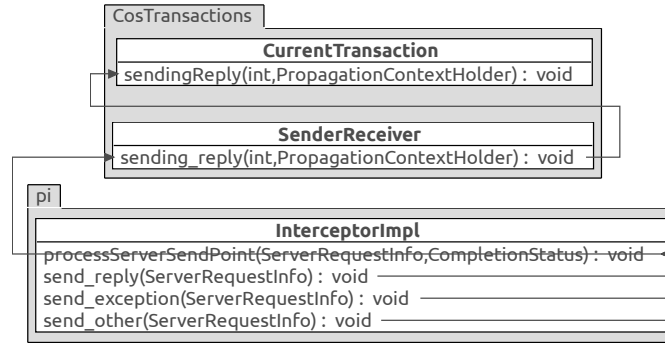

The *sendingReply()* method is called whenever the methods *send_reply()*, *send_exception()* and *send_other()* of the **InterceptorImpl** class are invoked passing through *processServerSendPoint()* and *sending_reply()* calls, as shown in the class diagram above.

A detailed explanation of what Interceptors are and when *send_reply()*, *send_exception()* and *send_other()* are called is provided in “*Transaction Service Specification*”[1] and “CORBA Request Portable Interceptors: A Performance Analysis”[3] documents. We report below the most significant parts:

Portable Request Interceptors (PIs) are a mechanism allowing to modify the ORB or the application behaviour upon the event of sending or receiving a message (e.g. a request, a reply or an exception) without impacting either on the ORB code or on the application one.

The Transaction Service and the ORB must cooperate to realize certain Transaction Service function. This cooperation is realized on the **client invocation path** and through the transaction interceptor.

Request Interceptors are classified in client request interceptors and server request interceptors. The former are installed in client-side ORBs and can intercept outgoing requests and contexts as well as incoming replies and exceptions. Conversely, the latter are installed in server-side ORBs and can intercept incoming requests and contexts as well as outgoing replies and exceptions. Server request interceptors are activated either upon receiving a request (by implementing the `receive_request()`, `receive_poll()` or `receive_request_service_contexts()`) or upon the sending of a reply or

of an exception (by implementing the `send_reply()`, `send_exception()` or `send_other()` methods).

3 Code Inspection

3.1 Class Analysis

1. All class names, interface names, method names, class variables, method variables, and constants used should have meaningful names and do what the name suggests.

- method names:
 - line 1302: “endAll()” method is not implemented
 - line 1358: “shutdown()” method is not implemented
 - line 1371: “dump()” method is not implemented
- method variables:
 - line 750: the argument “id” of the method “sendingRequest” is never been used inside the function so it could be removed

```
750     static void sendingRequest( int id,
751                                PropagationContextHolder
752                                throws TRANSACTION_ROLLEDBACK, TRANSACTION_REQUIRED {
                                ↪ holder )
```

6. Class variables, also called attributes, are mixed case, but might begin with an underscore (‘_’) followed by a lowercase first letter. All the remaining words in the variable name have their first letter capitalized. Examples: `_windowHeight`, `timeSeriesData`.

- line 111: the variable “m_tid” doesn’t respect the naming convention because the underscore could only appear at the beginning of the name

```
111     private static ThreadLocal m_tid=new ThreadLocal();
```

23. Check that the javadoc is complete (i.e., it covers all classes and files part of the set of classes assigned to you).

For the following public and friendly methods and class variables is not provided a javadoc documentation:

- line 346: “isTxAssociated()” public method

```
346     public static boolean isTxAssociated() {
```

- line 102 “statsOn()” friendly method

```
102     static boolean statsOn=false;
```

- line 119 “_logger”: friendly class variable

```
119     static Logger _logger = LogDomains.getLogger(CurrentTransaction.  
    ↪ class, LogDomains.TRANSACTION_LOGGER);
```

The following are methods for which it is reported a javadoc documentation but the meaning of some arguments or thrown exception is not clarified:

- line 374: the meaning of the argument “endAssociation” is not provided in the documentation

```
353     /**Ensures that an association with an aborted transaction is  
    ↪ dealt with cleanly.  
354     *  
355     *  
356     * TN - do not dissociate thread even if it's aborted!!  
357     *  
358     * If the current Control object represents a transaction that  
    ↪ has been  
359     * aborted, this method replaces the association by one with  
    ↪ the first  
360     * ancestor that has not been aborted, if any, or no  
    ↪ association, and the  
361     * method returns true as the output parameter. Otherwise the  
    ↪ method returns  
362     * false as the output parameter.  
363     * <p>  
364     * If there is a current Control object in either case it is  
    ↪ returned,  
365     * otherwise null is returned.  
366     *  
367     * @param aborted A 1-element array which will hold the  
    ↪ aborted indicator.  
368     *  
369     * @return The current Control object.  
370     *  
371     * @see  
372     */  
373     private static ControlImpl  
374     endAborted( boolean[]/*1*/ aborted, boolean endAssociation  
    ↪ ) {
```

- line 493: It is not specified when the method “getCurrent” could raise the exception TRANSACTION_ROLLEDBACK

```
480     /**Returns the current Control object.  
481     * <p>  
482     * That is, the Control object that corresponds to the thread  
483     * under which the operation was invoked. If there is no such  
    ↪ association the  
484     * null value is returned.  
485     *
```

```

486      * @param
487      *
488      * @return The current Control object.
489      *
490      *
491      * @see
492      */
493      public static ControlImpl getCurrent()
494          throws TRANSACTION_ROLLEDBACK {

```

- line 1199: the meaning of the argument “timeout” is not provided in the documentation

```

1192      /**
1193      * Recreates a transaction based on the information contained
1194      * ↪ in the
1195      * transaction id (tid) and associates the current thread of
1196      * ↪ control with
1197      * the recreated transaction.
1198      *
1199      * @param tid the transaction id.
1200      */
1201      public static void recreate(GlobalTID tid, int timeout) {

```

25. The class or interface declarations shall be in the following order:

The following class variables should be declared before the private ones because they are friendly (as described in the point 28. these variables could be declared private because they are used only inside this class)

- line 102: “statsOn” friendly variable

```

101      //store the suspended and associated transactions support only
102      ↪ if stats are required
103      static boolean statsOn=false;

```

- line 119: “_logger” friendly variable

```

116      /*
117      * Logger to log transaction messages
118      */
119      static Logger _logger = LogDomains.getLogger(CurrentTransaction.
120      ↪ class, LogDomains.TRANSACTION_LOGGER);

```

28. Check that variables and class members are of the correct type. Check that they have the right visibility (public/private/protected).

The following class variables could be declared private because they are only used inside the current class:

- line 102: “statsOn” friendly variable

```
102     static boolean statsOn=false;
```

- line 119: “_logger” friendly variable

```
119     static Logger _logger = LogDomains.getLogger(CurrentTransaction.  
    ↪ class, LogDomains.TRANSACTION_LOGGER);
```

3.2 Method analysis: “endAborted”

```
353     /**Ensures that an association with an aborted transaction is dealt with  
    ↪ cleanly.  
354     *  
355     *  
356     * TN - do not dissociate thread even if it's aborted!!  
357     *  
358     * If the current Control object represents a transaction that has been  
359     * aborted, this method replaces the association by one with the first  
360     * ancestor that has not been aborted, if any, or no association, and the  
361     * method returns true as the output parameter. Otherwise the method  
    ↪ returns  
362     * false as the output parameter.  
363     * <p>  
364     * If there is a current Control object in either case it is returned,  
365     * otherwise null is returned.  
366     *  
367     * @param aborted A 1-element array which will hold the aborted  
    ↪ indicator.  
368     *  
369     * @return The current Control object.  
370     *  
371     * @see  
372     */  
373     private static ControlImpl  
374     endAborted( boolean /*1*/ aborted, boolean endAssociation) {  
375  
376         // Get the current thread identifier, and the corresponding Control  
    ↪ object  
377         // if there is one.  
378  
379         boolean completed = true;  
380         aborted[0] = false;  
381  
382         ControlImpl result = (ControlImpl)m_tid.get();  
383  
384         // If there is a current Control object, and it represents a  
    ↪ transaction that  
385         // has been aborted, then we need to end its association with the  
    ↪ current  
386         // thread of control.  
387  
388         if( result != null )  
389             try {  
390                 completed = (result.getTranState() != Status.StatusActive);  
391             } catch( Throwable exc ) {  
392                 _logger.log(Level.FINE, "", exc);  
393             }  
394
```

```

395         if( result != null && completed ) {
396             if (endAssociation) {
397                 synchronized(CurrentTransaction.class){
398                     if(statsOn){
399                         Thread thread = Thread.currentThread();
400                         threadContexts.remove(thread);
401                     }
402                     m_tid.set(null);
403
404                     // XA support: If there was a current IControl, inform all
405                     ↪ registered
406                     // StaticResource objects of the end of the thread
407                     ↪ association.
408                     // Allow any exception to percolate to the caller.
409
410                     if( statics != null )
411                         statics.distributeEnd(result,false);
412
413                     // Discard all stacked controls that represent aborted or
414                     ↪ unrecognised
415                     // transactions.
416
417                     result = result.popAborted();
418
419                     // If there is a valid ancestor, make it the current one.
420
421                     if( result != null ) {
422                         m_tid.set(result);
423                         if(statsOn){
424                             Thread thread = Thread.currentThread();
425                             threadContexts.put(thread,result);
426                             suspended.removeElement(result);
427                         }
428                     }
429
430                     // XA support: If there is a stacked context, inform all
431                     ↪ registered
432                     // StaticResource objects of the new thread association.
433                     // Allow any exception to percolate to the caller.
434
435                     if( statics != null )
436                         statics.distributeStart(result,false);
437                 }
438             }
439             aborted[0] = true;
440         }
441     }
442
443     if(_logger.isLoggable(Level.FINEST))
444     {
445         Thread thread = Thread.currentThread();
446         _logger.logp(Level.FINEST,"CurrentTransaction","endAborted()",
447             "threadContexts.get(thread) returned " +
448             result + " for current thread " + thread);
449     }
450
451     return result;
452 }

```

8. Three or four spaces are used for indentation and done so consistently

Blocks of four spaces are used for indentation along the method (even if multiple times in the form of tab characters instead of spaces (see point 9. below)), but many times the indentation rules are not applied correctly:

- Line 392 not correctly indented

- Content of `if()` block from line **396** to **434** not correctly indented
- Content of `synchronized()` block from line **397** to **433** and its closing bracket at line **433** not correctly indented
- Content of `if()` block from line **398** to **401** not correctly indented
- Content of `if()` block at line **408** not correctly indented
- Content of `if()` block from line **418** to **425** not correctly indented
- Content of `if()` block from line **420** to **424** not correctly indented
- Content of `if()` block at line **431** not correctly indented Lines **442**, **443** not correctly indented

9. **No tabs are used to indent**

Starting from line **398** until line **444**, lines **435-6-7** excluded, each line that is not a blank line is indented using tabs instead of spaces.

10. **Consistent bracing style is used, either the preferred “Allman” style (first brace goes underneath the opening block) or the “Kernighan and Ritchie” style (first brace is on the same line of the instruction that opens the new block)**

The author has used the “Kernighan and Ritchie” bracing style along all the method, except for the `if()` block from line **438** to line **444**, where he used the “Allman” style. This lack of consistency should be avoided.

11. **All if, while, do-while, try-catch, and for statements that have only one statement to execute are surrounded by curly braces**

- `if()` block from line **388** to **393** not surrounded by curly braces
- `if()` block from line **408** to **409** not surrounded by curly braces
- `if()` block from line **431** to **432** not surrounded by curly braces

13. **Where practical, line length does not exceed 80 characters**

All the lines of code of the method do not exceed 80 characters; however, some lines of either Javadoc or comments do:

- Javadoc: line **353**
- Comments: lines **376**, **384**, **385**, **404**, **405**, **411**, **427**

The peak is at line **411**, which is 90 characters long.

17. **A new statement is aligned with the beginning of the expression at the same level as the previous line**

As already mentioned in point **8**. together with other indentation errors, there are some lines of subsequent instructions that should be aligned since they are at the same level, but are not:

- Lines 399 and 400
- Lines 421, 422, 423
- Lines 441, 442, 443: lines 442 and 443 should be aligned with the open bracket at line 441

3.3 Method analysis: “sendingReply”

```

1021  /**Informs the object's Coordinator that a reply is being sent to the
      ↪ client.
1022  *
1023  * @param id      The request identifier.
1024  * @param holder  The context to be returned on the reply.
1025  *
1026  * @exception INVALID_TRANSACTION The current transaction has
      ↪ outstanding work
1027  *    on this reply, and has been marked rollback-only, or the reply is
      ↪ returning
1028  *    when a different transaction is active from the one active when the
      ↪ request
1029  *    was imported.
1030  * @exception TRANSACTION_ROLLEDBACK The current transaction has already
      ↪ been
1031  *    rolled back.
1032  *
1033  * @see
1034  */
1035  static void sendingReply( int id,
                           PropagationContextHolder holder )
1036  {
1037      throws INVALID_TRANSACTION, TRANSACTION_ROLLEDBACK {
1038
1039      // Zero out context information.
1040      // Ensure that the cached reference to the ORB is set up, and that
      ↪ the Any
1041      // value in the context is initialised.
1042      // $ The following is necessary for the context to be marshallable.
      ↪ It is a
1043      // $ waste of time when there is no transaction, in which case we
      ↪ should be
1044      // $ throwing the TRANSACTION_REQUIRED exception (?).
1045
1046      if( emptyContext.implementation_specific_data == null ) {
1047          ORB orb = Configuration.getORB();
1048          emptyContext.implementation_specific_data = orb.create_any();
1049          emptyContext.implementation_specific_data.insert_boolean(false);
1050      }
1051
1052      // COMMENT(Ram J) There is no need to send an empty context, if a tx
1053      // is not available. The PI based OTS hooks will not send a tx
      ↪ context
1054      // in the reply.
1055      /*
1056      holder.value = emptyContext;
1057      */
1058
1059      // Ensure that the current Control object is valid. Return
      ↪ immediately if not.
1060
1061      boolean[] outBoolean = new boolean[1];
1062      ControlImpl current = endAborted(outBoolean, true); // end
      ↪ association
1063      if( outBoolean[0] ) {
1064          importedTransactions.remove(Thread.currentThread());

```



```

1065         TRANSACTION_ROLLEDBACK exc = new TRANSACTION_ROLLEDBACK(0,
1066             ↪ CompletionStatus.COMPLETED_YES);
1067         throw exc;
1068     }
1069     // Get the global identifier of the transaction that was imported
1070     ↪ into this
1071     // thread. If there is none, that is an error.
1072     Thread thread = Thread.currentThread();
1073     GlobalTID importedTID = (GlobalTID)importedTransactions.remove(thread
1074     ↪ );
1075     // If there is no import information, and no current transaction,
1076     ↪ then return
1077     // the empty context.
1078     if( importedTID == null && current == null ) {
1079         return;
1080     }
1081     // Check that the current transaction matches the one that was
1082     ↪ imported.
1083     StatusHolder outStatus = new StatusHolder();
1084     try {
1085         if( importedTID == null ||
1086             current == null ||
1087             !importedTID.isSameTID(current.getGlobalTID(outStatus)) ||
1088             outStatus.value != Status.StatusActive ) {
1089             INVALID_TRANSACTION exc = new INVALID_TRANSACTION(MinorCode.
1090             ↪ WrongContextOnReply, CompletionStatus.COMPLETED_YES);
1091             throw exc;
1092         }
1093     } catch( SystemException ex ) {
1094         _logger.log(Level.FINE, "", ex);
1095         INVALID_TRANSACTION exc = new INVALID_TRANSACTION(MinorCode.
1096         ↪ WrongContextOnReply, CompletionStatus.COMPLETED_YES);
1097         throw exc;
1098     }
1099     //Get the Coordinator reference.
1100     CoordinatorImpl coord = null;
1101     Coordinator coordRef = null;
1102     try {
1103         if (Configuration.isLocalFactory()) {
1104             coord = (CoordinatorImpl) current.getLocalCoordinator();
1105         } else {
1106             coordRef = current.get_coordinator();
1107             coord = CoordinatorImpl.servant(coordRef);
1108         }
1109     }
1110     // _logger.log(Level.FINE, "Servant = "+coord);
1111     // Check the Coordinator before sending the reply.
1112     // We must do this before ending the thread association to allow
1113     ↪ the
1114     // Coordinator to take advantage of registration on reply if
1115     ↪ available.
1116     // Note that if the Coordinator returns forgetMe, the global
1117     ↪ identifier
1118     // will have been destroyed at this point.
1119     CoordinatorImpl forgetParent = null;
1120     int[] outInt = new int[1];
1121     //StatusHolder outStatus = new StatusHolder();
1122     try {

```

```

1123         forgetParent = coord.replyAction(outInt);
1124     } catch( Throwable exc ) {
1125         _logger.log(Level.FINE,"", exc);
1126     }
1127
1128     int replyAction = outInt[0];
1129     if( replyAction == CoordinatorImpl.activeChildren ) {
1130         try {
1131             coord.rollback_only();
1132         } catch( Throwable ex ) {
1133             _logger.log(Level.FINE,"", ex);
1134         }
1135
1136         INVALID_TRANSACTION exc = new INVALID_TRANSACTION( MinorCode.
1137             ↳ UnfinishedSubtransactions,
1138                                     CompletionStatus
1139                                     ↳ .
1140                                     ↳ COMPLETED_YES
1141                                     ↳ );
1142
1143         throw exc;
1144     }
1145
1146     // End the current thread association.
1147
1148     endCurrent(false);
1149
1150     // If the transaction needs to be cleaned up, do so now.
1151     // We ignore any exception the end_current may have raised in
1152     ↳ this case.
1153     // The Control object is destroyed before the Coordinator so that
1154     ↳ it is not
1155     // in the suspended set when the Coordinator is rolled back.
1156
1157     if( replyAction == CoordinatorImpl.forgetMe ) {
1158         current.destroy();
1159         coord.cleanUpEmpty(forgetParent);
1160     }
1161
1162     // Otherwise, we have to check this reply.
1163
1164     else {
1165         if( current.isAssociated() ||
1166             current.isOutgoing() ) {
1167             try {
1168                 coord.rollback_only();
1169             } catch( Throwable exc ) {
1170                 _logger.log(Level.FINE,"", exc);
1171             }
1172
1173             INVALID_TRANSACTION exc = new INVALID_TRANSACTION(
1174                 ↳ MinorCode.DeferredActivities,
1175                                     CompletionStatus
1176                                     ↳ .
1177                                     ↳ COMPLETED_YES
1178                                     ↳ );
1179
1180             throw exc;
1181         }
1182
1183         current.destroy();
1184     }
1185
1186     } catch( INVALID_TRANSACTION exc ) {
1187         throw exc;
1188     } catch( Unavailable exc ) {
1189         _logger.log(Level.FINE,"", exc);
1190         // Ignore
1191     } catch( SystemException exc ) {
1192         _logger.log(Level.FINE,"", exc);
1193     }

```

```

1181         // Ignore
1182     }
1183
1184     // Create a context with the necessary information.
1185     // All we propagate back is the transaction id and implementation
1186     ↪ specific data.
1187
1188     holder.value = new PropagationContext(0, new TransIdentity(null, null,
1189     ↪ importedTID.realTID),
1190                                     new TransIdentity[0],
1191                                     ↪ emptyContext.
1192                                     ↪ implementation_specific_data
1193                                     ↪ );
1194 }

```

5. Method names should be verbs, with the first letter of each addition word capitalized.

- line **1048**: the called method “create_any()” should be renamed in “createAny()”
- line **1049**: the called method “insert_boolean()” should be renamed in “insertBoolean()”
- line **1105**: the called method “get_localCoordinator()” should be renamed in “getLocalCoordinator()”
- line **1107**: the called method “get_coordinator()” should be renamed in “getCoordinator()”
- line **1108**: the called method “servant()” should be renamed in “get-Servant()”
- line **1131** and **1161**: the called method “rollback_only()” should be renamed

8. Three or four spaces are used for indentation and done so consistently

- line **1167** not correctly indented (2 more spaces)
- line **1188** not correctly indented (2 more spaces)

13. Where practical, line length does not exceed 80 characters.

- Some lines of the javadoc documentation of this method exceed 80 characters
- Some lines of the following comment blocks exceed 80 characters length:
 - block from line **1040** to **1044**
 - comment at line **1059**
 - comment at line **1069**
 - comment at line **1075**

- block from line **1114** to **1116**
 - block from line **1146** to **1147**
 - comment at line **1185**
14. **When line length must exceed 80 characters, it does NOT exceed 120 characters.**
- line **1090**: line length is 129 characters
 - line **1095**: line length is 125 characters
17. **A new statement is aligned with the beginning of the expression at the same level as the previous line.**
- line **1036**: the argument “holder” should be indented at the same level of the argument “id”
 - line **1137**: the argument “CompletionStatus.COMPLETED_YES” should be indented at the same level of the previous argument
 - line **1159**: “current.isOutgoing()” should be indented at a lower level
 - line **1167**: the argument “CompletionStatus.COMPLETED_YES” should be indented at the same level of the previous argument
19. **Commented out code contains a reason for being commented out and a date it can be removed from the source file if determined it is no longer needed.**
- line **1056**: It is not specified a date after which the commented code can be deleted
 - line **1111**: It is not specified neither the reason nor the date
 - line **1121**: It is not specified neither the reason nor the date
29. **Check that variables are declared in the proper scope**
- line **1102**: “coordRef” declaration should be moved inside the else block at line 1106 because the variable is used only there.
33. **Declarations appear at the beginning of blocks (A block is any code surrounded by curly braces “{“ and “}”). The exception is a variable can be declared in a ‘for’ loop.**
- line **1061, 1062, 1072, 1073, 1084, 1101, 1119, 1120**: declarations should be moved at the beginning of the function (line **1038**)
 - line **1136**: the declaration of the exception should be moved at the beginning of the if() block at line **1130**. The exception could be also immediately thrown instead of assigning it to a temporary variable.

- line **1166**: the declaration of the exception should be moved at the beginning of the `if()` block at line **1160**. The exception could be also immediately thrown instead of assigning it to a temporary variable.
40. **Check that all objects (including Strings) are compared with "equals" and not with "=="**
- line **1089**: "`!=`" is used instead of `!equals()`
42. **Check that error messages are comprehensive and provide guidance as to how to correct the problem**
At lines **1094**, **1125**, **1133**, **1163**, **1177** and **1180** it is not provided an explanation for the logged exception
44. **Check that the implementation avoids "brutish programming"**
- line **1065**: The constructor of `TRANSACTION_ROLLEDBACK` should be called using the constant "`Undefined`" declared in `MinorCode` class instead of "`0`"
51. **Check that the code is free of any implicit type conversions**
- line **1062**: The called function "`endAborted()`" uses a one-element array to pass the boolean argument by reference. It should be better to use the object type `Boolean` in order to avoid indexes from going out-of-bounds
 - line **1123**: The called function "`replyAction()`" uses a one-element array to pass the integer argument by reference. It should be better to use the object type `Integer` in order to avoid indexes from going out-of-bounds
52. **Check that the relevant exceptions are caught**
- line **1124**: it should be caught a "`SystemException`" instead of "`Throwable`"
 - line **1131** and **1161**: it should be caught an "`Inactive`" exception instead of "`Throwable`"

4 Appendix

4.1 Hours of work

Here is how long it took to redact this document:

- Matteo Bulloni: ~ #### hours
- Marco Cannici: ~ 12 hours

4.2 Softwares and tools used

- Google Docs: to redact the document
Link: <http://docs.google.com>
- Lyx: to format the document
Link: <http://lyx.org>
- Architexa plugin for Eclipse: to analyse the class dependencies and generate the class diagrams
Link: <https://marketplace.eclipse.org/content/architexa-eclipse-42>

References

- [1] *Transaction Service Specification*
Version: 1.4
Author: OMB - Object Management Group
Link: <http://www.omg.org/spec/TRANS/1.4/>
- [2] *Java™ Transaction Service (JTS) Specification*
Version: 1.0
Author: Sun Microsystems Inc
Link: <http://download.oracle.com/otndocs/jcp/7309-jts-1.0-spec-oth-JSpec/>
- [3] *CORBA Request Portable Interceptors: A Performance Analysis*
Authors: C. Marchetti, L. Verde and R. Baldoni - Dipartimento di Informatica e Sistemistica, Università “La Sapienza” di Roma
Link: <http://midlab.diag.uniroma1.it/articoli/doa01.pdf>