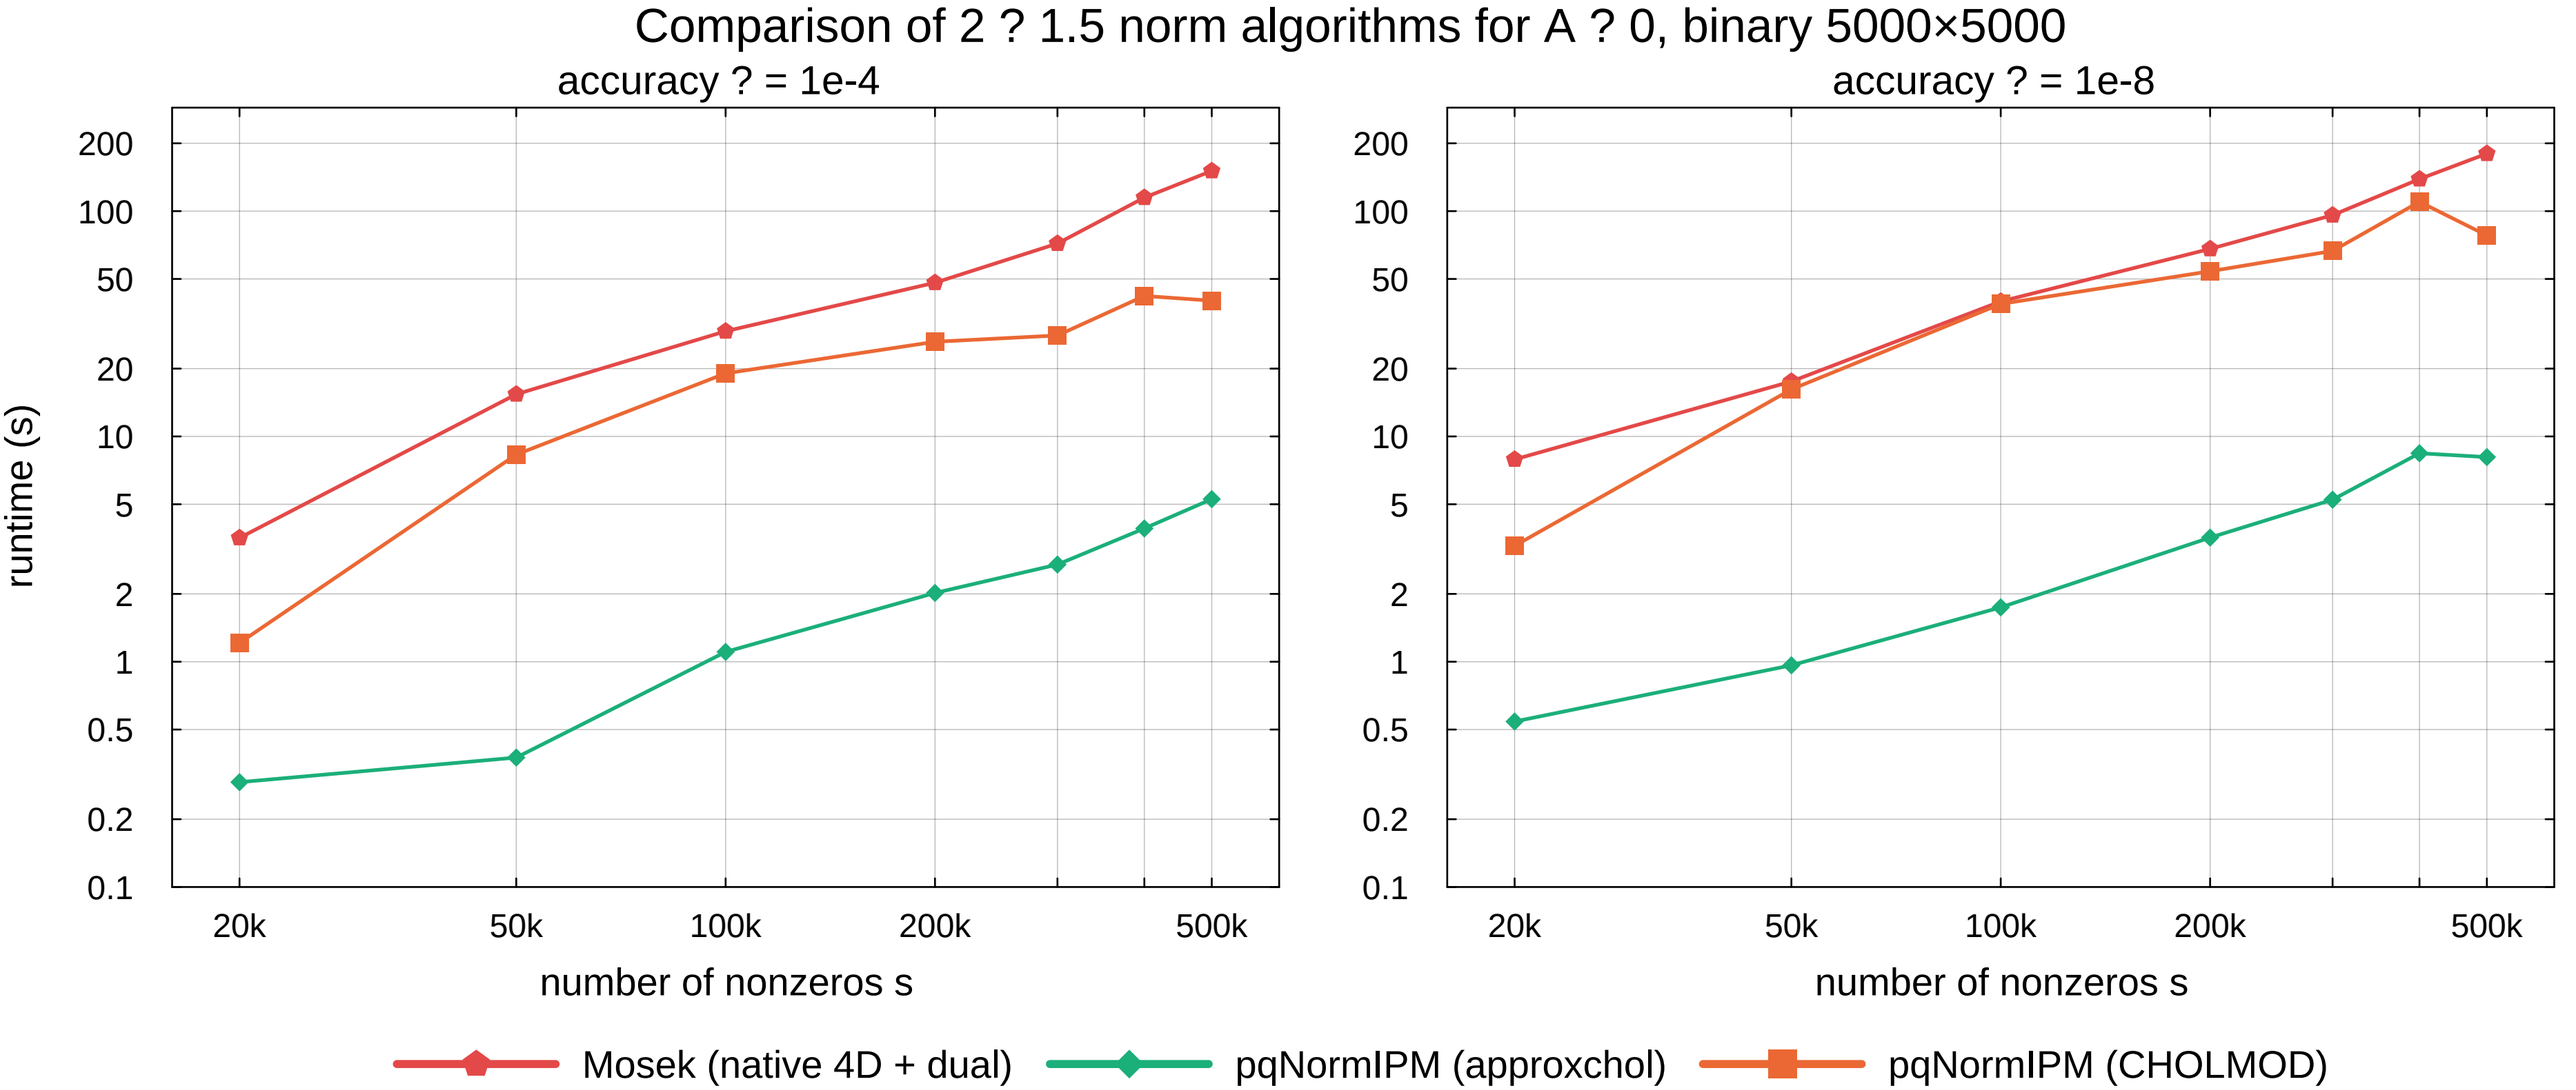
Comparison of 2 ? 1.5 norm algorithms for A ? 0, binary 5000×5000
accuracy ? = 1e-4
accuracy ? = 1e-8
runtime (s)
200
100
50
20
10
5
2
1
0.5
0.2
0.1
20k
50k
100k
200k
500k
number of nonzeros s
Mosek (native 4D + dual)
pqNormIPM (approxchol)
pqNormIPM (CHOLMOD)