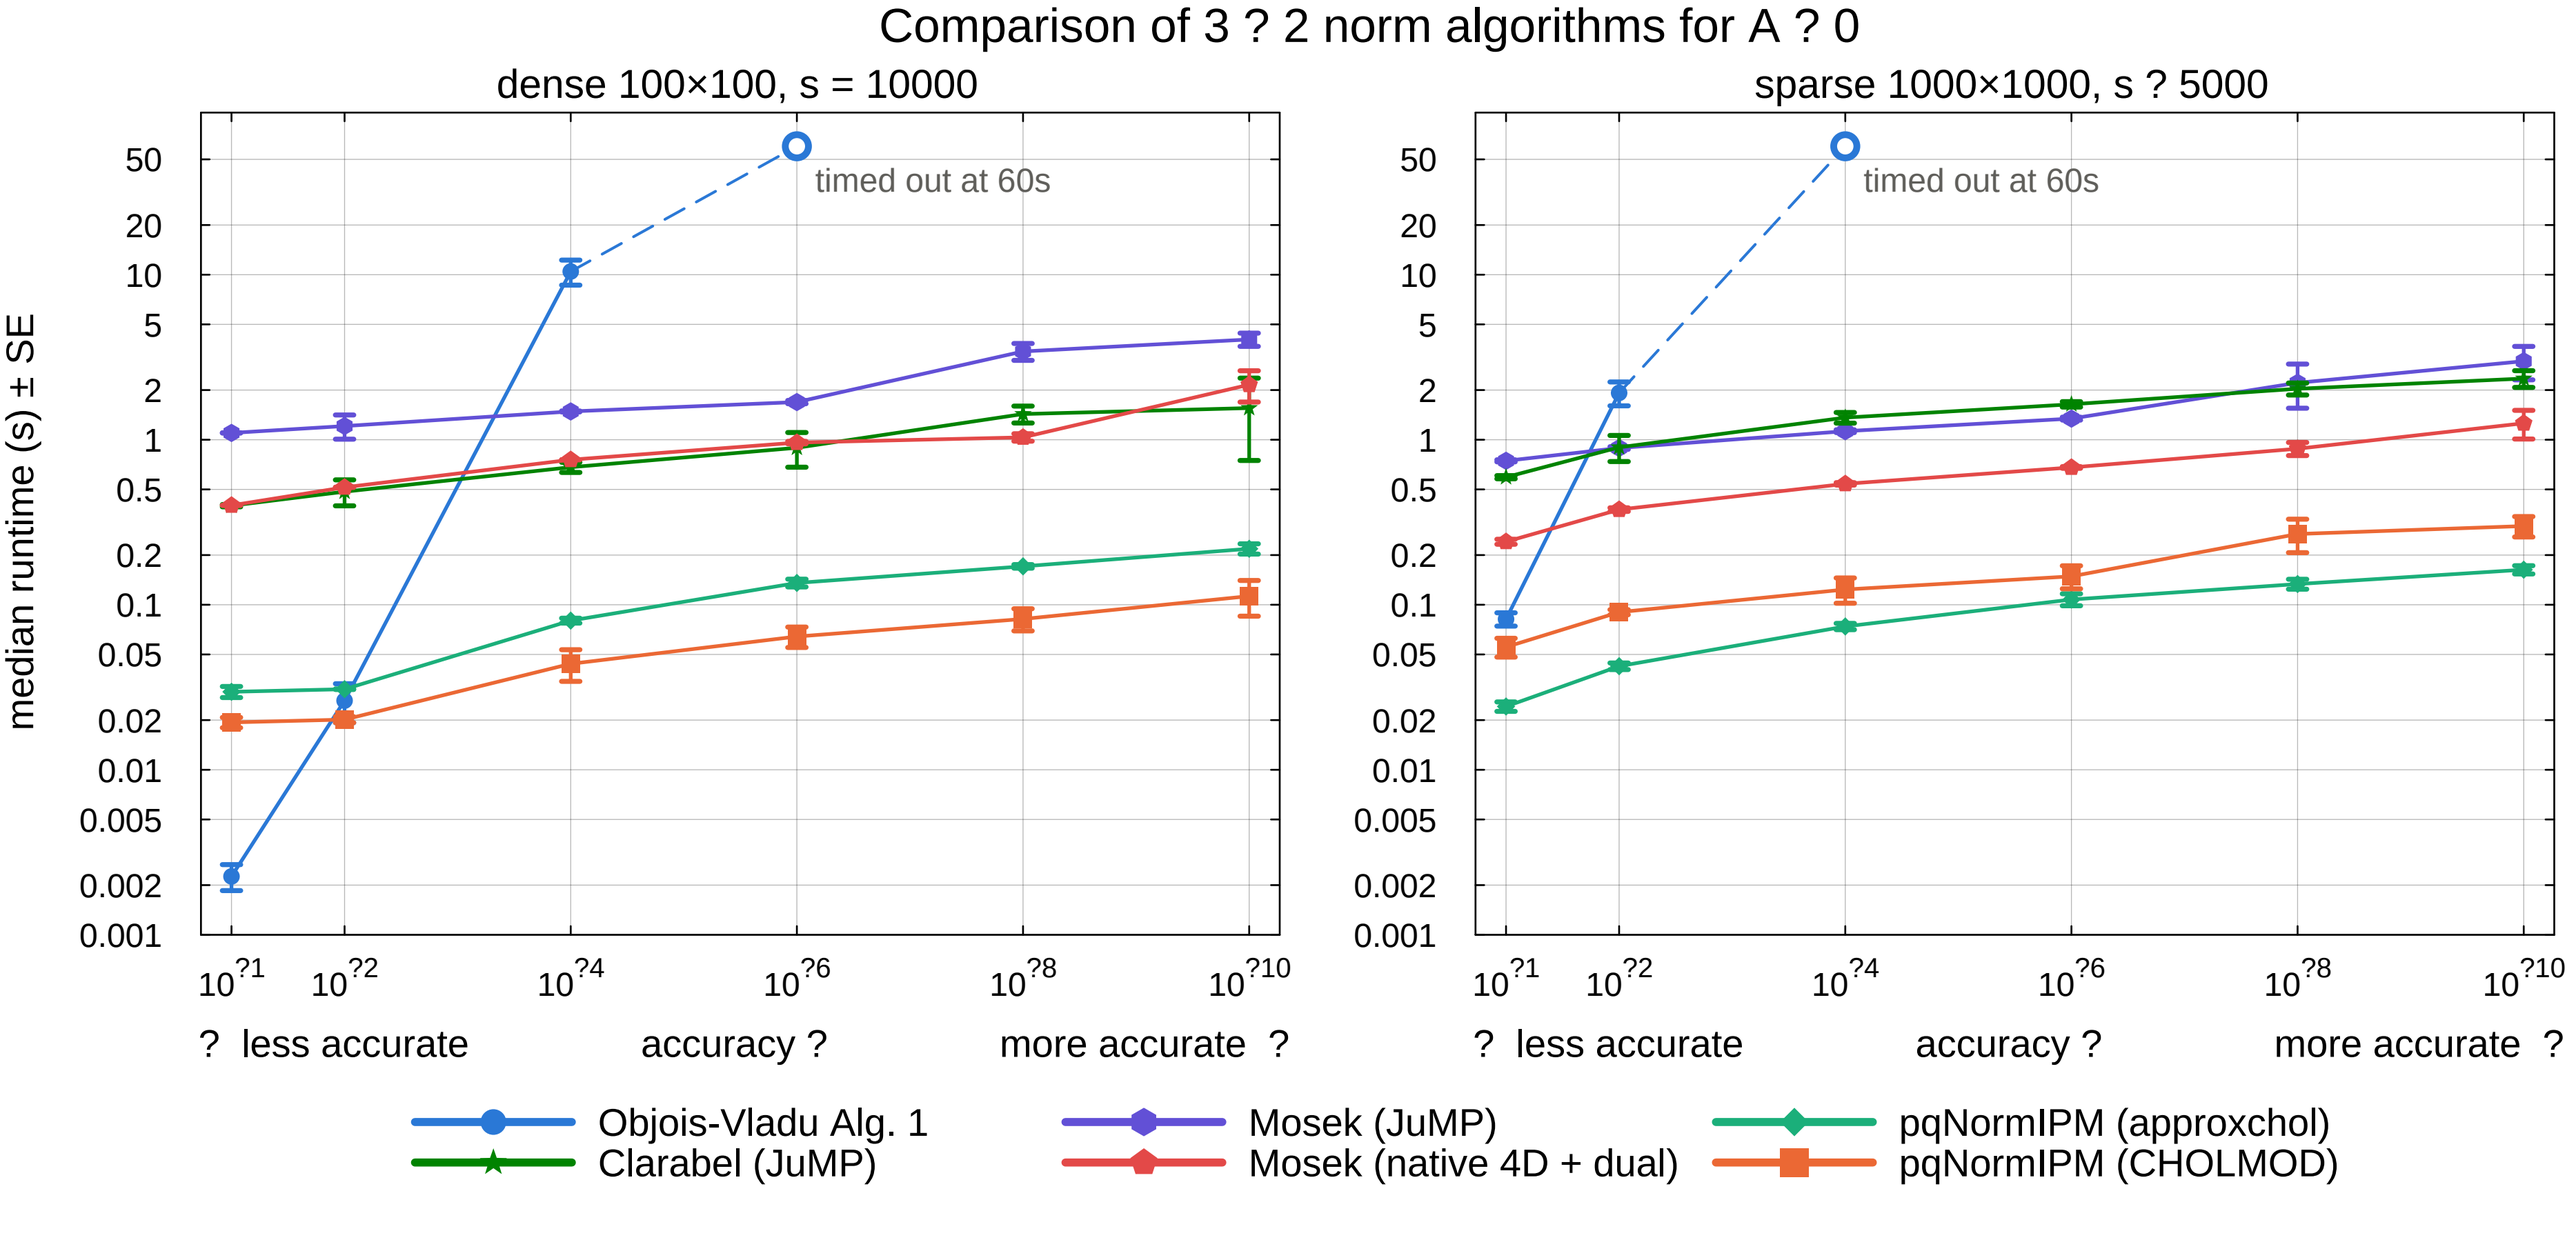
Comparison of 3 ? 2 norm algorithms for A ? 0
dense 100×100, s = 10000
sparse 1000×1000, s ? 5000
median runtime (s) ± SE
timed out at 60s
timed out at 60s
50
20
10
5
2
1
0.5
0.2
0.1
0.05
0.02
0.01
0.005
0.002
0.001
10?1
10?2
10?4
10?6
10?8
10?10
? less accurate
accuracy ?
more accurate ?
? less accurate
accuracy ?
more accurate ?
Objois-Vladu Alg. 1
Clarabel (JuMP)
Mosek (JuMP)
Mosek (native 4D + dual)
pqNormIPM (approxchol)
pqNormIPM (CHOLMOD)