



Checkpoint CNT exp.

Marco Solime, National Institute of Informatics (NII), March 2026

Experiment 1




Config

- Volume size: $4 \times 20 \times 20$
- Detector size: 8×30
- # Projections: 90


Output

- 3D volume is inconsistent
- 2D projections mimic GT, but blurry

3D reconstructions (**BAD**)

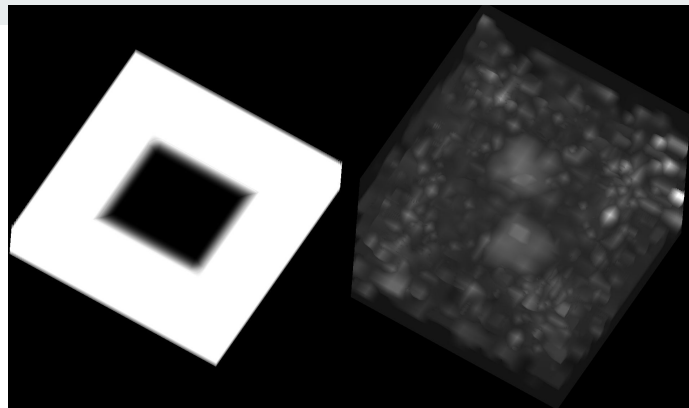

2D projections (**BLURRY**)

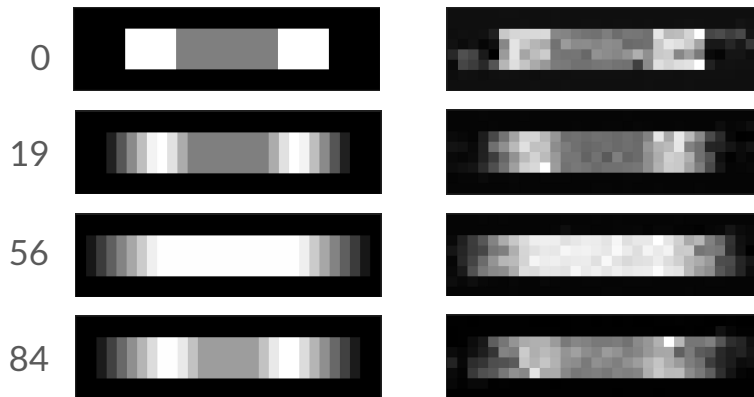


Experiment 2

Config


- Volume size: $8 \times 20 \times 20$
- Detector size: 14×30
- # Projections: 90

Output

- 3D volume is inconsistent
- 2D projections mimic GT, but blurry

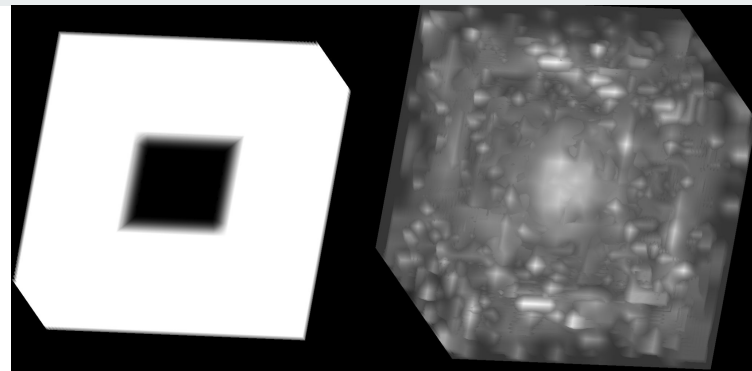

2D projections (**BLURRY**)

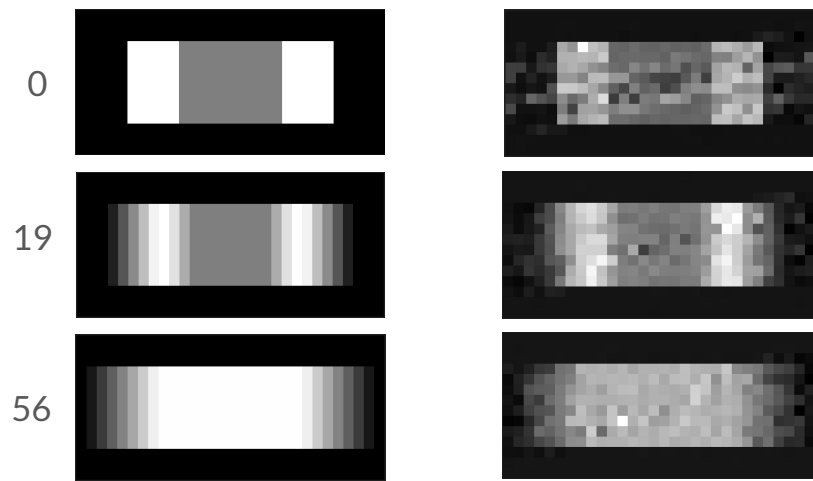



Experiment 3

Config

- Volume size: $14 \times 20 \times 20$
- Detector size: 20×30
- # Projections: 90

Output

- 3D volume is inconsistent
- 2D projections mimic GT, but blurry

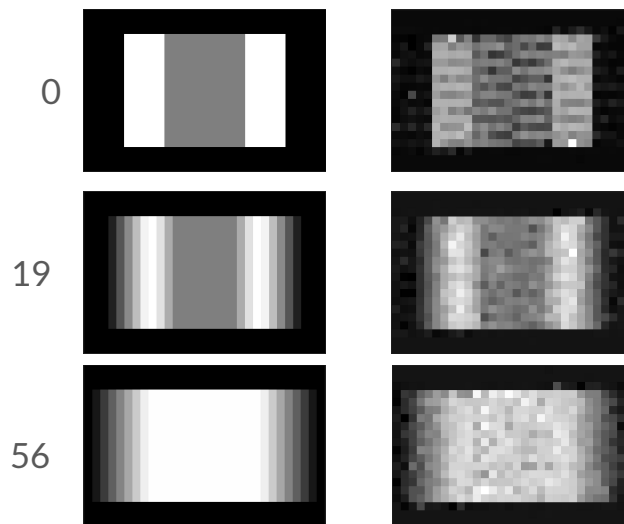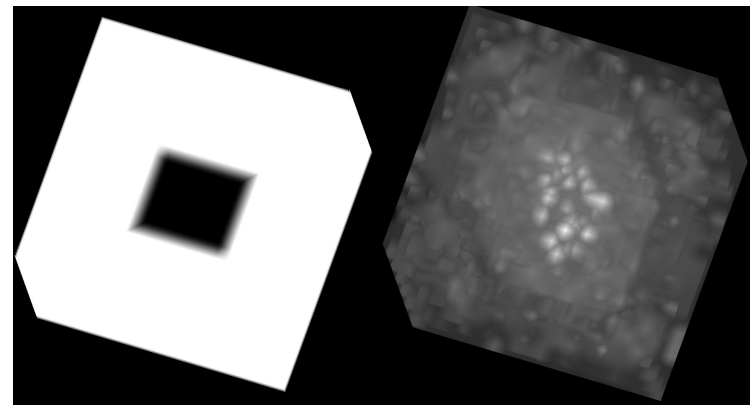

2D projections (**BLURRY**)

Experiment 4




Config

- Volume size: $20 \times 20 \times 20$
- Detector size: 30×30
- # Projections: 90

Output

- 3D volume is **consistent**
- 2D projections **close** to GT

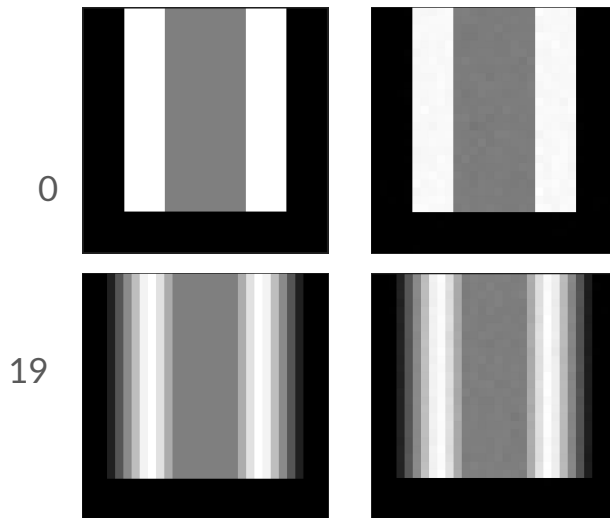

2D projections (GOOD)

Experiment 5 – Introducing noise



Config

- Volume size: 20 x 20 x 20
- Detector size: 30 x 30
- # Projections: 90

Noise:

- Poisson: 5e4
- Gaussian: [mean: 0, std: 2]

2D projections (GOOD)

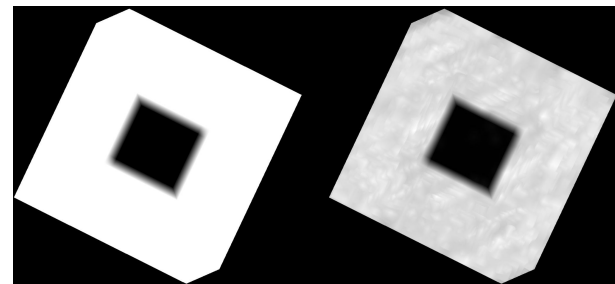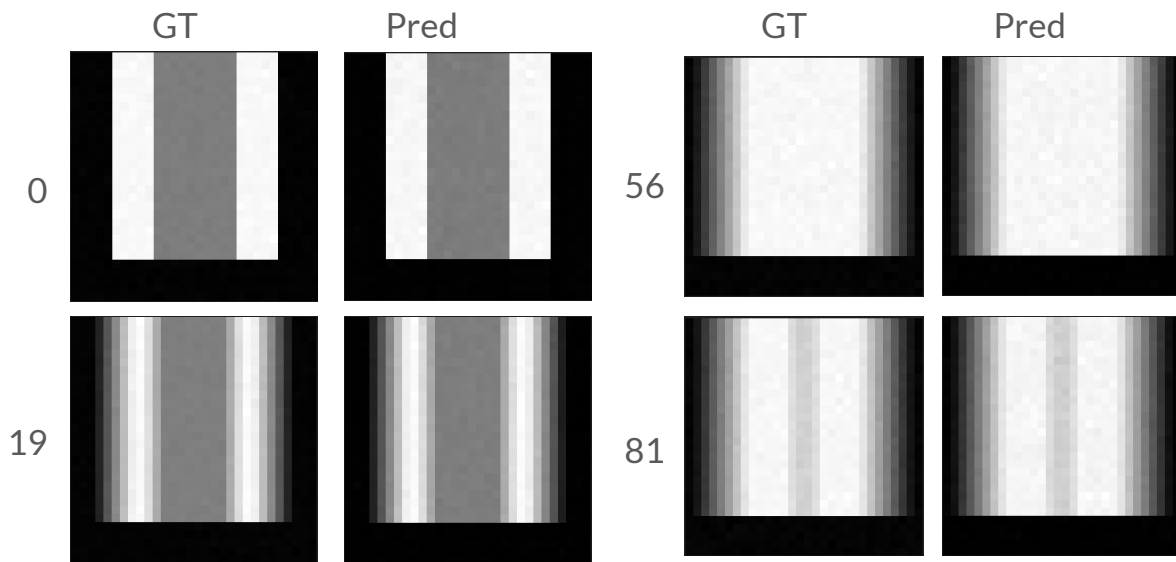

Experiment 6 – More noise






Config

- Volume size: 20 x 20 x 20
- Detector size: 30 x 30
- # Projections: 90

Noise:

- Poisson: 1e4
- Gaussian: [mean: 0, std: 4]

2D projections (GOOD)

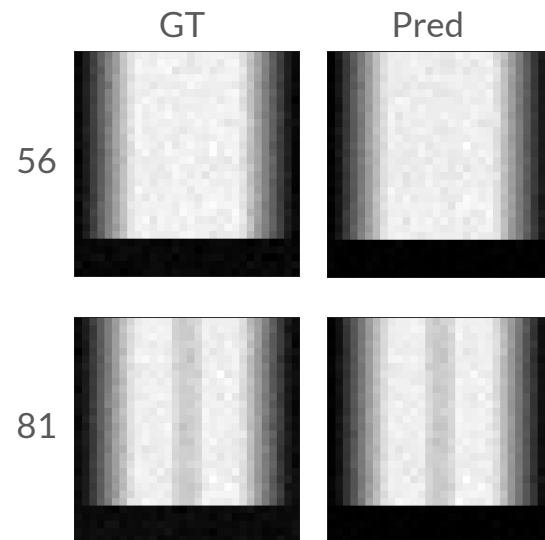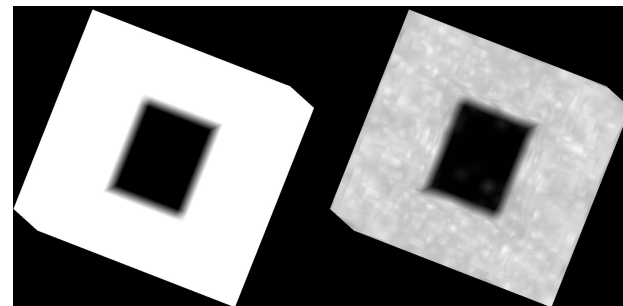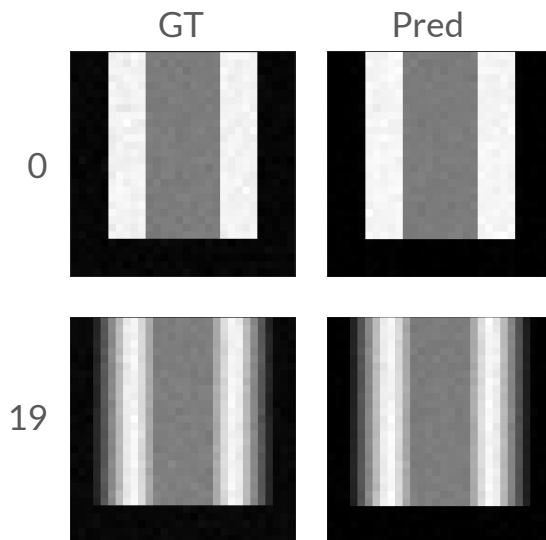


Experiment 7 – More noise (x2)

Config


- Volume size: $20 \times 20 \times 20$
- Detector size: 30×30
- # Projections: 90

Noise:

- Poisson: $5e2$
- Gaussian: [mean: 0, std: 8]

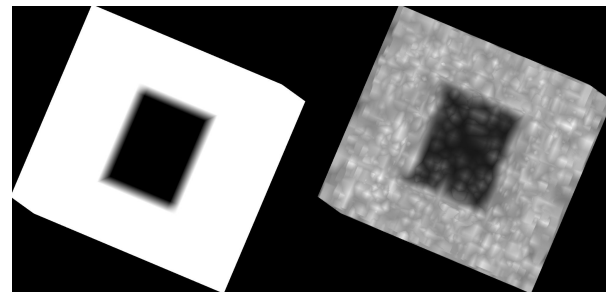

2D projections (GOOD)

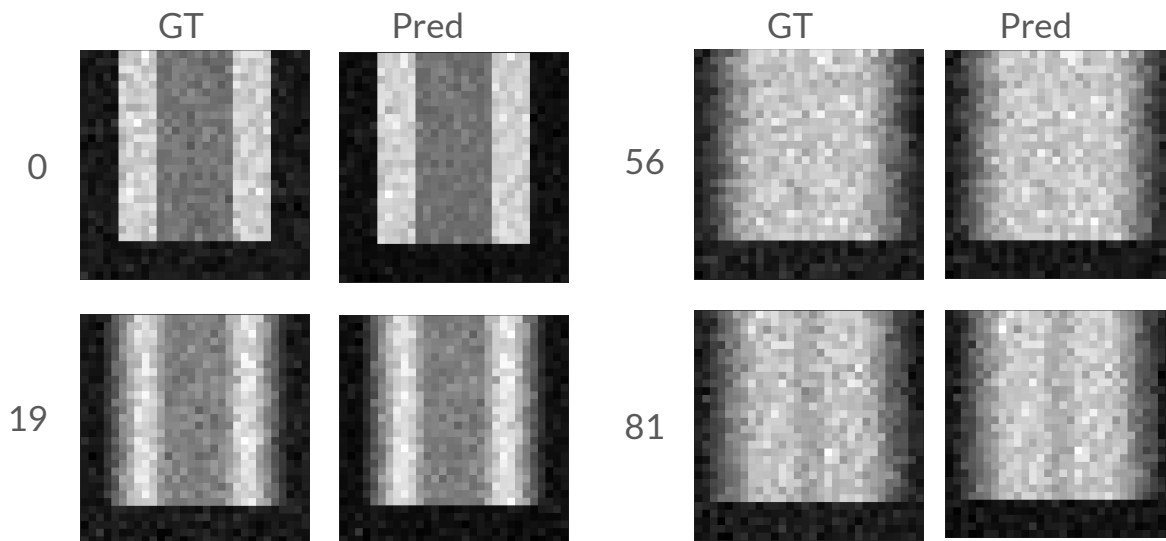

Experiment 8 – More noise (x3)

Config

- Volume size: 20 x 20 x 20
- Detector size: 30 x 30
- # Projections: 90

Noise:

- Poisson: $2e2$
- Gaussian: [mean: 0, std: 10]

2D projections (**GOOD**)

