

macOS first install

Installing LSD in macOS for the first time

Download LSD Installer

- Open **Safari** and navigate to:

`https://github.com/SantAnnaKS/LSD/releases`

- Select the desired version and expand its **Assets** panel
- Click the one with **mac** in the listed file names, in the format:

`LSD-installer-mac-X-Y-stable-Z.dmg`

- Accept downloading the file, if asked by Safari

LSD 8.1 + Sant'Anna Models

Latest

Compare



SantAnnaKS released this Aug 6, 2023 8.1-stable-5 0ae1623

This is version 8.1 of LSD

The version is stable and include several new features.
The documentation for this release is fully updated.

To install, simply download the installer for your platform (Windows, macOS or Linux), extract/execute it, and follow the instructions.

It is also possible to do a manual installation using the source code .zip or .tar.gz file. Download and extract it on the root of your home user directory (~/ in Linux/macOS, C:\Users\NAME in Windows, NAME is the name of user), and extract it to a subdirectory named LSD (C:\Users\NAME\LSD in Windows or ~/LSD in Linux/macOS). A different subdirectory can be used if there are no spaces in the names of the entire path of the chosen location. Then follow the instructions in the included [Readme.txt](#) file to complete the installation, according to your operating system. If upgrading from a previous version, just extract the package file over the existing LSD subdirectory.

For installation details please check the [LSD Wiki](#).

Sant'Anna models are available inside the Examples group in Model Browser.

1

Assets 5

LSD-installer-linux-8-1-stable-5.zip	10	14.9 MB	Feb 1, 2025
LSD-installer-mac-8-1-stable-5.dmg	45	33 MB	Feb 1, 2025
LSD-installer-windows-8-1-stable-5.zip	67	133 MB	Feb 1, 2025
Source code (zip)			Feb 1, 2025
Source code (tar.gz)			Feb 1, 2025


2

Mount LSD image

- LSD installer comes inside a compressed image file (**dmg**)
- Open **Finder** and navigate to the **Downloads** folder
- Look for the file you downloaded from GitHub, it is named like:



`LSD-installer-mac-X-Y-stable-Z.dmg`

- Simply double-click on the icon of this file in Finder to mount it

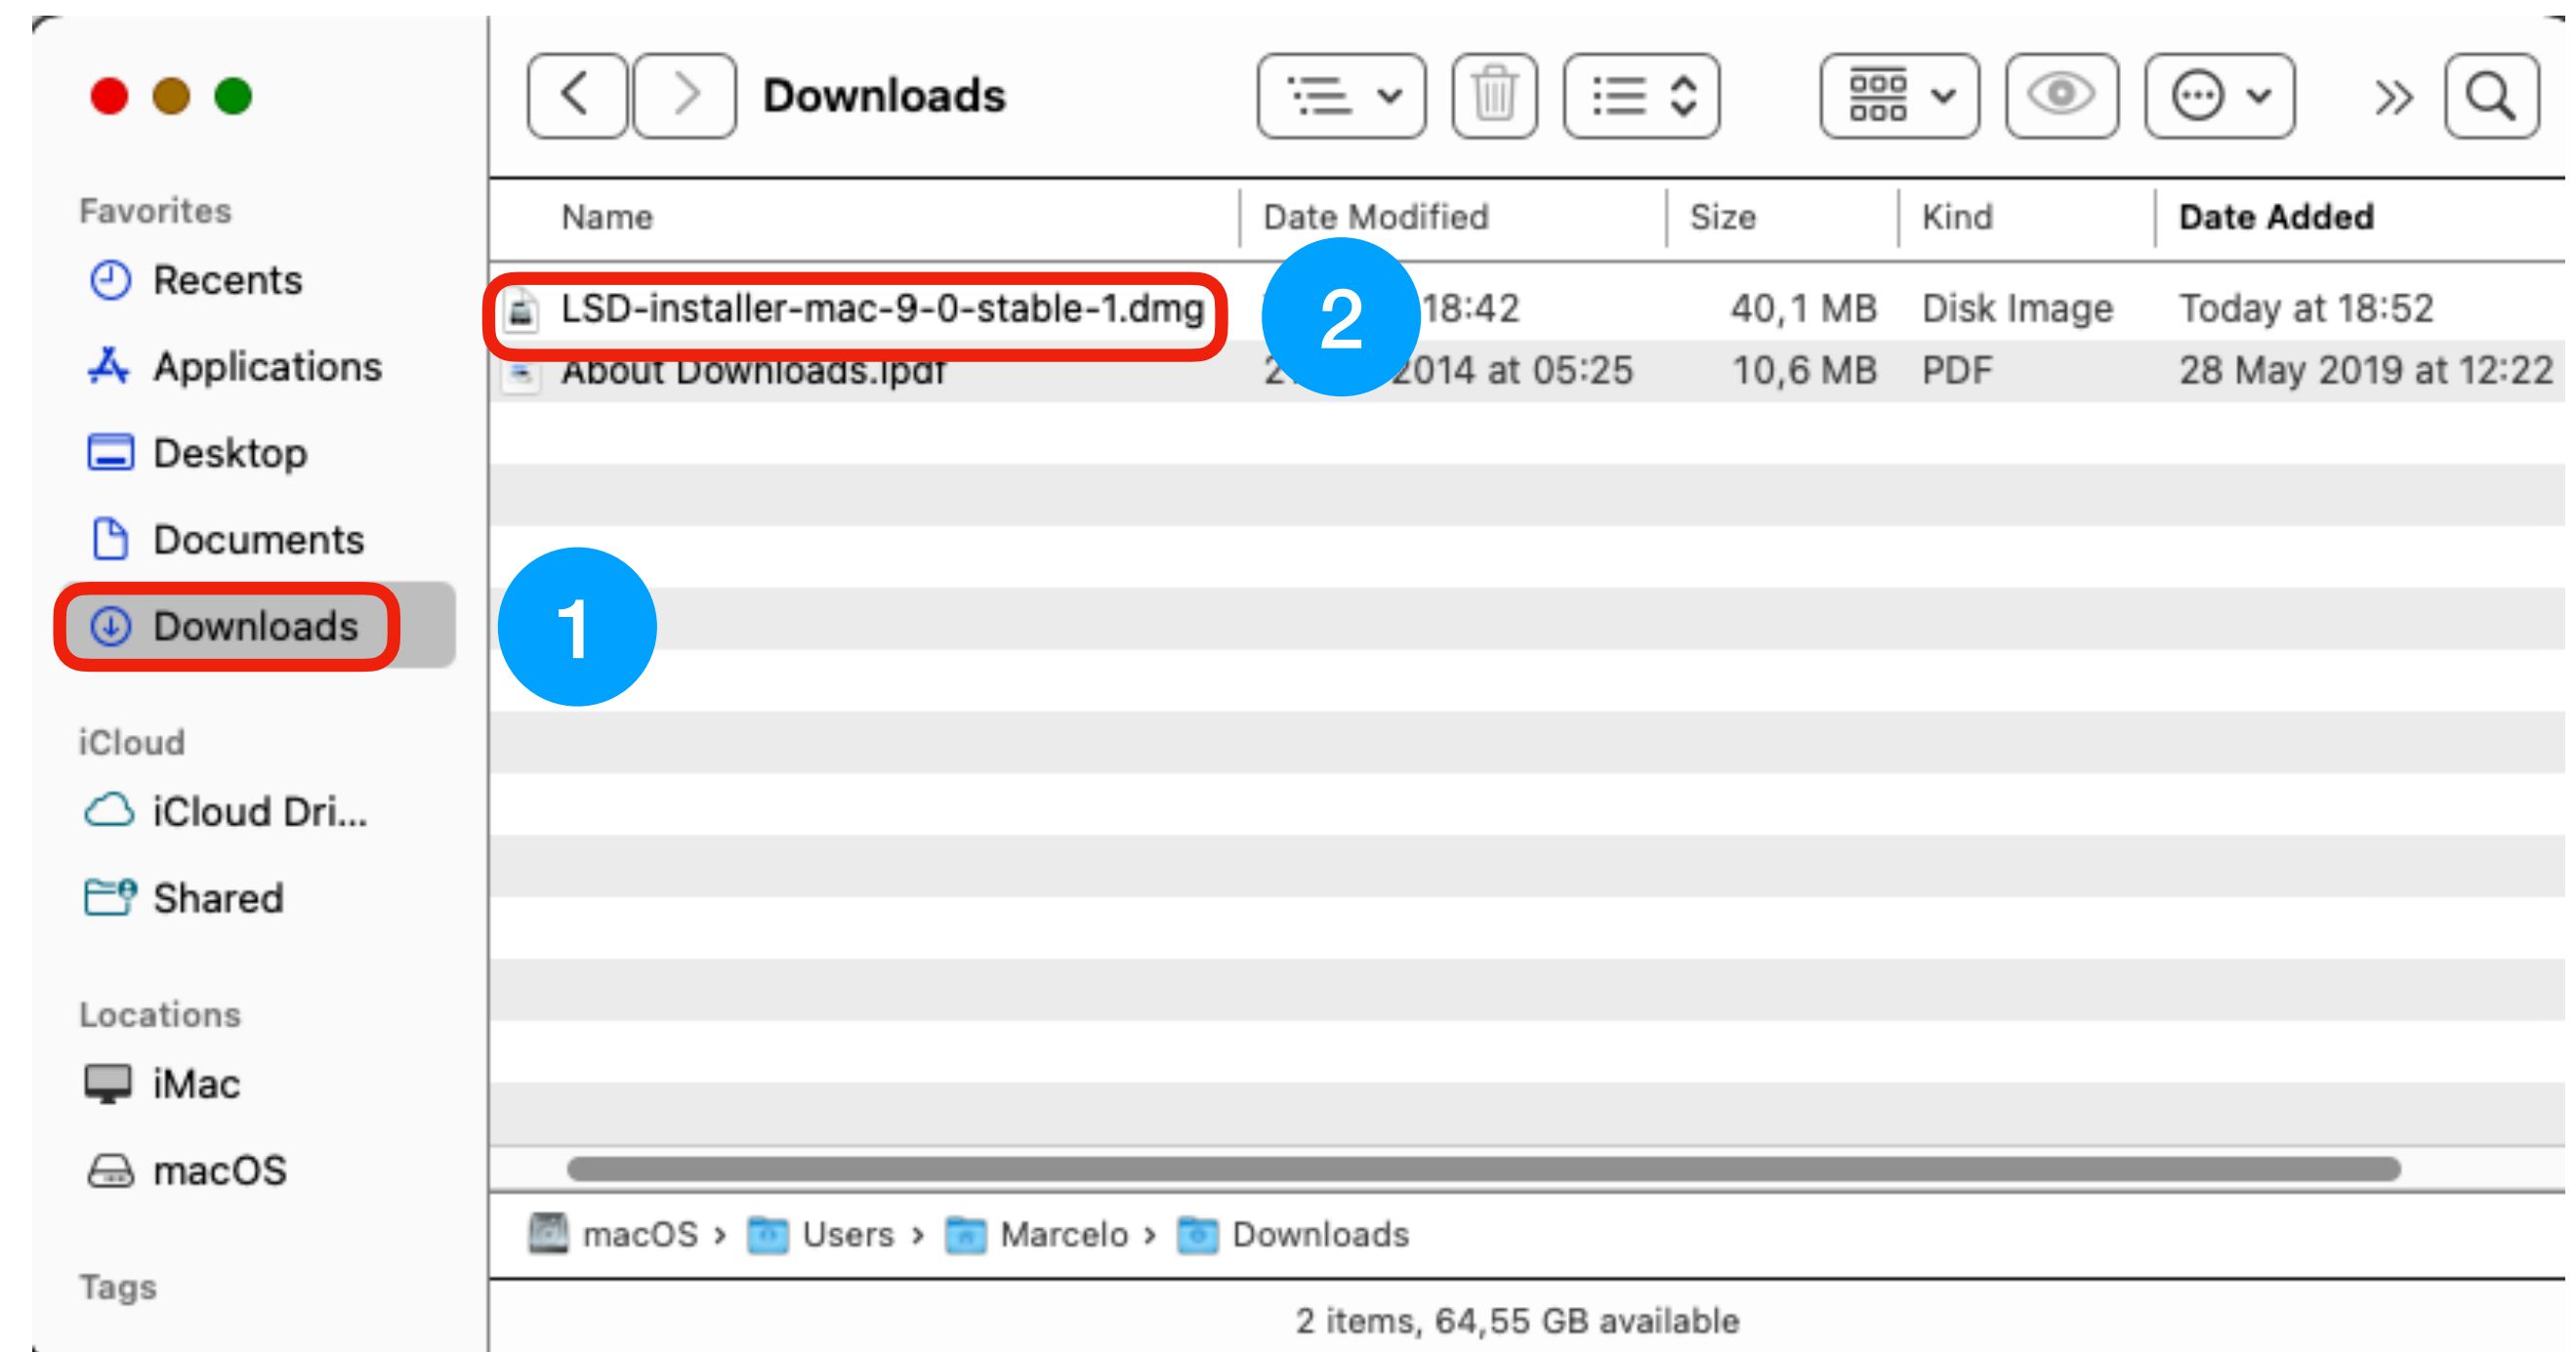


Execute LSD Installer

- After mounting the image, an icon to the mounted folder is added to your desktop, like the example besides
- Double click on the icon to show the image folder content, as besides
- Double click on the **LSD Installer** icon to execute it

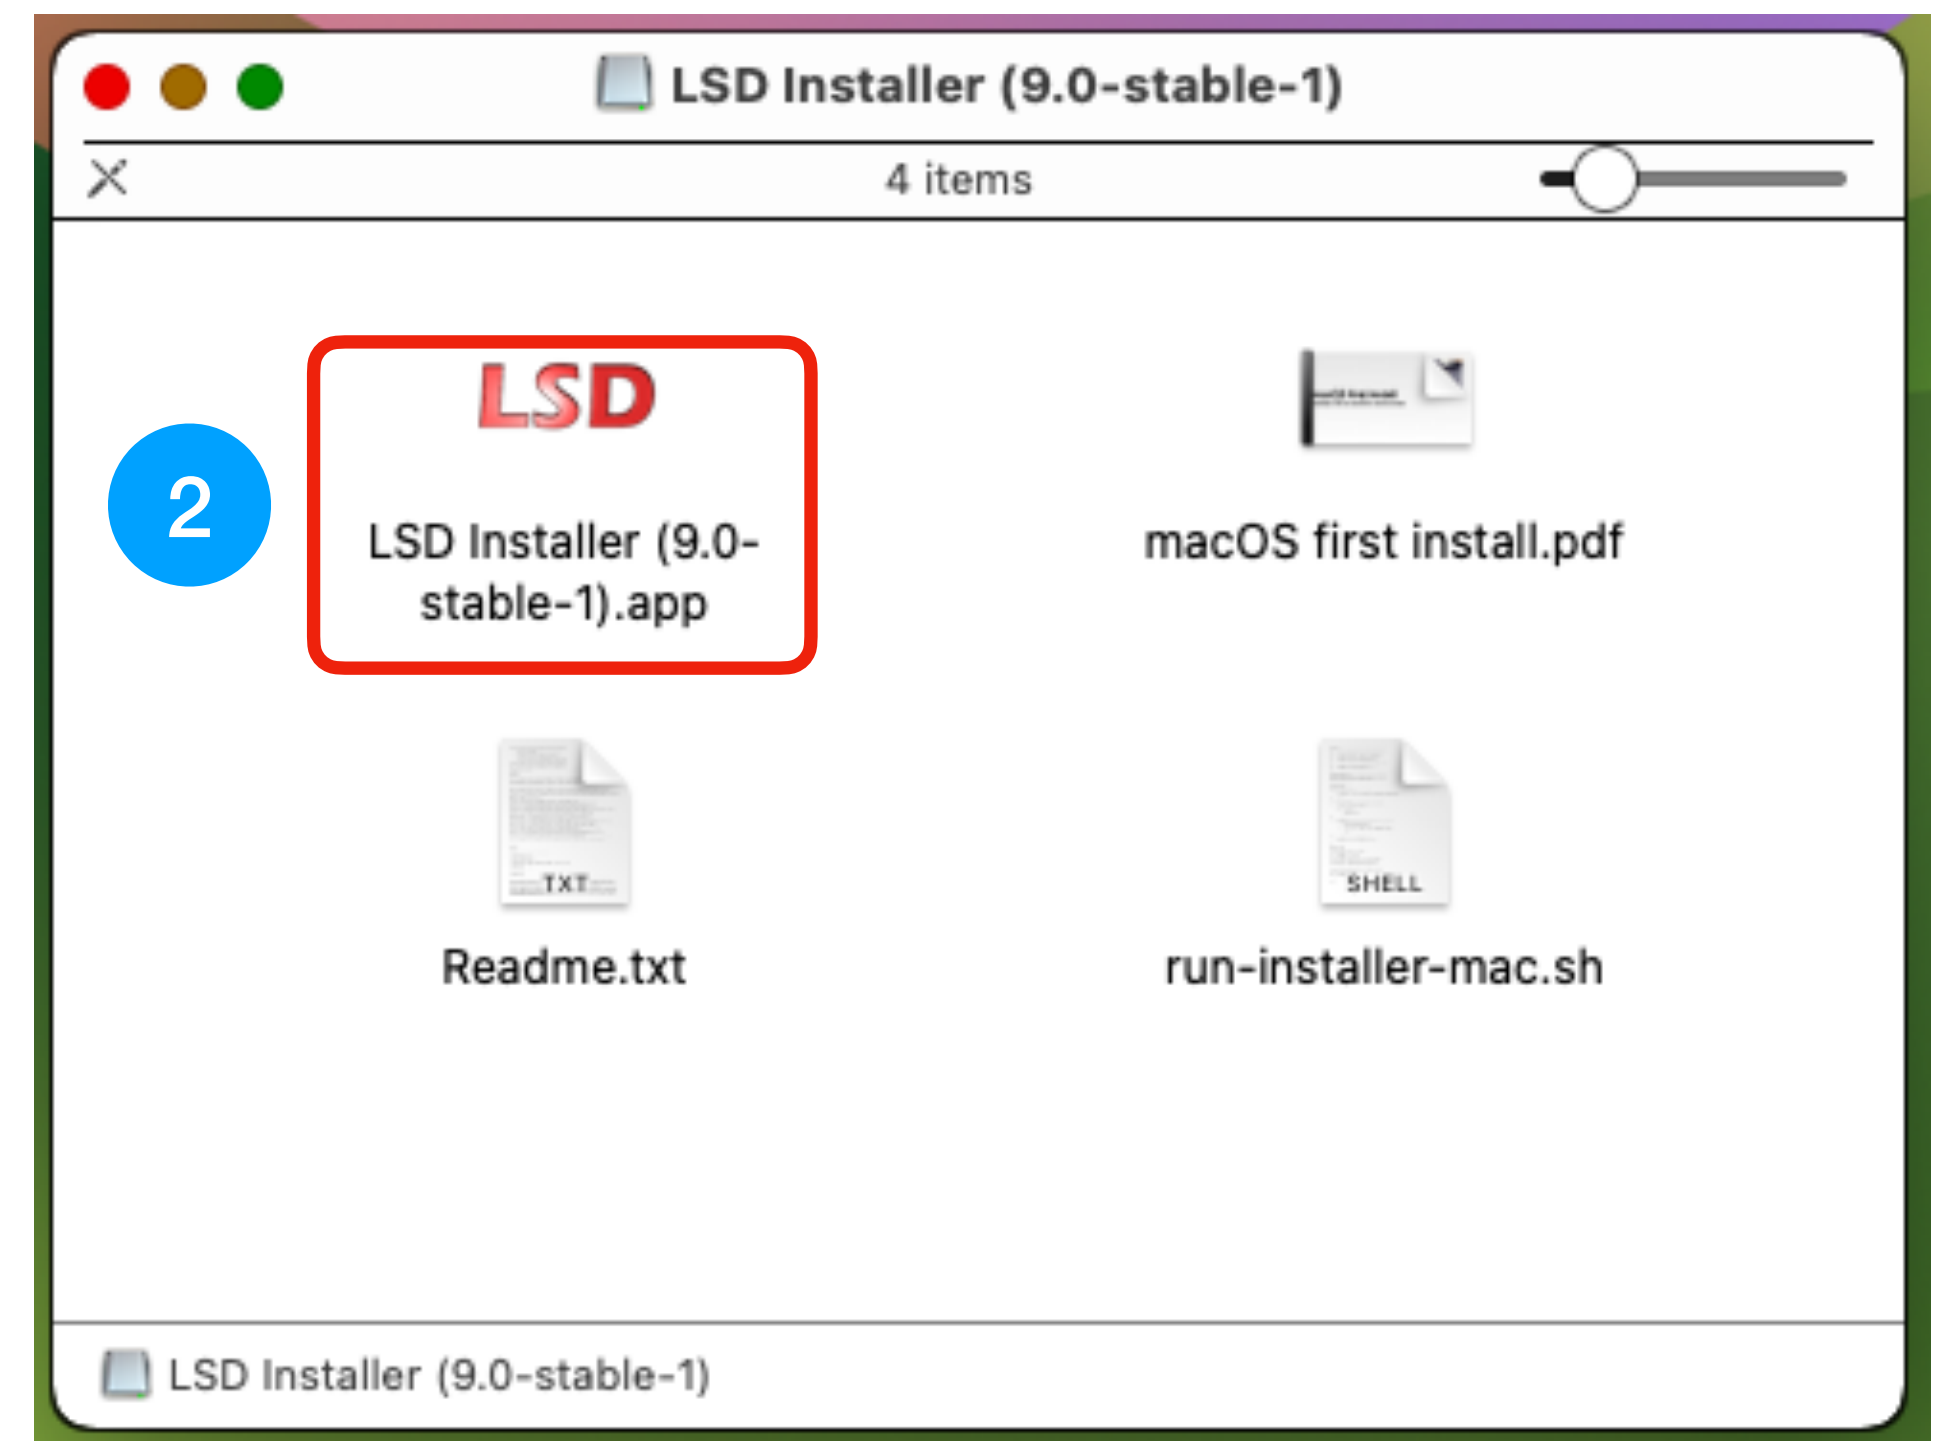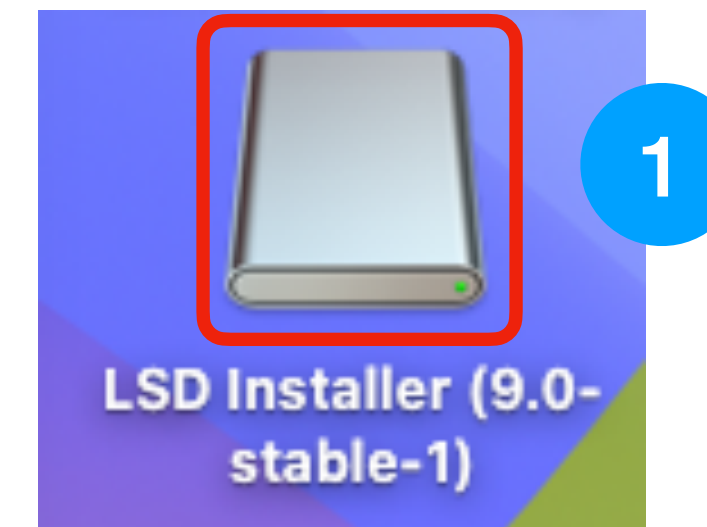


Open LSD Installer

- LSD installer is blocked by macOS when you try to execute it after downloading
- On macOS warning, click on **Done**
- LSD Installer must be manually unlocked in macOS **Settings** app
- Go to **Privacy & Security** in the left panel
- Scroll to **Security** section in the right panel
- Click on **Open Anyway** besides the LSD Installer

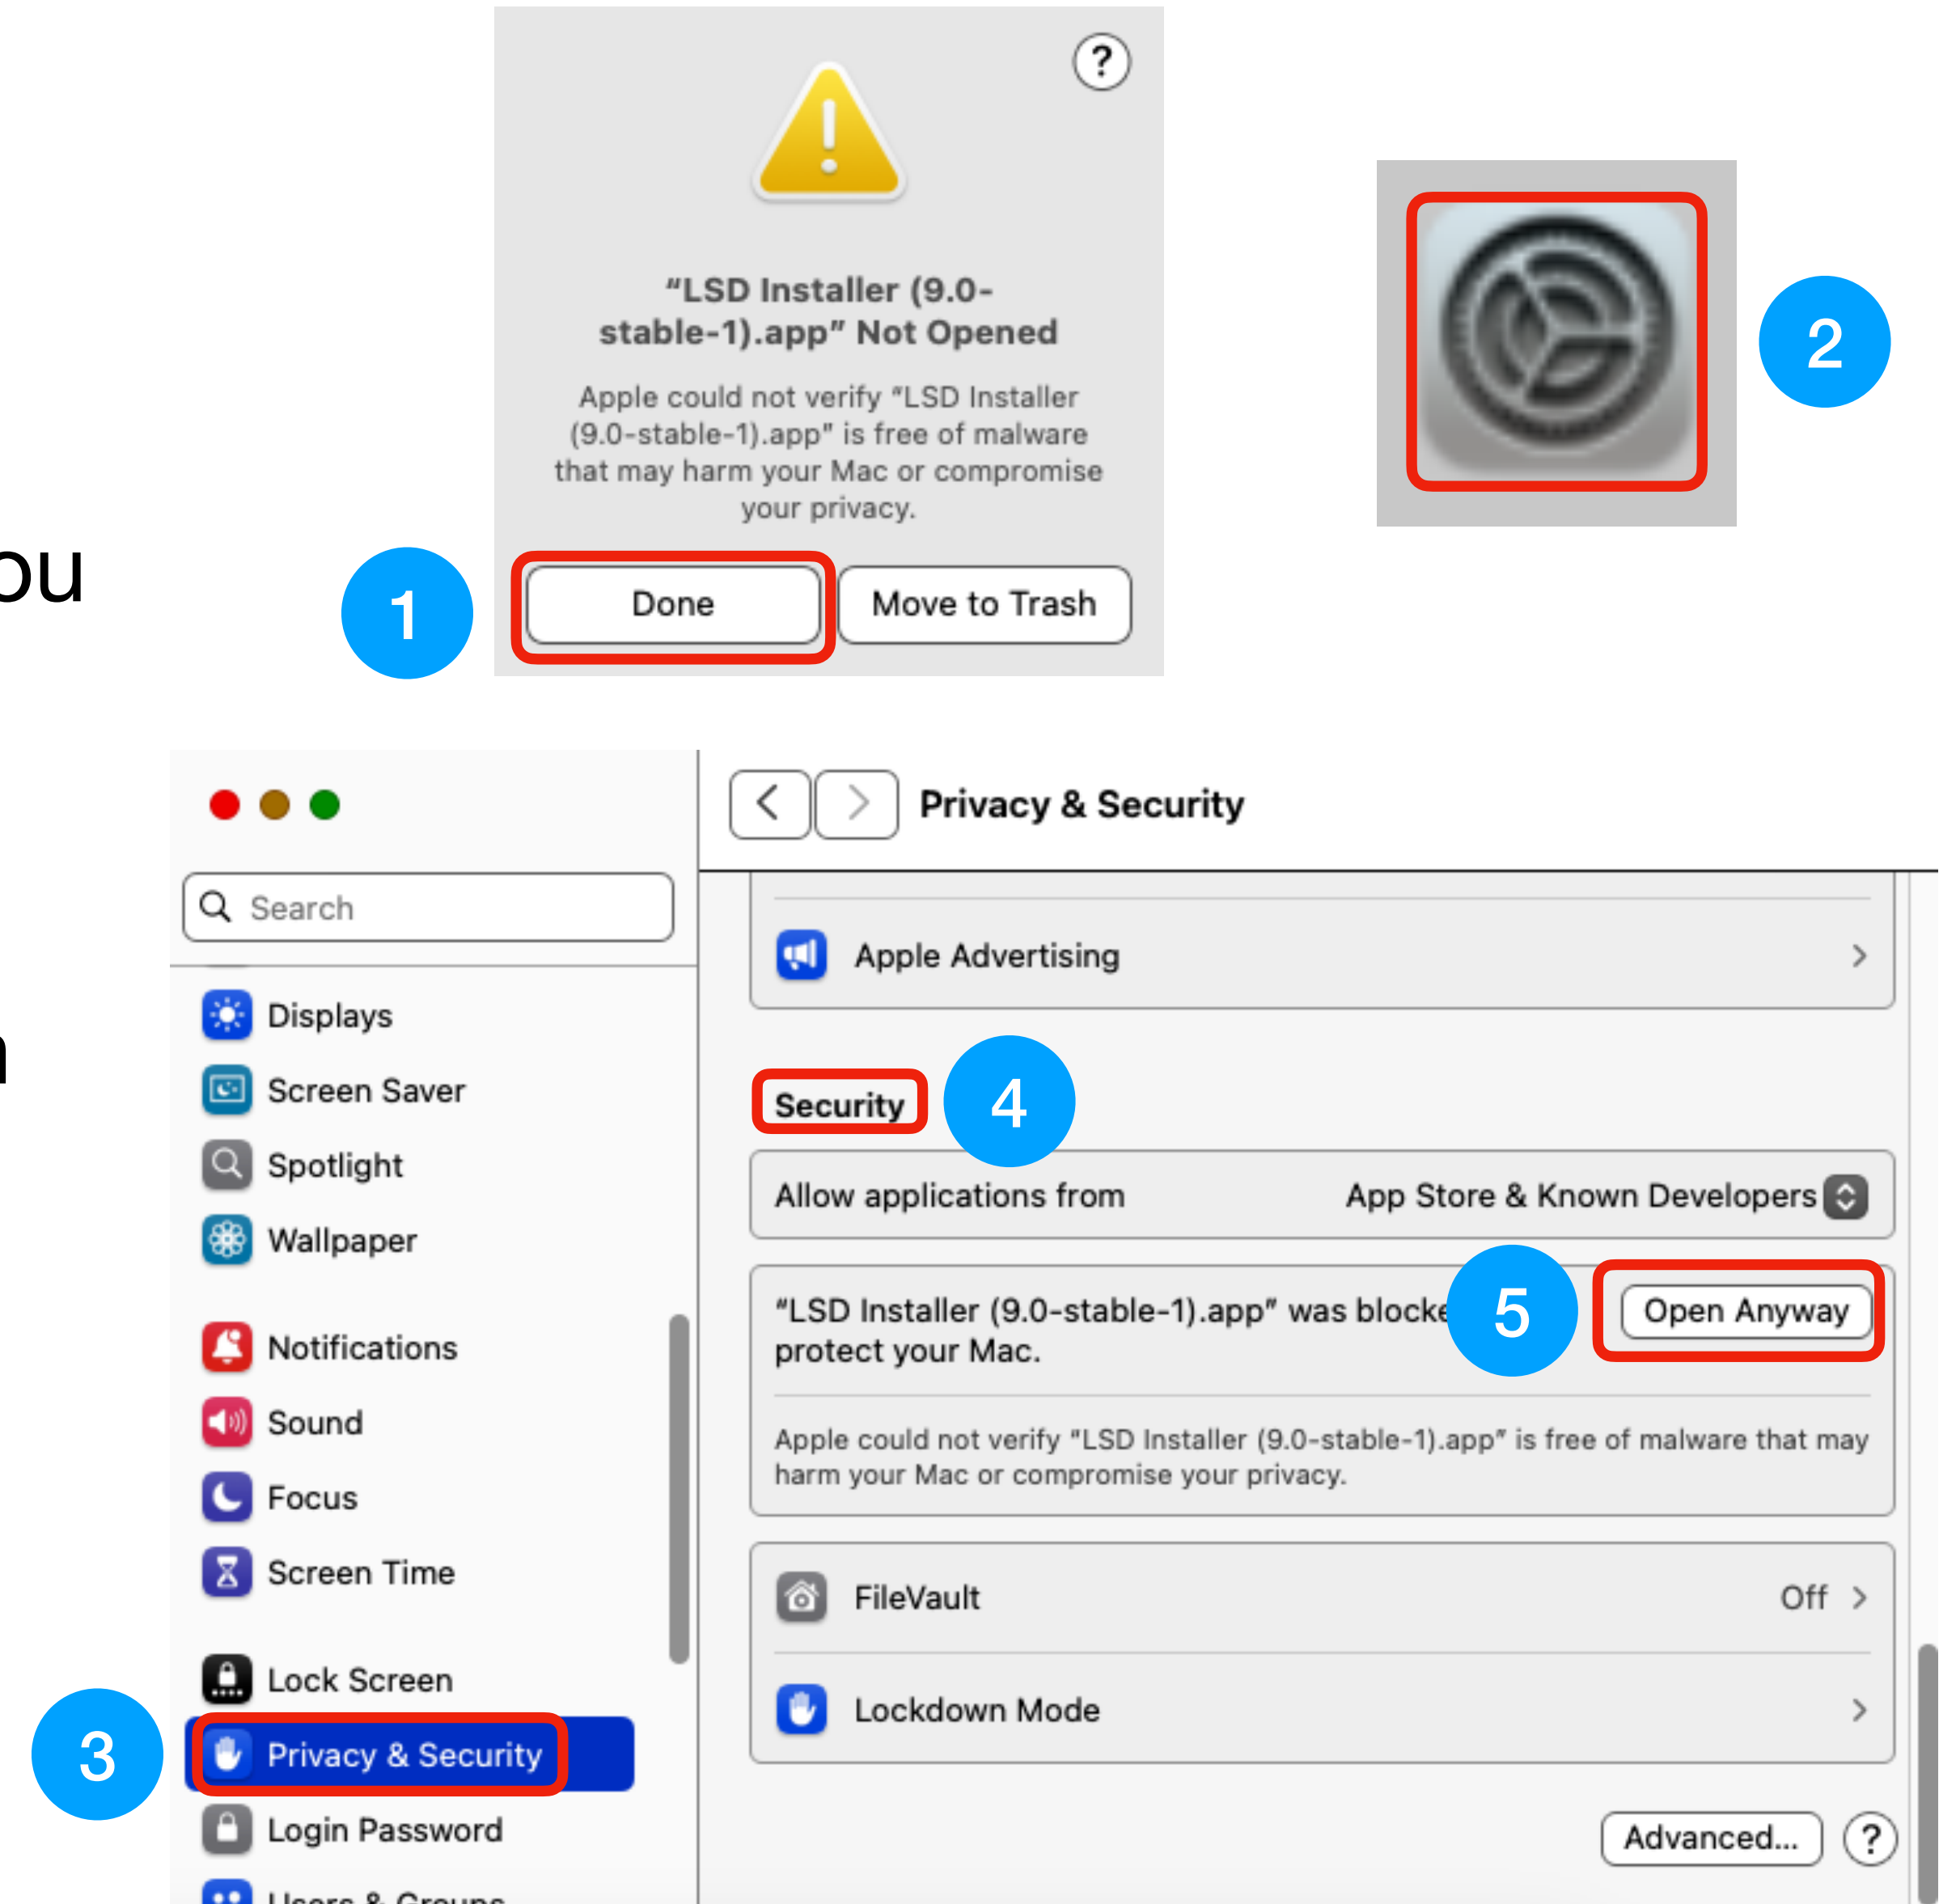


Confirm LSD unlock

- After enabling LSD Installer in Settings, a confirmation must be accepted, clicking **Open Anyway** again
- After that, you must authorize with your **username** and **password**
- Press **OK** when done
- LSD Installer should now launch

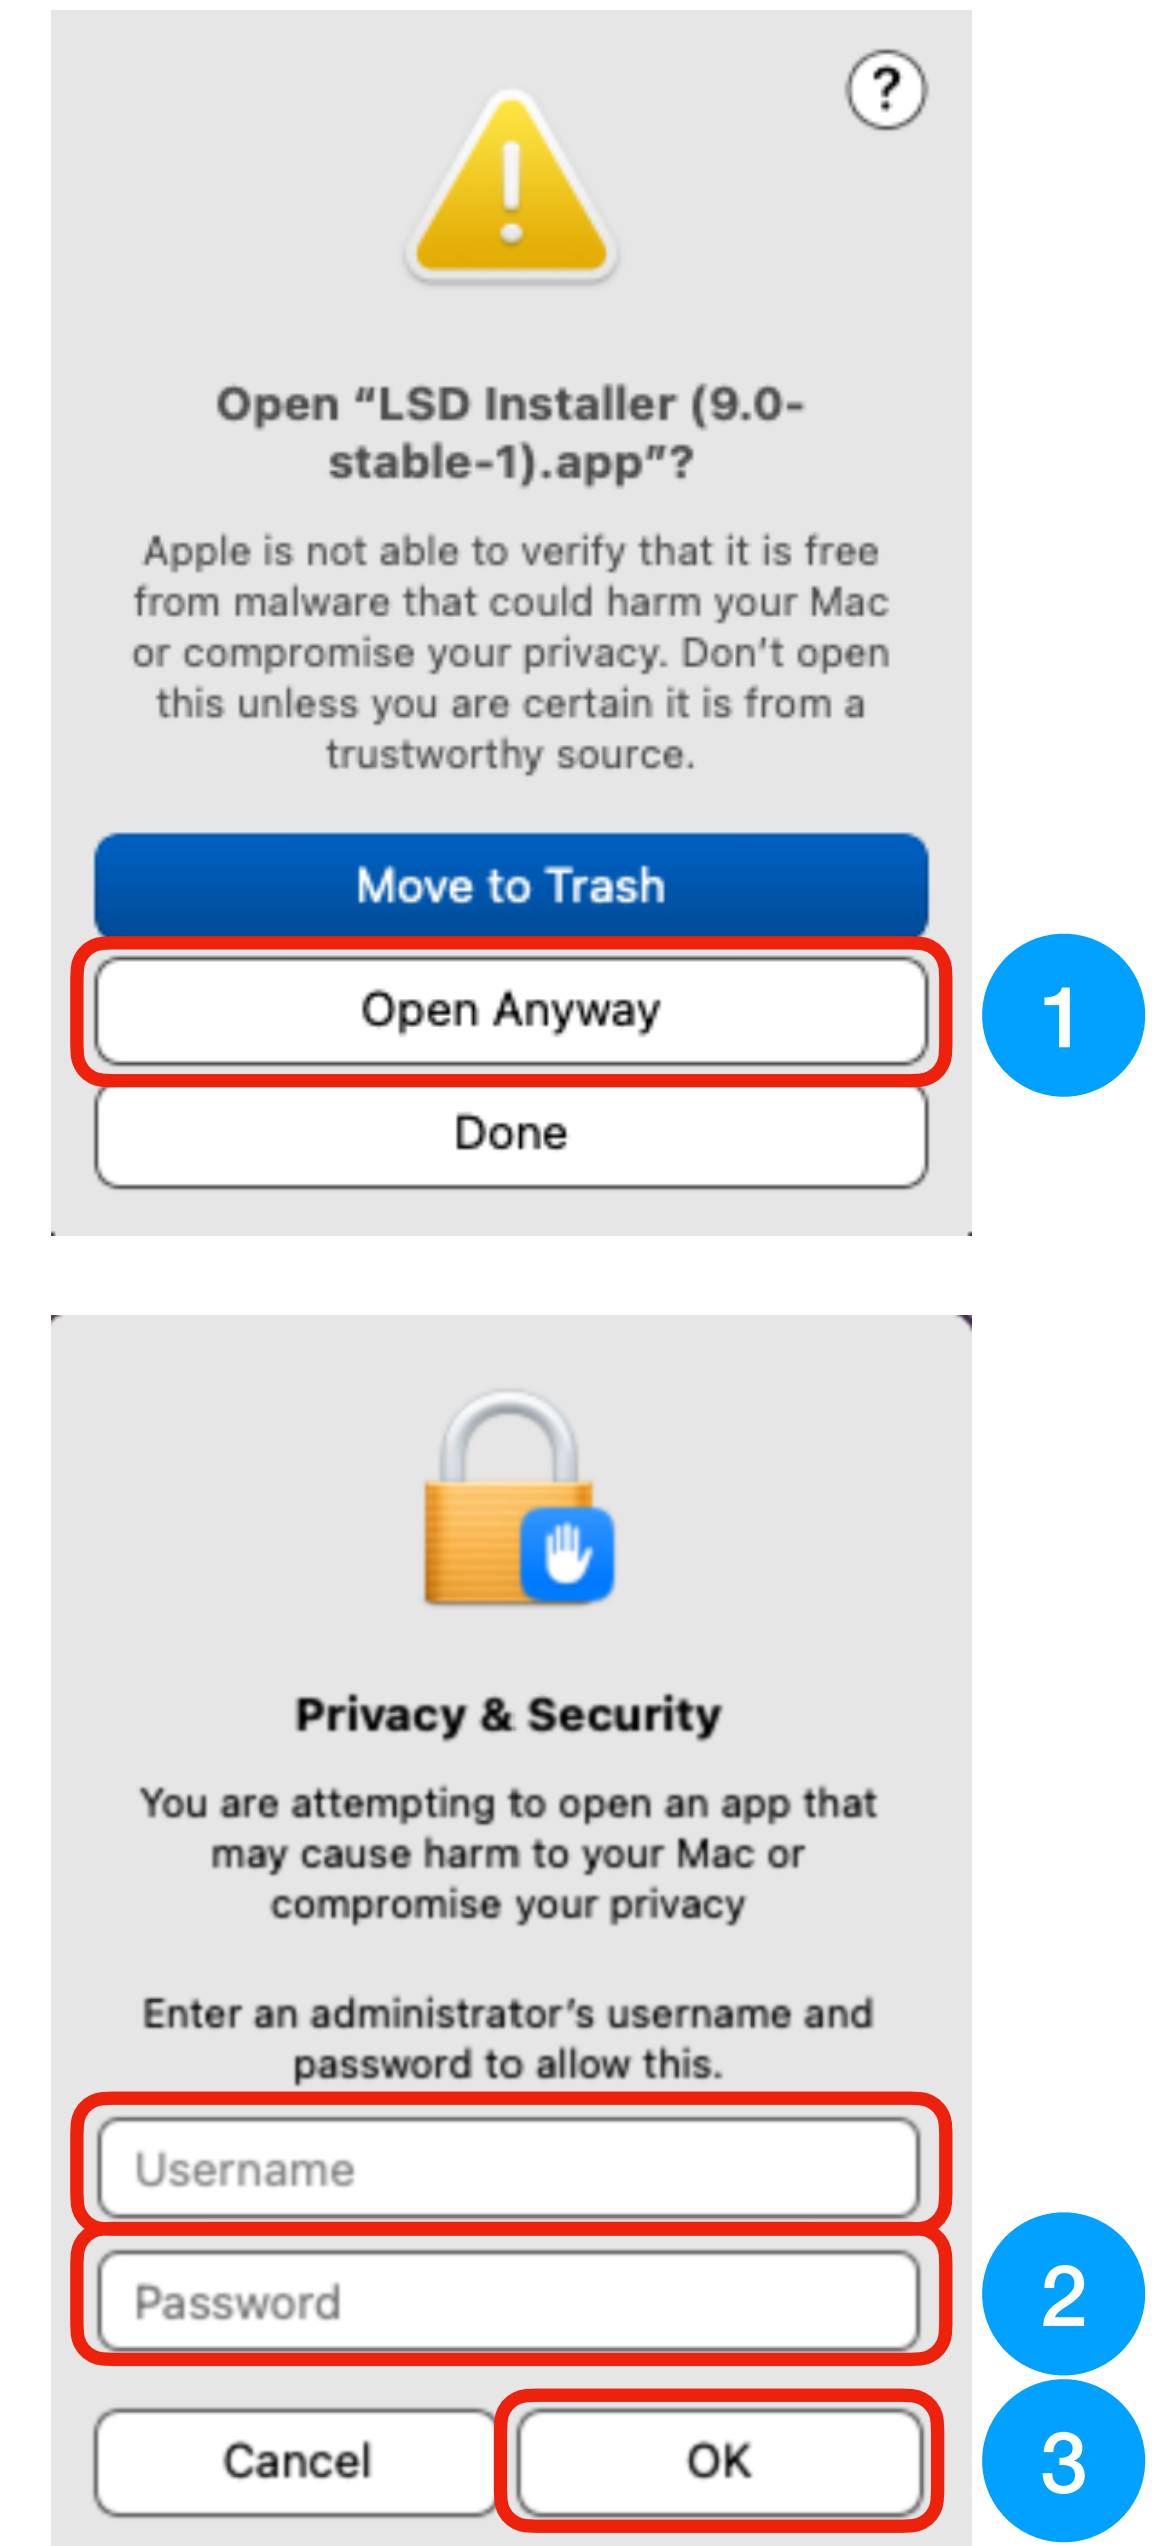


LSD Installer authorization

- Whenever LSD Installer starts on macOS, a warning is displayed, just press **OK**
- Next, LSD will try to get the required security authorizations, click on **OK**
- If required, please accept the required authorization to control Terminal, pressing **Allow**
- See the end of this document if installation aborts at this stage

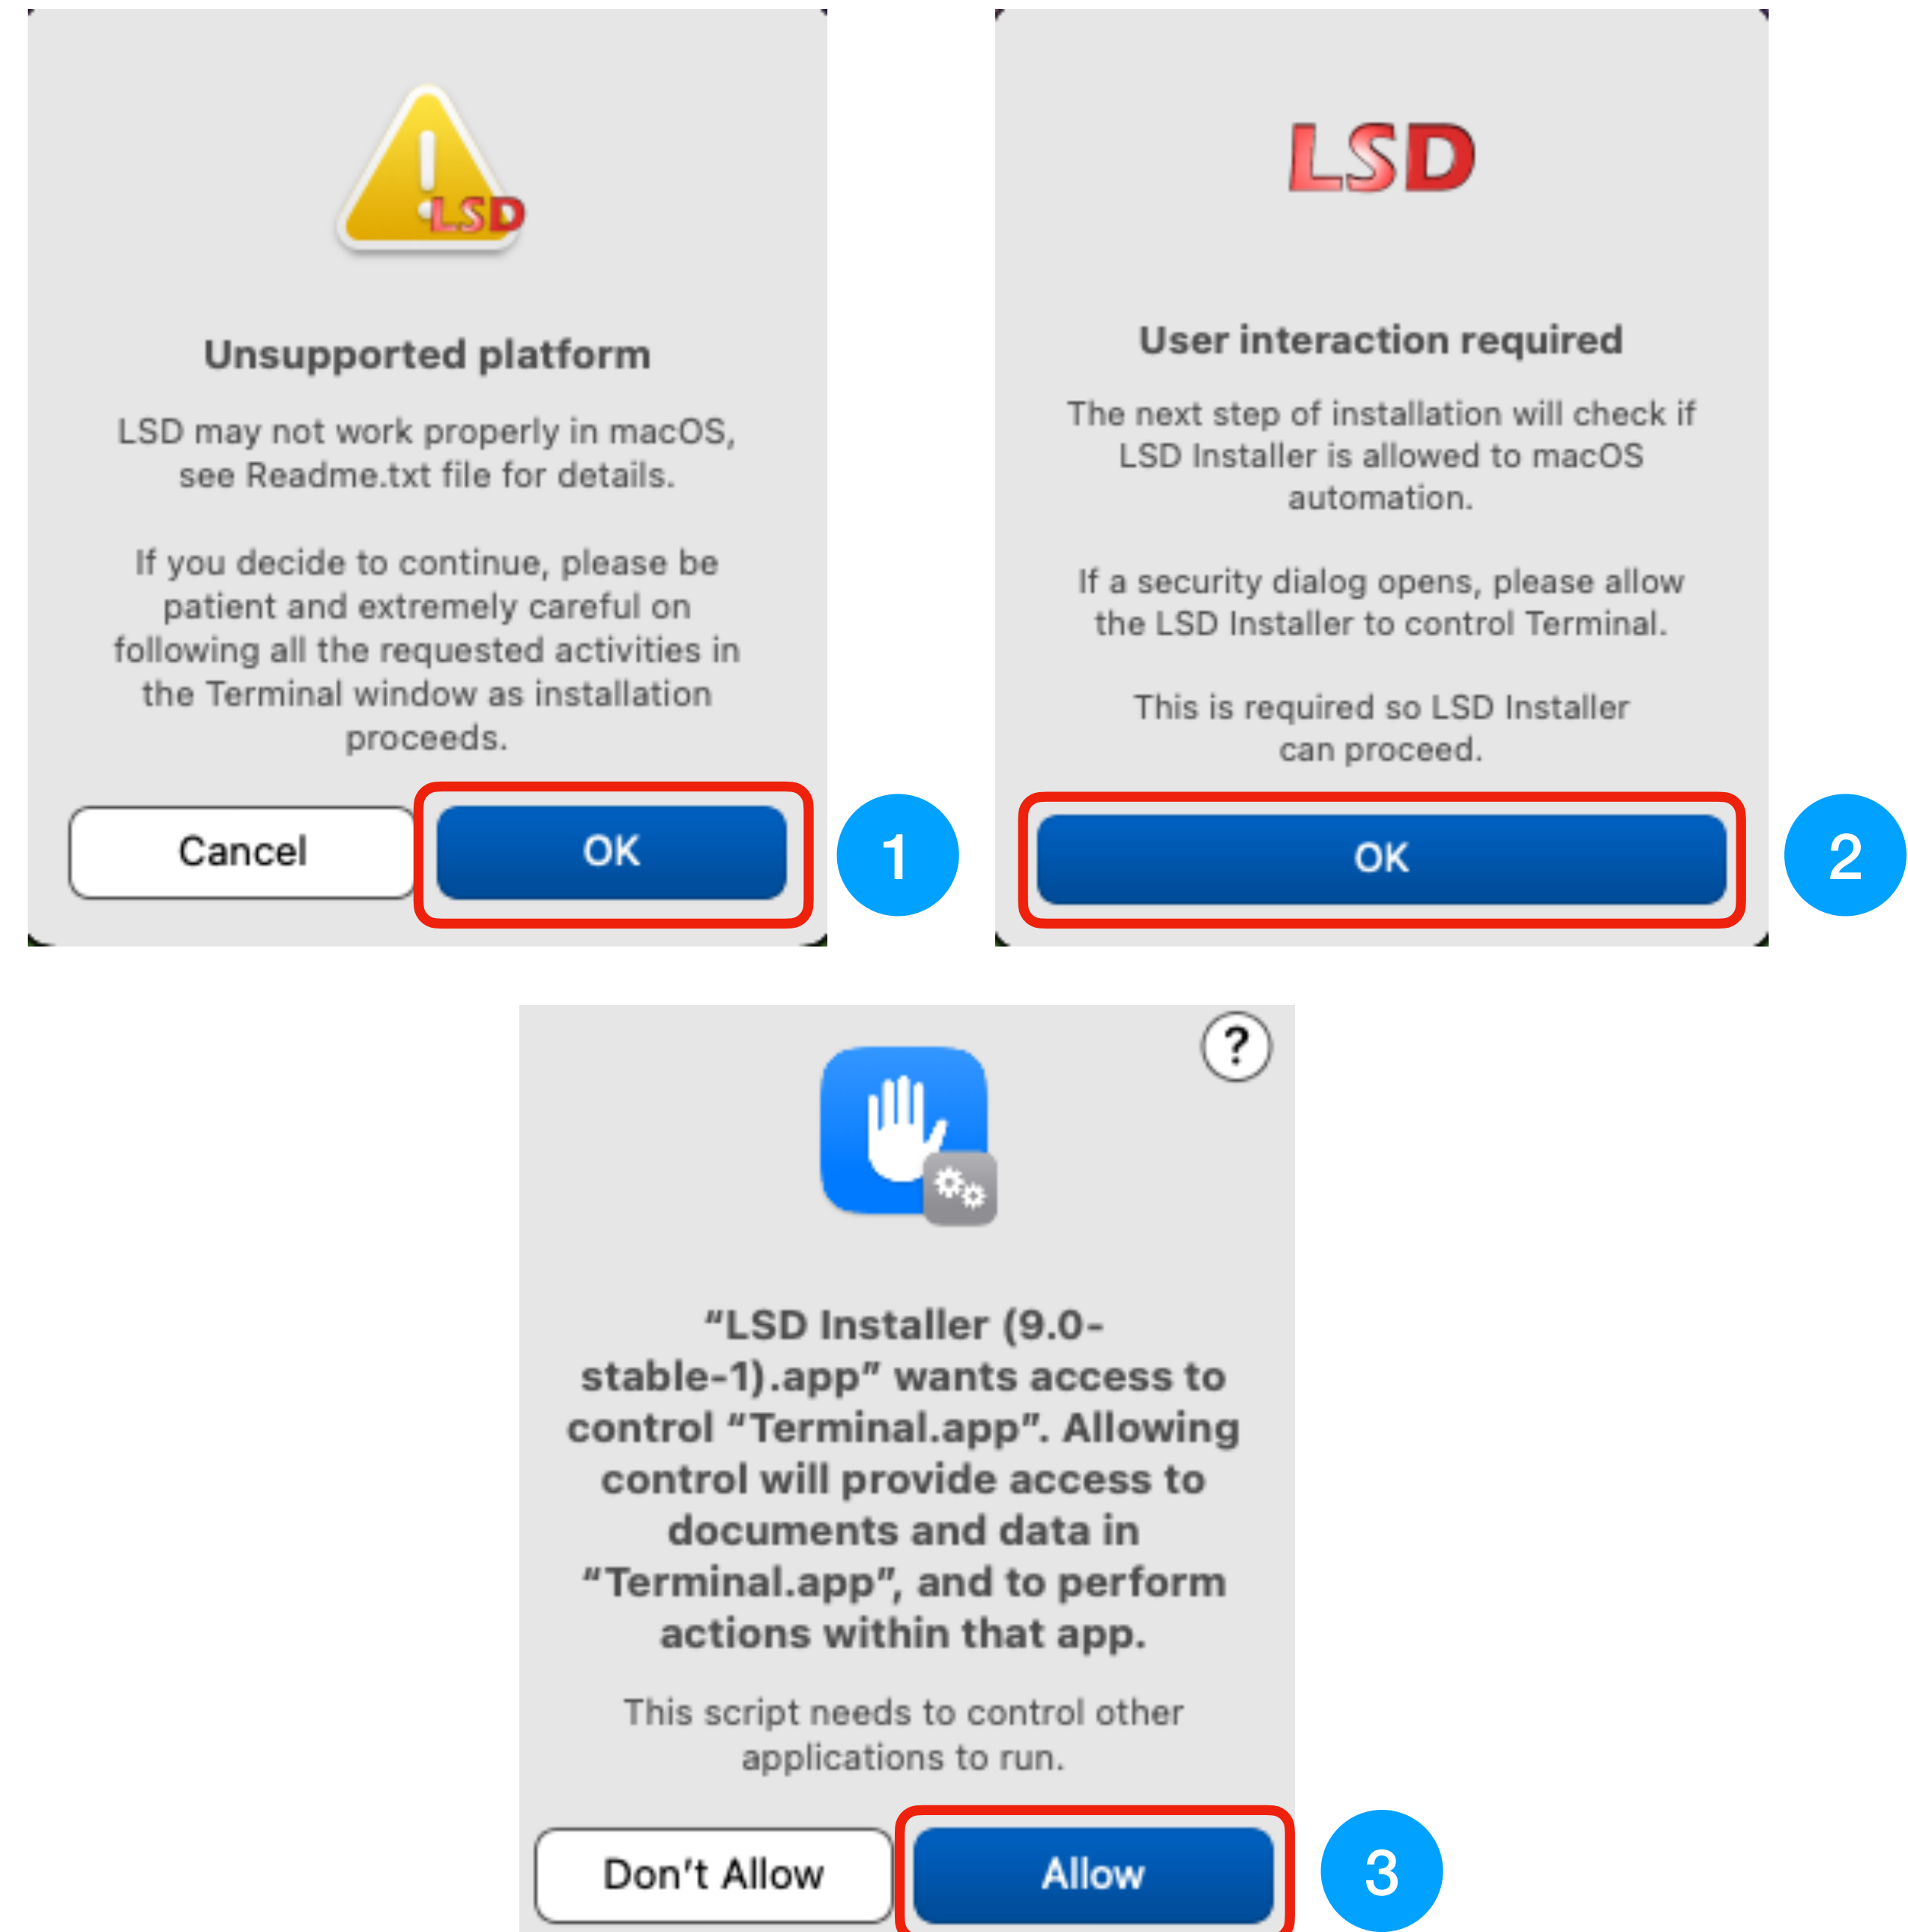



Choose LSD folder

- Select the folder where LSD will be installed
- LSD folder must be located inside the user folder, indicated as '~'
- The default folder (~/**LSD**) is usually ok
- Click on **OK** when done

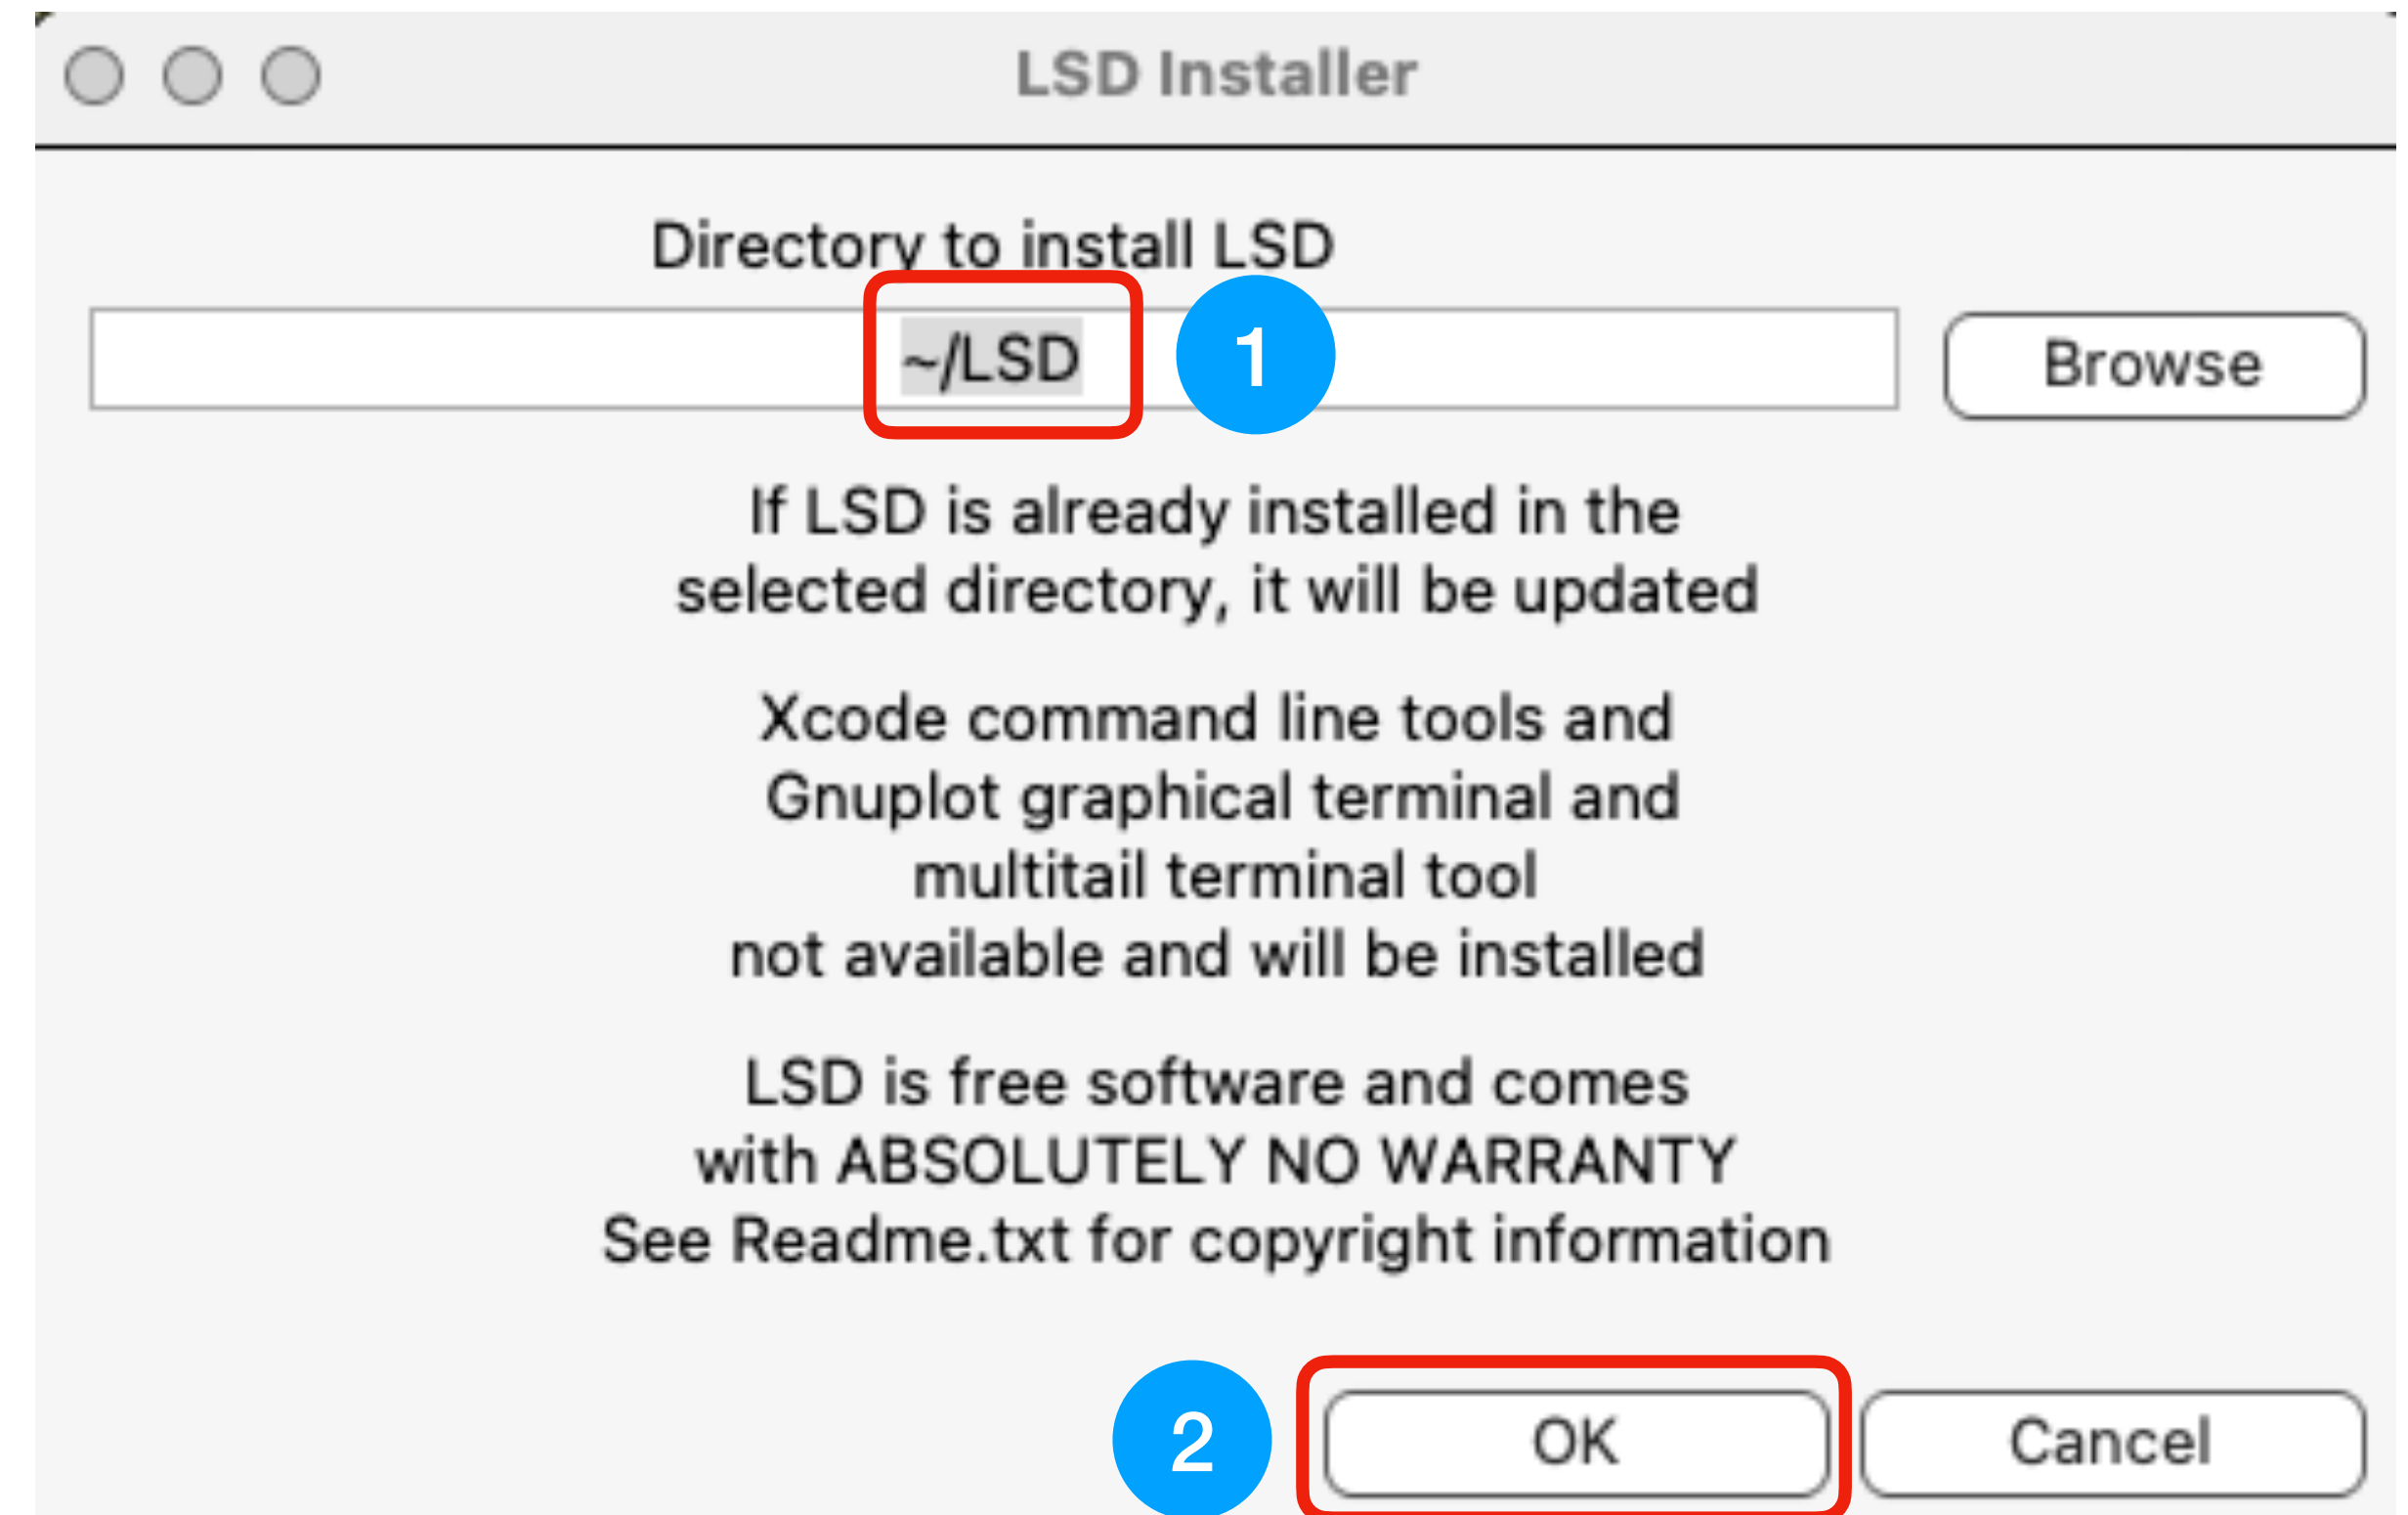



Terminal security (1)

- LSD must be installed outside macOS quarantine zone (translocation), and this must be approved in the Terminal app
- When the dialog besides appear, click on **OK** to continue
- If not authorized before, another dialog will pop up and Terminal must be allowed to control System Events, clicking **Allow**

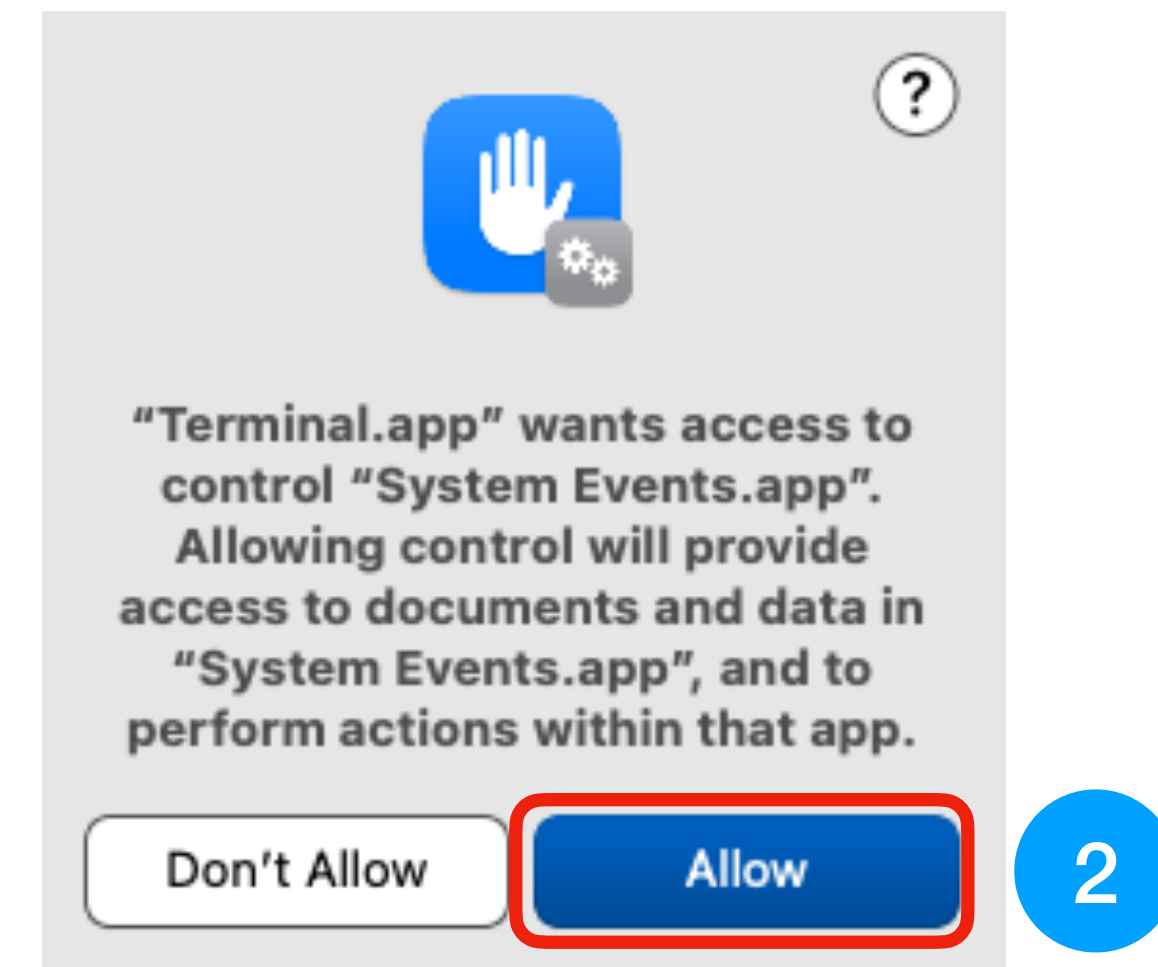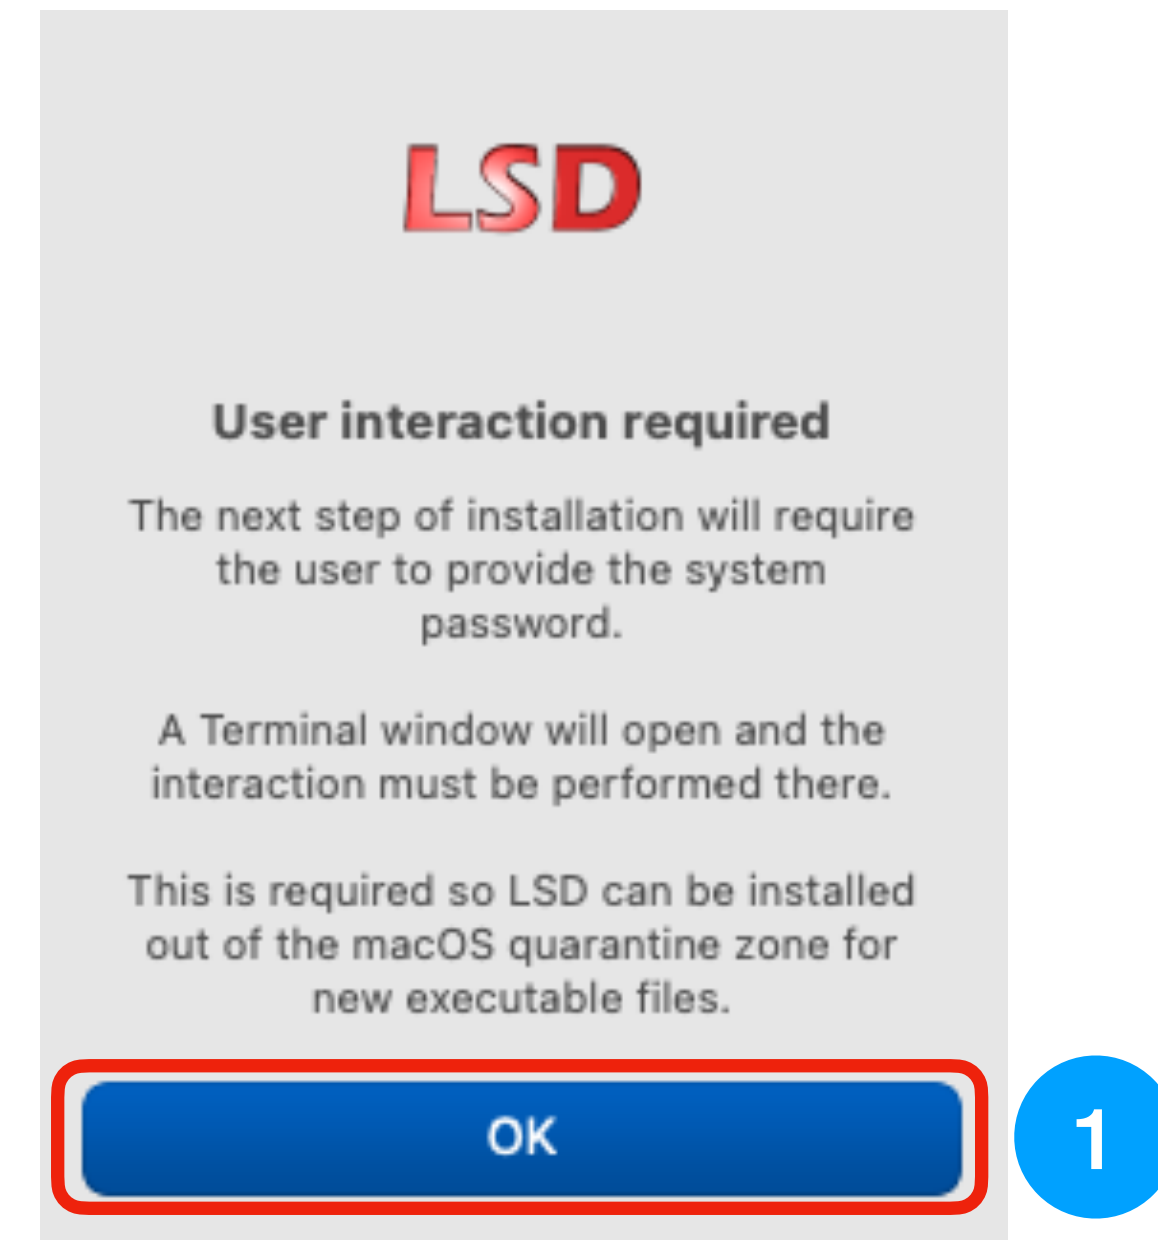


LSD security clearance

- After LSD files are installed, executables must be removed from Apple security restrictions, which prevent LSD to work, this must be done by the user on Terminal, automatically opened by LSD
- If the **Terminal** window does not come to the foreground, you may need to bring it forward clicking the Terminal icon on the taskbar
- Click on the Terminal and type your **password**, followed by **Return** key

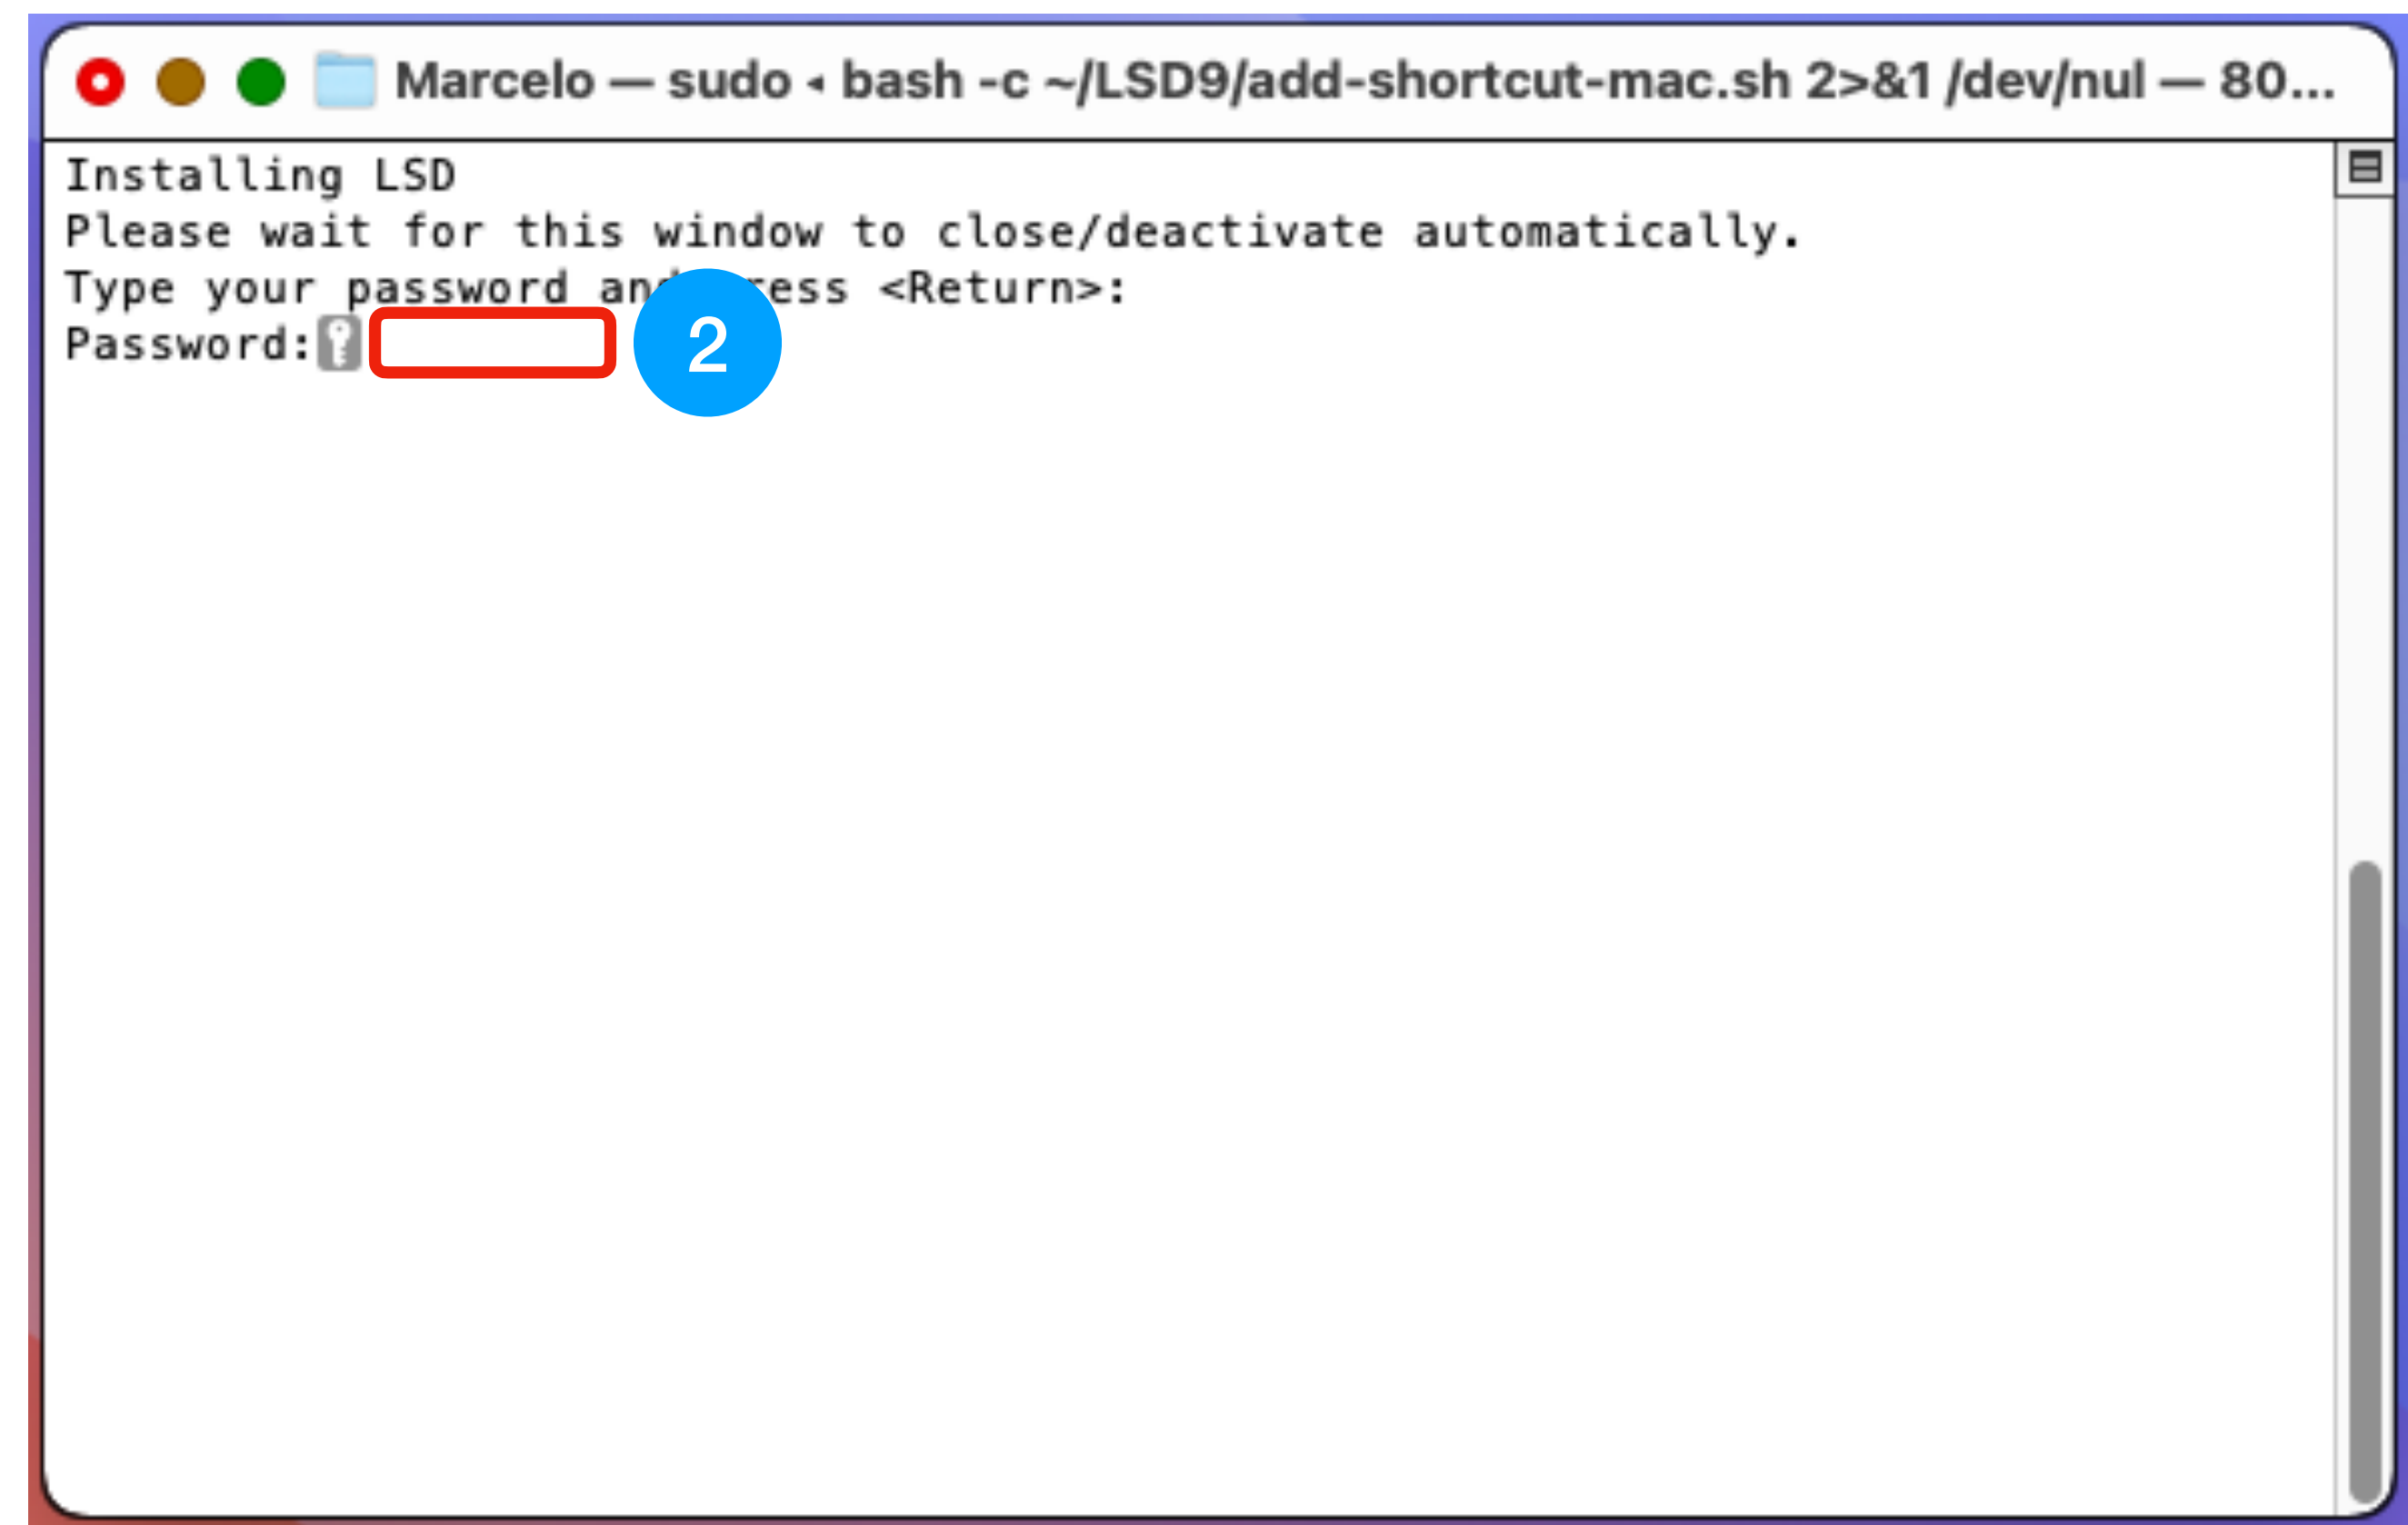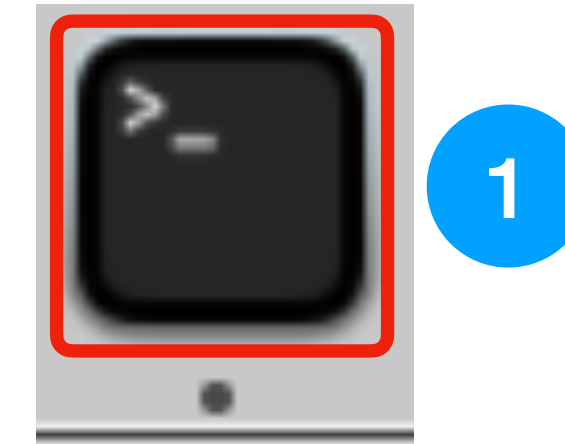





Terminal security (2)

- After entering password in Terminal, if not authorized before, another dialog will pop up and Terminal must be allowed to control Finder, clicking **Allow**
- If all tools required by LSD (Xcode, gnuplot, etc.) are already installed, LSD installation ends here
- If any tool is still missing, they are installed next, check the appropriated steps

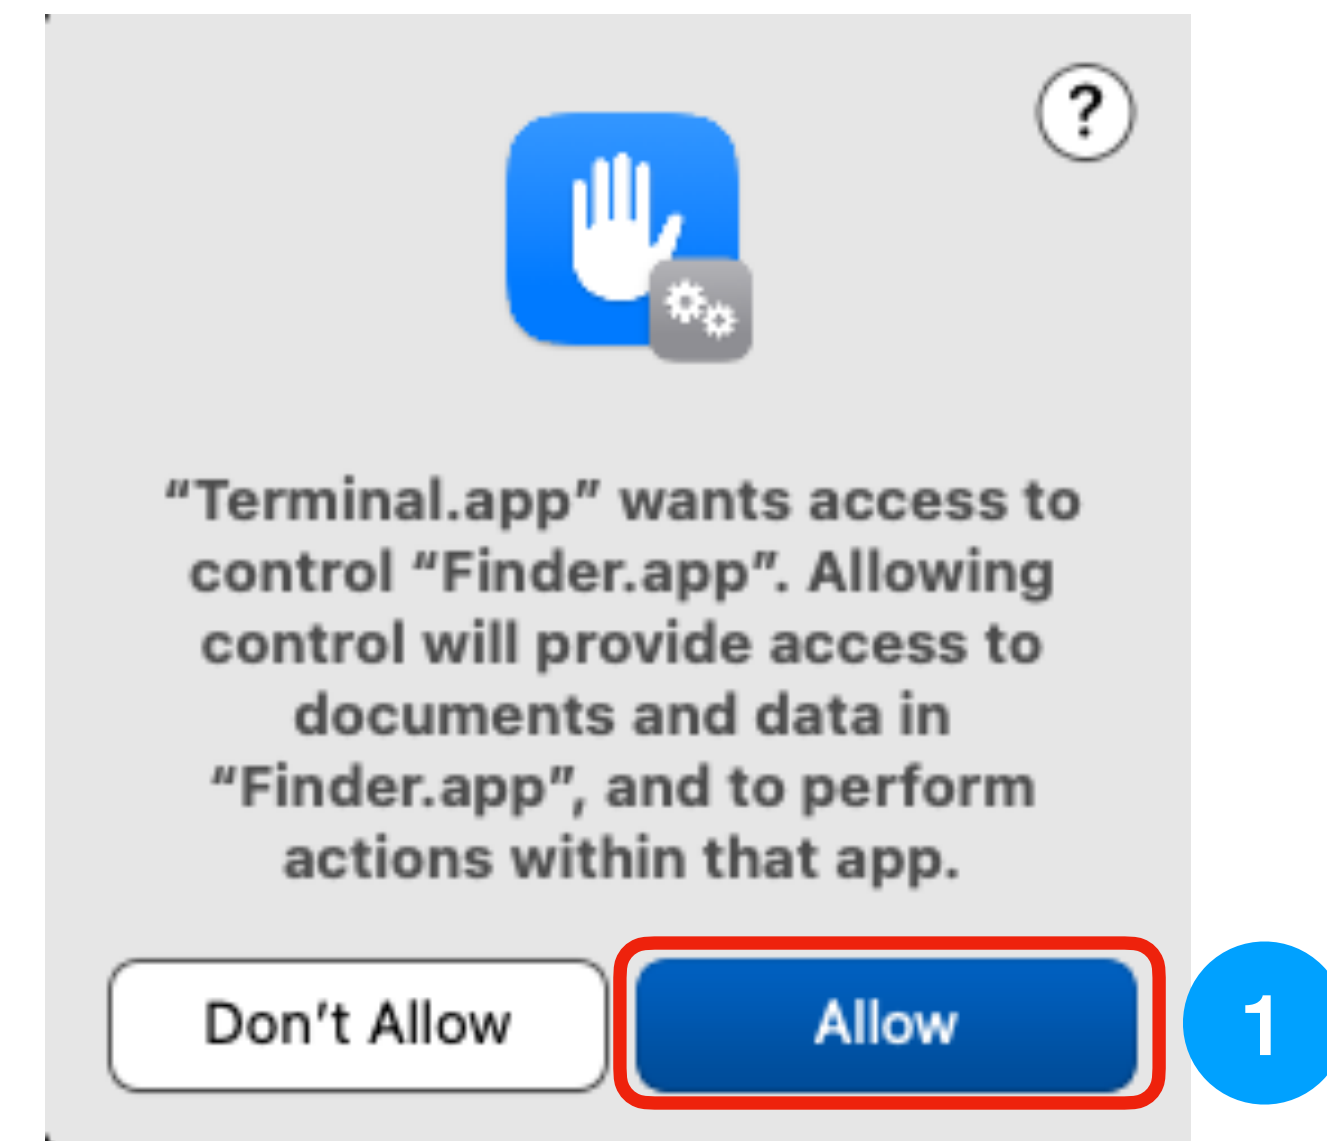



Xcode installation

- If Xcode command line utilities are not yet installed, LSD installer will try to install it
- Make sure you press **Install** in the dialog window that should appear, also clicking **Agree** on the presented agreement
- Once installation is finished, click on **Done** in the macOS dialog and then **Yes** on the LSD one

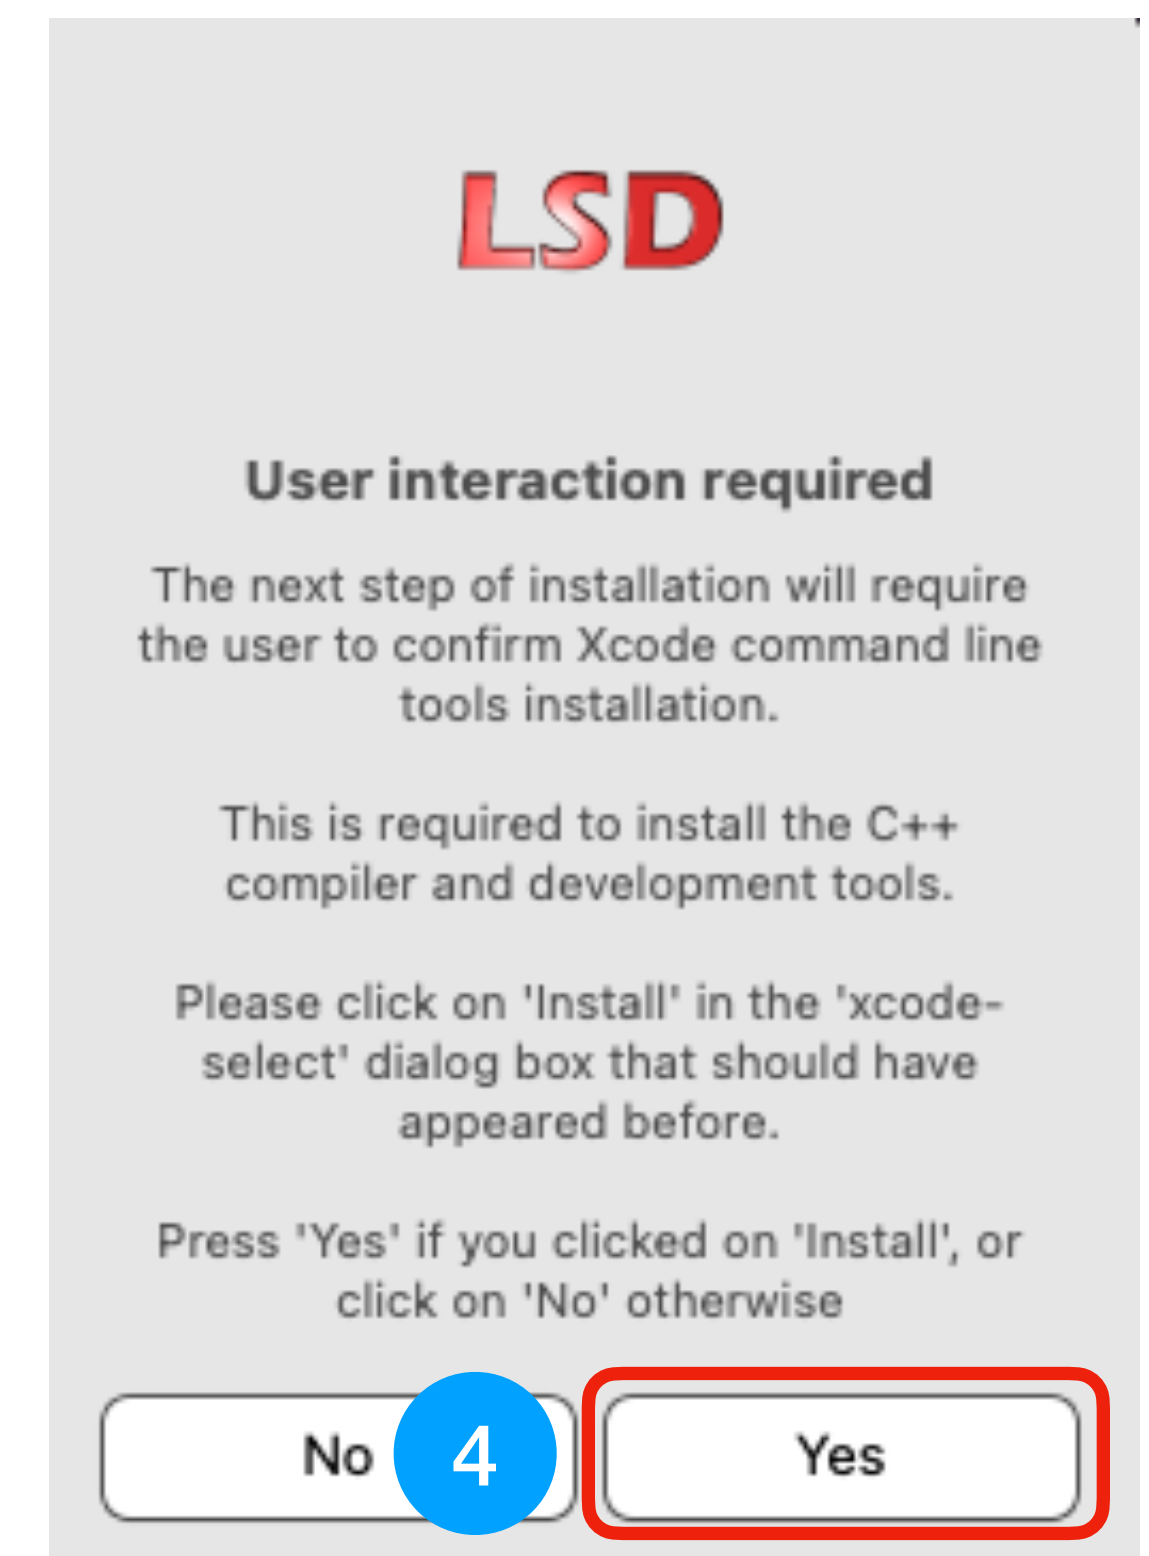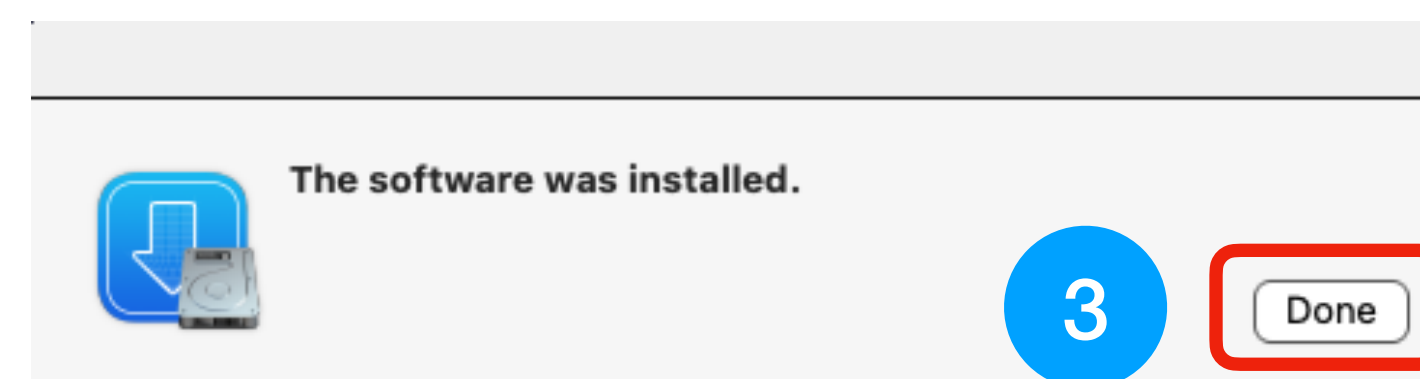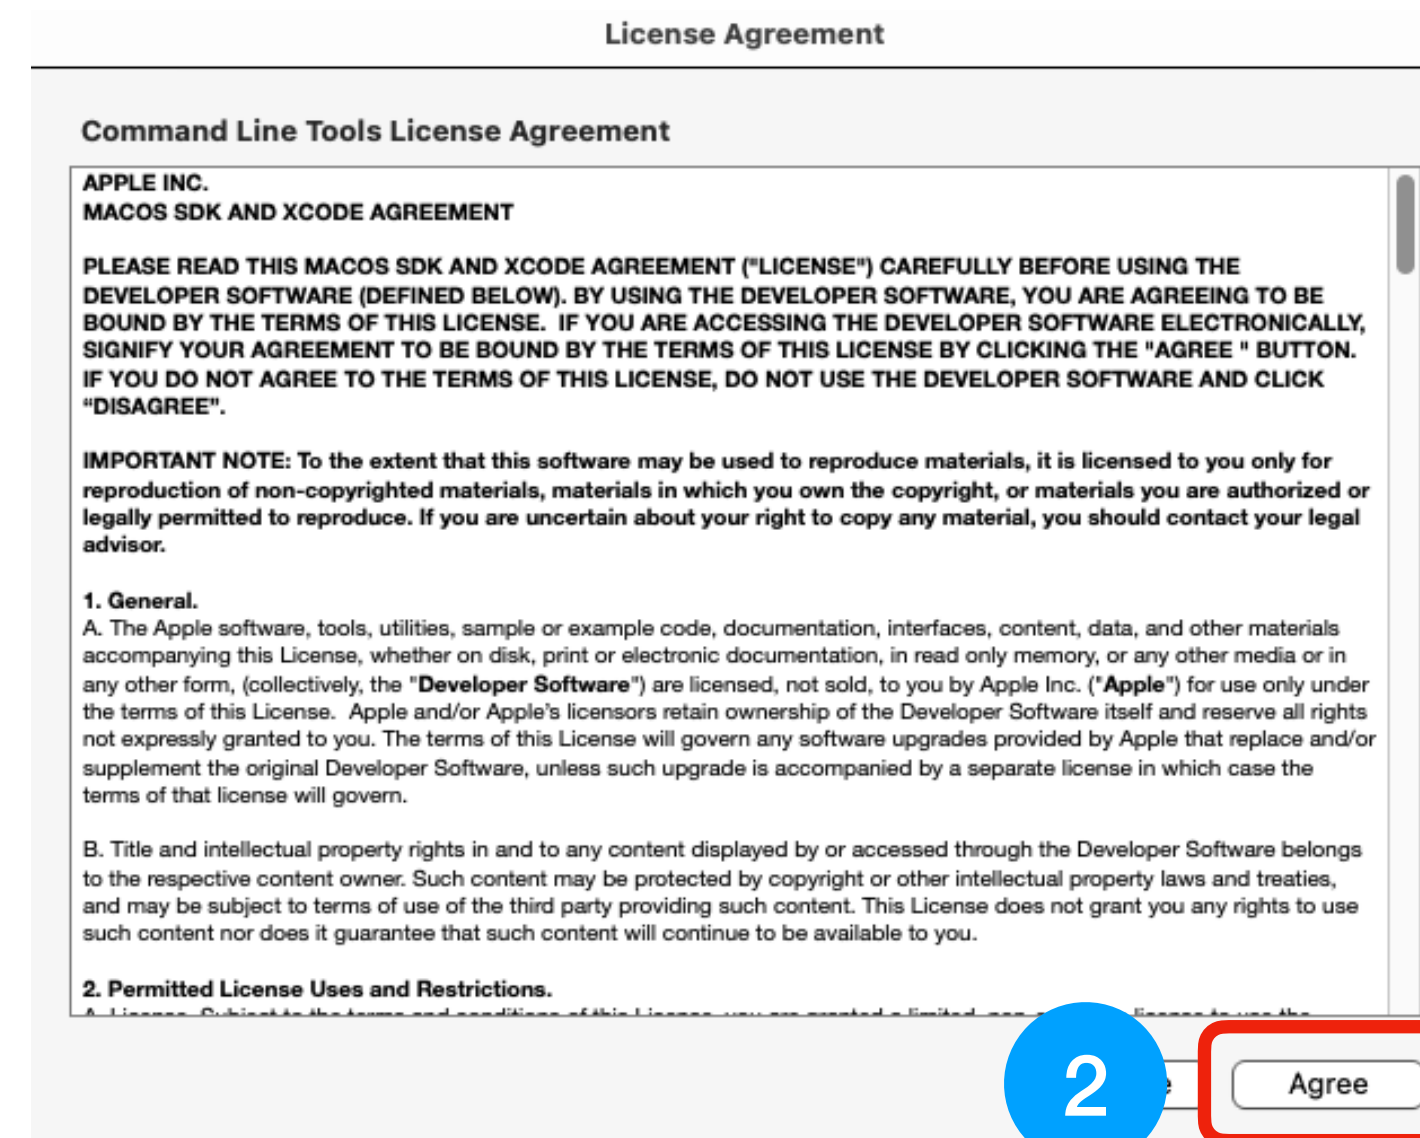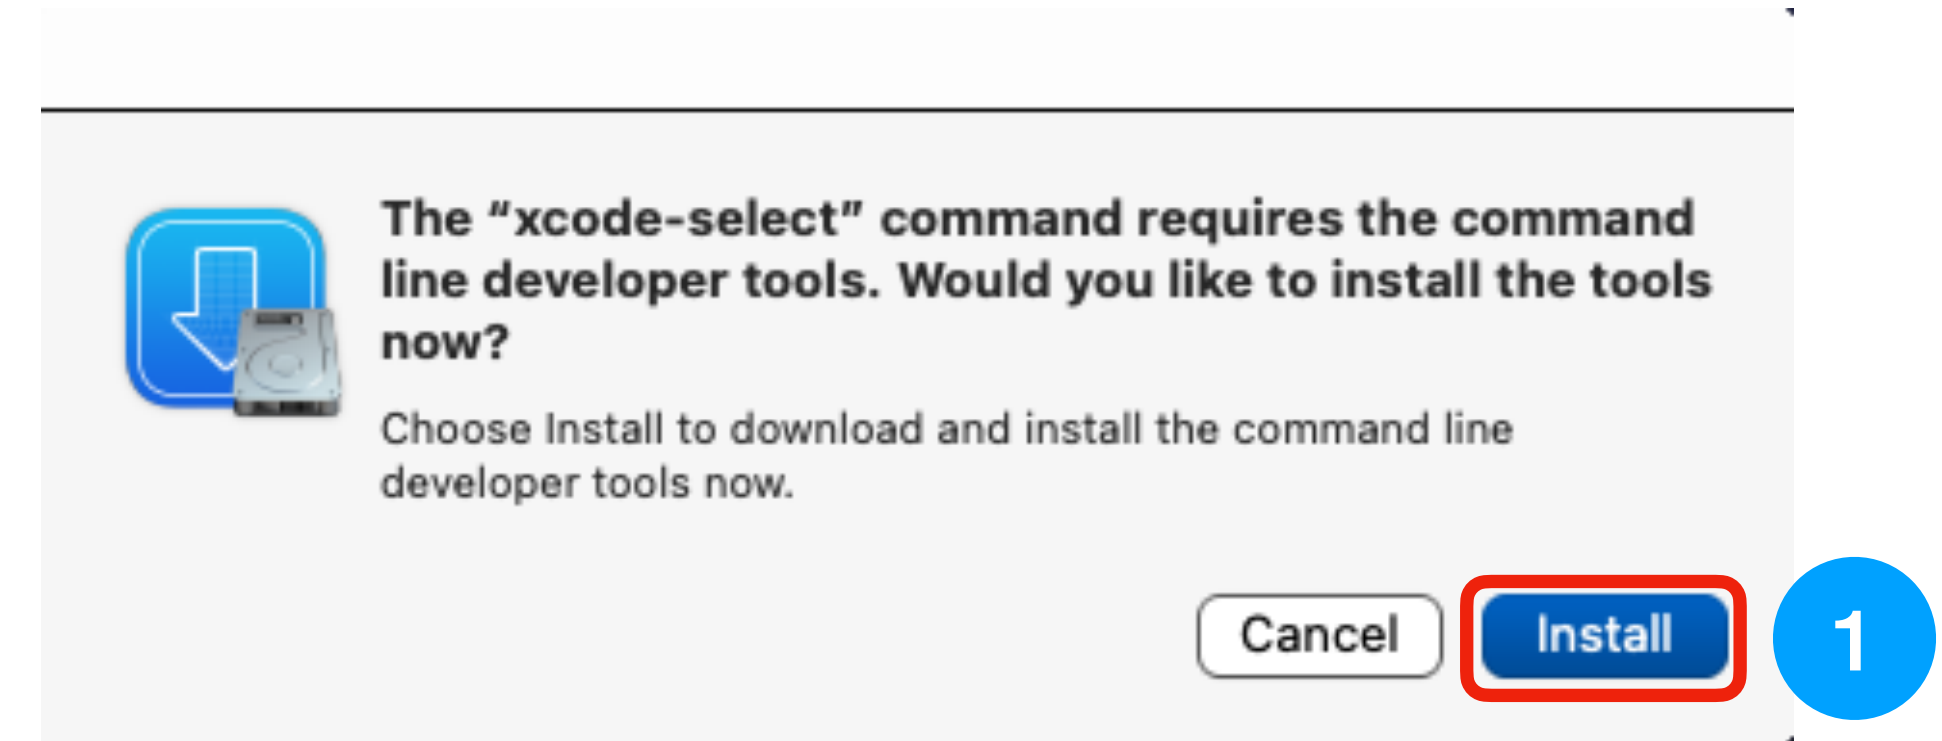

Homebrew installation


- If Homebrew or any of its required tools is not yet installed, LSD installer will try to install it using the Terminal, continue pressing **OK**
- If the **Terminal** window does not come to the foreground, bring it forward clicking the Terminal icon on the taskbar
- In Terminal, type your **password**, followed by **Return** key twice

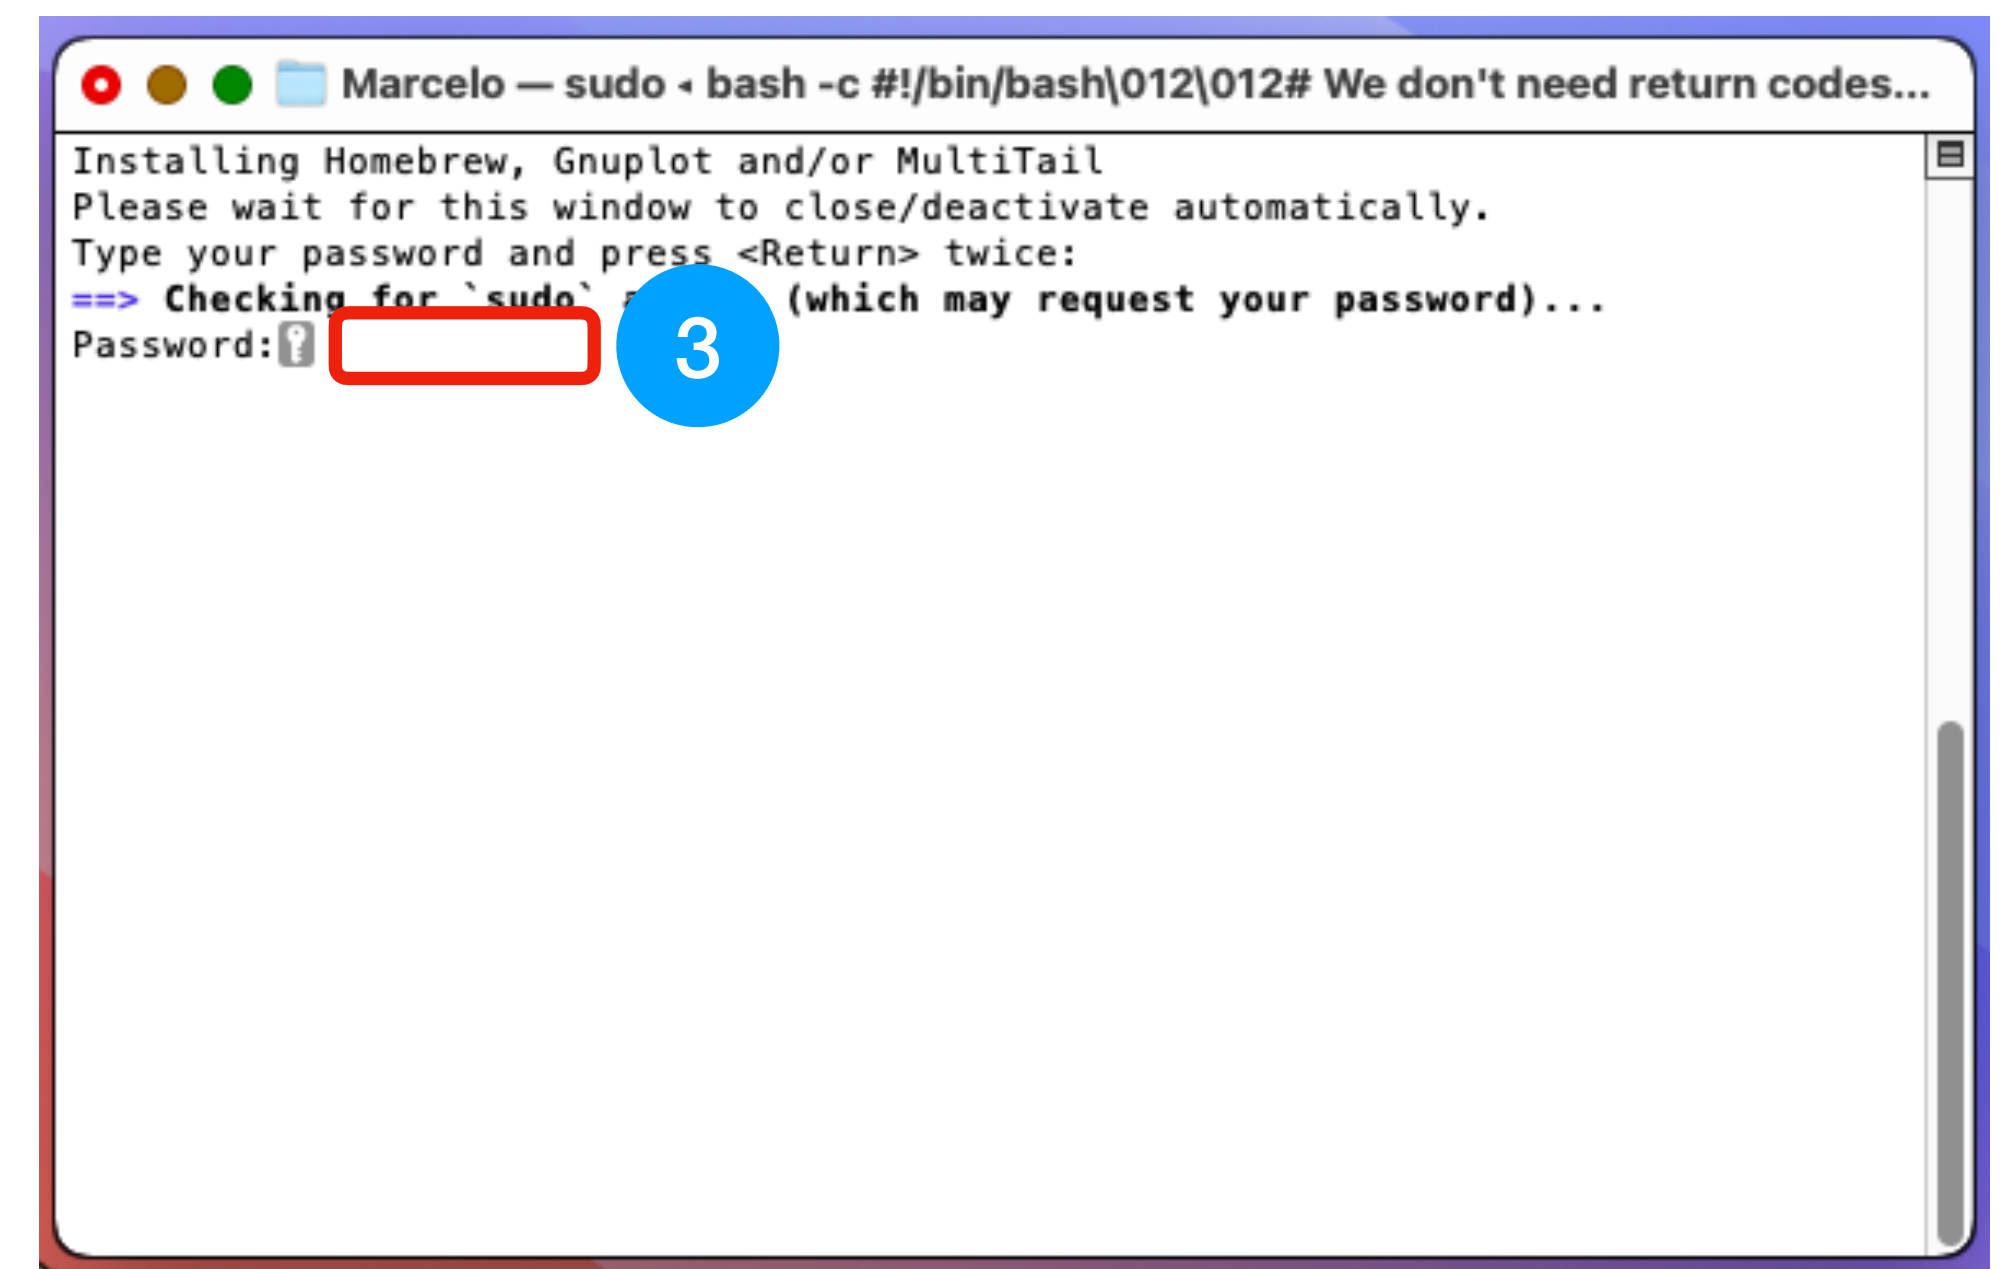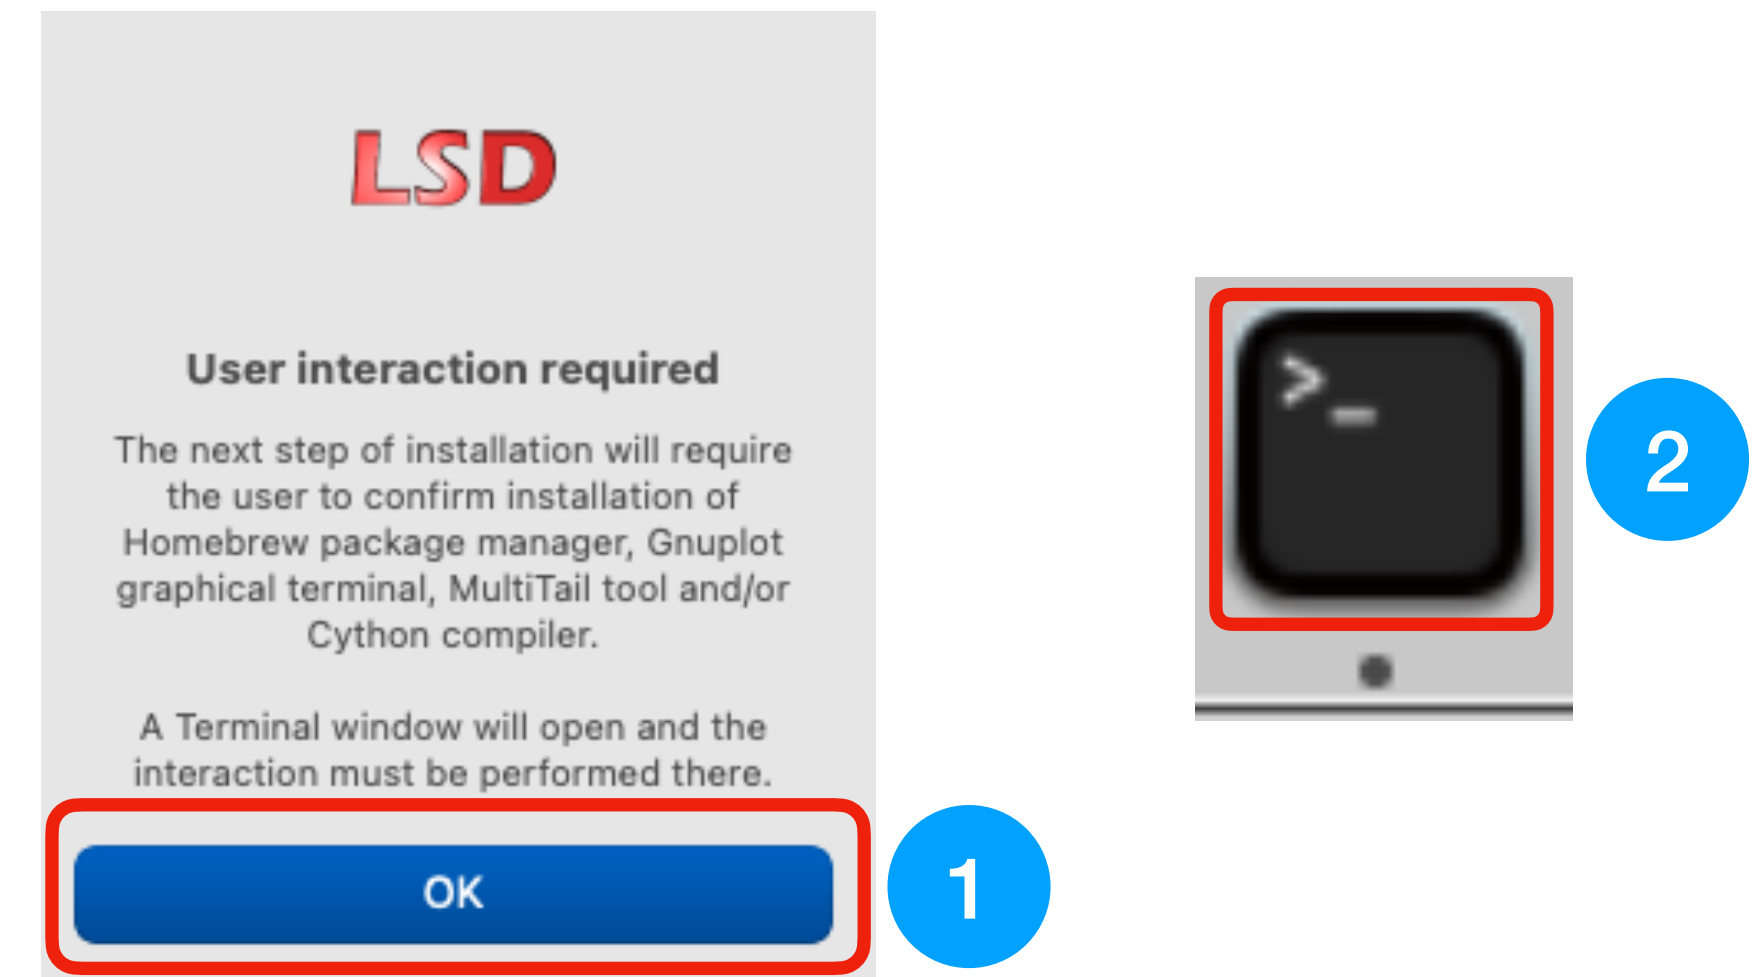

**Installation aborted for lacking
security authorizations**



Automation unavailable

- If you get the message besides when executing the LSD installer, you will need to follow the remaining instructions in this guide
- The first time you install LSD, macOS may not allow LSD Installer to continue
- Subsequent (re)installations should not require these steps

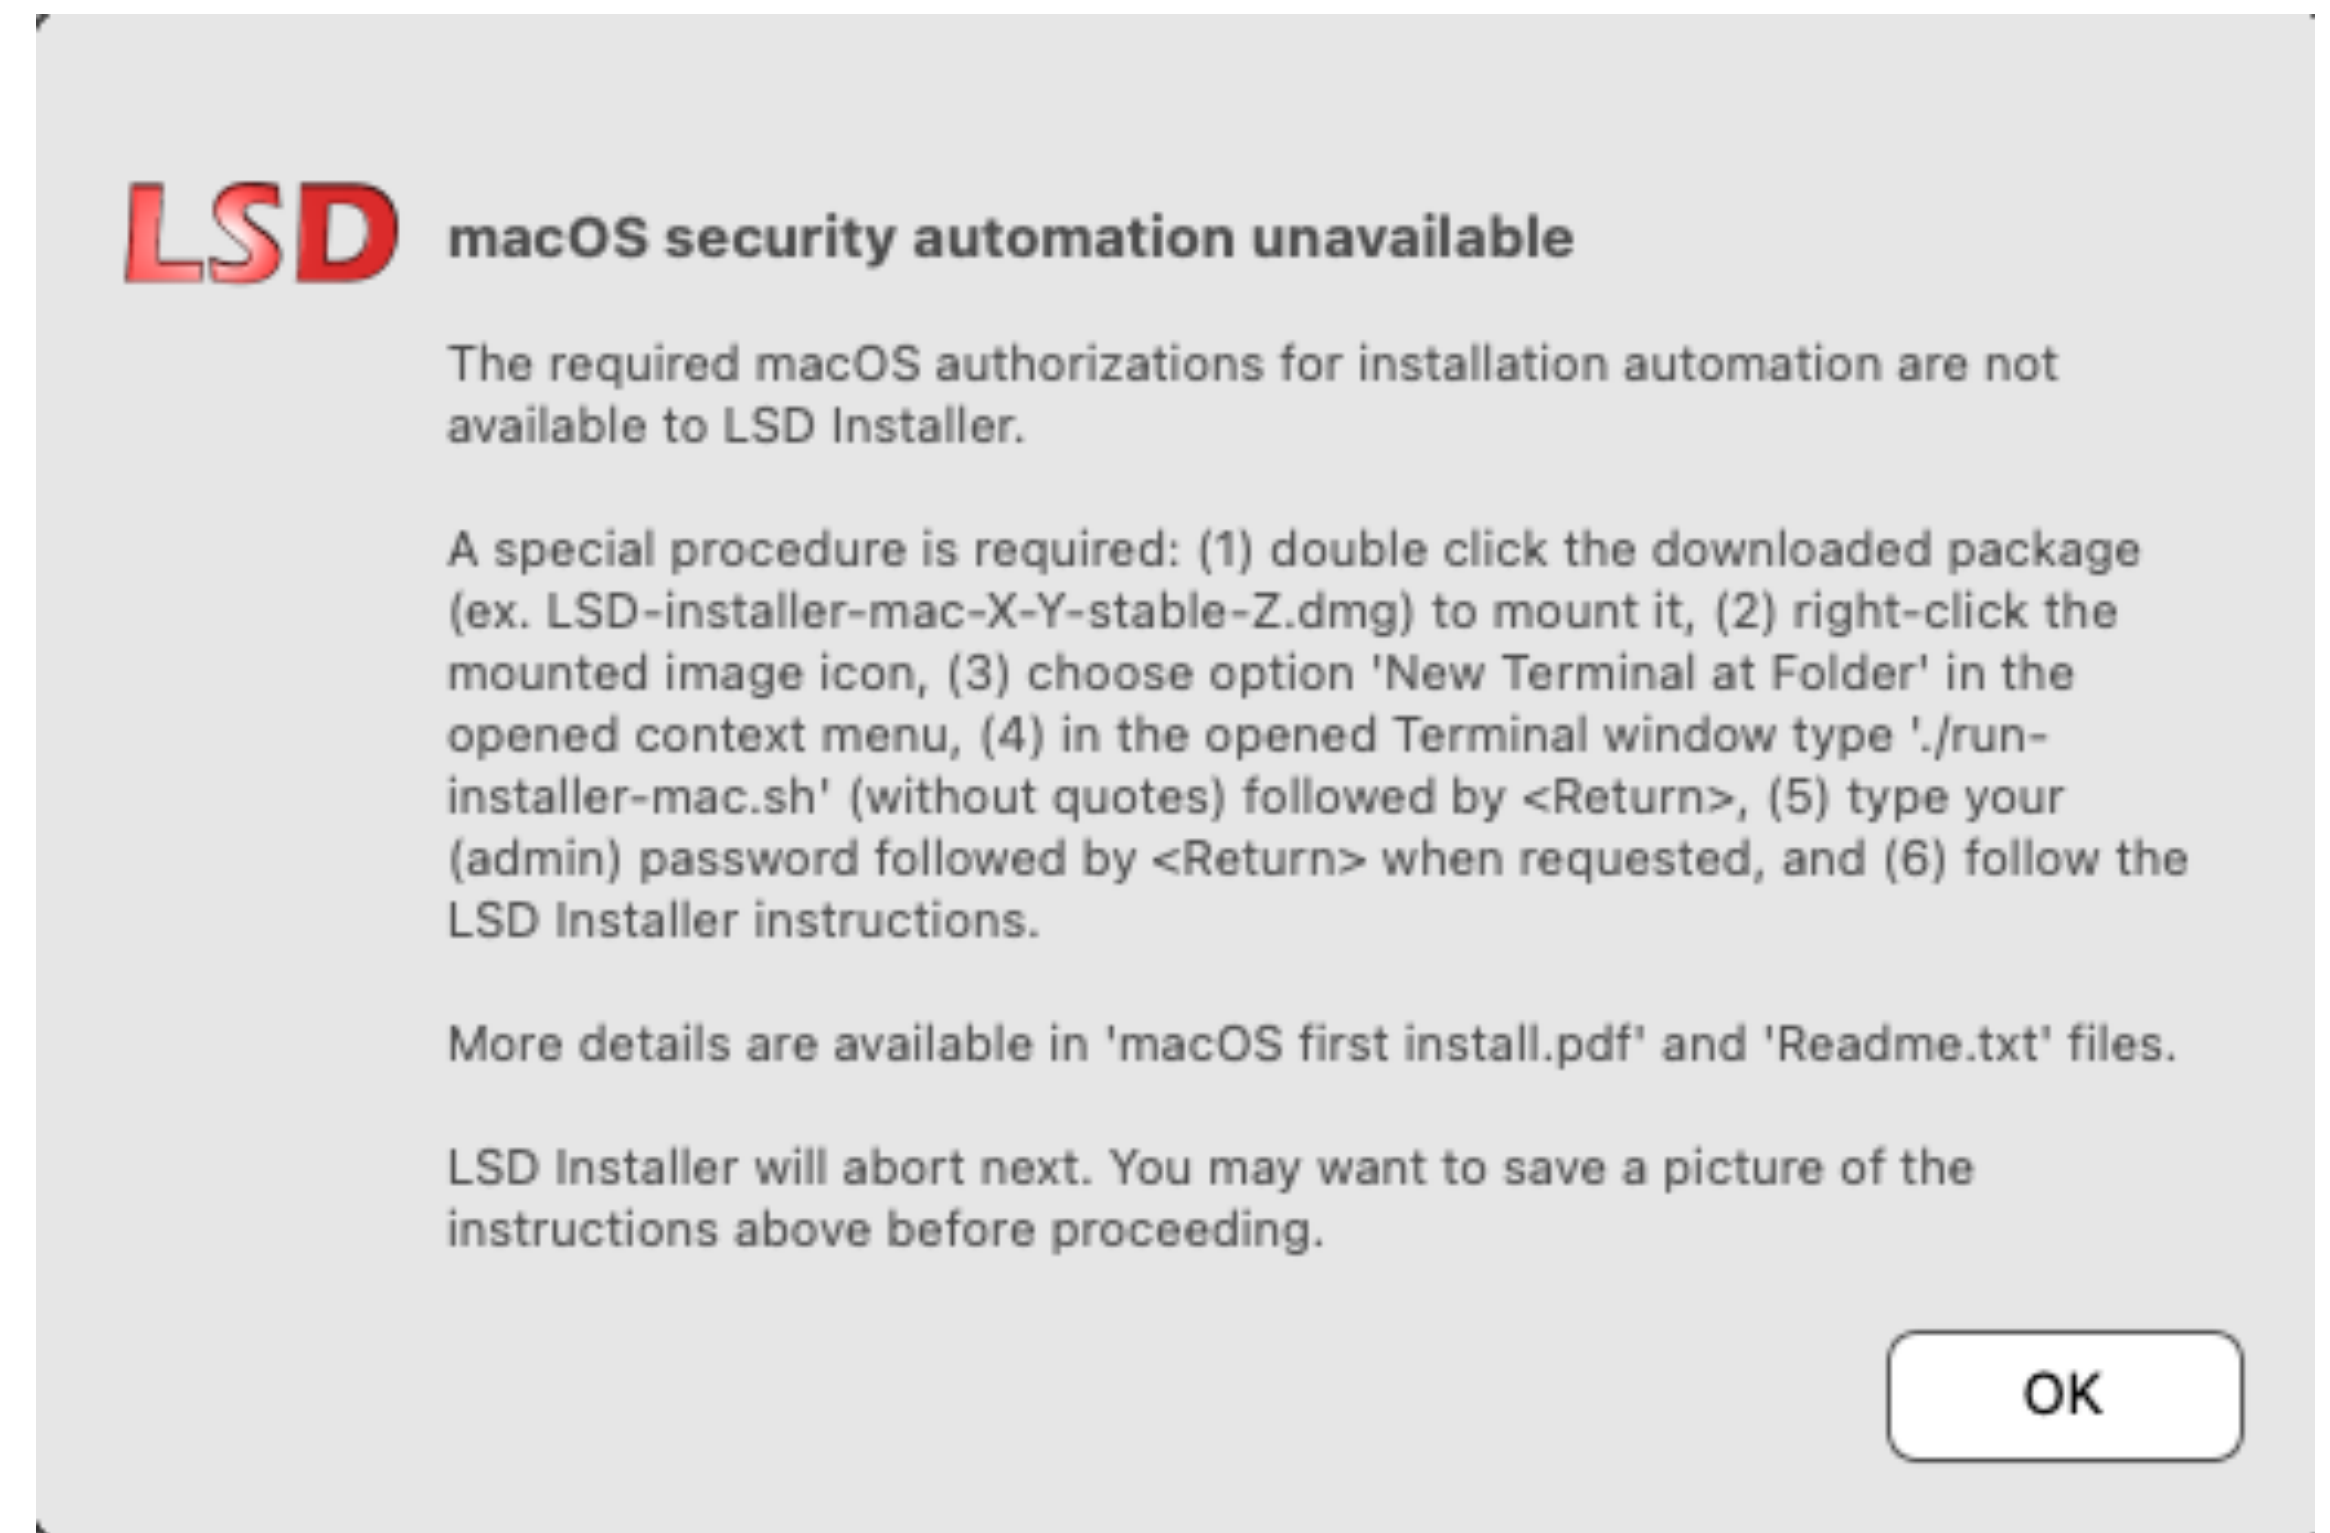

Open Terminal at image folder

- Find the icon in the desktop for the mounted image of the LSD Installer
- Move the mouse over the icon, and click it with two fingers (or Ctrl-click) to show the context menu, as besides
- In the context menu, choose the **New Terminal at Folder** option

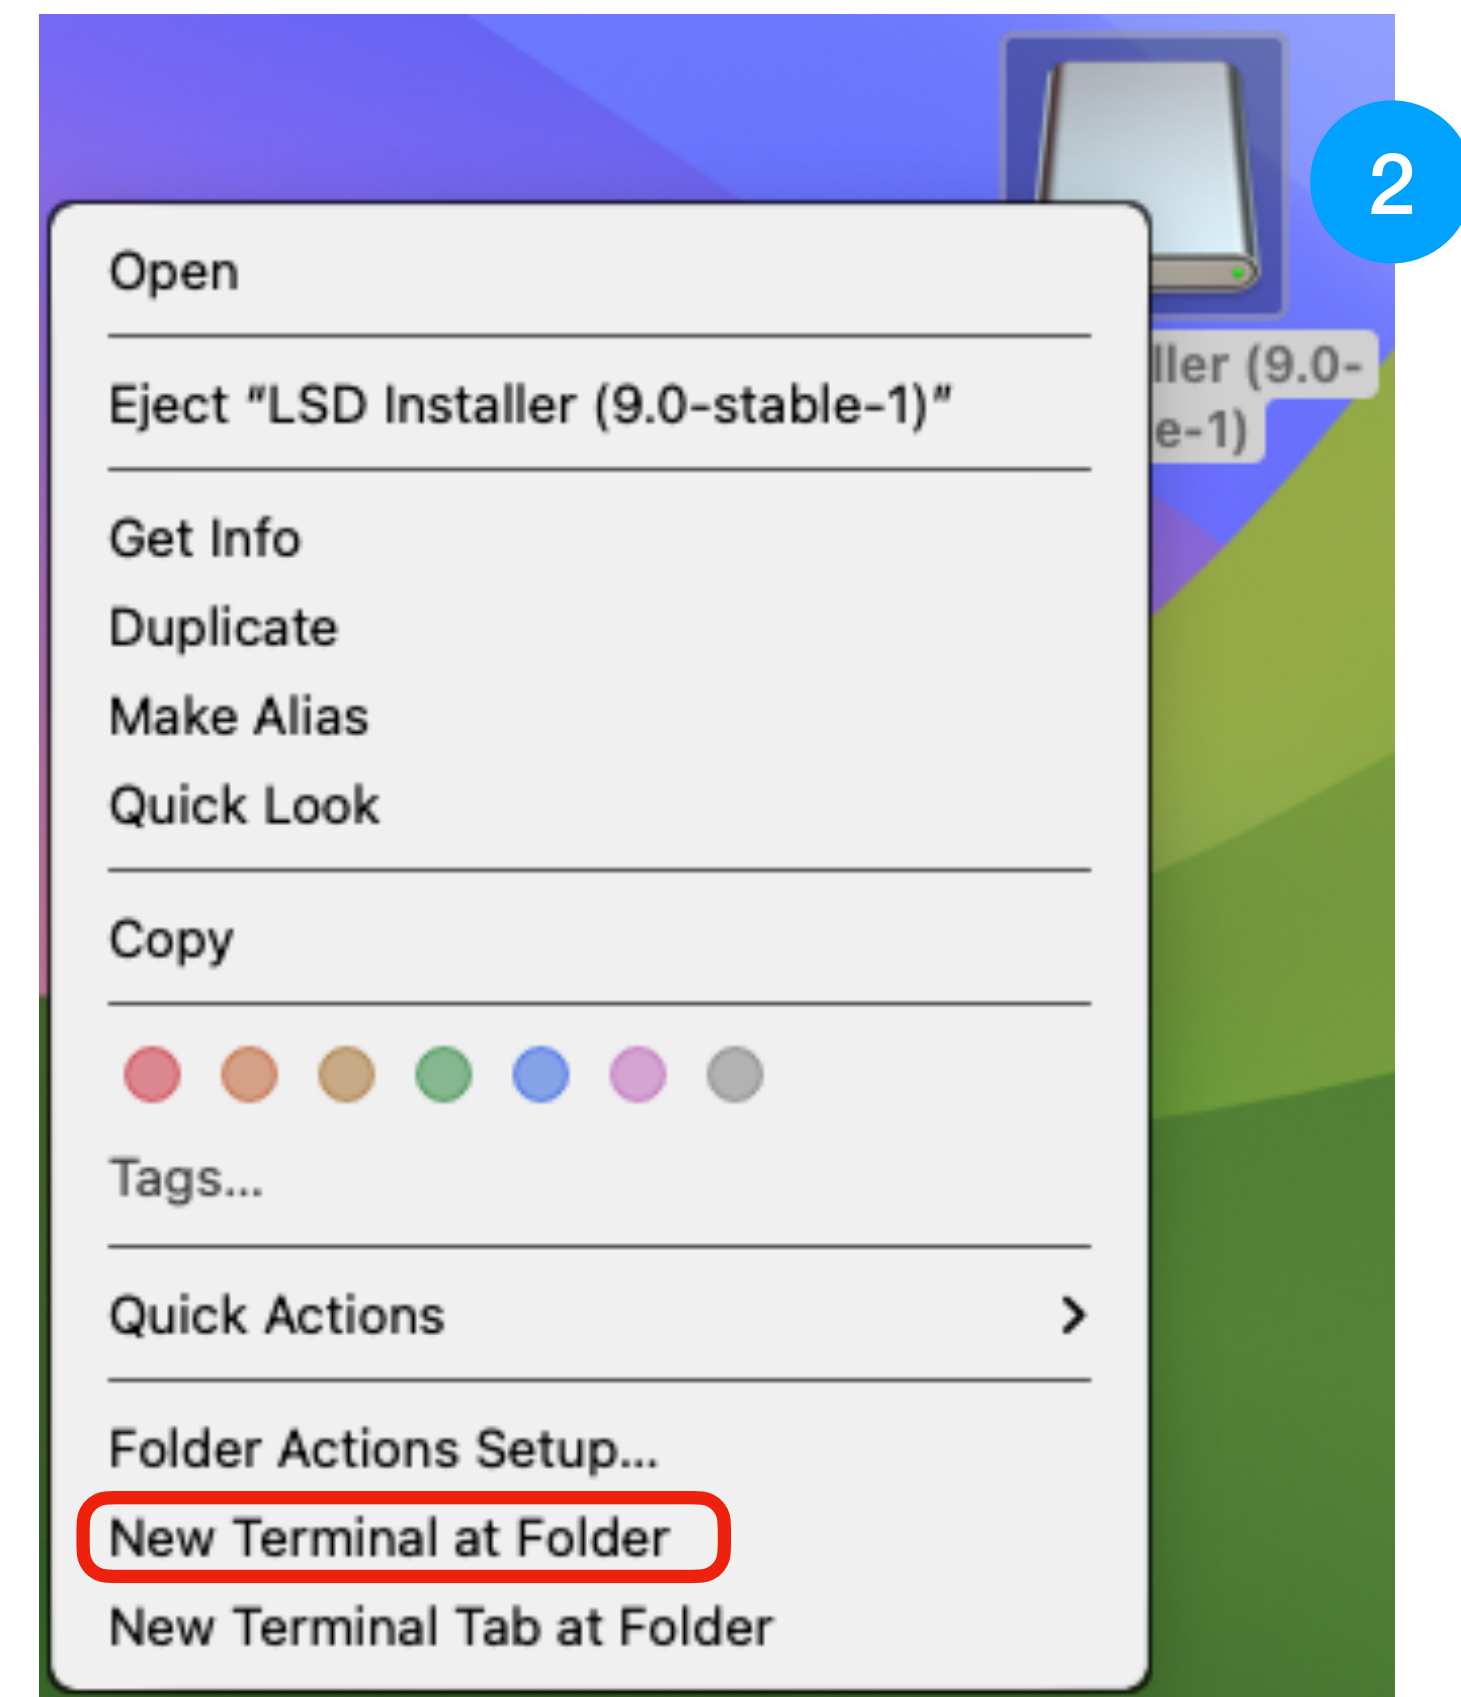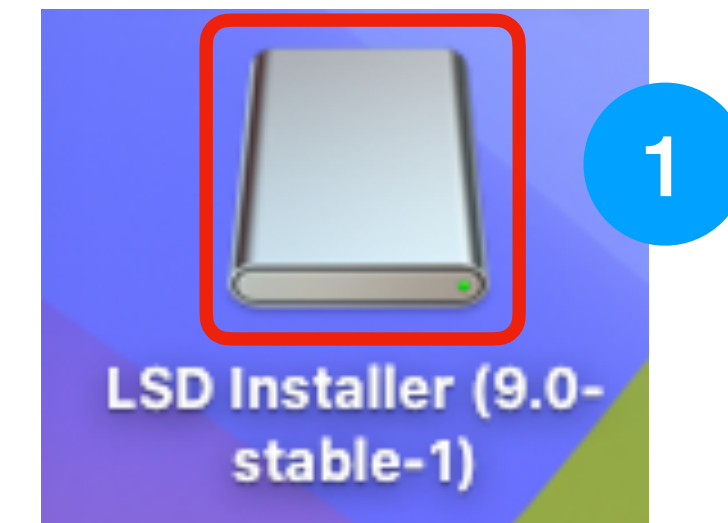


3

Start the installer script

- A Terminal window will open, click on it to select it
- After selecting, type:

`./run-installer-mac.sh`
- Press **Return** in the keyboard
- Enter your password when requested, followed by **Return**
- The user must have an administrator password to install LSD
- Go back to the main installation steps

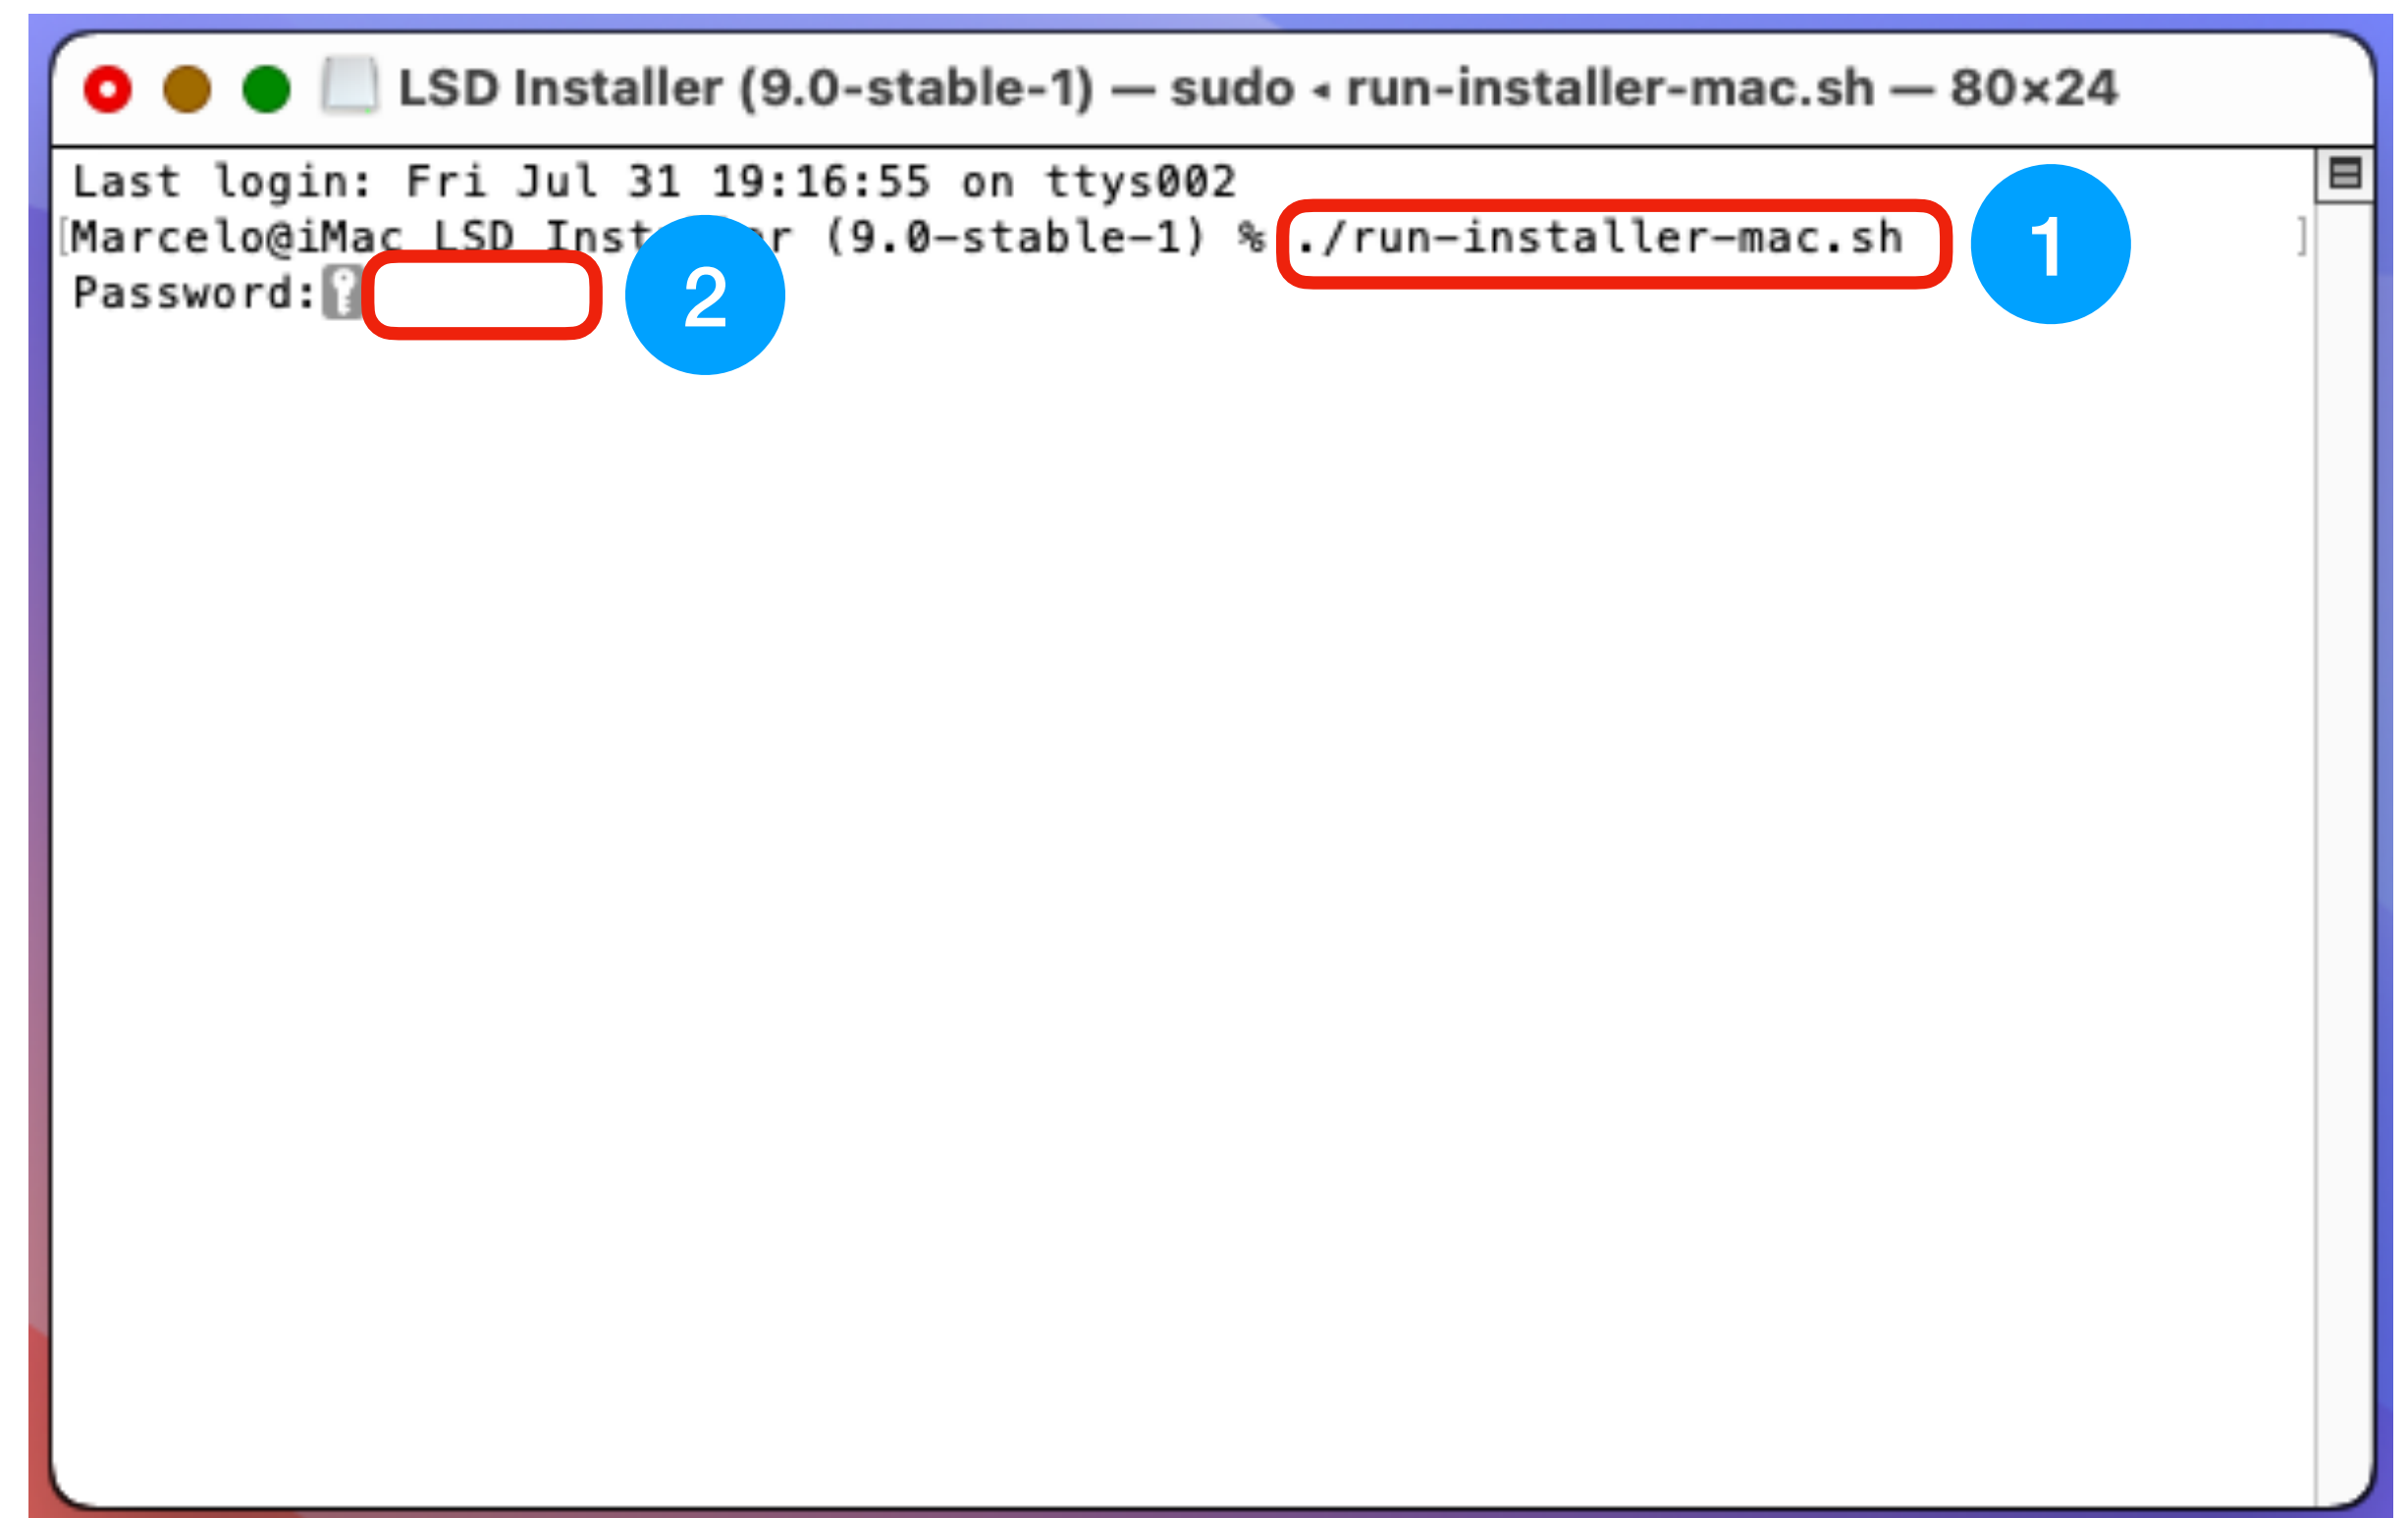

If nothing else works

If LSD Installer does not work

- If the LSD installer did not work, open **Terminal** and enter the following commands, one at a time, followed by **Return**

```
cd ~
curl -LO https://github.com/SantAnnaKS/LSD/archive/refs/tags/9.0-stable-1.zip
unzip 9.0-stable-1.zip
cd LSD-9.0-stable-1
./add-shortcut-mac.sh
xcode-select --install
/bin/bash -c "$(curl -fsSL https://raw.githubusercontent.com/Homebrew/install/master/install.sh)"
eval "$(/opt/homebrew/bin/brew shellenv zsh)"
brew install -y tcl-tk@8 multitail gnuplot python
echo >> ~/.zprofile
echo 'eval "$(/opt/homebrew/bin/brew shellenv zsh)"' >> ~/.zprofile
```

- **Only** if installing to an **old Intel** mac, please **ignore** the last **two lines** above and **errors** in the “eval ...” line
- You need **internet** connection to perform these steps
- Adapt to the desired LSD **version** to download and be **patient** for the command to complete (return to prompt)
- Notice any **additional information** provided in the Terminal and **ignore** “already installed” kind of messages