(/)

Evaluation quiz correction

Evaluation Quiz: Evaluation #3

Date: 2022-06-22

Status: Done

Duration: 12 minutes

Score: 94.12%

"I don't know": 0

Success: 16

Fail: 1

Responses

0. What do these lines print?

Score: 1.0

```
>>> def my_function(counter=89):
>>>    print("Counter: {}".format(counter))
>>>
>>> my_function(12)
```

Counter: 12

Counter: 89


Counter: 101

I don't know

1. What do these lines print?

Score: 1.0



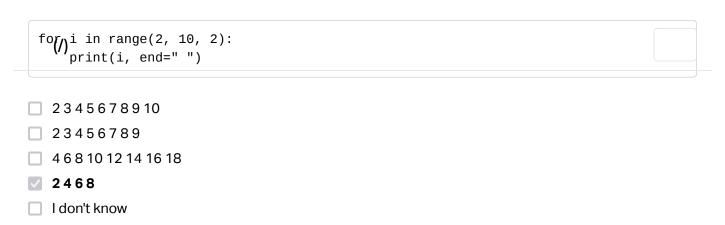

2. How many bytes will this statement allocate on a 64 bit machine?

Score: 1.0

malloc(sizeof(char) * 4)

- **✓** 4
- 8
- 12
- 16
- I don't know

3. What do these lines print?

Score: 1.0

```
>>> a = [1, 2, 3, 4]
>>> a[2] = 10
>>> a
```

- [1, 2, 3, 4]
- [1, 10, 3, 4]
- **[1, 2, 10, 4]**
- [1, 2, 10, 10]
- I don't know

4. Which symbol should I use to redirect the error output to the standard output?



2>81 1>82 2> Idon't know 5. What does this print? Score: 1.0 >>> print("{:d} Mission street, {}".format(972, "San Francisco")) "972 Mission street, San Francisco" 72 Mission street, San Francisco 972 Mission street, San Francisco 3 an Francisco Mission street, 972 Idon't know 6. You're standing in line at a grocery store, which data type best represents this situation? Score: 1.0 Queue	Score: 1.0 (/)
2> Idon't know 5. What does this print? Score: 1.0 >>> print("{:d} Mission street, {}".format(972, "San Francisco")) "972 Mission street, San Francisco" 72 Mission street, San 972 Mission street, San Francisco San Francisco Mission street, 972 Idon't know 6. You're standing in line at a grocery store, which data type best represents this situation? Score: 1.0	√ 2>&1
 Idon't know 5. What does this print? Score: 1.0 >>> print("{:d} Mission street, {}".format(972, "San Francisco")) "972 Mission street, San Francisco" 72 Mission street, San 972 Mission street, San Francisco San Francisco Mission street, 972 Idon't know 6. You're standing in line at a grocery store, which data type best represents this situation? Score: 1.0 	□ 1>&2
5. What does this print? Score: 1.0 >>> print("{:d} Mission street, {}".format(972, "San Francisco")) "972 Mission street, San Francisco" 72 Mission street, San Francisco 972 Mission street, San Francisco San Francisco Mission street, 972 I don't know 6. You're standing in line at a grocery store, which data type best represents this situation? Score: 1.0	2>
Score: 1.0 >>> print("{:d} Mission street, {}".format(972, "San Francisco")) "972 Mission street, San Francisco" 72 Mission street, San 972 Mission street, San Francisco San Francisco Mission street, 972 I don't know 6. You're standing in line at a grocery store, which data type best represents this situation? Score: 1.0	☐ I don't know
Score: 1.0 >>> print("{:d} Mission street, {}".format(972, "San Francisco")) "972 Mission street, San Francisco" 72 Mission street, San 972 Mission street, San Francisco San Francisco Mission street, 972 I don't know 6. You're standing in line at a grocery store, which data type best represents this situation? Score: 1.0	
Score: 1.0 >>> print("{:d} Mission street, {}".format(972, "San Francisco")) "972 Mission street, San Francisco" 72 Mission street, San 972 Mission street, San Francisco San Francisco Mission street, 972 I don't know 6. You're standing in line at a grocery store, which data type best represents this situation? Score: 1.0	
Score: 1.0 >>> print("{:d} Mission street, {}".format(972, "San Francisco")) "972 Mission street, San Francisco" 72 Mission street, San 972 Mission street, San Francisco San Francisco Mission street, 972 I don't know 6. You're standing in line at a grocery store, which data type best represents this situation? Score: 1.0	
>>> print("{:d} Mission street, {}".format(972, "San Francisco")) "972 Mission street, San Francisco" 72 Mission street, San Francisco San Francisco Mission street, 972 I don't know 6. You're standing in line at a grocery store, which data type best represents this situation? Score: 1.0	5. What does this print?
 "972 Mission street, San Francisco" 72 Mission street, San 972 Mission street, San Francisco San Francisco Mission street, 972 I don't know 6. You're standing in line at a grocery store, which data type best represents this situation? Score: 1.0	Score: 1.0
 72 Mission street, San 972 Mission street, San Francisco San Francisco Mission street, 972 I don't know 6. You're standing in line at a grocery store, which data type best represents this situation? Score: 1.0	>>> print("{:d} Mission street, {}".format(972, "San Francisco"))
 972 Mission street, San Francisco San Francisco Mission street, 972 I don't know 6. You're standing in line at a grocery store, which data type best represents this situation? Score: 1.0	□ "972 Mission street, San Francisco"
 San Francisco Mission street, 972 I don't know 6. You're standing in line at a grocery store, which data type best represents this situation? Score: 1.0 	72 Mission street, San
 Idon't know 6. You're standing in line at a grocery store, which data type best represents this situation? Score: 1.0 	972 Mission street, San Francisco
6. You're standing in line at a grocery store, which data type best represents this situation? Score: 1.0	San Francisco Mission street, 972
situation? Score: 1.0	☐ I don't know
situation? Score: 1.0	
situation? Score: 1.0	
situation? Score: 1.0	
✓ Queue	Score: 1.0
☑ Queue	
□ Array	
Dictionary	
□ Stack □ Idon't know	

7. What's wrong with the following C code to get the nth node of a linked list?

Score: 0.0

Select all correct answers.

Q

```
#include "lists.h"
 * get_nodeint_at_index - finds nth node of a listint_t list
 * @head: list to evaluate
  @index: index of node to find
 * Return: node found at index (SUCCESS), NULL if node does not exist
listint_t *get_nodeint_at_index(listint_t *head, unsigned int index)
        unsigned int i;
        listint_t *ptr;
        if (head == NULL)
                return (NULL);
        ptr = head;
        i = 0;
        while (i < index)
        {
                ptr = ptr->next;
                i++;
        }
        return (ptr);
}
```

- There is no check for if ptr->next is NULL before moving ptr
- The function should not return NULL if head is not found.
- ☐ If index is out of range, the program should return NULL
- Nothing is wrong
- I don't know

8. In a doubly linked list, what's the "head" of a linked list?

Score: 1.0

- It's the node with the pointer to the next node equals to NULL
- It's the node with the pointer to the previous node equals to NULL
- I don't know



9. Which line of code will create a list of every other number from 0 to 10 in

10. What do these lines print?

Score: 1.0

```
>>> def my_function(counter=89):
>>>    return counter + 1
>>>
>>> print(my_function())
```

- 1
- 89
- **90**
- 891
- I don't know

11. What do these lines print?

Score: 1.0

```
>>> a = { 'id': 89, 'name': "John", 'projects': [1, 2, 3, 4], 'friends': [ { 'id': 82, 'name': "Bob" }, { 'id': 83, 'name': "Amy" } ] }
>>> a.get('friends')[-1].get("name")
```

- 89
- [{'id':82, 'name':"Bob"}, {'id':83, 'name': "Amy"}]
- ✓ 'Amy'
- ☐ 'Bob'
- Nothing
- ☐ I don't know

Q

12.() What do these lines print?

Score: 1.0

```
a = 12
if a > 2:
    if a % 2 == 0:
        print("Tech")
    else:
        print("C is fun")
else:
    print("School")
```

- Tech
- C is fun
- School
- I don't know

13. What is a circular import in Python?

Score: 1.0

- When two or more modules are dependant on each other.
- ☐ When you import a module for calculating dimensions for circles.
- When one module imports multiple other modules.
- I don't know

14. What does this print?

Score: 1.0

```
>>> a = "Python is cool"
>>> print(a[7:-5])
```

- on
- nohtyP
- Python
- Si
- ✓ is
- I don't know

Q

15.(kg) a doubly linked list, what are possible directions to traverse it?
Score: 1.0
(select all possible answers)
✓ Forward
✓ Backward
☐ I don't know
16. What is the unistd symbolic constant for the standard output?
Score : 1.0
☐ STDIN_FILENO
✓ STDOUT_FILENO
☐ STDERR_FIELNO
☐ I don't know

Copyright © 2022 ALX, All rights reserved.



7 of 7