

TQS Lab activities

v2021-05-10

Lab 1: Unit testing with JUnit 5	1
Learning objectives	1
Key points	2
Lab activities	2
Troubleshooting some frequent errors	4
Explore	4
Lab 2: Mocking dependencies (for unit testing)	5
Learning objectives	5
Lab activities	5
Explore	7
Lab 3: Acceptance testing with web automation	7
Learning objectives	7
Key Points	8
Lab	8
Explore	10
Lab 4: Multi-layer application testing (with Spring Boot)	10
Prepare	10
Key Points	11
Lab	11
Explore	14
Lab 5: Behavior-driven development (Cucumber in Java)	14
Learning Objectives	14
Key Points	14
Lab	14
Explore	15
Lab 6: Static Code analysis (with Sonar Qube)	16
Learning objectives	16
Key Points	16
Lab	16
Explore:	18
Lab 7: Integration tests (Test Containers, REST Assured)	19
Learning objectives	19
Lab	19
Lab 8: Continuous integration with Jenkins	20
Prepare	20
Lab	20

Lab 1: Unit testing with JUnit 5

Learning objectives

- Identify relevant unit tests to verify the contract of a module.
- Write and execute unit tests using the JUnit framework.

- Link the unit tests results with further analysis tools (e.g.: code coverage)

Key points

- Unit testing is when you (as a programmer) write test code to verify units of (production) code. A unit represents a small subset of a much larger solution. A true “unit” does not have depend of the behavior of other (collaborating) components.
- Unit tests help the developers to (i) understand the module contract (what to construct); (ii) document the intended use of a component; (iii) prevent regression errors; (iv) increase confidence on the code.
- When following a TDD approach, typically you go through a cycle of [Red-Green-Refactor](#). You’ll run a test, see it fail (go red), implement the simplest code to make the test pass (go green), and then refactor the code so your test stays green and your code is sufficiently clean.
- JUnit and TestNG are popular frameworks for unit testing in Java.

JUnit best practices: unit test one object at a time

A vital aspect of unit tests is that they’re finely grained. A unit test independently examines each object you create, so that you can isolate problems as soon as they occur. If you put more than one object under test, you can’t predict how the objects will interact when changes occur to one or the other. When an object interacts with other complex objects, you can surround the object under test with predictable test objects. Another form of software test, integration testing, examines how working objects interact with each other. See chapter 4 for more about other types of tests.

Lab activities

Be sure that your developer environment meets the following requirements:

- Java development environment ([JDK](#); v11 suggested). Note that you should install it into a path without spaces or special characters (e.g.: avoid \Users\José Conceição\Java).
- [Maven configured](#) to run in the command line. Note: some projects include the Maven wrapper utility (*mvnw*); in these cases, Maven wrapper will download maven as needed.
- Java capable IDE, such as [IntelliJ IDEA](#) (version “Ultimate” suggested).

1.1

In this exercise, you will implement a stack data structure (TqsStack) with appropriate unit tests. Be sure to adopt a **write-the-tests-first** workflow:

- Create a new **Maven-based**, Java standard application.
- Add the required dependencies to run JUnit tests¹. Here are some examples:
 - JUnit [documentation](#)
 - [starter project](#) for Maven².
- Create the required classes definition (**just the “skeleton”**, do not implement the methods body yet; you may need to add dummy return values). The **code should compile**, though the **implementation is incomplete** yet.

¹ If using IntelliJ: you may skip this step and ask, later, the IDE to fix JUnit imports.

² Delete the “pom-JITPACK.xml” and “pom-SNAPSHOT.xml”, specially before importing into an IDE.

- d) Write the unit tests that will verify the TqsStack contract. You may use the IDE features to generate the testing class; note that the [IDE support will vary](#). Be sure to use [JUnit 5.x](#). Your tests will verify several [assertions that should evaluate to true](#) for the test to pass. See [some examples](#).
- e) Run the tests and prove that TqsStack implementation is not valid yet (the tests should fail for now, the first step in [Red-Green-Refactor](#)).
- f) Correct/add the missing implementation to the TqsStack;
- g) Run the unit tests.
- h) Iterate from steps d) to f) and confirm that all tests pass.

Suggested stack contract:

- push(x): add an item on the top
- pop: remove the item at the top
- peek: return the item at the top (without removing it)
- size: return the number of items in the stack
- isEmpty: return whether the stack has no items


What to test³:

- a) A stack is empty on construction.
- b) A stack has size 0 on construction.
- c) After n pushes to an empty stack, $n > 0$, the stack is not empty and its size is n
- d) If one pushes x then pops, the value popped is x.
- e) If one pushes x then peeks, the value returned is x, but the size stays the same
- f) If the size is n, then after n pops, the stack is empty and has a size 0
- g) Popping from an empty stack does throw a NoSuchElementException [[You should test for the Exception occurrence](#)]
- h) Peeking into an empty stack does throw a NoSuchElementException
- i) For bounded stacks only, pushing onto a full stack does throw an IllegalStateException


2a/ Pull the [“euromillions-play” project](#) and correct the code (or the tests themselves, if needed) to have the existing unit tests passing.

For the (failing) test:	You should:
testFormat	Correct the <u>implementation</u> of Dip#format so the tests pass.
testConstructorFromBadArrays	Implement new <u>test</u> logic to confirm that an exception will be raised if the arrays have invalid numbers (wrong count of numbers of starts)

Note: you may suspend temporarily a test with the [@Disable](#) tag (useful while debugging the tests themselves).

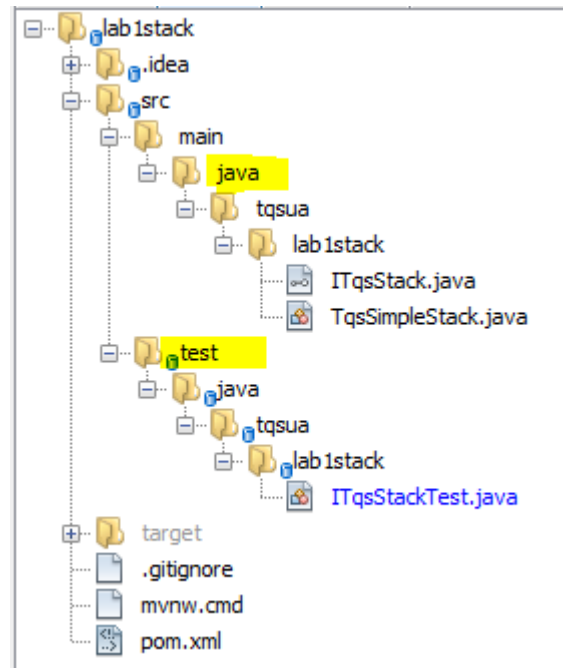

³ Adapted from <http://cs.lmu.edu/~ray/notes/stacks/>

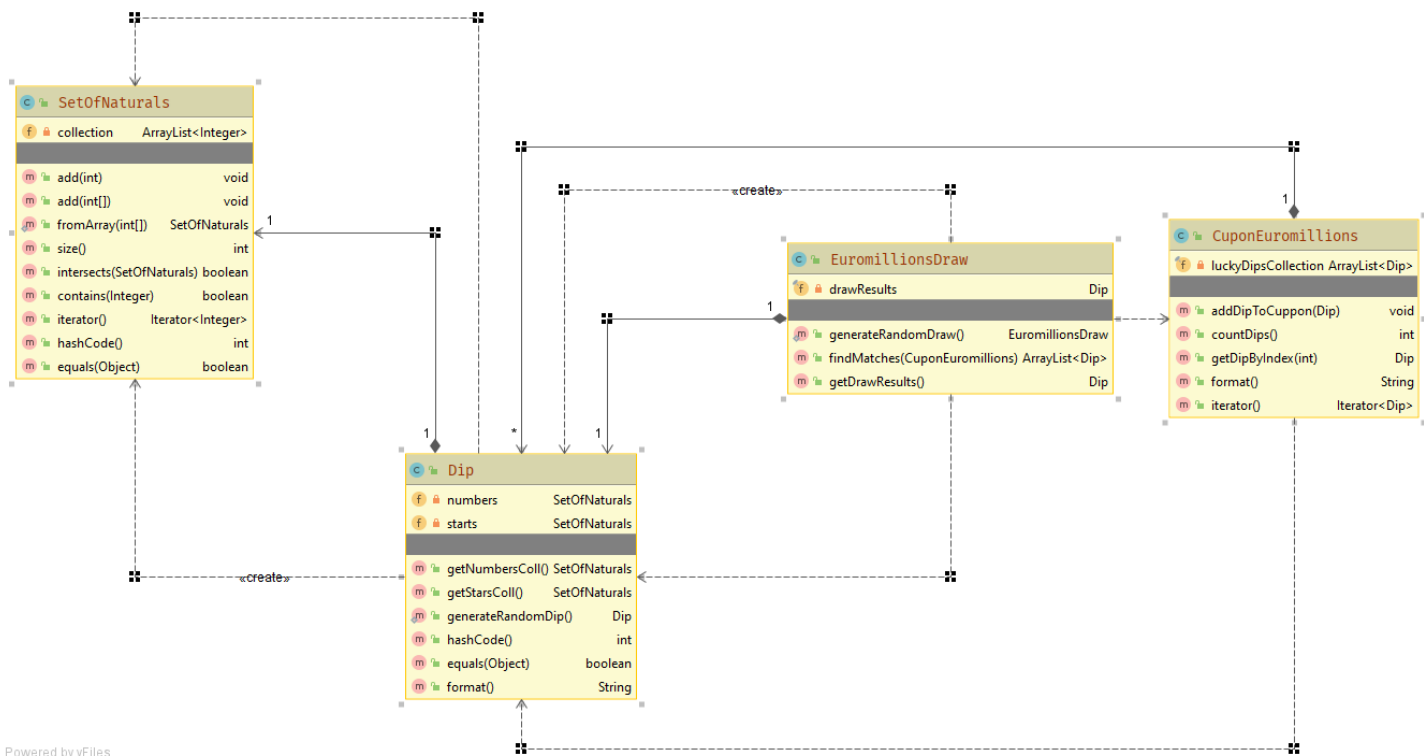

2b/ The class `SetOfNaturals` represents a set (no duplicates should be allowed) of integers, in the range $[1, +\infty]$. Some basic operations are available (add element, find the intersection...). What kind of unit test are worth writing for the entity `SetOfNaturals`? Complete the project, adding the new tests you identified.

2c/ Note that the code provided includes “magic numbers” (2 for the number of stars, 50 for the max range,...). Refactor the code to extract constants and [eliminate the “magic numbers”](#).

2d/ Assess the coverage level in project “Euromillions-play”.

[Configure the maven project to run Jacoco analysis](#).

Run the maven “test” goal and then “jacoco:report” goal. You should get an HTML report under `target/jacoco`.

Interpret the results accordingly. Which classes/methods offer less coverage? Are all possible decision branches being covered?

Note: IntelliJ has an integrated option to run the tests with the coverage checks (without setting the Jacoco plugin in POM). But if you do it at Maven level, you can use this feature in multiple tools.

Troubleshooting some frequent errors

➔ “Test are run from the IDE but not from command line.”

Be sure to configure the Surefire plug-in in Maven ([example](#)).

Explore

- JetBrains Blog on [Writing JUnit 5 tests](#) (with video).
- JUnit 5 [cheat sheet](#).
- Book: [JUnit in Action](#). Note that you can access it from the [O'Reilly on-line library, using your](#)

[University of Aveiro's user account.](#)

- Vogel's [tutorial on JUnit](#). Useful to compare between JUnit 4 and JUnit 5.
- [Working effectively with unit testing](#) (podcast).

Lab 2: Mocking dependencies (for unit testing)

Learning objectives

- Prepare a project to run unit tests ([JUnit 5](#)) and mocks ([Mockito 3.x](#)), with mocks injection (`@Mock`).
- Write and execute unit tests with mocked dependencies.
- Experiment with mock behaviors: strict/lenient verifications, advanced verifications, etc.

Lab activities

Get familiar with sections 1 to 3 in the [Mockito \(Javadoc\) documentation](#).

1a/

Consider the example in Figure 1: the `StocksPortfolio` holds a collection of `Stocks`; the current value of the *portfolio* depends on the current condition of the *Stocksmarket*. **`StockPortfolio#getTotalValue()`** method calculates the value of the portfolio by summing the current value (looked up in the stock market) of the owned stocks.

Implement (at least) one test to verify the implementation of **`StockPortfolio#getTotalValue()`**. Given that test should have predictable results, you need to address the problem of having non-deterministic answers from the `Stockmarket` interface.

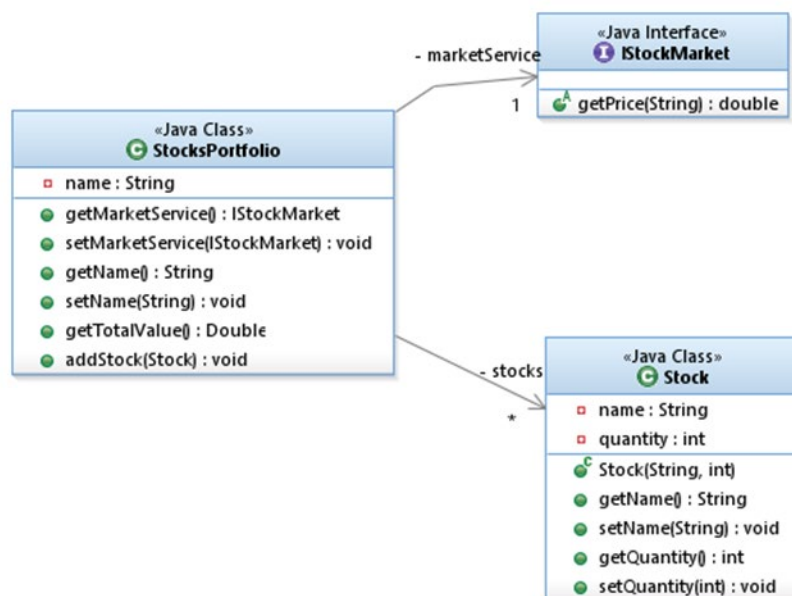


Figure 1: Classes for the `StocksPortfolio` use case.

- Create the classes. You may write the implementation of the services before or after the tests.
- Create the test for the `getTotalValue()`. As a guideline, you may adopt this outline:
 - Prepare a mock to substitute the remote service (`@Mock` annotation)

2. Create an instance of the subject under test (SuT) and use the mock to set the (remote) service instance.
3. Load the mock with the proper expectations (when...thenReturn)
4. Execute the test (use the service in the SuT)
5. Verify the result (assert) and the use of the mock (verify)

Notes:

- Consider use these [Maven dependencies for your POM](#) (JUnit5, Mockito).
- Mind the JUnit version. For JUnit 5, you should use the `@ExtendWith` annotation to integrate the Mockito framework.

```
@ExtendWith(MockitoExtension.class)
class StocksPortfolioTest { ... }
```
- See a [quick reference of Mockito](#) syntax and operations.

1b/ Instead of the JUnit core asserts, you may use the [Hamcrest library](#) to create more human-readable assertions. Replace the “Assert” statements in the previous example, to use Hamcrest constructs. E.g.:

```
assertThat(result, is(14.0));
```

2/ Consider an application that needs to perform reverse geocoding to find a zip code for a given set of GPS coordinates. This service can found in public API (e.g.: using the [MapQuest API](#)).

- a) Create the objects represented in Figure 1. `TqsHttpClient` represents a service to initiate HTTP requests to remote servers. At this point, **you do not need to implement `TqsHttpBasic`**; in fact, you should provide a substitute for it.
- b) Consider that we want to verify the `AddressResolver#findAddressForLocation`, which invokes a remote geocoding service, available in a REST interface, passing the site coordinates.
Which is the service to *mock*?
- c) To create a test for `findAddressForLocation`, you will need to know **the exact response of the geocoding service for a sample request**. Assume that we will use the [MapQuest API](#). Use the browser or an HTTP client to try some samples so you know what to test for ([example 1](#)).
- d) Implement a test for `AddressResolver#findAddressForLocation` using a mock.
- e) Besides de “success” case, consider also testing for alternatives (e.g.: no address found; bad coordinates should not be accepted;...). This may affect the `TqsHttpClient` or other classes.

This [getting started project](#) [gs-mockForHttpClient] can be used in your implementation.

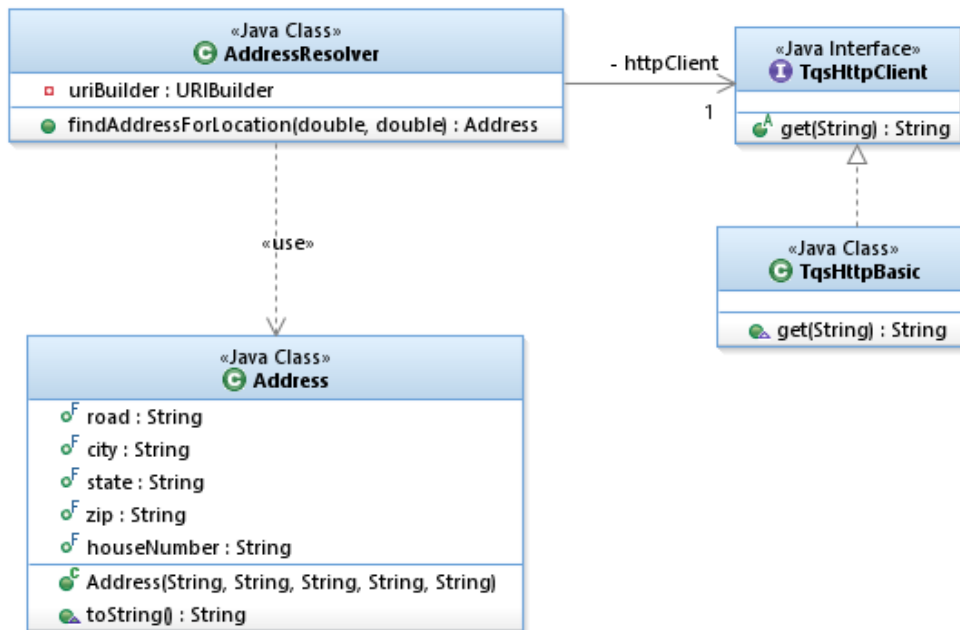


Figure 2: Classes for the geocoding use case.

3/ Consider you are implementing an integration test, and, in this case, you would use the real implementation of the module, not the mocks, in the test.

(This section can be included with the previous, continuing the same project.)

Create new test class (or reuse the existing `AddressResolverIT`), in a separate package, and be sure its name end with “IT”.

Copy the tests from the previous exercise into this new test class, but remove any support for mocking (no Mockito imports in this test).

Correct the test implementation so it uses the real `HttpClient` implementation.

Run your test (and confirm that the remote API is invoked in the test execution).

If the “failsafe” maven plugin is configured, you should get different results with:

```
$ mvn test
```

```
$ mvn install failsafe:integration-test
```

Explore

- There is a recent [book on JUnit and Mockito](#) available from O'Reilly. The lessons are available as short videos too.

Lab 3: Acceptance testing with web automation

Learning objectives

- use web automation interactively with Selenium IDE.
- run web-based acceptance tests written for the WebDriver API, using the JUnit engine.
- apply the Page Objects Pattern to increase tests readability.

Key Points

- Acceptance tests (or functional test) exercise the user interface of the system, as if a real user was using the application. The system is treated as a black box.
- Browser automation (control the browser interaction from a script) is an essential step to implement acceptance tests on web applications. There are several frameworks for browser automation (e.g.: Puppeteer); for Java, the most used framework is the WebDriver API, provided by Selenium (that can be used with JUnit or TestNG engines).
- Selenium is an umbrella project for a range of tools and libraries that enable and support the automation of web browsers.
- The test script can easily get "messy" and hard to read. To improve the code (and its maintainability) we could apply the [Page Objects Pattern](#).
- Web browser automation is also very handy to implement "smoke tests".

Lab

Selenium works with multiple browsers but, for sake of simplicity, the samples will be discussed with respect to Firefox; you may use Chrome/Chromium as well.

Suggested setup:

- a) Download the [GeckoDriver](#) for Firefox ([ChromeDriver](#) for Chrome/Chromium) and make sure it is [available in the system PATH](#).
- b) Install the "[Selenium IDE](#)" browser plugin. (or, alternatively, the Katalon Recorder).

In this lab:

1. Run web automation tests with JUnit 5 + Selenium 3
2. Create a web automation with Selenium IDE recorder
3. Run the test as a Java project (JUnit 5 + Selenium)
4. Refactor using the Web Page Object pattern


1/ Run web automation tests with WebDriver (locally)

Selenium WebDriver offers a concise programming interface (i.e., API) to drive a (web) browser, as if a real user is operating the browser.

[This example](#) presents a minimal scenario for running a WebDriver based test⁴.

Note that you need:

- the browser installed locally;
- the web driver implementation for your browser copied into your filesystem (e.g.: [GeckoDriver](#) , [ChromeDriver](#))

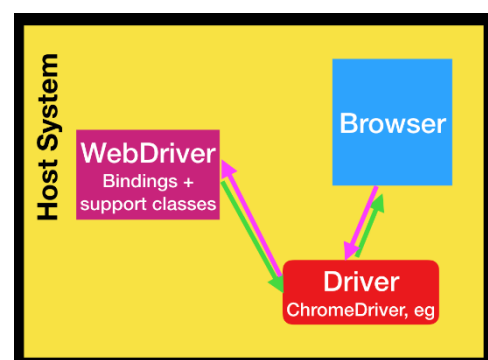

1a/

Run the example, adapting for your IDE.

Note: while the example explicitly defines the location of the driver property, it is possible to omit it if the [driver implementation in in the system PATH](#).

1b/

⁴ The tutorial uses Eclipse. You do not need to use Eclipse!

Refactor to use explicit init and clean up test methods to open and close the browser:

- @BeforeEach : init the driver.
- @AfterEach: close the browser.

While automating the interaction, you will often need to:

- [Navigate](#) (go to a page, go back, quit,...)
- [Find elements](#) in a page (e.g.: move to a text box)

2/ Create a web automation with Selenium IDE recorder

Usually, you can take advantage of the Selenium IDE to prepare/record your tests interactively and to explore the “locators” (e.g.: id for a given web element).

2a/ Record the test interactively

Install the [Selenium IDE](#) plug-in/add-on for your browser.

Using the <https://blazedemo.com/> dummy travel agency web app, record a test in which you select a and buy a trip.

Be sure to add relevant “asserts” or verification to your test.

Replay the test (for success) but also experiment to break the test (by explicitly editing the test step parameters).

Add a new step, at the end, to confirm that the confirmation page contains the title “BlazeDemo Confirmation”. Enter this assertion “manually” (in the editor, but not recording).

Be sure to save you Selenium IDE test project.

2b/ Export and run the test (Webdriver)

Export the test from Selenium IDE into a Java test class and include it in the previous project.

Refactor the generated code to be compliant with JUnit 5. [Note: adapt from exercise 1]

Run the test (programmatically, as a unit test).

3/ Refactor to use Selenium extensions for JUnit 5

JUnit 5 allows the use of extensions which may provide annotation for dependency injection (as seen previously for Mockito). This is usually a more compact and convenient approach.

The [Selenium-Jupiter extension](#) provides convenient defaults and dependencies resolution to run Selenium tests (WebDriver) on JUnit 5 engine.

Note that this library will ensure several tasks:

- transitively import the required Selenium dependencies. [you may just [add the selenium-jupiter dependency in POM](#)]
- enable dependency injection with respect to the WebDriver implementation (automates the use of [WebDriverManager](#) to resolve the specific browser implementation).
- if using dependency injection, it will also ensure that the WebDriver is initialized and closed.
- you do not need to pre-install the WebDriver binaries; they are retrieved on demand.

3a/

Browse the “Quick reference” and the “Local browsers” sections [from the documentation](#). Implement the sample under the appropriate (local) browser for your case.

3b/

Create an additional test to use a “headless browser” (e.g.: HTMLUnit, PhantomJS).

3c/

Copy the example from exercise 2 and refactor to use the Selenium-Jupiter extension.

3d/

[Optional, if you have Docker in your system:] Consider also using a browser that is not installed in your system. You may resort to a Docker image very easily (see [Docker browsers section](#)).

Note that, in this case, the WebDriver will connect to a remote browser (no longer [direct communication](#)).

4/ Separation of concerns with Page Object pattern

Consider the [example discussed here](#).

Implement the “Page object pattern” for a cleaner and more readable test, as suggested.

Notes:

The target web site implementation has changed from the time the article was written and the example requires some adaptations, including:

- instead of three pages, consider only two (“HomePage” and “DeveloperApplyPage”; no need for the intermediate step “DeveloperPortalPage”).
- Use Selenium IDE to interactively record the test case and “confirm” the web elements identifiers.

You may skip/comment the final “step” (application submission), as it may depend on a captcha, and you are not required to address it in this introductory-level...

Explore

- DZone [RefCard](#) for WebDriver API
- [Puppeteer](#) - a Node library which provides a high-level API to control headless Chrome/Chromium.
- Another [Page Object Model example](#).
- [Criticism on the Page Object Pattern](#) for modern web apps (and alternatives).

Lab 4: Multi-layer application testing (with Spring Boot)

Prepare

This lab is based on Spring Boot. Most of students already used the Spring Boot framework (in IES course).

If you are new to Spring Boot, then you need to develop a basic understanding or collaborate with a colleague. [Learning resources](#) are available at the Spring site.

Key Points

- Isolate the functionality to be tested by limiting the context of loaded frameworks/components. For some use cases, you can even test with just standard unit testing.
- `@SpringBootTest` annotation loads whole application context, but it is better (faster) to limit application contexts only to a set of Spring components that participate in test scenario.
- `@DataJpaTest` only loads `@Repository` spring components, and will greatly improve performance by not loading `@Service`, `@Controller`, etc.
- Use `@WebMvcTest` to test Rest APIs exposed through Controllers. Beans used by controller need to be mocked.


Lab

1/

Study the example available concerning a simplified [Employee management application](#) (gs-employee-manager).

This application follows commons practices to implement a Spring Boot solution:

- Employee: entity (`@Entity`) representing a domain concept.
- EmployeeRepository: the interface (`@Repository`) defining the data access methods on the target entity, based on the framework `JpaRepository`. “Standard” requests can be inferred and automatically supported by the framework (no additional implementation required).
- EmployeeService and EmployeeServiceImpl: define the interface and its implementation (`@Service`) of a service related to the “business logic” of the application. Elaborated decisions/algorithms, for example, would be implemented in this component.
- EmployeeRestController: the component that implements the REST-endpoint/boundary (`@RestController`): handles the HTTP requests and delegates to the `EmployeeService`.

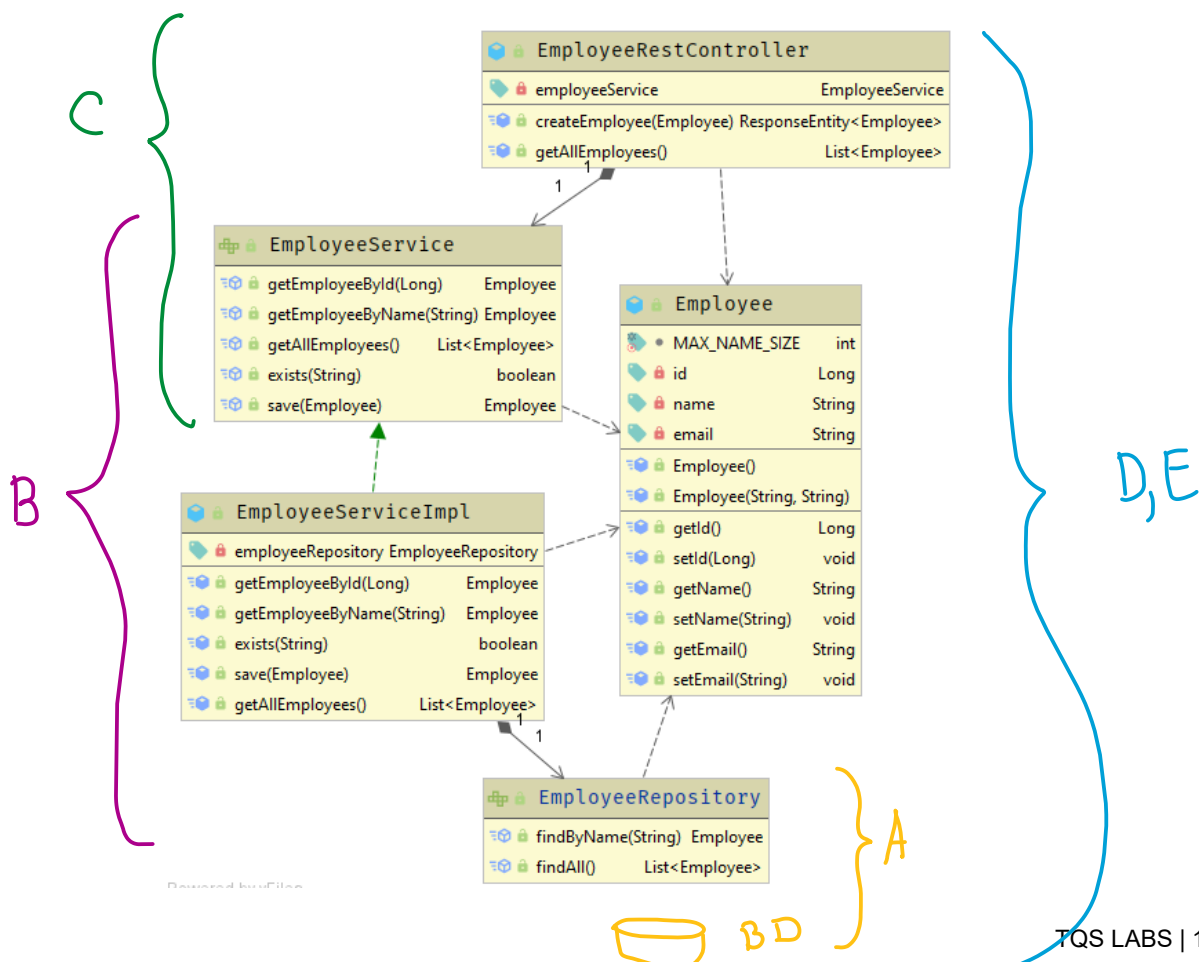

The project contains a set of tests. Take note of the following test scenarios:

Purpose	Strategy	Notes
A/ Verify the data access services provided by the repository component. [EmployeeRepositoryTest]	Slice the test context to limit to the data instrumentation (@DataJpaTest) Inject a TestEntityManager to access the database; use this object directly to write to the database (no caches).	@DataJpaTest includes the @AutoConfigureTestDatabase. If a dependency to an embedded database is available, an in-memory database is set up. Be sure to include H2 in the POM.
B/ Verify the business logic associated with the services implementation. [EmployeeService_UnitTest]	Can be achieved with a unit tests; we can mock the repository behavior. Rely on Mockito to control the test and to set expectations and verifications.	Relying only in JUnit + Mockito makes the test a unit test, much faster than using a full SpringBootTest. No database involved.
C/ Verify the boundary components (controllers). No need to test the real HTTP-REST framework; just the controller behavior. [EmployeeController_WithMockServiceIT]	Run the tests in a simplified light environment, simulating the behavior of an application server, by using @WebMvcTest mode. Get a reference to the server context with @MockMvc. To make the test more localized to the controller, you may mock the dependencies on the service (@MockBean); the repository component will not be involved.	MockMvc provides an entry point to server-side testing. Despite the name, is not related to Mockito. MockMvc provides an expressive API, in which methods chaining is expected. In principle, no database involved.
D/ Verify the boundary components (controllers). Test the REST API on the server-side; no API client involved. [EmployeeRestControllerIT]	Start the full web context (@SpringBootTest, with Web Environment enabled). The API is deployed into the normal SpringBoot context. Use the entry point for server-side Spring MVC test support (MockMvc).	This would be a typical integration test in which several components will participate (the REST endpoint, the service implementation, the repository and the database).
E/ Verify the boundary components (controllers). Test the REST API with explicit HTTP client involved. [EmployeeRestControllerTemplateIT]	Start the full web context (@SpringBootTest, with Web Environment enabled). The API is deployed into the normal SpringBoot context. Use a REST client to create realistic requests (TestRestTemplate)	Similar to the previous case, but instead of assessing a server entry point for tests, start a API client (so request and response un/marshaling will be involved).

Review questions: [answer in a **readme.md** file, in the appropriate folder]

- Identify a couple of examples on the use of AssertJ expressive methods chaining.
- Identify an example in which you mock the behavior of the repository (and avoid involving a database).
- What is the difference between standard @Mock and @MockBean?
- What is the role of the file "application-integrationtest.properties"? In which conditions will it be used?


2/

Consider the case in which you will develop an API for a car information system.

Implement this scenario, as a Spring Boot application.

Consider using the [Spring Boot Initializr](#) to create the new project (integrated in IntelliJ or online);

Add the dependencies (*starters*) for: Developer Tools, Spring Web, Spring Data JPA and H2 Database.

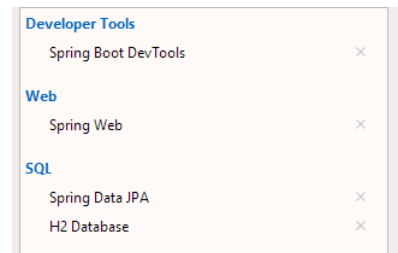


Take the structure modeled in the class diagram as a (minimal) reference.

In this exercise, **try to force a TDD approach**: write the test first; make sure the project can compile without errors; defer the actual implementation of production code as much as possible.

This approach will be encouraged if we try to write the tests in a top-down approach: **start from the controller, then the service, then the repository**.

- Create a test to verify the Car[Rest]Controller (and mock the CarService bean). Run the test.
- Create a test to verify the CarService (and mock the CarRepository). This can be a standard unit test with mocks.
- Create a test to verify the CarRepository persistence. Be sure to include an in-memory database dependency in the POM (e.g.: H2).
- Having all the previous tests passing, implement an integration test to verify the API. Suggestion: use the approach “E/” discussed in the previous project (Employees).

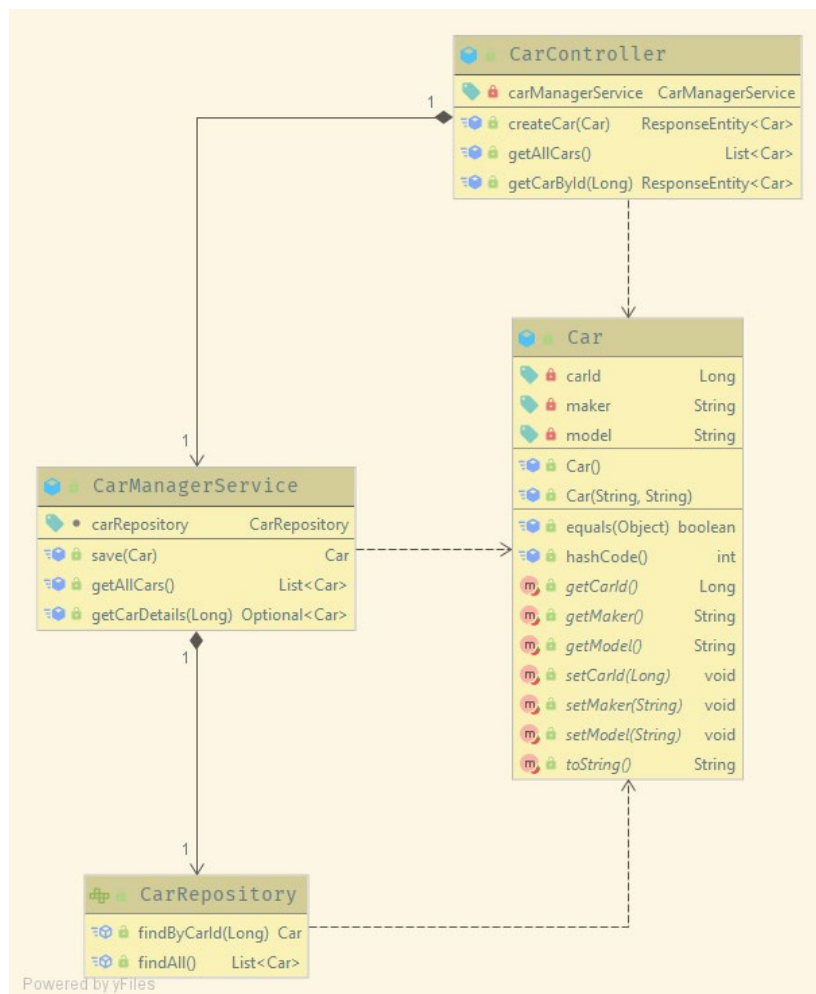

3/

e) Adapt the integration test to use a real database. E.g.:

- Run a mysql instance and be sure you can connect (for example, using a Docker container)
- Change the POM to include a dependency to mysql
- Add the connection properties file in the resources or the “test” part of the project (see the [application-integrationtest.properties](#) in the sample project)
- Use the `@TestPropertySource` and deactivate the `@AutoConfigureTestDatabase`.

Explore

- AssertJ library to create expressive assertions in tests: <https://assertj.github.io/doc/>
- Talk on Spring Boot tests (by Pivotal): <https://www.youtube.com/watch?v=Wpz6b8ZEgcU>

Lab 5: Behavior-driven development (Cucumber in Java)

Learning Objectives

- Write test cases by examples, using the Gherkin language.
- Run Java tests from features description.
- Use Cucumber to active web automation tests.

Key Points

- The [Cucumber framework](#) enables the concept of “executable specifications”: with Cucumber we use examples to specify what we want the software to do. **Scenarios are written before production code.**
- Cucumber executes features (test scenarios) written with the [Gherkin language](#) (readable by [non-programmers too](#)).
- The steps included in the feature description (scenario) must be mapped into Java test code by annotating test methods with matching “expressions”. [Expressions](#) can be (traditional) regular expressions or the (new) Cucumber expressions.

Lab

Keep in mind that the integration of JUnit 5 and Cucumber is still somewhat recent and most of the samples available in the internet are still based on JUnit 4. While this is correct and possible, try to stick with JUnit v5.

In this lab you will:

- 1/ Create a simple Cucumber-enabled project
- 2/ Book search example
- 3/ Integrate Cucumber with Selenium Webdriver


1/ Create a simple cucumber-enabled project

Go through the “[Cucumber in a Nutshell](#)” section in B. Garcia’s book. Be sure to advance to the sample too.

Implement the proposed example.

Notes:

- There are more up to date dependencies and constructions to write Cucumber tests. While using the text in the book for context, prefer the constructions used in the [solution code](#).
- Place your feature files in “resources”, under the same path as the java package name.

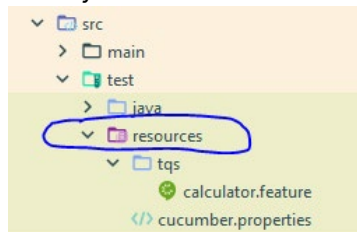

- Don't just “copy & paste”. Instead, create the elements by hand and use the solution code for reference.
- In IntelliJ Ultimate you have already installed the “Cucumber Java” plugin, that helps with the development of Cucumber tests. IntelliJ recognizes the .feature file type. You can even select “Run all features” to run the Cucumber tests.

2/ Book search example

To get into the “spirit” of BDD, partner with a colleague, and jointly write a couple of features to verify a book search user story. Consider a few search options (by author, by category, etc).

Take the approach discussed in [this example](#), and write your own tests. Feel free to add different scenarios/features.

Notes:

- The article is based on old-style Cucumber constructions. Ignore the dependencies and annotations suggested in the text: use the previous exercise as a reference for Cucumber dependencies and test annotations.
- Write the features before the test steps. Steps can be partially generated from features.
- Prefer the “[cucumber expressions](#)” (instead of regular expressions) to write the steps definitions.
- To handle dates, consider using a [ParameterType configuration](#). This defines a new custom parameter type to use in the matching expressions . [→ [partial snippet](#)]. The dates in the feature description need also to match the date mask used (aaaa-mm-dd).

3/ Integrate Cucumber with Selenium Webdriver

[Cucumber can be used with Selenium WebDriver](#) to write expressive automation tests.

Consider the example available in B. Garcia's repository concerning the integration of Cucumber and Selenium [[junit5-cucumber-selenium](#)] and implement it.

Adapt from this example to create a test scenario related to the “[BlazeDemo](#)” application (recall Lab 3, exercise 2).

Explore

- [Cucumber – Spring Boot integration](#) example.

Lab 6: Static Code analysis (with Sonar Qube)

Learning objectives

Integrate explicit code analysis tasks in the build cycle, with maven and SonarQube.
Critically analyze the quality dashboard produced by SonarQube.

Key Points

Static code quality can assess to produce quality metrics on the code base. These metrics are based on the occurrence of known weaknesses, a.k.a. “code smells”. In this kind of analysis, the solution is not deployed, nor the code is not executed (thus the name static analysis).

Key measures include the occurrence of problems likely to produce errors, vulnerabilities (security/reliability concerns) and code smells (bad/poor practice or coding style); coverage (ratio tested/total); and code complexity assessment.

The estimated effort to correct the vulnerabilities is called the **technical debt**. Every software quality engineer needs tools to obtain realistic technical debt information.

Lab

In several parts of this exercise, you are expected to provide evidence of the actions taken, the quality dashboard that you obtained and some discussion on results. For that, include a **Readme report** (Word document, PDF, markdown,...) in the root of today's folder (in Git).

In this lab:

Task 1: Analyze an existing project

Task 2: Manage Technical Debt

Task 3: Define and apply quality gates

Task 1: Analyze an existing project (local Sonar Qube)

1a/ [Install the SonarQube server](#) either as a local service, or by using the docker image (see instructions in the link).

For this lab, you do not need to configure a production database (the embedded H2 database is used by default). If, however, you want a production-like setup, you should consider using a persistent database (for example, like [this configuration](#); not required for the class).

Confirm that you can access the dashboard (default : <http://127.0.0.1:9000>) and change the default credentials (admin / admin).

1b/ Configure the environment for [Sonar Scanner for Maven](#). Be sure to adapt the <sonar.host.url> for your setup (e.g.: <http://127.0.0.1:9000>)

1c/ Select a Maven-based, Java application project to use. You may reuse one from previous labs, for example, the Euromillions from Lab 1 (part 2), with tests passing.


1d/

[Generate an authentication token](#) for to use from command line and **take note** for later use.

From the command line, run the code analysis (adapt as needed):

```
$ mvn clean verify sonar:sonar -Dsonar.login=5cdce5b21b59db301b1fd9a93e9ff898b9b6fb95
```


1e/ Access the SonarQube dashboard (default : <http://127.0.0.1:9000>).
Has your project passed the defined quality gate? Elaborate your answer.

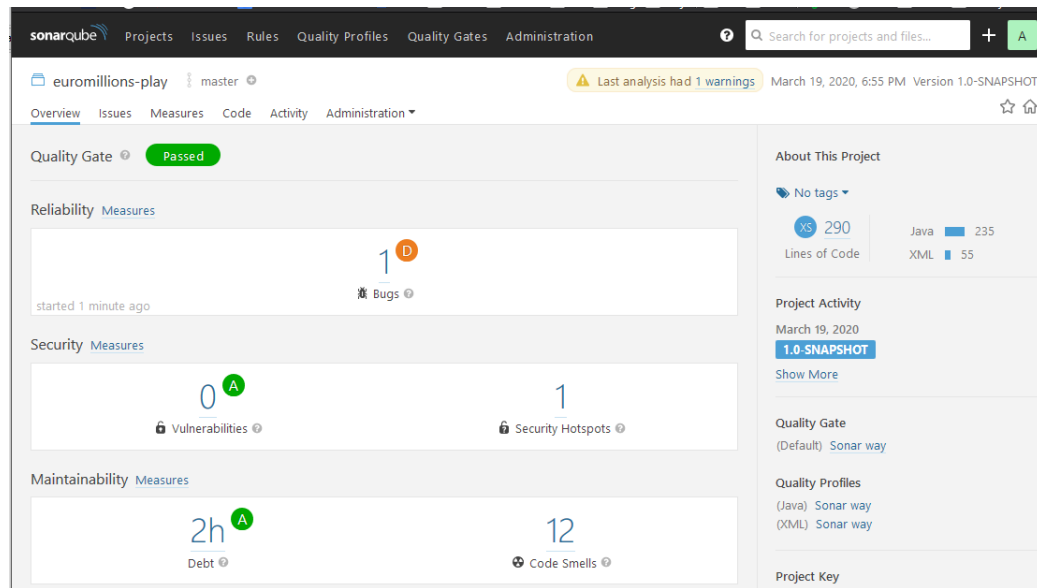

1.f/ Explore the analysis results and complete with a few sample issues, as applicable. (Place your response in a **Readme** document/markdown file, along with the code project).

Issue	Problem description	How to solve
Bug
Vulnerability		
Code smell (major)		

Task 2: Resolve technical debt

For this part, be sure you are using a project with JUnit tests implemented and passing. (You may reuse the Euromillions project).

2a/ Take note of the technical debt found. Explain what this value means.

2b/ Analyze the reported problems and be sure to **correct the severe** code smells reported (critical and major).

2c/ Code coverage reports require an additional plugin. Be sure to use a project with unit tests and configured code coverage (e.g.: [add the jacoco plugin](#) to maven). You may have already did it in Lab 2.

2d/ Run the static analysis and observe/explore the coverage values on the SonarQube dashboard. How many lines are “uncovered”? And how many conditions?


Task 3: Define and apply quality gates

For this exercise, it would be appropriate to use a larger project. Consider using the group project from IES⁵. Alternatively, you may get an open-source project (maven-based, Java project).

Note: **do not** to submit this project to your Git! Focus on providing evidence that you complete the tasks and discuss the outcomes.

3a/ If possible, collaborate with other colleagues to define a custom [quality gate](#) to this project (specially if you are using the IES project, try to work with the development team from then).

Feel free to mix the metrics but explain your chosen configuration.

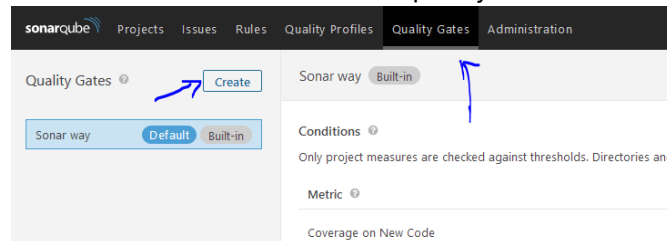

3b/ Add an increment to the source code. You may try to introduce some “[bad smells](#)”; in fact, try to break the quality gate.

Run the analysis and analyze the results.


Task 4: Static code analysis at the IDE [optional, but recommended]

For this task, no submission is required.


In the previous tasks, we assume the static code analysis as a service, likely to be integrated at the Continuous Integration pipeline. You will, however, also benefit from having code inspection as you develop, automatically integrated in the IDE.

Note that:

a) IntelliJ (and most IDE) already integrates a code inspection tool. If you have not used before, try it.



b) The Sonar Qube analysis can be integrated in IntelliJ through the [SonarLint plug-in](#).

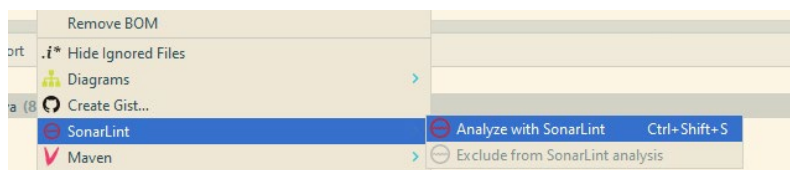

Explore:

- Use the SonarQube to inspect a project of your own, maybe from another course. Note that free analyzers are not available for all languages.
- A related [tutorial by Baeldung](#).
- public projects on [Sonar cloud](#) that you can browse and learn.

⁵ More specifically, the backend/API subproject, if applicable.

Lab 7: Integration tests (Test Containers, REST Assured)

Learning objectives

Deploy ephemeral containers to support integration tests with the TestContainers framework.
Implement integration tests on REST APIs with the RestAssured library.
Use RestAssured with MockMvc in SpringBott applications.

Lab

1) REST Assured introduction

Have a quick read at [this example](#) for context. You are not required to implement it.

Although the RestAssured can be used as a normal REST client, we will use it in the context of JUnit test case.

Consider that we want to “test” the <https://jsonplaceholder.typicode.com/todos> API.

a) Be sure to include the [Rest-Assured dependencies](#) in maven and that you are using the [these static imports](#) as presented in [the documentation](#).

b) Create tests to verify that:

- the endpoint to list all ToDo is available (status code 200)
- the title of ToDo #4 is “et porro tempora”
- When listing all “todos”, you get id #198 and #199 in the results.

Note: there are similar example available from [documentation](#) or [Baeldung](#).

2) Integration tests with [Test Containers](#).

Test Containers (TC) can be integrated in the test cases to prepare ephemeral docker containers required to run integration tests. A common scenario is to prepare a database server, from a well-known state.

TC are not specific to Spring Boot but there is a good support available, which we will use in this example.

2a- Create a simple SpringBoot project to manage a simple entity (e.g: Book, or Employee, or Student,...) to be persisted into a PostgreSQL database.

Suggested dependencies for Spring Initializr:

2b- Be sure to create the entity and the repository.

2c- Create an initialization script for the database. You may add sample entries. Suggestion: place the SQL file inside test/resources/db/migration/[V001__INIT.sql](#) to be picked automatically by Flyway (the Flyway dependency should have been declared).

2d- Create an integration test that prepares a postgres database, inserts some content and reads it back.

Notes:

- you may learn from this [code example](#), which is discussed in [this video](#).
- you may want to define a predefined [execution order](#) for the JUnit tests.

Selected Dependencies	
Developer Tools	
	Spring Boot DevTools
SQL	
	Spring Data JPA
	Flyway Migration
	PostgreSQL Driver
Testing	
	Testcontainers

3) Consider the integration tests developed in Lab 4 (Part 2) for the Cars project.

3a- Create a new version of the Controller test, using RestAssured and the WebMvcApproach.

- Annotate the test with `@WebMvcTest(CarController.class)`
- Since you are only loading the required context for the controller, you should mock the required service implementation (e.g. `@MockBean private CarManagerService service;`)
- RestAssured has a special support to work with Spring MockMvc. Be sure to add the following dependency:

```
<groupId>io.rest-assured</groupId>
<artifactId>spring-mock-mvc</artifactId>
<scope>test</scope>
```

Then set a MockMvc instance that REST Assured will use when making requests:

```
RestAssuredMockMvc.mockMvc(mockMvc);
```

Invoke with:

```
RestAssuredMockMvc.given()...
```

Note that, in this example, we are using `RestAssuredMockMvc` instead of `RestAssured`.

You do not provide a full URL since the MockMvc sliced environment is being used, not the full web environment (the test is faster).

3b)

Create a different version of the full integration test (last task in Lab 4, part 2), by using a test container and deploying the solution to a real database. You may also use RestAssured as the REST client.

Be sure to launch the test in full web environment this time:

```
@SpringBootTest(webEnvironment = SpringBootTest.WebEnvironment.RANDOM_PORT)
(and collect the port injecting @LocalServerPort ).
```

Lab 8: Continuous integration with Jenkins

Prepare

You may run Jenkins in one these (main) scenarios:

- A. Jenkins installed as a regular application/service in your machine/server. The Jenkins workspace is in the regular filesystem and Jenkins can access the machine environment. Jenkins may invoke Docker to complete some stages.
- B. Jenkins running as a Docker container and the agents used to run the jobs are themselves containers. Sharing volumes between containers will avoid redundant transfers.

In this lab, we will run Jenkins in scenario A and then in scenario B.

Lab

In this lab, you do not need to submit code. Create a “Readme” and include evidence of the build jobs created and run in Jenkins, the dashboard, and Jenkinsfiles used.

You should already have Java JDK, Maven and Docker installed and configured in your environment. The JDK should be an up-to-date version!

Task 1: Use Jenkins as standalone application and create jobs by configuration

This would be the “old way” of configure Jenkins, but it provides a good understanding of the tool. You will also need:

- A Git repo with a Maven Java project, ready to run (can be a local repo, in the file system).
- a) Start by getting Jenkins. Use the [jenkins.war LTS release](#) (generic java package, first option in the download page). Run Jenkins in the terminal:


```
$ java -jar jenkins.war --httpPort=8080
```

Note1: take note of the auto-generated key printed in the terminal. You will need it to activate Jenkins.

Note2: port 8080 should be available, otherwise pick another port.

- b) Verify that Jenkins server is running: <http://localhost:8080>
Complete the post install steps including:
- unlocking Jenkins
 - install the suggested plugins (may take a while...).
 - Create the admin user
- c) Install the following plugins (from Manage Jenkins > Plugins > Available):
- “maven integration”
 - “pipeline maven integration”
- d) Configure Java and Maven
Access Jenkins > Manage Jenkins > Global Tool Configuration
Add/Configure JDK.
- Uncheck the automatic install and point to a local JDK.
- Add/Configure Maven
- Uncheck the automatic install and point to a local maven.
- Note: These paths **should not contain spaces**. You may use “mvn --version” to confirm the paths.

JDK

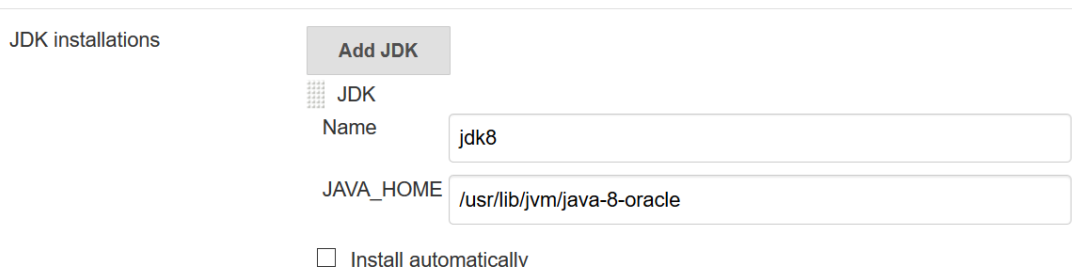

JDK installations

Add JDK

JDK
Name
jdk8
JAVA_HOME
/usr/lib/jvm/java-8-oracle


☐ Install automatically


- e) Let's create a **new job**
Create a new project (New item). This should be a “Maven Project” item. Note that the project name will be used to create a folder in the filesystem; avoid special characters and spaces.


Enter an item name

my-lab1

» Required field

 **Freestyle project**
This is the central feature of Jenkins. Jenkins will build your project, combining any SCM with any build system, and this can be even used for something other than software build.

 **Maven project**
Build a maven project. Jenkins takes advantage of your POM files and drastically reduces the configuration.

 **Pipeline**
Orchestrates long-running activities that can span multiple build slaves. Suitable for building pipelines (formerly known as workflows) and/or organizing complex activities that do not easily fit in free-style job type.

In the Source code management, select Git. Configure the local repository URL (or a remote and add the credentials to the Jenkins keychain, as needed).

Source Code Management

☐ None

☒ Git

Repositories

Repository URL

Credentials [Add](#)

Configure the build step to adequate maven goals. Provide the path to the local pom.xml in “Root POM” field.

Note: if the pom.xml is not in the root of the repository, add the directory to the Root POM field.

Build

Root POM

Goals and options

- f) Manually request a build. Verify the build results.
- g) Inspect the console output.

Jenkins

Jenkins > pipeline1 > master

Up

Status

Changes

Build Now


View Configuration

Full Stage View

Pipeline Syntax

Pipeline

Full project nam

 Rec

Stage View

Build History [trend](#)

find

#2 Apr 1, 2020 4:31 PM

#2 Apr 01

Tasks 2: Create a simple pipeline for a Maven project and poll the SCM (no Dockerization)

- h) Configure a new job, for a **pipeline project** hosted on a git repository. (you may reuse the same repository)
- i) Specify that the build triggers are given by a “Jenkinsfile” pipeline definition file.

Pipeline

Definition Pipeline script from SCM

SCM Git

Repositories

Repository URL file:///home/ico/code/tqs19/sim

Credentials - none - Add

Advanced...

- j) Create a “Jenkinsfile” in the root of the project, with the following content:

```
pipeline {
  agent any
  tools {
    jdk 'jdk11'
    maven 'mvn3'
  }
  stages {
    stage('test java installation') {
      steps {
        sh 'java -version'
      }
    }
    stage('test maven installation') {
      steps {
        sh 'mvn -version'
      }
    }
  }
}
```

→ Note: the name of the tools (“jdk11”, “mvn3”) must match the same names you defined previously in the global tool configuration.

→ Note: if the build is to apply in a subfolder, you need to switch to that folder in the beginning of the step. E.g.:

```
steps {
  dir('your-sub-directory'){
    sh "$PWD"
  }
}
```

Try to run the jenkins job (**after committing** the Jenkins file).

Inspect the console output of the Job. You should confirm that the Job ran and printed the version information of the tools (nothing fancy...).

- k) Configure an automated polling strategy (Build triggers -> SCM Polling) instead of manual. See the help button near the text box (in the Jenkins interface) for syntax and examples.
- l) Update the Jenkins file to include actual build of the project:

```

pipeline {
  agent any
  tools {
    jdk 'jdk8'
    maven 'mvn3'
  }
  stages {
    stage('Install') {
      steps {
        sh "mvn clean install"
      }
      post {
        always {
          junit '**/target/*-reports/TEST-*.xml'
        }
      }
    }
  }
}

```

Commit the changes. Observe in detail the console output on the building process.

- m) Explore the project workspace (the folder used by jenkins) -> [Workspaces](#)
- n) Add more changes locally and push them to the mainline:
 - introduce a failing test (e.g. with [fail\(\)](#))
 - commit to the main line
 - confirm that SCM is pooled, and the build fails (changes from “stable” to “with errors”)

Task 3: Blueocean interface

Install the Blue Ocean plugin suite (UI, Pipeline).

Explore the Blue Ocean user interface, specially with respect to the visualization of the steps.

The interface is available also at <http://localhost:8080/blue>

Task 4: use Docker-in-Docker (“Dind”)

Stop any Jenkins server you might have running.

4a/ Install Jenkins as a *Dockerized* service following [these guidelines](#).

4b/ The Jenkins tutorial on [Building a Java Maven app](#) shows how to use docker agents to implement the build stages. In this scenario, you will be using docker agents, invoked from a *dockerized* Jenkins. Note that the “[Run Jenkins in Docker](#)” section of the tutorial has already been performed in the 4a/ task.

- To open a shell inside a container:
docker container exec -it jenkins-blueocean bash

For example, to get the hash to unlock the Jenkins installation:
bash-4.4\$ cat /var/jenkins_home/secrets/initialAdminPassword

- If you get errors checking-out from a local repository, be sure to use a remote, online Git repository instead.