

Supplementary Material

QSMEF: A Methodological Framework for Functional Analysis of Quantum Implementations

Applicability Analysis of Quantum Phase Estimation (QPE) in Shor’s Algorithm

María Cecilia Pezzini
Claudia Pons
Luis Mariano Bibbó

August 2026

Abstract

This supplementary document complements the paper *QSMEF: A Methodological Framework for Functional Analysis of Quantum Implementations* with an applicability analysis of the Quantum Phase Estimation (QPE) subroutine used in Shor’s algorithm.

The initial experiment applied the QSMEF procedure to a decomposition of QPE into state preparation, superposition generation, and controlled modular evolution. It also defined a Hermitian observable and constructed a cooperative game to compute Shapley values.

A subsequent methodological analysis showed that this decomposition does not preserve functional comparability among coalitions. Neutralizing some of these operations changes the computational context of the remaining ones and, consequently, the meaning of the property evaluated across configurations.

This analysis identifies a boundary of QSMEF applicability. A meaningful functional attribution requires not only a structurally compatible decomposition and a Hermitian observable, but also functionally comparable coalitions and an observable whose meaning remains invariant across them.

1 Introduction

The companion paper introduces QSMEF and evaluates it through the Shenvi–Kempe–Whaley (SKW) coined quantum walk search algorithm on the hypercube. The selected decomposition of SKW into oracle, Grover coin, and flip-flop shift supports the coalition analysis because neutralizing these components preserves the structural and functional context required for comparison.

The supplementary material originally explored Quantum Phase Estimation (QPE) in Shor’s algorithm as an additional evaluation. QPE provides a different computational structure and therefore offers an opportunity to examine the scope of the framework beyond the SKW case.

The initial experiment divided QPE into state preparation, Hadamard operations, and controlled modular evolution. It then constructed coalitions by replacing absent components with the identity operator and computed Shapley values from an observable related to period estimation. The inverse Quantum Fourier Transform ($\text{QFT}^\dagger$) remained outside the set of attributable components and was applied as a fixed readout operation to every coalition.

Further analysis of this construction revealed a methodological issue. The QPE stages depend on one another to generate and interpret phase information. Removing one stage can therefore alter the functional role of the operations that remain. Under these conditions, coalition values no longer describe comparable partial realizations of the same functional process.

For this reason, this document revisits the QPE experiment as an applicability analysis. The experiment helps identify the conditions that a decomposition and an observable must satisfy before QSMEF can interpret Shapley values as functional contributions.

2 Quantum Phase Estimation in Shor's Algorithm

2.1 Modeling and Architecture

QPE uses a counting register and a work register. Their joint Hilbert space is

$$\mathcal{H} = \mathcal{H}_{\text{count}} \otimes \mathcal{H}_{\text{work}}. \quad (1)$$

The counting register contains m qubits and therefore spans $Q = 2^m$ computational basis states. The modular unitary operator acts on the work register according to

$$U|y\rangle = |ay \bmod N\rangle, \quad (2)$$

where a is coprime to N . Shor's algorithm seeks the period r that satisfies

$$a^r \equiv 1 \pmod{N}. \quad (3)$$

The eigenvectors of U satisfy

$$U|u_s\rangle = e^{2\pi i s/r} |u_s\rangle, \quad s \in \{0, \dots, r-1\}. \quad (4)$$

Each eigenvector $|u_s\rangle$ carries a phase s/r from which QPE can recover information about the period.

The initial work-register state can be written in the eigenbasis of U as

$$|1\rangle = \frac{1}{\sqrt{r}} \sum_{s=0}^{r-1} |u_s\rangle. \quad (5)$$

The QPE procedure prepares the counting register in superposition, applies controlled powers of U , and uses the inverse Quantum Fourier Transform (QFT[†]) to convert the encoded phase information into a computational-basis representation suitable for measurement.

3 Initial Exploratory Decomposition

The initial experiment considered

$$B_{\text{QPE}} = \{B_0, B_1, B_{2,0}, B_{2,1}, B_{2,2}, B_{2,3}, B_{2,4}\}. \quad (6)$$

The components represent:

- B_0 : preparation of $|0\rangle^{\otimes m} \otimes |1\rangle$;
- B_1 : Hadamard gates on the counting register;

- $B_{2,j}$: controlled application of U^{2^j} , for $j = 0, \dots, 4$.

The initial construction kept $\text{QFT}^\dagger$ outside the set of attributable components and applied it as a fixed readout operation to every coalition. The experiment did not include an explicit measurement operation; instead, it obtained the relevant probabilities directly from the resulting statevector.

The evaluated components were therefore limited to state preparation, the Hadamard block, and the controlled applications of U^{2^j} defined above.

This decomposition identifies recognizable circuit stages, but that property alone does not make it suitable for QSMEF. The framework constructs coalitions by replacing absent components with the identity operator while preserving the order of the components that remain. Therefore, the resulting configurations must preserve enough functional context to support a meaningful comparison.

4 Applicability Conditions

The QPE analysis motivates three conditions that QSMEF must verify before interpreting coalition values as functional contributions.

4.1 Structural Compatibility

Every coalition must operate within the same Hilbert space and support the same functional metric.

QSMEF defines this metric from a Hermitian observable H :

$$M_H(\rho) = \text{Tr}(H\rho), \quad (7)$$

with

$$H = H^\dagger. \quad (8)$$

Hermiticity guarantees a real expectation value, while structural compatibility guarantees that QSMEF can evaluate the same operator for every configuration.

4.2 Functional Comparability of Coalitions

Replacing an absent component with the identity must preserve the functional context of the operations that remain.

A coalition does not need to reproduce the complete algorithm. It must, however, represent a meaningful partial configuration of the same process. If neutralization changes the role of the remaining components, the coalition no longer supports the intended comparison.

4.3 Semantic Invariance of the Observable

The observable must represent the same property for every coalition.

Dimensional compatibility and Hermiticity do not guarantee this condition. QSMEF can compare expectation values only when $M_H(\rho_C)$ retains the same functional interpretation for every $C \subseteq B$.

Together, these conditions connect the mathematical construction of the cooperative game with the functional meaning that QSMEF assigns to it.

5 Applicability Analysis of the QPE Decomposition

The initial QPE decomposition does not preserve functional comparability across all coalitions.

The Hadamard block prepares the counting-register superposition on which the controlled powers of U act. These controlled operations encode phase information under conditions established by the preceding preparation and superposition stages. The fixed $\text{QFT}^\dagger$ readout then transforms the resulting state before the metric is evaluated.

This dependency creates a problem for component neutralization.

Consider a coalition that excludes B_1 but retains one or more $B_{2,j}$ components. Replacing the Hadamard block with the identity changes the input state of the controlled modular operations. These operations remain valid unitaries, but they no longer perform the same functional role as they do when the counting register is in the required superposition. The fixed $\text{QFT}^\dagger$ readout consequently acts on a state generated under different functional conditions.

The same issue arises when a coalition removes selected controlled powers of U . In that case, the state supplied to the fixed $\text{QFT}^\dagger$ readout encodes phase information under different computational conditions. Although the resulting configuration remains mathematically valid, it no longer represents a functionally comparable partial realization of the same phase-estimation process.

Therefore, applying the same $\text{QFT}^\dagger$ readout to every coalition does not by itself guarantee functional comparability. The states entering the readout arise from different functional contexts, so the resulting metric values cannot support a common functional attribution.

6 Observable Analysis

The initial experiment used the projective observable H_{per} on the counting register.

Let $\mathcal{K}_r$ denote the set of computational-basis outcomes compatible with the target period r within a tolerance ε . The observable takes the form

$$H_{\text{per}} = \left(\sum_{k \in \mathcal{K}_r} |k\rangle\langle k| \right) \otimes I_{\text{work}}, \quad (9)$$

where I_{work} acts on the work register.

H_{per} is Hermitian and acts on the Hilbert space of the implementation. For each coalition, the experiment applies the fixed $\text{QFT}^\dagger$ readout and then evaluates H_{per} on the resulting state. Its expectation value corresponds to the probability associated with the computational-basis outcomes in $\mathcal{K}_r$. The experiment obtains these probabilities directly from the statevector, without performing an explicit measurement operation.

The difficulty arises when component neutralization changes the process that generates the phase information. Although the same $\text{QFT}^\dagger$ readout and the same observable are applied to every coalition, the states entering the readout arise from different functional contexts. The expectation value therefore remains mathematically well defined, but it does not necessarily represent the same functional property under comparable computational conditions.

Thus, H_{per} satisfies the mathematical requirements of an observable, but the initial coalition construction does not guarantee its semantic invariance across coalitions.

7 Exploratory Cooperative Game

The initial experiment defined the characteristic function as

$$v(C) = M_H(\rho_C) - M_H(\rho_\emptyset), \quad (10)$$

where ρ_C denotes the state associated with coalition C and $\rho_\emptyset$ denotes the empty-coalition state. For each component b , the experiment computed

$$\phi_b = \sum_{C \subseteq B \setminus \{b\}} \frac{|C|!(|B| - |C| - 1)!}{|B|!} [v(C \cup \{b\}) - v(C)]. \quad (11)$$

The resulting allocation satisfies

$$\sum_{b \in B} \phi_b = v(B). \quad (12)$$

This equality verifies the Shapley efficiency property for the constructed game. It does not establish functional comparability among the coalitions. The latter depends on the QSMEF applicability conditions described above.

8 Exploratory Numerical Results

We retain the original numerical results to document the experiment and support reproducibility.

For $N = 21$, $a = 2$, $m = 5$, and $\varepsilon = 1/2^5$, the initial construction produced the Shapley values shown in Figure 1 and Table 1.

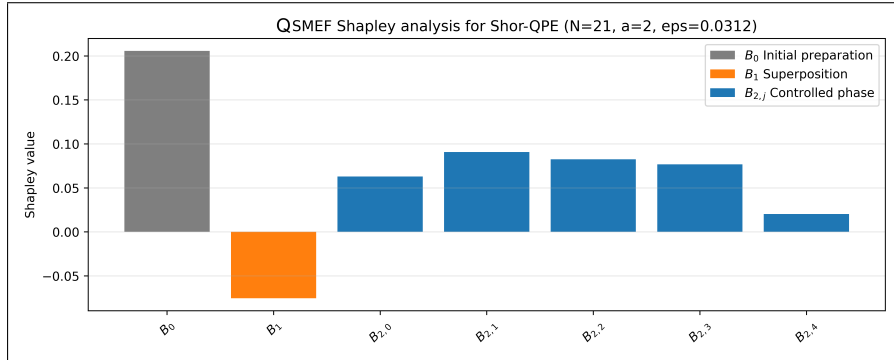


Figure 1: Shapley values obtained from the initial QPE cooperative-game construction for $N = 21$ and $a = 2$.

The metric values for the complete and empty configurations are

$$M_{H_{\text{per}}}(\rho_B) \approx 0.745 \quad (13)$$

and

$$M_{H_{\text{per}}}(\rho_\emptyset) \approx 0.281. \quad (14)$$

Therefore,

$$v(B) \approx 0.463487, \quad (15)$$

which equals the sum of the Shapley values.

Table 1: Shapley values obtained from the initial QPE construction.

Component	ϕ_b	$\phi_b/v(B)$ (%)
B_0	0.205753	44.39
B_1	-0.075497	-16.29
$B_{2,0}$	0.062984	13.59
$B_{2,1}$	0.090666	19.56
$B_{2,2}$	0.082468	17.79
$B_{2,3}$	0.076805	16.57
$B_{2,4}$	0.020308	4.38
Total	0.463487	100.00

These results describe the cooperative game generated by the initial construction. The applicability analysis prevents us from assigning them the stronger interpretation of functional contributions within QSMEF.

9 Exploratory Modified Implementation

The original experiment also modified component $B_{2,2}$ by replacing the unitary constructed with $a = 2$ with the corresponding operator for $a = 8$.

Figure 2 compares the Shapley values of the original and modified constructions.

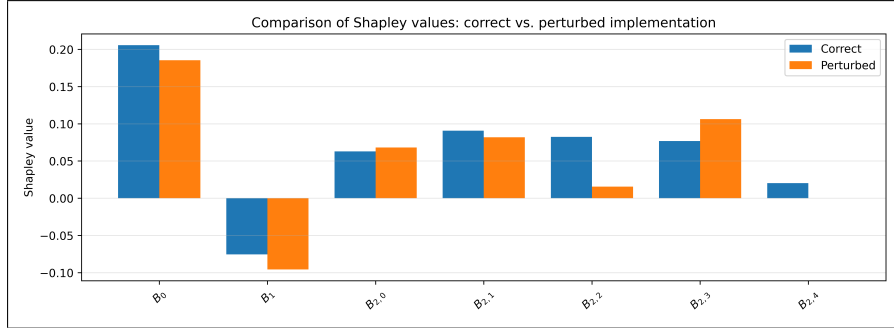


Figure 2: Shapley values obtained from the original and modified QPE cooperative-game constructions.

The modification reduces the value associated with $B_{2,2}$ from approximately 0.082 to 0.016 and changes the allocation among the other components. The total game value decreases from approximately 0.463487 to 0.361596.

These changes show that the cooperative game responds to modifications of the underlying circuit. However, the lack of functional comparability prevents QSMEF from interpreting the differences as changes in the functional contributions of the QPE components.

10 Methodological Implications

The QPE experiment highlights the distinction between structural and functional decomposition.

A circuit can contain clearly identifiable stages without allowing their independent neutralization for functional attribution. QPE illustrates this situation because state preparation, superposition

Table 2: Comparison of Shapley values after modifying $B_{2,2}$.

Component	Original	Modified	Difference
B_0	0.205753	0.185445	-0.020308
B_1	-0.075497	-0.095805	-0.020308
$B_{2,0}$	0.062984	0.068229	0.005246
$B_{2,1}$	0.090666	0.081870	-0.008796
$B_{2,2}$	0.082468	0.015579	-0.066889
$B_{2,3}$	0.076805	0.106278	0.029473
$B_{2,4}$	0.020308	0.000000	-0.020308
Total	0.463487	0.361596	-0.101891

generation, and controlled phase encoding do not act as functionally independent stages. Their functional meaning depends on the computational context established by the other stages.

The experiment also shows that Hermiticity alone does not make an observable suitable for QSMEF. The observable must retain the same functional meaning for every configuration that enters the cooperative game.

These observations refine the applicability criteria of the framework. Before constructing the characteristic function, the analysis should verify that

1. all configurations operate within a structurally compatible Hilbert space;
2. component neutralization preserves functional comparability among coalitions; and
3. the observable retains its semantic interpretation across all coalitions.

These conditions determine whether QSMEF can interpret the resulting Shapley values as functional contributions rather than only as allocations of an abstract cooperative game.

11 Conclusions

The analysis of QPE identifies a limit to the applicability of the initial QSMEF construction.

The original decomposition separates recognizable stages of the QPE circuit, but neutralizing those stages does not preserve their functional context across all coalitions. In addition, the period observable remains mathematically well defined, but its functional interpretation cannot be guaranteed to remain invariant when the coalition alters the process that generates phase information.

The numerical experiment still defines a valid cooperative game and produces Shapley values that satisfy the efficiency property. However, the lack of functional comparability prevents QSMEF from interpreting those values as functional contributions of the QPE components.

This result refines the methodological scope of QSMEF. The framework requires a functional decomposition that supports meaningful neutralization and an observable that represents the same property throughout the coalition space.

The SKW quantum search analyzed in the companion paper remains the application case in which the selected decomposition and observable satisfy these requirements. The QPE experiment complements that case by showing where the methodology reaches an applicability boundary.