





Get del Aray completo:

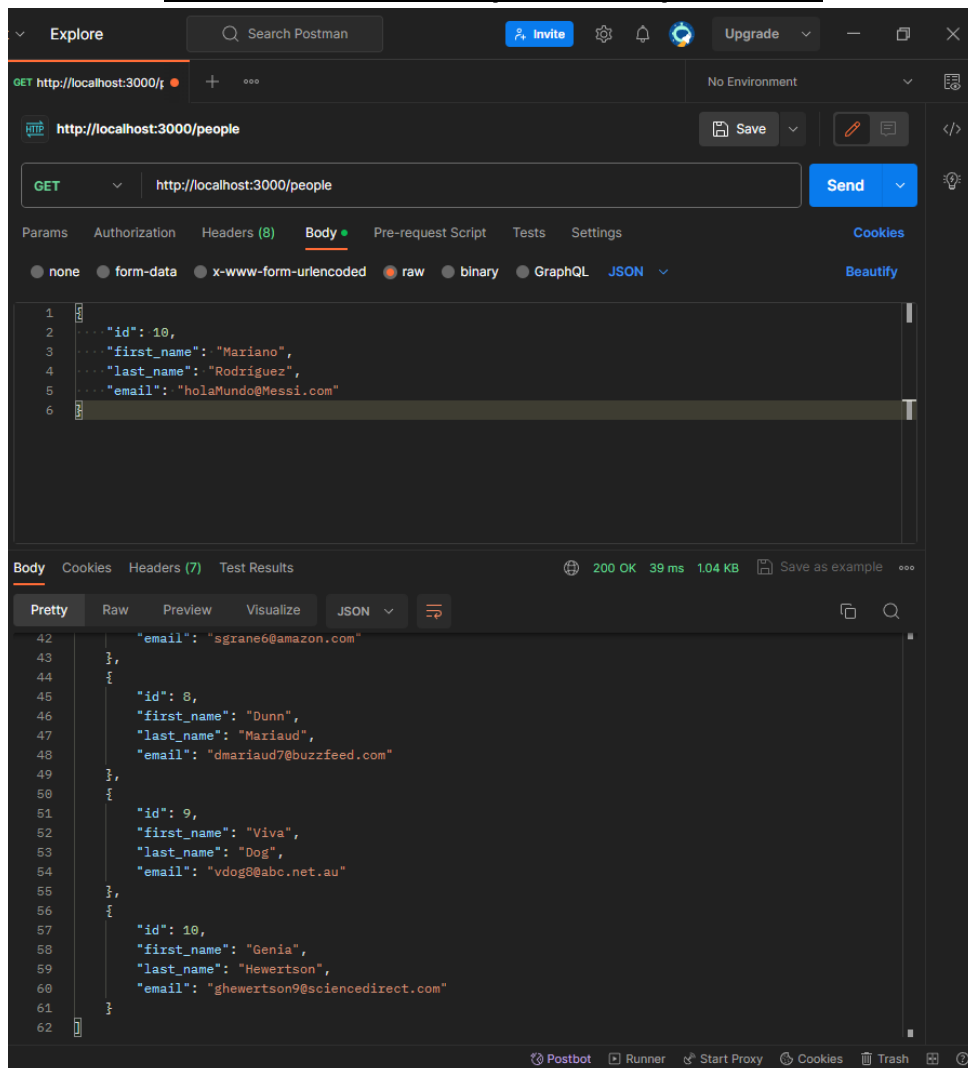



Get según índice:

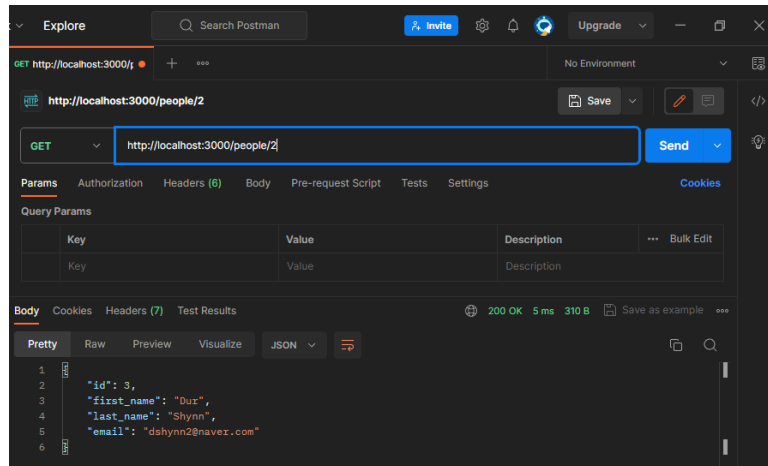

Post:

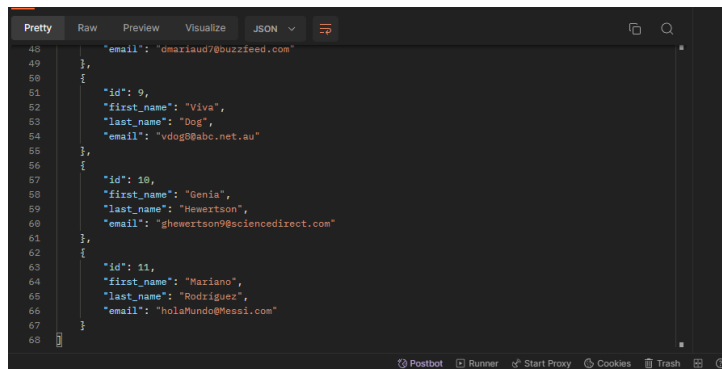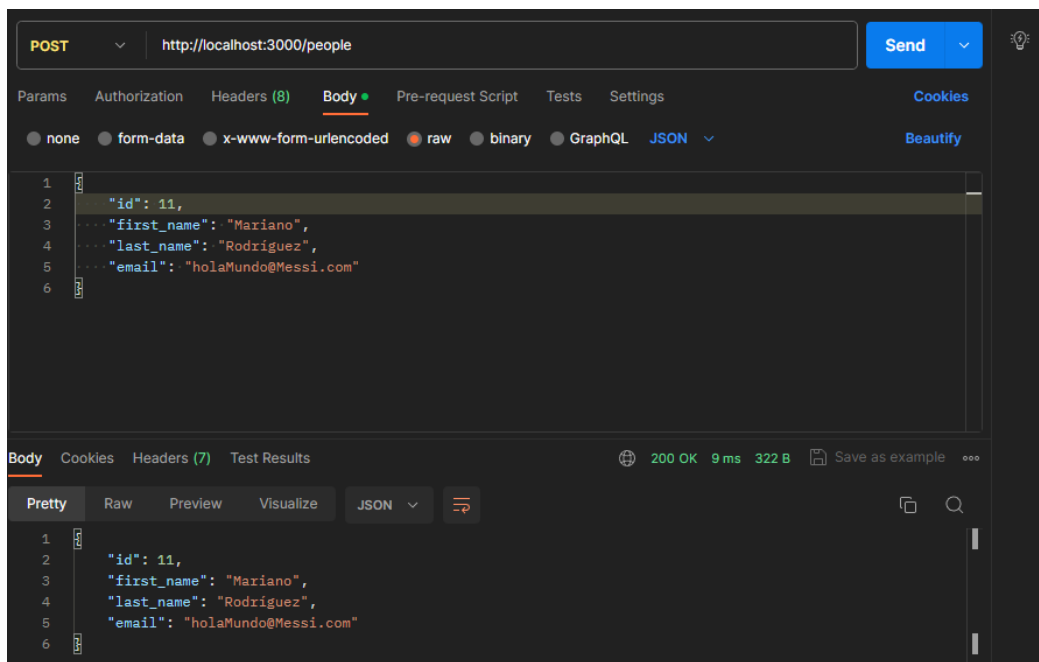

Put:

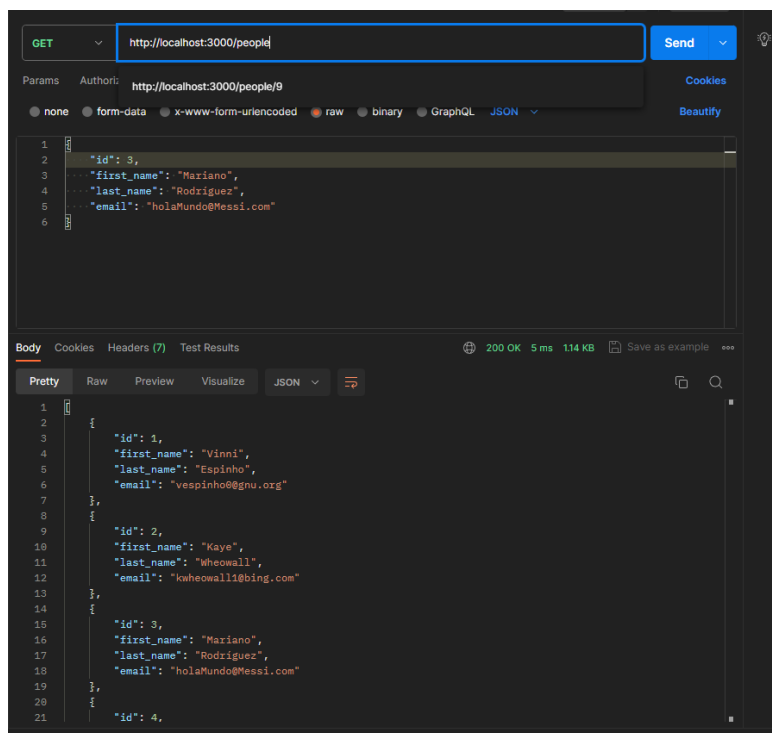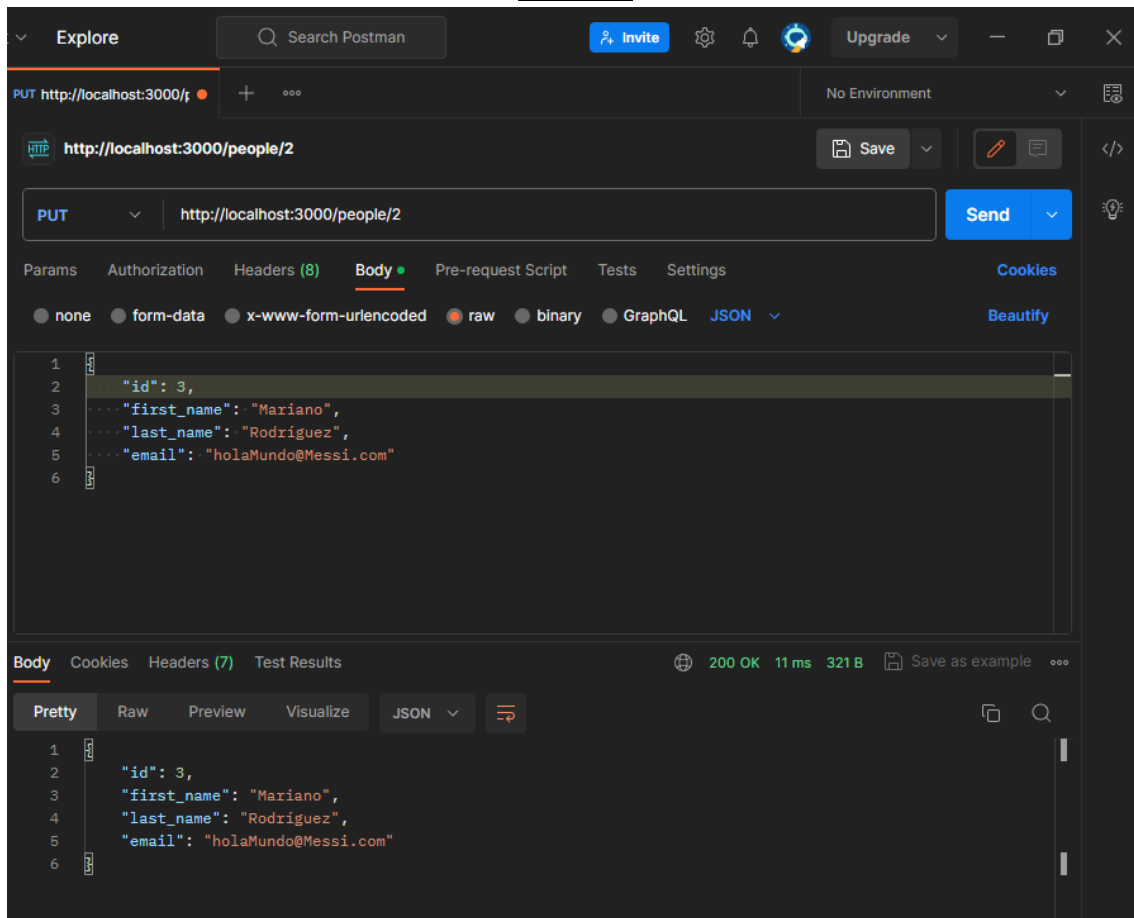

Delete:

The screenshot shows the Postman interface for a DELETE request. The URL is `http://localhost:3000/people/10`. The request body is a JSON object representing a person to be deleted:

```
1 {
2   "id": 11,
3   "first_name": "Mariano",
4   "last_name": "Rodriguez",
5   "email": "holaMundo@Messi.com"
6 }
```

The response is a 200 OK status with a JSON array of 5 people objects:

```
42 [
43   {
44     "id": 8,
45     "first_name": "Dunn",
46     "last_name": "Mariaud",
47     "email": "dmariaud7@buzzfeed.com"
48   },
49   {
50     "id": 9,
51     "first_name": "Viva",
52     "last_name": "Dog",
53     "email": "vdog8@abc.net.au"
54   },
55   {
56     "id": 10,
57     "first_name": "Genia",
58     "last_name": "Hewertson",
59     "email": "ghewertson9@sciencedirect.com"
60   }
61 ]
62 }
```