


### 3. Pre-requisiti: Network pt. 2

#### - Architettura

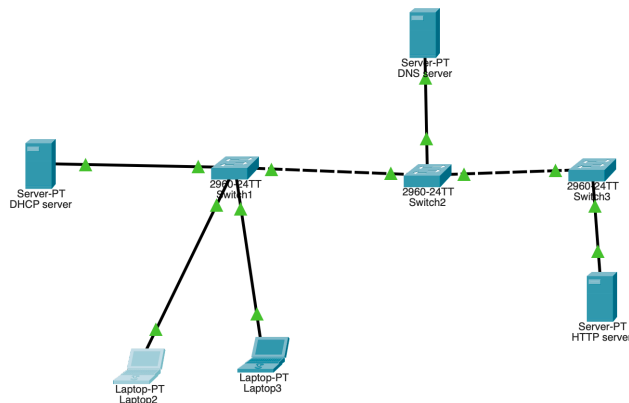

#### - ipconfig da laptop2 a DHCP server

```
C:\>ipconfig

FastEthernet0 Connection:(default port)

    Connection-specific DNS Suffix...:
    Link-local IPv6 Address . . . . .: FE80::20D:BDFF:FEAB:AD18
    IPv6 Address . . . . .: ::
    IPv4 Address . . . . .: 192.168.100.1
    Subnet Mask . . . . .: 255.255.255.0
    Default Gateway . . . . .: ::
                                   192.168.100.1

Bluetooth Connection:

    Connection-specific DNS Suffix...:
    Link-local IPv6 Address . . . . .: ::
    IPv6 Address . . . . .: ::
    IPv4 Address . . . . .: 0.0.0.0
    Subnet Mask . . . . .: 0.0.0.0
    Default Gateway . . . . .: ::
                                   0.0.0.0

C:\>
```

#### - ipconfig da laptop3 a DHCP server

```
C:\>ipconfig

FastEthernet0 Connection:(default port)

    Connection-specific DNS Suffix...:
    Link-local IPv6 Address . . . . .: FE80::2D0:BCFF:FEE3:599C
    IPv6 Address . . . . .: ::
    IPv4 Address . . . . .: 192.168.100.2
    Subnet Mask . . . . .: 255.255.255.0
    Default Gateway . . . . .: ::
                                   192.168.100.1

Bluetooth Connection:

    Connection-specific DNS Suffix...:
    Link-local IPv6 Address . . . . .: ::
    IPv6 Address . . . . .: ::
    IPv4 Address . . . . .: 0.0.0.0
    Subnet Mask . . . . .: 0.0.0.0
    Default Gateway . . . . .: ::
                                   0.0.0.0

C:\>
```

#### - Associazione epicode.internal al server HTTP

