

Plataformas de Software de Digital Forensics




Integrantes :

- Karen Chaves Antonsen
- Ashly Zuñiga Arias
- Maria Mercedes Segura Hernandez


Wireshark

Wireshark es un software de código abierto que funciona como un analizador de protocolos de red. Su función principal es capturar paquetes de datos que circulan a través de una red y permitir su análisis detallado.

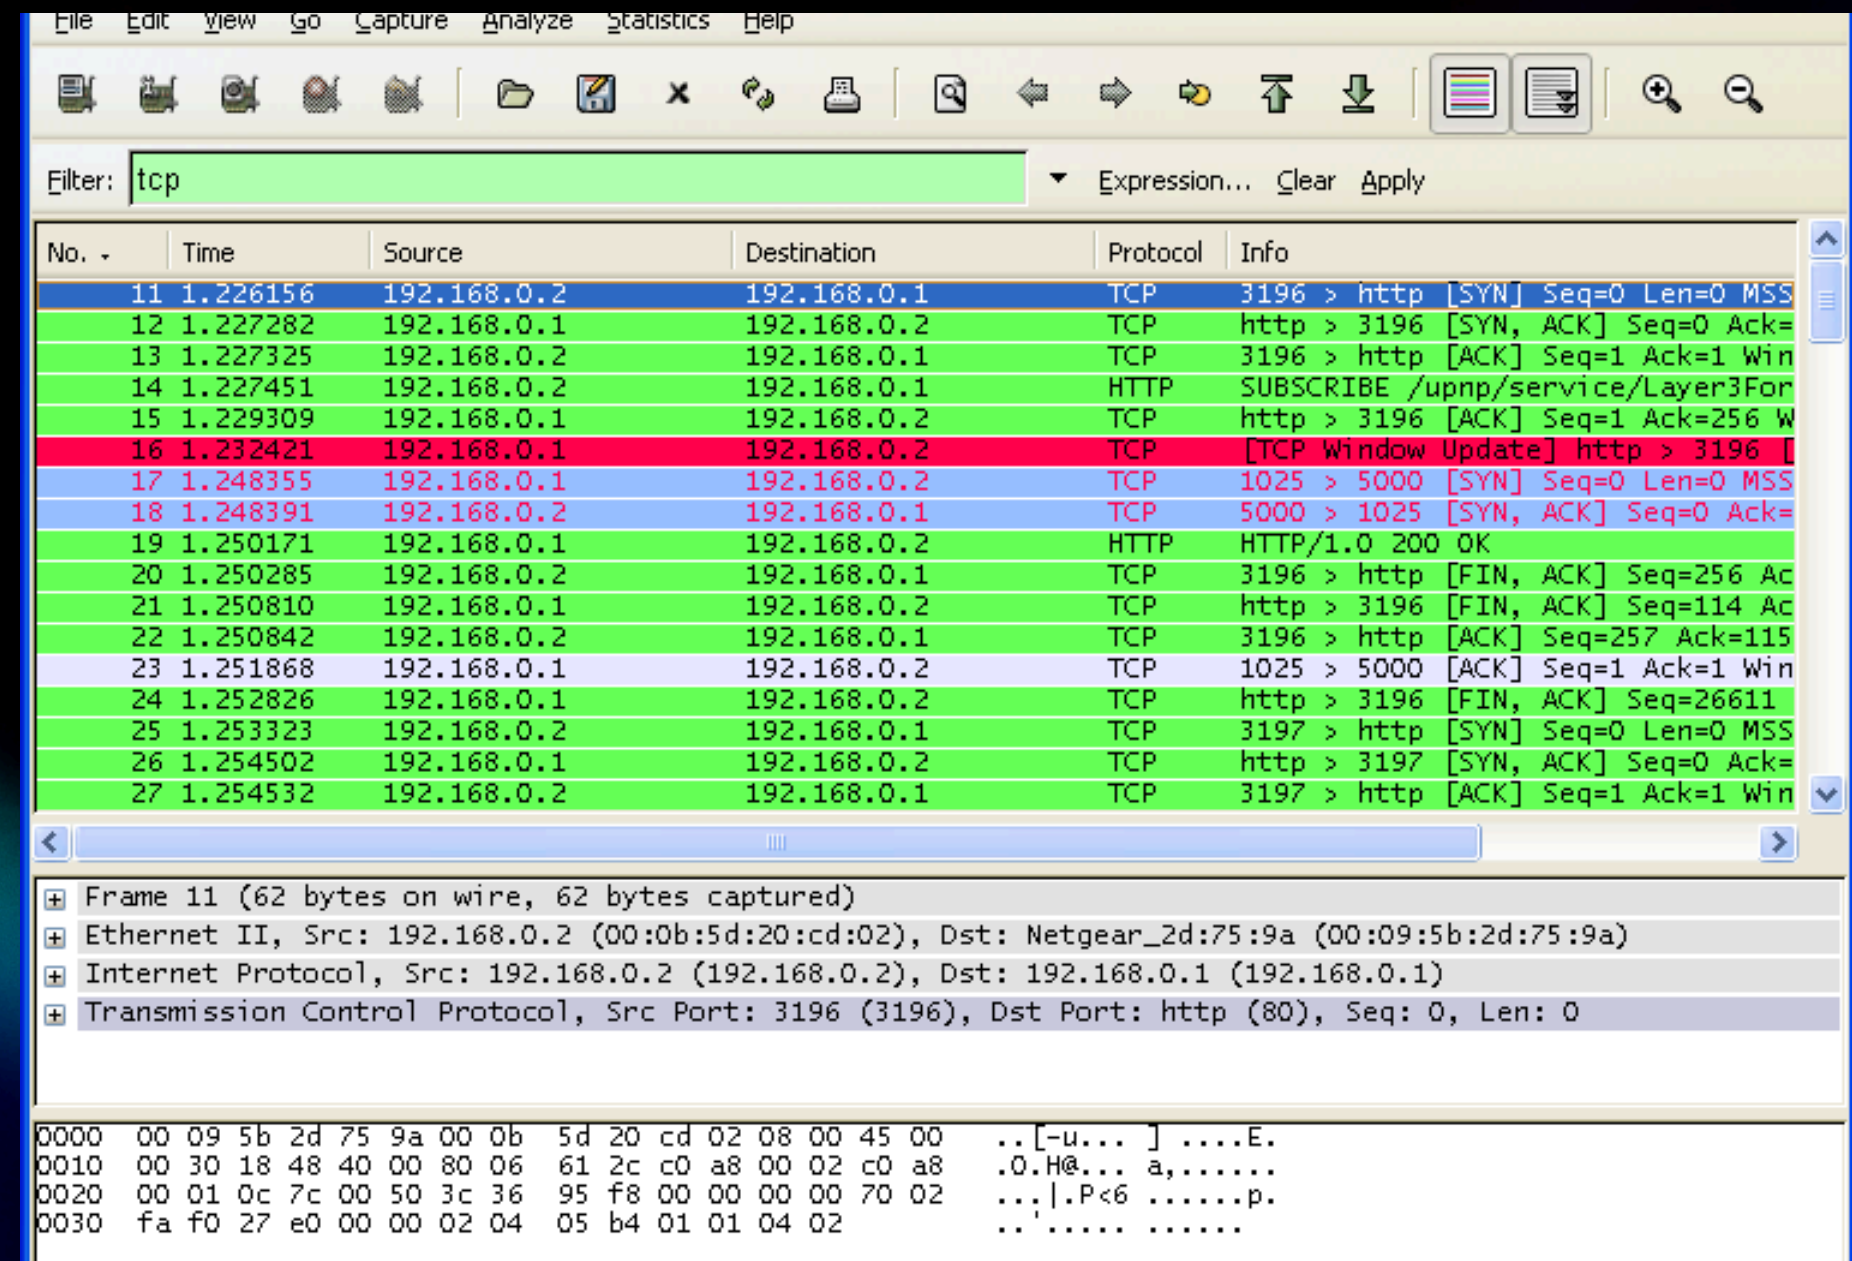

Hashcat

HASHCAT

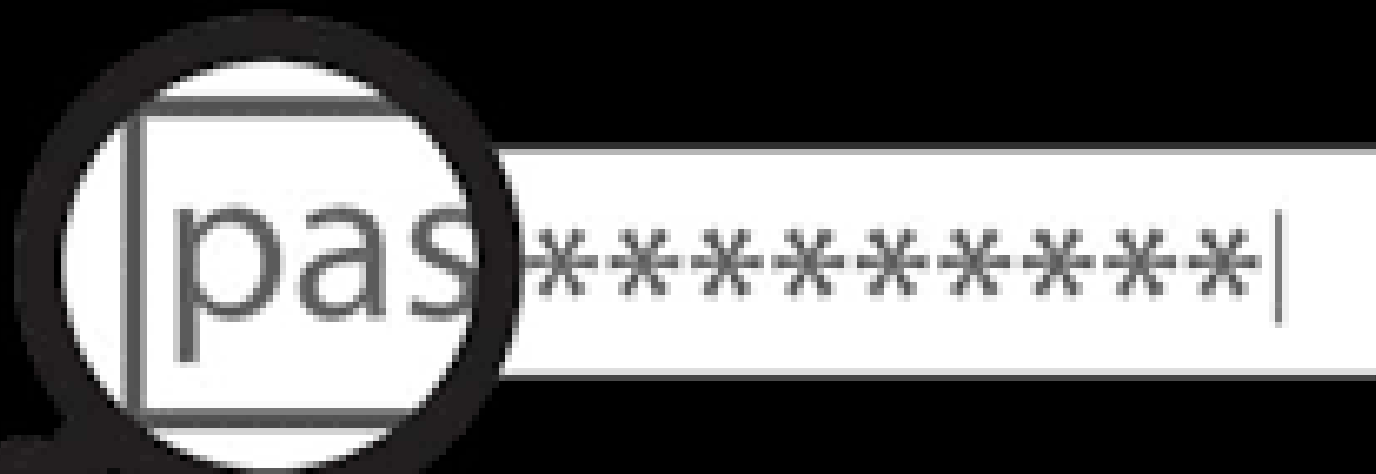


John the Ripper

John the Ripper es una herramienta utilizada para el análisis y recuperación de contraseñas. Permite a los profesionales de tecnología de la información evaluar la seguridad de las contraseñas mediante ataques offline contra hashes criptográficos, que es la forma en la que los sistemas almacenan las contraseñas de manera segura.

```
root@kali:~# john
John the Ripper password cracker, version 1.8.0.6-jumbo-1-bleeding [linux-x86-64-avx]
Copyright (c) 1996-2015 by Solar Designer and others
Homepage: http://www.openwall.com/john/

Usage: john [OPTIONS] [PASSWORD-FILES]
--single[=SECTION]          "single crack" mode
--wordlist[=FILE] --stdin  wordlist mode, read words from FILE or stdin
                        --pipe  like --stdin, but bulk reads, and allows rules
--loopback[=FILE]          like --wordlist, but fetch words from a .pot file
--dupe-suppression         suppress all dupes in wordlist (and force preload)
--prince[=FILE]            PRINCE mode, read words from FILE
--encoding=NAME            input encoding (eg. UTF-8, ISO-8859-1). See also
                        doc/ENCODING and --list=hidden-options.
--rules[=SECTION]          enable word mangling rules for wordlist modes
--incremental[=MODE]       "incremental" mode [using section MODE]
--mask=MASK                mask mode using MASK
--markov[=OPTIONS]         "Markov" mode (see doc/MARKOV)
--external=MODE            external mode or word filter
--stdout[=LENGTH]         just output candidate passwords [cut at LENGTH]
--restore[=NAME]           restore an interrupted session [called NAME]
--session=NAME             give a new session the NAME
--status[=NAME]            print status of a session [called NAME]
--make-charset=FILE        make a charset file. It will be overwritten
--show[=LEFT]              show cracked passwords [if =LEFT, then uncracked]
--test[=TIME]              run tests and benchmarks for TIME seconds each
--users=[-]LOGIN|UID[,...] [do not] load this (these) user(s) only
```

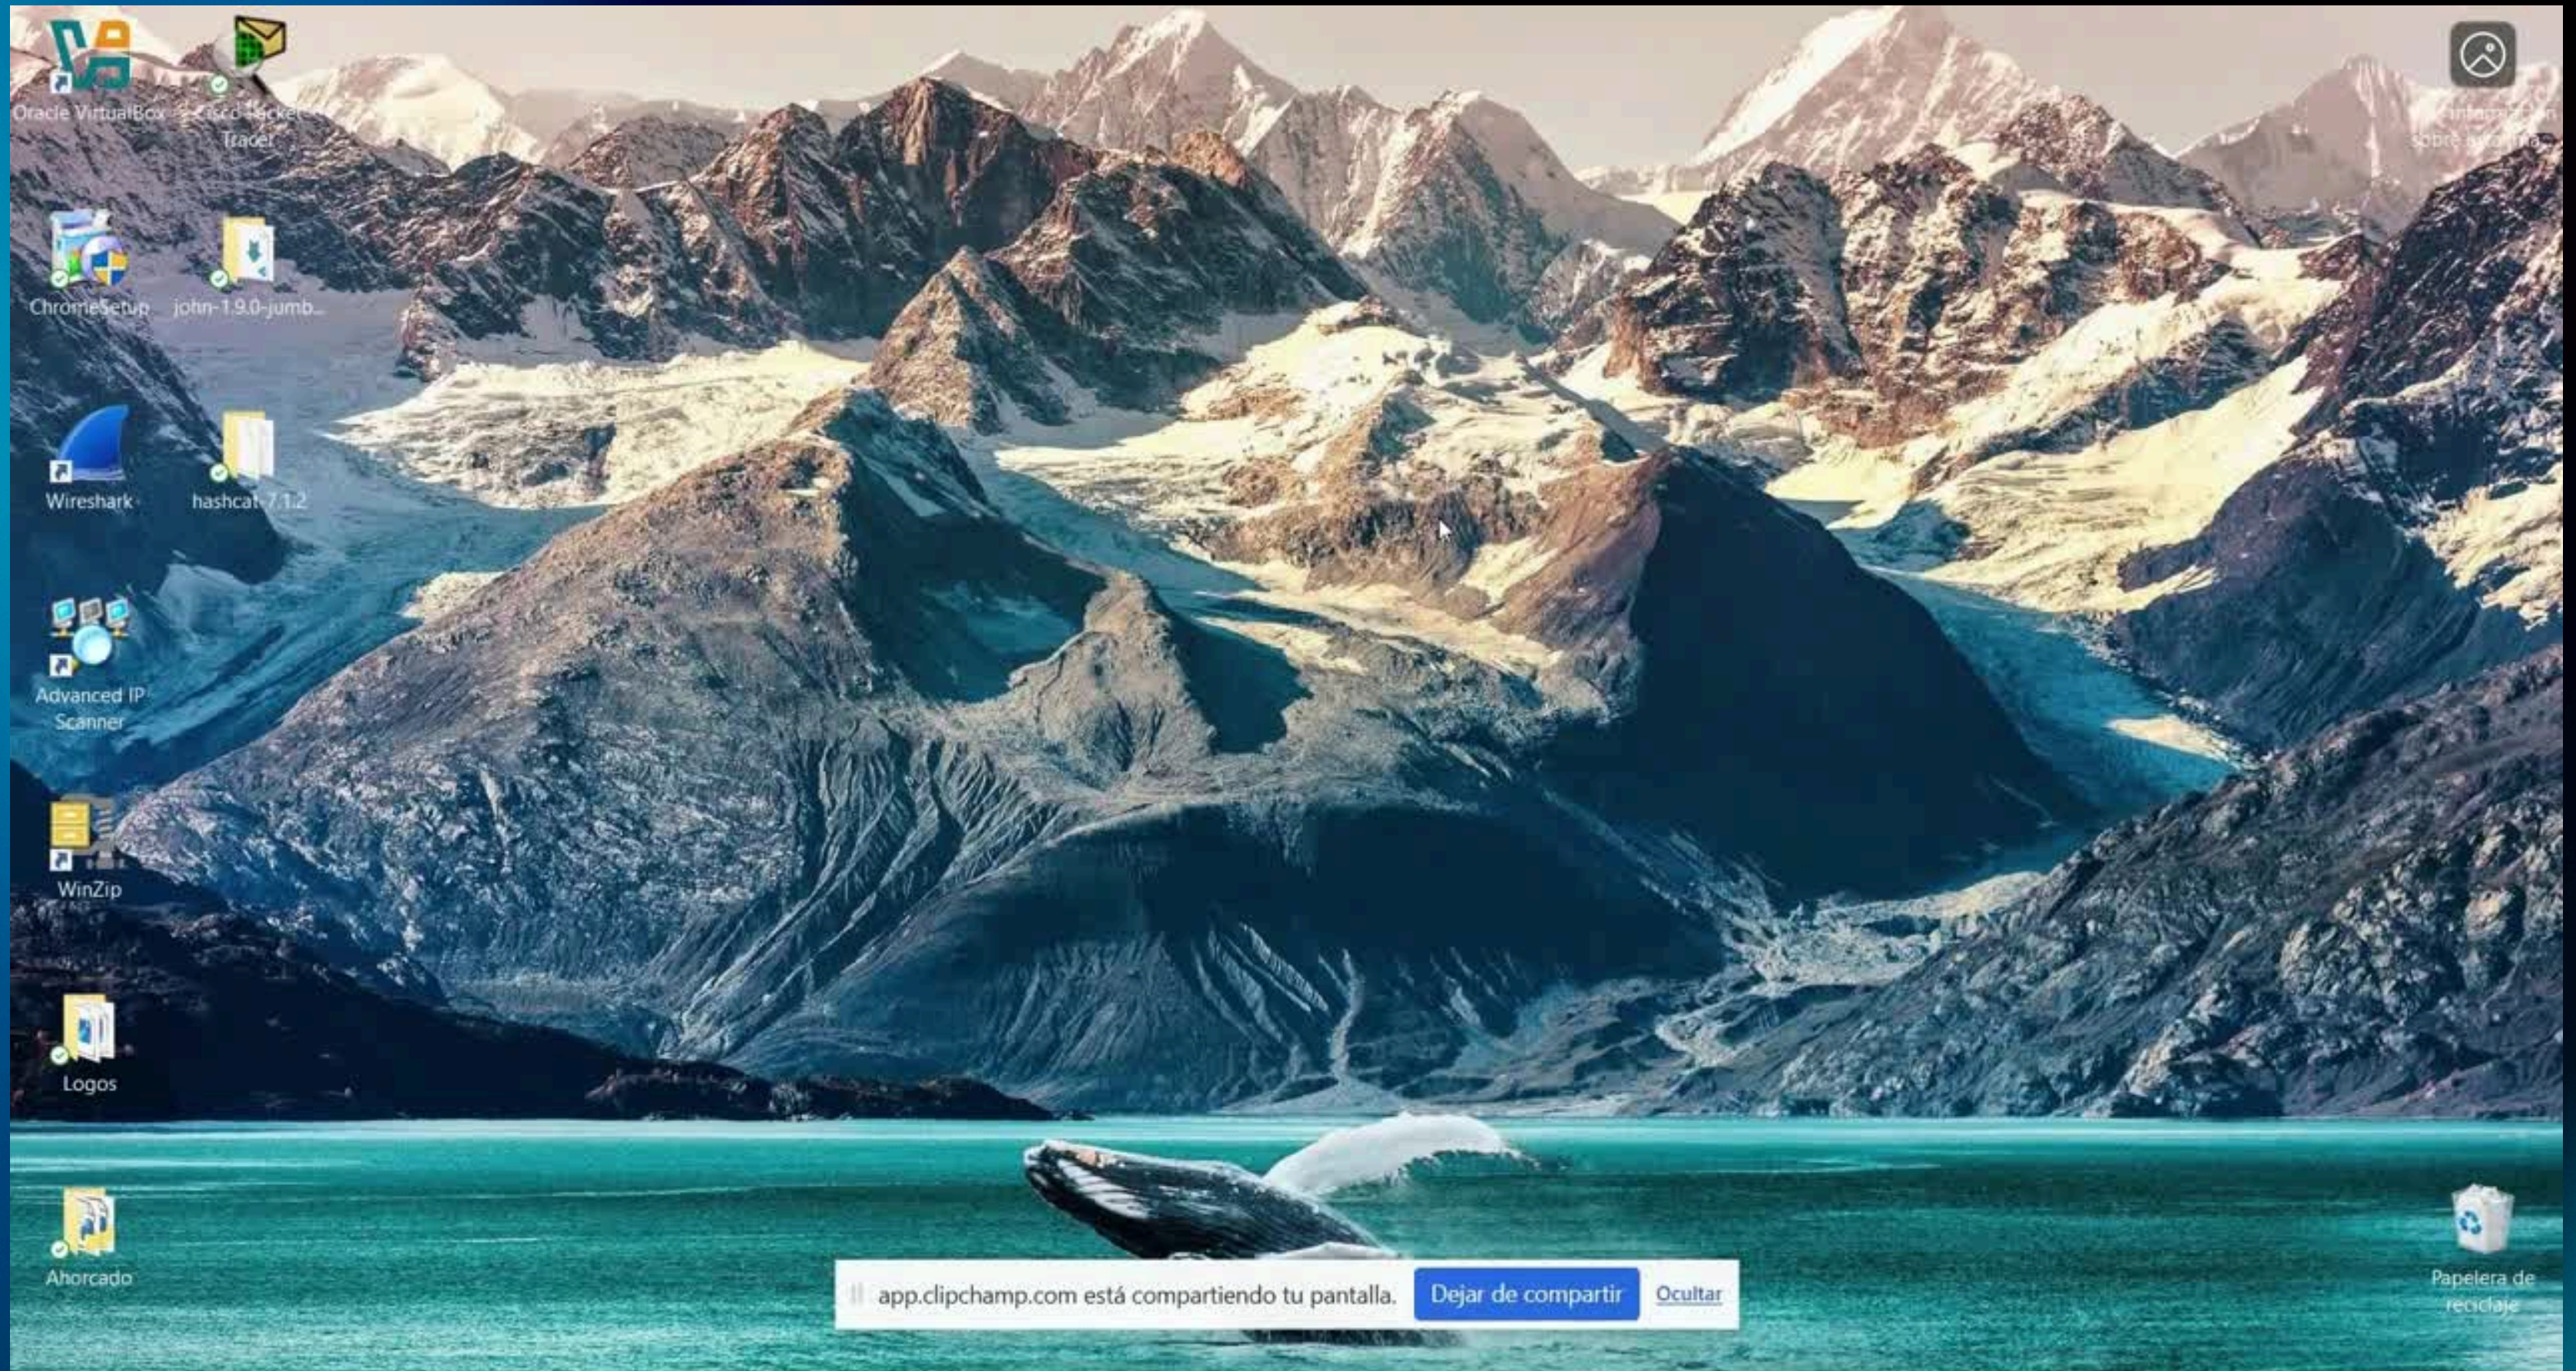

“

Thank You.