

pfSense :

Exercice 1 : Installation pfSense

Créer la VM pfSense

Configuration réseau

Installation

Configuration de base

Exercice 2 : Configuration Réseau LAN + DMZ

J'ai configuré les interfaces et leurs adresses.

```
pfSense.home.arp (192.168.1.1) at 00:0c:29:3a:38:08 on em1 permanent [ethernet]
? (192.168.1.100) at 00:0c:29:03:91:6a on em1 expires in 978 seconds [ethernet]
? (192.168.92.135) at 00:0c:29:3a:38:fe on em0 permanent [ethernet]
? (192.168.92.2) at 00:50:56:e2:61:5b on em0 expires in 1178 seconds [ethernet]
[2.6.0-RELEASE][root@pfSense.home.arp]/root: exit
exit
VMware Virtual Machine - Netgate Device ID: 638ff65215aa67a51439


*** Welcome to pfSense 2.6.0-RELEASE (amd64) on pfSense ***

WAN (wan)      -> em0      -> v4/DHCP4: 192.168.92.135/24
LAN (lan)      -> em1      -> v4: 192.168.1.1/24
DMZ (opt1)     -> em2      -> v4: 192.168.2.1/24


0) Logout (SSH only)          9) pfTop
1) Assign Interfaces          10) Filter Logs
2) Set interface(s) IP address 11) Restart webConfigurator
3) Reset webConfigurator password 12) PHP shell + pfSense tools
4) Reset to factory defaults  13) Update from console
5) Reboot system              14) Enable Secure Shell (sshd)
6) Halt system                 15) Restore recent configuration
7) Ping host                   16) Restart PHP-FPM
8) Shell

Enter an option: █
```

Configurer les interfaces de pfSense : une carte réseau en mode *Bridge* , la deuxième en segment LAN, et la troisième en segment DMZ.

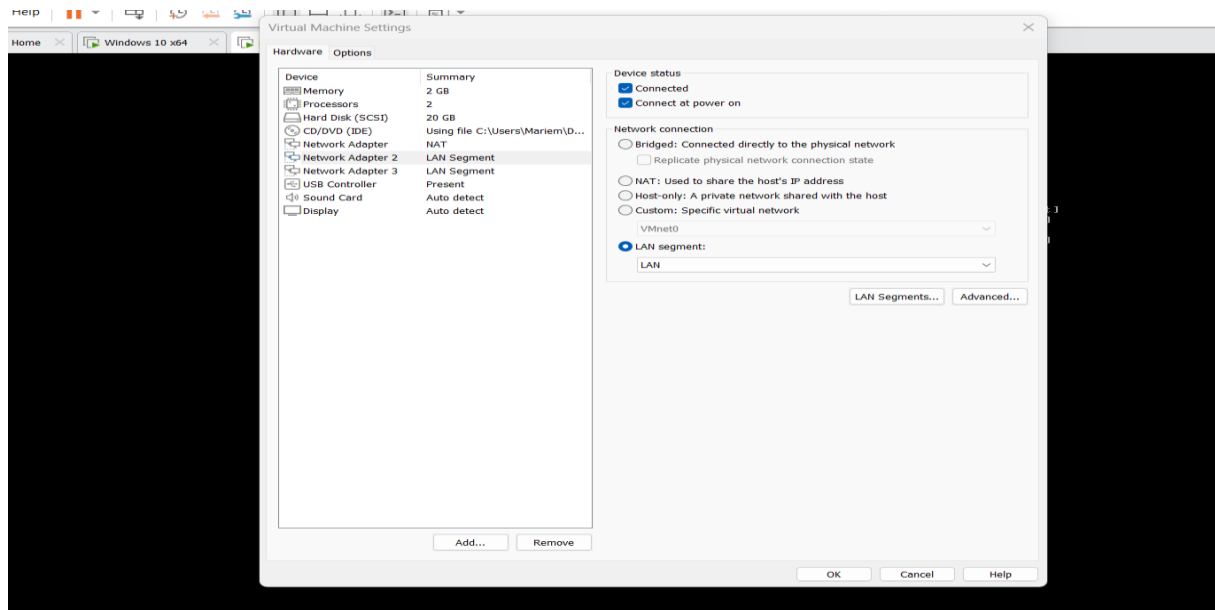

Accéder à l'URL <http://192.168.1.1>, l'adresse de gestion du serveur pfSense.

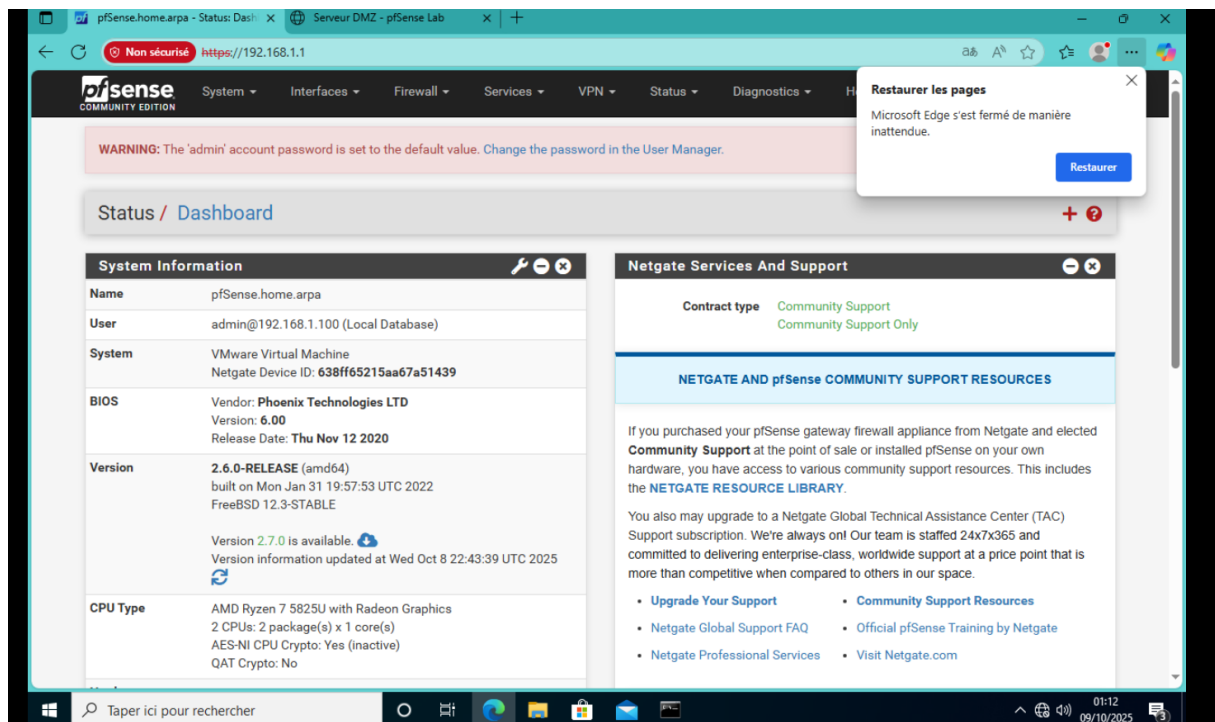

Exercice 3 : Serveur Ubuntu DMZ


Configurer carte réseaux de Ubuntu

Address :192.168.2.10


Gateway 255.255.255.0


Passerelle :192.168.2.1

Adress DNS :192.168.2.1

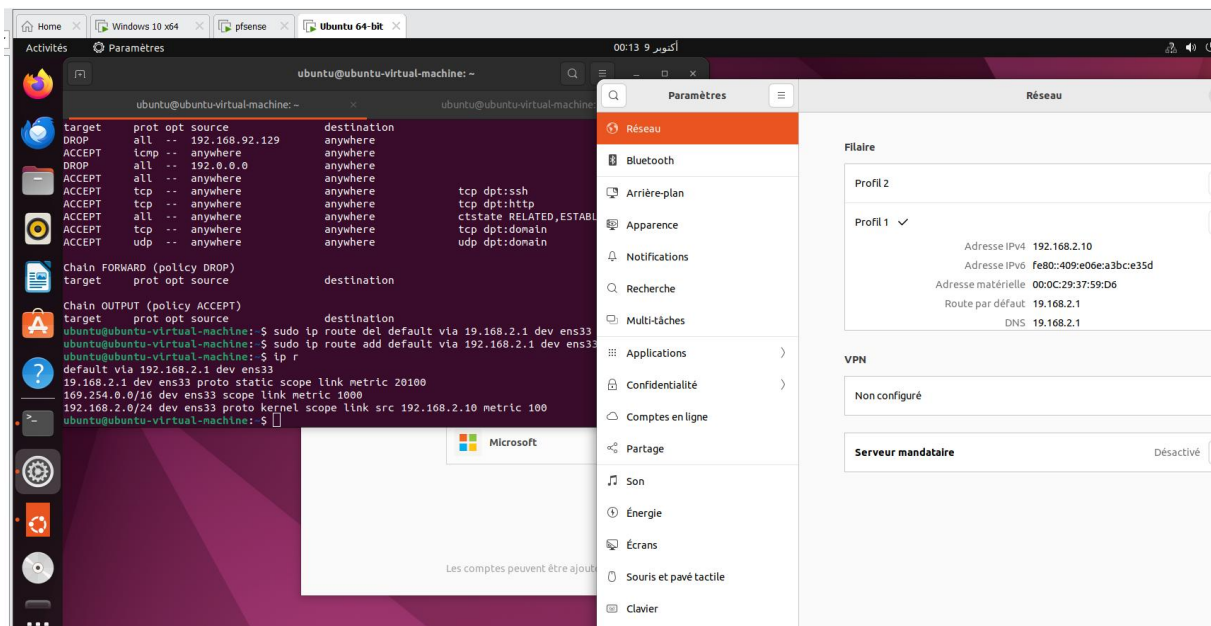


Installation serveur openSSH

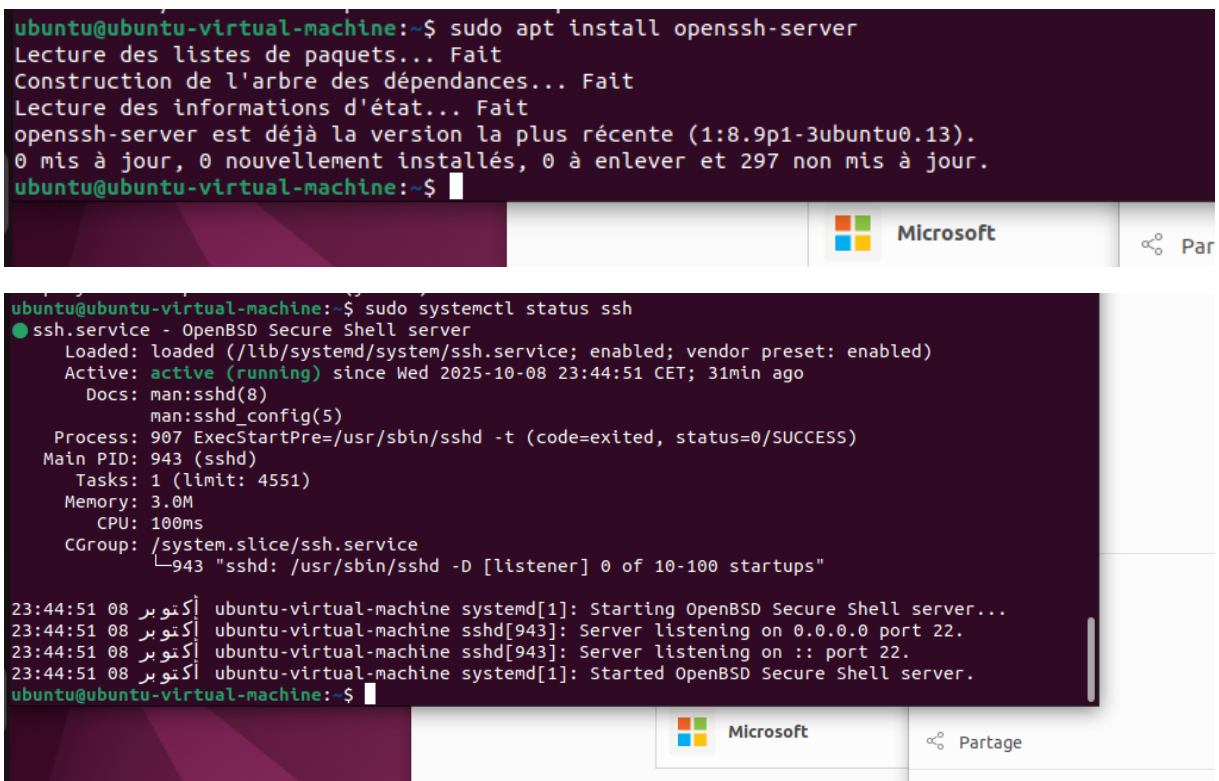

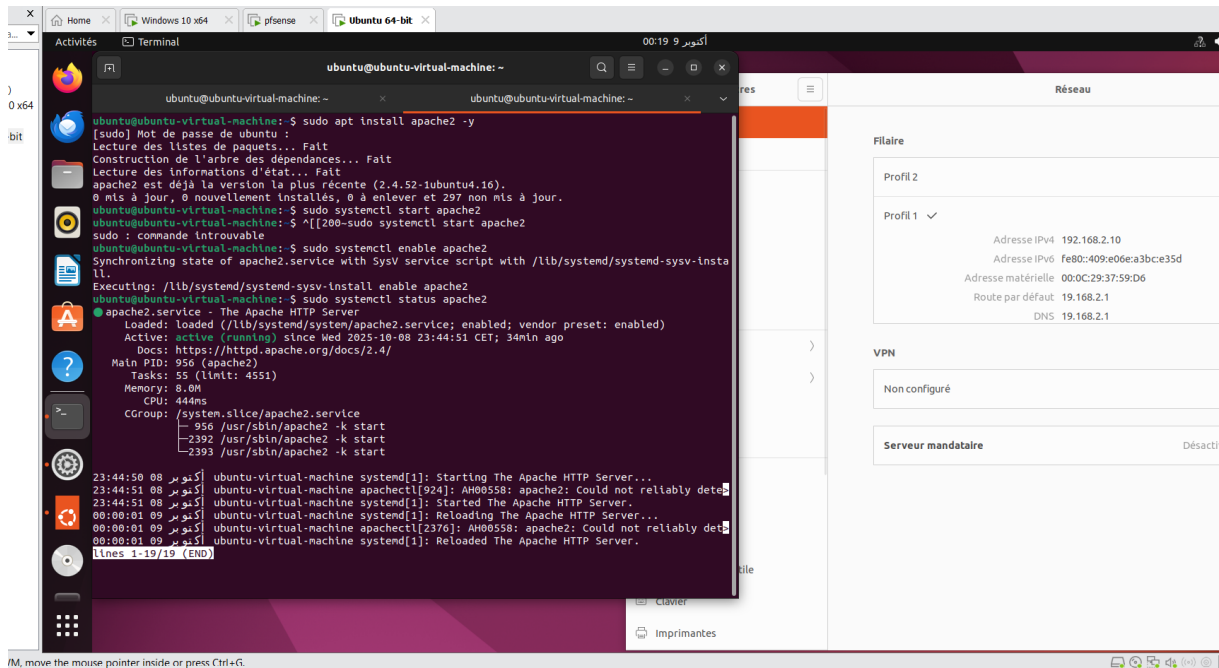

Créer une page de test index.html

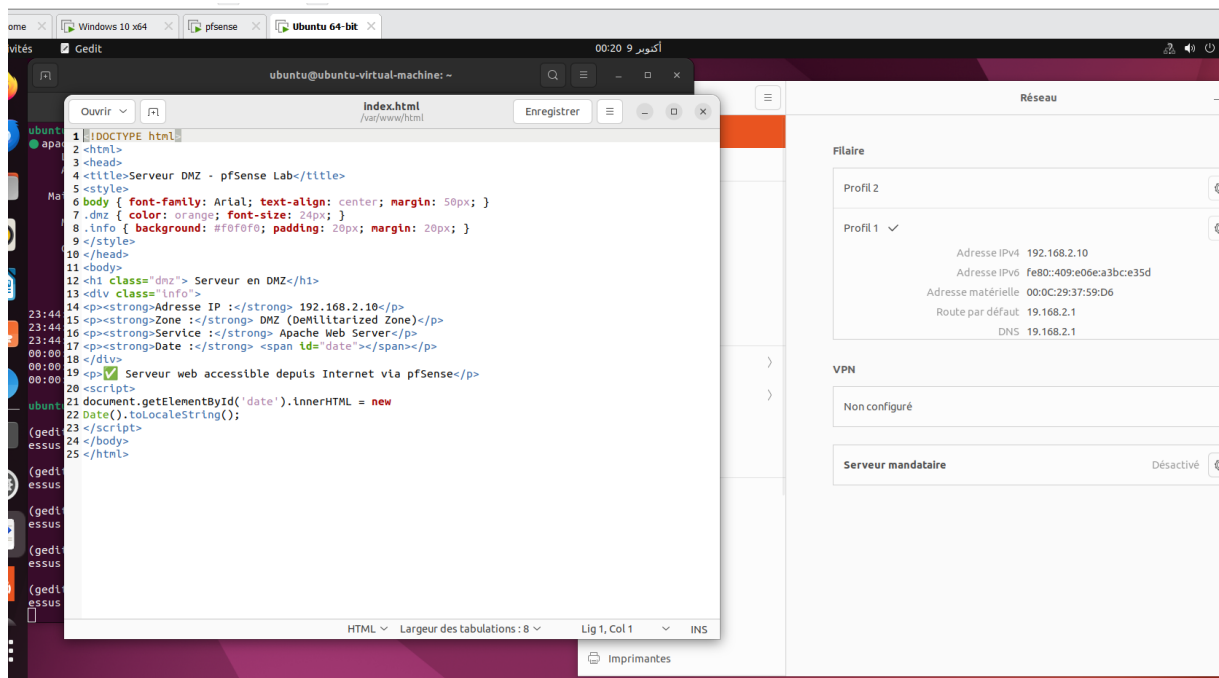


curl http://localhost : Vérifie si le service Web est démarré sur le serveur DMZ, isolant ainsi les problèmes de logiciel.


curl http://192.168.2.10 : Vérifie si l'accès réseau (y compris le pare-feu pfSense) permet d'atteindre le serveur DMZ depuis un autre poste.

```

ubuntu@ubuntu-virtual-machine:~$ curl http://localhost
<!DOCTYPE html>
<html>
<head>
<title>Serveur DMZ - pfSense Lab</title>
<style>
body { font-family: Arial; text-align: center; margin: 50px; }
.dmz { color: orange; font-size: 24px; }
.info { background: #f0f0f0; padding: 20px; margin: 20px; }
</style>
</head>
<body>
<h1 class="dmz"> Serveur en DMZ</h1>
<div class="info">
<p><strong>Adresse IP :</strong> 192.168.2.10</p>
<p><strong>Zone :</strong> DMZ (DeMilitarized Zone)</p>
<p><strong>Service :</strong> Apache Web Server</p>
<p><strong>Date :</strong> <span id="date"></span></p>
</div>
<p>✔ Serveur web accessible depuis Internet via pfSense</p>
<script>
document.getElementById('date').innerHTML = new
Date().toLocaleString();
</script>
</body>
</html>
ubuntu@ubuntu-virtual-machine:~$ curl http://192.168.2.10
<!DOCTYPE html>
<html>
<head>
<title>Serveur DMZ - pfSense Lab</title>
<style>
body { font-family: Arial; text-align: center; margin: 50px; }
.dmz { color: orange; font-size: 24px; }
.info { background: #f0f0f0; padding: 20px; margin: 20px; }
</style>
</head>
<body>


```

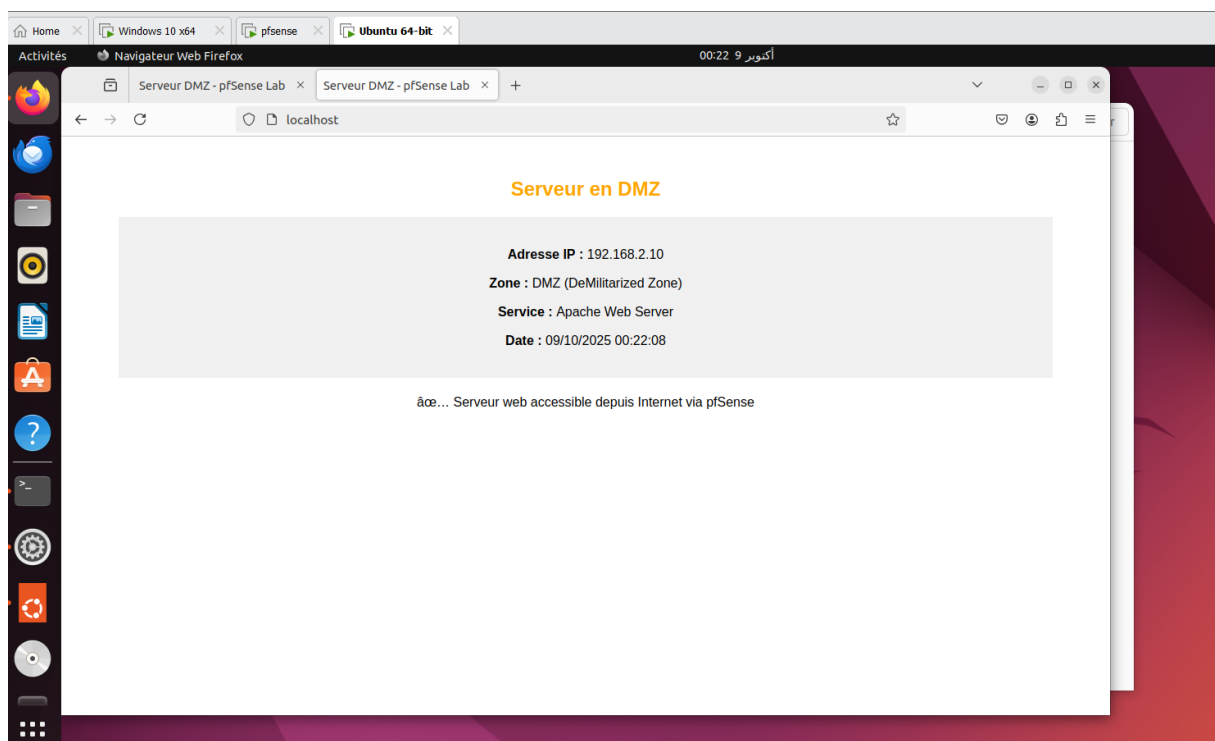

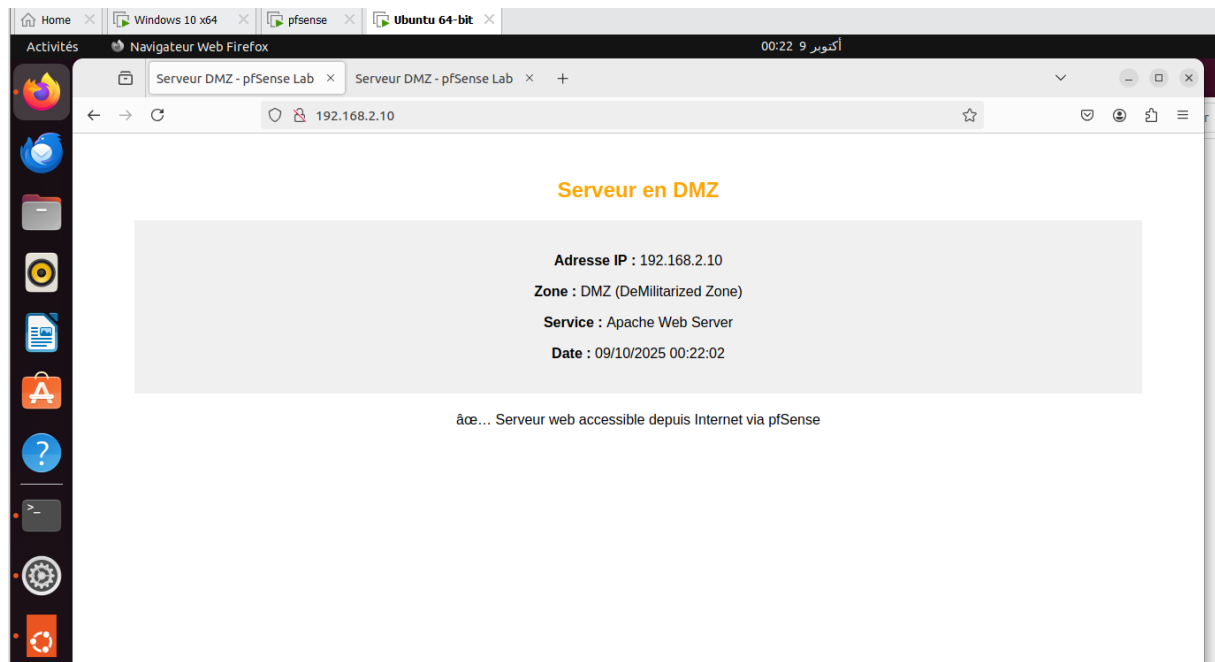


Exercice 4 : Client Windows


Configurer l'adresse de la machine cliente Windows.

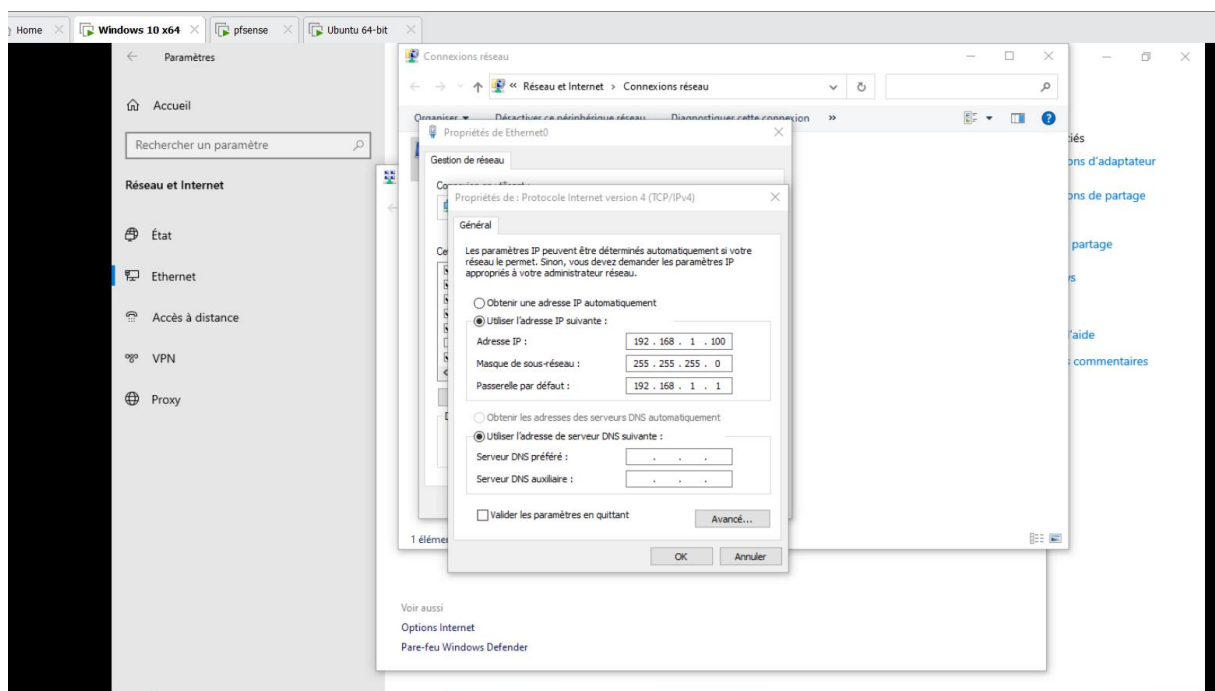

Ajout de la machine cliente dans le réseau LAN (segment LAN).

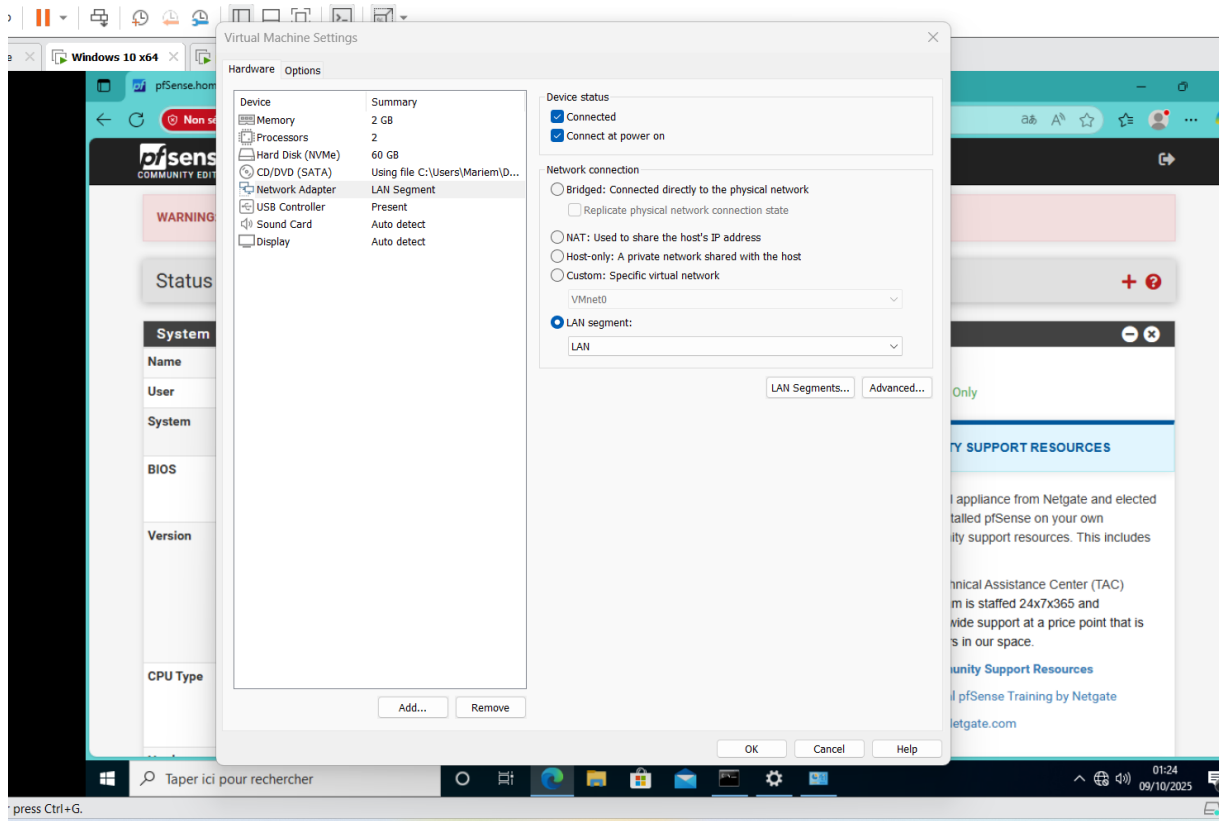

Test accès serveur web DMZ

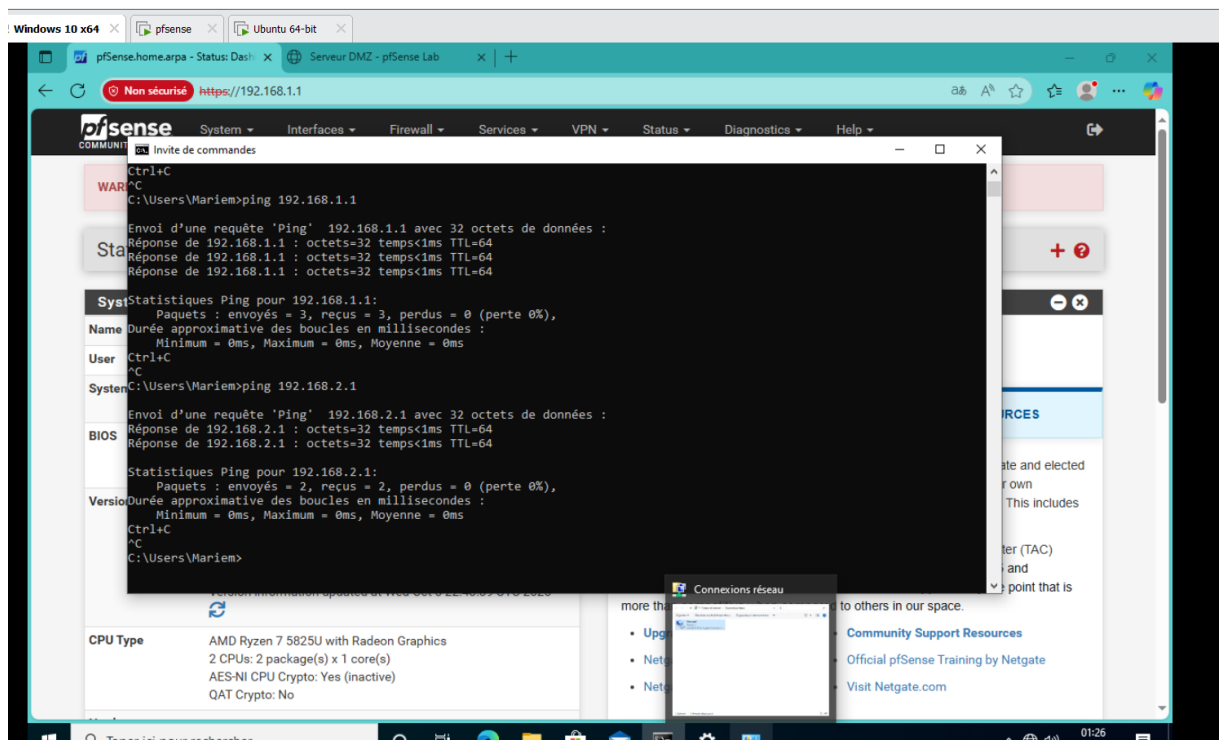

```
^C
C:\Users\Mariam>ping 192.168.2.10

Envoi d'une requête 'Ping' 192.168.2.10 avec 32 octets de données :
Délai d'attente de la demande dépassé.

Statistiques Ping pour 192.168.2.10:
    Paquets : envoyés = 1, reçus = 0, perdus = 1 (perte 100%),
Ctrl+C
^C
C:\Users\Mariam>
```

Invite de commandes

Exercice 5 : Interface Web et DMZ

Configurer l'interface DMZ dans pfSense et créer les règles firewall.

pfSense.home.arpa - Interfaces x Serveur DMZ - pfSense Lab x +

Non sécurisé https://192.168.1.1/interfaces.php?if=opt1

pfSense COMMUNITY EDITION System Interfaces Firewall Services VPN Status Diagnostics Help



WARNING: The 'admin' account password is set to the default value. [Change the password in the User Manager.](#)


Interfaces / DMZ (em2)

General Configuration

Enable	☒ Enable interface
Description	DMZ Enter a description (name) for the interface here.
IPv4 Configuration Type	Static IPv4
IPv6 Configuration Type	None
MAC Address	xxxxxxxxxxxx This field can be used to modify ("spoof") the MAC address of this interface. Enter a MAC address in the following format: xxxxxxxx:xxxx:xx or leave blank.
MTU	 If this field is blank, the adapter's default MTU will be used. This is typical for most circumstances.
MSS	 If a value is entered in this field, then MSS clamping for TCP connections will be in effect. The value must be less than or equal to 40 for IPv4 (TCP/IPv4 header size) and minus 60 for IPv6 (TCP/IPv6 header size).


Connexions réseau

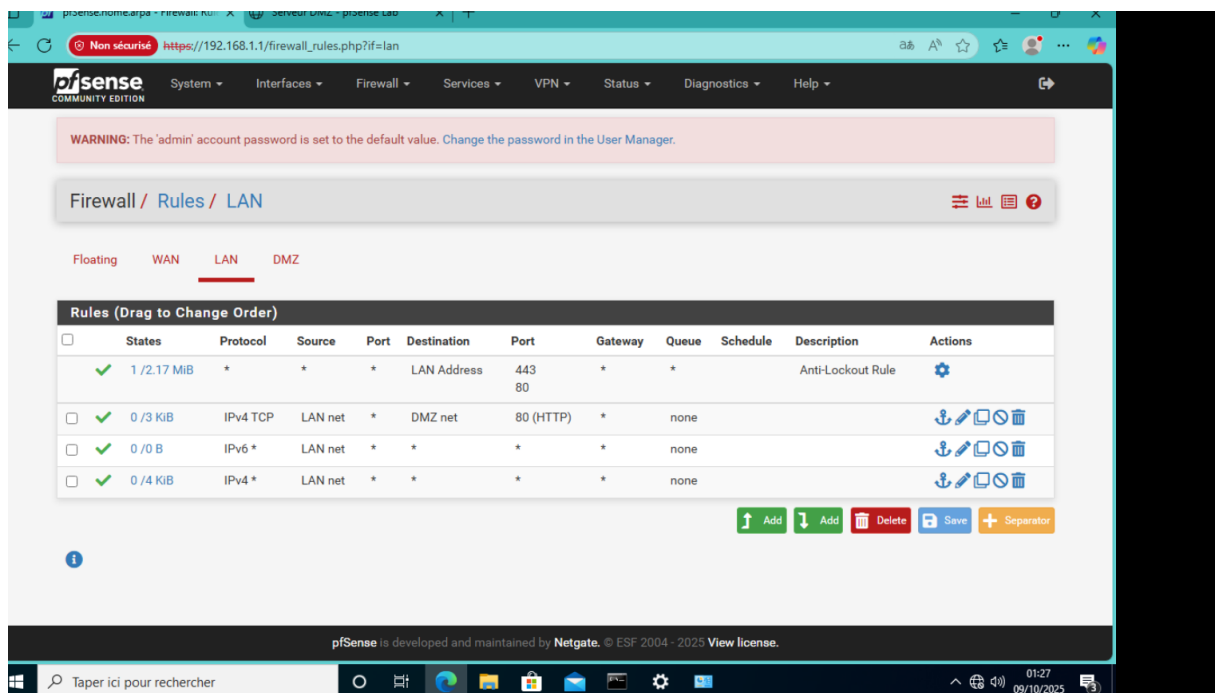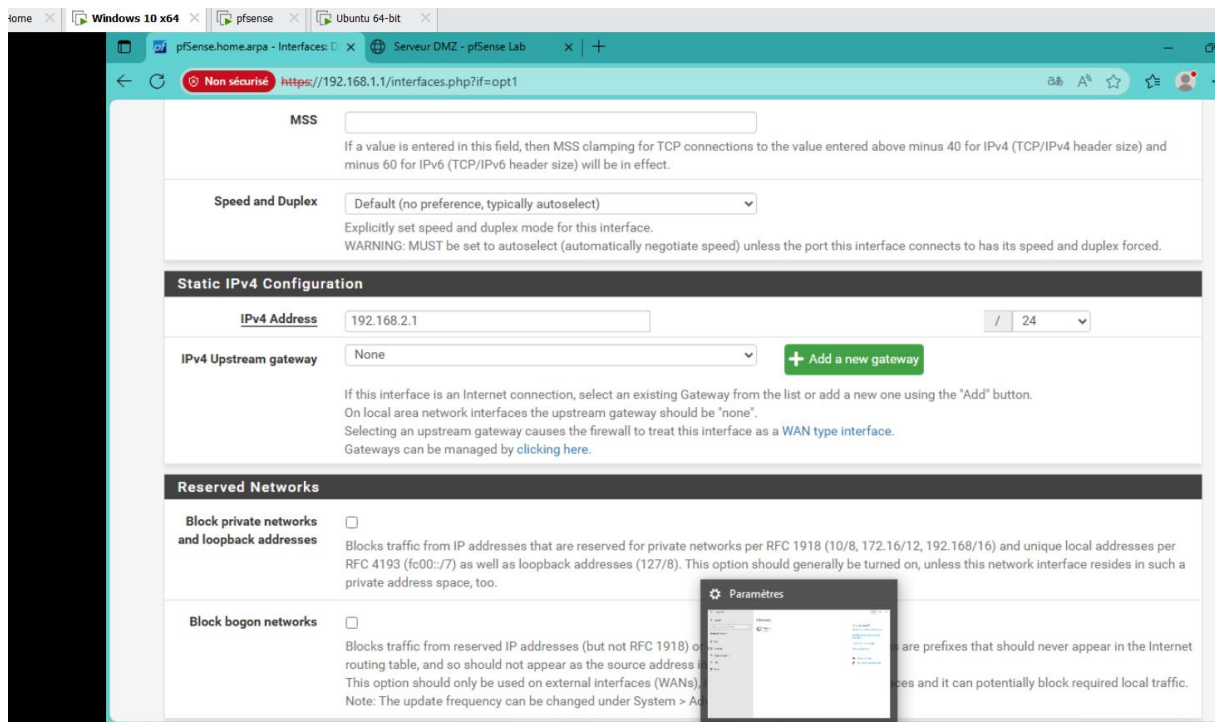

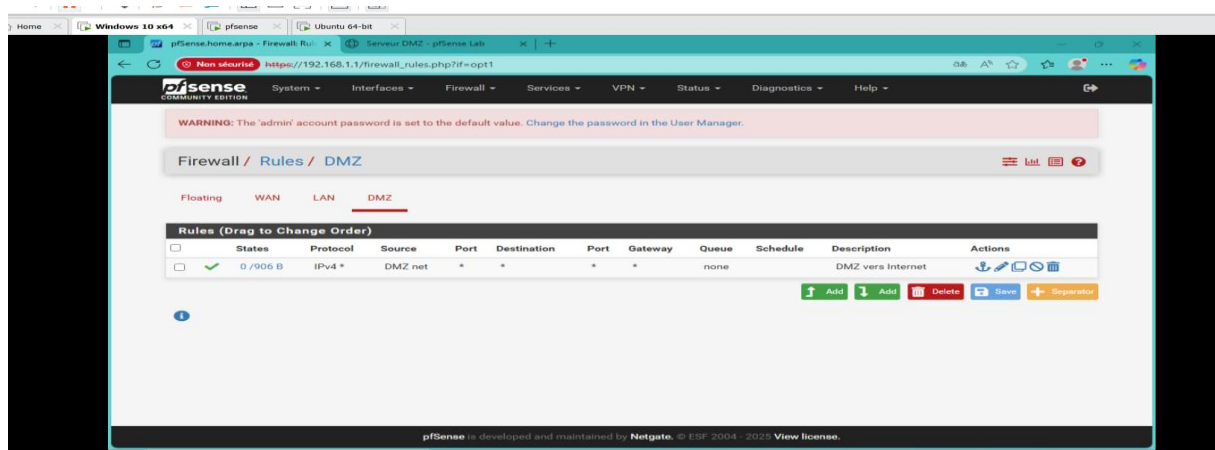


On a une erreur dans la configuration de la route par défaut, donc au début l'adresse <http://192.168.2.10> ne fonctionnait pas.

```
ubuntu@ubuntu-virtual-machine:~$ ip route
default via 192.168.2.1 dev ens33 proto static metric 20100
192.168.2.1 dev ens33 proto static scope link metric 20100
169.254.0.0/16 dev ens33 scope link metric 1000
192.168.2.0/24 dev ens33 proto kernel scope link src 192.168.2.10 metric 100
ubuntu@ubuntu-virtual-machine:~$ sudo route add default gw 192.168.2.1
sudo route add default gw 192.168.2.1 : commande introuvable
ubuntu@ubuntu-virtual-machine:~$ sudo ip route add default gateway 192.168.2.1
sudo ip : commande introuvable
ubuntu@ubuntu-virtual-machine:~$ sudo route del default gw 192.168.2.1
sudo route del default gw 192.168.2.1 : commande introuvable
ubuntu@ubuntu-virtual-machine:~$ sudo ip route del default via 192.168.2.1
[sudo] Mot de passe de ubuntu :
RTNETLINK answers: No such process
ubuntu@ubuntu-virtual-machine:~$ sudo ip route del default via 192.168.2.1
ubuntu@ubuntu-virtual-machine:~$ sudo ip route add default via 192.168.2.1
ubuntu@ubuntu-virtual-machine:~$ ip route show
default via 192.168.2.1 dev ens33
192.168.2.1 dev ens33 proto static scope link metric 20100
169.254.0.0/16 dev ens33 scope link metric 1000
192.168.2.0/24 dev ens33 proto kernel scope link src 192.168.2.10 metric 100
ubuntu@ubuntu-virtual-machine:~$ sudo ip route del 192.168.2.1/32
bash: sudo ip route del 192.168.2.1/32: Aucun fichier ou dossier de ce nom
ubuntu@ubuntu-virtual-machine:~$ sudo ip route del 192.168.2.1 dev ens33
ubuntu@ubuntu-virtual-machine:~$ ip route show
default via 192.168.2.1 dev ens33
169.254.0.0/16 dev ens33 scope link metric 1000
192.168.2.0/24 dev ens33 proto kernel scope link src 192.168.2.10 metric 100
ubuntu@ubuntu-virtual-machine:~$
```

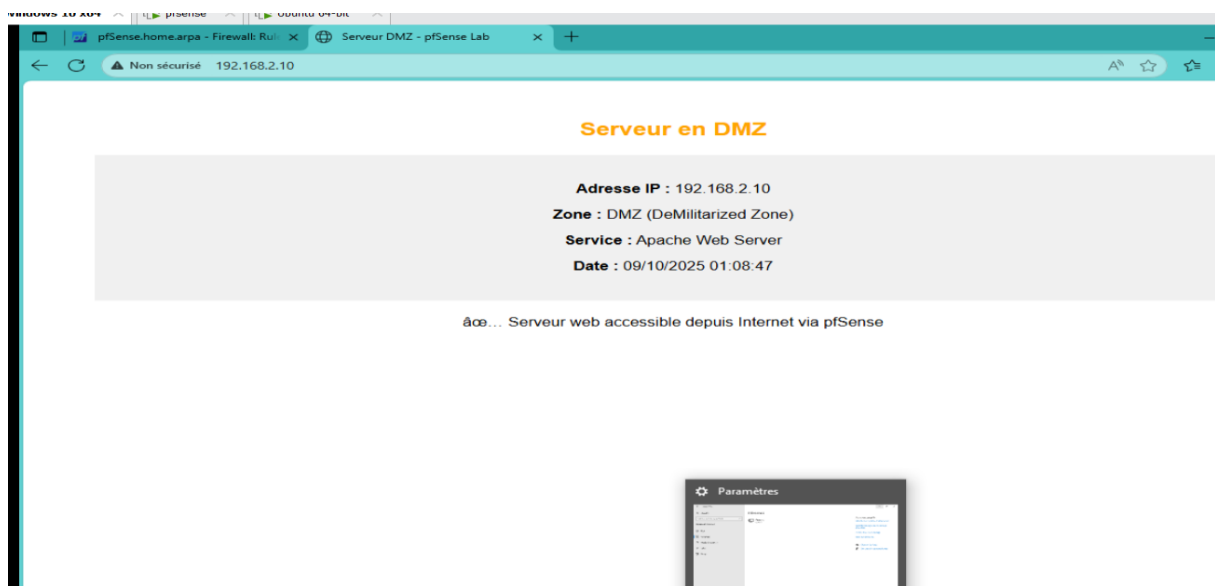


Exercice 6 : Port Forwarding pour DMZ



Configuration Port Forwarding

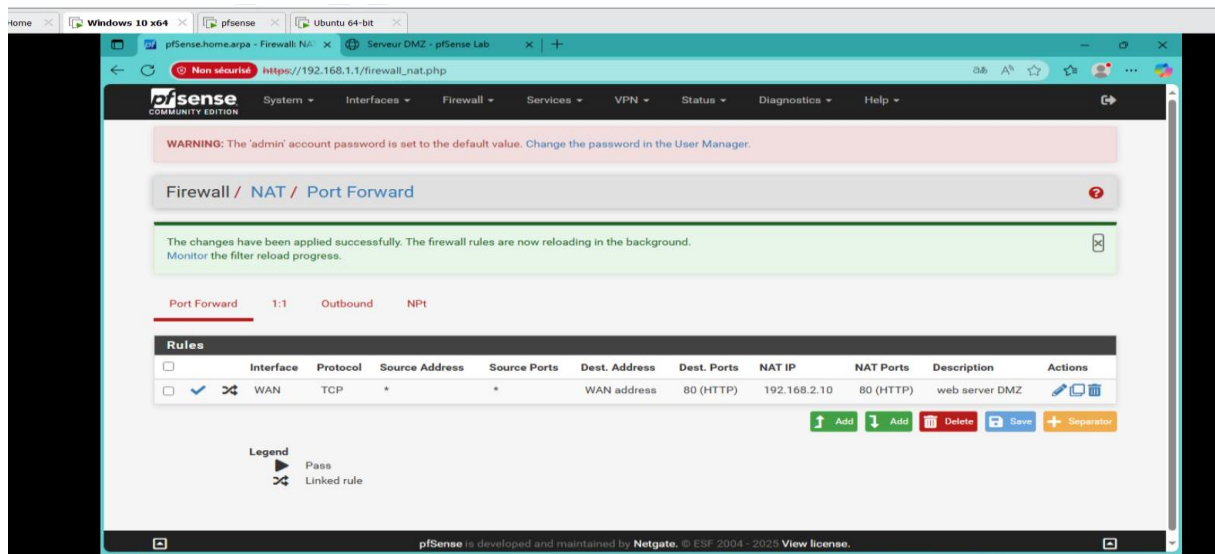

Vérification règle firewall

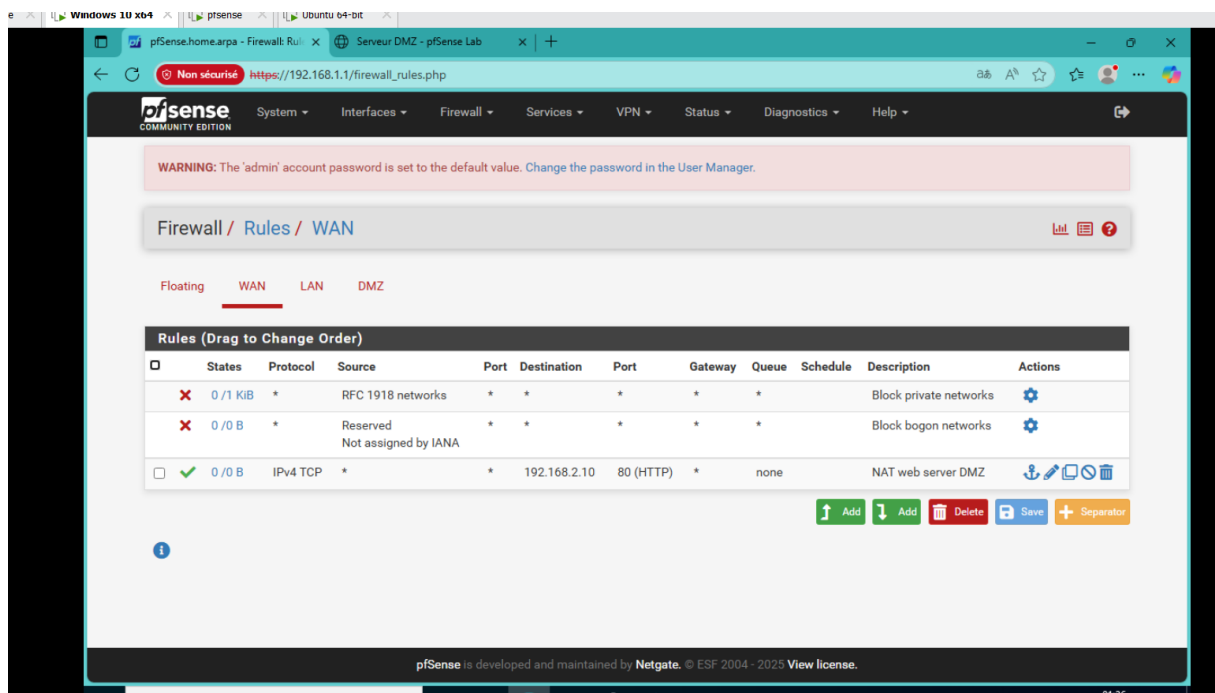


On va effectuer et vérifier est l'activation des deux options de NAT Reflection automatique pour vous assurer que le client Windows du LAN pourra accéder au serveur DMZ en utilisant l'IP publique (WAN) de pfSense:

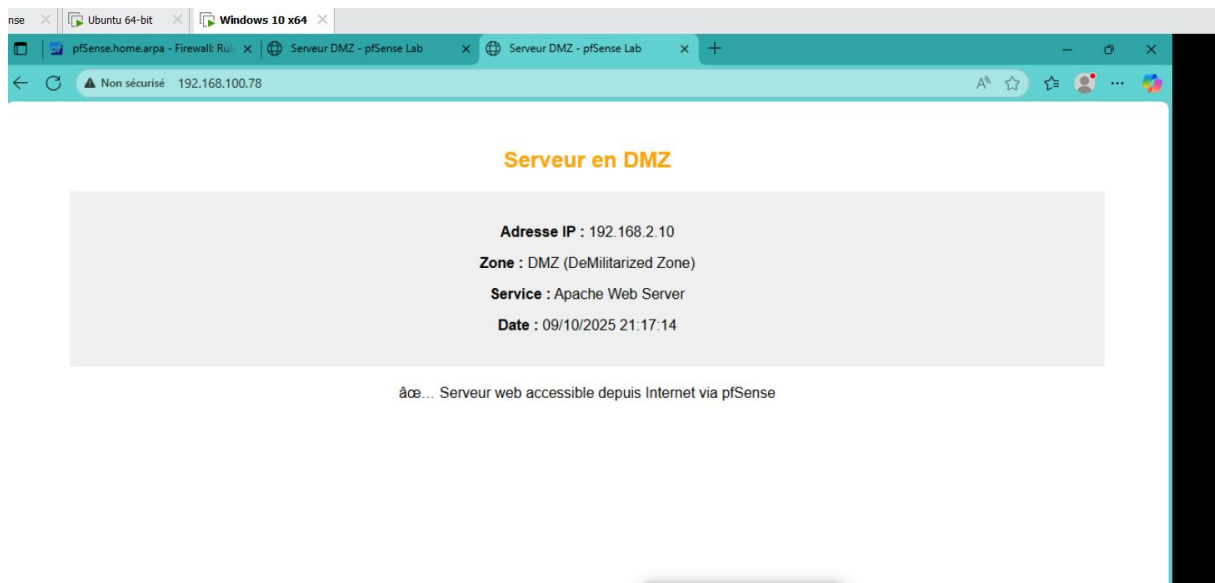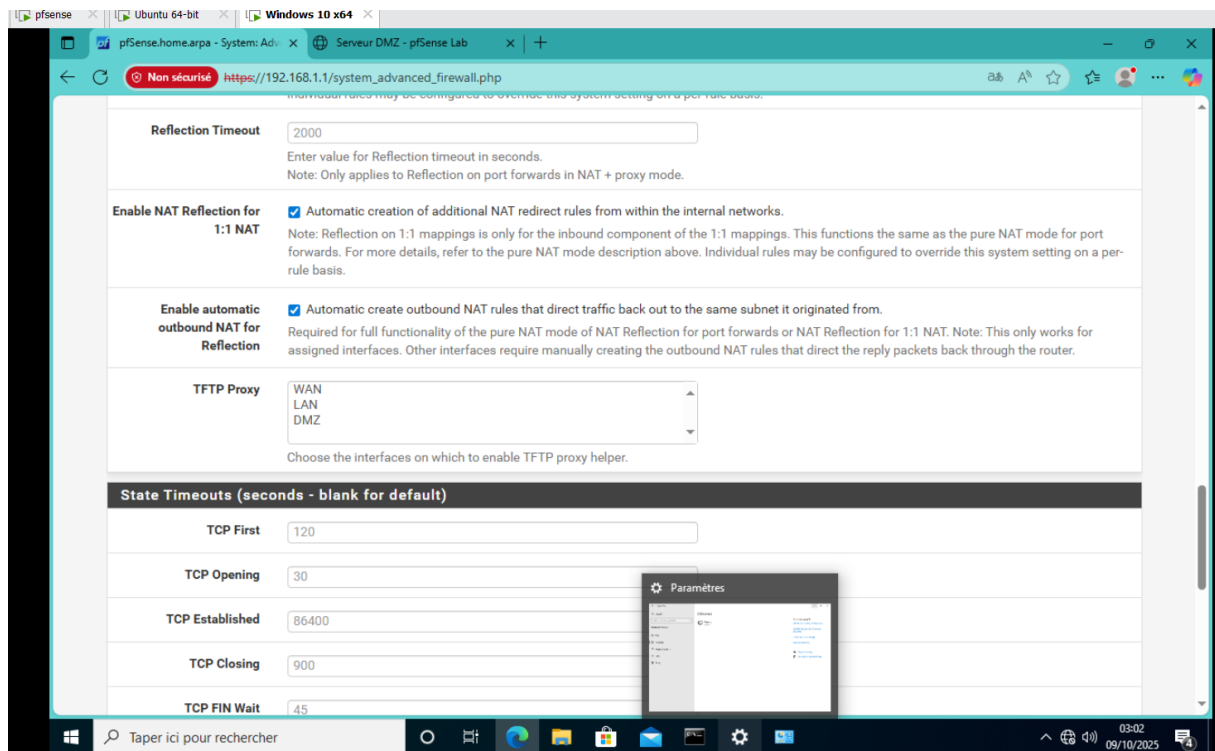

Exercice 7 : Sécurisation DMZ

Règle restrictive DMZ vers LAN

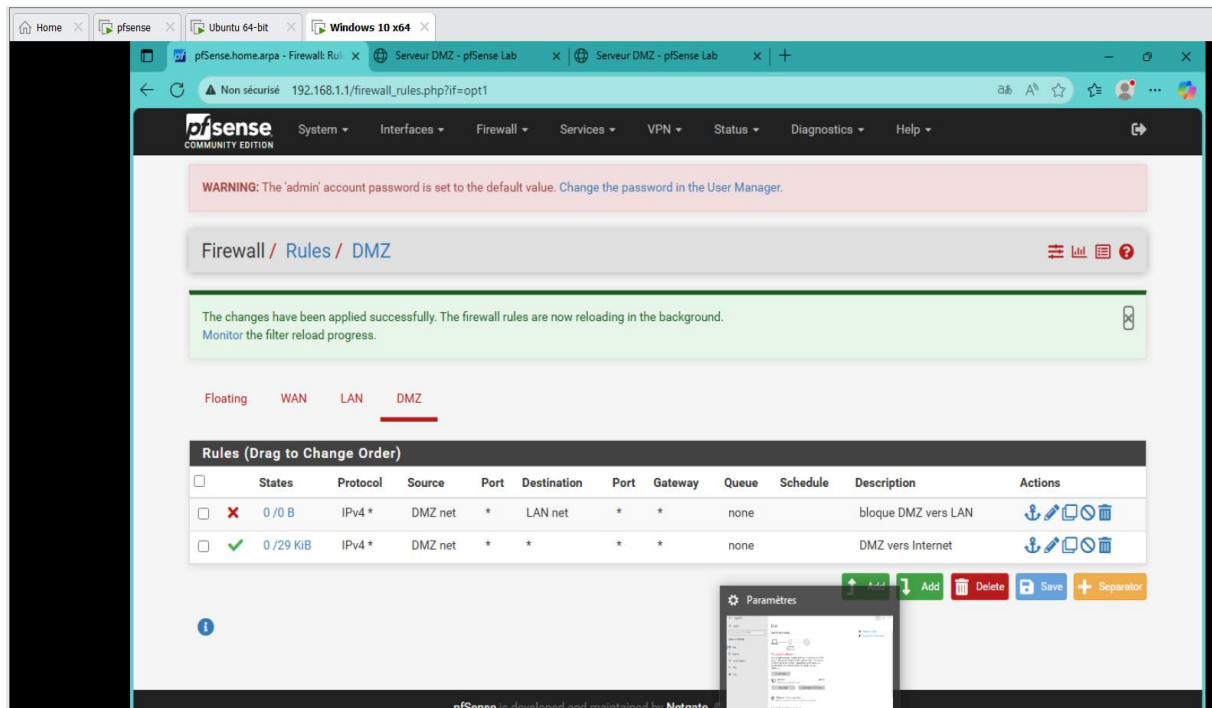

Test isolation DMZ

```
ubuntu@ubuntu-virtual-machine:~$ ping 192.168.1.1
PING 192.168.1.1 (192.168.1.1) 56(84) bytes of data.
^C
--- 192.168.1.1 ping statistics ---
63 packets transmitted, 0 received, 100% packet loss, time 63500ms

ubuntu@ubuntu-virtual-machine:~$ ping 192.168.1.100
PING 192.168.1.100 (192.168.1.100) 56(84) bytes of data.
^C
^C
--- 192.168.1.100 ping statistics ---
253 packets transmitted, 0 received, 100% packet loss, time 258039ms

ubuntu@ubuntu-virtual-machine:~$
```

L'interface ens33 utilisait un serveur DNS incorrect : 19.168.2.1. Sans un DNS correct, tu peux envoyer des paquets vers des adresses IP, mais tu ne peux pas accéder aux sites avec leur nom (comme google.com ou github.com).

```


ubuntu@ubuntu-virtual-machine:~$ ping 8.8.8.8
PING 8.8.8.8 (8.8.8.8) 56(84) bytes of data.
64 bytes from 8.8.8.8: icmp_seq=1 ttl=113 time=50.5 ms
64 bytes from 8.8.8.8: icmp_seq=2 ttl=113 time=41.2 ms
^C
--- 8.8.8.8 ping statistics ---
2 packets transmitted, 2 received, 0% packet loss, time 1010ms
rtt min/avg/max/mdev = 41.188/45.828/50.469/4.640 ms
ubuntu@ubuntu-virtual-machine:~$ curl -I http://google.com
curl: (6) Could not resolve host: google.com
ubuntu@ubuntu-virtual-machine:~$ systemd-resolve --status
systemd-resolve : commande introuvable
ubuntu@ubuntu-virtual-machine:~$ resolvectl status
Global
    Protocols: -LLMNR -mDNS -DNSOverTLS DNSSEC=no/unsupported
    resolv.conf mode: stub

Link 2 (ens33)
    Current Scopes: DNS
        Protocols: +DefaultRoute +LLMNR -mDNS -DNSOverTLS DNSSEC=no/unsupported
    Current DNS Server: 19.168.2.1
    DNS Servers: 19.168.2.1
ubuntu@ubuntu-virtual-machine:~$ sudo resolvectl dns ens33 8.8.8.8 1.1.1.1
[sudo] Mot de passe de ubuntu :
ubuntu@ubuntu-virtual-machine:~$ curl -I http://google.com
HTTP/1.1 301 Moved Permanently
Location: http://www.google.com/
Content-Type: text/html; charset=UTF-8
Content-Security-Policy-Report-Only: object-src 'none';base-uri 'self';script-src 'nonce-TQiA0F6G0L_wRroRSihLjg' 'strict-dynamic' 'report-sample' 'unsafe-eval' 'unsafe-inline' https: http;report-uri https://csp.withgoogle.com/csp/gws/other-hp
Date: Thu, 09 Oct 2025 19:38:59 GMT
Expires: Sat, 08 Nov 2025 19:38:59 GMT
Cache-Control: public, max-age=2592000
Server: gws
Content-Length: 219
X-XSS-Protection: 0
X-Frame-Options: SAMEORIGIN

ubuntu@ubuntu-virtual-machine:~$



```

Afficher les logs sécurités

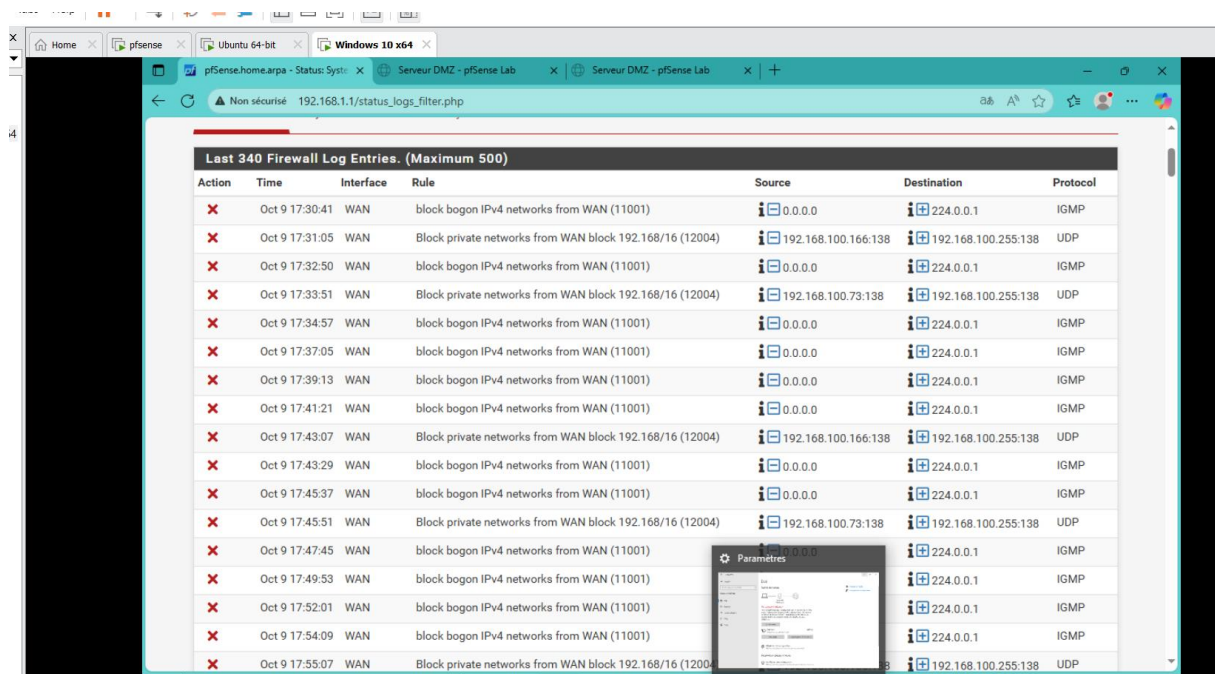


Action	Time	Interface	Rule	Source	Destination	Protocol
✗	Oct 9 17:30:41	WAN	block bogon IPv4 networks from WAN (11001)	0.0.0.0	224.0.0.1	IGMP
✗	Oct 9 17:31:05	WAN	Block private networks from WAN block 192.168/16 (12004)	192.168.100.166:138	192.168.100.255:138	UDP
✗	Oct 9 17:32:50	WAN	block bogon IPv4 networks from WAN (11001)	0.0.0.0	224.0.0.1	IGMP
✗	Oct 9 17:33:51	WAN	Block private networks from WAN block 192.168/16 (12004)	192.168.100.73:138	192.168.100.255:138	UDP
✗	Oct 9 17:34:57	WAN	block bogon IPv4 networks from WAN (11001)	0.0.0.0	224.0.0.1	IGMP
✗	Oct 9 17:37:05	WAN	block bogon IPv4 networks from WAN (11001)	0.0.0.0	224.0.0.1	IGMP
✗	Oct 9 17:39:13	WAN	block bogon IPv4 networks from WAN (11001)	0.0.0.0	224.0.0.1	IGMP
✗	Oct 9 17:41:21	WAN	block bogon IPv4 networks from WAN (11001)	0.0.0.0	224.0.0.1	IGMP
✗	Oct 9 17:43:07	WAN	Block private networks from WAN block 192.168/16 (12004)	192.168.100.166:138	192.168.100.255:138	UDP
✗	Oct 9 17:43:29	WAN	block bogon IPv4 networks from WAN (11001)	0.0.0.0	224.0.0.1	IGMP
✗	Oct 9 17:45:37	WAN	block bogon IPv4 networks from WAN (11001)	0.0.0.0	224.0.0.1	IGMP
✗	Oct 9 17:45:51	WAN	Block private networks from WAN block 192.168/16 (12004)	192.168.100.73:138	192.168.100.255:138	UDP
✗	Oct 9 17:47:45	WAN	block bogon IPv4 networks from WAN (11001)	0.0.0.0	224.0.0.1	IGMP
✗	Oct 9 17:49:53	WAN	block bogon IPv4 networks from WAN (11001)	0.0.0.0	224.0.0.1	IGMP
✗	Oct 9 17:52:01	WAN	block bogon IPv4 networks from WAN (11001)	0.0.0.0	224.0.0.1	IGMP
✗	Oct 9 17:54:09	WAN	block bogon IPv4 networks from WAN (11001)	0.0.0.0	224.0.0.1	IGMP
✗	Oct 9 17:55:07	WAN	Block private networks from WAN block 192.168/16 (12004)	192.168.100.255:138	192.168.100.255:138	UDP

Règle SSH administrative et test d'isolation de la DMZ

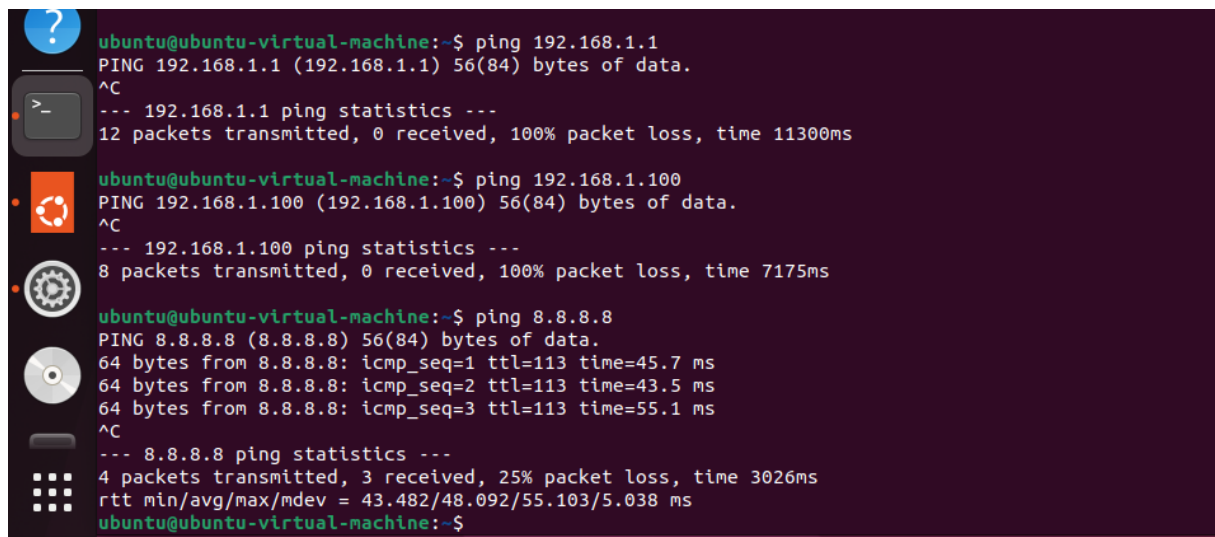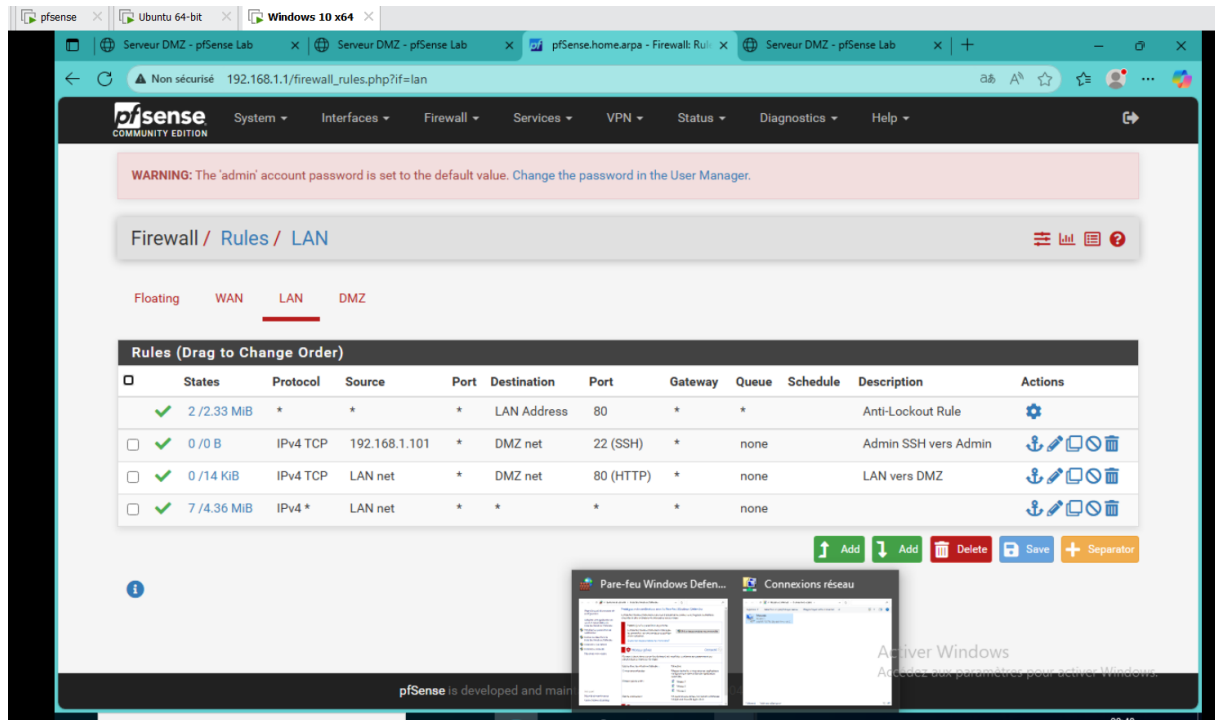

Exercice 8 : Monitoring Complet


Monitorer l'activité du réseau multi-zones.

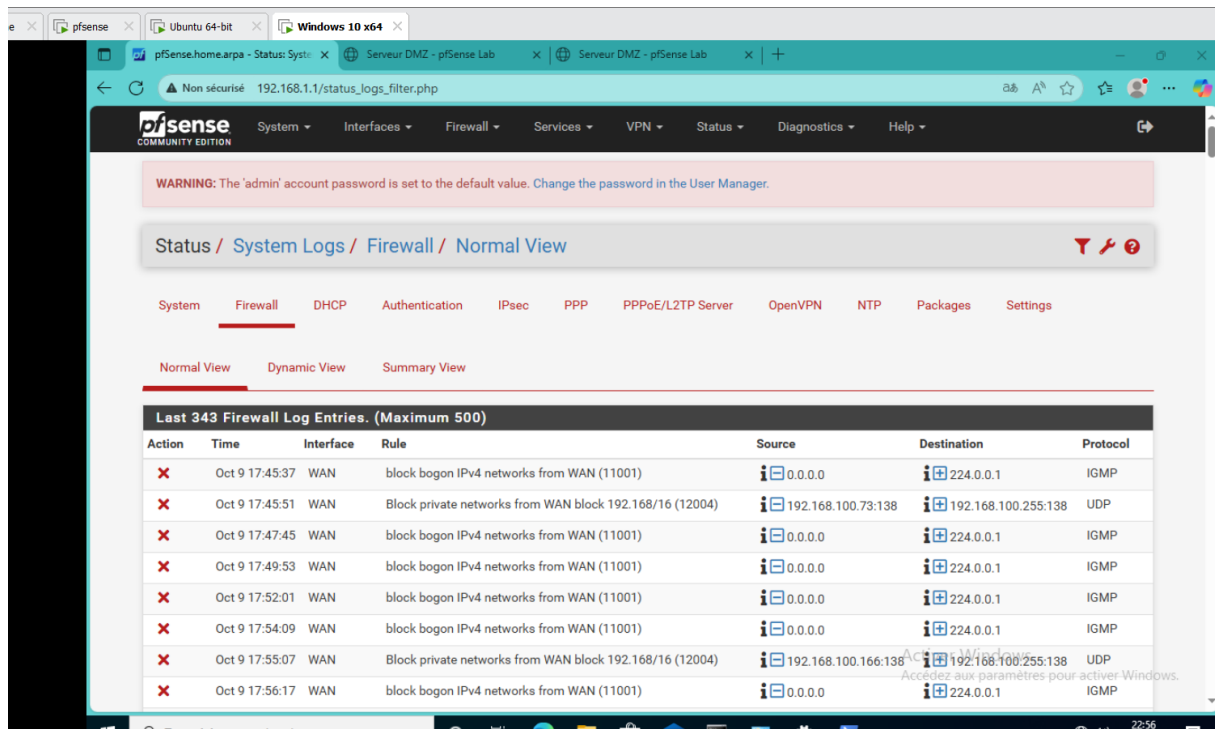


The screenshot shows the pfSense web interface at the 'Status / System Logs / Firewall / Normal View' page. A warning message at the top states: 'WARNING: The 'admin' account password is set to the default value. Change the password in the User Manager.' Below the navigation tabs, the 'Firewall' tab is selected, and the 'Normal View' sub-tab is active. The main content area displays 'Last 343 Firewall Log Entries. (Maximum 500)'. The log table has columns for Action, Time, Interface, Rule, Source, Destination, and Protocol. The visible entries show blocked traffic from WAN to LAN (224.0.0.1) via various rules like 'block bogon IPv4 networks from WAN (11001)' and 'Block private networks from WAN block 192.168/16 (12004)'. The protocols listed are IGMP and UDP.

Action	Time	Interface	Rule	Source	Destination	Protocol
✗	Oct 9 17:45:37	WAN	block bogon IPv4 networks from WAN (11001)	0.0.0.0	224.0.0.1	IGMP
✗	Oct 9 17:45:51	WAN	Block private networks from WAN block 192.168/16 (12004)	192.168.100.73:138	192.168.100.255:138	UDP
✗	Oct 9 17:47:45	WAN	block bogon IPv4 networks from WAN (11001)	0.0.0.0	224.0.0.1	IGMP
✗	Oct 9 17:49:53	WAN	block bogon IPv4 networks from WAN (11001)	0.0.0.0	224.0.0.1	IGMP
✗	Oct 9 17:52:01	WAN	block bogon IPv4 networks from WAN (11001)	0.0.0.0	224.0.0.1	IGMP
✗	Oct 9 17:54:09	WAN	block bogon IPv4 networks from WAN (11001)	0.0.0.0	224.0.0.1	IGMP
✗	Oct 9 17:55:07	WAN	Block private networks from WAN block 192.168/16 (12004)	192.168.100.166:138	192.168.100.255:138	UDP
✗	Oct 9 17:56:17	WAN	block bogon IPv4 networks from WAN (11001)	0.0.0.0	224.0.0.1	IGMP

Test des trafics en temps réel

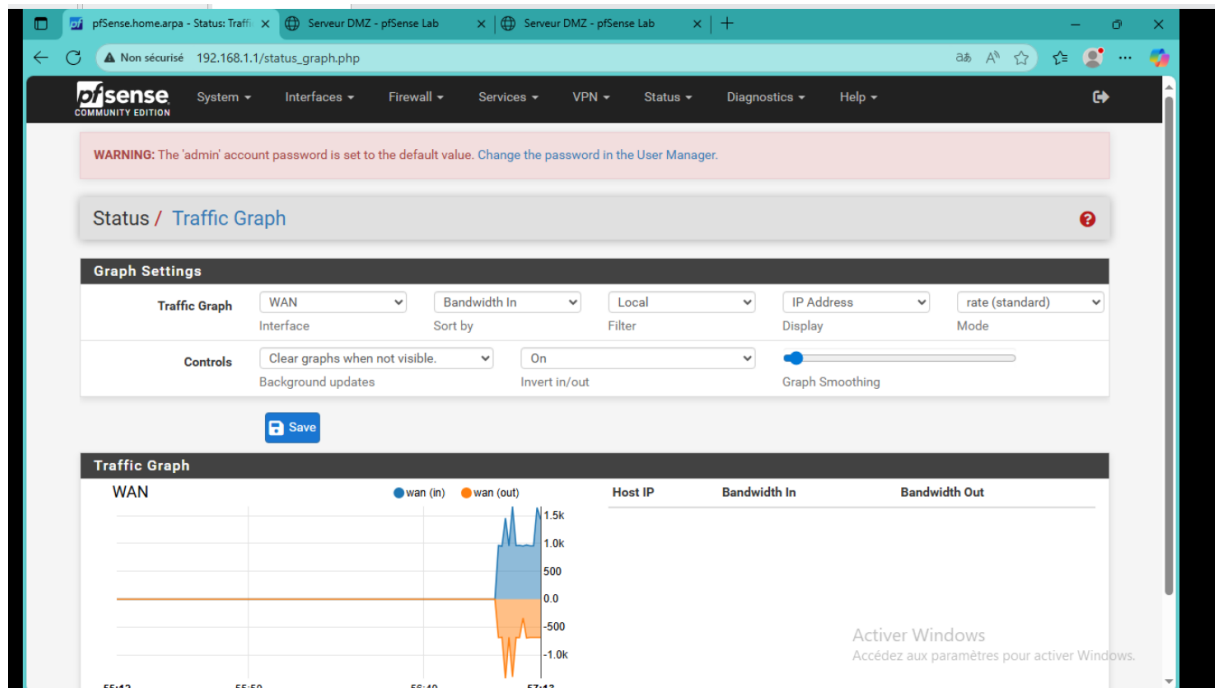

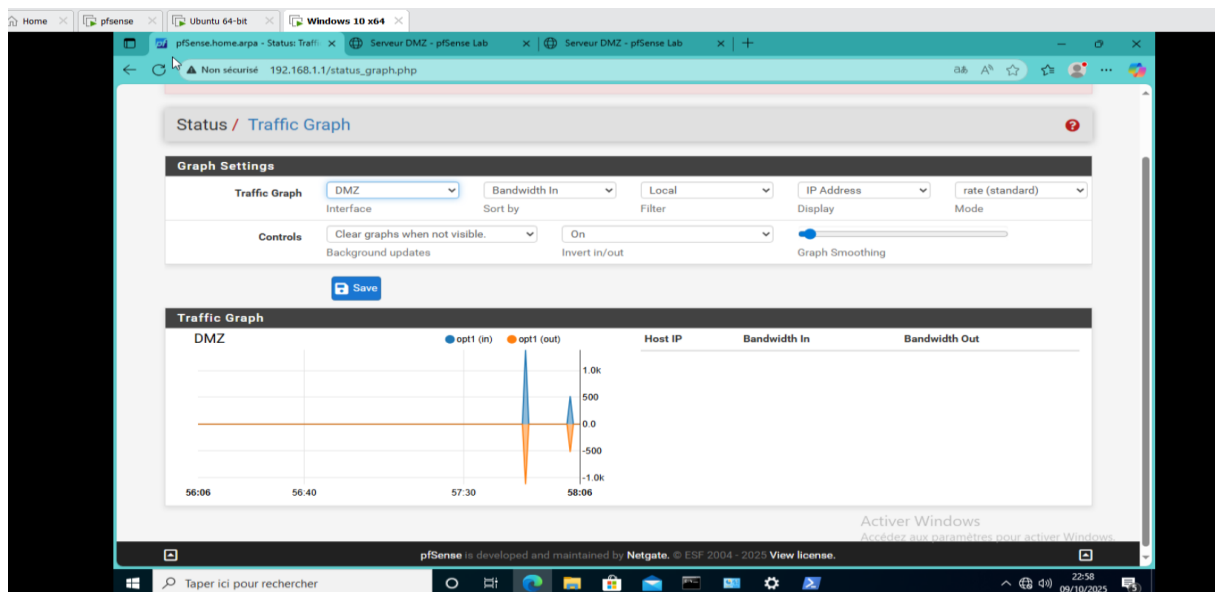

Home | pfSense | Ubuntu 64-bit | Windows 10 x64

pfSense.home.arpa - Status: System | Serveur DMZ - pfSense Lab | Serveur DMZ - pfSense Lab

Non sécurisé 192.168.1.1/status_logs_filter.php

System | **Firewall** | DHCP | Authentication | IPsec | PPP | PPPoE/L2TP Server | OpenVPN | NTP | Packages | Settings

Normal View | Dynamic View | Summary View

Last 343 Firewall Log Entries. (Maximum 500)

Action	Time	Interface	Rule	Source	Destination	Protocol
×	Oct 9 17:47:45	WAN	block bogon IPv4 networks from WAN (11001)	0.0.0.0	224.0.0.1	IGMP
×	Oct 9 17:49:53	WAN	block bogon IPv4 networks from WAN (11001)	0.0.0.0	224.0.0.1	IGMP
×	Oct 9 17:52:01	WAN	block bogon IPv4 networks from WAN (11001)	0.0.0.0	224.0.0.1	IGMP
×	Oct 9 17:54:09	WAN	block bogon IPv4 networks from WAN (11001)	0.0.0.0	224.0.0.1	IGMP
×	Oct 9 17:55:07	WAN	Block private networks from WAN block 192.168/16 (12004)	192.168.100.166:138	192.168.100.255:138	UDP
×	Oct 9 17:56:17	WAN	block bogon IPv4 networks from WAN (11001)	0.0.0.0	224.0.0.1	IGMP
×	Oct 9 17:57:52	WAN	Block private networks from WAN block 192.168/16 (12004)	192.168.100.73:138	192.168.100.255:138	UDP
×	Oct 9 17:58:26	WAN	block bogon IPv4 networks from WAN (11001)	0.0.0.0	224.0.0.1	IGMP
×	Oct 9 18:00:33	WAN	block bogon IPv4 networks from WAN (11001)	0.0.0.0	224.0.0.1	IGMP
×	Oct 9 18:02:41	WAN	block bogon IPv4 networks from WAN (11001)	0.0.0.0	224.0.0.1	IGMP
×	Oct 9 18:04:49	WAN	block bogon IPv4 networks from WAN (11001)	0.0.0.0	224.0.0.1	IGMP
×	Oct 9 18:06:24	WAN	block bogon IPv4 networks from WAN (11001)	0.0.0.0	224.0.0.1	IGMP
×	Oct 9 18:07:12	WAN	Block private networks from WAN block 192.168/16 (12004)	192.168.100.73:138	192.168.100.255:138	UDP
×	Oct 9 18:08:33	WAN	block bogon IPv4 networks from WAN (11001)	0.0.0.0	224.0.0.1	IGMP

Activater Windows

Accédez aux paramètres pour activer Windows.

Taper ici pour rechercher

Analyse des clients

Home | pfSense | Ubuntu 64-bit | Windows 10 x64

pfSense.home.arpa - Diagnostic: | Serveur DMZ - pfSense Lab | Serveur DMZ - pfSense Lab

Non sécurisé 192.168.1.1/diag_states_summary.php

By Source IP

IP	# States	Protocol	# States	Source Ports	Dest. Ports
192.168.1.101	5	tcp	4		1
		udp	1		1
192.168.2.10	2	tcp	2		1
192.168.100.78	3	icmp	1		1
		udp	2		1

By Destination IP

IP	# States	Protocol	# States	Source Ports	Dest. Ports
34.107.243.93	2	tcp	2		1
192.168.1.1	4	tcp	4		1
192.168.1.255	1	udp	1		1
192.168.100.1	1	icmp	1		1
196.192.32.7	1	udp	1		1
197.17.32.249	1	udp	1		1

Total per IP


IP	# States	Protocol	# States	Source Ports	Dest. Ports
34.107.243.93	2	tcp	2		1

Activater Windows

Accédez aux paramètres pour activer Windows.

Taper ici pour rechercher

Table DHCP :

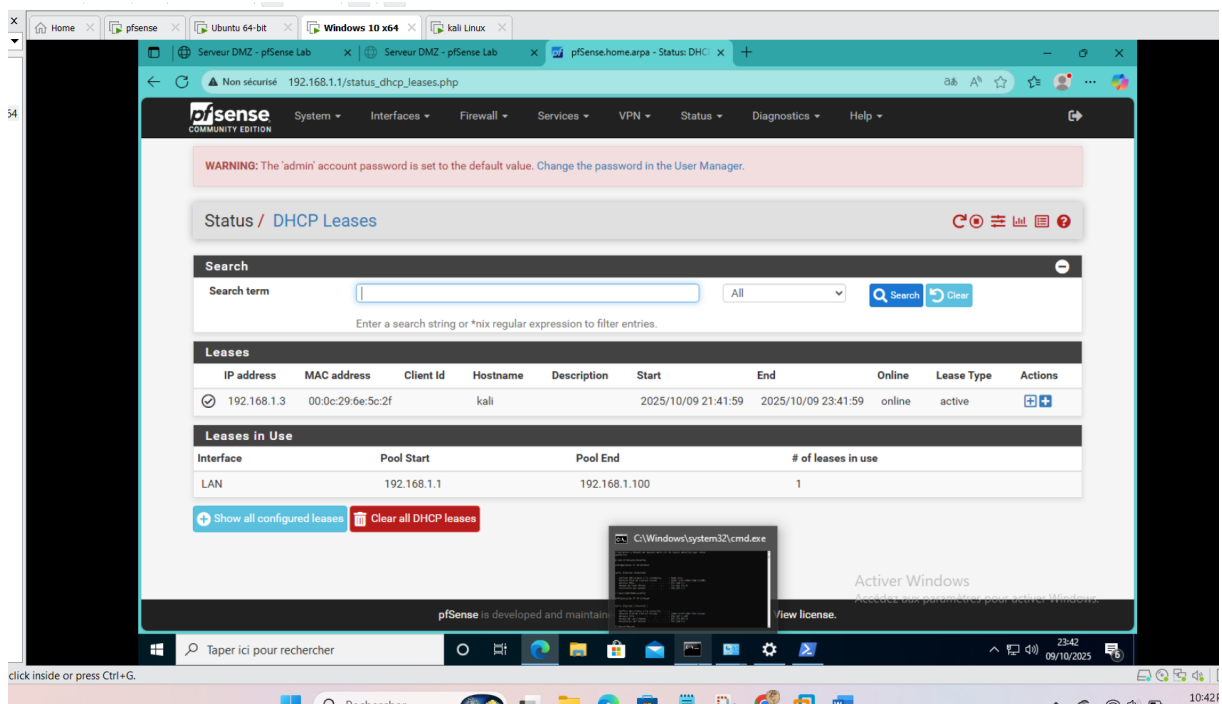

The screenshot shows the pfSense web interface at 192.168.1.1/status_dhcp_leases.php. A warning message at the top states: "WARNING: The 'admin' account password is set to the default value. Change the password in the User Manager." The page title is "Status / DHCP Leases". Below the title is a search bar with the text "Search term" and a dropdown menu set to "All". A table titled "Leases" displays the following data:


IP address	MAC address	Client id	Hostname	Description	Start	End	Online	Lease Type	Actions
192.168.1.3	00:0c:29:6e:5c:2f		kali		2025/10/09 21:41:59	2025/10/09 23:41:59	online	active	[+]

Below the "Leases" table is a section titled "Leases in Use" with a table showing:

Interface	Pool Start	Pool End	# of leases in use
LAN	192.168.1.1	192.168.1.100	1

At the bottom of the "Leases in Use" section are two buttons: "Show all configured leases" and "Clear all DHCP leases".




Table ARP:

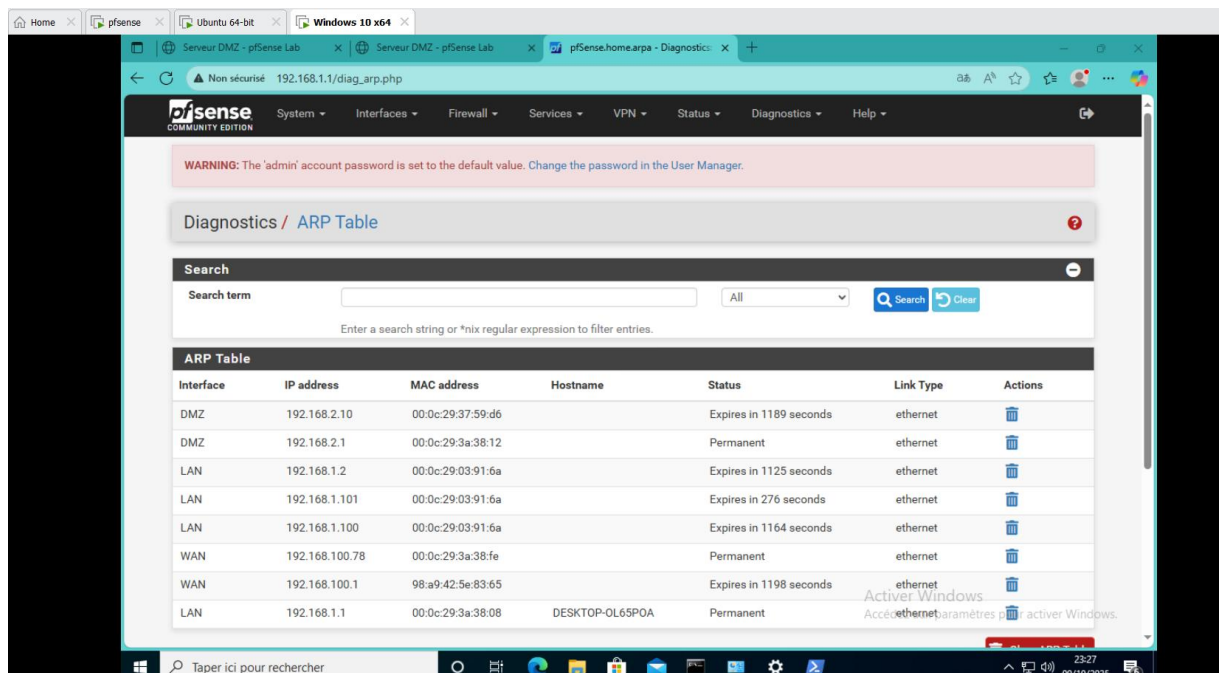


The screenshot shows the pfSense web interface at 192.168.1.1/diag_arp.php. A warning message at the top states: "WARNING: The 'admin' account password is set to the default value. Change the password in the User Manager." The page title is "Diagnostics / ARP Table". Below the title is a search bar with the text "Search term" and a dropdown menu set to "All". A table titled "ARP Table" displays the following data:


Interface	IP address	MAC address	Hostname	Status	Link Type	Actions
DMZ	192.168.2.10	00:0c:29:37:59:d6		Expires in 1189 seconds	ethernet	[trash]
DMZ	192.168.2.1	00:0c:29:3a:38:12		Permanent	ethernet	[trash]
LAN	192.168.1.2	00:0c:29:03:91:6a		Expires in 1125 seconds	ethernet	[trash]
LAN	192.168.1.101	00:0c:29:03:91:6a		Expires in 276 seconds	ethernet	[trash]
LAN	192.168.1.100	00:0c:29:03:91:6a		Expires in 1164 seconds	ethernet	[trash]
WAN	192.168.100.78	00:0c:29:3a:38:fe		Permanent	ethernet	[trash]
WAN	192.168.100.1	98:a9:42:5e:83:65		Expires in 1198 seconds	ethernet	[trash]
LAN	192.168.1.1	00:0c:29:3a:38:08	DESKTOP-OL65POA	Permanent	ethernet	[trash]

9.

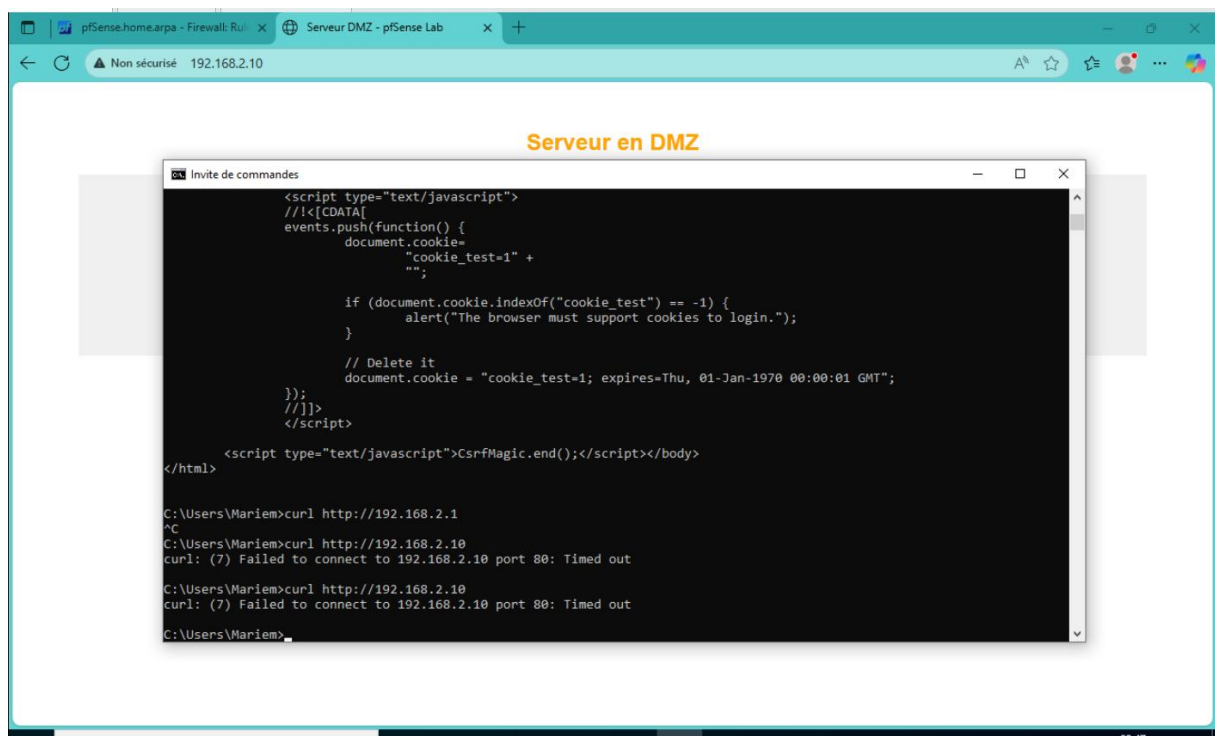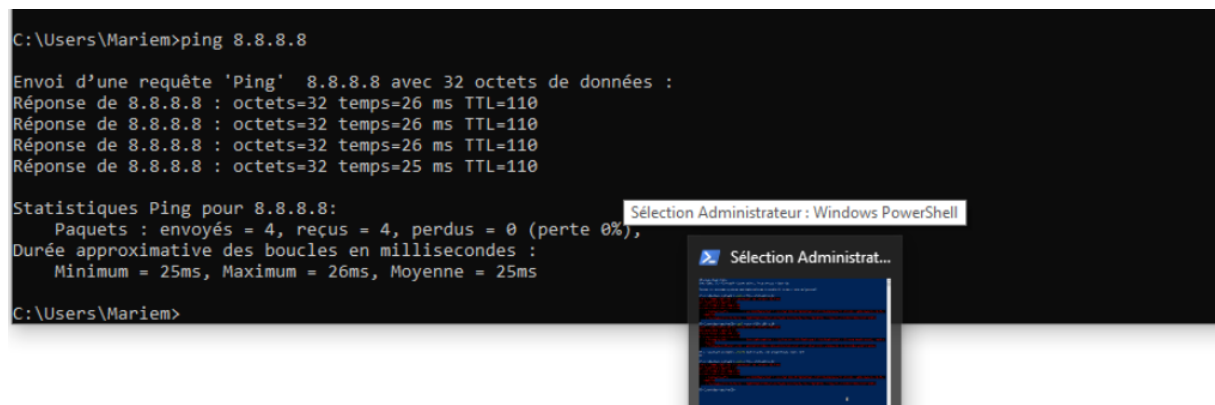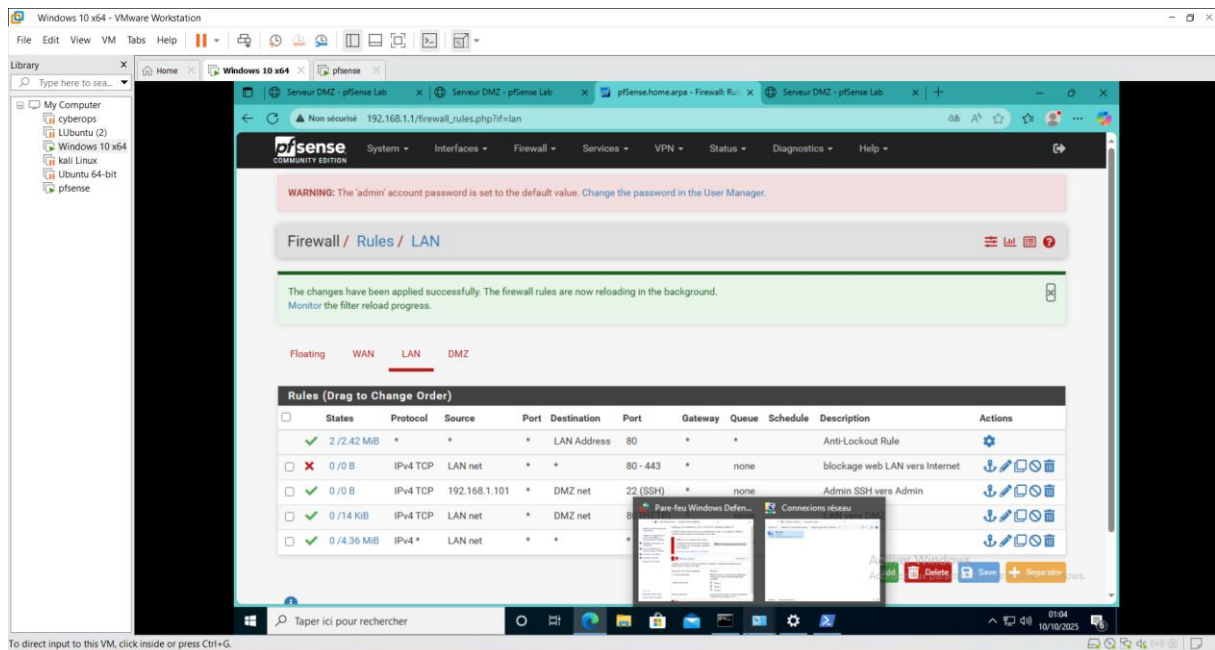


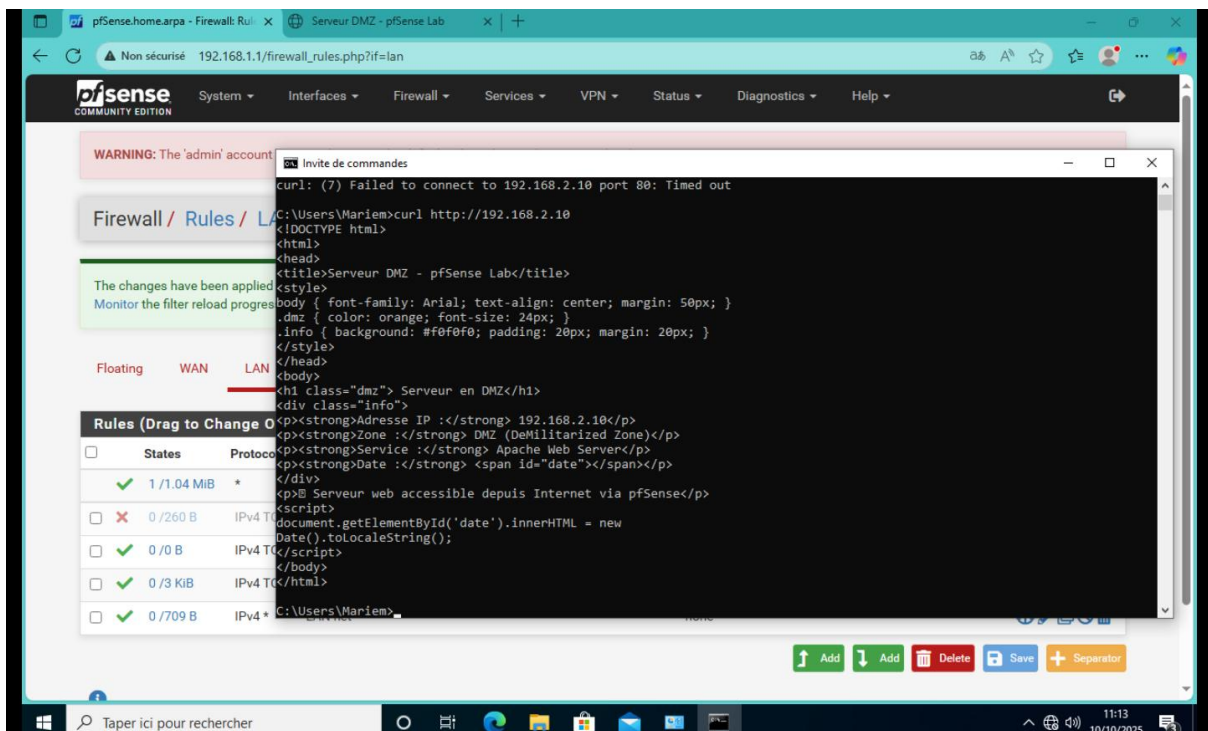
[illegible]

Curl <http://192.168.2.10> marche quand desactive le regle de blockage http vers https

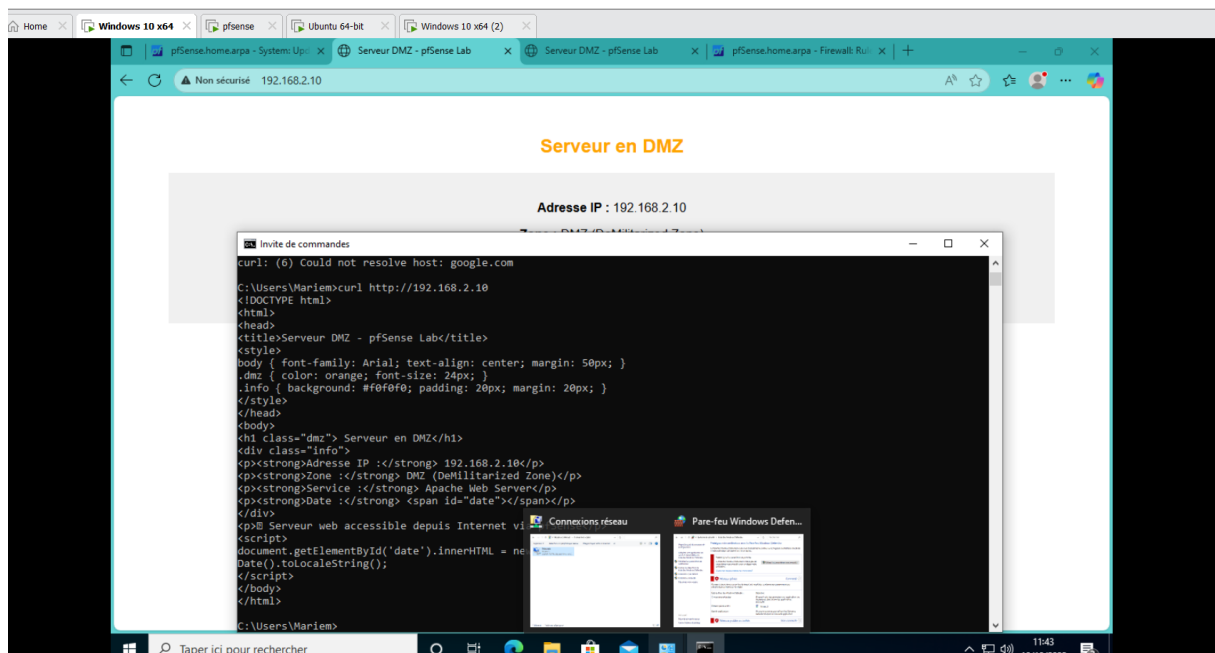

Mamchet il curl <http://192.168.2.10> ille me bedelt rule bich i3adi li dmz

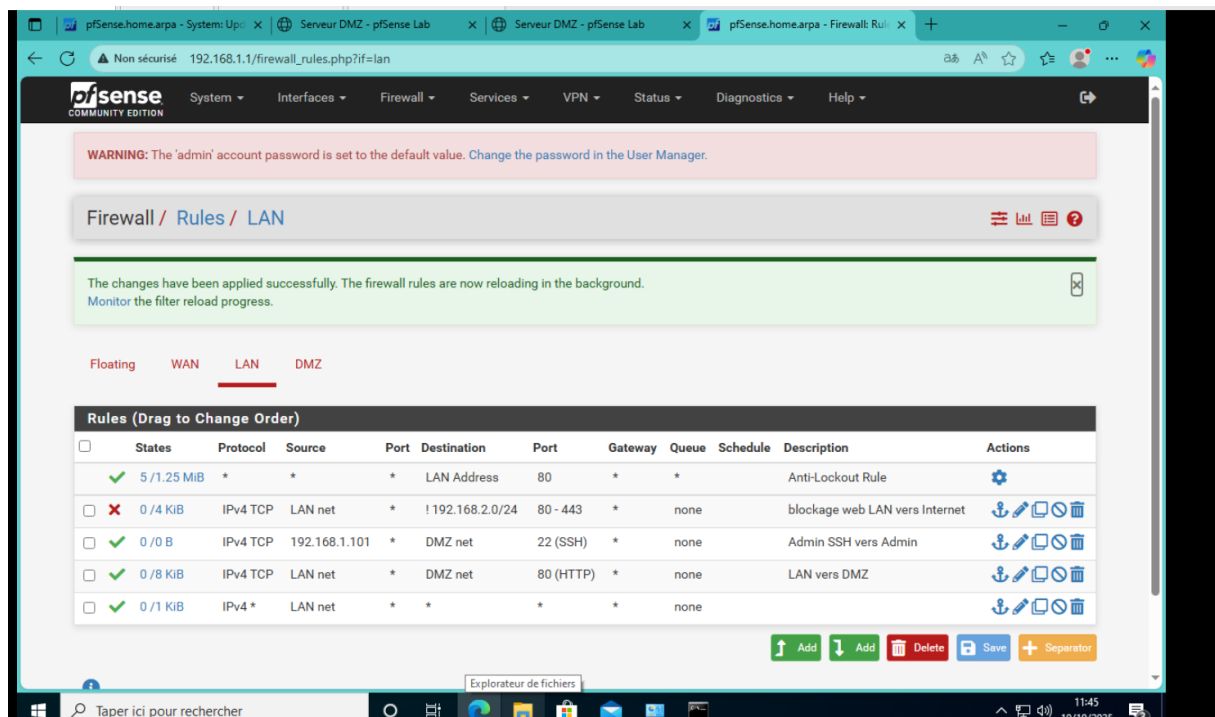


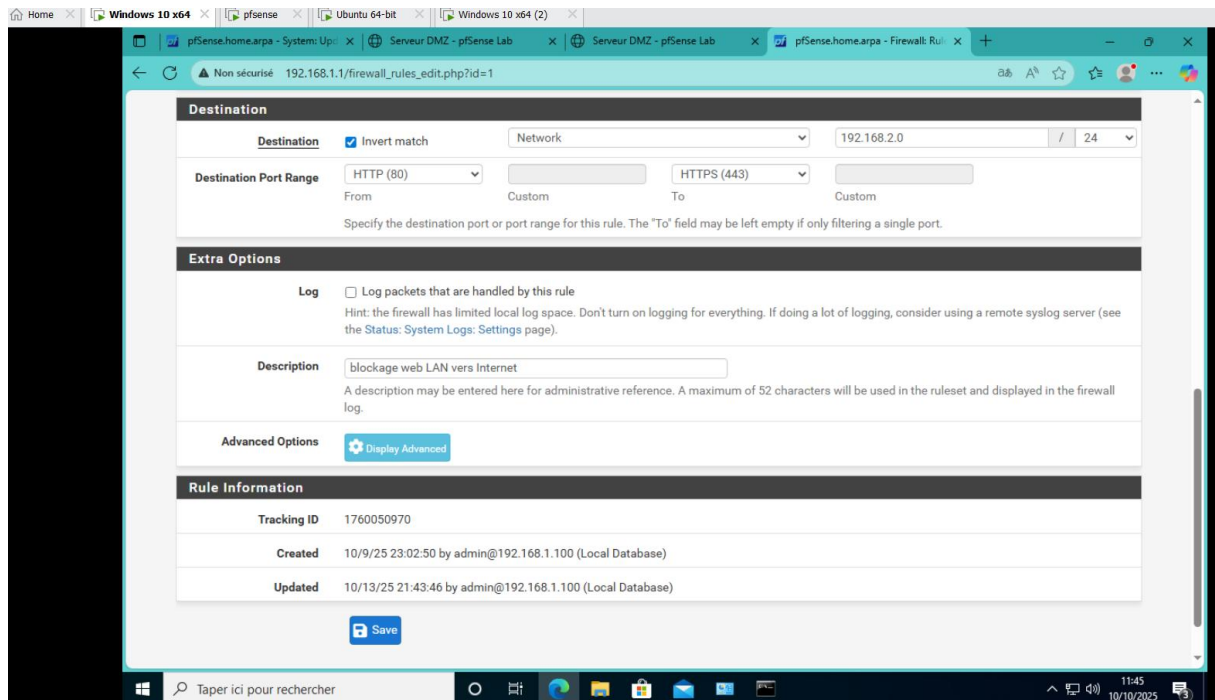


rafraîchir les certificat




Update pfSense puis installer snort

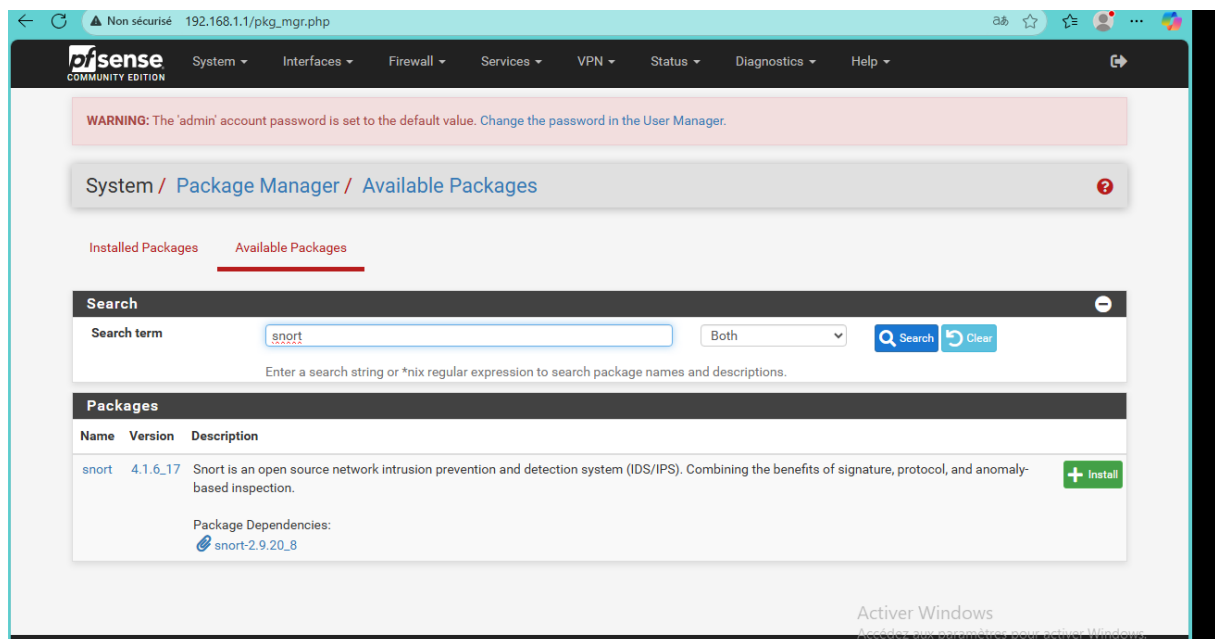

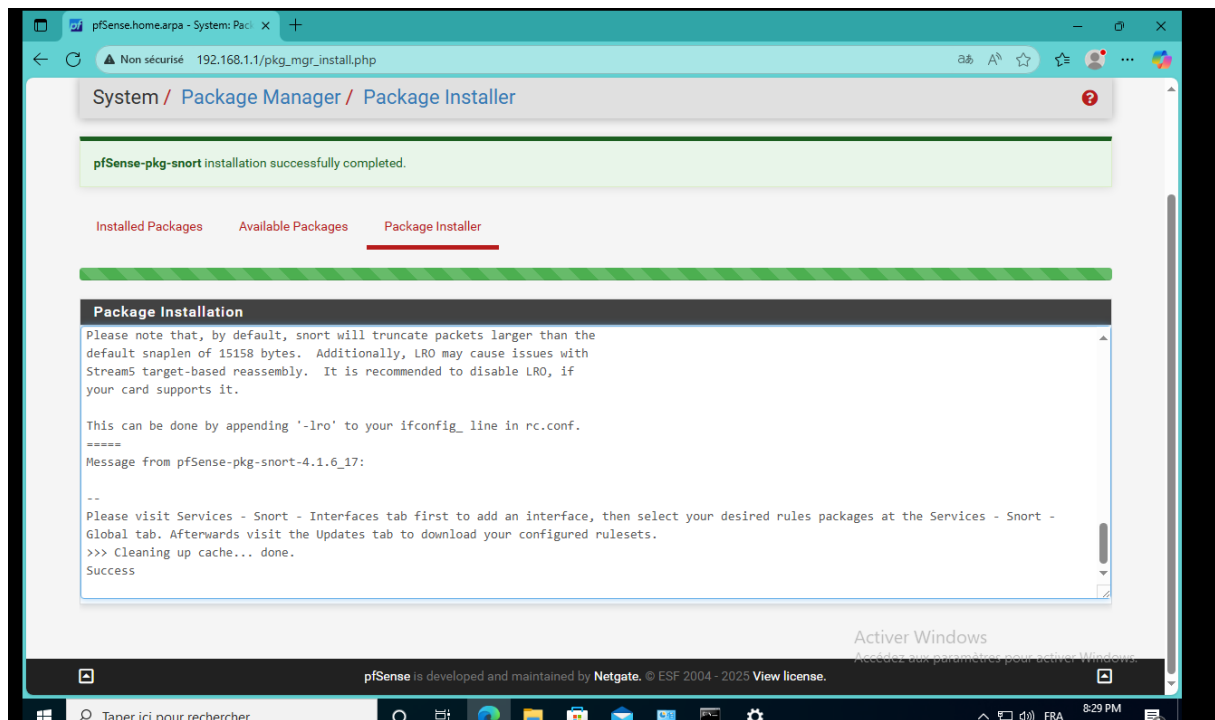

En service de setting

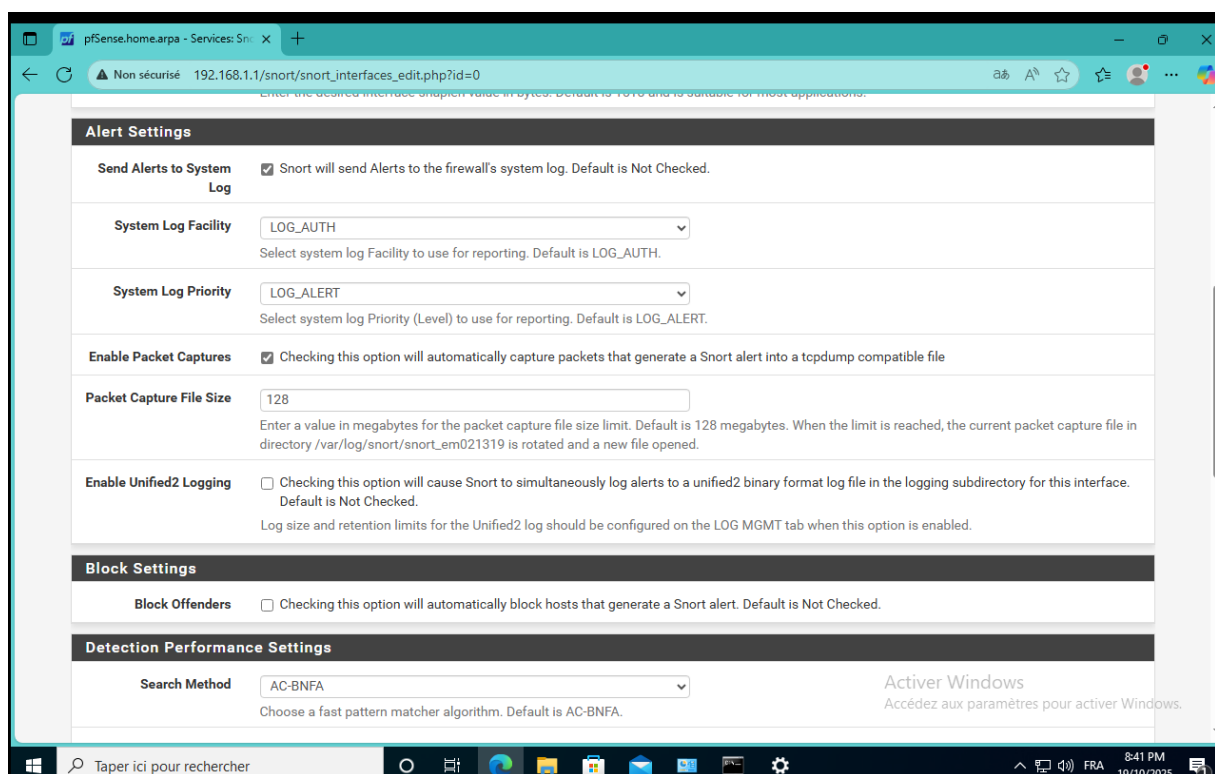

pfSense.home.arpa - Services: Snort

Non sécurisé 192.168.1.1/snort/snort_download_updates.php

Services / Snort / Updates

Snort Interfaces Global Settings **Updates** Alerts Blocked Pass Lists Suppress IP Lists SID Mgmt Log Mgmt Sync

Installed Rule Set MD5 Signature

Rule Set Name/Publisher	MD5 Signature Hash	MD5 Signature Date
Snort Subscriber Ruleset	Not Enabled	Not Enabled
Snort GPLv2 Community Rules	Not Enabled	Not Enabled
Emerging Threats Open Rules	Not Enabled	Not Enabled
Snort OpenAppID Detectors	Not Enabled	Not Enabled
Snort AppID Open Text Rules	Not Enabled	Not Enabled
Feodo Tracker Botnet C2 IP Rules	Not Enabled	Not Enabled

Update Your Rule Set

Last Update: Oct-19 2025 20:05 Result: **Success**

Update Rules [Update Rules](#) [Force Update](#)

Click UPDATE RULES to check for and automatically apply any new posted updates for selected rules packages. Clicking FORCE UPDATE will zero out the MD5 hashes and force the download and application of the latest versions of the enabled rules packages.

Manage Rule Set Log

[View Log](#) [Clear Log](#)

Windows 10 Taskbar: Taper ici pour rechercher, 9:06 PM 19/10/2025

pfSense COMMUNITY EDITION

System Interfaces Firewall Services VPN Status Diagnostics Help

WARNING: The 'admin' account password is set to the default value. Change the password in the User Manager.

Diagnostics / Command Prompt

Shell Output - mkdir -p /var/db/snort/snort_69470_em0/

Execute Shell Command

mkdir -p /var/db/snort/snort_69470_em0/

[Execute](#) [Clear](#)

Download File

File to download

[Download](#)

Upload File

[Choisir un fichier](#) Aucun fichier n'a été sélectionné

[Upload](#)

Windows 10 Taskbar: 9:06 PM 19/10/2025