Marie Senumstad Sagedal

What are the Inconviniences of Storing Data Centrally?

Information on Central Geospatial Databases in Norway

Trondheim, December 2017

PROJECT THESIS: TBA4560

Faculty of Engineering Science and Technology

Department of Civil and Transport Engineering

Norwegian University of Science and Technology (NTNU)



i

Preface

TODO

This project assignment is written for the division of Geomatics at the Norwegian University of Science and Technology (NTNU). It is part of the study program Engineering and ICT, and was written in the autumn of 2017.

I would like to thank my advisers Lars Eggan (Norconsult Informasjonssystemer) and Terje Midtbø (NTNU).

Trondheim, 2013-12-20

Marie Senumstad Sagedal

Summary and Conclusions evt Abstract

TODO

Contents

| | Pref | ace . | | i | | |
|---|-------------------------------|---------|--|----|--|--|
| | Sun | nmary | and Conclusions | ii | | |
| 1 | Introduction | | | 2 | | |
| 2 | The | Main (| Geospatial Data Systems in Norway | 4 | | |
| | 2.1 | Sentre | al Felles Kartdatabase - The Central Map Data Store | 4 | | |
| | 2.2 | Matri | kkelen The Norwegian Cadastre | 5 | | |
| | 2.3 | Data 1 | Flow of the Two Systems | 5 | | |
| 3 | Tecl | hnique | es for Updating and Synchronising Geodata | 7 | | |
| | 3.1 | Quad | ri Map Server (QMS) and Its Synchronising Services | 7 | | |
| | | 3.1.1 | NGIS-API | 8 | | |
| | | 3.1.2 | GeoSynkronisering - the Geosynchronisation Standard | 8 | | |
| | 3.2 | The C | Central Cadastral Server and its APIs | 10 | | |
| | | 3.2.1 | The MatrikkelAPIs | 10 | | |
| | 3.3 | Other | Generic Services | 11 | | |
| | | 3.3.1 | Standard Spesifications from the Open Geospatial Consortium) | 12 | | |
| | | 3.3.2 | Simple Object Access Protocol (SOAP) | 12 | | |
| | | 3.3.3 | Representational State Transfer (REST) | 13 | | |
| 4 | Platform Independent Services | | | | | |
| | | 4.0.1 | Previous work - generic API's | 15 | | |
| 5 | Dire | ectly U | pdating versus Local Updating | 17 | | |
| 6 | 6 Conclusion | | | | | |

| A Glossary | 20 |
|--------------|----|
| Bibliography | 22 |

1

CONTENTS

Introduction

For about ten years the Norwegian cadastre, *Matrikkelen*, has had a centralised production system TODO cite Falkanger2017 - will this work for other geospatial systems in Norway as well? Traditionally the management system of the basic map data in Norway was a local production at the municipalities - where the updated map data was sent to the central data store once or twice a year - but today the new implementation follows a system where the municipalities directly update the map data to the data store managed by the Norwegian Mapping Authority, *Kartverket*.

(TODO Litt mer funfacts her)

The main objectives of this project are

- 1. To give a state of the art description of the cadastre and basic map data systems in Norway.
- 2. To give an overview of techniques for transferring geospatial information, and see whether they are platform independent or not.
- 3. To discuss the pros and cons of having a centralised management system of geosaptial data.

The organisation of the paper is as follows: Initially there are two theoretical chapters presenting the two main registers of geospatial information in Norway and the techniques for updating and synchronise to and from those. The following chapters discuss the benefits and disadvantages of updating data into a central data store, and includes as well a brief discussion on generic versus platform dependent API's. The paper ends with a conclusion whether there are some disadvantages to centralising the updating and management of the basic map data.

For an explanation of the central terms of this text, the reader is encouraged to look at the glossary in the Appendix.

The Main Geospatial Data Systems in

Norway

Two of the main registers of geographical data in Norway are the *Felles Kartdatabase* (FKB), the primary map data, and *Matrikkelen*, the cadastral data store. The production, maintenance and updating of both are done by *Kartverket*, the Norwegian Mapping Authority, in collaboration with the members of the Geovekst project. Geovekst is a geodata collaboration between different Norwegian public agencies, such as Kartverket, the municipalities and Statens vegvesen (Kartverket 2017c). By carrying out joint mapping projects Geovekst establish and maintain a common set of map data in Norway.

2.1 Sentral Felles Kartdatabase - The Central Map Data Store

To enhance the efficient integration, distribution and transport of the FKB-data, the implementation of *Sentral felles kartdatabase* (SFKB), the centralised map data store, started in October 2016. This is a system that centralises the management of the primary map data (FKB) in Norway (Kartverket 2017*d*). The FKB data is the most detailed map data, ranging on a scale from 1:500 to 1:30000. They are all on a vectorised form, and used in e.g. production of technical maps and geographical analysis. Some examples of the FKB data are buildings, roads and water.

Through the SFKB system public agencies, such as the municipalities, are able do directly update the FKB-map data into a central map data store. This ensures the users of the FKB-map data access to fresh and quality assured data at all times. Earlier the updated map data was

stored locally at the municipalities, and sent to Kartverket only 1-2 times a year. As of November 2017 there are five municipalities (Bergen, Bærum, Oslo, Stavanger and Trondheim) that are not members of the Geovekst collaboration. These five municipalities have the opportunity to update their FKB-data directly to the central registry, but it is only Bærum that have chosen to do so (Kartverket 2017*d*). As a pilot Trondheim municipality, using geosynchronisation (see figure 3.1.2), works as a provider of the FKB offering map data to subscribers (Sæther 2016, Sandal 2016). The remaining three municipalities have chosen to keep and update local copies, and send those copies to Kartverket regularly as was the earlier standard.

2.2 Matrikkelen The Norwegian Cadastre

The objective of the cadastre, in Norwegian called *Matrikkelen*, is to serve as a registry of cadastal units and property in Norway, i.e buildings, parcels and addresses. There are several usages of the cadastre. For the municipalities and the local administrations the cadastre is an important tool for e.g. land use planning and collection of fees; for the government it is a tool for deriving statistic and for the private sector it gives valuable information for the property marked amongst other things (Mjøs 2002). The server of the cadastre runs centrally at Kartverket.

2.3 Data Flow of the Two Systems

The management systems of the *SFKB* and the cadastre have the same dataflow as is illustrated in figure 2.1. *The municipalities* update the central data stores through an application programming interface (API), and *the central management*, with the main responsibility for the content of the database (Kartverket), controls the data stores and does periodical updates on them. With a synchronisation API (further explained in chapter 3), local copies at the municipalities and distributional copies for all end-users of the mapdata will be kept up-to-date (Kartverket 2015).

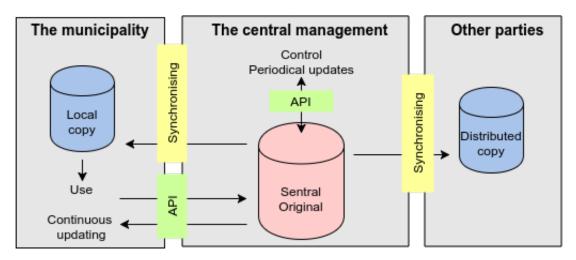


Figure 2.1: Illustration of the concept of data distribution in the systems of both SFKB and the cadastre. The figure is adopted from Kartverket (2015)

Techniques for Updating and Synchronising Geodata

When submission of new data and modifications on existing data is done for the cadastre and basic map data in Norway, one of the criteria is that all the databases with the same content are updated regardless of where the update is done. What is needed is a geosynchronization service. The synchronization of the FKB data is done with *geosynchronisation*, and updating through the *NGIS-API*, and the cadastre data through the *MatrikkelAPIs*. This chapter will present these three techniques for getting access to and synchronizing geospatial data.

3.1 Quadri Map Server (QMS) and Its Synchronising Services

The *Quadri Map Server* (QMS) is the server of the of the SFKB system. QMS has a client-server architecture; the servers distribute the data and the clients are able to both fetch data and perform services on them (Norkart AS 2010). The structure of the QMS system is as Kartverket (2017*d*) illustrated it in Figure 3.1: the *archives* (data stores) are used for storing the FKB-data, the *portals* defines the clients and authorizes users for different tasks, and a task is defined as access to an archive. The data stored in, and uploaded into, QMS is defined by the *object catalogue*, and the service of translating logical, humanly meaningful, names of the distributing servers is the *name server*. All the feature instances in the archives are given unique identifiers. The attributes of the identifiers are LocalId, VersionId and Namespace. Namaspace is identifying the data source of the instance, the VersionId identifies the version of the object and the

skal jeg flytte denne set-

ningen opp til over iden-

tifikatorene?

LocalId, based on a Universally unique identifier (UUID), ensures that each feature instance is unique¹. The NGIS-API is the application programming interface for storing spatial data into QMS. .

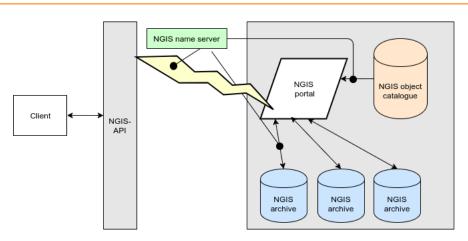


Figure 3.1: The structure of the Quadri Map Server (QMS) system. For updating the data in QMS the NGIS-API is used. The main components of the system are portals, object catalogue and archives. It is possible to use geosynchronisation (chapter 3.1.2) to manage the data in QMS, in addition to the NGIS-API. Figure adopted from (Kartverket 2017*a*)

3.1.1 NGIS-API

When editing an existing object in QMS, e.g. a building or the land use of an area, the object gets locked in the archive, and the user edits the object locally. When the updating is done the user has to send the object back, together with objects that have been edided, added or deleted, to it's archive. When the objects are locked in the archives, other users can not edit the same object, but they might look at it. This process is called long transactions (Kartverket 2017a).

3.1.2 GeoSynkronisering - the Geosynchronisation Standard

Geosynchronising (*GeoSynkronisering*) is a Norwegian standard for synchronising geographical information across computer systems, and is a provider-subscriber system as illustrated in figure 3.2 (Kartverket 2013). The provider updates the database with new data, and subscribers are allowed to update their databases with the changes done by the provider. The SFKB works as a provider: if data is changed or added in QMS the features will automaticly be geosynchronised to all subscribers. Subscribers in the SFKB-system are e.g. the municipalities and GeoNorge.

¹The probability to get the same number is small because there are som many possibilities. E.g., the number of random version 4 UUIDs which need to be generated in order to have a 50% probability of at least one collision, is 2.71 quintillion. This is computed as follows: $n \approx \frac{1}{2} + \sqrt{\frac{1}{4} + 2 \times \ln 2 \times 2^{122}} \approx 2.71 \times 10^{18}$ (Eggan & Pedersen 2017)

GeoNorge is the web page where public agencies and institutions as well as private actors can get map data and other geospatial information for Norway.



Figure 3.2: The geosynchronisation concept, adopted from (Kartverket 2013, p. 16).

The project of making a standard interface for geosynchronisation services in Norway was carried out in 2012, and was a collaboration between Kartverket, the Norwegian Institute of Bioeconomy Research (NIBIO) and system providers in Norway. Geosynkronisering is a open and freely available project on GitHub, the This Norwegian standard is based on the concepts and methods from international standards, i.e. ISO 19100 Geographic Information/Geomatics and Open Geospatial Consortium (OGC) (Eggan & Pedersen 2017, Kartverket 2013).

The geosynchornisation standard is model driven, using models as key artefacts in the development. UML is used on the conceptual level to describe the data, and on the the data format with GML, using XSD as application schema showing the meta data. An example of a UML

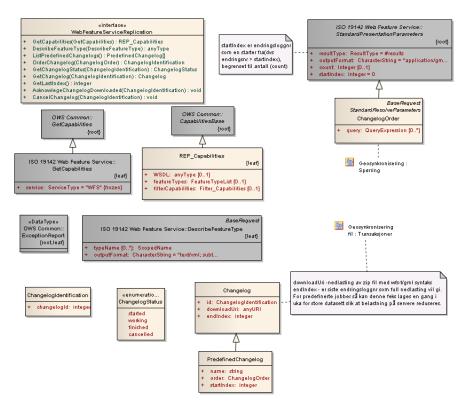


Figure 3.3: Figure from ? showing a UML model of the services of the geosynchronisation.

The data transfer with geosynchronising (figure 3.4) is a set of transactions of changed features on the GML-format and their respective changelogs are specified by the WFS-T. GML (Geography Markup Language) is a open interchange format for geographic transactions and a modelling language for geospatial systems (OGC 2017). WFS-T (Transactional Web Feature Service) allows creation, deletion, and updating of geospatial features on the web (OGC Network 2011) and will be further described in chapter 3.3.1.




Figure 3.4: A detailed description of the Norwegian geosynchronisation process, adopted from Eggan & Pedersen (2017). The data stored in the database TODO . Deegree is a implementation of the Web Feature Service

3.2 The Central Cadastral Server and its APIs

There are several services provided by the cadastre, Matrikkelen; the *cadastral server* serves all clients, both editing and viewing (figure 3.5). The logic of the cadastre server includes management and assembling of cadastre information, as well as control and validation of the business rules of it. The only way to get access to the data on the *cadastre database* is through the *MatrikkelAPI* (chapter 3.2.1) that is on the cadastral central server (Matrikkelavdelingen 2017, p. 338). Submissions and modifications on the cadastral data are done to the centralised data store directly, as for the new SFKB system. When wanting to keep a local cadastre copy, the Matrikkel system provides a *Changelog API* for synchronizing changes on the central data store. See figure 3.5.

The physical architecture of the central cadastral server is clustered, meaning there are several physical servers, but for the clients they will appear as one.

3.2.1 The MatrikkelAPIs

The MatrikkelAPIs is application programming interfaces for extracting data, in both small and large scale, of the cadastral data.

There are three MatrikkelAPIs. The first one is for the clients with access to updating the cadastre data - the *Editing API*, the second one the *Viewer API* includes services for inspecting and reading the data and the *Changelog API*, as stated earlier, provides services for fetching data

changes - primarily for the local copies at the municipalities, but also for external registers. The Viewing API support other services as well: web services as WMS that deliver georeferenced raster maps as well as WFS delivering vectorised map and properties for addresses, buildings and land parcels.

There are several types of clients to the cadastre system: the *updating-*, *viewing-* and *retrieval clients* as well as *other systems*. The updating clients support inspection and updating for all information on the cadastre, the viewing clients supports inspection of the data, as well as viewing the cadastral data joint with data from external systems, and lastly the retrieval clients supports updating external municipality registers. Other systems using the cadastre system are mainly systems that uses cadastral information for other software solutions, e.g. a municipal specialized system (Matrikkelavdelingen 2017, p. 337-338).

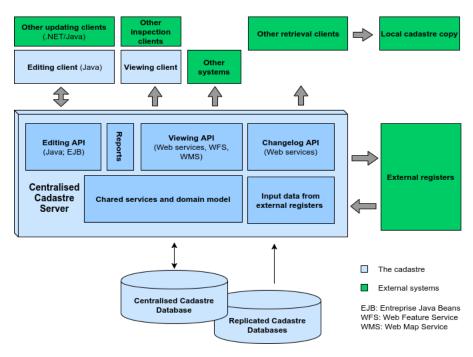


Figure 3.5: The cadastre system, *Matrikkelen*. Solutions for databases through API, clients and relations to other information systems. Adapted from (Matrikkelavdelingen 2017, p. 337)

3.3 Other Generic Services

There are several web services, ways to access web-based geospatial data. These technologies have been created to facilitate the exchange of geospatial information and to find new ways to communicate geodata and to redefine the work flow of the geospatial analysis. In the following subchapters some of them are presented.

3.3.1 Standard Spesifications from the Open Geospatial Consortium)

To get a higher interoperability in the Geographical Information System (GIS) community the Open Geospatial Consortium (OGC) has created standard specifications for data sharing, processing, retrieval, visualisation, content and cataloguing (Giuliani et al. 2013).

The Web Feature Service (WFS)

The Web Feature Service (WFS) is a standard geodata extracting service for describing data manipulation on feature level (Peng 2005, {Norge digitalt} 2014). The specification defines interfaces required to support transactions and query operations on geospatial features over the internet.

The GML-format is the defacto standard transferring format, but WFS supports other formats as well (Eggan & Pedersen 2017). By using GML for the exhange of geospatial data, interoperability between the heterogeneous system is provided (Yao & Zou 2008).

Whereas WFS allows queering and retrieval of features, transactional Web Feature Service (WFS-T) permits the user to create, delete and update features (OGC Network 2011),

The Web Mapping Service (WMS)

The Web Mapping Service (WMS) is another standad from OGS for exchanging geograpichal information over the web. When using the Web Mapping Service(WMS) the user is given an image of a map that cannot be edited or spatially analysed.

3.3.2 Simple Object Access Protocol (SOAP)

Simple Object Access Protocol (SOAP) is a protocol that defines how XML and HTTP are used to get access to objects, services and servers from a web based service, thus aiding in interoperability. SOAP defines an envelope for Web Service messages, where the envelope consists of a header with meta data, e.g. how the recipient of the SOAP message should interpret the message, and the body with the actual message. SOAP is often referred to as Web Service, as it is the original web service (Kartverket 2013), and may serve as a standard for all systems, because it is platform independent (Sipes 2004).

The Cadastre Viewing and Changelog APIs and the geosynchonisation are examples of SOAP web services.

3.3.3 Representational State Transfer (REST)

The definitions of Representational State Transfer (REST) are many (Fielding et al. 2017, Richardson & Amundsen 2013), this paper uses the description by Fielding & Taylor (1995): *REST is a coordinated set of architectural constraints that attempts to minimize latency and network communication while at the same time maximizing the independence and scalability of component implementations.*

REST is commonly based on the HTTP and HTML standards, and provide simplified calls to services through HTTP. It is only data structures and the transferring of their state that is dealt with in a RESTful service Battle & Benson (2008). The state transferring calls are POST, GET, PUT and DELETE, which receptively creates, reads, updates and deletes resources in the RESTful service. A resource is identified and resolved with a URL.

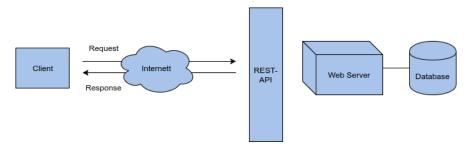


Figure 3.6: REST-API: Clients use HTTP (or other protocols') queries to create, read, update and delete data on the server-side applications. Adapted from (Ceeb 2013)

Platform Independent Services

This chapter will present papers (TODO er dette tilfellet?) concerning generic API's and framwork depending API's. A generic API (or service) is a platform independent service, a software able to run on any hard- or software platform.

Geosynchronising is a service that permits databases with geospatial content to synchronize across different platforms and system solutions (Kartverket 2013), as opposed to the NGIS-API that is a platform dependent API due to its criterion of using c++ programming language and that the developer using it needs to provide the compiler Microsoft Visual Studio (Kartverket 2017*a*, Norkart 2011).

From figure 3.5 can we observe that the Cadastre Editing API is Java dependent, but with the aid of a Java/-NET Bridging Service it can be used with .NET. as well. In 2018 this API will be available as a SOAP service, and thus platform independent.

An overview of the different services and APIs discussed in the previous chapter is presented in table 4.1 below.

| Table 4.1: An overview of the services presented in this chapter. Showing which ones that a | re | | | | |
|---|----|--|--|--|--|
| platform independent and not. TODO: er det riktig det som står om editing API? | | | | | |

| Technique / Service | Platform independent? | Comment |
|--------------------------|-----------------------|---|
| NGIS-API | No | |
| Geosynchronisation | Yes | |
| Editing API (Cadastre) | No | Is Java dependent, but with the help of a Java/-NET Bridging Service component it can be used with .NET. Will be available as a SOAP Service Q1 in 2018, and thus platform independent. |
| Viewing API (Cadastre) | Yes | |
| Changelog API (Cadastre) | Yes | |
| WFS | Yes | |
| WFS-T | Yes | |
| WMS | Yes | |
| REST | Yes | |
| SOAP | Yes | |

4.0.1 Previous work - generic API's

Giuliani et al. (2013) wanted in their paper to benchmark and evaluate the quality of the web services WFS and WCS (Web Coverage Service). They conclude that, amongst other things, the OGC specifications (WFS, WCS) are providing interoperable access to data in an efficient and timely manner, but the specifications are not convenient for transferring large volumes of data. The experience from the Norwegian geosynchronisation projects shows the opposite. By zipping the transaction files (WFS-T with GML), the volume is decreased, resulting in a minor latency for synchronising of the data. An example is provided: a large initial dataset with 220'000 features from the Planning dataset was synchronised from the provider to the Geosynchronising subscriber in only 2.5 minutes. The objects were sent as a initial dataset meaning they were preprocessed (see figure 3.4), but it still proves that the WFS standard can transfer voluminous/big data. (TODO Kan jeg rerferere til samtale?—)

Giuliani et al. (2013)

• TODO Zhao et al. (2012)

• Several studies [8,13,21] Giuliani et al. (2013)

Directly Updating versus Local Updating

The benefits of the new SFKB sytem are numerous, as compared to local storage; freshly updated data for the end-users of map data, and the changes will carry through to *all* end-users, as opposed to local storage, which only applies to the users of that specific municipality (Dontigney 2017). Another benefit is a more efficient and effective validation process, as the requirements are defined and validated one place and every change to the central store is done by the agency where the change actually occurred (Kartverket 2017*b*).

There are several authors that agrees on the benefits (Reichardt 2012, Zhao et al. 2012). The Canadian geosynchronisation project was according to Reichardt (2012) providing the most current and reliable data, consequently avoiding unnecessary versioning and keeping the duplication of data at a minimized level. As the Norwegian geosynchronisation standard is a further development (videreutvikling) of the Canadian this gives an indication that the Noregian geosynchronising process providing these advantages as well. TODO spørre Terje evt finne skriftlig kilde som sier dette.

Spatial Data Infrastuctures

According to Peng (2005) sharing data on file level is causing latency in update of the data, and it is difficult to deduce a generalised standardisation for all geodata, and reaching consensus might be difficult. Spatial data infrastructures (SDI) seek to facilitate the access and integration of geospatial data coming from various sources. To achieve this objective, systems must be interoperable. Giuliani et al. (2013)

With the standard for exchanging geospatial data in Norway, SOSI (Samordnet Opplegg for

Stedfestet Informasjon)

One of the disadvantages of updating directly into a data store is that, as was stated earlier in this chapter, that it may be difficult to obtain a generalised data format and that validation thus will be difficult. As the Norwegian geospatial data have been standardised through the SOSI-standardisation for 30 years this will not be a problem (TODO formuler annerledes). By having a standard for exchanging geospatial data, validation problems wil mainly be because of humanly errors. This last assumptions can be further investigated in later works.

- GeoIntegrasjon
- Breslow (2004) WAN
- coherency garantert aldri konflikt med adre oppdateringer
- consistency dataene er up-to-date

Conclusion

Fordeler og ulemper med sentral lagring styrker og svakheter

- Matrikkelen har fungert fint til nå
- oppsummere noe fra litterature review
- version-control issues as well as inefficient collaboration for storing local copies
- keeping service databases up-to-date in a multi-provider situation.

Avslutte med:

Further investigated Future work: This includes tracking latencies, bottlenecks, and errors that may negatively influence its overall quality. Giuliani et al. (2013)

The process of storing map data locally and later send those data to *Kartverket* was perhaps unnecessarily time-consuming and inefficient. As this paper has presented there are a few drawbacks of updating directly to a central data store. On the other hand, the benefits seem to be greater and thus the SFKB-system have a bright future ahead; the *SFKB*-system will reduce operational cost by lessening the import, export, copying and control costs of the data, as *Kartverket* (2017*b*) sums it up. This is in addition to improving service delivery for the public, providing it with fundamental and reliable map data freshly updated at all times.

Appendix A

Glossary

API Application Programming Interface

FKB Felles kartdatabase (The basic map data)

GML

INSPIRE Infrastructure for Spatial Information in the European Community (An European collaboration for a common geographical infrastructure)

UUID Universally Unique Identifier (A number used to identify objects, all feature instances in SFKB have a LocalId based on an UUID)

Matrikkelen The Cadastre

OGC Open Geospatial Consortium

NGIS API for updating features saved in QMS

QMS Quadri Map Server (The server for the SFKB system)

REST Representational State Transfer

SDI Spatial Data Infrastuctures

SOAP Simple Object Access Protocol

SOSI Samordnet Opplegg for Stedfestet Informasjon

SFKB Sentral Felles kartdatabase (The Central Map Data Store)

APPENDIX A. GLOSSARY 21

UML Unified Modeling Language

WCS Web Coverage Service

WFS Web Feature Service

WFS-T Web Feature Service Transactional

WMS Web Map Service

Bibliography

Battle, R. & Benson, E. (2008), 'Bridging the semantic Web and Web 2.0 with Representational State Transfer (REST)', Web Semantics: Science, Services and Agents on the World Wide Web **6**(1), 61–69.

URL: https://www.sciencedirect.com/science/article/pii/S1570826807000510

Breslow, N. (2004), 'Wide Area File Sharing Across the WAN', Computer Technology Review 24(8), 33-34.

URL: https://search.proquest.com/docview/220625417/fulltext/F62DDAFAD0C2496EPQ/1?accountid=12870

Ceeb (2013), 'How to build a REST Web API on a Raspberry PI in JavaScript - The Floppy Disk'.

URL: http://www.robert-drummond.com/2013/05/08/how-to-build-a-restful-web-api-on-a-raspberry-pi-in-javascript-2/

Dontigney, E. (2017), 'The Advantages of Centralized Database Storage | Bizfluent'.

URL: https://bizfluent.com/info-8623828-advantages-centralized-database-storage.html

Eggan, L. & Pedersen, J. (2017), WFS for transaksjoner WFS-T.

URL: https://www.geonorge.no/globalassets/geonorge2/teknologiforum/2017/eggan_wfs-t_nois_nov2017_tf.pdf

Fielding, R. T. & Taylor, R. N. (1995), 'Principled Design of the Modern Web Architecture'.

URL: https://www.ics.uci.edu/fielding/pubs/webarch_icse2000.pdf

Fielding, R. T., Taylor, R. N., Erenkrantz, J. R., Gorlick, M. M., Whitehead, J., Khare, R. & Oreizy, P. (2017), 'Reflections on the REST Architectural Style and " Principled Design of the Modern Web Architecture " (Impact Paper Award)', Proceedings of 2017 11th Joint Meeting of the European Software Engineering Conference and the ACM SIGSOFT Symposium on the Foundations of Software Engineering.

URL: https://static.googleusercontent.com/media/research.google.com/no//pubs/archive/46310.pdf

Frenvik, A. (2017), 'Det åpne geodata-økosystemet', Kart og Plan 77 (5003), 108-120.

URL: http://docs.atlefren.net/ogde.pdf

Giuliani, G., Dubois, A. & Lacroix, P. (2013), 'Testing OGC Web Feature and Coverage Service performance: Towards efficient delivery of geospatial data', *Journal of Spatial Information Science* **2013**(7), 1–23.

INSPIRE (2017), 'About INSPIRE'.

URL: https://inspire.ec.europa.eu/about-inspire/563

BIBLIOGRAPHY 23

Kartverket (2013), Standarder Geografisk Informasjon - Geosynkronisering Versjon 1.0.

URL: https://www.kartverket.no/globalassets/standard/bransjestandarder-utover-sosi/geosynkronisering-standard-versjon-1.pdf

Kartverket (2015), Sentral forvaltningsløsning for primaerdata.

URL: https://kartverket.no/globalassets/kart/geodatasamarbeid/sentral-forv-for-primardata/konseptskisse-sentralforvaltningprimardata.pdf

Kartverket (2017a), 'Informasjon og dokumentasjon om NGIS-API | Kartverket'.

URL: https://www.kartverket.no/prosjekter/Sentral-felles-kartdatabase/Oppdaterings-API/

Kartverket (2017b), 'Ofte stilte spørsmål'.

URL: https://kartverket.no/Prosjekter/Sentral-felles-kartdatabase/Ofte-stilte-sporsmal/

Kartverket (2017c), 'Om Geovekst-samarbeidet'.

URL: https://www.kartverket.no/geodataarbeid/Geovekst/Om-Geovekst-samarbeidet/

Kartverket (2017*d*), Sentral Felles Kartdatabase - Systembeskrivelse.

URL: https://www.kartverket.no/globalassets/arkiv/kart/sentral-forvlosning-for-primardata/sentralfelleskartdatabase_systembeskri

Louridas, P. (2006), 'SOAP and Web Services', IEEE Software 23(6), 62-67.

URL: https://search.proquest.com/docview/215842743?rfr_id=info%3Axri%2Fsid%3Aprimo

Matrikkelavdelingen (2017), Samla systemspesifikasjon Matrikkelens innhold og funksjonalitet Klient Dokumentnummer: MA-nnnn.

URL: https://www.test.matrikkel.no/matrikkel/docs/SamlaSystemspesifikasjonVer.3.12.pdf

Mjøs, L. B. (2002), 'New Cadastre in Norway', TS7.12Regional Experience in the Cadastre – Europe II.

URL: https://www.fig.net/resources/proceedings/fig_proceedings/fig_2002/Ts7-12/TS7_12_mjos.pdf

{Norge digitalt} (2014), Veileder for Web Feature Service (WFS).

URL: https://www.geonorge.no/globalassets/geonorge2/veiledere/veileder-for-web-feature-service_0_54.pdf

Norkart (2011), Quadri Map Server - Utviklerhåndbok.

URL: http://sehavnivaa.no/globalassets/kart/geodatasamarbeid/sentral-forv-for-primardata/quadri-map-server—utviklerhandbok.pdf

Norkart AS (2010), Quadri Map Server - Overordnet beskrivelse.

URL: https://www.kartverket.no/globalassets/kart/geodatasamarbeid/sentral-forv-for-primardata/quadri-map-server—-overordnet-beskrivelse.pdf

OGC (2017), 'Geography Markup Language'.

URL: http://www.opengeospatial.org/standards/gml

BIBLIOGRAPHY 24

OGC Network (2011), 'WFS-Transaction (WFS-T) tutorial'.

URL: http://www.ogcnetwork.net/node/1629

Peng, Z. (2005), 'A proposed framework for feature-level geospatial data sharing: a case study for transportation network data', *International Journal of Geographical Information Science* **19**(4), 459–481.

URL: http://www.tandfonline.com/doi/abs/10.1080/13658810512331319127

Reichardt, M. (2012), 'New OGC standard supports "GeoSynchronization", GeoInformatics; Emmeloord 15(7), 1.

URL: https://search.proquest.com/docview/1115586129/citation/4047B7870DC04126PQ/1?accountid=12870

Richardson, L. & Amundsen, M. (2013), RESTful Web APIs.

URL: https://books.google.no/books?id=ZXDGAAAAQBAJ&printsec=frontcover&hl=no&source=gbs_ge_summary_r&cad=0#v=onepa

Sæther, M. H. (2016), Status geosynkronisering i Trondheim kommune.

URL: https://www.geonorge.no/globalassets/geonorge2/plan/moter-i-plandataforum/20160519/geosynkronisering_status_trondheir kommune.pdf

Sandal, K. (2016), Sentral lagring av FKB med ISY WinMap Kjell Sandal Norconsult Informasjonssystemer AS.

URL: https://wpstatic.idium.no/www.geoforum.no/2016/10/NGIS-Sentral-lagring-NOIS.pdf

Sipes, J. (2004), 'A Standard Approach', CADalyst 21(12), 58-61.

URL: https://search.proquest.com/docview/216094181?OpenUrlRefId=info:xri/sid:primo&accountid=12870

Yao, X. & Zou, L. (2008), 'Interoperable internet mapping—an open source approach. (Technical report)', *Cartography and Geographic Information Science* **35**(4).

Zhao, P., Foerster, T. & Yue, P. (2012), 'The Geoprocessing Web', Computers & Geosciences 47, 3–12.

URL: https://www.sciencedirect.com/science/article/pii/S0098300412001446