



Mood Tracker App

Interfaz del diseño:

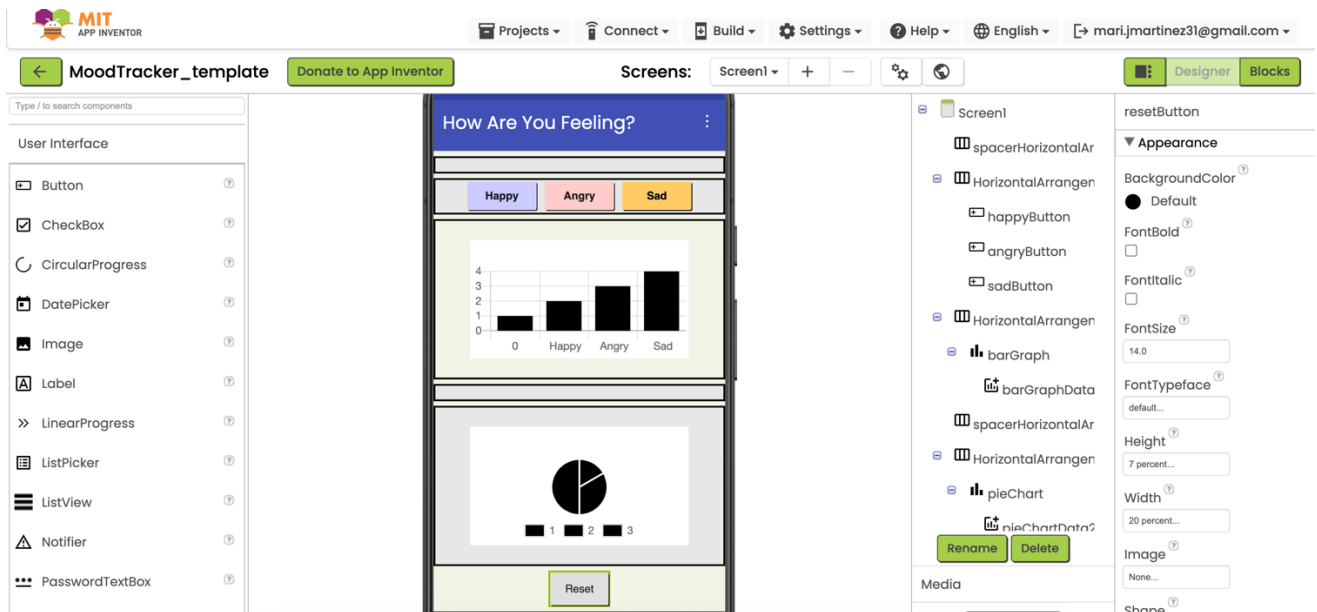

Interfaz de los bloques de programación:

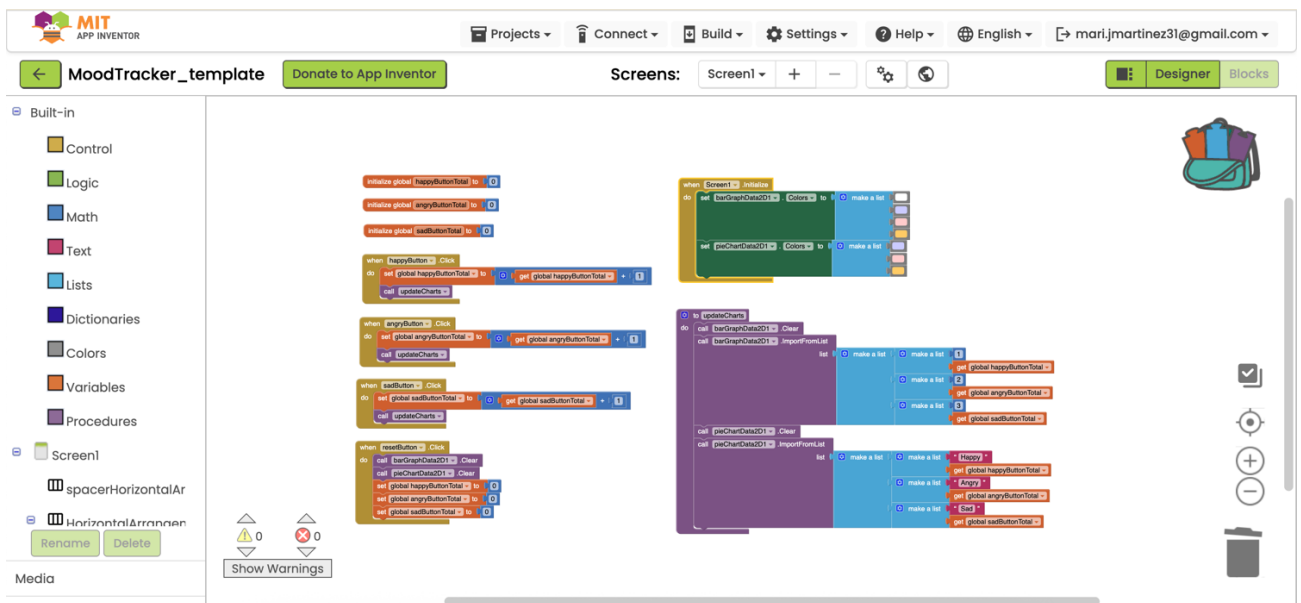

Initialize global happyButtonTotal to 0

Initialize global angryButtonTotal to 0

Initialize global sadButtonTotal to 0

when happyButton .Click
do
set global happyButtonTotal to
get global happyButtonTotal + 1
call updateCharts

when angryButton .Click
do
set global angryButtonTotal to
get global angryButtonTotal + 1
call updateCharts

when sadButton .Click
do
set global sadButtonTotal to
get global sadButtonTotal + 1
call updateCharts

when resetButton .Click
do
call barGraphData2D1 .Clear
call pieChartData2D1 .Clear
set global happyButtonTotal to 0
set global angryButtonTotal to 0
set global sadButtonTotal to 0

when Screen1 .Initialize
do
set barGraphData2D1 . Colors to
make a list
set pieChartData2D1 . Colors to
make a list

to updateCharts
do
call barGraphData2D1 .Clear
call barGraphData2D1 .ImportFromList
list
make a list
make a list
make a list
get global happyButtonTotal
1
make a list
make a list
make a list
get global angryButtonTotal
2
make a list
make a list
make a list
get global sadButtonTotal
3
call pieChartData2D1 .Clear
call pieChartData2D1 .ImportFromList
list
make a list
make a list
make a list
make a list
make a list
make a list
get global happyButtonTotal
"Happy"
get global angryButtonTotal
"Angry"
get global sadButtonTotal
"Sad"

Interfaz de la aplicación:

