iSolutions

DWH

Technical Documentation

DOCUMENT REVIEWS

Version	Date	Description	# Pages
1	25/01/2017	First draft	All
2	16/02/2017	Second draft	All
3	21/02/2017	Third draft	All
4	03/03/2017	Fourth draft	All
5	03/01/2019	Fifth draft	All
6	24/01/2019	Sixth draft	All
7	16/07/2019	Eighth draft	All
8	08/03/2021	Added event program views	23-24
9	01/04/2021	Added new fields on existing views	12,19,25
10	31/08/2021	Document review	All
11	01/09/2021	MasterCampaignId added to Bonus views	13,14,15
12	10/01/2022	Added new credit type for Freebets	37
13	21/04/2022	New view for BonusFreebets	17
14	07/06/2022	New view for UserSessions Added SystemCode field on Reasons view	13
15	08/06/2022	New views for UsersSelfexclusions	13,14
16	07/07/2022	Added CreationCouponId field on BonusFreebets view	21
17	06/07/2023	Complete review and updates	All
18	18/01/2024	FarmID (deprecated field) removed from all views	All
19	12/02/2024	UsersDetails view deprecated, all fields inside main view now	6,7
Published by		iSolutions	

SUMMARY

DWH 1

DOCUMENT REVIEWS 2

SUMMARY 3

VIEWS 5
- LOOKUP VIEWS 5
  1. *Dwh_en.view_Reasons* 5
  2. *Dwh_en.view_ReasonsProviders* 5
  3. *Dwh_en.view_CurrencyExchanges* 5
  4. *Dwh_en.view_Providers* 6
- USERS 6
  1. *Dwh_en.view_Users* 6
  2. *Dwh_en.view_UserParameters* 7
  3. *Dwh_en.view_UserAdditionalData* 8
  4. *Dwh_en.view_UserNotes* 8
  5. *Dwh_en.view_Balances* 8
  6. *Dwh_en.view_CurrentHierarchy* 8
  7. *Dwh_en.view_CurrentUsersStructure* 9
  8. *Dwh_en.view_GroupsUsers* 9
  9. *Dwh_en.view_UserGroups* 9
  10. *Dwh_en.view_UserGroupsAreas* 10
  11. *Dwh_en.view_UserSessions* 10
  12. *Dwh_en.view_UsersSelfexclusions* 10
  13. *Dwh_en.view_UsersSelfexclusionsHistorical* 11
- TRANSACTIONS 12
  1. *Dwh_en.view_Transactions* 12
- BONUS 13
  1. *Dwh_en.view_BonusCampaigns* 13
  2. *Dwh_en.view_BonusUsersCampaigns* 14
  3. *Dwh_en.view_BonusTransactions* 14
  4. *Dwh_en.view_BonusBonuses* 14
  5. *Dwh_en.view_BonusBalances* 15
  6. *Dwh_en.view_CurrentBonusBalances* 15
  7. *Dwh_en.view_BonusFreebets* 16
- BETS 16
  1. *Dwh_en.view_Bets* 16
  2. *Dwh_en.view_Betslips* 17
  3. *Dwh_en.view_BetslipAdditionalData* 18
  4. *Dwh_en.view_ BetslipsIdentifiers* 18
  5. *Dwh_en.view_BookedBetslips* 18
  6. *Dwh_en.view_BookedBetslipsDetails* 19
  7. *Dwh_en.view_HistoricalBetslips* 19
  8. *Dwh_en.view_BetslipsOdds* 19
- GAMES 20
  1. *Dwh_en.view_Casino* 20
- COMMISSIONS 21
  1. *Dwh_en.view_SportDirectCommissions* 21
  2. *Dwh_en.view_SportNetworkCommissions* 21
  3. *Dwh_en.view_CasinoDirectCommissions* 21
  4. *Dwh_en.view_CasinoNetworkCommissions* 22
  5. *Dwh_en.view_PokerDirectCommissions* 22
  6. *Dwh_en.view_PokerNetworkCommissions* 23

EVENT PROGRAM 23
1. *Dwh_en.view_Sports* 23
2. *Dwh_en.view_SportsDetails* 24
3. *Dwh_en.view_Groups* 24
4. *Dwh_en.view_Events* 24
5. *Dwh_en.view_EventsAdditionalData* 24
6. *Dwh_en.view_SubEvents* 25
7. *Dwh_en.view_SubEventsAdditionalData* 25
8. *Dwh_en.view_OddsClasses* 25
9. *Dwh_en.view_OddsTypes* 25
10. *Dwh_en.view_Odds* 26

LOOKUP TABLES 26
1. *Application Types* 26
2. *Betslip Additional Data Types* 26
3. *Betslip Statuses* 27
4. *Betslip Types* 27
5. *Bet Types* 27
6. *Bonus Campaign Statuses* 27
7. *Casino Types* 28
8. *Credit Types* 28
9. *Currencies* 28
10. *Currency Exchange Statuses* 28
11. *Note Types* 28
12. *Outcome Types* 29
13. *Transaction Amount Types* 29
14. *Transaction Management Statuses* 29
15. *User Statuses* 29
16. *User Types* 29
17. *Sport, Groups, Events, Subevents, Odds Statuses* 30
18. *OddsType Statuses* 30
19. *Sport Types* 30
20. *Event Types* 31
21. *Event Additional Data Types* 31
22. *SubEvent Additional Data Types* 31
23. *BetslipDetailOutcome* 31
24. *FreeBet Statuses* 32
25. *Session Statuses* 32
26. *Application Types* 32
27. *Self-exclusion periods* 33

MONITORING THE IMPORT PROCEDURES 33

USING DATEVERSION FOR INCREMENTAL IMPORTS 33

QUERY EXAMPLES 34
1. *Bonus* 34
2. *Casino* 35
3. *Transactions* 36
4. *Betslips* 37

ISBETS_BI_CUSTOM DATABASE 38

Views

In the DWH structure you can find views for the main entities of the OLTP database, for instance "Users", "Betslips", "Transactions" and so on.

Fields with the same name can be used to join different views successfully.

LOOKUP VIEWS

1. Dwh_en.view_Reasons

This is a lookup view for the list of available reasons and their groups.

Field	Type	Nullable	Description
ReasonID	smallint	N	Reason ID
Reason	nvarchar(50)	N	Reason description
ReasonGroupID	smallint	N	Reason group ID
ReasonGroup	nvarchar(50)	N	Reason group description
SystemCode	nvarchar(50)	Y	System Code (unique across all the environments)

2. Dwh_en.view_ReasonsProviders

This view shows all the reasons available for every provider.

Field	Type	Nullable	Description
ProviderID	smallint	N	Provider ID
SectionTypeID	tinyint	N	ID of the Section Type
SectionType	varchar	Y	Section Type
ReasonID	smallint	N	Reason ID
CancellationReasonID	smallint	Y	Reason ID of the cancellation
EstimateReasonID	smallint	Y	Currently dismissed field
ThirdPartyReasonCode	varchar	N	ThirdParty Reason Code
PaymentReasonID	smallint	Y	Payment Reason ID

3. Dwh_en.view_CurrencyExchanges

This view contains data about currency exchange rates.

Field	Type	Nullable	Description
CurrencyExchangeID	int	N	Currency Exchange ID (used to identify the exchange rate of the transaction)
SourceCurrencyID	tinyint	N	Id of the source currency

SourceCurrency	varchar(50)	N	Source currency description
SourceCurrencyCode	varchar(10)	N	Source currency code (EUR, USD, etc)
DestinationCurrencyID	tinyint	N	Destination Currency ID
DestinationCurrency	varchar(50)	N	Destination Currency description
DestinationCurrencyCode	varchar(10)	N	Destination currency code (EUR, USD, etc)
ExchangeRate	decimal(11,5)	N	Exchange rate
ValidityStartDate	smalldatetime	N	Validity start date
CurrencyExchangeStatusID	tinyint	N	Currency Exchange Status ID
CurrencyExchangeStatus	varchar(50)	N	Currency Exchange Status description

4. Dwh_en.view_Providers

This view shows basic information about all providers.

Field	Type	Nullable	Description
ProviderID	smallint	N	Provider ID
Provider	varchar	N	Provider name
ProviderTypeID	int	N	Type ID
ProviderType	varchar	N	Type description
MasterProviderID	smallint	Y	ID of master provider

USERS

1. Dwh_en.view_Users

This view contains data about users registered within the database, regardless of their status and type.

Field	Type	Nullable	Description
UserID	int	N	User ID
BookmakerID	smallint	Y	Bookmaker ID
Bookmaker	varchar(30)	Y	Bookmaker description
ParentID	int	Y	User's parent ID
Username	nvarchar(50)	Y	Username
Name	nvarchar(50)	Y	User's name
Surname	nvarchar(50)	Y	User's last name
UserStatusID	tinyint	Y	User's status ID
UserStatus	nvarchar(50)	Y	User's status description (Be Validated, Deleted, Disabled, Enabled, Error Creating User, Frozen, Read Only, etc)
TestUser	tinyint	Y	Value 1 if the user is a test user
UserTypeID	tinyint	Y	User's type ID
UserType	nvarchar(50)	Y	User's type description (User, Agent, Commission Template, Company)
CurrencyID	tinyint	Y	User's currency ID

Currency	nvarchar(50)	Y	User's currency description
Cashier	bit	Y	Value 1 if the user is cashier, 0 if normal user
UserProfileID	smallint	Y	User profile ID
UserProfile	nvarchar(50)	Y	User's profile description (Agent, Cashier, Cashier Lagos, User, VIP User, Web Affiliate, etc)
Notes	varchar(500)	Y	Notes about the user
ReserveNotes	varchar(500)	Y	Outcome notes for the user (pending bets)
Color	int	Y	User's default color, configured from BetAdmin
LastLogin	smalldatetime	Y	Date of user's last login
CountryID	int	Y	Country ID
Country	varchar(50)	Y	User's country of registered residence
Address	nvarchar(50)	Y	User's home address
City	nvarchar(50)	Y	User's city of registered residence
ZipCode	nvarchar(50)	Y	User's ZIP code
Province	nvarchar(50)	Y	User's province of registered residence
Region	nvarchar(50)	Y	User's region of registered residence (if applicable)
Mobile	varchar(50)	Y	User's mobile telephone number
Phone	varchar(50)	Y	User's home phone number
BirthDate	smalldatetime	Y	User's date of birth
Email	nvarchar(50)	Y	User's email address
CreationDate	smalldatetime	Y	User's registration date
DateVersion	datetime2	N	Last update date
DetailDateVersion	datetime2	N	Last update date of user details

2. Dwh_en.view_UserParameters

This view contains all the parameters that have been set for all users (multiple rows for each of them).

Field	Type	Nullable	Description
UserID	int	N	User ID
UserParameterTypeID	smallint	N	User parameter type ID
Value	varchar(50)	Y	Additional data value for UserParameterTypeID
DefaultValue	varchar(50)	Y	Default value (if the field Value is not set)
LastUpdateDate	smalldatetime	N	Last update date
ManagerID	int	Y	BetAdmin manager ID

ManagerUsername	nvarchar(50)	Y	BetAdmin manager user name

3. Dwh_en.view_UserAdditionalData

This view contains additional data for users (multiple rows for each of them).

Field	Type	Nullable	Description
UserID	int	N	User ID
UserAdditionalDataTypeID	smallint	N	User additional data type ID
Value	nvarchar(50)	Y	Additional data value for UserAdditionalDataTypeID
LastUpdateDate	smalldatetime	N	Last update date
ManagerID	int	Y	BetAdmin manager ID
ManagerUsername	nvarchar(50)	Y	BetAdmin manager user name

4. Dwh_en.view_UserNotes

This view shows the users notes, so who created the note (agent, user or manager), the date of creation and the note text.

Field	Type	Nullable	Description
NoteID	int	N	Note ID
UserID	int	Y	User ID (for whom the note was added)
NoteTypeID	tinyint	Y	Note type ID
NoteType	varchar(50)	Y	Note type description
Date	datetime	N	Note creation date
ChangeUserID	int	Y	User ID (who created the new note)
ManagerID	int	Y	Manager ID (who made the change)
ManagerUsername	nvarchar(50)	Y	Manager Username (empty if ManagerID is empty)
Note	varchar(500)	Y	Note text

5. Dwh_en.view_Balances

This view contains data about users' balances and credits.

Field	Type	Nullable	Description
UserID	int	N	User ID
Balance	decimal(19,4)	N	Balance amount
Credit	decimal(19,4)	N	Credit amount
LastTransactionDate	smalldatetime	Y	Date of the last transaction

6. Dwh_en.view_CurrentHierarchy

This view shows the current network hierarchy of the users with UserID, ParentID (as FatherID of the ChildID) and ChildID.

Field	Type	Nullable	Description
UserID	int	N	User ID
ParentID	int	N	User's parent ID
ChildID	int	N	User's child ID
Level	tinyint	N	The distance level from UserID to ChildID
LevelCode	varbinary	Y	Concatenation of levels from UserID to ChildID converted in hexadecimal

7. Dwh_en.view_CurrentUsersStructure

This view shows the current users structure, including info about with users' MasterID.

Field	Type	Nullable	Description
UserID	int	N	User ID
ParentID	int	N	User's parent ID
UserTypeID	tinyint	N	UserType ID
MasterID	int	N	ID of the Master User
DirectUsers	int	N	Number of Direct Users
DirectAgents	int	N	Number of Direct Agents

8. Dwh_en.view_GroupsUsers

This view contains all the data about the groups of the agents.

Field	Type	Nullable	Description
UserID	int	N	User ID
GroupID	int	N	Group ID
LastModifiedDate	smalldatetime	N	Date of the last change to the group
LastModifiedManagerID	int	N	ID of the BetAdmin manager

9. Dwh_en.view_UserGroups

This view contains data about the correlation between agents and groups, including info about the areas.

Field	Type	Nullable	Description
GroupID	int	N	Group ID
GroupName	varchar	N	Group Name
GroupCode	varchar	N	Group Code
GroupStatusID	tinyint	N	ID of the Group Status
AreaID	smallint	N	ID of the BetAdmin area
RiskIndex	decimal	N	Amount of the risk of the group (it can be managed in the BetAdmin)

10. Dwh_en.view_UserGroupsAreas

This view contains data of the BetAdmin areas where the groups are connected to.

Field	Type	Nullable	Description
AreaID	smallint	N	ID of the BetAdmin area
AreaName	varchar	N	Name of the BetAdmin area
AreaCode	varchar	N	Code of the BetAdmin area
AreaStatusID	tinyint	N	ID of the BetAdmin area status

11. Dwh_en.view_UserSessions

This view contains information about users' sessions.

Field	Type	Nullable	Description
SessionId	int	N	The Identifier of the user's session
UserId	int	N	Identifier of the user in the system
Uid	nvarchar(20)	N	Username
LoginDate	datetime	N	Session's login date
LogoutDate	datetime	Y	Session's logout date
LastActivityDate	datetime	N	Session's last activity date
IpAddress	char(15)	N	Ip address from where the user started the session
SessionStateId	tinyint	Y	Identifier of the session status
SessionState	nvarchar(50)	Y	Session status description
DomainName	varchar(50)	N	Domain from where the user logged-in
UserAgent	varchar(100)	N	User agent of the user's browser
ApplicationTypeId	tinyint	N	Identifier of the application type
ApplicationType	nvarchar(50)	N	Application type description
Url	varchar(100)	N	Url address
Timeout	smallint	N	Session's defined timeout
IsReadOnly	bit	N	Shows whether the session is "Read only" or not (it's generally used for sessions opened using the copyurl BetAdmin's function).

12. Dwh_en.view_UsersSelfexclusions

This view contains information about users' self-exclusions.

Field	Type	Nullable	Description
UserId	int	N	Identifier of the user in the system
SelfExclusionTypeId	tinyint	N	Identifier of the self-exclusion type : 1 Undefined Time 2 Defined Time

SelfExclusionType	nvarchar(200)	N	Description of the self-exclusion type
SelfExclusionPeriodId	tinyint	Y	Self-Exclusion period Identifier
SelfExclusionPeriod	smallint	N	Period of the self-exclusion
SelfExclusionStatusId	tinyint	N	Current status of the self-exclusion : 1 Pending 2 Pending Cancellation 3 In Progress 4 Cancelled 5 Completed
SelfExclusionStatus	nvarchar (100)	N	Description of the current self-exclusion status
StartDate	datetime	N	Date when the self-exclusion started
OldUserStatusId	tinyint	N	Identifier of the user's status before the self-exclusion was applied
OldUserStatus	nvarchar (100)	N	Description of the user's status before the self-eclusion was applied
LogicTypeId	tinyint	N	Identifier of the self-exclusion logic : 1 Single Concessionaire 2 Transversal, enabled by this Concessionaire 3 Transversal, enabled by other Concessionaire
LogicType	nvarchar (100)	N	Description of the above

13. Dwh_en.view_UsersSelfexclusionsHistorical

This view contains information about the history of users' self-exclusions data.

Field	Type	Nullable	Description
HistoryId	int	N	Identifier of the historical data
UserId	int	N	Identifier of the user in the system
SelfExclusionTypeId	tinyint	N	Identifier of the self-exclusion type : 1 Undefined Time 2 Defined Time
SelfExclusionType	nvarchar(200)	N	Description of the self-exclusion type
SelfExclusionPeriodId	tinyint	Y	Self-Exclusion period Identifier
SelfExclusionPeriod	smallint	N	Period of the self-exclusion
SelfExclusionStatusId	tinyint	N	Current status of the self-exclusion : 1 Pending 2 Pending Cancellation 3 In Progress 4 Cancelled 5 Completed
SelfExclusionStatus	Nvarchar(100)	N	Description of the current self-exclusion status
StartDate	datetime	N	Date when the self-exclusion started
InsertDate	datetime	N	Date when the data has been inserted

ManagerInsertionSessionId	int	Y	Session of the manager who possibly changed the self-exclusion
UserInsertionId	int	Y	User that started managed the operation
ApplicationTypeId	tinyint		Application used for this change
ApplicationType	Nvarchar(100)	N	Description of the above
OldUserStatusId	tinyint	N	Identifier of the user's status before the self-exclusion was applied
OldUserStatus	Nvarchar(100)	N	Description of the user's status before the self-eclusion was applied
LogicTypeId	tinyint	N	Identifier of the self-exclusion logic 1 Single Concessionaire 2 Transversal, enabled by this Concessionaire 3 Transversal, enabled by other Concessionaire
LogicType	Nvarchar(100)	N	Description of the above

TRANSACTIONS

1. Dwh_en.view_Transactions

This view contains data and details about transactions.

Field	Type	Nullable	Description
TransactionID	bigint	N	Transaction ID
UserID	int	N	User ID
SubjectID	int	Y	ID of the user who executed the transaction (for example an agent on behalf of the user)
ReasonID	smallint	N	Transaction reason ID
TransactionManagementStatusID	tinyint	N	Transaction management status ID
TransactionManagementStatus	varchar(25)	N	Transaction management status description (Accepted, Pending, System Transaction, etc)
Amount	decimal(19,4)	N	Transaction amount
Date	datetime	N	Transaction date
BalanceAtLastTransaction	decimal(19,4)	N	User's balance after the current transaction
TransactionAmountTypeID	tinyint	N	Transaction amount type ID
TransactionAmountType	varchar(20)	Y	Transaction amount type description (Negative or Positive)
CurrencyID	tinyint	N	Currency ID
CurrencyExchangeID	int	N	Currency exchange history ID (used to identify the exchange rate of the transaction)
Description	nvarchar(50)	Y	Transaction description

Notes	nvarchar(50)	Y	Transaction notes
ManagerID	int	Y	BetAdmin manager ID
ManagerUsername	nvarchar(50)	Y	BetAdmin manager user name
DateVersion	datetime2	N	Last update date
DetailDateVersion	datetime2	N	Last update date of transaction details

BONUS

1. Dwh_en.view_BonusCampaigns

This view shows data about the Bonus Campaigns like the bonus type and withdrawal type rules, start and end date of the campaign and the status.

Field	Type	Nullable	Description
CampaignID	int	N	Bonus campaign ID used to place the bet in case of bonus credit type
BookmakerID	smallint	N	Bookmaker ID
BonusTypeID	smallint	N	Bonus Type ID
BonusType	varchar	N	Name of the Bonus Type
BonusTypeDescription	varchar	N	Description of the Bonus Type
WithdrawalTypeID	smallint	N	Withdrawal Rule ID
WithdrawalType	varchar	N	Name Bonus Withdrawal Rule
WithdrawalTypeDescription	varchar	N	Description of the Bonus Withdrawal Rule
CampaignStatusID	tinyint	N	ID Status of the Campaign
CampaignStatus	varchar	N	Status of the Campaign (Active, Finished, etc)
Name	varchar	N	Name of the Campaign
Code	varchar	N	Code of the Campaign
InsertDate	smalldatetime	N	Date in which the record was inserted
ValidityStartDate	smalldatetime	N	Date of beginning of the Bonus Campaign
ValidityEndDate	smalldatetime	N	Date of the end of the Bonus Campaign
ManualBonusEnabled	bit	N	If 1 manual bonus transactions are allowed
RelatedGroupID	int	N	ID of the Group
Priority	tinyint	N	The value of the priority of Bonus Campaign
AutomaticBalanceTransfer	bit	N	If 1 it activates the automatic balance transfer to real wallet when the user meets the requirements
AutomaticBonusCredit	bit	N	If 1 it activates the automatic bonus accreditation when the user meets the requirements
URL	varchar	N	Url of the campaign
CreditPriority	tinyint	N	Value of the accreditation priority
MasterCampaignID	Int	Y	If this campaign is a Child it contains the Master campaign's ID, otherwise it's null

2. Dwh_en.view_BonusUsersCampaigns

This view shows the users list preloaded on each bonus campaign.

Field	Type	Nullable	Description
CampaignID	int	N	Campaign ID
UserID	int	N	User ID
LastModifiedDate	datetime	N	Date of the last change in the campaign
ManagerID	int	Y	BetAdmin manager ID
ManagerSessionID	int	Y	Session ID of the BetAdmin manager

3. Dwh_en.view_BonusTransactions

This view contains data about each bonus transaction (user, amount, status, amount type, reason, notes, etc)

Field	Type	Nullable	Description
BonusTransactionID	int	N	Bonus Transaction ID
UserID	int	N	User ID
CampaignID	int	N	Campaign ID
ReasonID	smallint	N	Reason ID
Amount	decimal	N	Amount of the bonus transaction
Date	smalldatetime	N	Date of the transaction
CurrencyID	tinyint	N	Currency ID
CurrencyExchangeID	int	N	Currency Exchange ID (used to identify the exchange rate of the transaction)
BalanceAtLastTransaction	decimal	N	User's balance after the current transaction
BetslipID	bigint	Y	Betslip ID
IPAddressID	int	N	ID of the Address IP
MasterCampaignId	Int	Y	If this campaign is a Child it contains the Master campaign's ID, otherwise it's null

4. Dwh_en.view_BonusBonuses

This view shows the data of users' bonuses of every bonus campaign. Status, expiration data and other additional info are listed.

Field	Type	Nullable	Description
BonusID	int	N	Bonus ID
UserID	int	N	User ID
CampaignID	int	N	Bonus campaign ID used to place the bet in case of credit type bonus
Amount	decimal	N	Transaction amount
CurrencyID	tinyint	N	Currency ID

CurrencyExchangeID	int	N	Currency Exchange ID (used to identify the exchange rate of transaction)
BonusStatusID	tinyint	N	ID Bonus Status
BonusStatus	varchar	N	Status of the bonus (To be credited, Credited, etc)
CalculationBaseAmount	decimal	N	Amount used to calculate the bonus
BonusTransactionID	int	Y	Bonus Transaction ID
InsertDate	smalldatetime	N	Date in which the record was inserted
Manual	bit	N	If 1 the transaction is manual
CreationManagerSessionID	int	Y	Manager Session ID of the creation of the record
CreditManagerSessionID	int	Y	Manager Session ID for the Accreditation
CancellationBonusTransazionID	int	Y	Bonus Transaction ID of the Cancellation
CancellationManagerSessionID	int	Y	Manager Session ID for the Cancellation
ExpiryDate	smalldatetime	Y	Expiry Date of the Bonus
MasterCampaignId	int	Y	If this campaign is a Child it contains the Master campaign's ID, otherwise it's null.
DateVersion	datetime2	N	Last update date

5. Dwh_en.view_BonusBalances

This view contains data about bonus balances.

Field	Type	Nullable	Description
UserID	int	N	User ID
Balance	decimal(19,4)	N	Balance value amount
BonusCampaignID	int	N	Bonus campaign ID
BonusCampaignName	varchar(250)	N	Bonus campaign name
BonusCampaignCode	varchar(50)	N	Bonus campaign code
ValidityStartDate	smalldatetime	N	Validity start date
ValidityEndDate	smalldatetime	N	Validity expiration date
BonusCampaignStatusID	tinyint	N	Bonus campaign status ID
BonusCampaignStatus	varchar(50)	N	Bonus campaign status description

6. Dwh_en.view_CurrentBonusBalances

This view has the same structure of Dwh_en.view_BonusBalances, but it only shows users whose bonus balance is bigger than 0 (one row for every UserID).

Field	Type	Nullable	Description
UserID	int	N	User ID

Balance	decimal(19,4)	N	Balance value
BonusCampaignID	int	N	Bonus campaign ID
BonusCampaignName	varchar(250)	N	Bonus campaign name
BonusCampaignCode	varchar(50)	N	Bonus campaign code
ValidityStartDate	smalldatetime	N	Validity start date
ValidityEndDate	smalldatetime	N	Validity expiration date
BonusCampaignStatusID	tinyint	N	Bonus campaign status ID
BonusCampaignStatus	varchar(50)	N	Bonus campaign status description

7. Dwh_en.view_BonusFreebets

This view contains data about Freebets.

Field	Type	Nullable	Description
FreeBetID	int	N	Freebet ID
UserID	int	Y	User ID
CampaignID	int	N	Bonus campaign ID
InsertDate	datetime	N	Insert Date
Amount	decimal(19,4)	N	Amount
FreeBetStatusId	tinyint	N	Freebet Status ID
FreeBetStatus	varchar(50)	N	Freebet Status
ExpiryDate	datetime	Y	Validity expiration date
CreationCouponId	bigint	Y	ID of the betslip which generated the freebet

Bets

1. Dwh_en.view_Bets

This view contains information about each single bet contained in a betslip. So, for instance, in case of combined bets there could be more than one record.

Field	Type	Nullable	Description
BetslipID	bigint	N	Betslip ID
BetID	bigint	N	Bet ID
Stake	decimal(19,4)	N	Stake amount
Odds	decimal(15,5)	N	Odds value
Grouping	tinyint	N	Number of selections
Status	tinyint	N	Status of the bet
CombinationsNumber	smallint	N	Number of combinations
PotentialWinnings	decimal(19,4)	Y	Potential winnings amount
Winnings	decimal(19,4)	N	Winnings amount
StakeTax	decimal(19,4)	N	Tax on stake amount
WinningsTax	decimal(19,4)	N	Tax on winnings amount
CurrentBonus	decimal(19,4)	Y	Current bonus amount
CurrentBonusGrouping	tinyint	Y	Current bonus grouping

2. Dwh_en.view_Betslips

This view contains all data about betslips and their details.

Field	Type	Nullable	Description
BetslipID	bigint	N	Betslip ID
UserID	int	N	ID of the user, owner of the betslip
BetslipTypeID	tinyint	N	Betslip type ID
BetslipStatusID	tinyint	N	Betslip status ID
OutcomeTypeID	tinyint	N	Outcome type ID
PlacementDate	datetime	N	Betslip placement date
BetslipCode	varchar(25)	N	Unique code of betslip
Stake	decimal(19,4)	N	Betslip stake amount
Reserve	bit	N	Value 1 if the betslip is still pending
CurrencyID	tinyint	N	Id of the currency
CurrencyExchangeID	int	N	Currency exchange ID, used to get the ExchangeRate in a different currency
CreditTypeID	tinyint	N	Transaction type ID
Winnings	decimal(19,4)	N	Winnings amount
UserWinnings	decimal(19,4)	N	Winnings amount without tax
StakeTax	decimal(19,4)	N	Tax on stake amount
WinningsTax	decimal(19,4)	N	Tax on winnings amount
PotentialWinnings	decimal(19,4)	N	Potential winnings amount
AgentPaid	bit	Y	Value 1 if an agent or cashier paid the amount of the winning betslip to the user
UserPaymentDate	smalldatetime	Y	Date of user betslip payment
PlacementUserID	int	Y	ID of the user who placed the betslip (it could also be an agent who placed a betslip for a user)
MinBonus	decimal(19,4)	Y	Minimum bonus amount
MinPotentialWinnings	decimal(19,4)	Y	Minimum potential winnings amount
TaxAmount	decimal(19,4)	Y	Tax amount
TaxPercentage	decimal(19,4)	Y	Tax percentage
BonusCampaignID	int	Y	Bonus campaign ID used to place the bet in case of credit type bonus
RefusalReasonTypeID	tinyint	Y	Refusal reason type ID
MaxOdds	decimal(19,4)	Y	Maximum odds
MinOdds	decimal(19,4)	Y	Minimum odds
MaxPotentialWinnings	decimal(19,4)	Y	Maximum potential winnings amount
TotalOdds	decimal(19,4)	Y	Total odds
PaymentDate	datetime	Y	Date of betslip payment
BetslipType	nvarchar(50)	Y	Betslip type description (Normal, Live, Mixed, etc)
BetslipStatus	varchar(50)	Y	Betslip status description (Open, Paid, etc)
OutcomeType	nvarchar(50)	Y	Outcome type (Winning, Losing, etc)
CreditType	nvarchar(50)	Y	Transaction type description (User Account, Bonus)
ApplicationTypeID	tinyint	Y	Identifier of the application used to place the bet
ApplicationType	nvarchar(50)	Y	Application type (Web Site, Mobile, API, etc)
RefusalReasonType	varchar(50)	Y	Refusal reason type

BetTypeID	tinyint	N	Bet type ID
BetType	nvarchar(50)	Y	Bet type description (Single bet, Multiple, etc)
DateVersion	datetime2	N	Last update date
DetailDateVersion	datetime2	N	Last update date of betslip details

3. Dwh_en.view_BetslipAdditionalData

This view contains betslips additional data (multiple rows for every betslip).

Field	Type	Nullable	Description
BetslipID	bigint	N	Betslip ID
BetslipAdditionalDataTypeID	tinyint	N	Betslip additional data type ID
BetslipAdditionalDataType	varchar(500)	Y	Betslip additional data type
Value	decimal(19,4)	N	Value of the additional data type
Description	varchar(250)	Y	Description of the additional data type
DateVersion	datetime2	N	Last update date

4. Dwh_en.view_ BetslipsIdentifiers

This view contains data about betslips identifiers.

Field	Type	Nullable	Description
BetslipID	bigint	N	Betslip ID
Identifier	char(32)	N	Betslip identifier code
BookmakerID	smallint	N	ID of the bookmaker

5. Dwh_en.view_BookedBetslips

This view contains data about booked betslips.

Field	Type	Nullable	Description
BookedBetslipID	bigint	N	Booked betslip ID
BookedBetslipCode	varchar(255)	N	Betslip code
BookmakerID	smallint	N	Bookmaker ID
BetTypeID	tinyint	N	Bet type ID
BookingDate	datetime	N	When the user booked the betslip
PlacementDate	datetime	Y	When the user placed the betslip
Domain	varchar(50)	Y	Domain name used to book the betslip
BookingNumber	varchar(11)	Y	Booking number
ApplicationTypeID	tinyint	Y	Application type ID
CurrencyID	tinyint	Y	Currency ID
Stake	decimal(19,4)	N	Betslip stake amount
MaxPotentialWinnings	decimal(19,4)	N	Maximum potential winnings amount
MinPotentialWinnings	decimal(19,4)	N	Minimum potential winnings amount
DateVersion	datetime2	N	Last update date

6. Dwh_en.view_BookedBetslipsDetails

This view contains additional details about booked betslips.

Field	Type	Nullable	Description
BookedBetslipID	bigint	N	Booked betslip ID
SubEventCode	varchar	N	Code of the SubEvent
PalimpsestID	tinyint	N	Event Program ID
SubEventID	int	N	SubEvent ID
SubEvent	varchar	N	Description of the SubEvent
SubEventStartDate	datetime	N	When the SubEvent starts
OddsTypeID	int	N	ID of the Odds Type
OddsType	varchar	N	Odds Type description
EventTypeID	smallint	N	Event Type ID
EventType	varchar	N	Description of Event Type
HNDTypeID	tinyint	N	Handicap Type ID
HND	decimal	N	Handicap value
Fixed	tinyint	N	Banker
OddsTypeCode	varchar	N	Code of Odds Type
OddsClass	varchar	N	Odds class description

7. Dwh_en.view_HistoricalBetslips

This view contains betslips history date. For each betslip, you can find one row per every betslip status change.

Field	Type	Nullable	Description
BetslipID	bigint	N	Betslip ID
BetslipStatusID	tinyint	N	Betslip status ID
BetslipStatus	varchar(50)	Y	Betslip status description
Date	datetime	N	Date of status change

8. Dwh_en.view_BetslipsOdds

This view is about the connection between betslips and events/subevents/odds data.

Field	**Type**	**Nullable**	**Description**
BetslipID	bigint	N	Betslip ID
OddsID	bigint	N	Odds ID
OddsTypeID	int	N	OddsTypeID
SubEventID	int	N	SubeEventID
EventID	int	N	Event ID
Banker	tinyint	N	The selection which must win to guarantee a return
BetslipDetailOutcomeID	tinyint	N	BetslipDetailOutcome ID

BetslipDetailOutcome	nvarchar(100)	N	Description of the BetslipDetailOutcome
RiskFactor	decimal	N	Value of the odds distribution inside the betslip
BookmakerID	smallint	N	Bookmaker ID
HND	decimal(5,2)	Y	Handicap value

GAMES

1. Dwh_en.view_Casino

This view contains data about casino providers, grouped by provider, user and date.

Field	Type	Nullable	Description
CasinoID	int	N	CasinoID
ProviderID	smallint	N	Provider ID
ProviderName	varchar(50)	Y	Provider name on iSBets
BookmakerProviderName	varchar(100)	Y	Provider name configured for the bookmaker
CasinoTypeID	tinyint	N	Casino type ID
CasinoType	varchar(100)	Y	Casino type (Used: Casino, Virtual Games, etc)
UserID	int	N	User ID
PlacementDate	date	N	Placement date of the casino bets
BetsNumber	int	Y	Number of bets
Stake	decimal(19,4)	N	Stake amount
Winnings	decimal(19,4)	N	Winnings amount
Tips	decimal(19,4)	N	Tips amount
Tournament	decimal(19,4)	N	Tournament amount
Bonus	decimal(19,4)	N	Bonus amount
Jackpot	decimal(19,4)	N	Jackpot amount
InsertDate	smalldatetime	N	When the record was inserted
CurrencyID	tinyint	N	Currency ID
ThirdpartiesStake	decimal(19,4)	N	Third parties stake amount
ThirdpartiesWinnings	decimal(19,4)	N	Third parties winnings amount
ThirdpartiesTips	decimal(19,4)	N	Third parties tips amount
ThirdpartiesTournament	decimal(19,4)	N	Third parties tournament amount
ThirdpartiesBonus	decimal(19,4)	N	Third parties bonus amount
ThirdpartiesJackpot	decimal(19,4)	N	Third parties jackpot amount
ThirdpartiesCurrencyID	smallint	N	Third parties currency ID
ThirdpartiesCurrencyCode	varchar(10)	Y	Third parties currency code
ThirdpartiesCurrency	varchar(100)	Y	Third parties currency
CurrencyExchangeID	int	N	Currency exchange ID, used to get the ExchangeRate in a different currency
RowVersion	binary	N	SQL row version
JackpotContribution	decimal(19,4)	N	Jackpot contribution amount
ThirdpartiesJackpotContribution	decimal(19,4)	N	Third parties jackpot contribution amount

COMMISSIONS

1. Dwh_en.view_SportDirectCommissions

This view contains sport commission data of agents and their direct sub-agents.

Field	Type	Nullable	Description
CommissionID	int	N	Commission ID
UserID	int	N	ID of the user owner of the commission
Stake	decimal(19,4)	N	Total stake amount on the commission period
Winnings	decimal(19,4)	N	Total winnings amount on the commission period
Commissions	decimal(19,4)	N	Commission value
CreationDate	datetime	N	Commission date
DateStart	datetime	N	Start commission period
DateEnd	datetime	N	End commission period
CommissionProduct	varchar(50)	N	Commission product name
CommissionType	varchar(50)	N	Commission type (the “algorithm” used to calculate the commission)
CommissionCategory	varchar(50)	N	Commission category (direct, network)
CommissionStatus	varchar(50)	N	Commission status

2. Dwh_en.view_SportNetworkCommissions

This view contains network sport commission data of agents and their sub-agents Network.

Field	Type	Nullable	Description
CommissionID	int	N	Commission ID
UserID	int	N	ID of the user owner of the commission
Stake	decimal(19,4)	N	Network total stake amount on the commission period
Winnings	decimal(19,4)	N	Network total winnings amount on the commission period
PaidBS	decimal(19,4)	N	Direct Commissions paid to SubAgents
PaidNetwork	decimal(19,4)	N	Network Commissions paid to SubAgents
Commissions	decimal(19,4)	N	Commission value
CreationDate	datetime	N	Commission date
DateStart	datetime	N	Start commission period
DateEnd	datetime	N	End commission period
CommissionProduct	varchar(50)	N	Commission product name
CommissionType	varchar(50)	N	Commission type (the “algorithm” used to calculate the commission)
CommissionCategory	varchar(50)	N	Commission category (direct, network)
CommissionStatus	varchar(50)	N	Commission status (only Paid so far)

3. Dwh_en.view_CasinoDirectCommissions

This view contains casino commission data of agents and their direct sub-agents.

Field	Type	Nullable	Description
CommissionID	int	N	Commission ID
UserID	int	N	ID of the user owner of the commission
Stake	decimal(19,4)	N	Total stake amount on the commission period
Winnings	decimal(19,4)	N	Total winnings amount on the commission period
Commissions	decimal(19,4)	N	Commission value
CreationDate	datetime	N	Commission date
DateStart	datetime	N	Start commission period
DateEnd	datetime	N	End commission period
CommissionProduct	varchar(50)	N	Commission product name
CommissionType	varchar(50)	N	Commission type (the “algorithm” used to calculate the commission)
CommissionCategory	varchar(50)	N	Commission category (direct, network)
CommissionStatus	varchar(50)	N	Commission status

4. Dwh_en.view_CasinoNetworkCommissions

This view contains casino commissions data of agents and their sub-agents network.

Field	Type	Nullable	Description
CommissionID	int	N	Commission ID
UserID	int	N	ID of the user owner of the commission
Played	decimal(19,4)	N	Network total amount played on the commission period
Winnings	decimal(19,4)	N	Network total winnings amount on the commission period
PaidBS	decimal(19,4)	N	Direct Commissions paid to SubAgents
PaidNetwork	decimal(19,4)	N	Network Commissions paid to SubAgents
Commissions	decimal(19,4)	N	Commission value
CreationDate	datetime	N	Commission date
DateStart	datetime	N	Start commission period
DateEnd	datetime	N	End commission period
CommissionProduct	varchar(50)	N	Commission product name
CommissionType	varchar(50)	N	Commission type (the “algorithm” used to calculate the commission)
CommissionCategory	varchar(50)	N	Commission category (direct, network)
CommissionStatus	varchar(50)	N	Commission status

5. Dwh_en.view_PokerDirectCommissions

This view contains poker commissions data of agents and their direct sub-agents.

Field	Type	Nullable	Description
CommissionID	int	N	Commission ID

UserID	int	N	ID of the user owner of the commission
Rake	decimal(19,4)	N	Total rake amount on the commission period
Tournament	decimal(19,4)	N	Total tournament amount on the commission period
Commissions	decimal(19,4)	N	Commission value
CreationDate	datetime	N	Commission date
DateStart	datetime	N	Start commission period
DateEnd	datetime	N	End commission period
CommissionProduct	varchar(50)	N	Commission product name
CommissionType	varchar(50)	N	Commission type (the "algorithm" used to calculate the commission)
CommissionCategory	varchar(50)	N	Commission category (direct, network)
CommissionStatus	varchar(50)	N	Commission status

6. Dwh_en.view_PokerNetworkCommissions

This view contains poker commissions data of agents and their sub-agents network.

Field	Type	Nullable	Description
CommissionID	int	N	Commission ID
UserID	int	N	ID of the user owner of the commission
Rake	decimal(19,4)	N	Network total rake amount on the commission period
PaidBS	decimal(19,4)	N	Direct Commissions paid to SubAgents
PaidNetwork	decimal(19,4)	N	Network Commissions paid to SubAgents
Commissions	decimal(19,4)	N	Commission value
CreationDate	datetime	N	Commission date
DateStart	datetime	N	Start commission period
DateEnd	datetime	N	End commission period
CommissionProduct	varchar(50)	N	Commission product name
CommissionType	varchar(50)	N	Commission type (the "algorithm" used to calculate the commission)
CommissionCategory	varchar(50)	N	Commission category (direct, network)
CommissionStatus	varchar(50)	N	Commission status (only Paid so far)

EVENT PROGRAM

1. Dwh_en.view_Sports

This view contains data about sports.

Field	Type	Nullable	Description
SportID	Int	N	Sport ID
Sport	nvarchar(44)	N	Name of the Sport
SportStatusID	tinyint	N	Status ID of the Sport

SportStatus	varchar(50)	N	Description of the Status

2. Dwh_en.view_SportsDetails

This view contains the details of sports.

Field	Type	Nullable	Description
SportID	Int	N	Sport ID
SportTypeID	tinyint	N	ID of the SportType
SportType	nvarchar(100)	N	Name of the SportType

3. Dwh_en.view_Groups

This view contains data about groups.

Field	Type	Nullable	Description
GroupID	Int	N	Group ID
SportID	int	N	Sport ID
Group	nvarchar(255)	N	Name of the Group
GroupStatusID	tinyint	N	Status ID of the Group
GroupStatus	varchar(50)	N	Description of the Status

4. Dwh_en.view_Events

This view contains data about events.

Field	Type	Nullable	Description
EventID	Int	N	Event ID
GroupID	int	N	Group ID
Event	nvarchar(100)	N	Name of the Event
EventStatusID	tinyint	N	Status ID of the Event
EventStatus	varchar(50)	N	Description of the Status
EventTypeID	smallint	N	Type ID of the Event
EventType	nvarchar(100)	N	Description of the Type

5. Dwh_en.view_EventsAdditionalData

This view contains the additional details of events.

Field	Type	Nullable	Description
EventID	Int	N	Event ID
EventAdditionalDataTypeID	smallint	N	AdditionalData ID of the Event
EventAdditionalDataType	nvarchar(100)	N	Description of the AdditionalData
Value	varchar(100)	N	Value of the of the AdditionalData
LastModifiedDate	smalldatetime	N	Last update date

6. Dwh_en.view_SubEvents

This view contains data about subevents.

Field	Type	Nullable	Description
SubEventID	Int	N	SubEvent ID
PublicationCode	int	Y	Number code for the publication of the match
EventID	int	N	Event ID
SubEvent	nvarchar(255)	N	Name of the SubEvent
StartDate	smalldatetime	N	Starting Date of the SubEvent
SubEventStatusID	tinyint	N	Status ID of the SubEvent - Refer to lookup tables
SubEventStatus	varchar(50)	N	Description of the status
EndDate	smalldatetime	Y	Ending Date of the SubEvent

7. Dwh_en.view_SubEventsAdditionalData

This view contains the details of subevents.

Field	Type	Nullable	Description
SubEventID	Int	N	SubEvent ID
SubEventAdditionalDataTypeID	smallint	N	AdditionalData ID of the SubEvent
SubEventAdditionalDataType	nvarchar(100)	N	Description of the AdditionalDAta
Value	varchar(50)	N	Value of the of the AdditionalData
LastModifiedDate	smalldatetime	N	Last update date

8. Dwh_en.view_OddsClasses

This view contains data about odds classes data.

Field	Type	Nullable	Description
OddsClassID	Int	N	OddsClass ID
OddsClass	nvarchar(20)	N	Name of the OddsClass
ShortOddsClass	nvarchar(10)	N	Short Name of the OddsClass
HNDDefaultValue	decimal	N	HND Default Value
Code	varchar(128)	N	Code of the OddsClasses

9. Dwh_en.view_OddsTypes

This view contains data about odds types.

Field	Type	Nullable	Description
OddsTypeID	Int	N	OddsType ID
OddsClassID	int	N	OddsClassID

OddsType	nvarchar(50)	N	Description of the OddsType ID
ShortOddsType	nvarchar(20)	N	Short Description of the OddsType
Code	varchar(128)	N	Code of the OddsTypes
IsWinner	tinyint	N	Flag for Winner events
HNDDefaultValue	decimal(5,2)	N	HND Default Value
OddsTypeStatusID	tinyint	N	OddsTypeStatus ID
OddsTypeStatus	nvarchar(100)	N	Description of the Status of the OddsType
JointWinner	bit	N	If set to 1 the winning of coupon will be split for all the winning Subevents

10. Dwh_en.view_Odds

This view contains all info about odds.

Field	Type	Nullable	Description
OddsID	bigint	N	Odds ID
PalimpsestID	tinyint	N	Event Program identifier
Palimpsest	varchar(50)	N	Name of the Event Program
SubEventID	int	N	Subevent identifier
OddsTypeID	int	N	Identifier of the odds type
Odds	decimal(9,2)	N	Value of the odds
StartDate	smalldatetime	N	Start Date of the validity of the odds
EndDate	smalldatetime	N	End Date of the validity of the odds
OddsStatusID	tinyint	N	Odds Status ID
OddsStatus	varchar(50)	N	Description of the Odds Status
CombinabilityID	tinyint	N	Combinability ID
Combinability	varchar(3)	N	Code of the Combinability
DateVersion	datetime	N	Last update date

Lookup Tables

For an easier understanding of information included in the above views :

1. Application Types

ApplicationTypeID	ApplicationType	ApplicationCode
1	Web Site	NOT RELEVANT
10	Mobile	NOT RELEVANT
12	Api	Contains the value of the field ApplicationCode for all API methods used to place a betslip.

2. Betslip Additional Data Types

BetslipAdditionalDataTypeID	BetslipAdditionalDataType	Usage
8	Application Code	Value set in the ApplicationCode field for the API methods used to place bets
11	Booked betslip ID	Booked betslip ID used to place a betslip
20	MoneyBack	1 if the betslip is a MoneyBack
22	Associated MoneyBack betslip ID	The Betslip ID used to place a MoneyBack
23	Used for a MoneyBack	1 if the betslip was used to place a MoneyBack
29	Placement device ID	Identifier of the device from where the betslip was placed
OTHERS		RESERVED

3. Betslip Statuses

BetslipStatusID	BetslipStatus
1	Under insert
2	Bets inserted
3	Error while inserting
5	Under Evaluation
6	Not accepted during evaluation
7	Withdrawal from user account
8	Government authorization
10	In Progress
30	To validate
40	To be paid
50	Paid - Closed

4. Betslip Types

BetslipTypeID	BetslipType
1	Normal
2	Live
3	Mixed

5. Bet Types

BetTypeID	BetType
1	Single
2	Split
3	Combined
4	Multiple

6. Bonus Campaign Statuses

CampaignStatusID	CampaignStatus

1	Creating
5	Create
10	Simulation
20	Active
30	Pending
40	Accounting
50	Finished
255	Deleted

7. Casino Types

CasinoTypeID	CasinoType
1	Casino
4	Virtual Games

8. Credit Types

CreditTypeID	CreditType
1	User Account
2	Bonus
3	Freebets

9. Currencies

CurrencyID	Currency
1	Euro
11	Naira
13	Ghanian Cedi
18	Zambian Kwacha
27	Ugandan Shilling
31	Kenyan Shilling

10. Currency Exchange Statuses

CurrencyExchangeStatusID	CurrencyExchangeStatus
1	Inserting
2	Active
3	Valid
4	Error

11. Note Types

NoteTypeID	NoteType
1	Normal

2	Reserve

12. Outcome Types

OutcomeTypeID	OutcomeType
1	Winning
2	Losing
3	In Progress
4	Cancelled
100	Closed

13. Transaction Amount Types

TransactionAmountTypeID	TransactionAmountType
1	Positive
2	Negative

14. Transaction Management Statuses

TransactionManagementStatusID	TransactionManagementStatus
1	System transaction
2	Pending
3	Accepted
4	Refused
5	ToBeAutomaticallyAccepted
6	In Progress

15. User Statuses

UserStatusID	UserStatus
1	Enabled
2	Disabled
3	Deleted
4	Be Validated
5	Frozen
6	Error Creating User
7	Read Only

16. User Types

UserTypeID	UserType
0	Users
20	Agents
40	Administrators

100	Commission templates
254	Company

17. Sport, Groups, Events, Subevents, Odds Statuses

StatusID	Description
0	Disabled
1	Enabled
2	Deleted

18. OddsType Statuses

StatusID	Description
1	Enabled
2	Disabled

19. Sport Types

SportTypeID	SportType	CodeSportType
0	None	NonDefinito
1	Soccer	Calcio
2	Basket	Basket
3	Moto Racing	MotoGp
4	Tennis	Tennis
5	Volley	Volley
6	Formula 1	Formula1
7	Cycling	Ciclismo
8	Hockey	Hockey
9	Cricket	Cricket
10	Beach Volley	BeachVolley
11	Handball	Handball
12	Futsal	Futsal
13	Baseball	Baseball
14	Rugby	Rugby
15	Waterpolo	Pallanuoto
16	Golf	Golf
17	Boxing	Boxing
18	Darts	Darts
19	Surf	Surf
20	Skating	Skating
21	American Football	FootballAmericano
22	Alpine Skiing	SciAlpino
23	Nordic Skiing	SciNordico
24	Biathlon	Biathlon

25	Snooker	Snooker
26	Shows	Spettacolo
27	Poker	Poker
28	Ski Jumping	SaltoConGliSci
29	Bandy	Bandy
30	Rugby League	RugbyLeague
31	Curling	Curling
32	Australian Football	FootballAustraliano
33	Table Tennis	TableTennis
34	Aussie Football	AussieFootball
35	Badminton	Badminton
36	Beach Soccer	BeachSoccer
37	Squash	Squash
38	Wintersports	Wintersports
39	Bowls	Bowls
40	Field Hockey	FieldHockey
41	Olympics	Olympics
42	Athletics	Athletics
43	Horse Racing	HorseRacing
44	Soccer Fantasy	Soccer Fantasy

20. Event Types

EventTypeID	EventType
1	Prematch
3	Winner
6	Antepost
10	Live

21. Event Additional Data Types

EventAdditionalDataTypeID	EventAdditionalDataType
64	ImporterCode
75	BetradarMatchID

22. SubEvent Additional Data Types

SubEventAdditionalDataTypeID	SubEventAdditionalDataType
14	Statistic Code
34	ImporterCode

23. BetslipDetailOutcome

BetslipDetailOutcomeID	BetslipDetailOutcome	Enabled

0	In Progress	1
1	Loser	1
2	Cancelled	1
3	Winning	1
4	Clear Event	0
10	Half Winning	1
11	Half Losing	1

24. FreeBet Statuses

FreeBetStatusId	FreeBetStatus
1	ToBeCredited
2	Credited
3	NotCredited
4	Processing
5	Expired
6	Cancelled
7	Used

25. Session Statuses

SessionStateId	SessionState
1	Active
2	Ended
3	In Timeout
4	Expired for new login
5	Forced Logout

26. Application Types

ApplicationTypeId	ApplicationType
1	Web Site
2	Admin Web Site
3	WinApp
4	Service
5	Spider
6	Database
7	Cashier
8	Casinò
9	ThirdParties
10	Mobile
11	Client
12	Api
13	Custom Website
15	ISBetsSolarCommissions

16	ISBetsBetGenius
17	ISBetsSportingSolutions
255	Not Defined

27. Self-exclusion periods

SelfExclusionPeriodId	Number of days
1	15
2	30
3	60
4	90
5	180
6	365
7	730
8	1825

Monitoring the import procedures

You can monitor the DWH imports and always make sure data is up to date by querying the view Cfg.view_ProcessingStatus:

Field	Type	Nullable	Description
PackageName	nvarchar	N	Name of the dtsx import procedure
StatusID	int	N	StatusID of the process
Status	varchar	N	Description of the process status
StartTime	datetime	N	Last start time of import procedure
EndTime	datetime	N	Last end time of import procedure
DurationSecs	float	N	Last duration time (secs)
DurationTot	varchar	N	Last duration (hh-mm-ss format)
NumExecutionsLast24H	int	N	Number of executions in the last 24 hrs
NumSuccessesLast24H	int	N	Number of successful executions in the last 24 hrs
NumExecutionsToday	int	N	Number of today's executions
NumSuccessesToday	int	N	Number of today's successful executions

Using DateVersion for incremental imports

In order to optimize data export from DWH to your system, you can use the dedicated DateVersion field (datetime2(4)).

In fact, the DateVersion field is a datetime2 info about when a record is inserted or updated. This means that, a record R1 with a DateVersion value bigger than another record R2, has been inserted or updated after the last operation on record R2.

This information could be useful when you need to import data incrementally every day from the DWH, avoiding doing full, slow imports everyday which could actually slow down the entire system. After the import phase, it is possible to get the maximum value of the DateVersion field of the records imported. This value can be stored in a configuration table on DB and then used for the next import in order to save only the record inserted or updated after the previous one.

Below there's an example, using SQL Server syntax, about how to use the DateVersion field on the Users view.

Query to be executed at first import:

```
SELECT * FROM [Dwh_en].[view_Users]
```

Query to be executed before the first import:

```
DECLARE @MaxDateVersionUsers AS datetime2(4)
SELECT @MaxDateVersionUsers = MAX(DateVersion) FROM [USERS VIEW]
UPDATE [CONFIGURATION TABLE] SET LastImportedDateVersionUsers = @MaxDateVersionUsers
```

The value of the variable @MaxDateVersionUsers is supposed to be stored in the field MaxDateVersionUsers inside a dedicated configuration table, which is going to be used for the next import.

Query to be executed for the next imports:

You can import new or changed data just by using the DataVersion value previously stored in your configuration table, then it is important to update that value again so that you can successfully use it for the next import.

```
SELECT * FROM [Dwh_en].[view_Users] WHERE DateVersion > LastImportedDateVersionUsers

DECLARE @MaxDateVersionUsers AS datetime2(4)
SELECT @MaxDateVersionUsers = MAX(DateVersion) FROM [USERS VIEW]
UPDATE [CONFIGURATION TABLE] SET LastImportedDateVersionUsers = @MaxDateVersionUsers
```

Query examples

In this section, you can find some examples on how to use the data stored in the DWH to develop your own reports (queries are written using SQL Server language).

1. Bonus

The scenario of this report is about the usage of bonus campaigns. The need is to know which are the most expensive campaigns. The requirements are:

1) Report with a list of bonus campaigns including information about
    a. Stake
    b. Winnings
    c. Number of betslips

   d. Profit
2) The report is just about real online users
3) The most expensive campaigns should be shown at the top

```
SET TRANSACTION ISOLATION LEVEL READ UNCOMMITTED
SELECT
	BB.BonusCampaignID
	,BB.BonusCampaignCode
	,BB.BonusCampaignName
	,BB.BonusCampaignStatus
	,SUM(BS.Stake) AS Stake
	,SUM(BS.Winnings) AS Winnings
	,SUM(BS.Stake - BS.Winnings) AS Profit
	,COUNT(BS.BetslipID) AS NBets
FROM
	Dwh_en.view_Betslips BS
	INNER JOIN Dwh_en.view_Users U
		ON U.UserID = BS.UserID
	INNER JOIN Dwh_en.view_BonusBalances BB
		ON BS.BonusCampaignID = BB.BonusCampaignID AND BS.UserID = BB.UserID
WHERE
	U.BookmakerID = <BookmakerID> --Filter for a specific Bookmaker only
	AND U.TestUser = 0 --Just real users
	AND U.Cashier = 0 --Not cashier users
	AND U.UserTypeID = 0 --Users and not agents
	AND BS.CreditTypeID = 2 --Just betslips paid with bonus wallet
	AND BS.BetslipStatusID = 50 --Betslips paied
	AND BS.OutcomeTypeID = 1 --Winning betslip
GROUP BY
	BB.BonusCampaignID
	,BB.BonusCampaignCode
	,BB.BonusCampaignName
	,BB.BonusCampaignStatus
ORDER BY
	Profit ASC
```

2. Casino

This scenario is about casino. The requirements of this report are:

1) Report with a list of the most profitable providers showing information about
   a. Stake
   b. Winnings
   c. Number of betslips
   d. Profit
2) The report is just about real online users of the company
3) The most profitable provider should appear first

```
SET TRANSACTION ISOLATION LEVEL READ UNCOMMITTED
SELECT
	C.BookmakerProviderName
	,SUM(C.Stake) AS Stake
	,SUM(C.Winnings) AS Winnings
	,SUM(C.Stake - C.Winnings) AS Profit
	,SUM(C.BetsNumber) AS NBets
FROM
```

```
        Dwh_en.view_Casino C
        INNER JOIN Dwh_en.view_Users AS U
                ON C.UserID = U.UserID
WHERE
        C.PlacementDate >= '2017-01-01 00:00:00' --Filter on placemente date
        AND U.BookmakerID = <BookmakerID> --Filter for a specific Bookmaker only
        AND U.TestUser = 0 --Just real users
        AND U.Cashier = 0 --Not cashier users
        AND U.ParentID = 2 --Company ID on iSBets system
        AND U.UserTypeID = 0 --Users and not agents
        AND U.CreationDate >= '2017-01-01 00:00:00' --Filter on user creation date
GROUP BY
        C.BookmakerProviderName
ORDER BY
        Profit DESC
```

3. Transactions

This scenario is about transactions and users' balance. The requirements of this report are:

1) Report with a list of the users registered in 2017 with a balance higher than 1000 Naira and amount of deposits less than 10000 Naira, with this information
    a. User's id, username, name and surname
    b. Balance
    c. Amount deposited
    d. Difference between balance and amount deposited (loss)
2) The report is just about real online users
3) Users with the highest loss shown at the top

```
SET TRANSACTION ISOLATION LEVEL READ UNCOMMITTED
SELECT
        U.UserID
        ,U.Username
        ,U.Name
        ,U.Surname
        ,B.Balance
        ,SUM(T.Amount) AS AmountDeposited
        ,B.Balance - SUM(T.Amount) AS Loss
FROM
        Dwh_en.view_Balances B
        INNER JOIN Dwh_en.view_Users U
                ON B.UserID = U.UserID
        INNER JOIN Dwh_en.view_Transactions T
                ON T.UserID = U.UserID
        INNER JOIN Dwh_en.view_Reasons R
                ON T.ReasonID = R.ReasonID
WHERE
        U.BookmakerID = <BookmakerID> --Filter for a specific Bookmaker only
        AND U.CreationDate >= '2017-01-01 00:00:00' --Filter on user creation date
        AND U.TestUser = 0 --Just real users
        AND U.Cashier = 0 --Not cashier users
        AND U.UserTypeID = 0 --Users and not agents
        AND B.Balance > 1000 --Filter on users' balance
        AND T.TransactionAmountTypeID = 1 --Positive transaction
        AND R.ReasonGroupID = 2 --DepositWithdrawal group
GROUP BY
        U.UserID
```

```
        ,U.Username
        ,U.Name
        ,U.Surname
        ,B.Balance
HAVING
        SUM(T.Amount) < 10000
ORDER BY
        Loss DESC
```

4. Betslips

This scenario is about betslips placed in 2017 and the most profitable combinations. The requirements of this report are:

1) Report grouped and ordered by application type and bet groups
2) The betslips to consider are about the users who have at least one note
3) The betslips to consider are just the ones that entered directly into the system without being managed as pending
4) The betslips are those placed with real wallet
5) The report is just about real online users

```
SET TRANSACTION ISOLATION LEVEL READ UNCOMMITTED
;WITH CTEUsers AS
(
        --Subquery to get just the users with notes
        SELECT
                U.UserID
               ,COUNT(*) AS NNotes
        FROM
                Dwh_en.view_Users U
                INNER JOIN Dwh_en.view_UserNotes UN
                        ON UN.UserID = U.UserID
        WHERE
                U.BookmakerID = <BookmakerID> --Filter for a specific Bookmaker only
                AND U.TestUser = 0 --Just real users
                AND U.Cashier = 0 --Not cashier users
        GROUP BY
                U.UserID
        HAVING COUNT(*) > 0
)
SELECT
        BS.ApplicationType
        ,B.Grouping
        ,SUM(B.Stake) AS Stake
        ,SUM(B.Winnings) AS Winnings
        , SUM(B.Stake - B.Winnings) AS Profit
FROM
        Dwh_en.view_Bets B
        INNER JOIN Dwh_en.view_Betslips BS
                ON B.BetslipID = BS.BetslipID
        INNER JOIN CTEUsers U
                ON U.UserID = BS.UserID
WHERE
        BS.PlacementDate >= '2017-01-01 00:00:00' --filter on placemente date
        AND BS.Reserve = 0 --Betslip that entered in the system witout reserve management
        AND BS.CreditTypeID = 1 --Betslip bet with real wallet
GROUP BY
        BS.ApplicationType
```

```
        ,B.Grouping
ORDER BY
        BS.ApplicationType,
        Profit DESC
```

ISBets_BI_Custom database

ISBets_BI_Custom is an empty database entirely at disposal of our customers that basically consists of synonyms pointing to the main DWH db, which they can use to make queries and create custom stored procedures at their will.

All DWH views are simply replicated on ISBets_BI_Custom and, since the dedicated permission level of our customers' login is set to db_owner on this db, you can freely create your own configuration tables and custom reports there.

FYI dbo.SchemaVersions table is used by iSolutions for db deployment purposes.

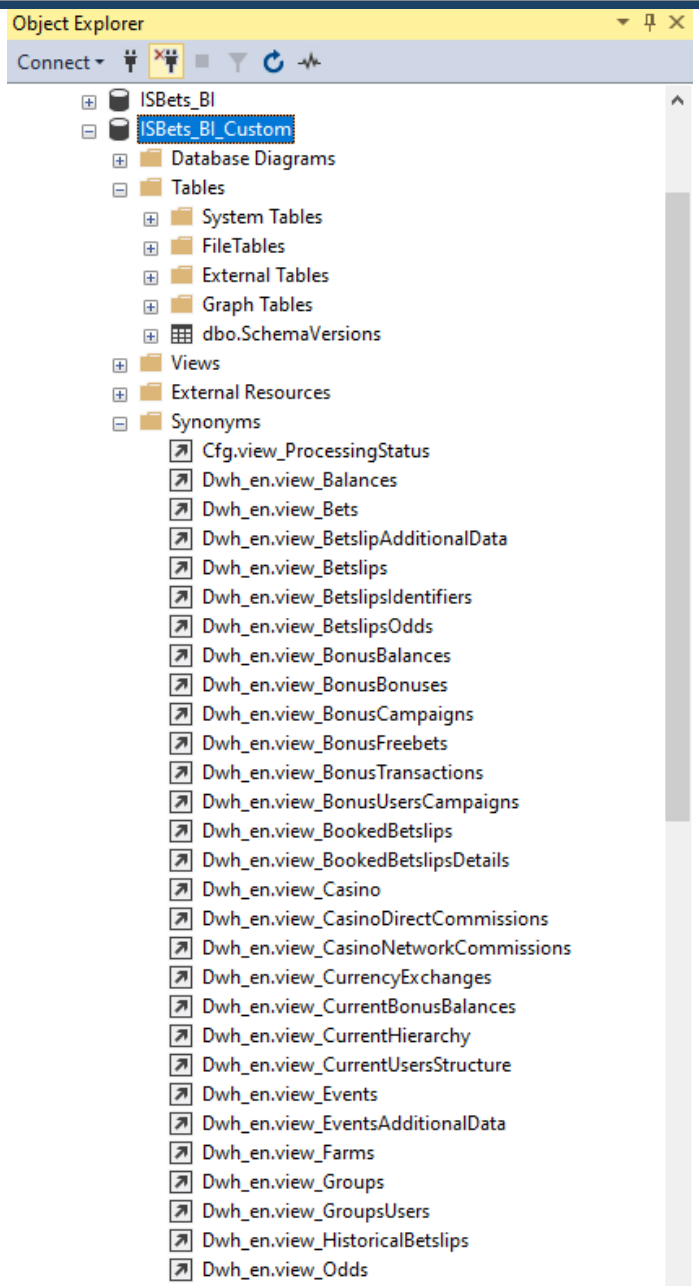
Object Explorer
Connect
ISBets_BI
ISBets_BI_Custom
Database Diagrams
Tables
System Tables
FileTables
External Tables
Graph Tables
dbo.SchemaVersions
Views
External Resources
Synonyms
Cfg.view_ProcessingStatus
Dwh_en.view_Balances
Dwh_en.view_Bets
Dwh_en.view_BetslipAdditionalData
Dwh_en.view_Betslips
Dwh_en.view_BetslipsIdentifiers
Dwh_en.view_BetslipsOdds
Dwh_en.view_BonusBalances
Dwh_en.view_BonusBonuses
Dwh_en.view_BonusCampaigns
Dwh_en.view_BonusFreebets
Dwh_en.view_BonusTransactions
Dwh_en.view_BonusUsersCampaigns
Dwh_en.view_BookedBetslips
Dwh_en.view_BookedBetslipsDetails
Dwh_en.view_Casino
Dwh_en.view_CasinoDirectCommissions
Dwh_en.view_CasinoNetworkCommissions
Dwh_en.view_CurrencyExchanges
Dwh_en.view_CurrentBonusBalances
Dwh_en.view_CurrentHierarchy
Dwh_en.view_CurrentUsersStructure
Dwh_en.view_Events
Dwh_en.view_EventsAdditionalData
Dwh_en.view_Farms
Dwh_en.view_Groups
Dwh_en.view_GroupsUsers
Dwh_en.view_HistoricalBetslips
Dwh_en.view_Odds