

Министерство науки и высшего образования Российской Федерации
федеральное государственное автономное образовательное учреждение высшего
образования
«НАЦИОНАЛЬНЫЙ ИССЛЕДОВАТЕЛЬСКИЙ УНИВЕРСИТЕТ ИТМО»

Отчет

по лабораторной работе №3 «Создание таблиц базы данных PostgreSQL. Заполнение
таблиц рабочими данными»

по дисциплине «Проектирование и реализация баз данных»

Автор: Цыпандин А.П.

Факультет: ИКТ

Группа: К3239

Преподаватель: Говорова М.М.



Санкт-Петербург 2023

Оглавление

| | |
|---|---|
| ЦЕЛЬ РАБОТЫ..... | 3 |
| ПРАКТИЧЕСКОЕ ЗАДАНИЕ | 3 |
| ВАРИАНТ 14. БД «СЛУЖБА ЗАКАЗА ТАКСИ»..... | 3 |
| ВЫПОЛНЕНИЕ | 3 |
| Нотация IDEF1X и ЧЕНА-КИРИЛЛОВА | 5 |
| ВЫВОД | 4 |

Цель работы

Овладеть практическими навыками создания таблиц базы данных PostgreSQL 1X, заполнения их рабочими данными, резервного копирования и восстановления БД.


Практическое задание

1. Создать базу данных с использованием pgAdmin 4 (согласно индивидуальному заданию).
2. Создать схему в составе базы данных.
3. Создать таблицы базы данных.
4. Установить ограничения на данные: *Primary Key*, *Unique*, *Check*, *Foreign Key*.
5. Заполнить таблицы БД рабочими данными.
6. Создать резервную копию БД.
7. Восстановить БД.

Выполнение работы

Название БД: Сервис для заказа такси.

Схема логической модели данных:

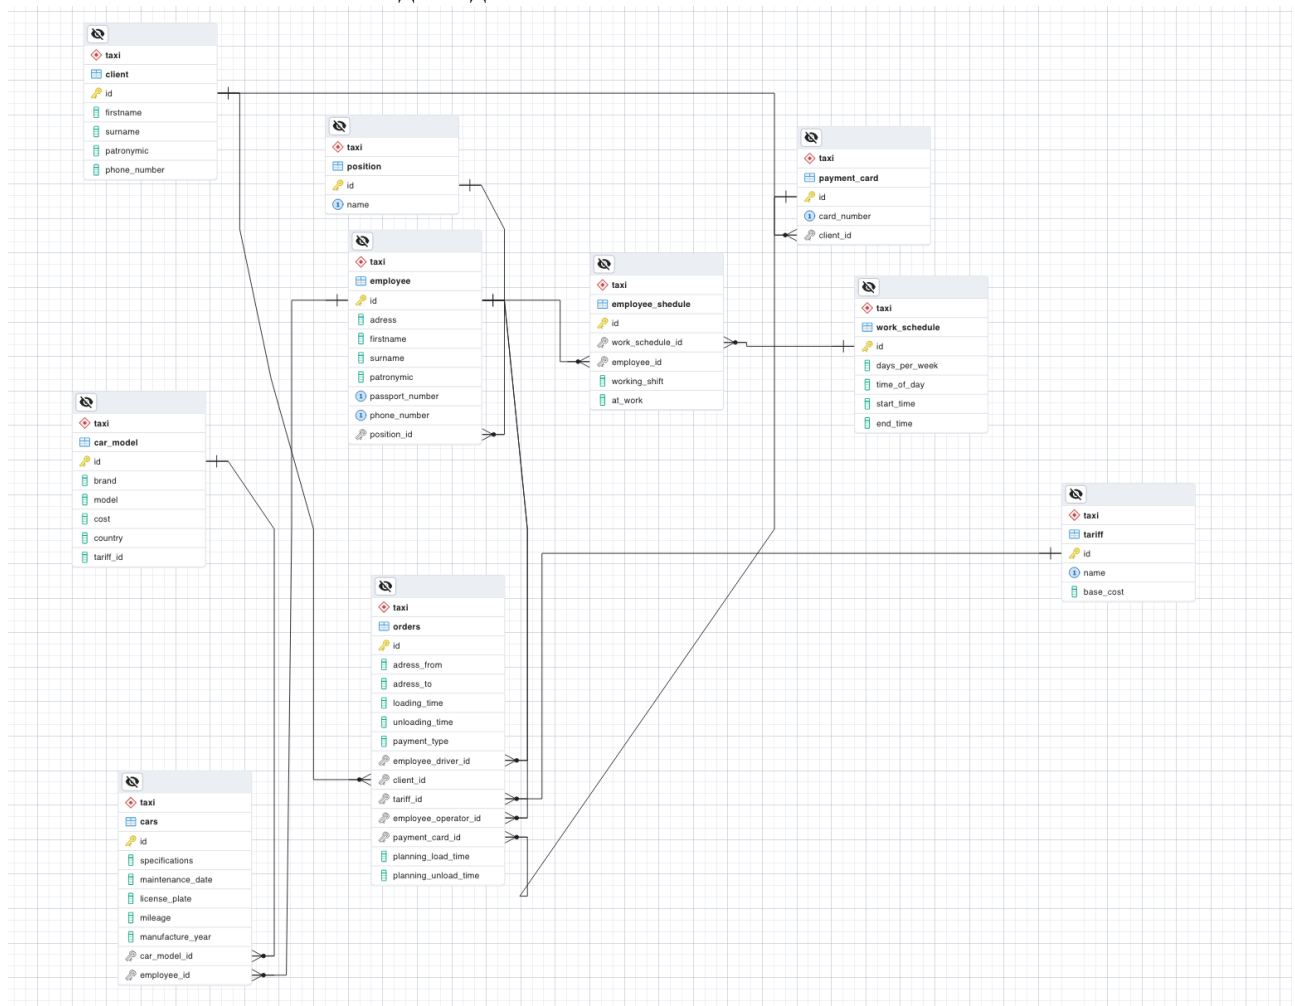

Dump со скриптами работы с БД :

```
--
-- PostgreSQL database dump
--

-- Dumped from database version 15.1 (Debian 15.1-1.pgdg110+1)
-- Dumped by pg_dump version 16.0

-- Started on 2023-12-27 17:13:26 MSK

SET statement_timeout = 0;
SET lock_timeout = 0;
SET idle_in_transaction_session_timeout = 0;
SET client_encoding = 'UTF8';
SET standard_conforming_strings = on;
SELECT pg_catalog.set_config('search_path', '', false);
SET check_function_bodies = false;
SET xmloption = content;
SET client_min_messages = warning;
SET row_security = off;

--
-- TOC entry 3453 (class 1262 OID 16388)
-- Name: Taxi_service; Type: DATABASE; Schema: -; Owner: postgres
--

CREATE DATABASE "Taxi_service" WITH TEMPLATE = template0 ENCODING = 'UTF8'
LOCALE_PROVIDER = libc LOCALE = 'en_US.utf8';

ALTER DATABASE "Taxi_service" OWNER TO postgres;

\connect "Taxi_service"

SET statement_timeout = 0;
SET lock_timeout = 0;
SET idle_in_transaction_session_timeout = 0;
SET client_encoding = 'UTF8';
SET standard_conforming_strings = on;
SELECT pg_catalog.set_config('search_path', '', false);
SET check_function_bodies = false;
SET xmloption = content;
SET client_min_messages = warning;
SET row_security = off;

--
-- TOC entry 6 (class 2615 OID 16393)
-- Name: taxi; Type: SCHEMA; Schema: -; Owner: postgres
--

CREATE SCHEMA taxi;

ALTER SCHEMA taxi OWNER TO postgres;

SET default_tablespace = '';

SET default_table_access_method = heap;

--
-- TOC entry 224 (class 1259 OID 16436)
-- Name: car_model; Type: TABLE; Schema: taxi; Owner: postgres
--

CREATE TABLE taxi.car_model (
    id bigint NOT NULL,
    brand character varying NOT NULL,
    model character varying NOT NULL,
    cost bigint NOT NULL,
    country character varying NOT NULL,
```

```
    tariff_id bigint
);
```

```
ALTER TABLE taxi.car_model OWNER TO postgres;
```

```
--
-- TOC entry 223 (class 1259 OID 16435)
-- Name: car_model_id_seq; Type: SEQUENCE; Schema: taxi; Owner: postgres
--
```

```
CREATE SEQUENCE taxi.car_model_id_seq
    START WITH 1
    INCREMENT BY 1
    NO MINVALUE
    NO MAXVALUE
    CACHE 1;
```

```
ALTER SEQUENCE taxi.car_model_id_seq OWNER TO postgres;
```

```
--
-- TOC entry 3454 (class 0 OID 0)
-- Dependencies: 223
-- Name: car_model_id_seq; Type: SEQUENCE OWNED BY; Schema: taxi; Owner: postgres
--
```

```
ALTER SEQUENCE taxi.car_model_id_seq OWNED BY taxi.car_model.id;
```

```
--
-- TOC entry 226 (class 1259 OID 16443)
-- Name: cars; Type: TABLE; Schema: taxi; Owner: postgres
--
```

```
CREATE TABLE taxi.cars (
    id bigint NOT NULL,
    specifications character varying NOT NULL,
    maintenance_date date NOT NULL,
    license_plate character(7) NOT NULL,
    mileage bigint NOT NULL,
    manufacture_year date NOT NULL,
    car_model_id bigint NOT NULL,
    employee_id bigint NOT NULL
);
```

```
ALTER TABLE taxi.cars OWNER TO postgres;
```

```
--
-- TOC entry 3455 (class 0 OID 0)
-- Dependencies: 226
-- Name: COLUMN cars.mileage; Type: COMMENT; Schema: taxi; Owner: postgres
--
```

```
COMMENT ON COLUMN taxi.cars.mileage IS 'km';
```

```
--
-- TOC entry 225 (class 1259 OID 16442)
-- Name: cars_id_seq; Type: SEQUENCE; Schema: taxi; Owner: postgres
--
```

```
CREATE SEQUENCE taxi.cars_id_seq
    START WITH 1
    INCREMENT BY 1
    NO MINVALUE
    NO MAXVALUE
    CACHE 1;
```

```
ALTER SEQUENCE taxi.cars_id_seq OWNER TO postgres;
```

```
--  
-- TOC entry 3456 (class 0 OID 0)  
-- Dependencies: 225  
-- Name: cars_id_seq; Type: SEQUENCE OWNED BY; Schema: taxi; Owner: postgres  
--
```

```
ALTER SEQUENCE taxi.cars_id_seq OWNED BY taxi.cars.id;
```

```
--  
-- TOC entry 216 (class 1259 OID 16398)  
-- Name: client; Type: TABLE; Schema: taxi; Owner: postgres  
--
```

```
CREATE TABLE taxi.client (  
    id bigint NOT NULL,  
    firstname character varying(127) NOT NULL,  
    surname character varying(127) NOT NULL,  
    patronymic character varying(127),  
    phone_number character(11) NOT NULL  
);
```

```
ALTER TABLE taxi.client OWNER TO postgres;
```

```
--  
-- TOC entry 215 (class 1259 OID 16397)  
-- Name: client_id_seq; Type: SEQUENCE; Schema: taxi; Owner: postgres  
--
```

```
CREATE SEQUENCE taxi.client_id_seq  
    START WITH 1  
    INCREMENT BY 1  
    NO MINVALUE  
    NO MAXVALUE  
    CACHE 1;
```

```
ALTER SEQUENCE taxi.client_id_seq OWNER TO postgres;
```

```
--  
-- TOC entry 3457 (class 0 OID 0)  
-- Dependencies: 215  
-- Name: client_id_seq; Type: SEQUENCE OWNED BY; Schema: taxi; Owner: postgres  
--
```

```
ALTER SEQUENCE taxi.client_id_seq OWNED BY taxi.client.id;
```

```
--  
-- TOC entry 222 (class 1259 OID 16427)  
-- Name: employee; Type: TABLE; Schema: taxi; Owner: postgres  
--
```

```
CREATE TABLE taxi.employee (  
    id bigint NOT NULL,  
    adress character varying NOT NULL,  
    firstname character varying(127) NOT NULL,  
    surname character varying(127) NOT NULL,  
    patronymic character varying(127),  
    passport_number character(10) NOT NULL,  
    phone_number character(11) NOT NULL,  
    position_id bigint NOT NULL  
);
```

```
ALTER TABLE taxi.employee OWNER TO postgres;
```

```
--
```

```
-- TOC entry 221 (class 1259 OID 16426)
-- Name: employee_id_seq; Type: SEQUENCE; Schema: taxi; Owner: postgres
--
```

```
CREATE SEQUENCE taxi.employee_id_seq
  START WITH 1
  INCREMENT BY 1
  NO MINVALUE
  NO MAXVALUE
  CACHE 1;
```

```
ALTER SEQUENCE taxi.employee_id_seq OWNER TO postgres;
```

```
--
-- TOC entry 3458 (class 0 OID 0)
-- Dependencies: 221
-- Name: employee_id_seq; Type: SEQUENCE OWNED BY; Schema: taxi; Owner: postgres
--
```

```
ALTER SEQUENCE taxi.employee_id_seq OWNED BY taxi.employee.id;
```

```
--
-- TOC entry 233 (class 1259 OID 25148)
-- Name: employee_schedule; Type: TABLE; Schema: taxi; Owner: postgres
--
```

```
CREATE TABLE taxi.employee_schedule (
  id bigint NOT NULL,
  work_schedule_id bigint NOT NULL,
  employee_id bigint NOT NULL,
  at_work boolean NOT NULL
);
```

```
ALTER TABLE taxi.employee_schedule OWNER TO postgres;
```

```
--
-- TOC entry 234 (class 1259 OID 25151)
-- Name: employee_schedule_id_seq; Type: SEQUENCE; Schema: taxi; Owner: postgres
--
```

```
CREATE SEQUENCE taxi.employee_schedule_id_seq
  START WITH 1
  INCREMENT BY 1
  NO MINVALUE
  NO MAXVALUE
  CACHE 1;
```

```
ALTER SEQUENCE taxi.employee_schedule_id_seq OWNER TO postgres;
```

```
--
-- TOC entry 3459 (class 0 OID 0)
-- Dependencies: 234
-- Name: employee_schedule_id_seq; Type: SEQUENCE OWNED BY; Schema: taxi; Owner: postgres
--
```

```
ALTER SEQUENCE taxi.employee_schedule_id_seq OWNED BY taxi.employee_schedule.id;
```

```
--
-- TOC entry 232 (class 1259 OID 16530)
-- Name: orders; Type: TABLE; Schema: taxi; Owner: postgres
--
```

```
CREATE TABLE taxi.orders (
  id bigint NOT NULL,
  address_from character varying NOT NULL,
  address_to character varying NOT NULL,
```

```

loading_time character varying NOT NULL,
unloading_time character varying NOT NULL,
payment_type character varying NOT NULL,
employee_driver_id bigint NOT NULL,
client_id bigint NOT NULL,
tariff_id bigint NOT NULL,
employee_operator_id bigint NOT NULL,
payment_card_id bigint NOT NULL,
planning_load_time character varying,
planning_unload_time character varying
);

ALTER TABLE taxi.orders OWNER TO postgres;

```

```

--
-- TOC entry 231 (class 1259 OID 16529)
-- Name: orders_id_seq; Type: SEQUENCE; Schema: taxi; Owner: postgres
--

```

```

CREATE SEQUENCE taxi.orders_id_seq
START WITH 1
INCREMENT BY 1
NO MINVALUE
NO MAXVALUE
CACHE 1;

```

```

ALTER SEQUENCE taxi.orders_id_seq OWNER TO postgres;

```

```

--
-- TOC entry 3460 (class 0 OID 0)
-- Dependencies: 231
-- Name: orders_id_seq; Type: SEQUENCE OWNED BY; Schema: taxi; Owner: postgres
--

```

```

ALTER SEQUENCE taxi.orders_id_seq OWNED BY taxi.orders.id;

```

```

--
-- TOC entry 218 (class 1259 OID 16405)
-- Name: payment_card; Type: TABLE; Schema: taxi; Owner: postgres
--

```

```

CREATE TABLE taxi.payment_card (
id bigint NOT NULL,
card_number character(16) NOT NULL,
client_id bigint NOT NULL
);

```

```

ALTER TABLE taxi.payment_card OWNER TO postgres;

```

```

--
-- TOC entry 217 (class 1259 OID 16404)
-- Name: payment_card_id_seq; Type: SEQUENCE; Schema: taxi; Owner: postgres
--

```

```

CREATE SEQUENCE taxi.payment_card_id_seq
START WITH 1
INCREMENT BY 1
NO MINVALUE
NO MAXVALUE
CACHE 1;

```

```

ALTER SEQUENCE taxi.payment_card_id_seq OWNER TO postgres;

```

```

--
-- TOC entry 3461 (class 0 OID 0)
-- Dependencies: 217

```



```

-- Name: payment_card_id_seq; Type: SEQUENCE OWNED BY; Schema: taxi; Owner: postgres
--

ALTER SEQUENCE taxi.payment_card_id_seq OWNED BY taxi.payment_card.id;


--
-- TOC entry 220 (class 1259 OID 16418)
-- Name: position; Type: TABLE; Schema: taxi; Owner: postgres
--

CREATE TABLE taxi."position" (
    id bigint NOT NULL,
    name character varying NOT NULL
);

ALTER TABLE taxi."position" OWNER TO postgres;


--
-- TOC entry 219 (class 1259 OID 16417)
-- Name: position_id_seq; Type: SEQUENCE; Schema: taxi; Owner: postgres
--

CREATE SEQUENCE taxi.position_id_seq
    START WITH 1
    INCREMENT BY 1
    NO MINVALUE
    NO MAXVALUE
    CACHE 1;

ALTER SEQUENCE taxi.position_id_seq OWNER TO postgres;


--
-- TOC entry 3462 (class 0 OID 0)
-- Dependencies: 219
-- Name: position_id_seq; Type: SEQUENCE OWNED BY; Schema: taxi; Owner: postgres
--

ALTER SEQUENCE taxi.position_id_seq OWNED BY taxi."position".id;


--
-- TOC entry 228 (class 1259 OID 16479)
-- Name: tariff; Type: TABLE; Schema: taxi; Owner: postgres
--

CREATE TABLE taxi.tariff (
    id bigint NOT NULL,
    name character varying NOT NULL,
    base_cost bigint NOT NULL
);

ALTER TABLE taxi.tariff OWNER TO postgres;


--
-- TOC entry 227 (class 1259 OID 16478)
-- Name: tariff_id_seq; Type: SEQUENCE; Schema: taxi; Owner: postgres
--

CREATE SEQUENCE taxi.tariff_id_seq
    START WITH 1
    INCREMENT BY 1
    NO MINVALUE
    NO MAXVALUE
    CACHE 1;

ALTER SEQUENCE taxi.tariff_id_seq OWNER TO postgres;

```

```
--
-- TOC entry 3463 (class 0 OID 0)
-- Dependencies: 227
-- Name: tariff_id_seq; Type: SEQUENCE OWNED BY; Schema: taxi; Owner: postgres
--
```

```
ALTER SEQUENCE taxi.tariff_id_seq OWNED BY taxi.tariff.id;
```

```
--
-- TOC entry 230 (class 1259 OID 16511)
-- Name: work_schedule; Type: TABLE; Schema: taxi; Owner: postgres
--
```

```
CREATE TABLE taxi.work_schedule (
    id bigint NOT NULL,
    days_per_week character varying NOT NULL,
    time_of_day character varying NOT NULL,
    start_time time without time zone NOT NULL,
    end_time time without time zone NOT NULL
);
```

```
ALTER TABLE taxi.work_schedule OWNER TO postgres;
```

```
--
-- TOC entry 229 (class 1259 OID 16510)
-- Name: work_schedule_id_seq; Type: SEQUENCE; Schema: taxi; Owner: postgres
--
```

```
CREATE SEQUENCE taxi.work_schedule_id_seq
    START WITH 1
    INCREMENT BY 1
    NO MINVALUE
    NO MAXVALUE
    CACHE 1;
```

```
ALTER SEQUENCE taxi.work_schedule_id_seq OWNER TO postgres;
```

```
--
-- TOC entry 3464 (class 0 OID 0)
-- Dependencies: 229
-- Name: work_schedule_id_seq; Type: SEQUENCE OWNED BY; Schema: taxi; Owner: postgres
--
```

```
ALTER SEQUENCE taxi.work_schedule_id_seq OWNED BY taxi.work_schedule.id;
```

```
--
-- TOC entry 3226 (class 2604 OID 16439)
-- Name: car_model id; Type: DEFAULT; Schema: taxi; Owner: postgres
--
```

```
ALTER TABLE ONLY taxi.car_model ALTER COLUMN id SET DEFAULT
nextval('taxi.car_model_id_seq':regclass);
```

```
--
-- TOC entry 3227 (class 2604 OID 16446)
-- Name: cars id; Type: DEFAULT; Schema: taxi; Owner: postgres
--
```

```
ALTER TABLE ONLY taxi.cars ALTER COLUMN id SET DEFAULT nextval('taxi.cars_id_seq':regclass);
```

```
--
-- TOC entry 3222 (class 2604 OID 16401)
-- Name: client id; Type: DEFAULT; Schema: taxi; Owner: postgres
--
```

```
ALTER TABLE ONLY taxi.client ALTER COLUMN id SET DEFAULT nextval('taxi.client_id_seq'::regclass);
```

```
--  
-- TOC entry 3225 (class 2604 OID 16430)  
-- Name: employee id; Type: DEFAULT; Schema: taxi; Owner: postgres  
--
```

```
ALTER TABLE ONLY taxi.employee ALTER COLUMN id SET DEFAULT  
nextval('taxi.employee_id_seq'::regclass);
```

```
--  
-- TOC entry 3231 (class 2604 OID 25152)  
-- Name: employee_schedule id; Type: DEFAULT; Schema: taxi; Owner: postgres  
--
```

```
ALTER TABLE ONLY taxi.employee_schedule ALTER COLUMN id SET DEFAULT  
nextval('taxi.employee_schedule_id_seq'::regclass);
```

```
--  
-- TOC entry 3230 (class 2604 OID 16533)  
-- Name: orders id; Type: DEFAULT; Schema: taxi; Owner: postgres  
--
```

```
ALTER TABLE ONLY taxi.orders ALTER COLUMN id SET DEFAULT nextval('taxi.orders_id_seq'::regclass);
```

```
--  
-- TOC entry 3223 (class 2604 OID 16408)  
-- Name: payment_card id; Type: DEFAULT; Schema: taxi; Owner: postgres  
--
```

```
ALTER TABLE ONLY taxi.payment_card ALTER COLUMN id SET DEFAULT  
nextval('taxi.payment_card_id_seq'::regclass);
```

```
--  
-- TOC entry 3224 (class 2604 OID 16421)  
-- Name: position id; Type: DEFAULT; Schema: taxi; Owner: postgres  
--
```

```
ALTER TABLE ONLY taxi."position" ALTER COLUMN id SET DEFAULT  
nextval('taxi.position_id_seq'::regclass);
```

```
--  
-- TOC entry 3228 (class 2604 OID 16482)  
-- Name: tariff id; Type: DEFAULT; Schema: taxi; Owner: postgres  
--
```

```
ALTER TABLE ONLY taxi.tariff ALTER COLUMN id SET DEFAULT nextval('taxi.tariff_id_seq'::regclass);
```

```
--  
-- TOC entry 3229 (class 2604 OID 16514)  
-- Name: work_schedule id; Type: DEFAULT; Schema: taxi; Owner: postgres  
--
```

```
ALTER TABLE ONLY taxi.work_schedule ALTER COLUMN id SET DEFAULT  
nextval('taxi.work_schedule_id_seq'::regclass);
```

```
--  
-- TOC entry 3437 (class 0 OID 16436)  
-- Dependencies: 224  
-- Data for Name: car_model; Type: TABLE DATA; Schema: taxi; Owner: postgres  
--
```

```

INSERT INTO taxi.car_model (id, brand, model, cost, country, tariff_id) VALUES (1, 'toyota', 'silvia s15', 1000000, 'Japan', 1);
INSERT INTO taxi.car_model (id, brand, model, cost, country, tariff_id) VALUES (2, 'subaru', 'impreza', 900000, 'Japan', 1);
INSERT INTO taxi.car_model (id, brand, model, cost, country, tariff_id) VALUES (3, 'mitsubishi', 'lancer', 700000, 'Japan', 1);
INSERT INTO taxi.car_model (id, brand, model, cost, country, tariff_id) VALUES (4, 'BMW', 'X6', 1500000, 'Germany', 1);
INSERT INTO taxi.car_model (id, brand, model, cost, country, tariff_id) VALUES (5, 'VAZ', '21083', 240000, 'Russia', 1);
INSERT INTO taxi.car_model (id, brand, model, cost, country, tariff_id) VALUES (6, 'toyota', 'celica', 650000, 'Japan', 1);
INSERT INTO taxi.car_model (id, brand, model, cost, country, tariff_id) VALUES (7, 'Nissan', 'SkyLine', 450000, 'Japan', 1);
INSERT INTO taxi.car_model (id, brand, model, cost, country, tariff_id) VALUES (8, 'peugot', '206', 600000, 'France', 1);
INSERT INTO taxi.car_model (id, brand, model, cost, country, tariff_id) VALUES (9, 'mercedes', 's-class', 4500000, 'Germany', 2);

```

```

--
-- TOC entry 3439 (class 0 OID 16443)
-- Dependencies: 226
-- Data for Name: cars; Type: TABLE DATA; Schema: taxi; Owner: postgres
--

```

```

INSERT INTO taxi.cars (id, specifications, maintenance_date, license_plate, mileage, manufacture_year, car_model_id, employee_id) VALUES (1, 'Motor 1.8l; Manual', '2020-10-09', 'Я497ЧЗ ', 264051, '2001-10-01', 1, 1);
INSERT INTO taxi.cars (id, specifications, maintenance_date, license_plate, mileage, manufacture_year, car_model_id, employee_id) VALUES (2, 'Motor 2.2l; Manual', '2023-12-27', 'III433ЖР ', 231002, '2007-11-20', 2, 2);
INSERT INTO taxi.cars (id, specifications, maintenance_date, license_plate, mileage, manufacture_year, car_model_id, employee_id) VALUES (3, 'Motor 2.2l; Manual', '2023-12-07', 'II745JIИ ', 81633, '2010-01-12', 3, 3);
INSERT INTO taxi.cars (id, specifications, maintenance_date, license_plate, mileage, manufacture_year, car_model_id, employee_id) VALUES (4, 'Motor 2.5l; Manual', '2021-01-21', 'P970СЖ ', 194755, '2011-10-06', 5, 4);
INSERT INTO taxi.cars (id, specifications, maintenance_date, license_plate, mileage, manufacture_year, car_model_id, employee_id) VALUES (5, 'Motor 2.2l; Manual', '2021-08-09', 'Я216ВЩ ', 286013, '2021-08-29', 5, 19);
INSERT INTO taxi.cars (id, specifications, maintenance_date, license_plate, mileage, manufacture_year, car_model_id, employee_id) VALUES (6, 'Motor 2.2l; Manual', '2023-09-11', 'K495ЫД ', 292149, '2020-01-21', 1, 20);
INSERT INTO taxi.cars (id, specifications, maintenance_date, license_plate, mileage, manufacture_year, car_model_id, employee_id) VALUES (7, 'Motor 1.5l; Manual', '2020-09-14', 'A448ИХ ', 138794, '2015-12-04', 3, 21);
INSERT INTO taxi.cars (id, specifications, maintenance_date, license_plate, mileage, manufacture_year, car_model_id, employee_id) VALUES (8, 'Motor 2.2l; Manual', '2021-11-24', 'X687КИ ', 339800, '2005-06-15', 4, 22);
INSERT INTO taxi.cars (id, specifications, maintenance_date, license_plate, mileage, manufacture_year, car_model_id, employee_id) VALUES (9, 'Motor 1.6l; Manual', '2022-04-21', 'E768ЧЯ ', 183275, '2021-02-08', 2, 24);
INSERT INTO taxi.cars (id, specifications, maintenance_date, license_plate, mileage, manufacture_year, car_model_id, employee_id) VALUES (10, 'Motor 1.5l; Manual', '2022-10-01', 'Ы540ЩЩ ', 138753, '2008-01-01', 3, 23);
INSERT INTO taxi.cars (id, specifications, maintenance_date, license_plate, mileage, manufacture_year, car_model_id, employee_id) VALUES (11, 'Motor 2.0l; Manual', '2021-05-10', 'Щ959АЙ ', 320633, '2003-06-30', 6, 24);
INSERT INTO taxi.cars (id, specifications, maintenance_date, license_plate, mileage, manufacture_year, car_model_id, employee_id) VALUES (12, 'Motor 1.9l; Manual', '2020-08-19', 'Ж133ЧЭ ', 233572, '2012-10-03', 6, 25);
INSERT INTO taxi.cars (id, specifications, maintenance_date, license_plate, mileage, manufacture_year, car_model_id, employee_id) VALUES (13, 'Motor 2.1l; Manual', '2022-11-20', 'P970ЧО ', 192667, '2000-05-13', 6, 26);
INSERT INTO taxi.cars (id, specifications, maintenance_date, license_plate, mileage, manufacture_year, car_model_id, employee_id) VALUES (14, 'Motor 1.5l; Manual', '2021-08-18', 'K161БЭ ', 105459, '2011-01-19', 7, 27);
INSERT INTO taxi.cars (id, specifications, maintenance_date, license_plate, mileage, manufacture_year, car_model_id, employee_id) VALUES (15, 'Motor 2.2l; Manual', '2021-08-25', 'III577PK ', 244624, '2012-05-17', 7, 28);
INSERT INTO taxi.cars (id, specifications, maintenance_date, license_plate, mileage, manufacture_year, car_model_id, employee_id) VALUES (16, 'Motor 1.9l; Manual', '2020-03-25', '3751ГО ', 229424, '2017-11-26', 9, 29);

```

```
INSERT INTO taxi.cars (id, specifications, maintenance_date, license_plate, mileage, manufacture_year,
car_model_id, employee_id) VALUES (17, 'Motor 1.7i; Manual', '2021-08-22', 'E648X3 ', 248532, '2000-01-05', 9,
30);
```

```
--
-- TOC entry 3429 (class 0 OID 16398)
-- Dependencies: 216
-- Data for Name: client; Type: TABLE DATA; Schema: taxi; Owner: postgres
--
```

```
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (1, 'Богданов', 'Аверкий',
'Егорович', '70545283392');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (2, 'Силина', 'Октябрина',
'Вадимовна', '79858127980');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (3, 'Костин', 'Тарас',
'Артёмович', '72172094192');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (4, 'Марфа', 'Аркадьевна',
'Рыбакова', '79123857961');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (5, 'Шубин', 'Ладимир',
'Федосьевич', '74238990696');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (6, 'Харлампий',
'Дорофеевич', 'Юдин', '78007578773');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (7, 'Ия', 'Викторовна',
'Петухова', '72312708491');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (8, 'Кузнецов', 'Спиридон',
'Авдеевич', '76203396212');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (9, 'Жанна',
'Александровна', 'Сафонова', '77922459834');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (10, 'Зоя', 'Филипповна',
'Петухова', '75203759362');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (11, 'Зинаида', 'Сергеевна',
'Маркова', '72795062025');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (12, 'Терентьев',
'Порфирий', 'Тарасович', '74976331288');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (13, 'Симонова', 'Вера',
'Богдановна', '75077882112');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (14, 'Лукьян', 'Власович',
'Прохоров', '71988430787');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (15, 'Таисия', 'Петровна',
'Селиверстова', '76125922509');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (16, 'Петров', 'Эраст',
'Иосипович', '71251477424');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (17, 'Родионова', 'Валерия',
'Павловна', '76311497379');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (18, 'Г-жа', 'Савина',
'Агафья', '77253842359');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (19, 'Кудряшов',
'Евстафий', 'Абрамович', '72980645198');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (20, 'Станислав',
'Жоресович', 'Шашков', '71153489708');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (21, 'Данилов', 'Захар',
'Харлампович', '76762304135');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (22, 'Цветков', 'Светозар',
'Владленович', '73508985627');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (23, 'Герасимова', 'Юлия',
'Богдановна', '79923681989');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (24, 'Вышеслав',
'Филатович', 'Мельников', '71553996421');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (25, 'Ипатий',
'Харламович', 'Кулагин', '76678417973');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (26, 'Беляков', 'Кирилл',
'Дмитриевич', '77586148767');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (27, 'Пестов',
'Иннокентий', 'Евсеевич', '73519117672');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (28, 'Орехова', 'Евдокия',
'Артемовна', '76959581804');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (29, 'Турьева', 'Ксения',
'Руслановна', '79077098549');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (30, 'Ксения',
'Никифоровна', 'Антонова', '79304977829');
```

```
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (31, 'Жданова', 'Ульяна', 'Евгеньевна', '77613917119');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (32, 'Тришин', 'Фома', 'Аверьянович', '78760653587');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (33, 'Аким', 'Демьянович', 'Якушев', '79060877749');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (34, 'Тихонова', 'Пелагея', 'Семеновна', '79727842171');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (35, 'Ия', 'Степановна', 'Михеева', '70247996595');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (36, 'Юдина', 'Варвара', 'Феликсовна', '72722369687');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (37, 'Шарапова', 'Синклитикия', 'Альбертовна', '71842791688');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (38, 'Автоном', 'Адрианович', 'Комаров', '75414676741');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (39, 'Евламий', 'Измаилович', 'Сорокин', '74237071098');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (40, 'Елисей', 'Матвеевич', 'Кириллов', '73391260092');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (41, 'Большакова', 'Лариса', 'Святославовна', '71838599830');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (42, 'Игнатов', 'Феликс', 'Денисович', '75854605350');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (43, 'Сидор', 'Богданович', 'Нестеров', '74147836795');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (44, 'Антонина', 'Михайловна', 'Степанова', '75782430042');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (45, 'Рогов', 'Капитон', 'Виленович', '73809640935');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (46, 'Силин', 'Валентин', 'Венедиктович', '75723244728');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (47, 'Торбачева', 'София', 'Эльдаровна', '70254184956');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (48, 'Мельникова', 'Екатерина', 'Тимуровна', '70945938206');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (49, 'Орлова', 'Раиса', 'Дмитриевна', '72230043442');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (50, 'Боброва', 'Лукия', 'Дмитриевна', '78698763002');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (51, 'Емельянова', 'Людмила', 'Сегреевна', '70825506789');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (52, 'Субботина', 'Таисия', 'Георгиевна', '70106679854');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (53, 'Антонин', 'Федотович', 'Мишин', '75354176089');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (54, 'Андреев', 'Пров', 'Викторович', '72007770897');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (55, 'Гаврилова', 'Елизавета', 'Ждановна', '77709307806');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (56, 'Жуков', 'Герман', 'Гордеевич', '74693122320');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (57, 'Гедсон', 'Артемьевич', 'Фокин', '76114978040');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (58, 'Ангела', 'Владимировна', 'Савельева', '77106370018');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (59, 'Авдей', 'Трофимович', 'Хохлов', '77556660540');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (60, 'Кира', 'Архиповна', 'Пахомова', '72745031068');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (61, 'тов.', 'Абрамова', 'Зоя', '74697594200');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (62, 'Раиса', 'Яковлевна', 'Дорофеева', '78975702645');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (63, 'Роман', 'Федосеевич', 'Афанасьев', '79763119407');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (64, 'тов.', 'Гордеев', 'Панфил', '73837238548');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (65, 'Клавдия', 'Николаевна', 'Шарова', '79119209066');
```

```

INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (66, 'Медведев',
'Афиноген', 'Трофимович', '79009532121');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (67, 'Сергеев', 'Спартак',
'Виленович', '76570294247');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (68, 'Никифорова',
'Екатерина', 'Афанасьевна', '79402642979');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (69, 'тов.', 'Пономарева',
'Пелагея', '72958852434');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (70, 'Самойлова',
'Олимпиада', 'Болеславовна', '73621841306');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (71, 'Анна', 'Антоновна',
'Вишнякова', '70816599359');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (72, 'Лукия',
'Вениаминовна', 'Шарова', '79334881597');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (73, 'Таврилова',
'Валентина', 'Владиславовна', '74173706735');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (74, 'Громов',
'Аполлинарий', 'Матвеевич', '74171235037');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (75, 'Тамара',
'Геннадиевна', 'Мишина', '74042810972');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (76, 'Архипова', 'Ия',
'Федоровна', '74420848745');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (77, 'Митофан',
'Демидович', 'Панов', '71576566315');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (78, 'Сазонова', 'Людмила',
'Станиславовна', '72674242181');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (79, 'Алла', 'Геннадьевна',
'Лапина', '73920647842');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (80, 'Воробьев', 'Клавдий',
'Марсович', '79351410633');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (81, 'Анжелика',
'Филипповна', 'Брагина', '78968819704');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (82, 'Николай',
'Терасимович', 'Горбунов', '74121389592');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (83, 'Наталья',
'Викторовна', 'Лобанова', '72613541223');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (84, 'Кириллов',
'Ферапонт', 'Демьянович', '76098526531');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (85, 'Антонин',
'Ефимович', 'Уваров', '71452118971');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (86, 'Вишняков', 'Якуб',
'Федосеевич', '74833215058');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (87, 'Ширяев', 'Стоян',
'Гордеевич', '75037066824');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (88, 'Козлов', 'Михей',
'Абрамович', '71157731952');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (89, 'Эрнст', 'Юльевич',
'Селезнев', '74357962513');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (90, 'Горбунова',
'Василиса', 'Ефимовна', '72662463064');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (91, 'Евдокия',
'Филипповна', 'Лихачева', '76337605190');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (92, 'Вероника', 'Егоровна',
'Белякова', '70606868216');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (93, 'Павел', 'Архипович',
'Яковлев', '78370838653');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (94, 'Ефремов', 'Анисим',
'Игоревич', '78201480474');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (95, 'Захар', 'Игнатъевич',
'Емельянов', '77558826932');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (96, 'Фаина', 'Михайловна',
'Петрова', '77808650744');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (97, 'Белоусова',
'Екатерина', 'Мироновна', '75706355225');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (98, 'Захарова', 'Антонина',
'Александровна', '73775271009');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (99, 'Евгения',
'Кирилловна', 'Белозерова', '79256507439');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (100, 'Агап', 'Витальевич',
'Иванов', '72950465337');

```

```

INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (101, 'Данила',
'Феодосьевич', 'Павлов', '72578998775');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (102, 'Данилов', 'Роман',
'Харлампьевич', '77306235980');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (103, 'Исаков', 'Бажен',
'Ефимович', '70409561772');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (104, 'Бажен',
'Юлианович', 'Комаров', '79460098391');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (105, 'Капустина',
'Синклитикия', 'Антоновна', '70738280743');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (106, 'Носкова',
'Октябрина', 'Даниловна', '76961954227');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (107, 'Станислав',
'Вилорович', 'Тихонов', '79780338193');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (108, 'Борис', 'Давидович',
'Пономарев', '74265880501');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (109, 'Ираида', 'Тарасовна',
'Зуева', '75004724303');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (110, 'Кузьмин', 'Аникей',
'Аверьянович', '77561677079');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (111, 'Стойа',
'Ярославович', 'Суханов', '73359567564');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (112, 'Татьяна',
'Афанасьевна', 'Ермакова', '75704134484');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (113, 'Марк',
'Викентьевич', 'Тетерин', '77164283948');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (114, 'Тригорьев', 'Эрнест',
'Демидович', '76970225220');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (115, 'Симон', 'Жанович',
'Беляев', '77774064923');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (116, 'Александров',
'Владислав', 'Гаврилович', '79694441577');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (117, 'Хохлов',
'Добромысл', 'Данилович', '73505161423');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (118, 'Баранова',
'Валентина', 'Тригорьевна', '79861768989');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (119, 'Евдокия',
'Александровна', 'Миронова', '77639338917');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (120, 'Максимильян',
'Терентьевич', 'Одинцов', '79295658645');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (121, 'Алевтина',
'Матвеевна', 'Рыбакова', '73612395545');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (122, 'Ипат', 'Жоресович',
'Князев', '73007739650');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (123, 'Ярополк',
'Авдеевич', 'Марков', '74535262800');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (124, 'Архип', 'Тарасович',
'Лазарев', '79411767190');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (125, 'Мельников',
'Никифор', 'Гаврилович', '78258566317');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (126, 'Борислав',
'Феофанович', 'Носков', '76688685722');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (127, 'Синклитикия',
'Богдановна', 'Стрелкова', '73447047037');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (128, 'Агата', 'Ильинична',
'Лебедева', '71210589951');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (129, 'Зинаида',
'Алексеевна', 'Мамонтова', '74783974051');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (130, 'Лукина', 'Фёкла',
'Михайловна', '75442453930');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (131, 'Дементий',
'Трофимович', 'Аксенов', '79704161550');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (132, 'Василиса',
'Ильинична', 'Коновалова', '76254547919');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (133, 'Сысоева', 'Полина',
'Константиновна', '73584490748');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (134, 'Ефим', 'Данилович',
'Цветков', '76060722158');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (135, 'Трофимов', 'Гордей',
'Эдуардович', '72820437310');

```


INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (136, 'Александра', 'Рудольфовна', 'Осипова', '73578288988');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (137, 'Г-н', 'Макаров', 'Филипп', '77063172036');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (138, 'Игнат'ев', 'Данила', 'Валерьянович', '77918282730');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (139, 'Зинаида', 'Владимировна', 'Шилова', '74111370723');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (140, 'Агафья', 'Рубеновна', 'Копылова', '79166974036');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (141, 'Вячеслав', 'Эдгарович', 'Пахомов', '74319700605');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (142, 'Михайлова', 'Варвара', 'Ильинична', '70566736107');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (143, 'Князев', 'Ладимир', 'Абрамович', '71207801621');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (144, 'Корнил', 'Адрианович', 'Тихонов', '79886983513');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (145, 'Алина', 'Федоровна', 'Рыбакова', '76359694742');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (146, 'Королев', 'Никандр', 'Власович', '76914077824');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (147, 'Щербаков', 'Всеслав', 'Валерьянович', '76423468110');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (148, 'Афанасьев', 'Евгений', 'Валентинович', '72154751678');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (149, 'Носкова', 'Эмилия', 'Эльдаровна', '77232086108');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (150, 'Вера', 'Альбертовна', 'Трофимова', '77780379934');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (151, 'Юлиан', 'Савельева', 'Арсенович', '70562445572');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (152, 'Корнил', 'Андреева', 'Венедиктович', '71662910649');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (153, 'Артемий', 'Соколова', 'Харламович', '75749726740');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (154, 'Моисей', 'Матвеева', 'Крылова', '74587551572');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (155, 'Владислав', 'Давыдова', 'Макаровна', '71877251827');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (156, 'Виктория', 'Доронина', 'Суханов', '74575738710');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (157, 'Маргарита', 'Копылова', 'Кузнецова', '74324512832');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (158, 'Рюрик', 'Устинова', 'Попова', '70882927140');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (159, 'Анисим', 'Сафонова', 'Корнилова', '75236824983');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (160, 'Аверьян', 'Шарапов', 'Руслановна', '77302407132');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (161, 'Маргарита', 'Лыткина', 'Григорьев', '70724376887');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (162, 'Онуфрий', 'Федоров', 'Аксёнович', '77636675380');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (163, 'Фрол', 'Ларионова', 'Кондратьева', '71110395423');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (164, 'Любосмысл', 'Блохин', 'Кирилловна', '71251878423');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (165, 'Максим', 'Капустин', 'Соболева', '72954663783');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (166, 'Мариан', 'Прохорова', 'Вадимовна', '77849995549');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (167, 'Август', 'Давыдова', 'Кононова', '79010186776');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (168, 'Евгений', 'Комаров', 'Григорьевна', '70088426072');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (169, 'Аникита', 'Матвеев', 'Устинович', '75036415101');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (170, 'Всеволод', 'Горбунов', 'Кудряшов', '73188488700');

```

INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (171, 'Мирон', 'Щербаков',
'Симонова', '73504240880');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (172, 'Порфирий',
'Филиппов', 'Назаров', '76682906492');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (173, 'Игорь', 'Фокина',
'Сергеевна', '74618017477');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (174, 'Фрол', 'Петухова',
'Федорова', '77681555883');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (175, 'Моисей',
'Капустина', 'Капустин', '74045300926');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (176, 'Юлий', 'Дроздов',
'Ниловна', '71249467241');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (177, 'Артем', 'Шилов',
'Владимировна', '79946449861');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (178, 'Тимур', 'Кириллов',
'Полякова', '70063510723');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (179, 'Маргарита',
'Захаров', 'Фадеева', '70441874315');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (180, 'Нестор', 'Макаров',
'Богданова', '79987230256');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (181, 'Мина', 'Петров',
'Брагина', '72704374075');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (182, 'Игорь',
'Константинов', 'Кирилловна', '74502543619');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (183, 'Савватий',
'Муравьева', 'Архиповна', '77347705403');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (184, 'Иванна', 'Блохина',
'Анатольевна', '78277476668');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (185, 'Мирослав', 'Тущина',
'Ефимовна', '76639935883');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (186, 'Евдоким',
'Белозерова', 'Викторовна', '72311974826');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (187, 'Аникита', 'Борисова',
'Щербаков', '77966650873');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (188, 'Дементий',
'Мельникова', 'Максимов', '79169462157');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (189, 'Гедеон', 'Шарапова',
'Леонидовна', '71056068579');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (190, 'Полина', 'Беспалов',
'Евсеевич', '79518413766');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (191, 'Порфирий',
'Федотов', 'Архиповна', '77541954273');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (192, 'Никанор', 'Андреев',
'Робертовна', '79544689866');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (193, 'Софрон', 'Брагин',
'Аркадьевна', '76907793220');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (194, 'Леонтий',
'Самсонова', 'Кулакова', '71880608400');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (195, 'Герман', 'Щукин',
'Захарова', '72155173819');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (196, 'Автоном', 'Логинов',
'Капустин', '75008813749');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (197, 'Трифон', 'Князева',
'Харитонов', '78132521065');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (198, 'Наум',
'Калашникова', 'Теймуразович', '78633616334');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (199, 'Осип', 'Зуев',
'Назаров', '70710309540');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (200, 'Варлаам', 'Макаров',
'Филатова', '75734540329');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (201, 'Марина',
'Меркушева', 'Пестов', '75342563885');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (202, 'Харлампий',
'Шубин', 'Геннадиевна', '71398886366');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (203, 'Изот', 'Тущина',
'Рогова', '75511141564');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (204, 'Вадим', 'Фокин',
'Воронцова', '76114456563');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (205, 'Виссарион',
'Князева', 'Буров', '70815462516');

```

```

INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (206, 'Яков', 'Миронова',
'Валериевна', '78285419747');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (207, 'Порфирий',
'Осипов', 'Максимовна', '75211796914');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (208, 'Вышеслав',
'Кошелев', 'Тихонов', '70622372152');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (209, 'Алевтина', 'Соболев',
'Субботин', '72662883486');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (210, 'Андрей', 'Казаков',
'Оскарловна', '78829193007');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (211, 'Евграф', 'Капустин',
'Герасимович', '70408239843');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (212, 'Надежда',
'Селезнева', 'Захаровна', '78273273221');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (213, 'Артем', 'Одинцова',
'Быкова', '78719552280');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (214, 'Павел', 'Лапин',
'Беляева', '74043410139');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (215, 'Анастасия',
'Третьякова', 'Титов', '76123265948');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (216, 'Варфоломей',
'Евдокимова', 'Мамонтова', '72933046754');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (217, 'Симон', 'Доронина',
'Аркадьевна', '76721503759');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (218, 'Автоном', 'Белов',
'Васильева', '77565380366');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (219, 'Иван', 'Воронцова',
'Никифорова', '78112934825');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (220, 'Роман', 'Доронин',
'Захарьевич', '71752361642');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (221, 'Аникита', 'Белякова',
'Артемьевич', '71783475780');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (222, 'Никита', 'Брагина',
'Исидорович', '79644022166');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (223, 'Александра',
'Гаврилова', 'Елисеев', '77518536688');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (224, 'Гаврила', 'Абрамов',
'Бобылева', '74137337295');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (225, 'Кондратий',
'Бобров', 'Валериевна', '74433473124');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (226, 'Данила',
'Прохорова', 'Тимофеевна', '73865051679');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (227, 'Олимпиада',
'Юдина', 'Кирилловна', '74831811029');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (228, 'Дементий',
'Королев', 'Шилов', '75773561456');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (229, 'Зинаида', 'Абрамов',
'Поляков', '73324735672');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (230, 'Кузьма',
'Пономарева', 'Терентьевич', '71288768874');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (231, 'Виктор', 'Ефремова',
'Тришин', '71747105656');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (232, 'Еремей',
'Анисимова', 'Романовна', '74469714391');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (233, 'Тамара', 'Герасимов',
'Константиновна', '79268567658');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (234, 'Фортунат',
'Савельева', 'Зиновьева', '73894382526');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (235, 'Мокей', 'Брагин',
'Арсеньевич', '71938948610');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (236, 'Милица', 'Блинов',
'Таисия', '77421307206');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (237, 'Ипполит',
'Логинова', 'Константинов', '72386779908');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (238, 'Ефим', 'Агафонов',
'Александровна', '72828886033');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (239, 'Боян', 'Рябов',
'Эльдаровна', '79052583970');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (240, 'Лонгин',
'Молчанова', 'Викторовна', '70722648827');

```

```

INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (241, 'Радован', 'Маслов',
'Селиверстова', '78572513115');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (242, 'Маргарита',
'Пономарева', 'Колесников', '75947923970');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (243, 'Аркадий', 'Мухина',
'Никифоров', '75368972979');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (244, 'Прокл', 'Тетерин',
'Максимильян', '70174223108');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (245, 'Конон', 'Сергеев',
'Абрамович', '79602369320');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (246, 'Ипат', 'Сафонова',
'Анатољевна', '77658464239');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (247, 'Арсений', 'Белоусов',
'Силян', '75408401521');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (248, 'Оксана', 'Борисов',
'Ильин', '76305821424');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (249, 'Лучезар', 'Гаврилов',
'Исидорович', '73153308418');
INSERT INTO taxi.client (id, firstname, surname, patronymic, phone_number) VALUES (250, 'Матвей', 'Котов',
'Новикова', '70348415146');

```

```

--
-- TOC entry 3435 (class 0 OID 16427)
-- Dependencies: 222
-- Data for Name: employee; Type: TABLE DATA; Schema: taxi; Owner: postgres
--

```

```

INSERT INTO taxi.employee (id, adress, firstname, surname, patronymic, passport_number, phone_number,
position_id) VALUES (15, 'ул. Прудовая, д. 33, 90', 'Валерия', 'Мишин', 'Эдгарович', '1128649929', '74665151407',
4);
INSERT INTO taxi.employee (id, adress, firstname, surname, patronymic, passport_number, phone_number,
position_id) VALUES (19, 'ул. Водников, д. 71, 91', 'Януарий', 'Елисеев', 'Соколова', '3537201180', '78484115254',
1);
INSERT INTO taxi.employee (id, adress, firstname, surname, patronymic, passport_number, phone_number,
position_id) VALUES (1, 'ул. Поперечная, д. 60 к. 3/8, 71', 'Любовь', 'Потапова', 'Максимов', '3025802961',
'77539137931', 1);
INSERT INTO taxi.employee (id, adress, firstname, surname, patronymic, passport_number, phone_number,
position_id) VALUES (2, 'наб. Кольцова, д. 5/2, 24', 'Лаврентий', 'Колобов', 'Андреев', '6082819656',
'77332695886', 1);
INSERT INTO taxi.employee (id, adress, firstname, surname, patronymic, passport_number, phone_number,
position_id) VALUES (3, 'бул. Радужный, д. 159, 6', 'Елизар', 'Зимина', 'Пестова', '4156630968', '72543101104', 1);
INSERT INTO taxi.employee (id, adress, firstname, surname, patronymic, passport_number, phone_number,
position_id) VALUES (7, 'пер. Панфилова, д. 873 стр. 4, 44', 'Варвара', 'Ершов', 'Кондратьев', '5226660414',
'77882424003', 3);
INSERT INTO taxi.employee (id, adress, firstname, surname, patronymic, passport_number, phone_number,
position_id) VALUES (8, 'пер. Пролетарский, д. 7, 14', 'Акулина', 'Овчинникова', 'Васильевич', '4526893206',
'71042655371', 3);
INSERT INTO taxi.employee (id, adress, firstname, surname, patronymic, passport_number, phone_number,
position_id) VALUES (9, 'наб. Шевченко, д. 485 стр. 8, 51', 'Аггей', 'Игнатов', 'Турьевич', '1761968866',
'70710834155', 3);
INSERT INTO taxi.employee (id, adress, firstname, surname, patronymic, passport_number, phone_number,
position_id) VALUES (10, 'бул. Угловой, д. 316 к. 2, 49', 'Сергей', 'Ефимов', 'Соловьев', '3777348629',
'75161487787', 3);
INSERT INTO taxi.employee (id, adress, firstname, surname, patronymic, passport_number, phone_number,
position_id) VALUES (11, 'бул. Ясный, д. 1/3 к. 3, 89', 'Виссарион', 'Власов', 'Эмилия', '4918066059',
'71973358230', 3);
INSERT INTO taxi.employee (id, adress, firstname, surname, patronymic, passport_number, phone_number,
position_id) VALUES (12, 'алл. Лесхозная, д. 7/3, 63', 'Дмитрий', 'Меркушев', 'Юльевна', '8309784369',
'77145176618', 3);
INSERT INTO taxi.employee (id, adress, firstname, surname, patronymic, passport_number, phone_number,
position_id) VALUES (13, 'алл. Геологов, д. 247 к. 7, 57', 'Мечислав', 'Кудрявцев', 'Мишин', '9089586544',
'70878601632', 3);
INSERT INTO taxi.employee (id, adress, firstname, surname, patronymic, passport_number, phone_number,
position_id) VALUES (14, 'ул. Докучаева, д. 6/8 стр. 2, 35', 'Ананий', 'Комиссаров', 'Данилова', '4847090679',
'76396736204', 3);
INSERT INTO taxi.employee (id, adress, firstname, surname, patronymic, passport_number, phone_number,
position_id) VALUES (16, 'наб. Сосновая, д. 8, 36', 'Ратмир', 'Меркушева', 'Ефимов', '1969765270', '79806899818',
4);

```

```

INSERT INTO taxi.employee (id, adress, firstname, surname, patronymic, passport_number, phone_number,
position_id) VALUES (17, 'алл. Металлургов, д. 915 стр. 4, 91', 'Прокл', 'Блохин', 'Федоровна', '9906173532',
'78754604514', 4);
INSERT INTO taxi.employee (id, adress, firstname, surname, patronymic, passport_number, phone_number,
position_id) VALUES (18, 'бул. Морозова, д. 5/2, 71', 'Ефим', 'Ларионова', 'Филиппов', '6138413594',
'76837454456', 4);
INSERT INTO taxi.employee (id, adress, firstname, surname, patronymic, passport_number, phone_number,
position_id) VALUES (20, 'бул. Казачий, д. 3/3, 9', 'Алексей', 'Максимов', 'Михайловна', '3036051267',
'73446773367', 1);
INSERT INTO taxi.employee (id, adress, firstname, surname, patronymic, passport_number, phone_number,
position_id) VALUES (21, 'алл. Водников, д. 8, 48', 'Полина', 'Васильева', 'Доронин', '1727477258', '76435327838',
1);
INSERT INTO taxi.employee (id, adress, firstname, surname, patronymic, passport_number, phone_number,
position_id) VALUES (22, 'наб. Средняя, д. 93 стр. 4, 9', 'Вышеслав', 'Меркушев', 'Даниловна', '4496827935',
'73799329146', 1);
INSERT INTO taxi.employee (id, adress, firstname, surname, patronymic, passport_number, phone_number,
position_id) VALUES (24, 'бул. Водников, д. 4, 23', 'Эдуард', 'Наумова', 'Адамович', '4909214829', '78255276627',
1);
INSERT INTO taxi.employee (id, adress, firstname, surname, patronymic, passport_number, phone_number,
position_id) VALUES (4, 'ул. Коммунистическая, д. 615 стр. 583, 73', 'Юлий', 'Рыбаков', 'Тригорьевна',
'2004250492', '71117947185', 1);
INSERT INTO taxi.employee (id, adress, firstname, surname, patronymic, passport_number, phone_number,
position_id) VALUES (5, 'ш. Ясное, д. 3 к. 4, 96', 'Аполлон', 'Сафонов', 'Евсеевич', '1991972571', '74423762406',
3);
INSERT INTO taxi.employee (id, adress, firstname, surname, patronymic, passport_number, phone_number,
position_id) VALUES (6, 'пр. Белинского, д. 9 стр. 868, 82', 'Эраст', 'Галкин', 'Георгиевна', '3907187007',
'70348124157', 3);
INSERT INTO taxi.employee (id, adress, firstname, surname, patronymic, passport_number, phone_number,
position_id) VALUES (23, 'пер. Российский, д. 97 стр. 8, 17', 'Осип', 'Поляков', 'Ждановна', '7917135071',
'79127460157', 1);
INSERT INTO taxi.employee (id, adress, firstname, surname, patronymic, passport_number, phone_number,
position_id) VALUES (25, 'ш. Прохладное, д. 19 к. 1, 88', 'Евфросиния', 'Самойлова', 'Фролов', '2227672349',
'79266220398', 1);
INSERT INTO taxi.employee (id, adress, firstname, surname, patronymic, passport_number, phone_number,
position_id) VALUES (26, 'алл. Димитрова, д. 2/7 стр. 9/8, 52', 'Эрнст', 'Егорова', 'Тришин', '3330476630',
'77531443655', 1);
INSERT INTO taxi.employee (id, adress, firstname, surname, patronymic, passport_number, phone_number,
position_id) VALUES (27, 'наб. Лазо, д. 7/7 стр. 5/8, 50', 'Владлен', 'Колобова', 'Геннадиевич', '2497237661',
'75110255942', 1);
INSERT INTO taxi.employee (id, adress, firstname, surname, patronymic, passport_number, phone_number,
position_id) VALUES (28, 'алл. Шевченко, д. 4 стр. 67, 17', 'Лука', 'Киселев', 'Кузьминична', '6079770925',
'79651988842', 1);
INSERT INTO taxi.employee (id, adress, firstname, surname, patronymic, passport_number, phone_number,
position_id) VALUES (29, 'пер. Первомайский, д. 60 стр. 707, 92', 'Август', 'Потапова', 'Горбачева', '7553613986',
'79840212470', 2);
INSERT INTO taxi.employee (id, adress, firstname, surname, patronymic, passport_number, phone_number,
position_id) VALUES (30, 'наб. Заовражная, д. 3 стр. 3/3, 63', 'Твердислав', 'Мойсеев', 'Павлова', '9543666304',
'71474032276', 2);

```

```

--
-- TOC entry 3446 (class 0 OID 25148)
-- Dependencies: 233
-- Data for Name: employee_shedule; Type: TABLE DATA; Schema: taxi; Owner: postgres
--

```

```

--
-- TOC entry 3445 (class 0 OID 16530)
-- Dependencies: 232
-- Data for Name: orders; Type: TABLE DATA; Schema: taxi; Owner: postgres
--

```

```

INSERT INTO taxi.orders (id, adress_from, adress_to, loading_time, unloading_time, payment_type,
employee_driver_id, client_id, tariff_id, employee_operator_id, payment_card_id, planning_load_time,
planning_unload_time) VALUES (1, 'пр. Бабушкина, д. 8/2', 'бул. Кирпичный, д. 75 к. 3/8', '2023-01-12 23:23:45',
'2023-01-12 23:45:22', 'by_card', 23, 1, 1, 3, 1, '2023-01-12 23:23:45', NULL);
INSERT INTO taxi.orders (id, adress_from, adress_to, loading_time, unloading_time, payment_type,
employee_driver_id, client_id, tariff_id, employee_operator_id, payment_card_id, planning_load_time,

```

```

planning_unload_time) VALUES (3, 'пер. 50 лет Победы, д. 6', 'наб. Заливная, д. 9', '2023-02-23 10:28:20', '2023-02-23 10:49:30', 'by_card', 4, 2, 1, 2, 2, '2023-02-23 10:28:20', NULL);
INSERT INTO taxi.orders (id, address_from, address_to, loading_time, unloading_time, payment_type, employee_driver_id, client_id, tariff_id, employee_operator_id, payment_card_id, planning_load_time, planning_unload_time) VALUES (4, 'пр. Глинки, д. 6', 'бул. Герцена, д. 9 к. 3/5', '2023-03-11 13:29:24', '2023-03-11 13:44:42', 'by_card', 30, 4, 2, 4, 4, '2023-03-11 13:29:24', NULL);
INSERT INTO taxi.orders (id, address_from, address_to, loading_time, unloading_time, payment_type, employee_driver_id, client_id, tariff_id, employee_operator_id, payment_card_id, planning_load_time, planning_unload_time) VALUES (5, 'алл. Буденного, д. 2/6 стр. 4/9', 'пер. Колхозный, д. 2', '2023-03-13 17:11:08', '2023-03-13 17:45:59', 'by_card', 30, 4, 2, 2, 4, '2023-01-12 23:23:45', NULL);
INSERT INTO taxi.orders (id, address_from, address_to, loading_time, unloading_time, payment_type, employee_driver_id, client_id, tariff_id, employee_operator_id, payment_card_id, planning_load_time, planning_unload_time) VALUES (17, 'бул. Путевой, д. 26 стр. 811', 'пер. Коминтерна, д. 63 к. 3/6', '2023-03-20 16:15:18', '2023-03-20 16:46:56', 'by_card', 19, 82, 1, 3, 82, NULL, NULL);
INSERT INTO taxi.orders (id, address_from, address_to, loading_time, unloading_time, payment_type, employee_driver_id, client_id, tariff_id, employee_operator_id, payment_card_id, planning_load_time, planning_unload_time) VALUES (18, 'алл. Торговая, д. 178 к. 2/8', 'пр. Шаумяна, д. 60 стр. 592', '2023-03-16 12:02:26', '2023-03-16 12:47:58', 'by_card', 19, 36, 1, 2, 36, NULL, NULL);
INSERT INTO taxi.orders (id, address_from, address_to, loading_time, unloading_time, payment_type, employee_driver_id, client_id, tariff_id, employee_operator_id, payment_card_id, planning_load_time, planning_unload_time) VALUES (19, 'бул. Высоковольный, д. 6/7', 'ул. Челюскинцев, д. 843', '2023-03-25 22:22:25', '2023-03-25 22:59:36', 'by_card', 26, 56, 1, 4, 56, NULL, NULL);
INSERT INTO taxi.orders (id, address_from, address_to, loading_time, unloading_time, payment_type, employee_driver_id, client_id, tariff_id, employee_operator_id, payment_card_id, planning_load_time, planning_unload_time) VALUES (20, 'пер. Котовского, д. 6/2 стр. 440', 'ш. Глинки, д. 738', '2023-03-19 18:15:27', '2023-03-19 18:42:49', 'by_card', 22, 17, 1, 3, 17, NULL, NULL);
INSERT INTO taxi.orders (id, address_from, address_to, loading_time, unloading_time, payment_type, employee_driver_id, client_id, tariff_id, employee_operator_id, payment_card_id, planning_load_time, planning_unload_time) VALUES (21, 'наб. Киевская, д. 3/8 стр. 611', 'алл. Орловская, д. 33', '2023-03-13 10:16:16', '2023-03-13 10:38:39', 'by_card', 21, 24, 1, 2, 24, NULL, NULL);
INSERT INTO taxi.orders (id, address_from, address_to, loading_time, unloading_time, payment_type, employee_driver_id, client_id, tariff_id, employee_operator_id, payment_card_id, planning_load_time, planning_unload_time) VALUES (22, 'бул. Кузнецова, д. 3 стр. 5/8', 'ш. Харьковское, д. 671', '2023-03-14 16:29:13', '2023-03-14 16:52:31', 'by_card', 20, 23, 1, 3, 23, NULL, NULL);
INSERT INTO taxi.orders (id, address_from, address_to, loading_time, unloading_time, payment_type, employee_driver_id, client_id, tariff_id, employee_operator_id, payment_card_id, planning_load_time, planning_unload_time) VALUES (23, 'бул. Химиков, д. 104', 'алл. Герцена, д. 2/4 стр. 870', '2023-03-28 02:20:25', '2023-03-28 02:33:57', 'by_card', 20, 33, 1, 4, 33, NULL, NULL);
INSERT INTO taxi.orders (id, address_from, address_to, loading_time, unloading_time, payment_type, employee_driver_id, client_id, tariff_id, employee_operator_id, payment_card_id, planning_load_time, planning_unload_time) VALUES (24, 'ш. Леваневского, д. 5/1 к. 2', 'ш. Томское, д. 6', '2023-03-01 23:02:18', '2023-03-01 23:51:58', 'by_card', 1, 39, 1, 4, 39, NULL, NULL);
INSERT INTO taxi.orders (id, address_from, address_to, loading_time, unloading_time, payment_type, employee_driver_id, client_id, tariff_id, employee_operator_id, payment_card_id, planning_load_time, planning_unload_time) VALUES (25, 'алл. Локомотивная, д. 552', 'наб. Харьковская, д. 594 стр. 8/2', '2023-03-26 21:11:28', '2023-03-26 21:57:57', 'by_card', 2, 28, 1, 3, 28, NULL, NULL);
INSERT INTO taxi.orders (id, address_from, address_to, loading_time, unloading_time, payment_type, employee_driver_id, client_id, tariff_id, employee_operator_id, payment_card_id, planning_load_time, planning_unload_time) VALUES (26, 'ш. Свободное, д. 511 к. 53', 'наб. Радужная, д. 8', '2023-03-24 23:11:18', '2023-03-24 23:54:31', 'by_card', 1, 98, 1, 4, 98, NULL, NULL);
INSERT INTO taxi.orders (id, address_from, address_to, loading_time, unloading_time, payment_type, employee_driver_id, client_id, tariff_id, employee_operator_id, payment_card_id, planning_load_time, planning_unload_time) VALUES (27, 'бул. Стадионный, д. 9/7', 'пер. Кленовый, д. 72 стр. 4', '2023-03-01 15:07:02', '2023-03-01 15:56:33', 'by_card', 2, 100, 1, 3, 100, NULL, NULL);
INSERT INTO taxi.orders (id, address_from, address_to, loading_time, unloading_time, payment_type, employee_driver_id, client_id, tariff_id, employee_operator_id, payment_card_id, planning_load_time, planning_unload_time) VALUES (28, 'пер. Тихий, д. 9 к. 9/1', 'алл. Хуторская, д. 310', '2023-03-21 03:06:16', '2023-03-21 03:34:55', 'by_card', 3, 96, 1, 4, 96, NULL, NULL);
INSERT INTO taxi.orders (id, address_from, address_to, loading_time, unloading_time, payment_type, employee_driver_id, client_id, tariff_id, employee_operator_id, payment_card_id, planning_load_time, planning_unload_time) VALUES (29, 'ул. Высоковольная, д. 55 стр. 731', 'ш. Полярное, д. 4/5 к. 37', '2023-03-07 11:04:16', '2023-03-07 11:52:51', 'by_card', 3, 105, 1, 2, 105, NULL, NULL);
INSERT INTO taxi.orders (id, address_from, address_to, loading_time, unloading_time, payment_type, employee_driver_id, client_id, tariff_id, employee_operator_id, payment_card_id, planning_load_time, planning_unload_time) VALUES (30, 'бул. Маяковского, д. 72 к. 7/9', 'ул. Тукая, д. 2', '2023-03-26 20:06:25', '2023-03-26 20:34:54', 'by_card', 4, 40, 1, 3, 40, NULL, NULL);
INSERT INTO taxi.orders (id, address_from, address_to, loading_time, unloading_time, payment_type, employee_driver_id, client_id, tariff_id, employee_operator_id, payment_card_id, planning_load_time, planning_unload_time) VALUES (31, 'пер. Славянский, д. 756 стр. 63', 'ул. Бригадная, д. 350 к. 20', '2023-03-07 22:03:20', '2023-03-07 22:44:39', 'by_card', 4, 59, 1, 4, 59, NULL, NULL);

```

```

INSERT INTO taxi.orders (id, adress_from, adress_to, loading_time, unloading_time, payment_type,
employee_driver_id, client_id, tariff_id, employee_operator_id, payment_card_id, planning_load_time,
planning_unload_time) VALUES (32, 'ул. 50 лет Победы, д. 32 к. 36', 'наб. Рылеева, д. 8/9', '2023-03-01 22:02:11',
'2023-03-01 22:38:43', 'by_card', 4, 57, 1, 4, 57, NULL, NULL);
INSERT INTO taxi.orders (id, adress_from, adress_to, loading_time, unloading_time, payment_type,
employee_driver_id, client_id, tariff_id, employee_operator_id, payment_card_id, planning_load_time,
planning_unload_time) VALUES (33, 'пер. Флотский, д. 665 стр. 3', 'пер. Короткий, д. 210', '2023-03-03 19:22:05',
'2023-03-03 19:38:38', 'by_card', 3, 114, 1, 3, 114, NULL, NULL);
INSERT INTO taxi.orders (id, adress_from, adress_to, loading_time, unloading_time, payment_type,
employee_driver_id, client_id, tariff_id, employee_operator_id, payment_card_id, planning_load_time,
planning_unload_time) VALUES (34, 'ул. Жданова, д. 700 стр. 524', 'пер. Вокзальный, д. 50 стр. 8', '2023-03-04
13:05:13', '2023-03-04 13:32:41', 'by_card', 1, 90, 1, 2, 90, NULL, NULL);
INSERT INTO taxi.orders (id, adress_from, adress_to, loading_time, unloading_time, payment_type,
employee_driver_id, client_id, tariff_id, employee_operator_id, payment_card_id, planning_load_time,
planning_unload_time) VALUES (35, 'ул. Гражданская, д. 489', 'ш. Кирова, д. 9 стр. 57', '2023-03-22 08:05:30',
'2023-03-22 08:53:52', 'by_card', 2, 88, 1, 2, 88, NULL, NULL);
INSERT INTO taxi.orders (id, adress_from, adress_to, loading_time, unloading_time, payment_type,
employee_driver_id, client_id, tariff_id, employee_operator_id, payment_card_id, planning_load_time,
planning_unload_time) VALUES (6, 'бул. Революции, д. 781 стр. 81', 'пер. Звездный, д. 7/3 к. 88', '2023-03-17
14:19:21', '2023-03-17 14:56:34', 'by_card', 30, 4, 2, 3, 4, '2023-01-12 23:23:45', NULL);
INSERT INTO taxi.orders (id, adress_from, adress_to, loading_time, unloading_time, payment_type,
employee_driver_id, client_id, tariff_id, employee_operator_id, payment_card_id, planning_load_time,
planning_unload_time) VALUES (7, 'пер. Слободской, д. 7 к. 5/1', 'пр. Марта 8, д. 3/1', '2023-03-17 14:12:20',
'2023-03-17 14:41:46', 'by_card', 21, 7, 1, 3, 7, '2023-03-17 14:12:20', NULL);
INSERT INTO taxi.orders (id, adress_from, adress_to, loading_time, unloading_time, payment_type,
employee_driver_id, client_id, tariff_id, employee_operator_id, payment_card_id, planning_load_time,
planning_unload_time) VALUES (8, 'ул. Больничная, д. 2 стр. 2', 'бул. Целинный, д. 57 стр. 5/8', '2023-03-17
14:16:27', '2023-03-17 14:59:52', 'by_card', 21, 8, 1, 4, 8, '2023-03-11 18:23:13', NULL);
INSERT INTO taxi.orders (id, adress_from, adress_to, loading_time, unloading_time, payment_type,
employee_driver_id, client_id, tariff_id, employee_operator_id, payment_card_id, planning_load_time,
planning_unload_time) VALUES (9, 'ул. Таманская, д. 937 к. 6', 'ш. Бабушкина, д. 7 стр. 1/2', '2023-03-18
15:05:16', '2023-03-18 15:49:37', 'by_card', 25, 14, 1, 4, 14, '2023-03-11 18:23:13', NULL);
INSERT INTO taxi.orders (id, adress_from, adress_to, loading_time, unloading_time, payment_type,
employee_driver_id, client_id, tariff_id, employee_operator_id, payment_card_id, planning_load_time,
planning_unload_time) VALUES (10, 'пр. 50 лет ВЛКСМ, д. 3/9 стр. 735', 'алл. Дорожная, д. 9', '2023-03-18
08:26:15', '2023-03-18 08:47:38', 'by_card', 27, 14, 1, 2, 14, '2023-03-17 14:16:27', NULL);
INSERT INTO taxi.orders (id, adress_from, adress_to, loading_time, unloading_time, payment_type,
employee_driver_id, client_id, tariff_id, employee_operator_id, payment_card_id, planning_load_time,
planning_unload_time) VALUES (11, 'пр. Просторный, д. 660 к. 673', 'пр. Февральский, д. 545', '2023-03-11
18:23:13', '2023-03-11 18:54:46', 'by_card', 21, 60, 1, 3, 60, '2023-03-11 18:23:13', NULL);
INSERT INTO taxi.orders (id, adress_from, adress_to, loading_time, unloading_time, payment_type,
employee_driver_id, client_id, tariff_id, employee_operator_id, payment_card_id, planning_load_time,
planning_unload_time) VALUES (12, 'ш. Курское, д. 86', 'ул. Правды, д. 81 стр. 54', '2023-03-23 02:04:24', '2023-
03-23 02:43:57', 'by_card', 21, 107, 1, 4, 107, '2023-03-11 05:05:20', NULL);
INSERT INTO taxi.orders (id, adress_from, adress_to, loading_time, unloading_time, payment_type,
employee_driver_id, client_id, tariff_id, employee_operator_id, payment_card_id, planning_load_time,
planning_unload_time) VALUES (13, 'пр. Гастелло, д. 394', 'ул. Лунная, д. 8/3 к. 5', '2023-03-23 08:22:16', '2023-
03-23 08:40:40', 'by_card', 20, 100, 1, 2, 100, '2023-03-11 05:05:20', NULL);
INSERT INTO taxi.orders (id, adress_from, adress_to, loading_time, unloading_time, payment_type,
employee_driver_id, client_id, tariff_id, employee_operator_id, payment_card_id, planning_load_time,
planning_unload_time) VALUES (14, 'ул. Казанская, д. 3/6 стр. 18', 'наб. Высоцкого, д. 226', '2023-03-11
05:05:20', '2023-03-11 05:50:47', 'by_card', 20, 120, 1, 4, 120, '2023-03-16 12:02:26', NULL);
INSERT INTO taxi.orders (id, adress_from, adress_to, loading_time, unloading_time, payment_type,
employee_driver_id, client_id, tariff_id, employee_operator_id, payment_card_id, planning_load_time,
planning_unload_time) VALUES (15, 'пр. Короткий, д. 2/4', 'пер. Морозова, д. 3/3', '2023-03-09 01:06:02', '2023-
03-09 01:36:52', 'by_card', 20, 20, 1, 4, 20, '2023-03-16 12:02:26', NULL);
INSERT INTO taxi.orders (id, adress_from, adress_to, loading_time, unloading_time, payment_type,
employee_driver_id, client_id, tariff_id, employee_operator_id, payment_card_id, planning_load_time,
planning_unload_time) VALUES (16, 'наб. Омская, д. 51', 'ш. Целинное, д. 267 стр. 747', '2023-03-25 15:29:15',
'2023-03-25 15:44:37', 'by_card', 19, 100, 1, 3, 100, '2023-03-16 12:02:26
', NULL);

```

```

--
-- TOC entry 3431 (class 0 OID 16405)
-- Dependencies: 218
-- Data for Name: payment_card; Type: TABLE DATA; Schema: taxi; Owner: postgres
--

```

```

INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (1, '1699615970457220', 1);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (2, '8268457215246835', 2);

```

```

INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (3, '7194037346156507', 3);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (4, '8803161585897955', 4);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (5, '7980624887746747', 5);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (6, '3366442834474830', 6);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (7, '9200144270417478', 7);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (8, '7264937122611108', 8);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (9, '2759765584684056', 9);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (10, '3764274399612759', 10);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (11, '7307765479321996', 11);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (12, '3978480387796640', 12);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (13, '3628025811260814', 13);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (14, '9916860963253447', 14);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (15, '5943438950068869', 15);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (16, '2950630104386637', 16);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (17, '7157861242973433', 17);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (18, '2018267020824292', 18);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (19, '3268186789950091', 19);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (20, '3944956248711886', 20);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (21, '9837146071197788', 21);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (22, '4255325601146952', 22);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (23, '8111716689310816', 23);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (24, '1200868970726830', 24);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (25, '8772027127064493', 25);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (26, '2845623902736328', 26);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (27, '3990730977601656', 27);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (28, '4769613723035993', 28);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (29, '3813061322979396', 29);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (30, '3908123175790581', 30);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (31, '5061553073917376', 31);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (32, '3879315885069839', 32);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (33, '7692037442578036', 33);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (34, '6766843473284978', 34);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (35, '4508623220045643', 35);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (36, '7596603053830067', 36);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (37, '6034981025723861', 37);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (38, '1386477065353242', 38);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (39, '7120482733329111', 39);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (40, '3472701530731524', 40);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (41, '2670660056753515', 41);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (42, '7407821881124176', 42);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (43, '1142657586443153', 43);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (44, '2560178693813379', 44);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (45, '9675034181762004', 45);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (46, '4547699168718354', 46);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (47, '8743699902666631', 47);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (48, '5857421479932044', 48);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (49, '6126064615296532', 49);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (50, '7989504723813616', 50);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (51, '4444763016002491', 51);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (52, '7227451993423114', 52);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (53, '4925329439356171', 53);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (54, '4743098066174508', 54);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (55, '5956274575020932', 55);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (56, '7132716975617109', 56);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (57, '9868784128447359', 57);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (58, '5025371344459759', 58);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (59, '9744484401158862', 59);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (60, '2955200583757863', 60);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (61, '9830673547284116', 61);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (62, '4102470899660688', 62);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (63, '2662612692644739', 63);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (64, '3122459726960634', 64);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (65, '6382834487080221', 65);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (66, '2397693376086153', 66);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (67, '5211081539207824', 67);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (68, '5835332596388681', 68);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (69, '9518677675950917', 69);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (70, '7454770080853378', 70);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (71, '9279830064981980', 71);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (72, '4839265215494485', 72);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (73, '3710994647359729', 73);

```



```

INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (74, '8194301693443541', 74);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (75, '7430304096070330', 75);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (76, '3796804164729259', 76);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (77, '6349935334865278', 77);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (78, '3637678705914771', 78);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (79, '9047575583838089', 79);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (80, '9899470733812467', 80);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (81, '1718068075785595', 81);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (82, '9006901555624174', 82);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (83, '1413012330674653', 83);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (84, '8711415404107641', 84);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (85, '9752550160099374', 85);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (86, '6709642275579163', 86);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (87, '5697123236349794', 87);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (88, '9209433026936376', 88);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (89, '2407343242785398', 89);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (90, '2610550244685350', 90);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (91, '3188913427887468', 91);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (92, '4592691345202451', 92);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (93, '1343965490834881', 93);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (94, '3730257442722045', 94);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (95, '5212759862627545', 95);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (96, '7181465691496296', 96);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (97, '8169959461924194', 97);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (98, '3186922075078812', 98);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (99, '8011509511471945', 99);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (100, '4768526834459642', 100);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (101, '8505977780365298', 101);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (102, '8054933881303824', 102);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (103, '1450351617953874', 103);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (104, '8540797622344258', 104);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (105, '8825102747232003', 105);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (106, '8722319774888144', 106);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (107, '5329655202416474', 107);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (108, '8884426397737550', 108);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (109, '1713807243186001', 109);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (110, '7363857577392965', 110);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (111, '9827570774026418', 111);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (112, '7549271435155281', 112);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (113, '5346853072444232', 113);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (114, '2506327561141290', 114);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (115, '5712722857908423', 115);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (116, '5859068092024311', 116);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (117, '3402978137604747', 117);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (118, '2018210308461666', 118);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (119, '1675698367814831', 119);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (120, '8327053866694997', 120);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (121, '6428550194386638', 121);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (122, '8950814894786673', 122);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (123, '4448073597959088', 123);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (124, '4061733088252717', 124);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (125, '3513792570289648', 125);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (126, '9380370991173853', 126);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (127, '7957584100933359', 127);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (128, '9881550381560010', 128);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (129, '3090930896865814', 129);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (130, '4931449552110791', 130);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (131, '2765764304965424', 131);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (132, '5269600472972612', 132);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (133, '6229137863674352', 133);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (134, '4580154838314669', 134);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (135, '3070785179851413', 135);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (136, '6684488349824636', 136);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (137, '4719301048003283', 137);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (138, '7981817291307443', 138);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (139, '8434809225548688', 139);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (140, '5759019929567692', 140);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (141, '7162770084826334', 141);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (142, '5065598472125347', 142);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (143, '6058378634193134', 143);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (144, '5204471771657065', 144);

```

```
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (145, '7632969919907755', 145);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (146, '1891439965006669', 146);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (147, '8595645374236417', 147);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (148, '9566817974316299', 148);
INSERT INTO taxi.payment_card (id, card_number, client_id) VALUES (149, '1757867045647928', 149);
```

```
--
-- TOC entry 3433 (class 0 OID 16418)
-- Dependencies: 220
-- Data for Name: position; Type: TABLE DATA; Schema: taxi; Owner: postgres
--
```

```
INSERT INTO taxi."position" (id, name) VALUES (1, 'Водитель');
INSERT INTO taxi."position" (id, name) VALUES (2, 'Водитель комфорт');
INSERT INTO taxi."position" (id, name) VALUES (3, 'Оператор');
INSERT INTO taxi."position" (id, name) VALUES (4, 'Менеджер');
```

```
--
-- TOC entry 3441 (class 0 OID 16479)
-- Dependencies: 228
-- Data for Name: tariff; Type: TABLE DATA; Schema: taxi; Owner: postgres
--
```

```
INSERT INTO taxi.tariff (id, name, base_cost) VALUES (1, 'Эконом', 200);
INSERT INTO taxi.tariff (id, name, base_cost) VALUES (2, 'Комфорт', 300);
```

```
--
-- TOC entry 3443 (class 0 OID 16511)
-- Dependencies: 230
-- Data for Name: work_schedule; Type: TABLE DATA; Schema: taxi; Owner: postgres
--
```

```
INSERT INTO taxi.work_schedule (id, days_per_week, time_of_day, start_time, end_time) VALUES (2, 'пн-пт',
'утро', '06:00:00', '14:00:00');
INSERT INTO taxi.work_schedule (id, days_per_week, time_of_day, start_time, end_time) VALUES (3, 'пн-пт',
'день', '14:00:00', '22:00:00');
INSERT INTO taxi.work_schedule (id, days_per_week, time_of_day, start_time, end_time) VALUES (4, 'пн-пт',
'ночь', '22:00:00', '06:00:00');
INSERT INTO taxi.work_schedule (id, days_per_week, time_of_day, start_time, end_time) VALUES (5, 'сб-вс',
'утро', '06:00:00', '14:00:00');
INSERT INTO taxi.work_schedule (id, days_per_week, time_of_day, start_time, end_time) VALUES (6, 'сб-вс',
'день', '14:00:00', '22:00:00');
INSERT INTO taxi.work_schedule (id, days_per_week, time_of_day, start_time, end_time) VALUES (7, 'сб-вс',
'ночь', '22:00:00', '06:00:00');
```

```
--
-- TOC entry 3465 (class 0 OID 0)
-- Dependencies: 223
-- Name: car_model_id_seq; Type: SEQUENCE SET; Schema: taxi; Owner: postgres
--
```

```
SELECT pg_catalog.setval('taxi.car_model_id_seq', 9, true);
```

```
--
-- TOC entry 3466 (class 0 OID 0)
-- Dependencies: 225
-- Name: cars_id_seq; Type: SEQUENCE SET; Schema: taxi; Owner: postgres
--
```

```
SELECT pg_catalog.setval('taxi.cars_id_seq', 17, true);
```

```
--
-- TOC entry 3467 (class 0 OID 0)
-- Dependencies: 215
-- Name: client_id_seq; Type: SEQUENCE SET; Schema: taxi; Owner: postgres
```

```

--
SELECT pg_catalog.setval('taxi.client_id_seq', 250, true);

--
-- TOC entry 3468 (class 0 OID 0)
-- Dependencies: 221
-- Name: employee_id_seq; Type: SEQUENCE SET; Schema: taxi; Owner: postgres
--

SELECT pg_catalog.setval('taxi.employee_id_seq', 30, true);

--
-- TOC entry 3469 (class 0 OID 0)
-- Dependencies: 234
-- Name: employee_shedule_id_seq; Type: SEQUENCE SET; Schema: taxi; Owner: postgres
--

SELECT pg_catalog.setval('taxi.employee_shedule_id_seq', 1, false);

--
-- TOC entry 3470 (class 0 OID 0)
-- Dependencies: 231
-- Name: orders_id_seq; Type: SEQUENCE SET; Schema: taxi; Owner: postgres
--

SELECT pg_catalog.setval('taxi.orders_id_seq', 35, true);

--
-- TOC entry 3471 (class 0 OID 0)
-- Dependencies: 217
-- Name: payment_card_id_seq; Type: SEQUENCE SET; Schema: taxi; Owner: postgres
--

SELECT pg_catalog.setval('taxi.payment_card_id_seq', 149, true);

--
-- TOC entry 3472 (class 0 OID 0)
-- Dependencies: 219
-- Name: position_id_seq; Type: SEQUENCE SET; Schema: taxi; Owner: postgres
--

SELECT pg_catalog.setval('taxi.position_id_seq', 4, true);

--
-- TOC entry 3473 (class 0 OID 0)
-- Dependencies: 227
-- Name: tariff_id_seq; Type: SEQUENCE SET; Schema: taxi; Owner: postgres
--

SELECT pg_catalog.setval('taxi.tariff_id_seq', 2, true);

--
-- TOC entry 3474 (class 0 OID 0)
-- Dependencies: 229
-- Name: work_schedule_id_seq; Type: SEQUENCE SET; Schema: taxi; Owner: postgres
--

SELECT pg_catalog.setval('taxi.work_schedule_id_seq', 7, true);

--
-- TOC entry 3233 (class 2606 OID 25170)
-- Name: tariff_base_cost; Type: CHECK CONSTRAINT; Schema: taxi; Owner: postgres

```

```

--
ALTER TABLE taxi.tariff
  ADD CONSTRAINT base_cost CHECK ((base_cost > 0)) NOT VALID;

--
-- TOC entry 3255 (class 2606 OID 16441)
-- Name: car_model car_model_pkey; Type: CONSTRAINT; Schema: taxi; Owner: postgres
--

ALTER TABLE ONLY taxi.car_model
  ADD CONSTRAINT car_model_pkey PRIMARY KEY (id);

--
-- TOC entry 3257 (class 2606 OID 16448)
-- Name: cars cars_pkey; Type: CONSTRAINT; Schema: taxi; Owner: postgres
--

ALTER TABLE ONLY taxi.cars
  ADD CONSTRAINT cars_pkey PRIMARY KEY (id);

--
-- TOC entry 3238 (class 2606 OID 16403)
-- Name: client client_pkey; Type: CONSTRAINT; Schema: taxi; Owner: postgres
--

ALTER TABLE ONLY taxi.client
  ADD CONSTRAINT client_pkey PRIMARY KEY (id);

--
-- TOC entry 3232 (class 2606 OID 25169)
-- Name: car_model cost_positive_check; Type: CHECK CONSTRAINT; Schema: taxi; Owner: postgres
--

ALTER TABLE taxi.car_model
  ADD CONSTRAINT cost_positive_check CHECK ((cost > 0)) NOT VALID;

--
-- TOC entry 3249 (class 2606 OID 16912)
-- Name: employee employee_passport_number_unique; Type: CONSTRAINT; Schema: taxi; Owner: postgres
--

ALTER TABLE ONLY taxi.employee
  ADD CONSTRAINT employee_passport_number_unique UNIQUE (passport_number);

--
-- TOC entry 3251 (class 2606 OID 16434)
-- Name: employee employee_pkey; Type: CONSTRAINT; Schema: taxi; Owner: postgres
--

ALTER TABLE ONLY taxi.employee
  ADD CONSTRAINT employee_pkey PRIMARY KEY (id);

--
-- TOC entry 3273 (class 2606 OID 25157)
-- Name: employee_shedule employee_shedule_pkey; Type: CONSTRAINT; Schema: taxi; Owner: postgres
--

ALTER TABLE ONLY taxi.employee_shedule
  ADD CONSTRAINT employee_shedule_pkey PRIMARY KEY (id);

--
-- TOC entry 3234 (class 2606 OID 25171)

```

```

-- Name: work_schedule end_time_after_start_time_check; Type: CHECK CONSTRAINT; Schema: taxi; Owner:
postgres
--

ALTER TABLE taxi.work_schedule
  ADD CONSTRAINT end_time_after_start_time_check CHECK ((end_time > start_time)) NOT VALID;

--
-- TOC entry 3271 (class 2606 OID 16535)
-- Name: orders orders_pkey; Type: CONSTRAINT; Schema: taxi; Owner: postgres
--

ALTER TABLE ONLY taxi.orders
  ADD CONSTRAINT orders_pkey PRIMARY KEY (id);

--
-- TOC entry 3241 (class 2606 OID 16920)
-- Name: payment_card payment_card_id_pk; Type: CONSTRAINT; Schema: taxi; Owner: postgres
--

ALTER TABLE ONLY taxi.payment_card
  ADD CONSTRAINT payment_card_id_pk PRIMARY KEY (id);

--
-- TOC entry 3235 (class 2606 OID 16728)
-- Name: orders payment_type_check; Type: CHECK CONSTRAINT; Schema: taxi; Owner: postgres
--

ALTER TABLE taxi.orders
  ADD CONSTRAINT payment_type_check CHECK (((payment_type)::bpchar = ANY (ARRAY['by_card'::bpchar,
'by_cash'::bpchar]))) NOT VALID;

--
-- TOC entry 3243 (class 2606 OID 16416)
-- Name: payment_card payment_card_number_unique; Type: CONSTRAINT; Schema: taxi; Owner: postgres
--

ALTER TABLE ONLY taxi.payment_card
  ADD CONSTRAINT payment_card_number_unique UNIQUE (card_number);

--
-- TOC entry 3253 (class 2606 OID 16914)
-- Name: employee phone_number_unique; Type: CONSTRAINT; Schema: taxi; Owner: postgres
--

ALTER TABLE ONLY taxi.employee
  ADD CONSTRAINT phone_number_unique UNIQUE (phone_number);

--
-- TOC entry 3245 (class 2606 OID 16916)
-- Name: position position_name_unique; Type: CONSTRAINT; Schema: taxi; Owner: postgres
--

ALTER TABLE ONLY taxi."position"
  ADD CONSTRAINT position_name_unique UNIQUE (name);

--
-- TOC entry 3247 (class 2606 OID 16425)
-- Name: position position_pkey; Type: CONSTRAINT; Schema: taxi; Owner: postgres
--

ALTER TABLE ONLY taxi."position"
  ADD CONSTRAINT position_pkey PRIMARY KEY (id);

```

```

--
-- TOC entry 3259 (class 2606 OID 16918)
-- Name: tariff tariff_name_unique; Type: CONSTRAINT; Schema: taxi; Owner: postgres
--

ALTER TABLE ONLY taxi.tariff
    ADD CONSTRAINT tariff_name_unique UNIQUE (name);

--
-- TOC entry 3261 (class 2606 OID 16484)
-- Name: tariff tariff_pkey; Type: CONSTRAINT; Schema: taxi; Owner: postgres
--

ALTER TABLE ONLY taxi.tariff
    ADD CONSTRAINT tariff_pkey PRIMARY KEY (id);

--
-- TOC entry 3236 (class 2606 OID 16717)
-- Name: orders unloading_after_loading_check; Type: CHECK CONSTRAINT; Schema: taxi; Owner: postgres
--

ALTER TABLE taxi.orders
    ADD CONSTRAINT unloading_after_loading_check CHECK (((unloading_time)::bpchar >
(unloading_time)::bpchar)) NOT VALID;

--
-- TOC entry 3263 (class 2606 OID 16516)
-- Name: work_schedule work_schedule_pkey; Type: CONSTRAINT; Schema: taxi; Owner: postgres
--

ALTER TABLE ONLY taxi.work_schedule
    ADD CONSTRAINT work_schedule_pkey PRIMARY KEY (id);

--
-- TOC entry 3239 (class 1259 OID 16414)
-- Name: fki_client_id_fk; Type: INDEX; Schema: taxi; Owner: postgres
--

CREATE INDEX fki_client_id_fk ON taxi.payment_card USING btree (client_id);

--
-- TOC entry 3264 (class 1259 OID 16541)
-- Name: fki_e; Type: INDEX; Schema: taxi; Owner: postgres
--

CREATE INDEX fki_e ON taxi.orders USING btree (employee_driver_id);

--
-- TOC entry 3265 (class 1259 OID 25135)
-- Name: fki_f; Type: INDEX; Schema: taxi; Owner: postgres
--

CREATE INDEX fki_f ON taxi.orders USING btree (payment_card_id);

--
-- TOC entry 3266 (class 1259 OID 16547)
-- Name: fki_orders_client_id_fk; Type: INDEX; Schema: taxi; Owner: postgres
--

CREATE INDEX fki_orders_client_id_fk ON taxi.orders USING btree (client_id);

--

```

```

-- TOC entry 3267 (class 1259 OID 25141)
-- Name: fki_orders_employee_id_operator_fk; Type: INDEX; Schema: taxi; Owner: postgres
--

CREATE INDEX fki_orders_employee_id_operator_fk ON taxi.orders USING btree (employee_operator_id);


--
-- TOC entry 3268 (class 1259 OID 16553)
-- Name: fki_orders_tariff_id_fk; Type: INDEX; Schema: taxi; Owner: postgres
--

CREATE INDEX fki_orders_tariff_id_fk ON taxi.orders USING btree (tariff_id);


--
-- TOC entry 3269 (class 1259 OID 16559)
-- Name: fki_orders_work_schedule_id_fk; Type: INDEX; Schema: taxi; Owner: postgres
--

CREATE INDEX fki_orders_work_schedule_id_fk ON taxi.orders USING btree (employee_operator_id);


--
-- TOC entry 3274 (class 1259 OID 25168)
-- Name: fki_w; Type: INDEX; Schema: taxi; Owner: postgres
--

CREATE INDEX fki_w ON taxi.employee_shedule USING btree (employee_id);


--
-- TOC entry 3277 (class 2606 OID 16768)
-- Name: cars cars_car_model_id; Type: FK CONSTRAINT; Schema: taxi; Owner: postgres
--

ALTER TABLE ONLY taxi.cars
  ADD CONSTRAINT cars_car_model_id FOREIGN KEY (car_model_id) REFERENCES taxi.car_model(id) NOT
  VALID;


--
-- TOC entry 3278 (class 2606 OID 16773)
-- Name: cars cars_employee_id; Type: FK CONSTRAINT; Schema: taxi; Owner: postgres
--

ALTER TABLE ONLY taxi.cars
  ADD CONSTRAINT cars_employee_id FOREIGN KEY (employee_id) REFERENCES taxi.employee(id) NOT
  VALID;


--
-- TOC entry 3284 (class 2606 OID 25163)
-- Name: employee_shedule employee_idFK; Type: FK CONSTRAINT; Schema: taxi; Owner: postgres
--

ALTER TABLE ONLY taxi.employee_shedule
  ADD CONSTRAINT "employee_idFK" FOREIGN KEY (employee_id) REFERENCES taxi.employee(id) NOT
  VALID;


--
-- TOC entry 3276 (class 2606 OID 16473)
-- Name: employee employee_position_id; Type: FK CONSTRAINT; Schema: taxi; Owner: postgres
--

ALTER TABLE ONLY taxi.employee
  ADD CONSTRAINT employee_position_id FOREIGN KEY (position_id) REFERENCES taxi."position"(id) NOT
  VALID;

```

```

--
-- TOC entry 3279 (class 2606 OID 16542)
-- Name: orders orders_client_id_fk; Type: FK CONSTRAINT; Schema: taxi; Owner: postgres
--

ALTER TABLE ONLY taxi.orders
  ADD CONSTRAINT orders_client_id_fk FOREIGN KEY (client_id) REFERENCES taxi.client(id) NOT VALID;

--
-- TOC entry 3280 (class 2606 OID 16536)
-- Name: orders orders_employee_id_fk; Type: FK CONSTRAINT; Schema: taxi; Owner: postgres
--

ALTER TABLE ONLY taxi.orders
  ADD CONSTRAINT orders_employee_id_fk FOREIGN KEY (employee_driver_id) REFERENCES
taxi.employee(id) NOT VALID;

--
-- TOC entry 3281 (class 2606 OID 25136)
-- Name: orders orders_employee_id_operator_fk; Type: FK CONSTRAINT; Schema: taxi; Owner: postgres
--

ALTER TABLE ONLY taxi.orders
  ADD CONSTRAINT orders_employee_id_operator_fk FOREIGN KEY (employee_operator_id) REFERENCES
taxi.employee(id) NOT VALID;

--
-- TOC entry 3282 (class 2606 OID 16548)
-- Name: orders orders_tariff_id_fk; Type: FK CONSTRAINT; Schema: taxi; Owner: postgres
--

ALTER TABLE ONLY taxi.orders
  ADD CONSTRAINT orders_tariff_id_fk FOREIGN KEY (tariff_id) REFERENCES taxi.tariff(id) NOT VALID;

--
-- TOC entry 3275 (class 2606 OID 16409)
-- Name: payment_card payment_card_client_id_fk; Type: FK CONSTRAINT; Schema: taxi; Owner: postgres
--

ALTER TABLE ONLY taxi.payment_card
  ADD CONSTRAINT payment_card_client_id_fk FOREIGN KEY (client_id) REFERENCES taxi.client(id) NOT
VALID;

--
-- TOC entry 3283 (class 2606 OID 25130)
-- Name: orders payment_card_fk; Type: FK CONSTRAINT; Schema: taxi; Owner: postgres
--

ALTER TABLE ONLY taxi.orders
  ADD CONSTRAINT payment_card_fk FOREIGN KEY (payment_card_id) REFERENCES taxi.payment_card(id)
NOT VALID;

--
-- TOC entry 3285 (class 2606 OID 25158)
-- Name: employee_schedule work_schedule_idFK; Type: FK CONSTRAINT; Schema: taxi; Owner: postgres
--

ALTER TABLE ONLY taxi.employee_schedule
  ADD CONSTRAINT "work_schedule_idFK" FOREIGN KEY (work_schedule_id) REFERENCES
taxi.work_schedule(id) NOT VALID;

-- Completed on 2023-12-27 17:13:26 MSK
--

```



```
-- PostgreSQL database dump complete
--
```

Вывод

В процессе выполнения лабораторной работы я овладел практическими навыками создания таблицы базы данных PostgreSQL, заполнения их рабочими данными, резервного копирования и восстановления базы данных.