Read me file for the Moose experiment

The experiment has been coded with PsychoPy builder
September 2025
Marine Vernet (Impact, CRNL, CNRS/Inserm/UCBL)
marine.vernet@inserm.fr

The experiment has been coded in centimeters.
This means that with a small monitor, part of the Moose might be cut out: this is normal!
This has been made so that the size (in cm) is the same no matter the size of the screen.


Now, in order for this to work properly, you need to tell your system what are you screen specification.

STEP 0

In a conda environement that has PsychoPy installed
Nagivate to the folder which contains your script files (with cd)
start the PsychoPy builder (psychopy -- builder)

STEP 1


Click on “Monitor settings and calibration” (it looks like a monitor, please screenshot below)
Create a new monitor, give it a name and enter the following:
Screen Distance (cm): 57
Size (pixels; Horiz, Vert): the resolution used by your system (not the native resolution of the screen)
Screen Width (cm): the width (not the diagonal!) of the display part of your screen (either from the specification of your screen, or measure it with a ruler. The more precise you are, the better will it be)

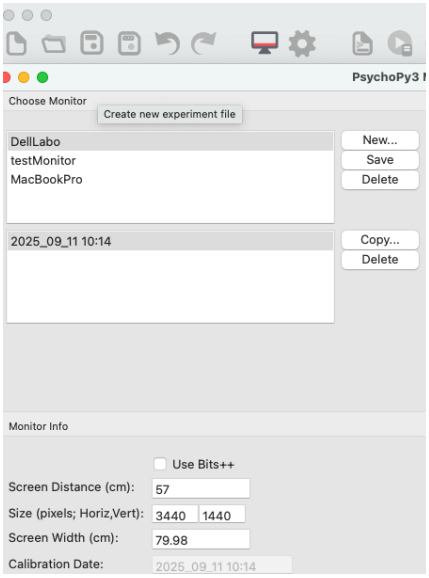

STEP 2 – if you keep working within the builder

In Experiment Setting : 

Enter the name of the screen you just created and make sure everything is entered as below:

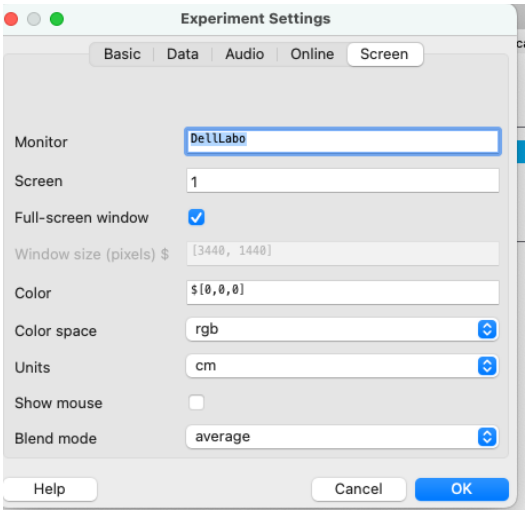

STEP 2 – if you work directly with the code

Make sure you update this part with the resolution and name of your screen.

```
# Setup the Window
win = visual.Window(
    size=[3440, 1440], fullscr=True, screen=0,
    winType='pyglet', allowGUI=False, allowStencil=False,
    monitor='DellLabo', color=[0,0,0], colorSpace='rgb',
    blendMode='avg', useFBO=True,
    units='cm')
```

But as you can see, the screen width is not specified in the code, so you have to do step 1 in the builder (there must be alternative but I don't know them).

STEP 3

Running the experiment: can be done from either the builder or the code.