TREES
and
RANDOM FORESTS **TS**

TREES

From “Decision Tree Algorithm Explained with Examples” (08/2021)
https://www.mygreatlearning.com/blog/decision-tree-algorithm/

:s” (08/2021)
e-algorithm/

Assumptions:

1- Discretization of continuous variables is required

2- The data taken for training should be wholly considered as root t

3- Distribution of records is done in a recursive manner on the basis of attribute values.

2

TREES - Processes involved in Decision Making

From “Decision Tree Algorithm Explained with Examples” (08/2021)
https://www.mygreatlearning.com/blog/decision-tree-algorithm/

1-Entropy

2-Information Gain:

Information Gain = Entropy of Parent – sum (weighted % * Entropy of Child)

Weighted % = Number of observations in particular child/sum
(observations in all child nodes)

3-Gini - “grau de variedade” em cada nó
(busca-se variedade zero)

4-Reduction in Variance

-tree works for regression and the output is continuous

-criteria of splitting are selected only when the variance is reduced to minimum

3

TREES - ALGORITHMS

From “Decision Tree Algorithm Explained with Examples” (08/2021)
https://www.mygreatlearning.com/blog/decision-tree-algorithm/

ID3 - Entropy / Information Gain

C4.5 - **NORMALIZED** information gain

CART

-greedy algorithm to reduce cost function
-for classification, Gini index cost function
-for regression, sum squared error

4

TREES – RANDOM FORESTS

From “An intuitive explanation of random forests” (08/2021)
https://towardsdatascience.com/an-intuitive-explanation-of-random-forests-109b04bca343
“The Intuition behind Random Forest”(08/2021) – https://www.kaggle.com/general/191828

WHY ?

To foster PRECISION (decrease VARIANCE + maintain BIAS)

→ FLEXIBILITY to unseen examples


BIAS and VARIANCE - (STATQUEST)
https://www.youtube.com/watch?v=EuBBz3bI-aA

RANDOM FORESTS: BUILDING, USING, EVALUATING - (STATQUEST)
https://www.youtube.com/watch?v=J4Wdy0Wc_xQ

5

TREES- RANDOM FORESTS


From “An intuitive explanation of random forests” (08/2021)
https://towardsdatascience.com/an-intuitive-explanation-of-random-forests-109b04bca343

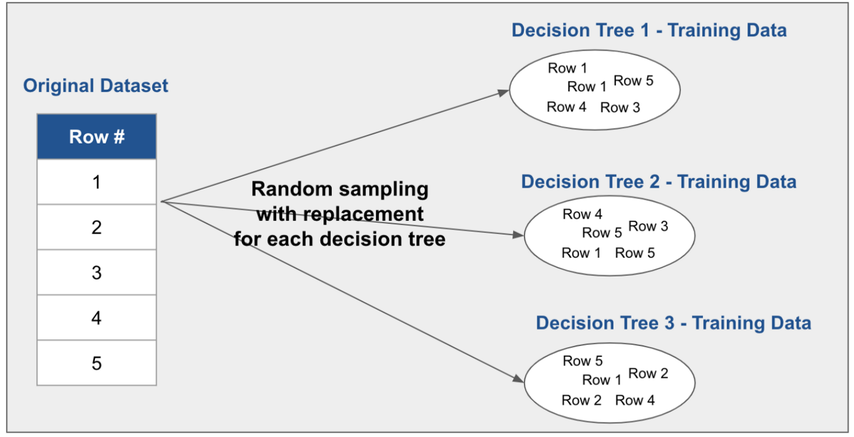


TS
)
:s-109b04bca343
g Data
g Data
ing Data
6

TREES – RANDOM FORESTS

From “An intuitive explanation of random forests” (08/2021)
https://towardsdatascience.com/an-intuitive-explanation-of-random-forests-109b04bca343

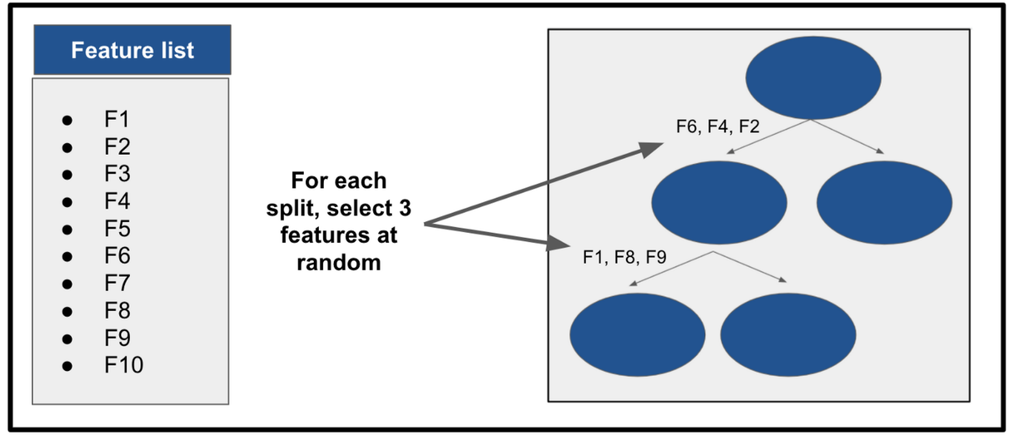

TS
)
:s-109b04bca343

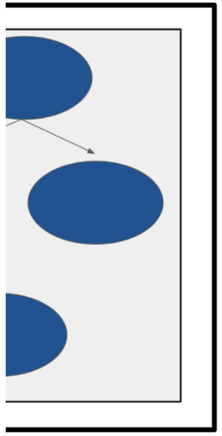

7

TREES – RANDOM FORESTS

From “An intuitive explanation of random forests” s\ (08/2021)
https://towardsdatascience.com/an-intuitive-explanation-of-random-forests-109b04bca343

INTUITION

Random forest algorithm encourages **DIVERSITY**:

- each decision tree is trained on a DIFFERENT SUBSET of the data
  (each decision tree “knows” a different subset of the data)
- selecting a RANDOM SUBSET(of size M) of the full list of features
  at every split

This process generates trees that have been exposed to DIFFERENT INFORMATION, which are then AGGREGATED together

TS
1)
:s-109b04bca343
data
ıres
8

TREES – RANDOM FORESTS

From “An intuitive explanation of random forests” (08/2021)
https://towardsdatascience.com/an-intuitive-explanation-of-random-forests-109b04bca343

HYPERPARAMETERS

1-MAX FEATURES: how many features are available at each split
(common default is the **square root** of the
total number of features)

2-COST FUNCTION: method used to identify the best split
in each tree — gini impurity, feature importance, etc.

3-NUMBER OF ESTIMATORS: how many trees are in the forest.

4-MAX DEPTH: how far from the root node can each tree grow.

5-MINIMUM SAMPLES FOR A SPLIT: number of records that must be
in each node to proceed with another split

9


RANDOM FORESTS - INTERPRETABILIDADE


BILIDADE

From “Interpreting random forests” (08/2021)
http://blog.datadive.net/interpreting-random-forests/

-breakdown of the prediction, in terms of value changes along the path
-together with feature names that “caused” every value change

INTUITION:
- there is a more “operational” way to define the prediction: through the sequence of **REGIONS of the FEATURE SPACE** that correspond to **each node/decision** in the tree.
- for each decision that a tree (or a forest) makes there is a path (or paths) from the Root of the tree to the leaf, consisting of a series of decisions, guarded by a particular feature
- each decision either adds or subtracts from the value given in the parent node
-the prediction can be defined as the sum of the feature contributions + the “bias” (i.e. the mean given by the topmost region that covers the entire training set).

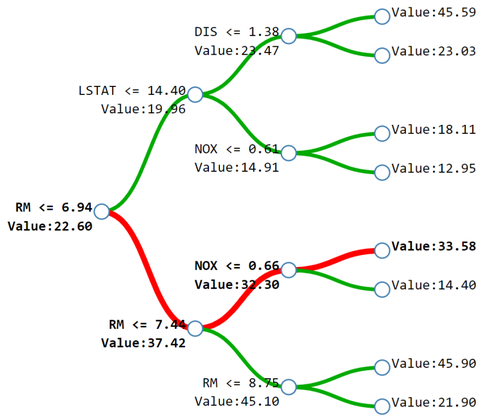



Prediction: **33.58** ≈ **22.60** (trainset mean) **+ 14.82**(gain from RM) **- 5.12**(loss from RM) **+ 1.28**(gain from NOX)

RM	LSTAT	NOX	DIST	
3.1	4.5	0.54	2.6	Predict
6.5	16.1	0.12	2.2	Predict
7.1	10.5	0.31	1.8	Predict

from RM) **- 5.12**(loss from RM) **+**

IST	
.6	Predict
.2	Predict
8	Predict

CLASSICAL ML BOOK: https://hastie.su.domains/ElemStatLearn/