


**Yasir N.**  
[www.yasirnawaz.me](http://www.yasirnawaz.me)  
[@sudoyasir](https://twitter.com/sudoyasir)

# 8 **EXCITING NEW** **JAVASCRIPT** **CONCEPTS**

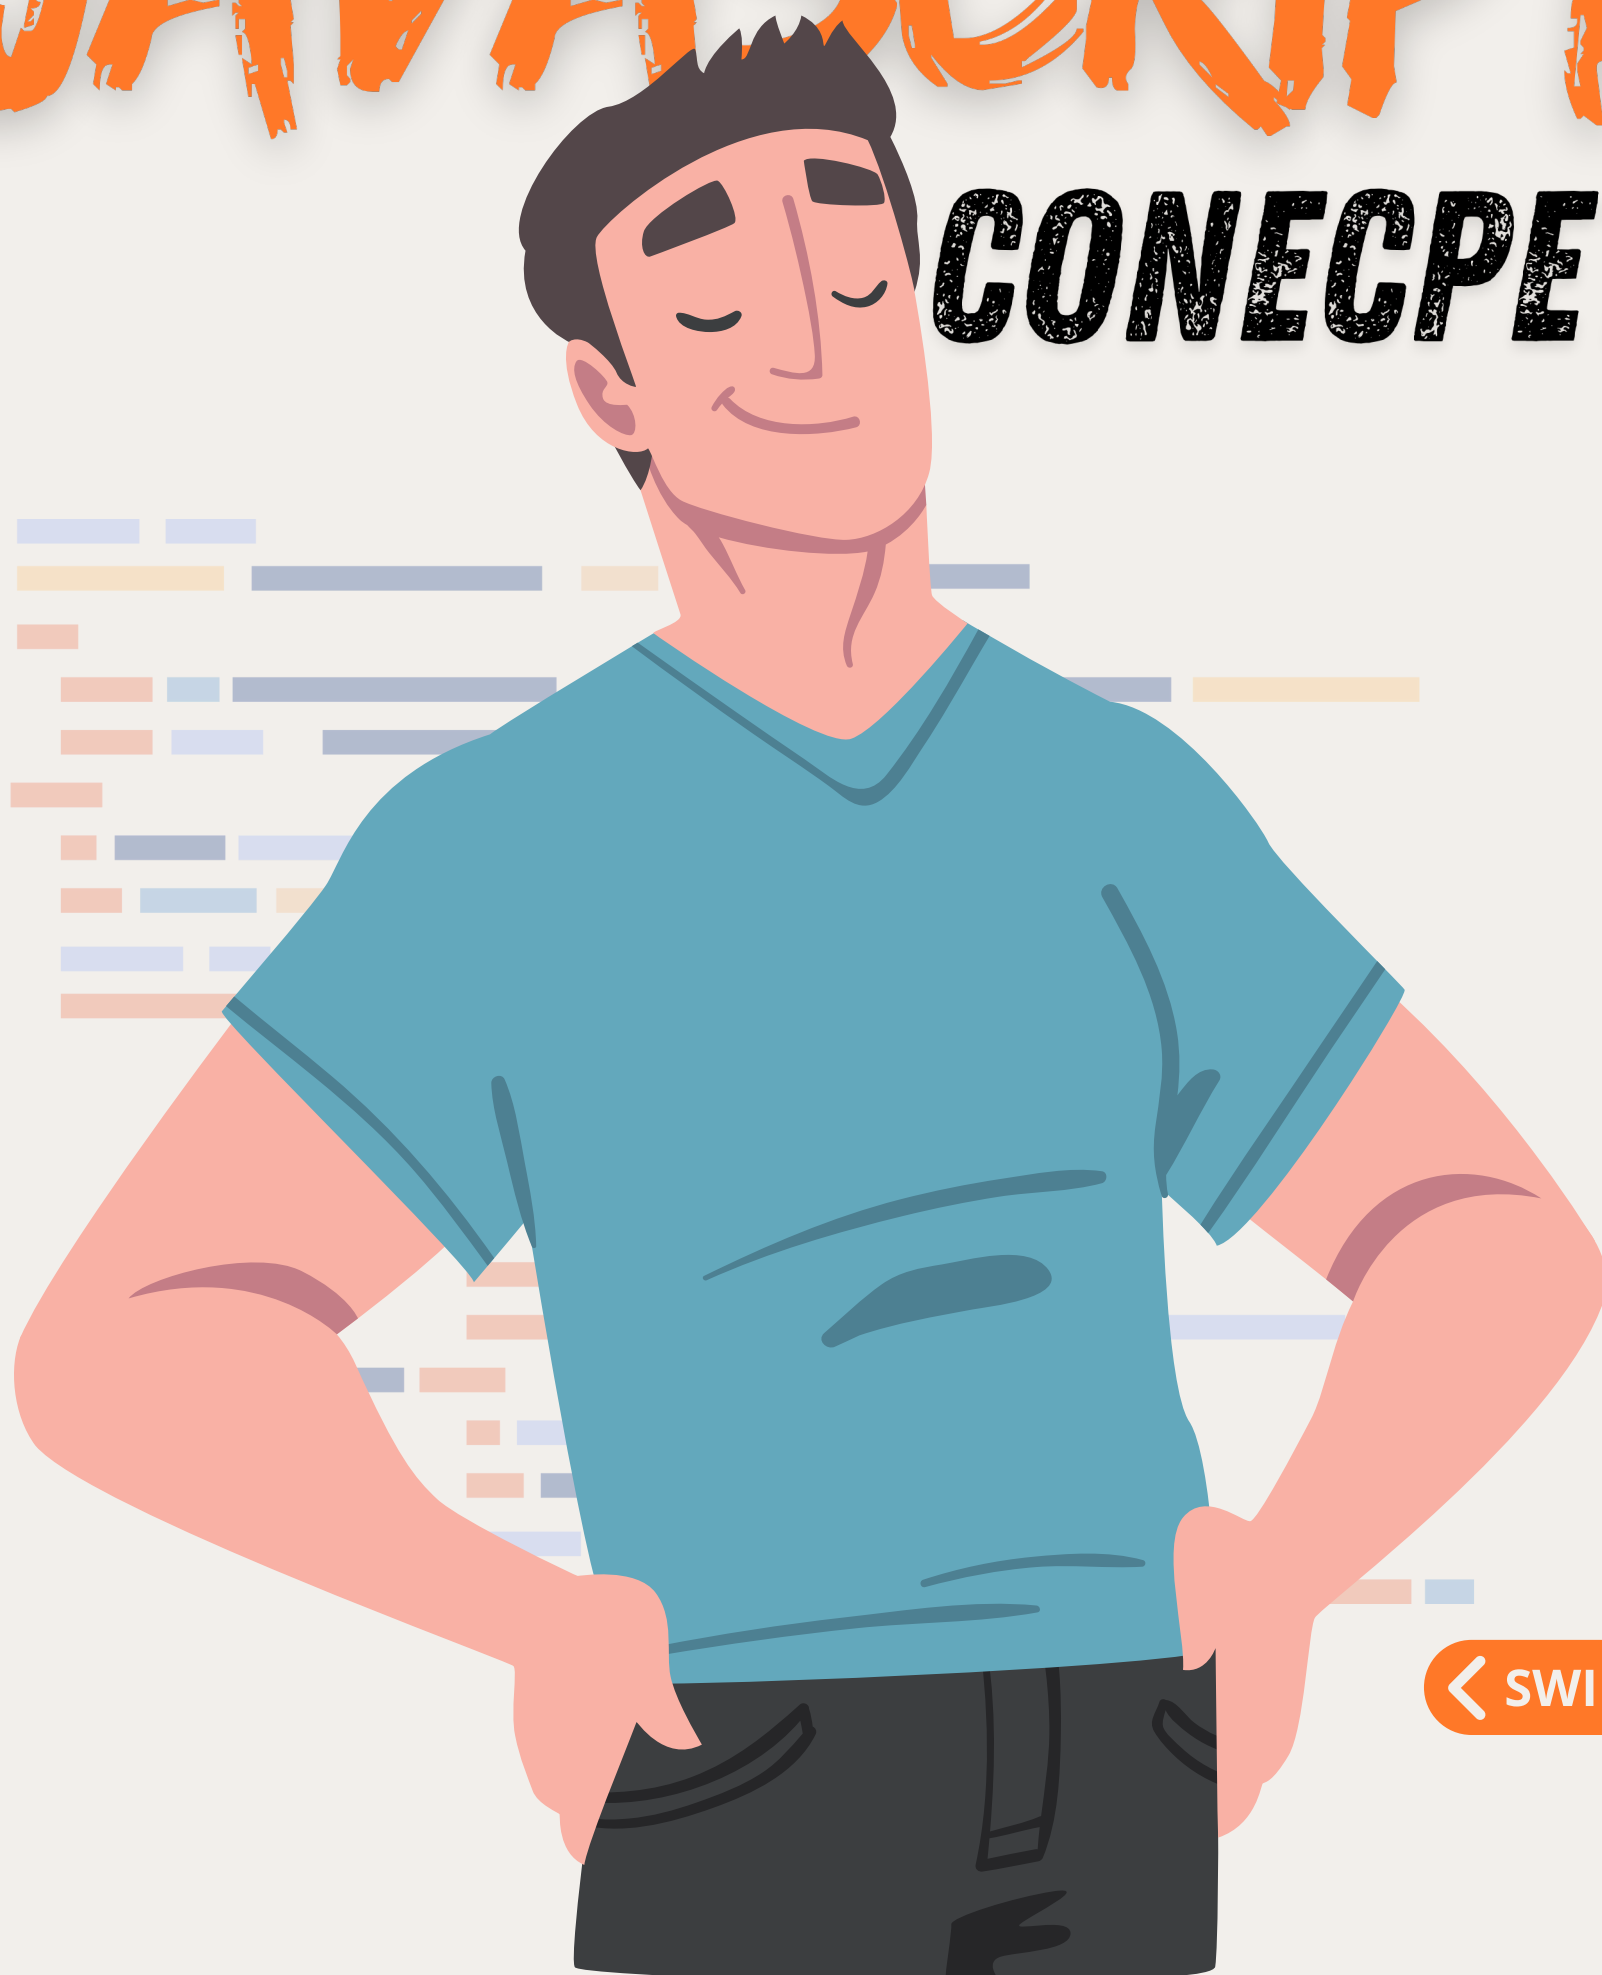

# 1. Optional Chaining (?.)

Introduced in ECMAScript 2020, optional chaining allows you to read the value of a property located deep within a chain of connected objects without having to check that each reference in the chain is valid.




OptionalChaining.js

```
let name = person?.address?.street?.name;
```

**Yasir N.**  
www.yasirnawaz.me  
@sudoyasir

## 2. Nullish Coalescing (??)

Also introduced in ECMAScript 2020, the nullish coalescing operator returns the first operand if it's not null or undefined, and the second operand otherwise.

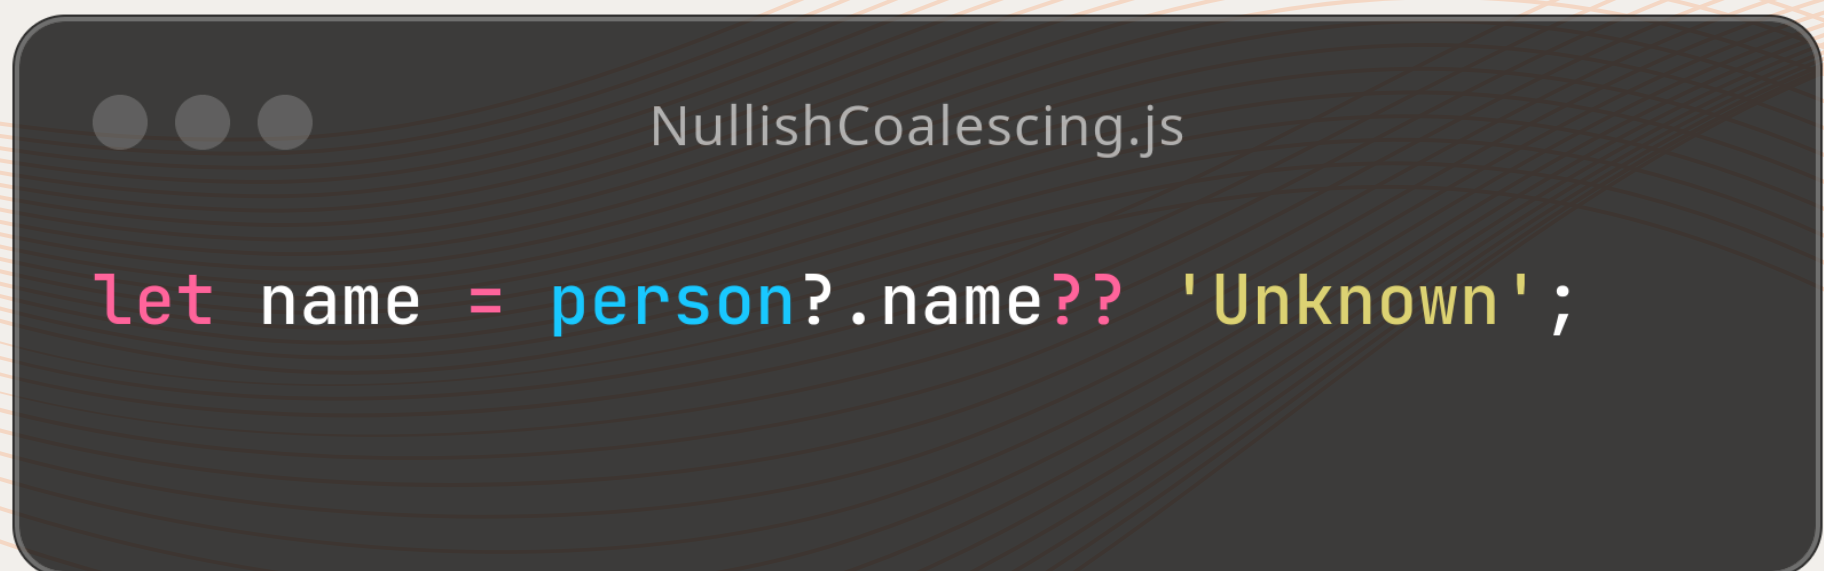

```
let name = person?.name ?? 'Unknown';
```

**Yasir N.**  
www.yasirnawaz.me  
@sudoyasir

## 3. BigInt

A new numeric primitive in JavaScript, BigInt is used to represent integers with arbitrary precision, allowing for accurate calculations with large integers.




```
BigInt.js

const x = 12345678901234567890n;
```

**Yasir N.**  
www.yasirnawaz.me  
@sudoyasir

## 4. globalThis

A new global object, `globalThis`, provides a way to access the global object in a way that's compatible with modern JavaScript environments.

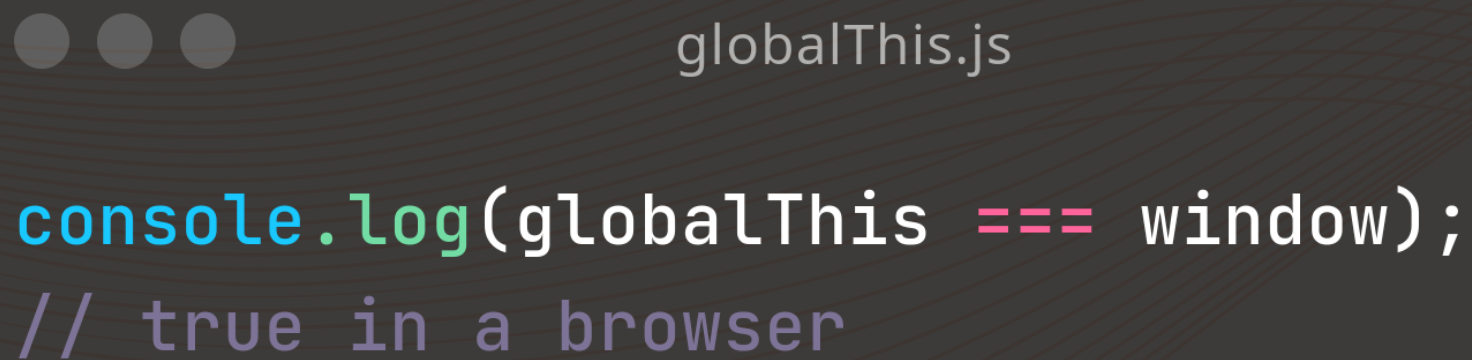

```
globalThis.js  
  
console.log(globalThis === window);  
// true in a browser
```

**Yasir N.**

www.yasirnawaz.me

@sudoyasir

# 5. `matchAll()`

A new method on the String prototype, `matchAll()` returns an iterator that yields matches of a regular expression against a string, including capturing groups.



matchAll.js

```
const regex = /(\w)(\d)/g;
const str = 'a1b2c3';
for (const match of str.matchAll(regex)) {
  console.log(match);
}
```



# 6. Promise.allSettled()

A new method on the Promise API, `allSettled()` returns a promise that is resolved when all of the promises in an array are either resolved or rejected.

promisteAllSettled.js

```
const promises = [Promise.resolve('a'), Promise.reject('b'), Promise.resolve('c')];  
Promise.allSettled(promises).then((results) => console.log(results));
```

**Yasir N.**

www.yasirnawaz.me

@sudoyasir

# 7. String.prototype.at()

A new method on the String prototype, `at()` returns the character at the specified index, allowing for negative indices to access characters from the end of the string.



stringPrototypeAt.js

```
const str = 'hello';  
console.log(str.at(0)); // 'h'  
console.log(str.at(-1)); // 'o'
```



**Yasir N.**  
www.yasirnawaz.me  
@sudoyasir

# 8. Error Cause

A new property on Error objects, cause allows you to specify the underlying cause of an error.

```
errorCause.js

try {
  throw new Error("Error occurred", { cause: new Error("Underlying cause") });
} catch (error) {
  console.log(error.cause);
}
```



# Yasir N.

💡 Top Web Development Voice

/in/sudoyasir

www.yasirnazam.me