

Tarea 4-2

BD

Mario Sánchez Barroso

2º CFGS DAM

IES Profesor Juan Antonio Carrillo Salcedo

Índice

Instalación Contenedores Docker	3
Tabla actor	5
Tabla Language	6
Tabla Staff	6
Anotación Final	10

Instalación Contenedores Docker

Al igual que el ejercicio anterior levantamos los containers de Docker mediante el comando


```
docker-compose up -d
```

```
~\Downloads\my_ssh_apache_mysql_image (1m 23.99s)
docker-compose up -d
#9 23.86 Preparing to unpack .../libwrap0_7.6.q-25_amd64.deb ...
#9 23.89 Unpacking libwrap0:amd64 (7.6.q-25) ...
#9 24.08 Selecting previously unselected package libmagic1:amd64.
#9 24.08 Preparing to unpack .../libmagic1_1%3a5.25-2ubuntu1.4_amd64.deb ...
#9 24.10 Unpacking libmagic1:amd64 (1:5.25-2ubuntu1.4) ...
#9 24.27 Selecting previously unselected package file.
#9 24.27 Preparing to unpack .../file_1%3a5.25-2ubuntu1.4_amd64.deb ...
#9 24.29 Unpacking file (1:5.25-2ubuntu1.4) ...
#9 24.42 Selecting previously unselected package iproute2.
#9 24.42 Preparing to unpack .../iproute2_4.3.0-1ubuntu3.16.04.5_amd64.deb ...
#9 24.45 Unpacking iproute2 (4.3.0-1ubuntu3.16.04.5) ...
#9 24.68 Selecting previously unselected package ifupdown.
#9 24.68 Preparing to unpack .../ifupdown_0.8.10ubuntu1.4_amd64.deb ...
#9 24.72 Unpacking ifupdown (0.8.10ubuntu1.4) ...
#9 24.90 Selecting previously unselected package libisc-export160.
#9 24.90 Preparing to unpack .../libisc-export160_1%3a9.10.3.dfsg.P4-8ubuntu1.19_amd64.deb ...
#9 24.92 Unpacking libisc-export160 (1:9.10.3.dfsg.P4-8ubuntu1.19) ...
#9 25.10 Selecting previously unselected package libdns-export162.
#9 25.10 Preparing to unpack .../libdns-export162_1%3a9.10.3.dfsg.P4-8ubuntu1.19_amd64.deb ...
#9 25.12 Unpacking libdns-export162 (1:9.10.3.dfsg.P4-8ubuntu1.19) ...
#9 25.34 Selecting previously unselected package isc-dhcp-client.
#9 25.34 Preparing to unpack .../isc-dhcp-client_4.3.3-5ubuntu12.10_amd64.deb ...
```

En el Docker desktop comprobamos como se instalo y empezó a correr el contenedor



Para comprobar que phpMyAdmin esta corriendo accedemos a el con localhost y el puerto 8000 en este caso. Accedemos a el mediante el usuario root y contraseña test

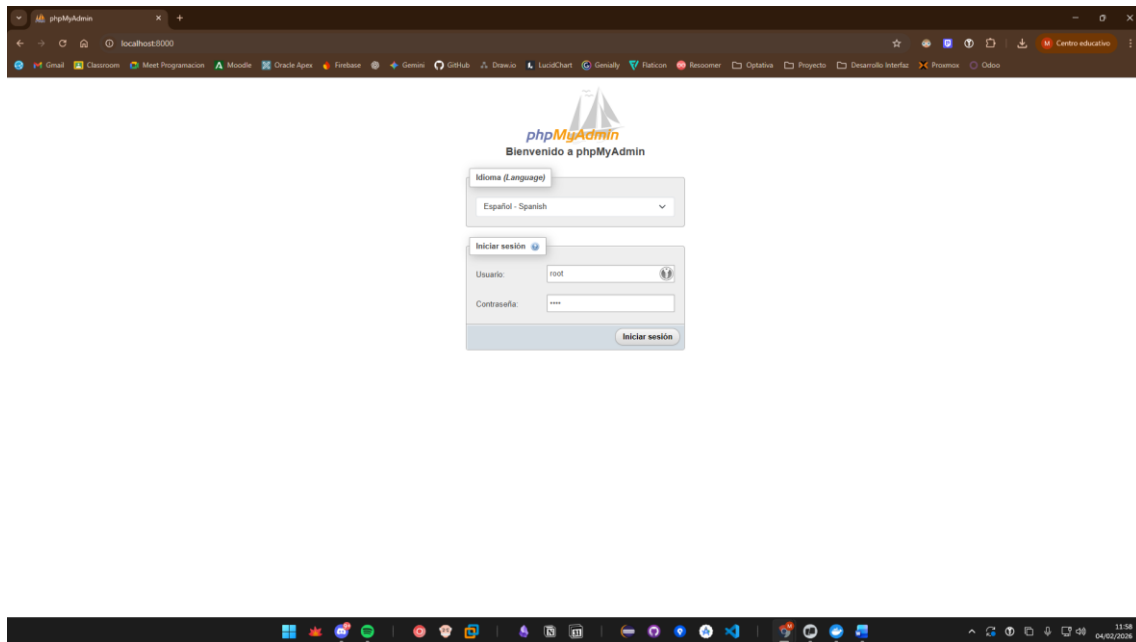


Para poder meter la base de datos de mysql, en este caso es sakila, hemos tenido que meter primero el schema, teniendo en cuenta que el archivo que nos descargamos va todo desordenado con respecto a las foreign keys, y eso te lo tenemos que especificar a phpmyadmin aquí:

Debemos desactivar la revisión de las claves foráneas, luego de hacer esto el orden de importación es 1º el schema y 2º la data



Podemos comprobar como tenemos la base de datos importada correctamente en el phpMyAdmin

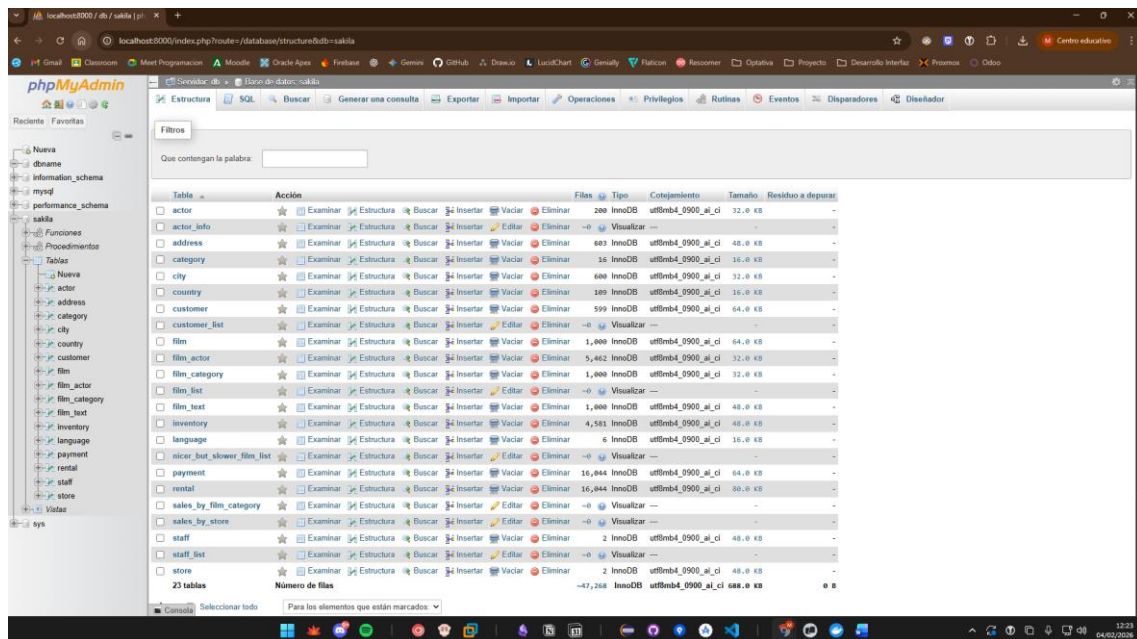

Hacemos varias consultas a diferentes tablas

Tabla actor

```
SELECT * FROM actor;
```

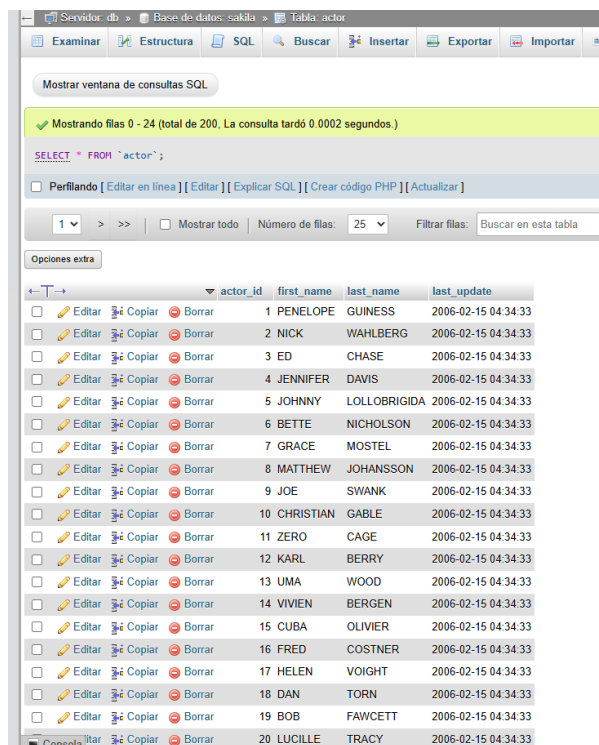


Tabla Language

```
SELECT * FROM language;
```

Mostrando filas 0 - 5 (total de 6, La consulta tardó 0.0003 segundos.)

SELECT * FROM `language`

☐ Perfilando [[Editar en línea](#)] [[Editar](#)] [[Explicar SQL](#)] [[Crear código PHP](#)] [[Actualizar](#)]

☐ Mostrar todo | Número de filas: 25 | Filtrar filas:

Opciones extra

			language_id	name	last_update				
☐		Editar		Copiar		Borrar	1	English	2006-02-15 05:02:19
☐		Editar		Copiar		Borrar	2	Italian	2006-02-15 05:02:19
☐		Editar		Copiar		Borrar	3	Japanese	2006-02-15 05:02:19
☐		Editar		Copiar		Borrar	4	Mandarin	2006-02-15 05:02:19
☐		Editar		Copiar		Borrar	5	French	2006-02-15 05:02:19
☐		Editar		Copiar		Borrar	6	German	2006-02-15 05:02:19

Tabla Staff

```
SELECT * FROM staff;
```

Mostrando filas 0 - 1 (total de 2, La consulta tardó 0.0006 segundos.)

SELECT * FROM `staff`

☐ Perfilando [[Editar en línea](#)] [[Editar](#)] [[Explicar SQL](#)] [[Crear código PHP](#)] [[Actualizar](#)]


☐ Mostrar todo | Número de filas: 25 | Filtrar filas: Ordenar según la clave: Ninguna

Opciones extra

				staff_id	first_name	last_name	address_id	picture	email	store_id	active	username	password	last_update		
☐		Editar		Copiar		Borrar	1	Mike	Hillyer	3 [BLOB - 35.5 KB]	Mike.Hillyer@sakilastaff.com	1	1	Mike	8cb2237d0679ca88db6464eac60da96345513964	2006-02-15 03:57:16
☐		Editar		Copiar		Borrar	2	Jon	Stephens	4 NULL	Jon.Stephens@sakilastaff.com	2	1	Jon	NULL	2006-02-15 03:57:16

☐ Seleccionar todo Para los elementos que están marcados: Editar Copiar Borrar Exportar

Ahora vamos a conectarnos al servicio de mysql que esta corriendo en el Docker, para ello primero vamos a insertar la base de datos de sakila a dbname, que es la base de datos corriendo en este puerto. Una vez lo tengamos todo importado vamos a hacer consultas mediante la terminal de mysql

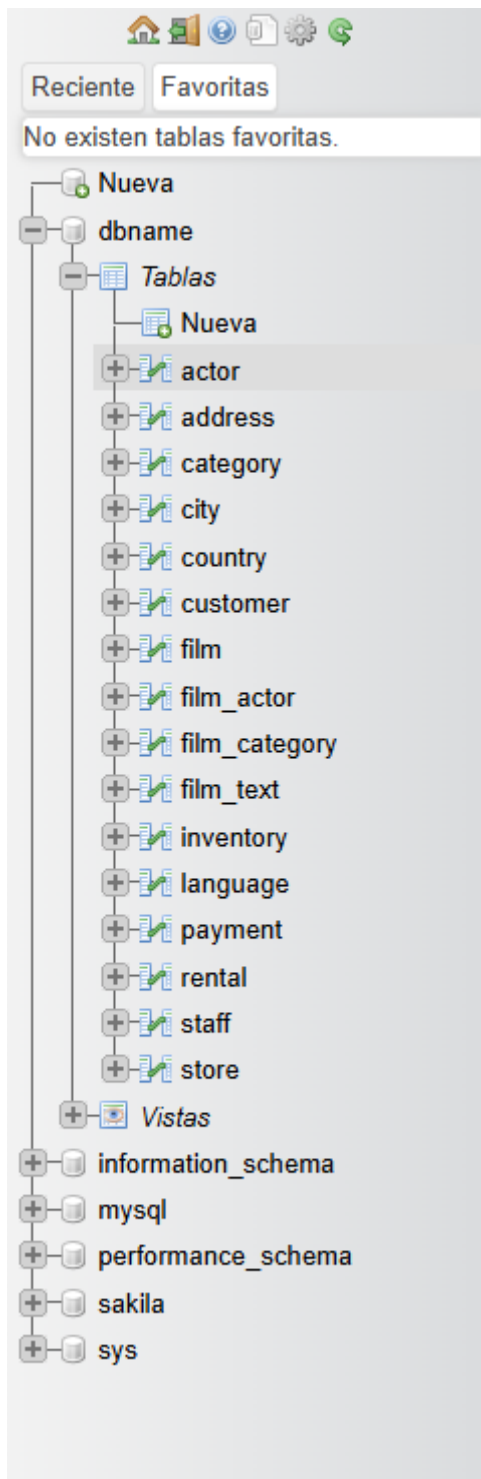

Para poder conectarnos a mysql desde la terminal, lo hemos hecho mediante Docker, ya que nuestro ordenador no tiene mysql instalado, lo tiene el Docker, así que para ello hemos utilizado este comando:

```
docker run -it --rm mysql mysql -h host.docker.internal -P 3336 -u root -p
```

Ponemos el comando `use dbname` para entrar en la base de datos donde tenemos

```
mysql> use dbname;
Reading table information for completion of table and column names
You can turn off this feature to get a quicker startup with -A

Database changed
```

Mostramos las tablas de dbname

```
Database changed
mysql> show tables;
+-----+
| Tables_in_dbname |
+-----+
| actor              |
| address            |
| category           |
| city              |
| country            |
| customer           |
| customer_list      |
| film               |
| film_actor         |
| film_category      |
| film_list          |
| film_text          |
| inventory          |
| language           |
| nicer_but_slower_film_list |
| payment            |
| rental             |
| sales_by_film_category |
| sales_by_store     |
| staff              |
| staff_list         |
| store              |
+-----+
22 rows in set (0.002 sec)
```


Limitamos la consulta a 5 para que no muestre tantas tuplas

```
mysql> SELECT * FROM film LIMIT 5;
```

film_id	title	description	release_year	language_id	original_language_id	rental_duration	rental_rate	length	replacement_cost	rating	special_features	last_update
1	ACADEMY DINOSAUR	A Epic Drama of a Feminist And a Mad Scientist who must Battle a Teacher in The Canadian Rockies	2006	1	NULL	6	0.99	86	20.99	PG	Deleted Scenes, Behind the Scenes	2006-02-15 05:03:42
2	ACE GOLDFINGER	A Astounding Epistle of a Database Administrator And a Explorer who must Find a Car in Ancient China	2006	1	NULL	3	4.99	48	12.99	G	Trailers, Deleted Scenes	2006-02-15 05:03:42
3	ADAPTATION HOLES	A Astounding Reflection of a Lumberjack And a Car who must Sink a Lumberjack in A Balloon Factory	2006	1	NULL	7	2.99	50	18.99	NC-17	Trailers, Deleted Scenes	2006-02-15 05:03:42
4	AFFAIR PREJUDICE	A Fanciful Documentary of a Frisbee And a Lumberjack who must Chase a Monkey in A Shark Tank	2006	1	NULL	5	2.99	117	26.99	G	Commentaries, Behind the Scenes	2006-02-15 05:03:42
5	AFRICAN EGG	A Fast-Paced Documentary of a Pastry Chef And a Dentist who must Pursue a Forensic Psychologist in The Gulf of Mexico	2006	1	NULL	6	2.99	130	22.99	G	Deleted Scenes	2006-02-15 05:03:42

```
5 rows in set (0.002 sec)
```

```
mysql> SELECT * FROM customer WHERE customer_id = 1;
```

customer_id	store_id	first_name	last_name	email	address_id	active	create_date	last_update
1	1	MARY	SMITH	MARY.SMITH@dbnamecustomer.org	5	1	2006-02-14 22:04:36	2006-02-15 04:57:20

```
1 row in set (0.002 sec)
```

Y con esto ya tenemos hecha varias consultas desde mysql.

Anotación Final

Cabe destacar una pequeña duda, en la tarea he hecho lo de la base de datos de sakila, y luego con dbname, pensando que el servicio de mysql solo estaba conectado a dbname, pero no, phpMyAdmin esta conectado a mysql del Docker, no hacia falta crear 2 bases de datos independientes, con crear una nos hubiera valido.

Para comprobarlo, desde mysql me he conectado a la bbdd de sakila creada antes desde phpMyAdmin y se han podido realizar las consultas correctamente.

```
mysql> use sakila;  
Database changed
```

```
mysql> SHOW TABLES;  
+-----+  
| Tables_in_sakila |  
+-----+  
| actor             |  
| actor_info        |  
| address            |  
| category           |  
| city               |  
| country            |  
| customer            |  
| customer_list      |  
| film               |  
| film_actor         |  
| film_category      |  
| film_list          |  
| film_text          |  
| inventory          |  
| language           |  
| nicer_but_slower_film_list |  
| payment            |  
| rental             |  
| sales_by_film_category |  
| sales_by_store     |  
| staff              |  
| staff_list         |  
| store              |  
+-----+  
23 rows in set (0.002 sec)
```