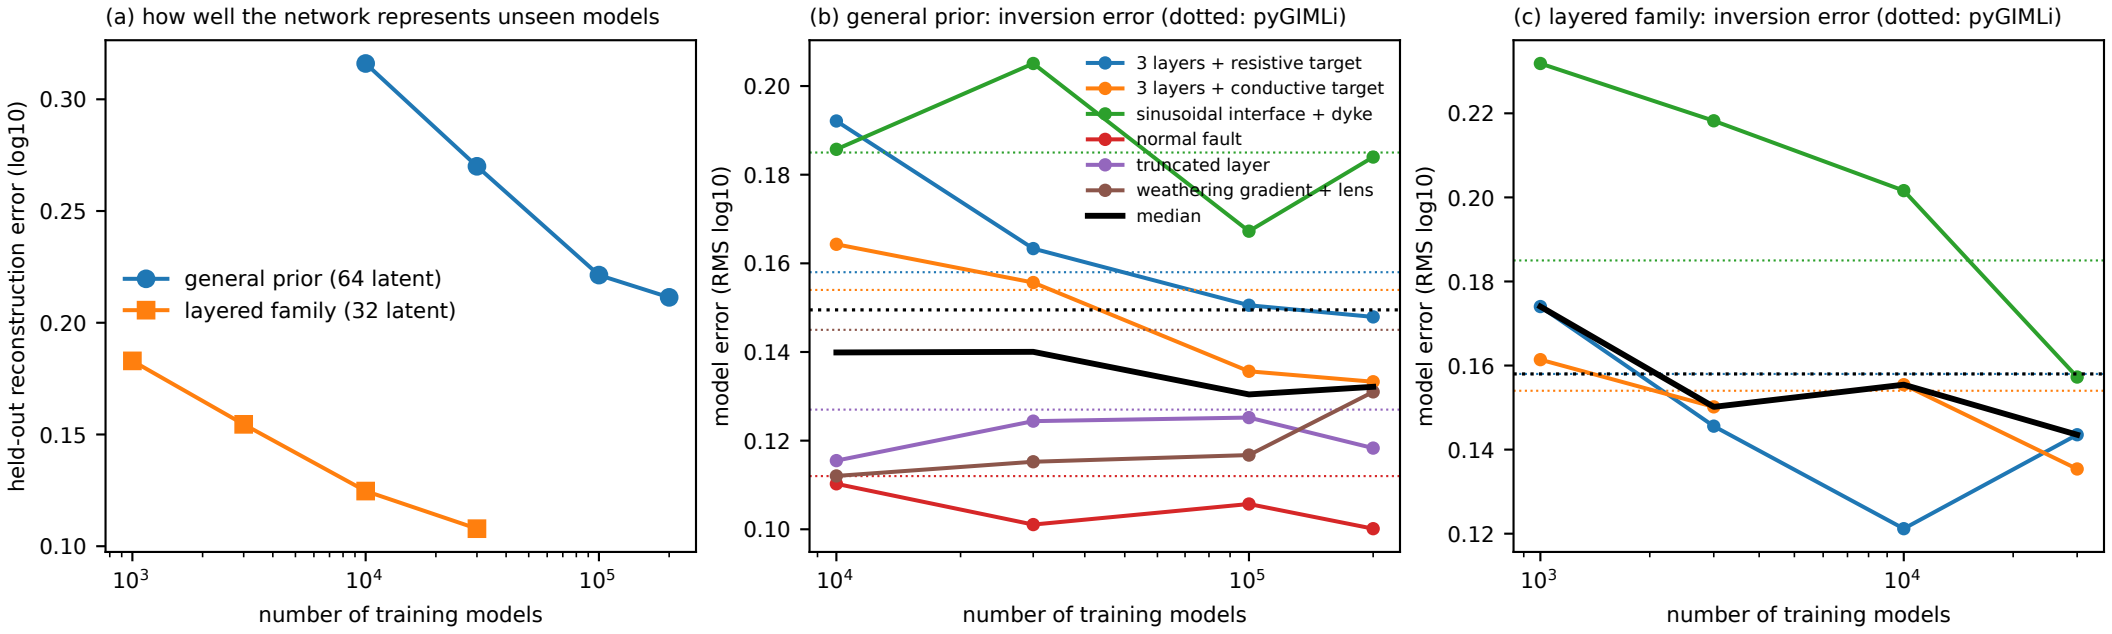
(a) how well the network represents unseen models
held-out reconstruction error (log10)
0.30
0.25
0.20
0.15
0.10
general prior (64 latent)
layered family (32 latent)
10^3
10^4
10^5
number of training models
(b) general prior: inversion error (dotted: pyGIMLi)
model error (RMS log10)
0.20
0.18
0.16
0.14
0.12
0.10
3 layers + resistive target
3 layers + conductive target
sinusoidal interface + dyke
normal fault
truncated layer
weathering gradient + lens
median
10^4
10^5
number of training models
(c) layered family: inversion error (dotted: pyGIMLi)
model error (RMS log10)
0.22
0.20
0.18
0.16
0.14
0.12
10^3
10^4
number of training models