# Supplementary material: training models

Figure S1: the first 100 of the 200 000 random-prior training models (general VAE).

Figures S2-S101: for each of the 100 benchmark tests, the true model (not used), the pyGIMLi model with its dip-aware analysis (interfaces along the dominant dip, anomalies, depth of investigation) and the first 100 of the 20 000 guided training models generated from it.

All models are log10 resistivity images on the 32 x 96 grid of the inversion domain; they are exactly the training models used in the paper (same random seeds).

Figure S1

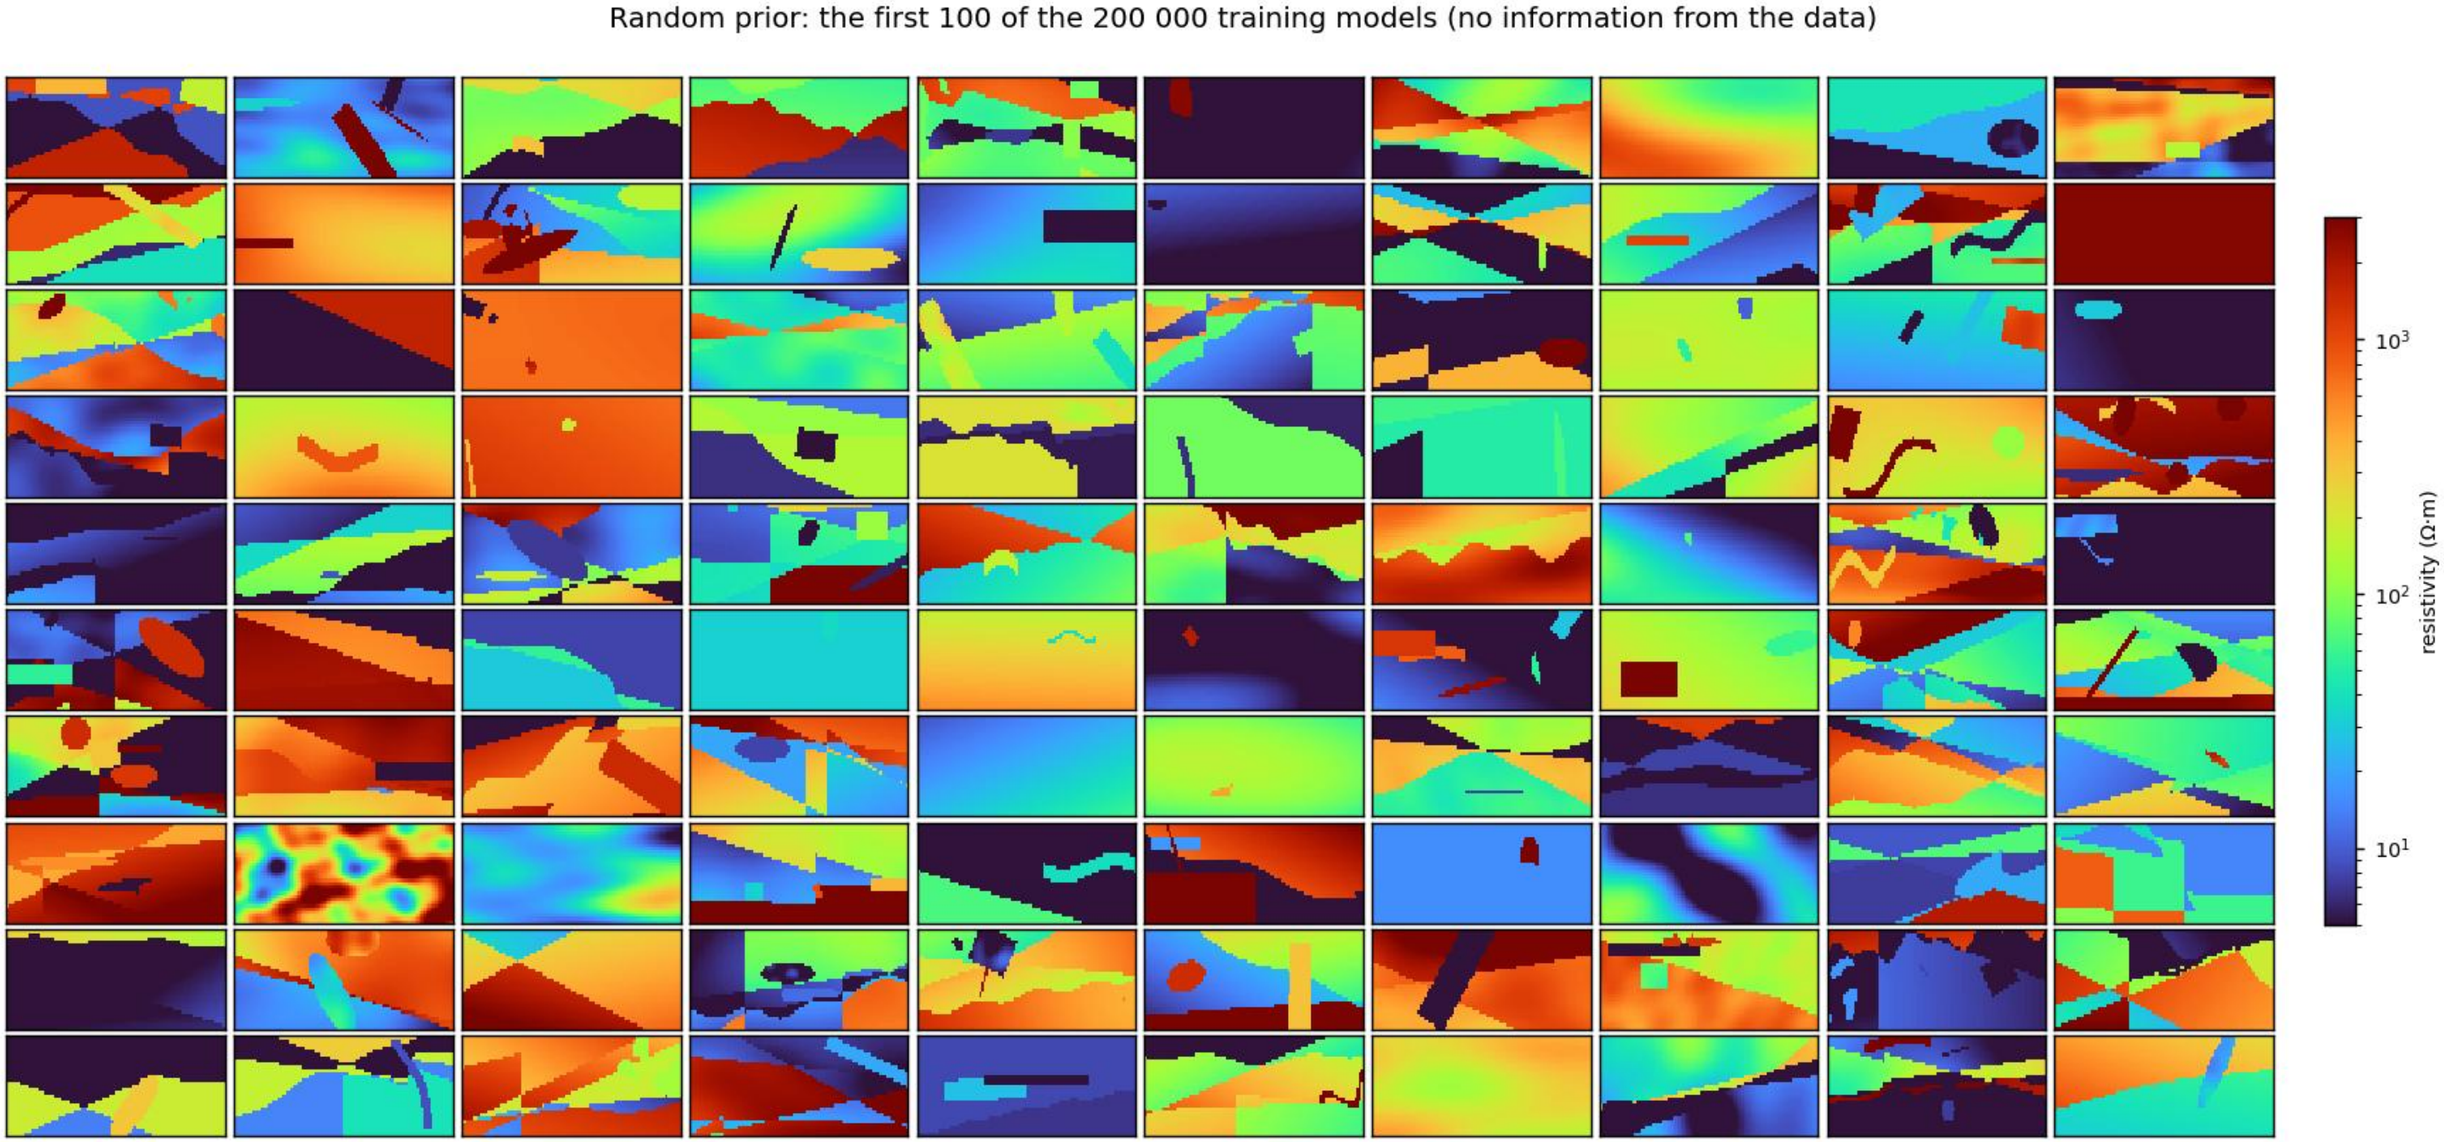
Random prior: the first 100 of the 200 000 training models (no information from the data)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S2

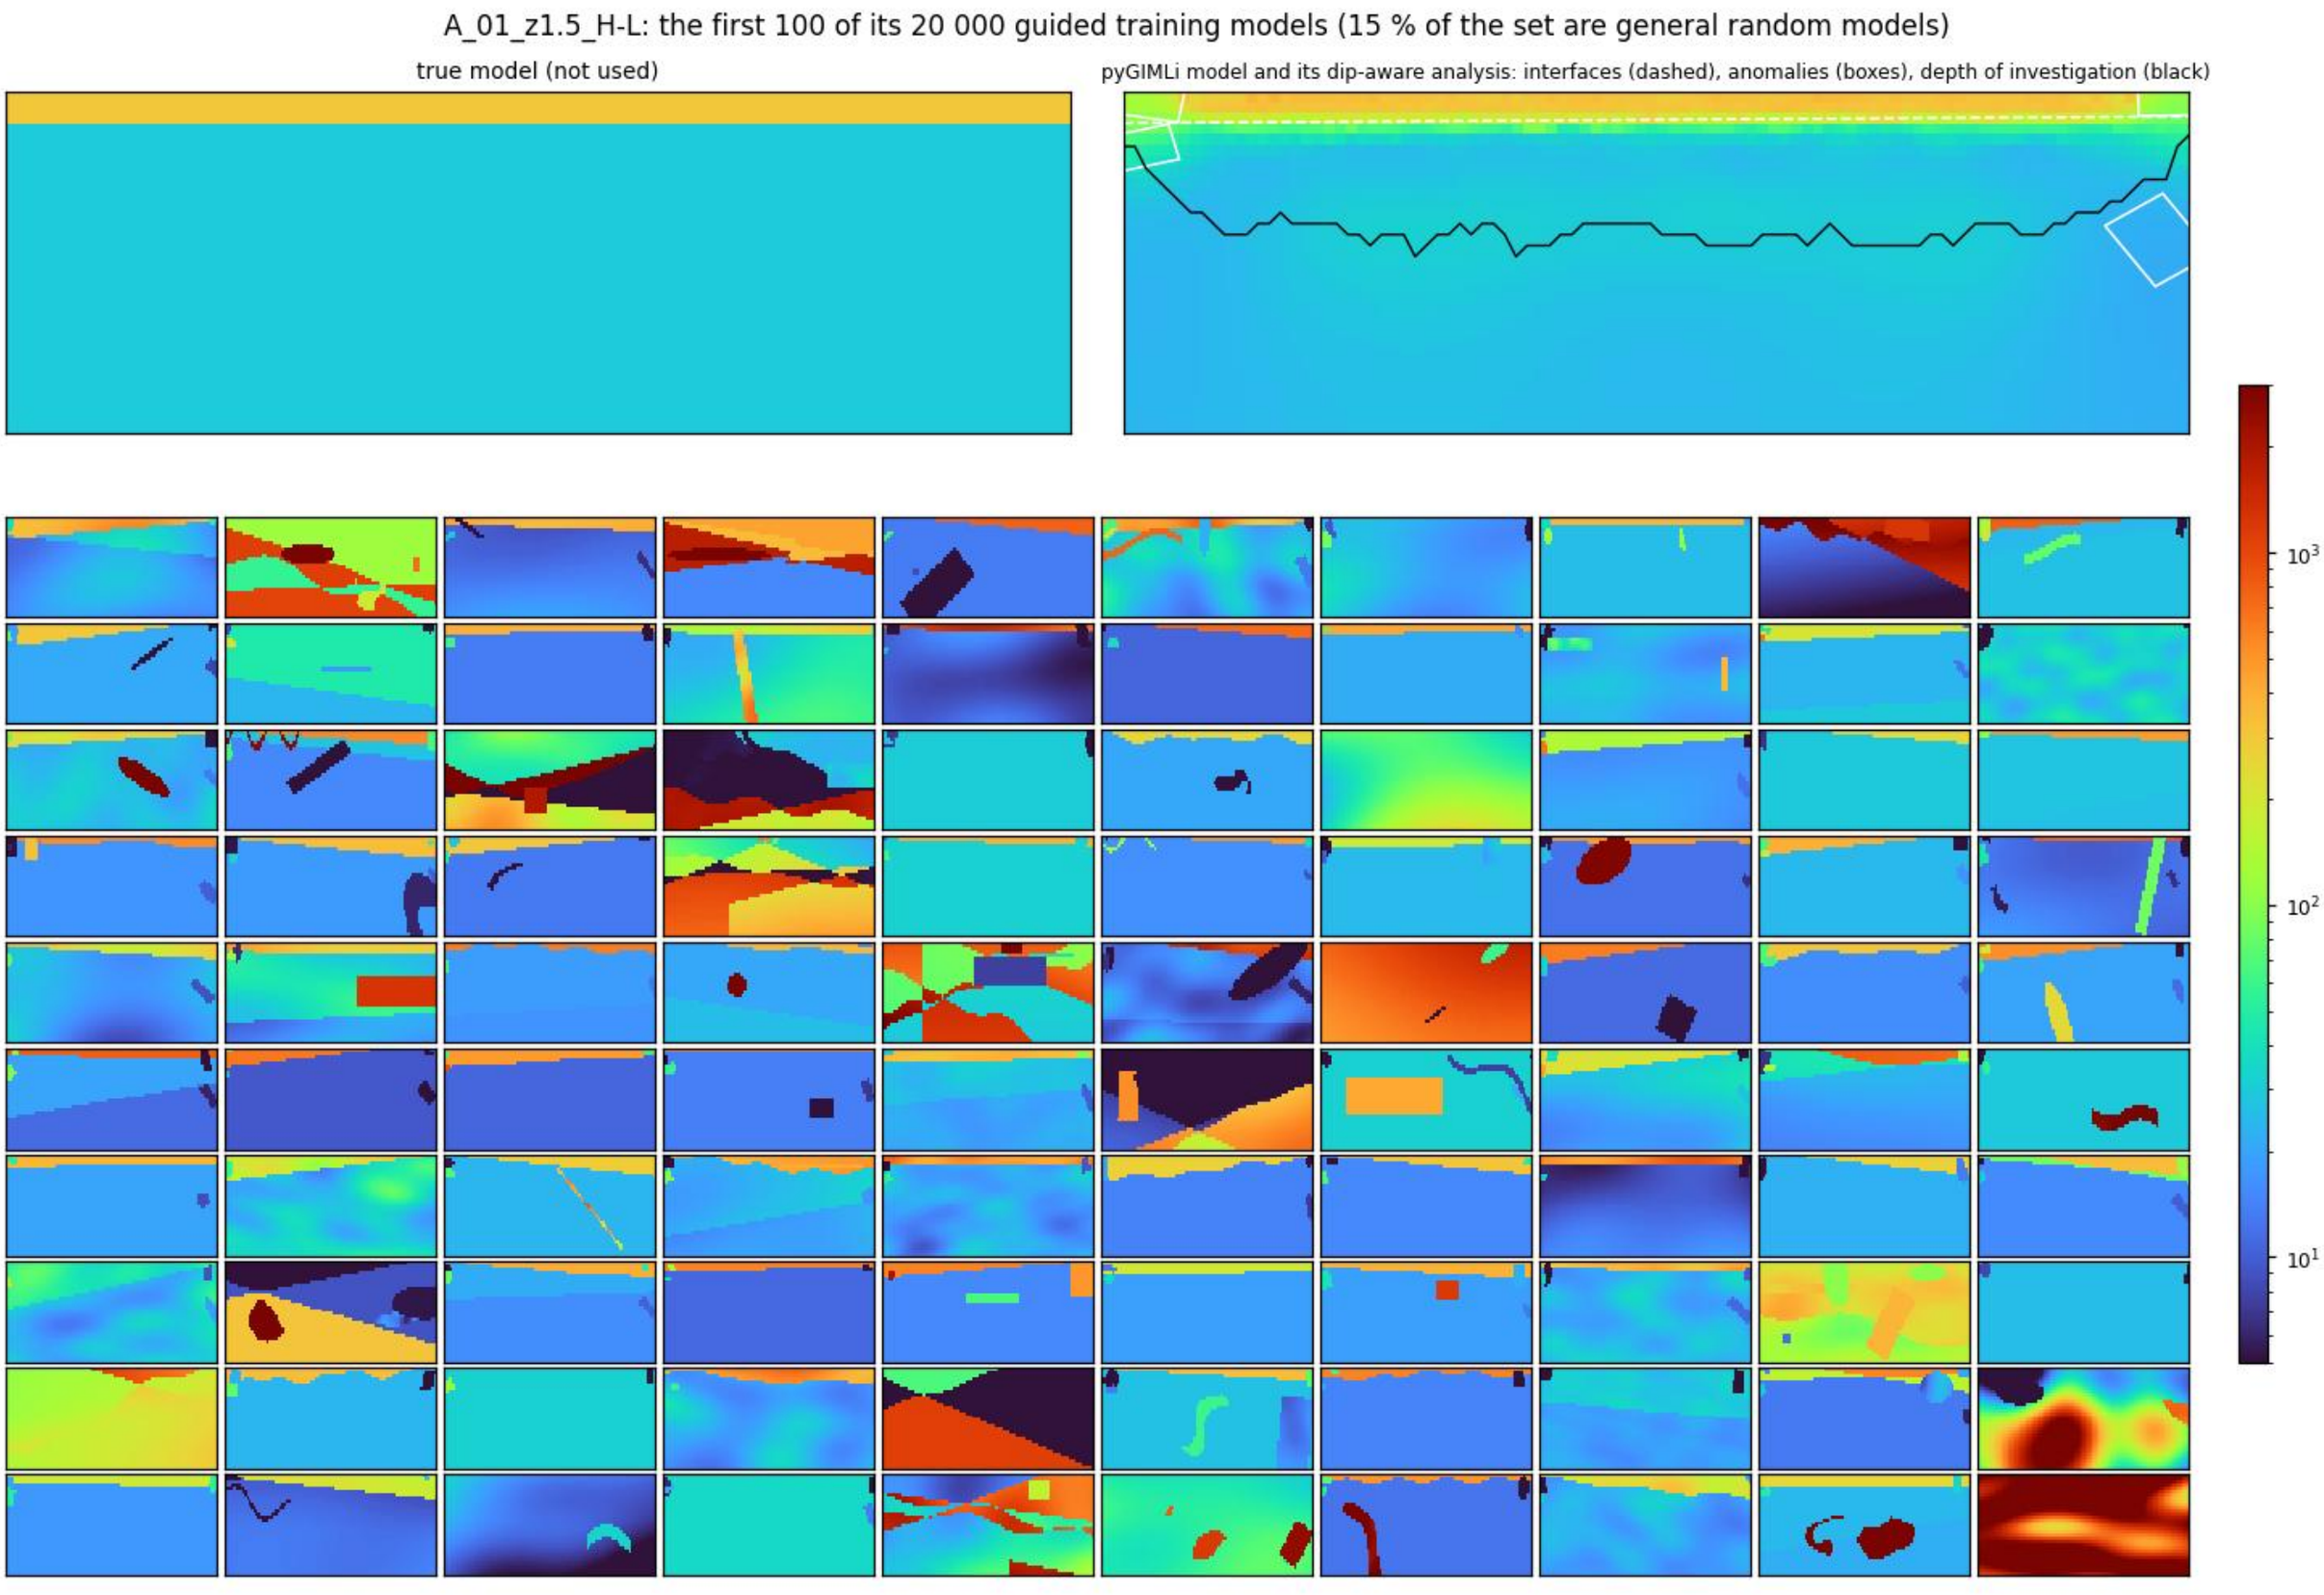
A_01_z1.5_H-L: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S3

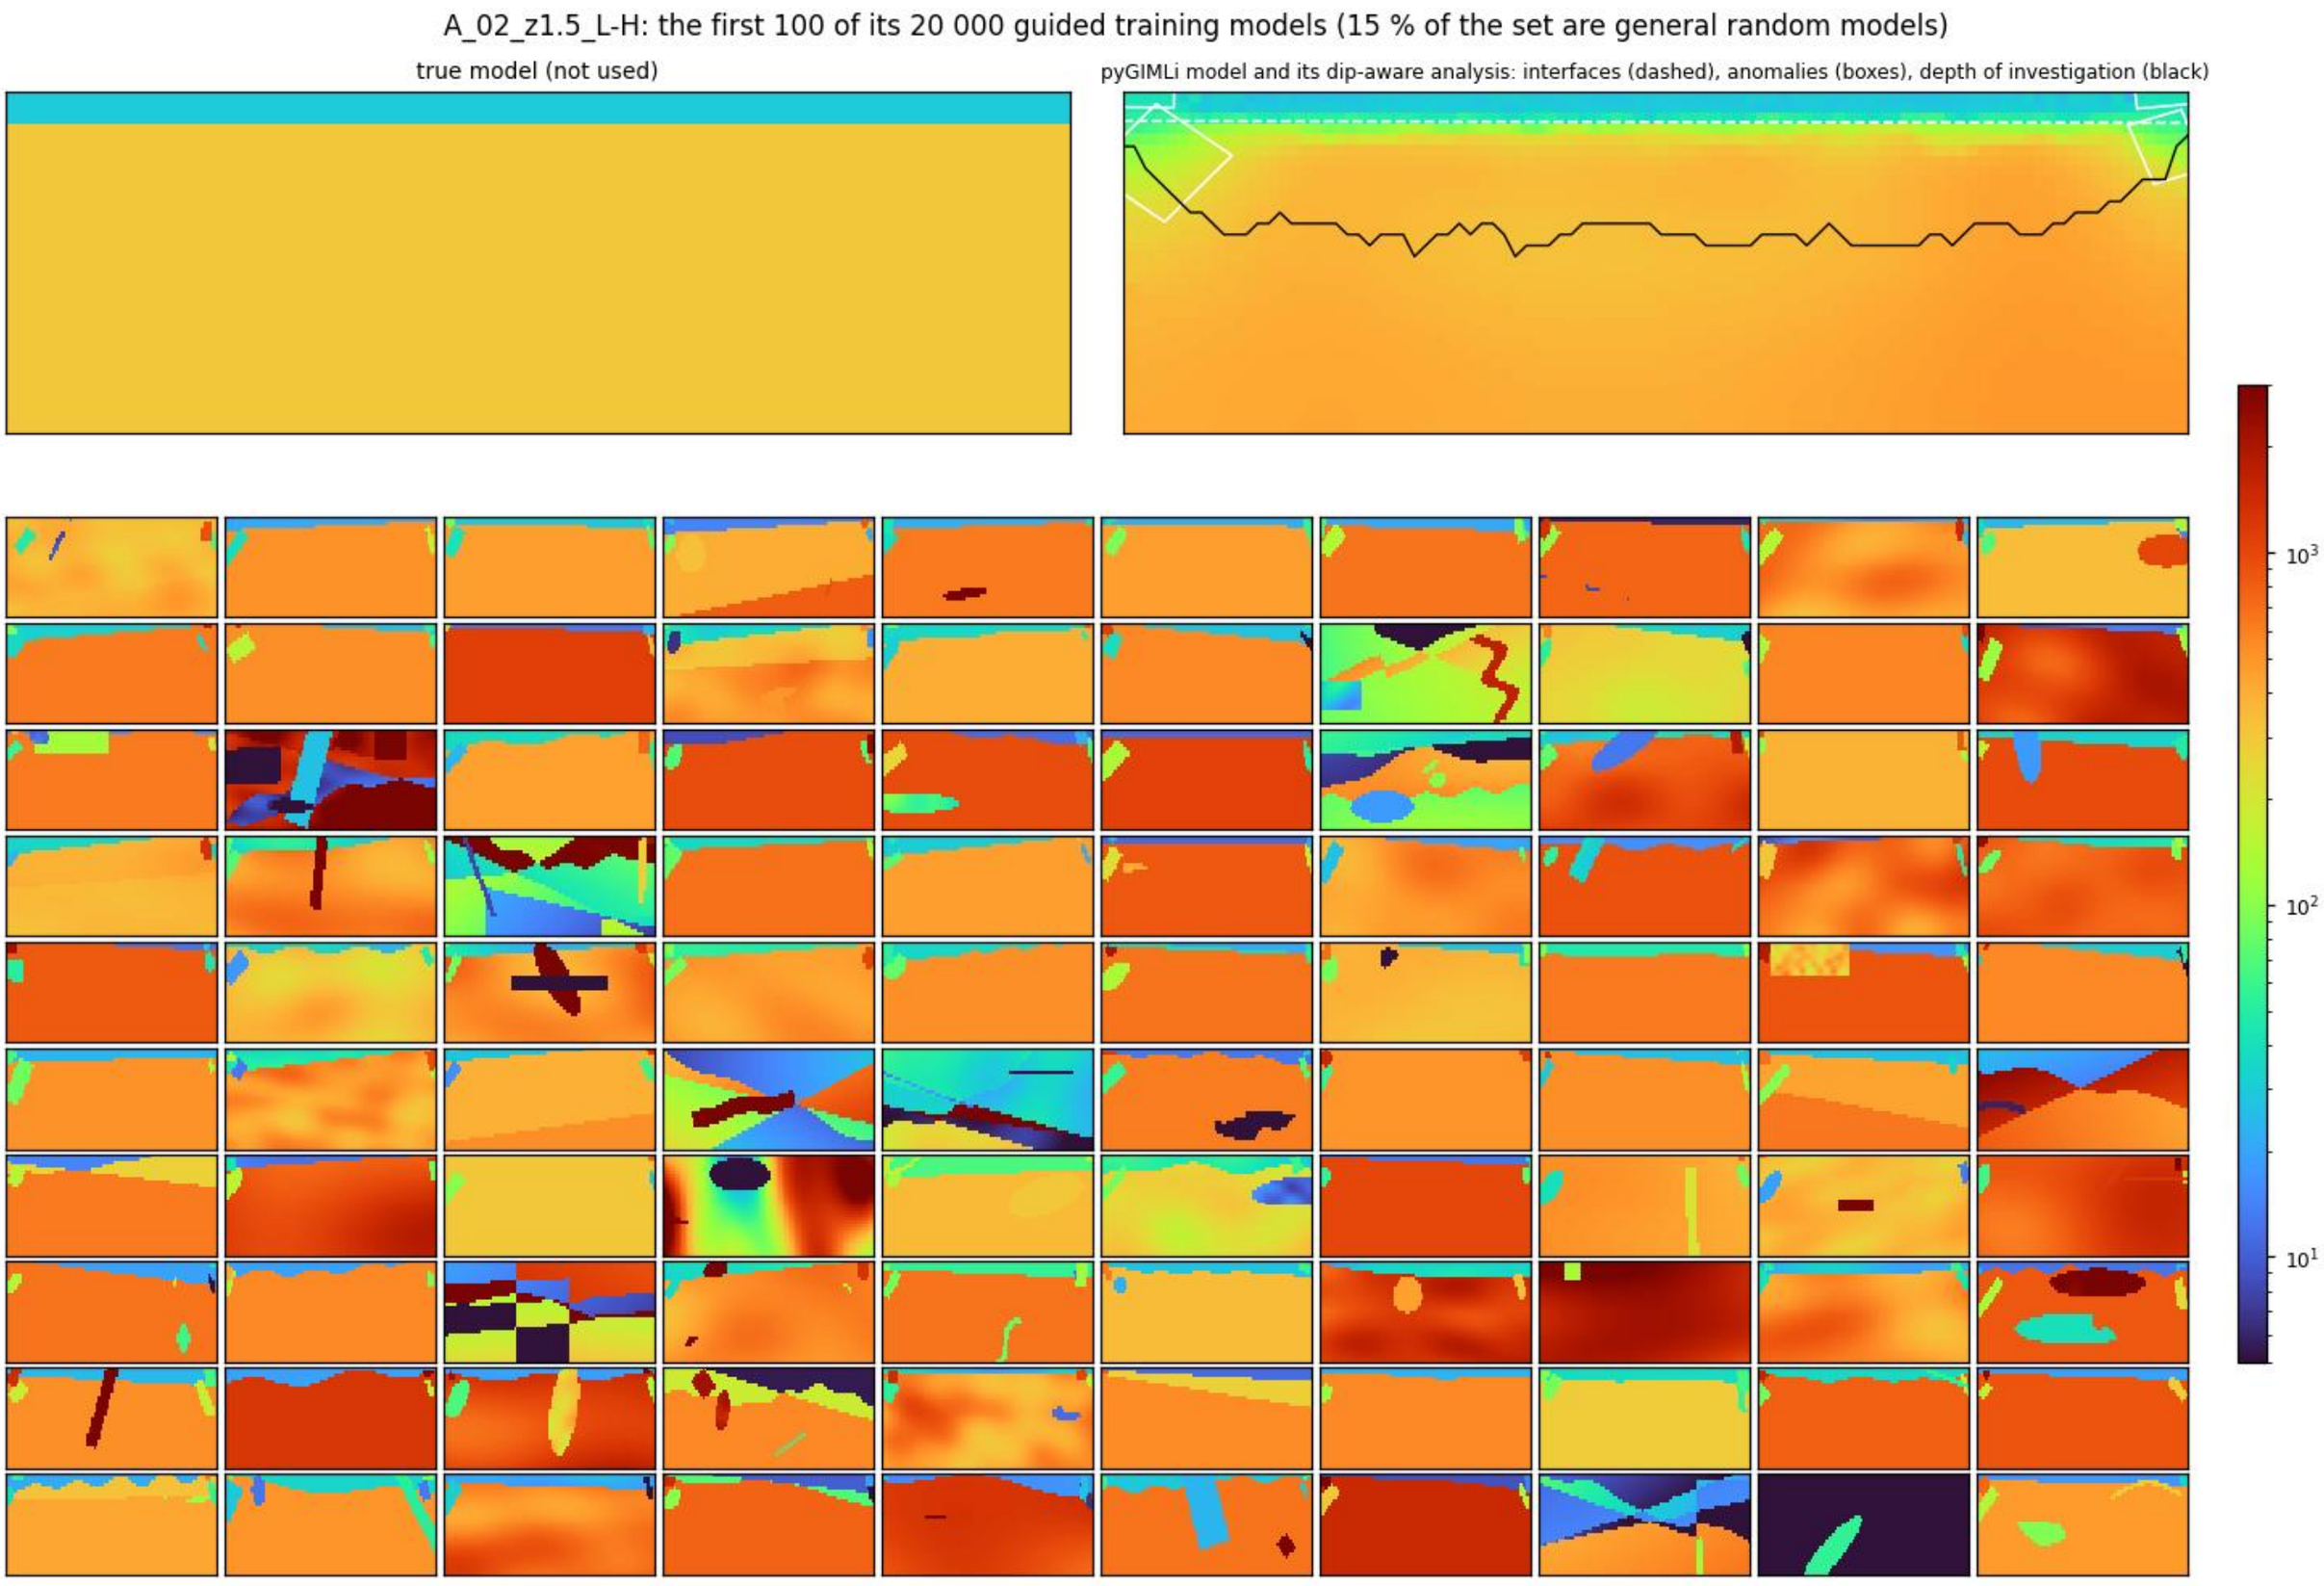
A_02_z1.5_L-H: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S4

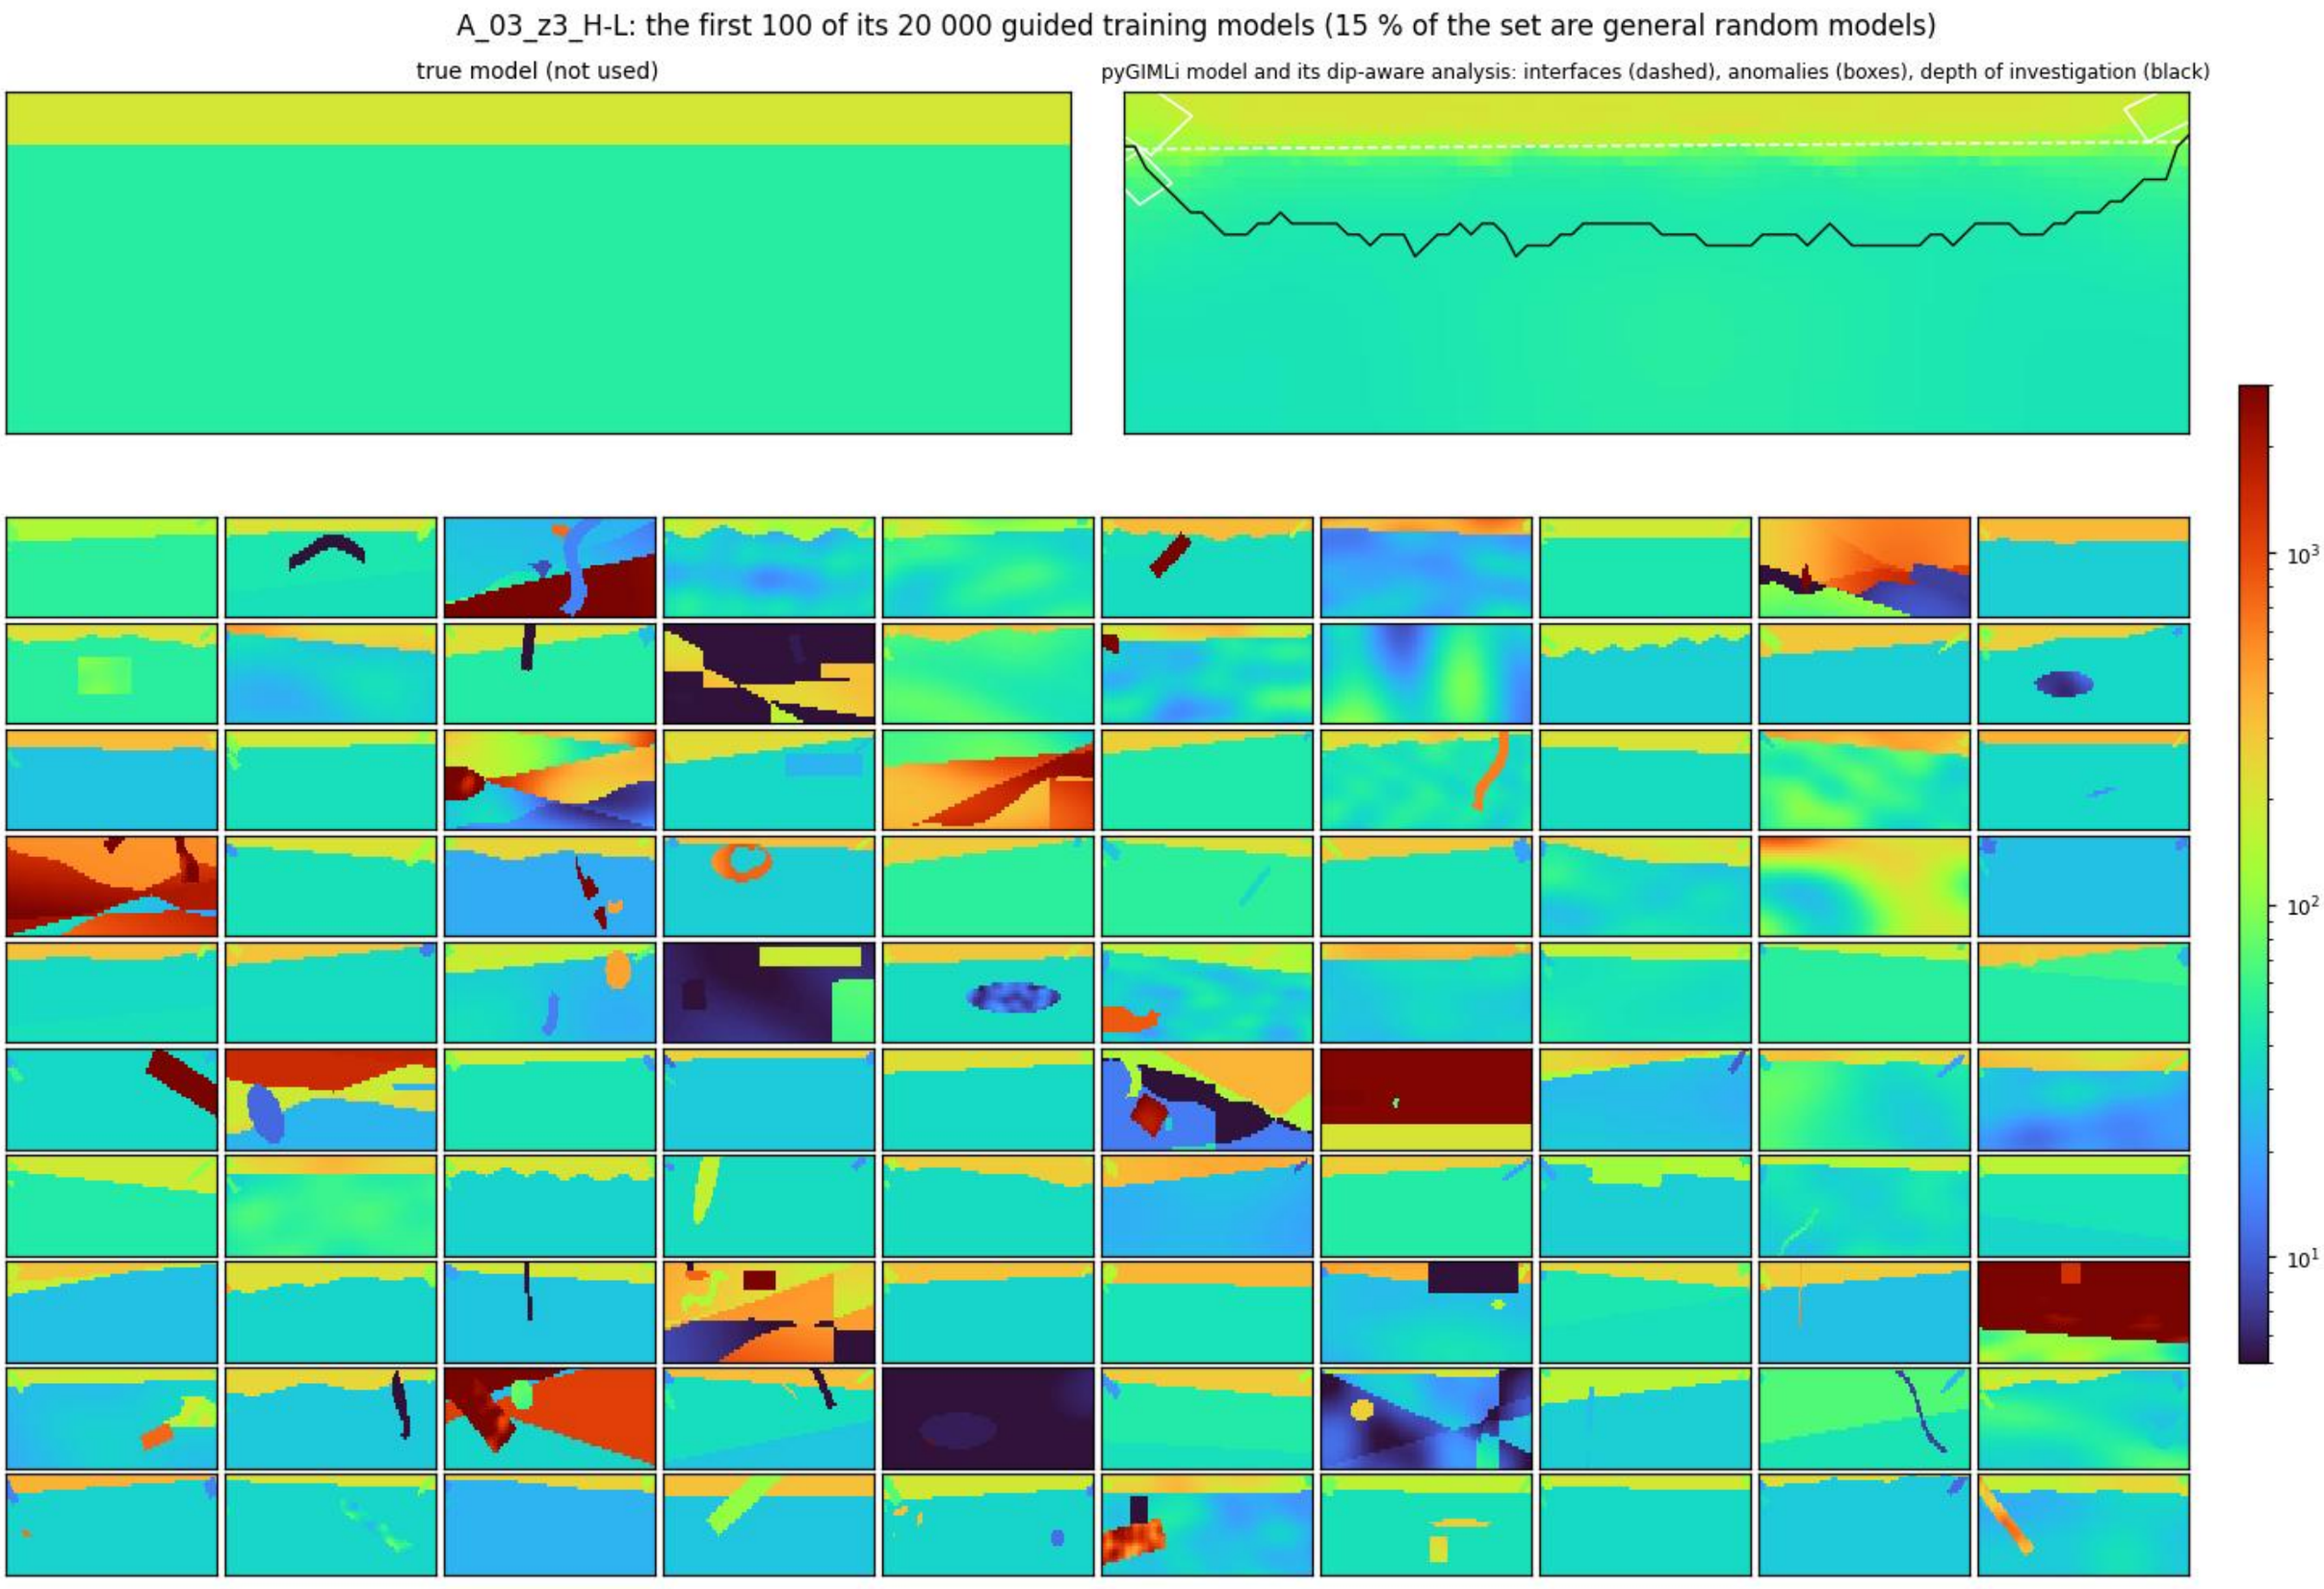
A_03_z3_H-L: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S5

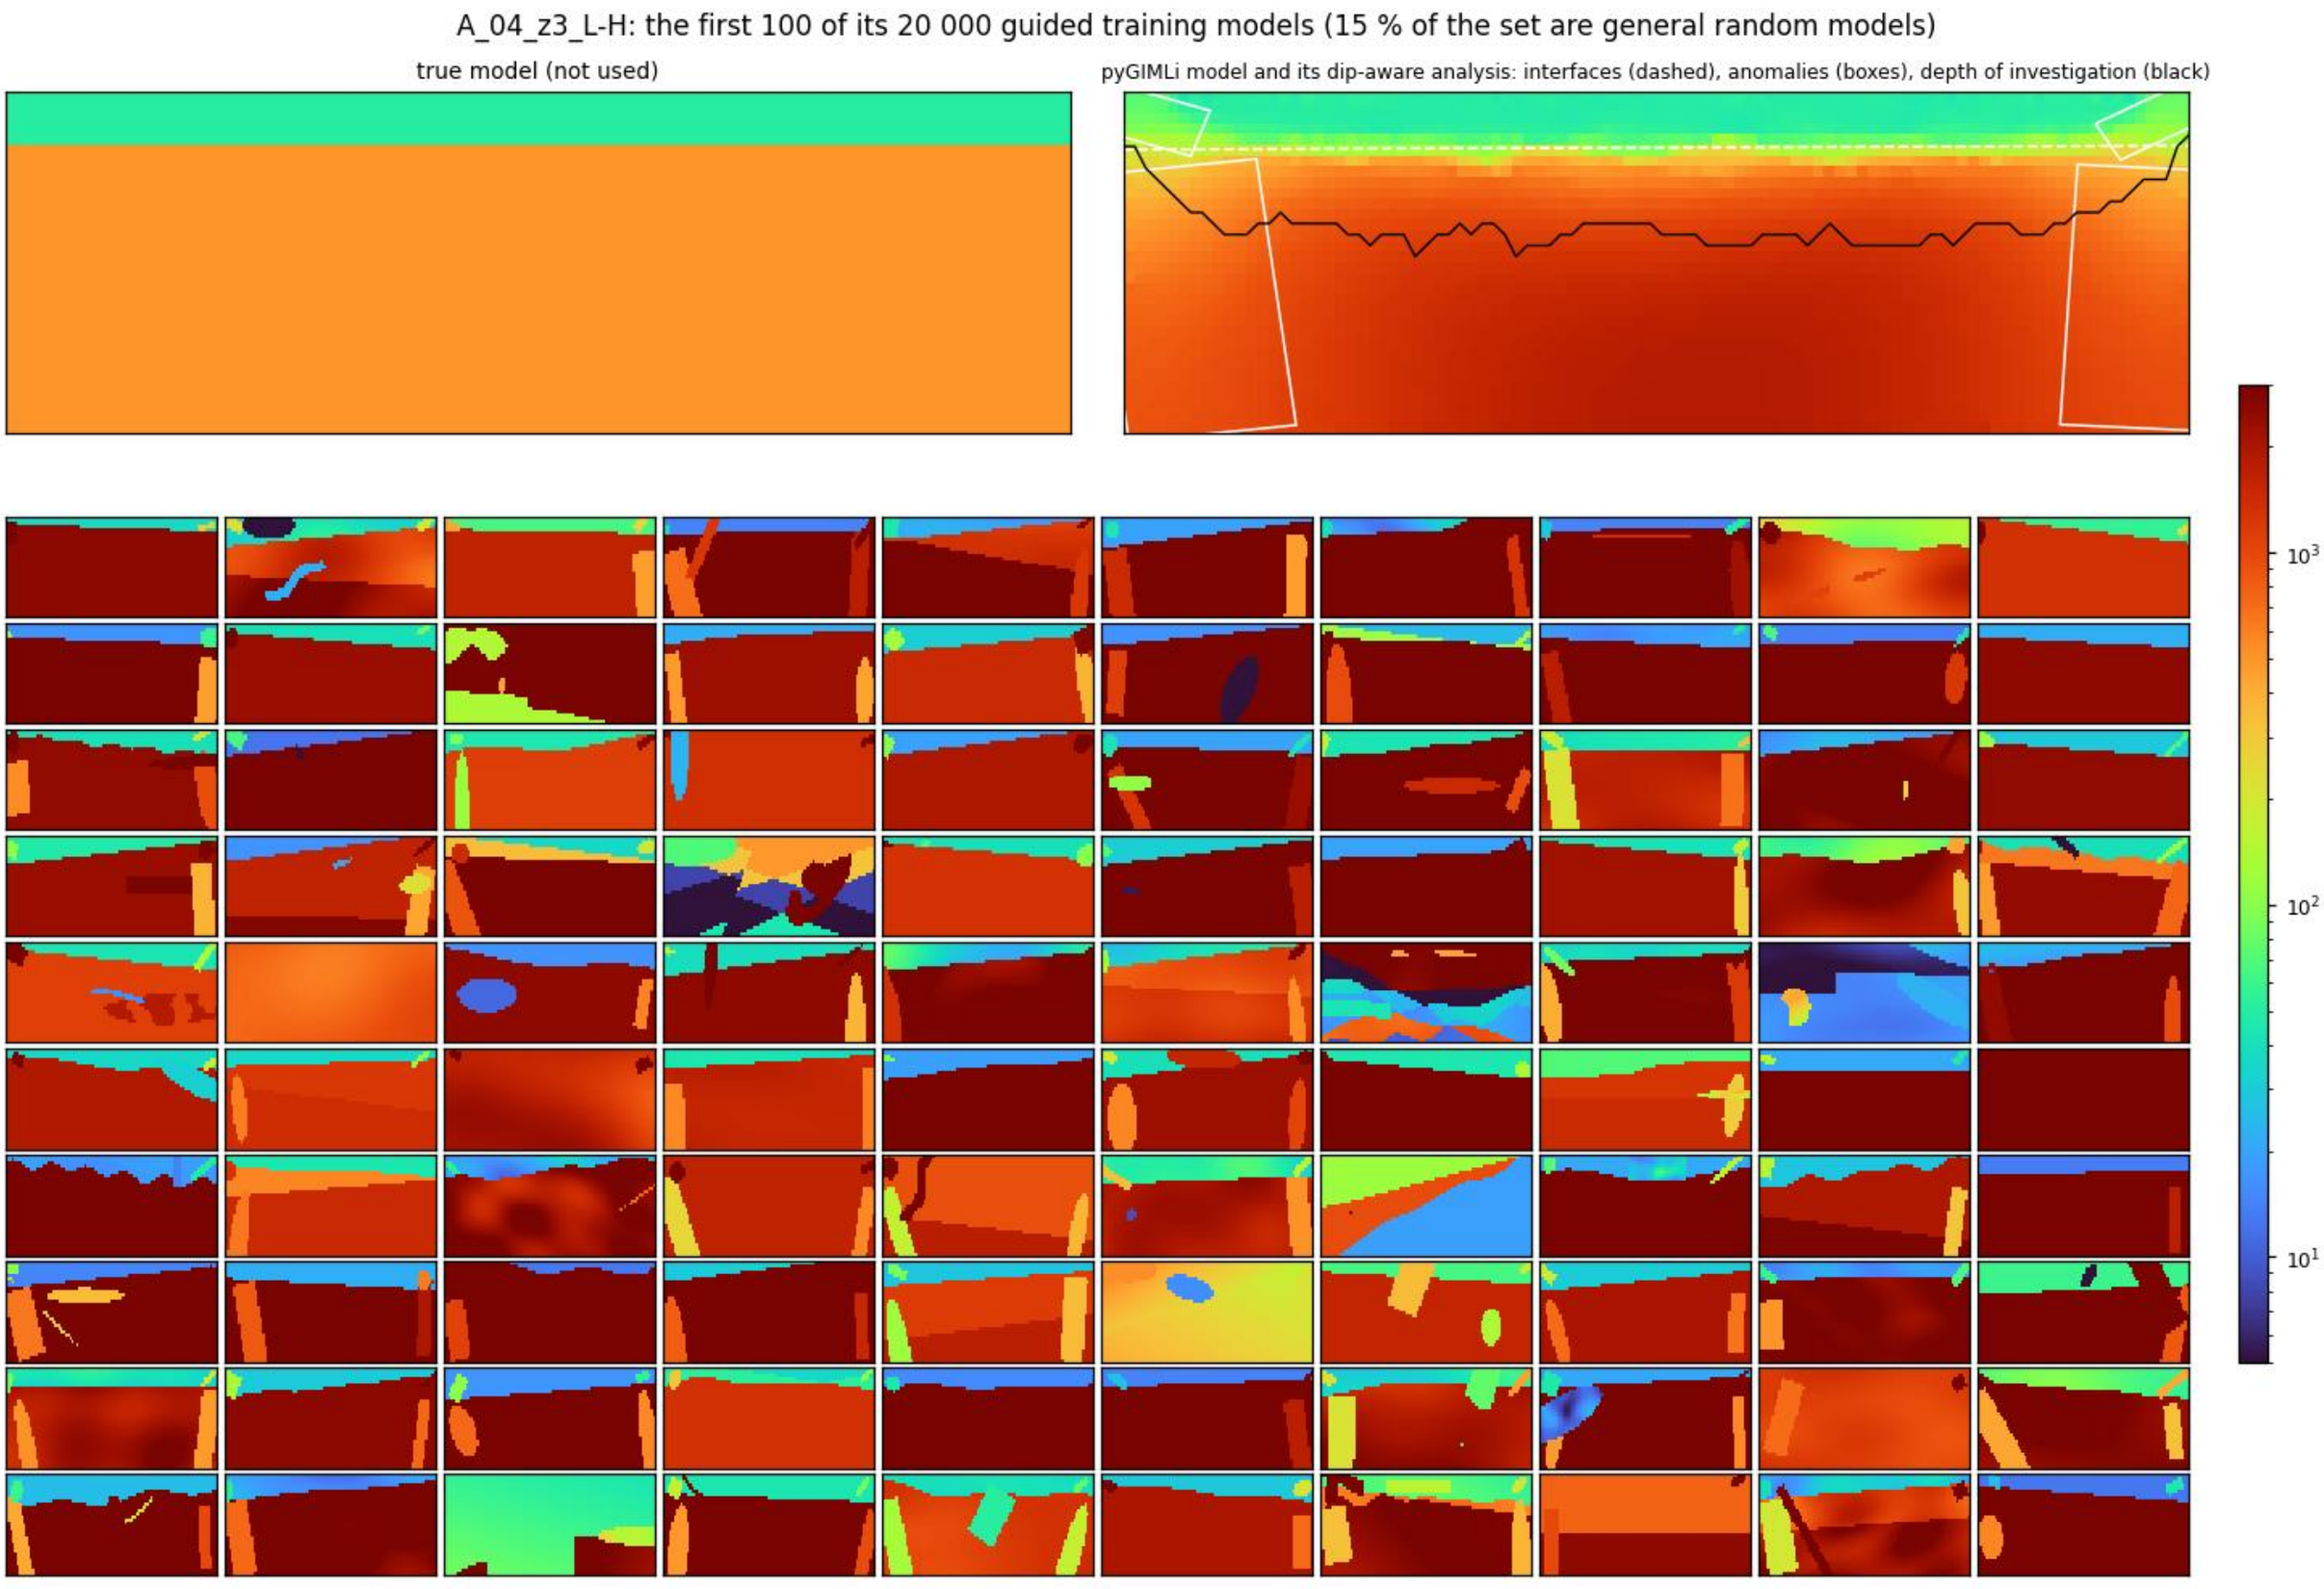
A_04_z3_L-H: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S6

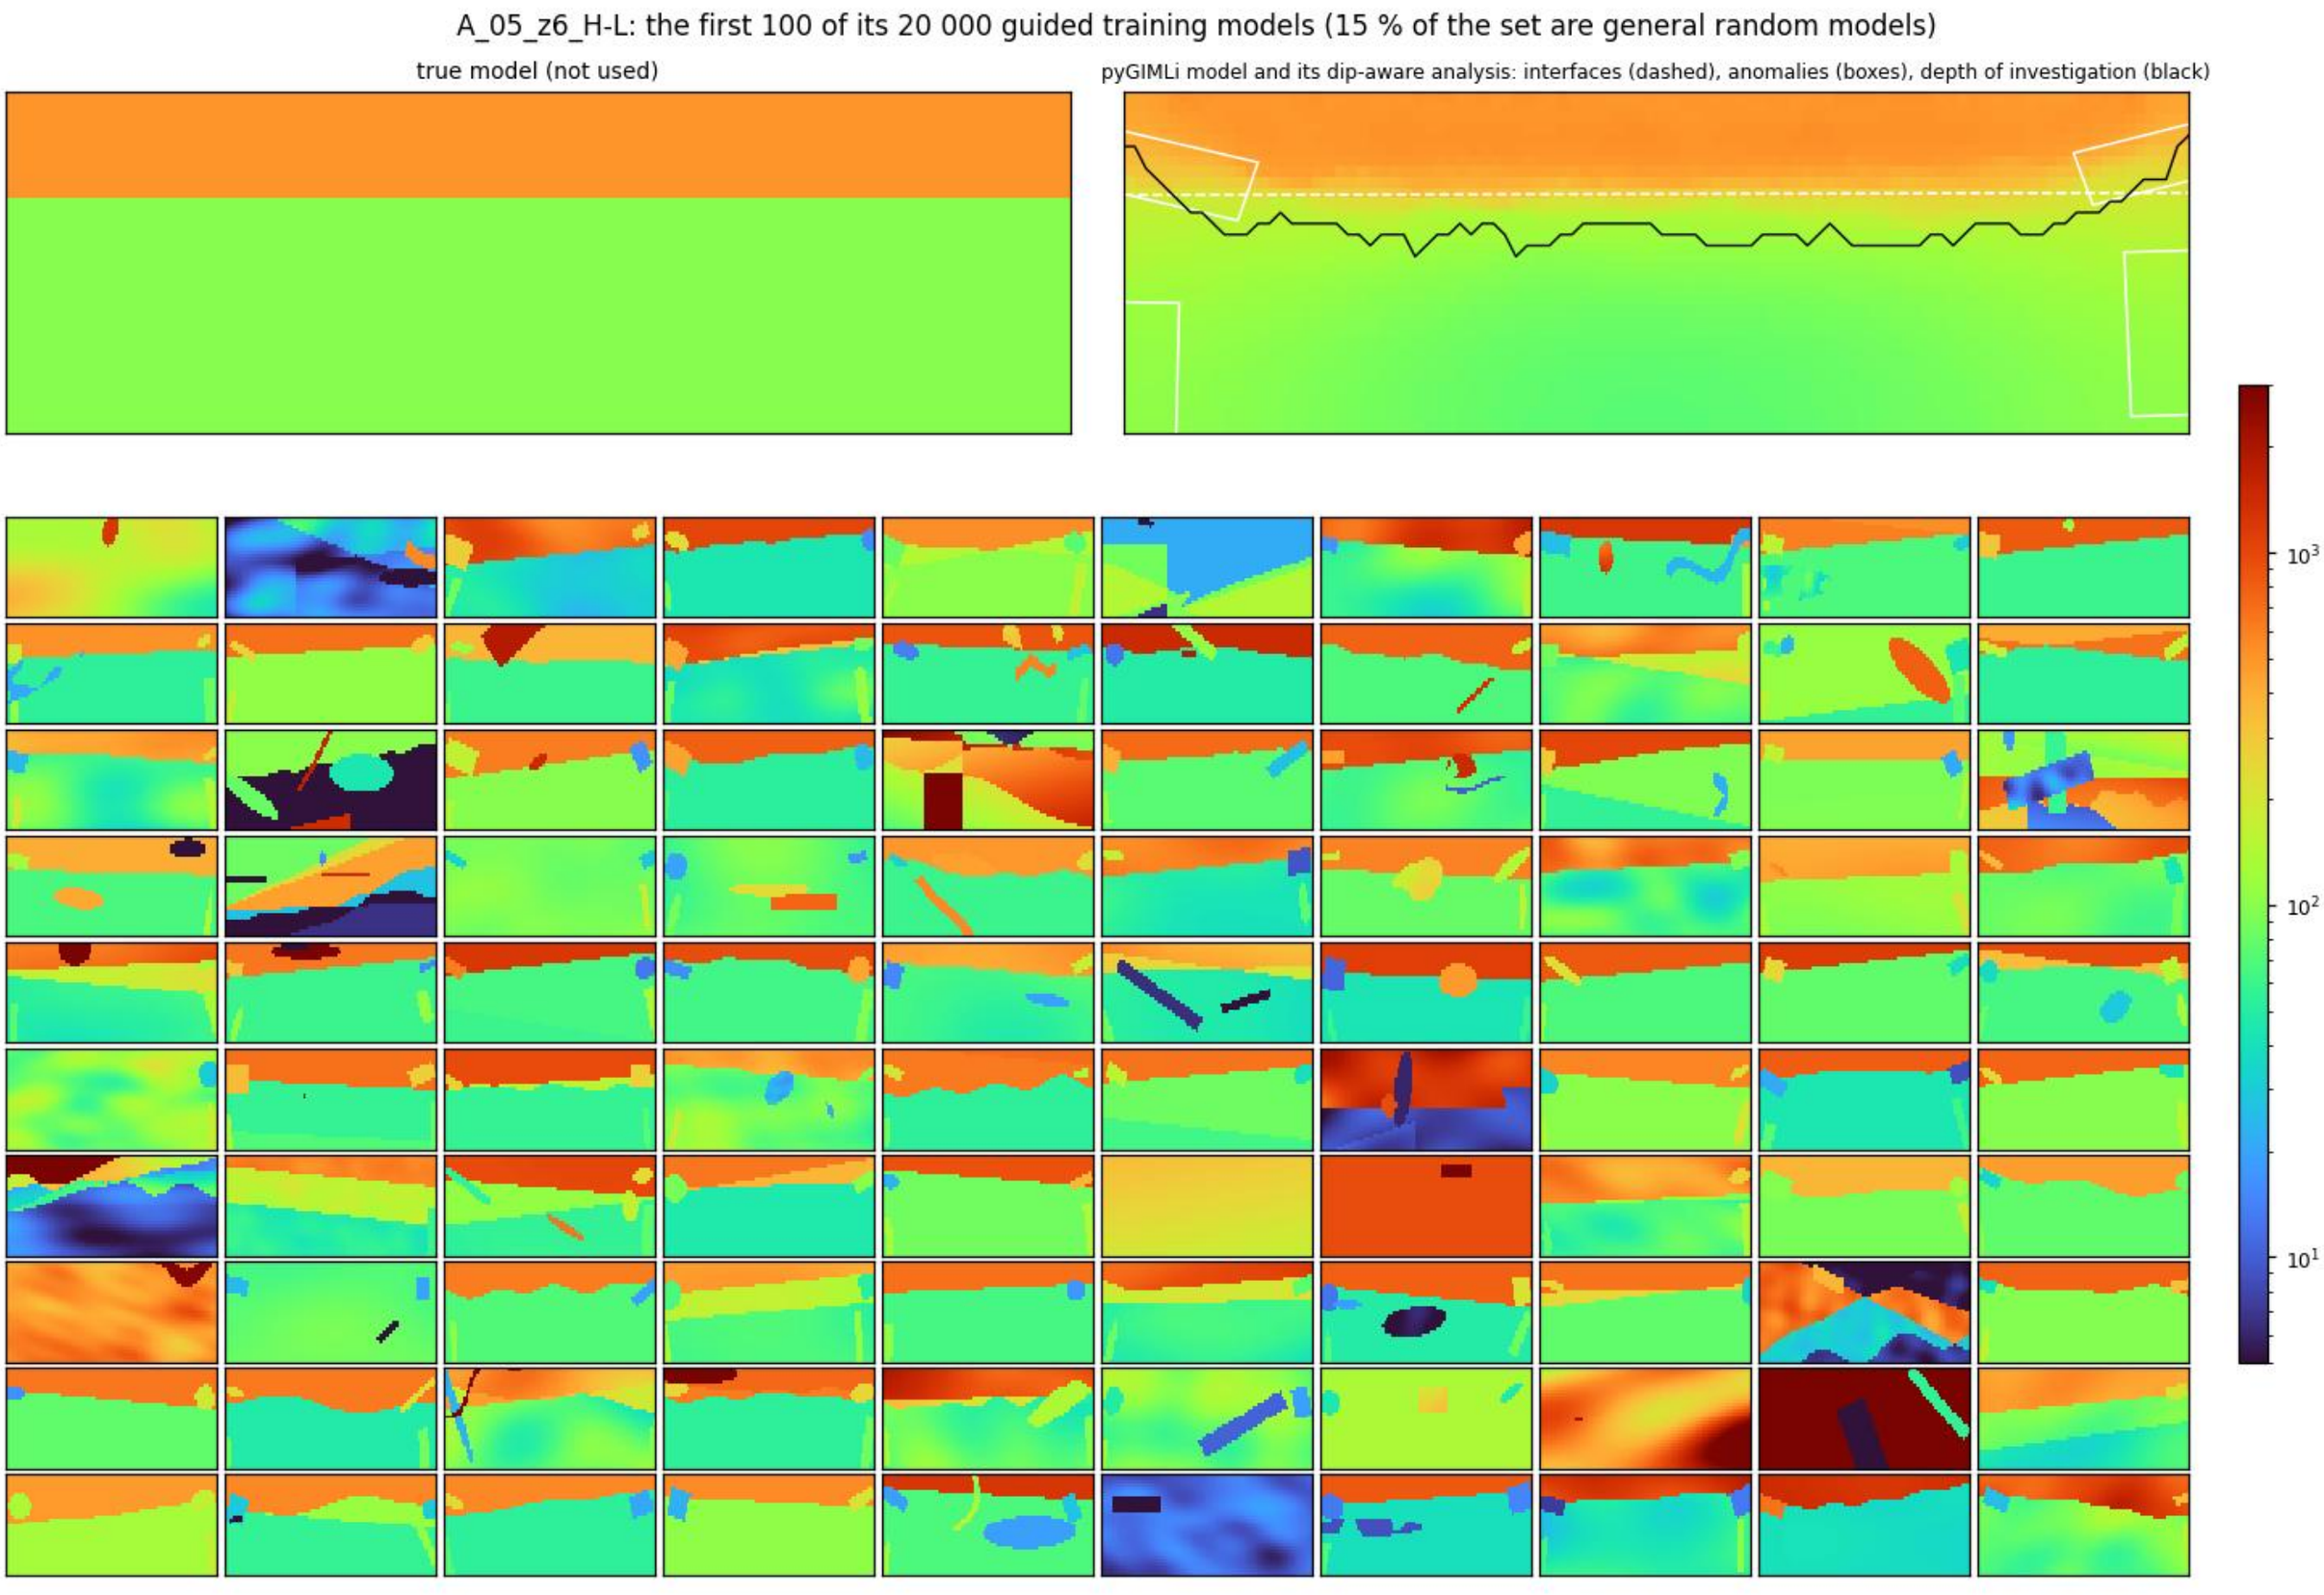
A_05_z6_H-L: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S7

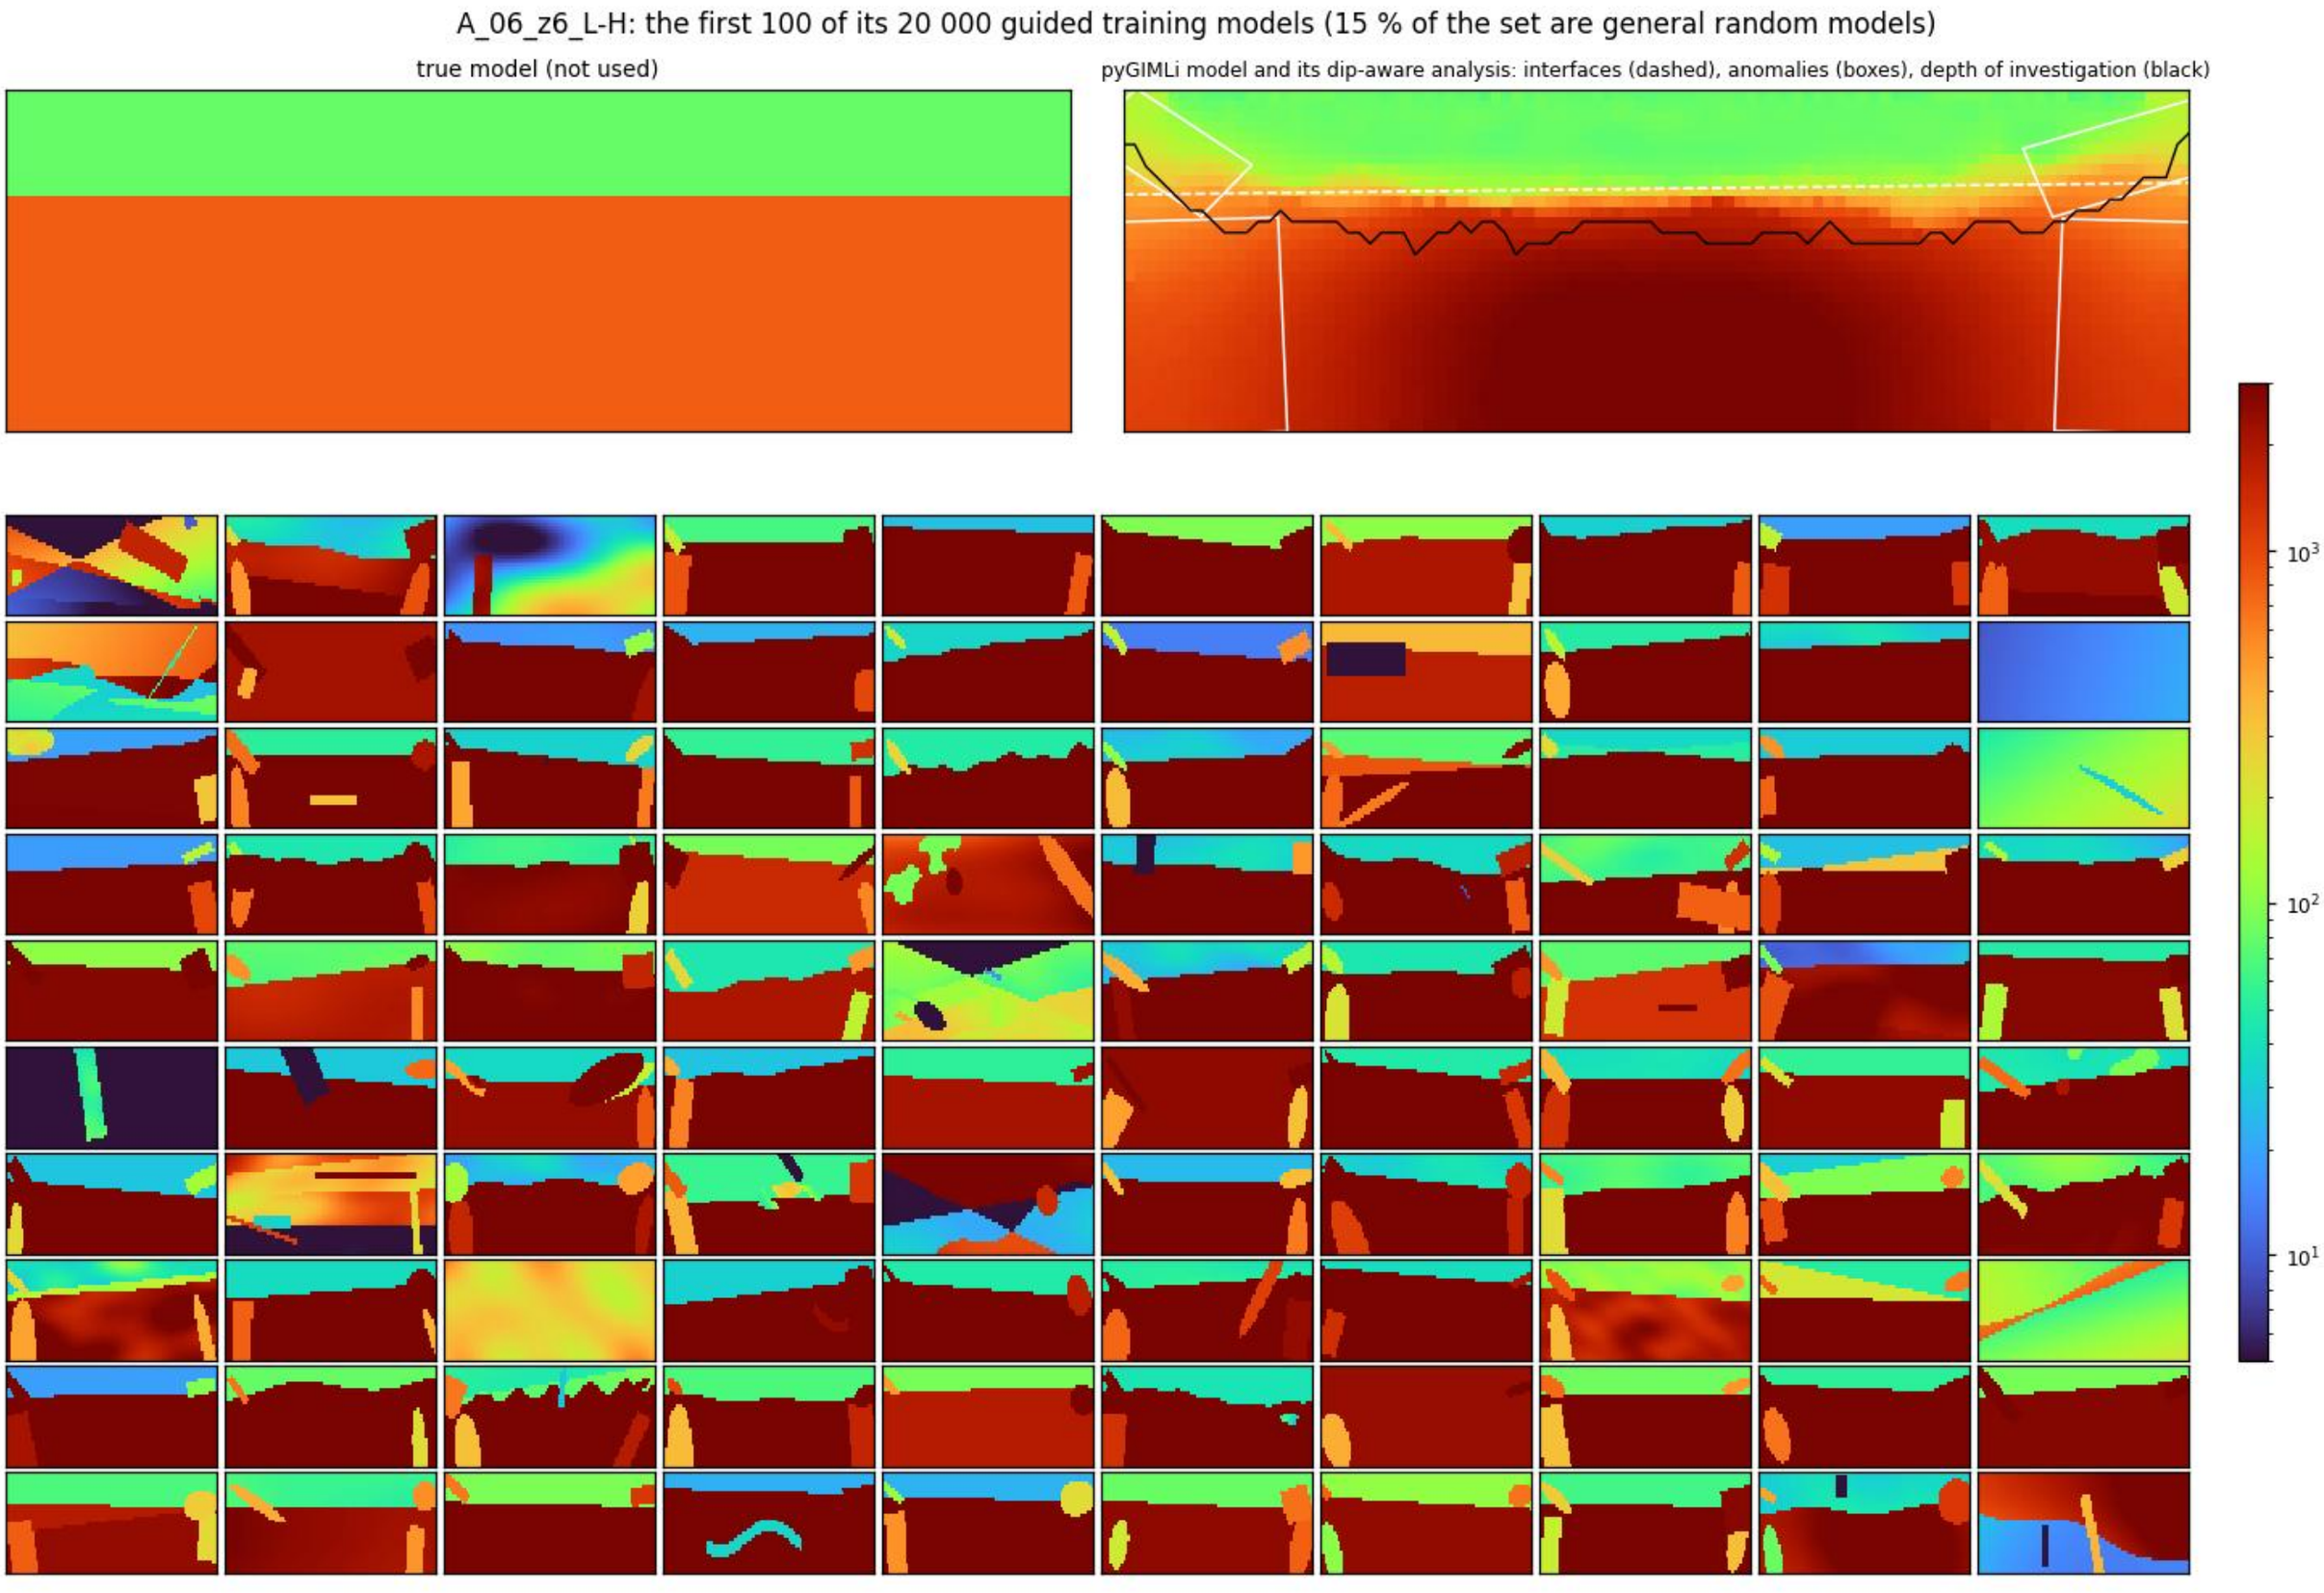
A_06_z6_L-H: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S8

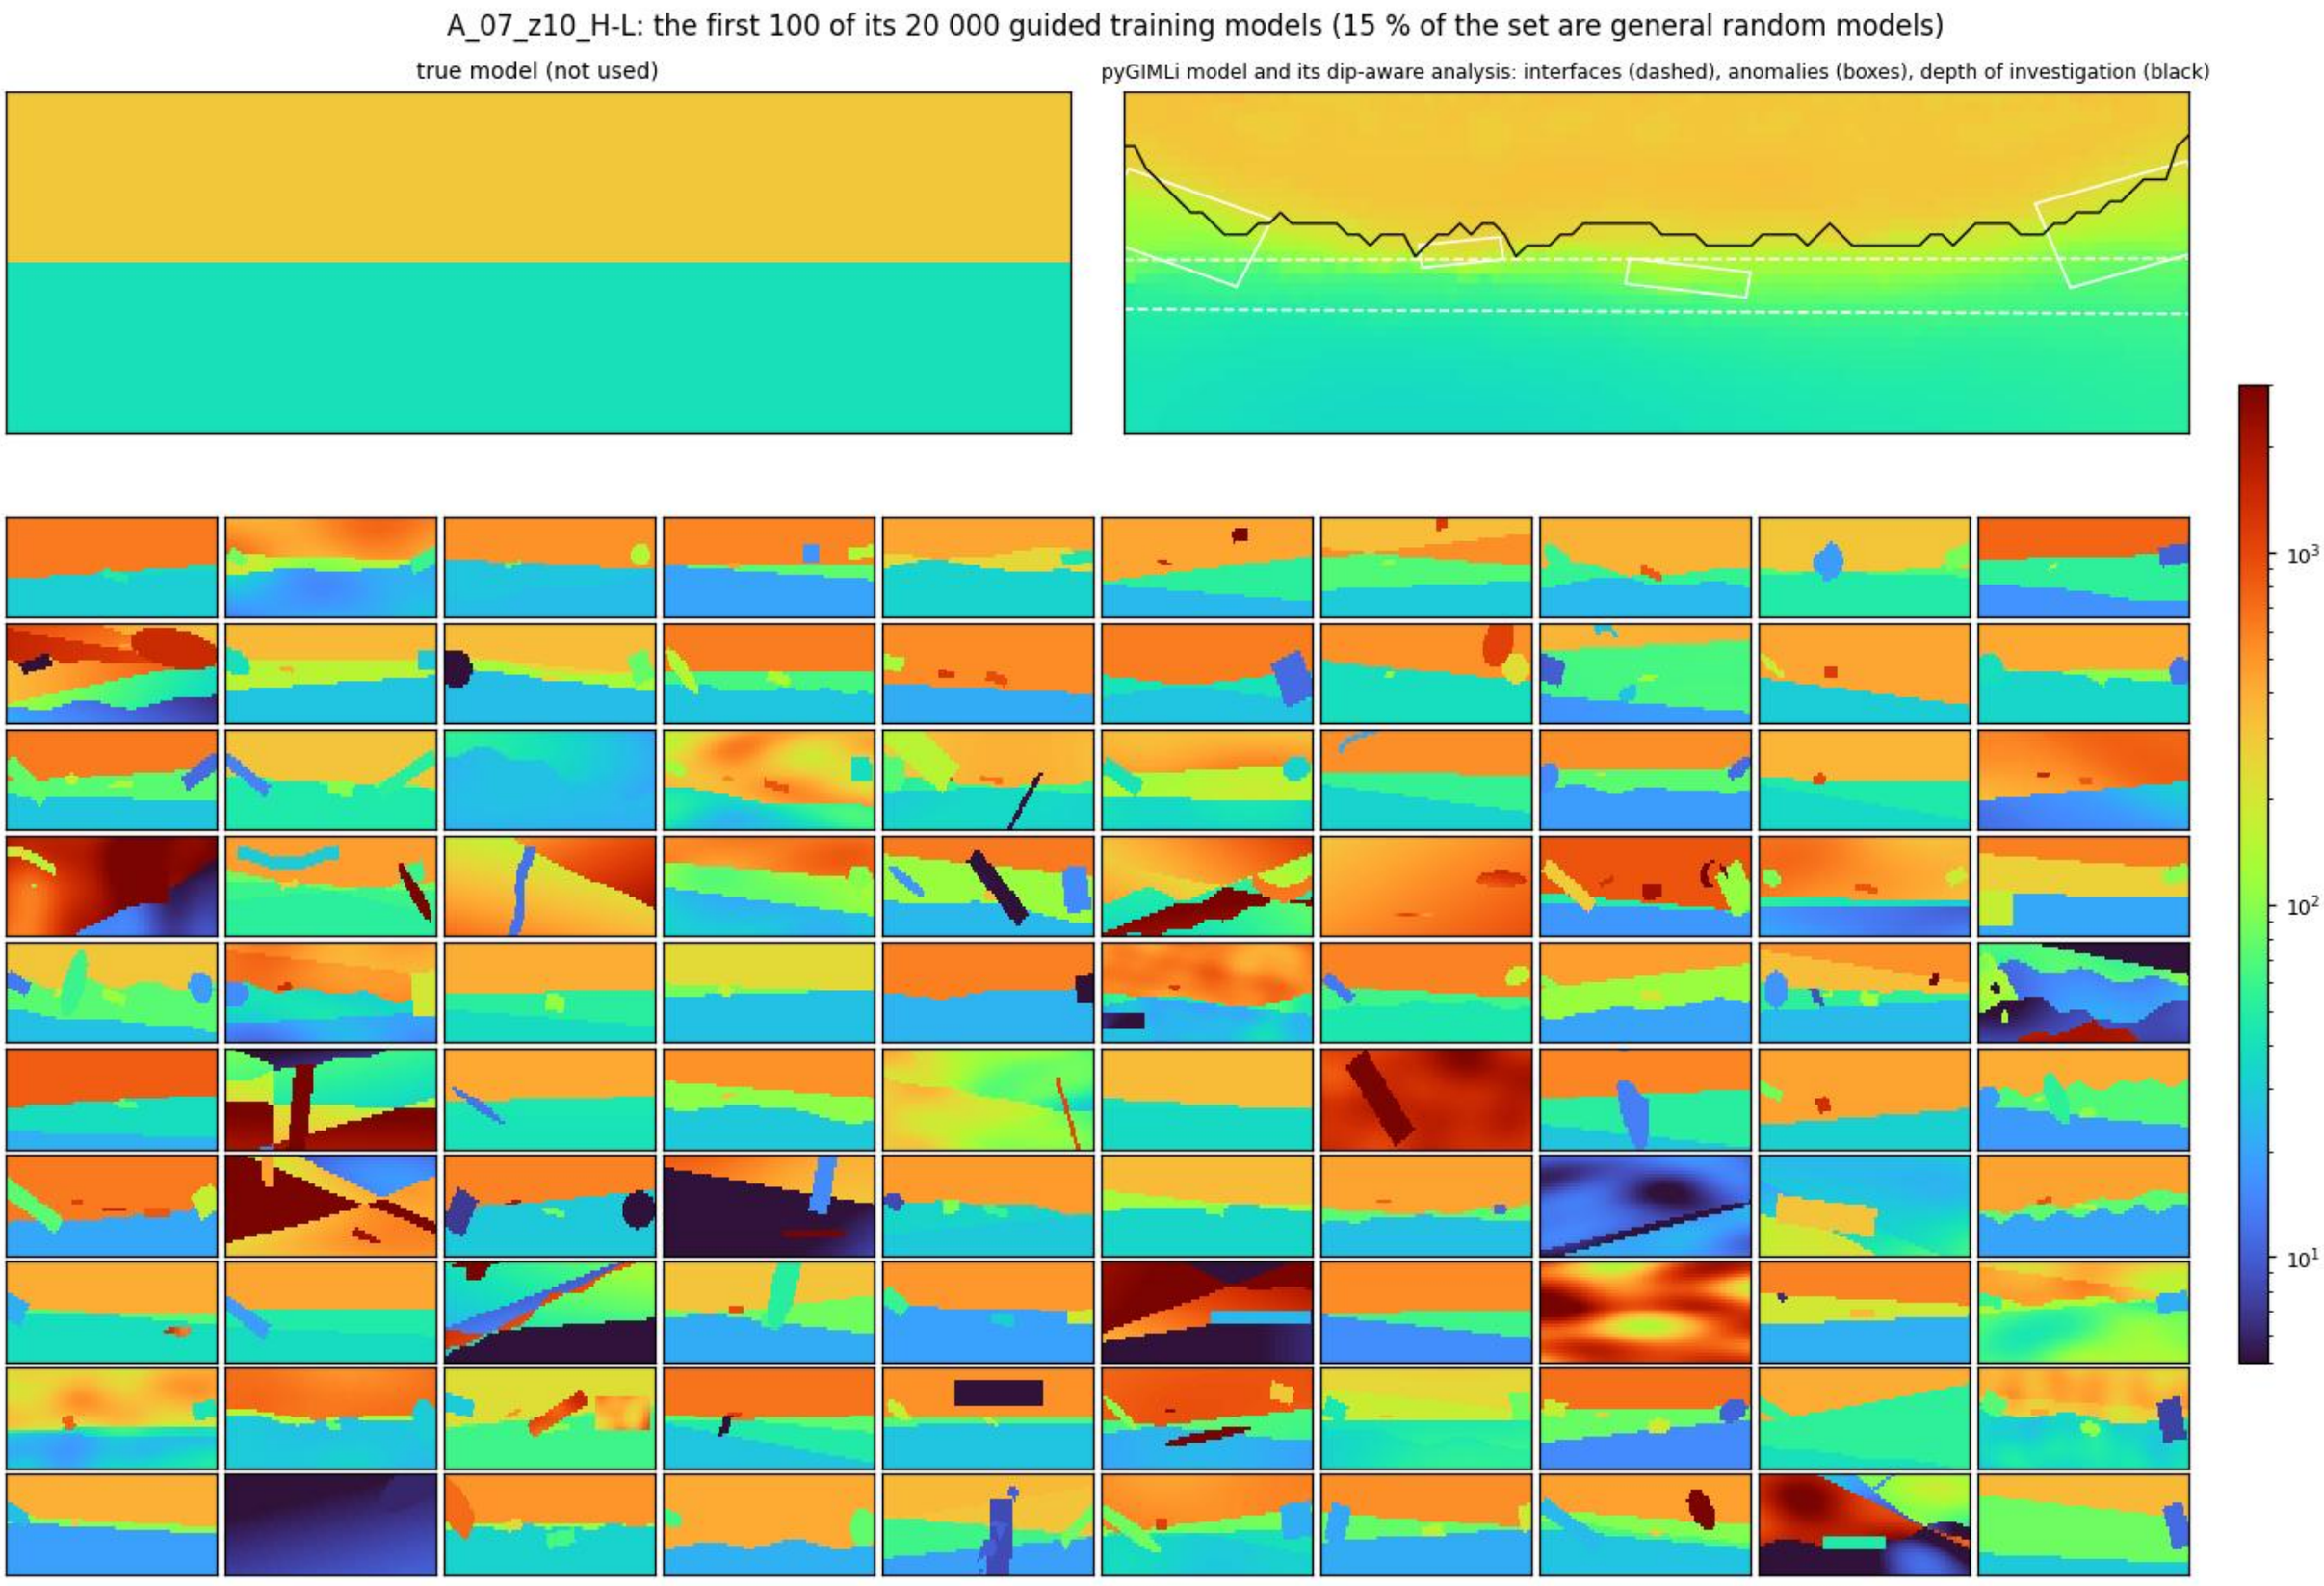
A_07_z10_H-L: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S9

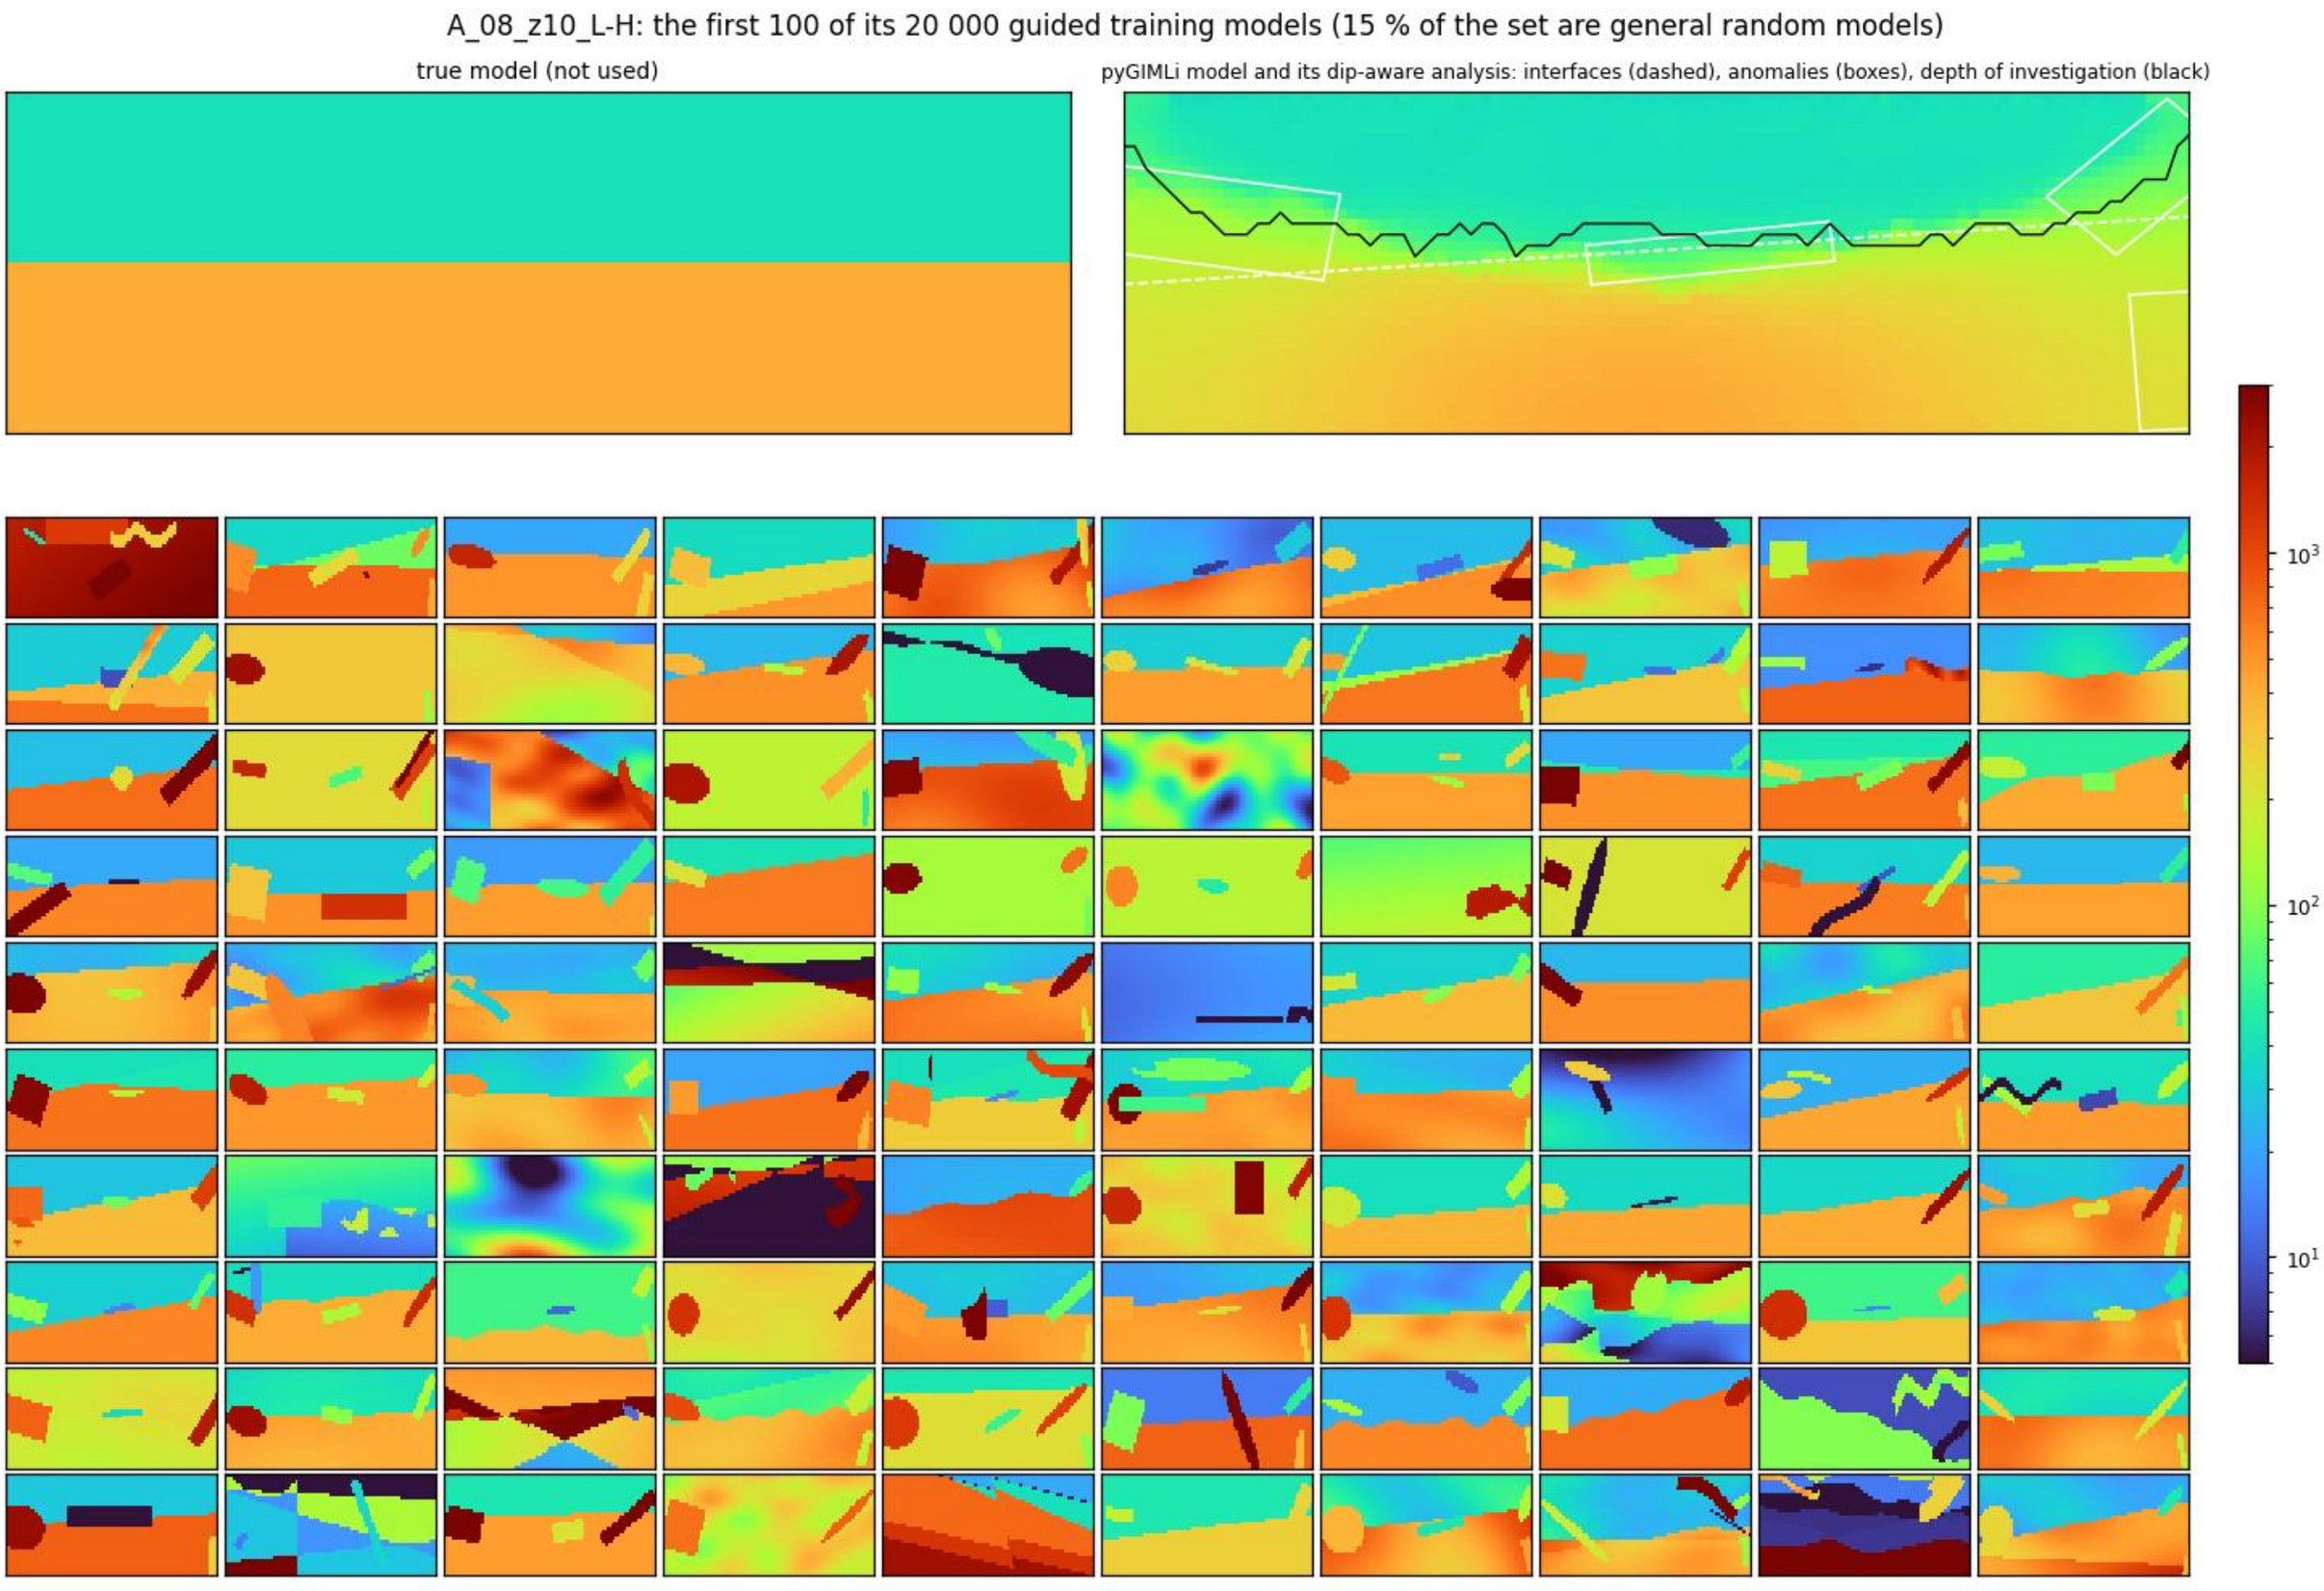
A_08_z10_L-H: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S10

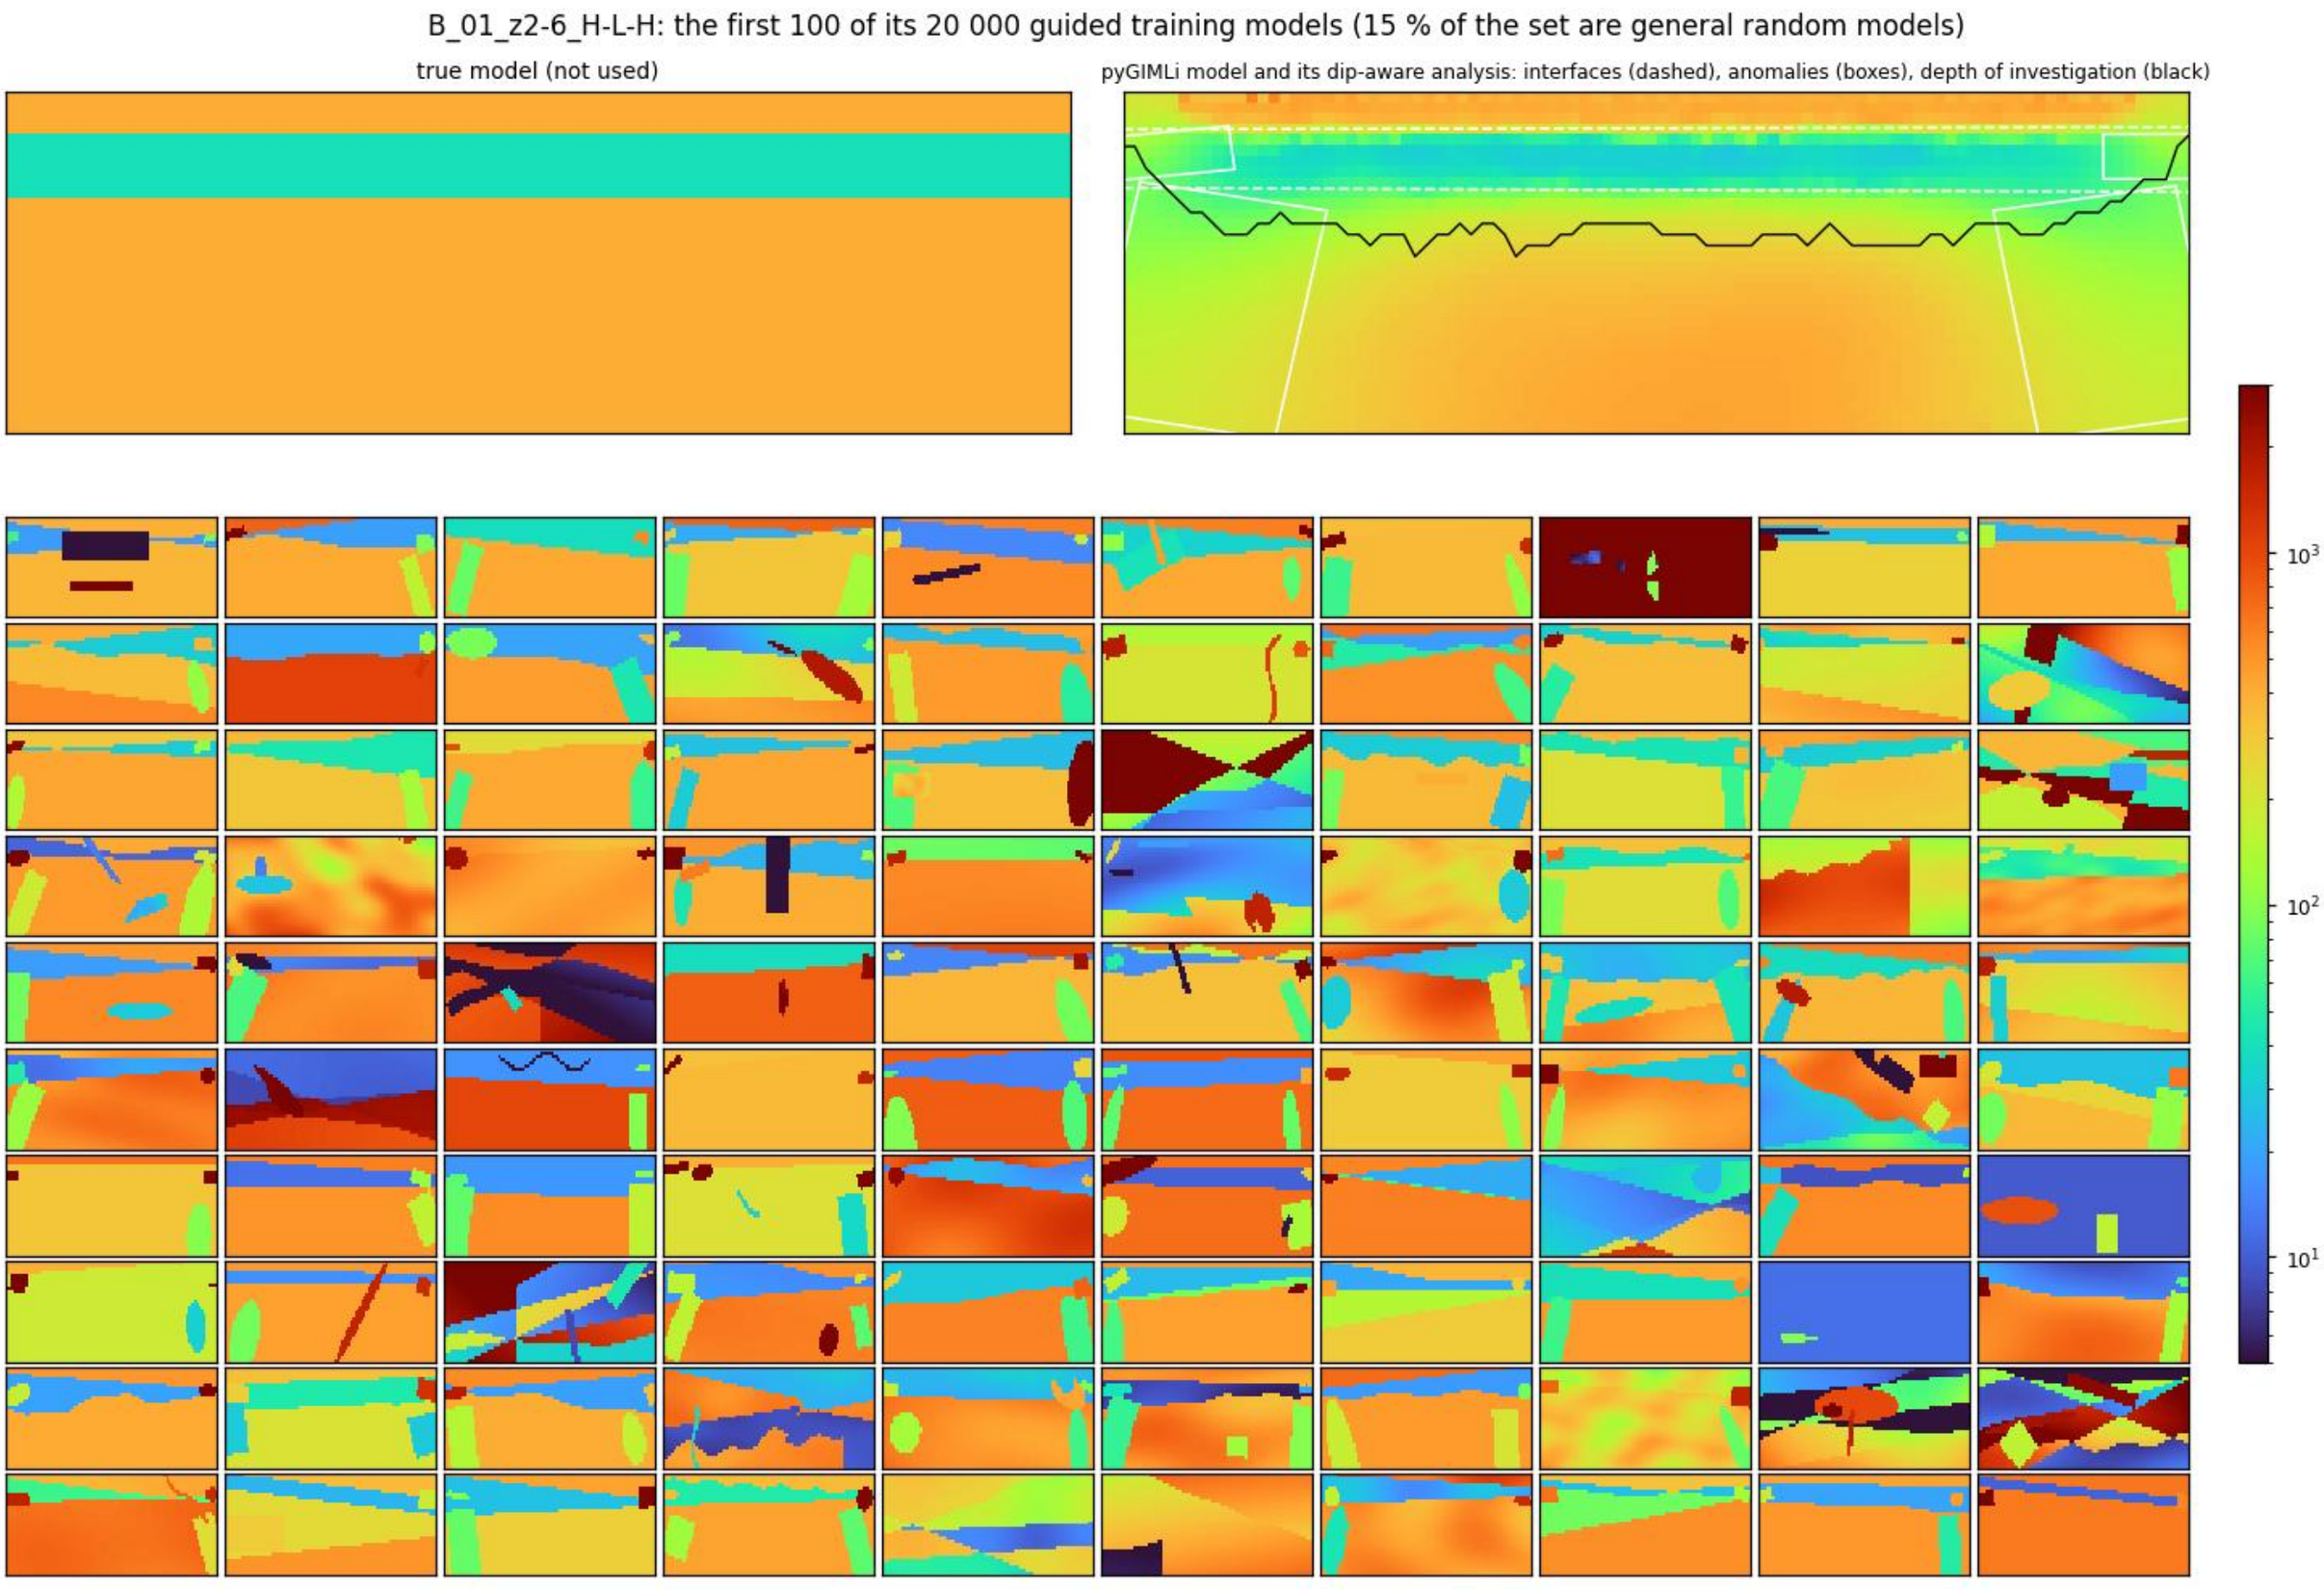
B_01_z2-6_H-L-H: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S11

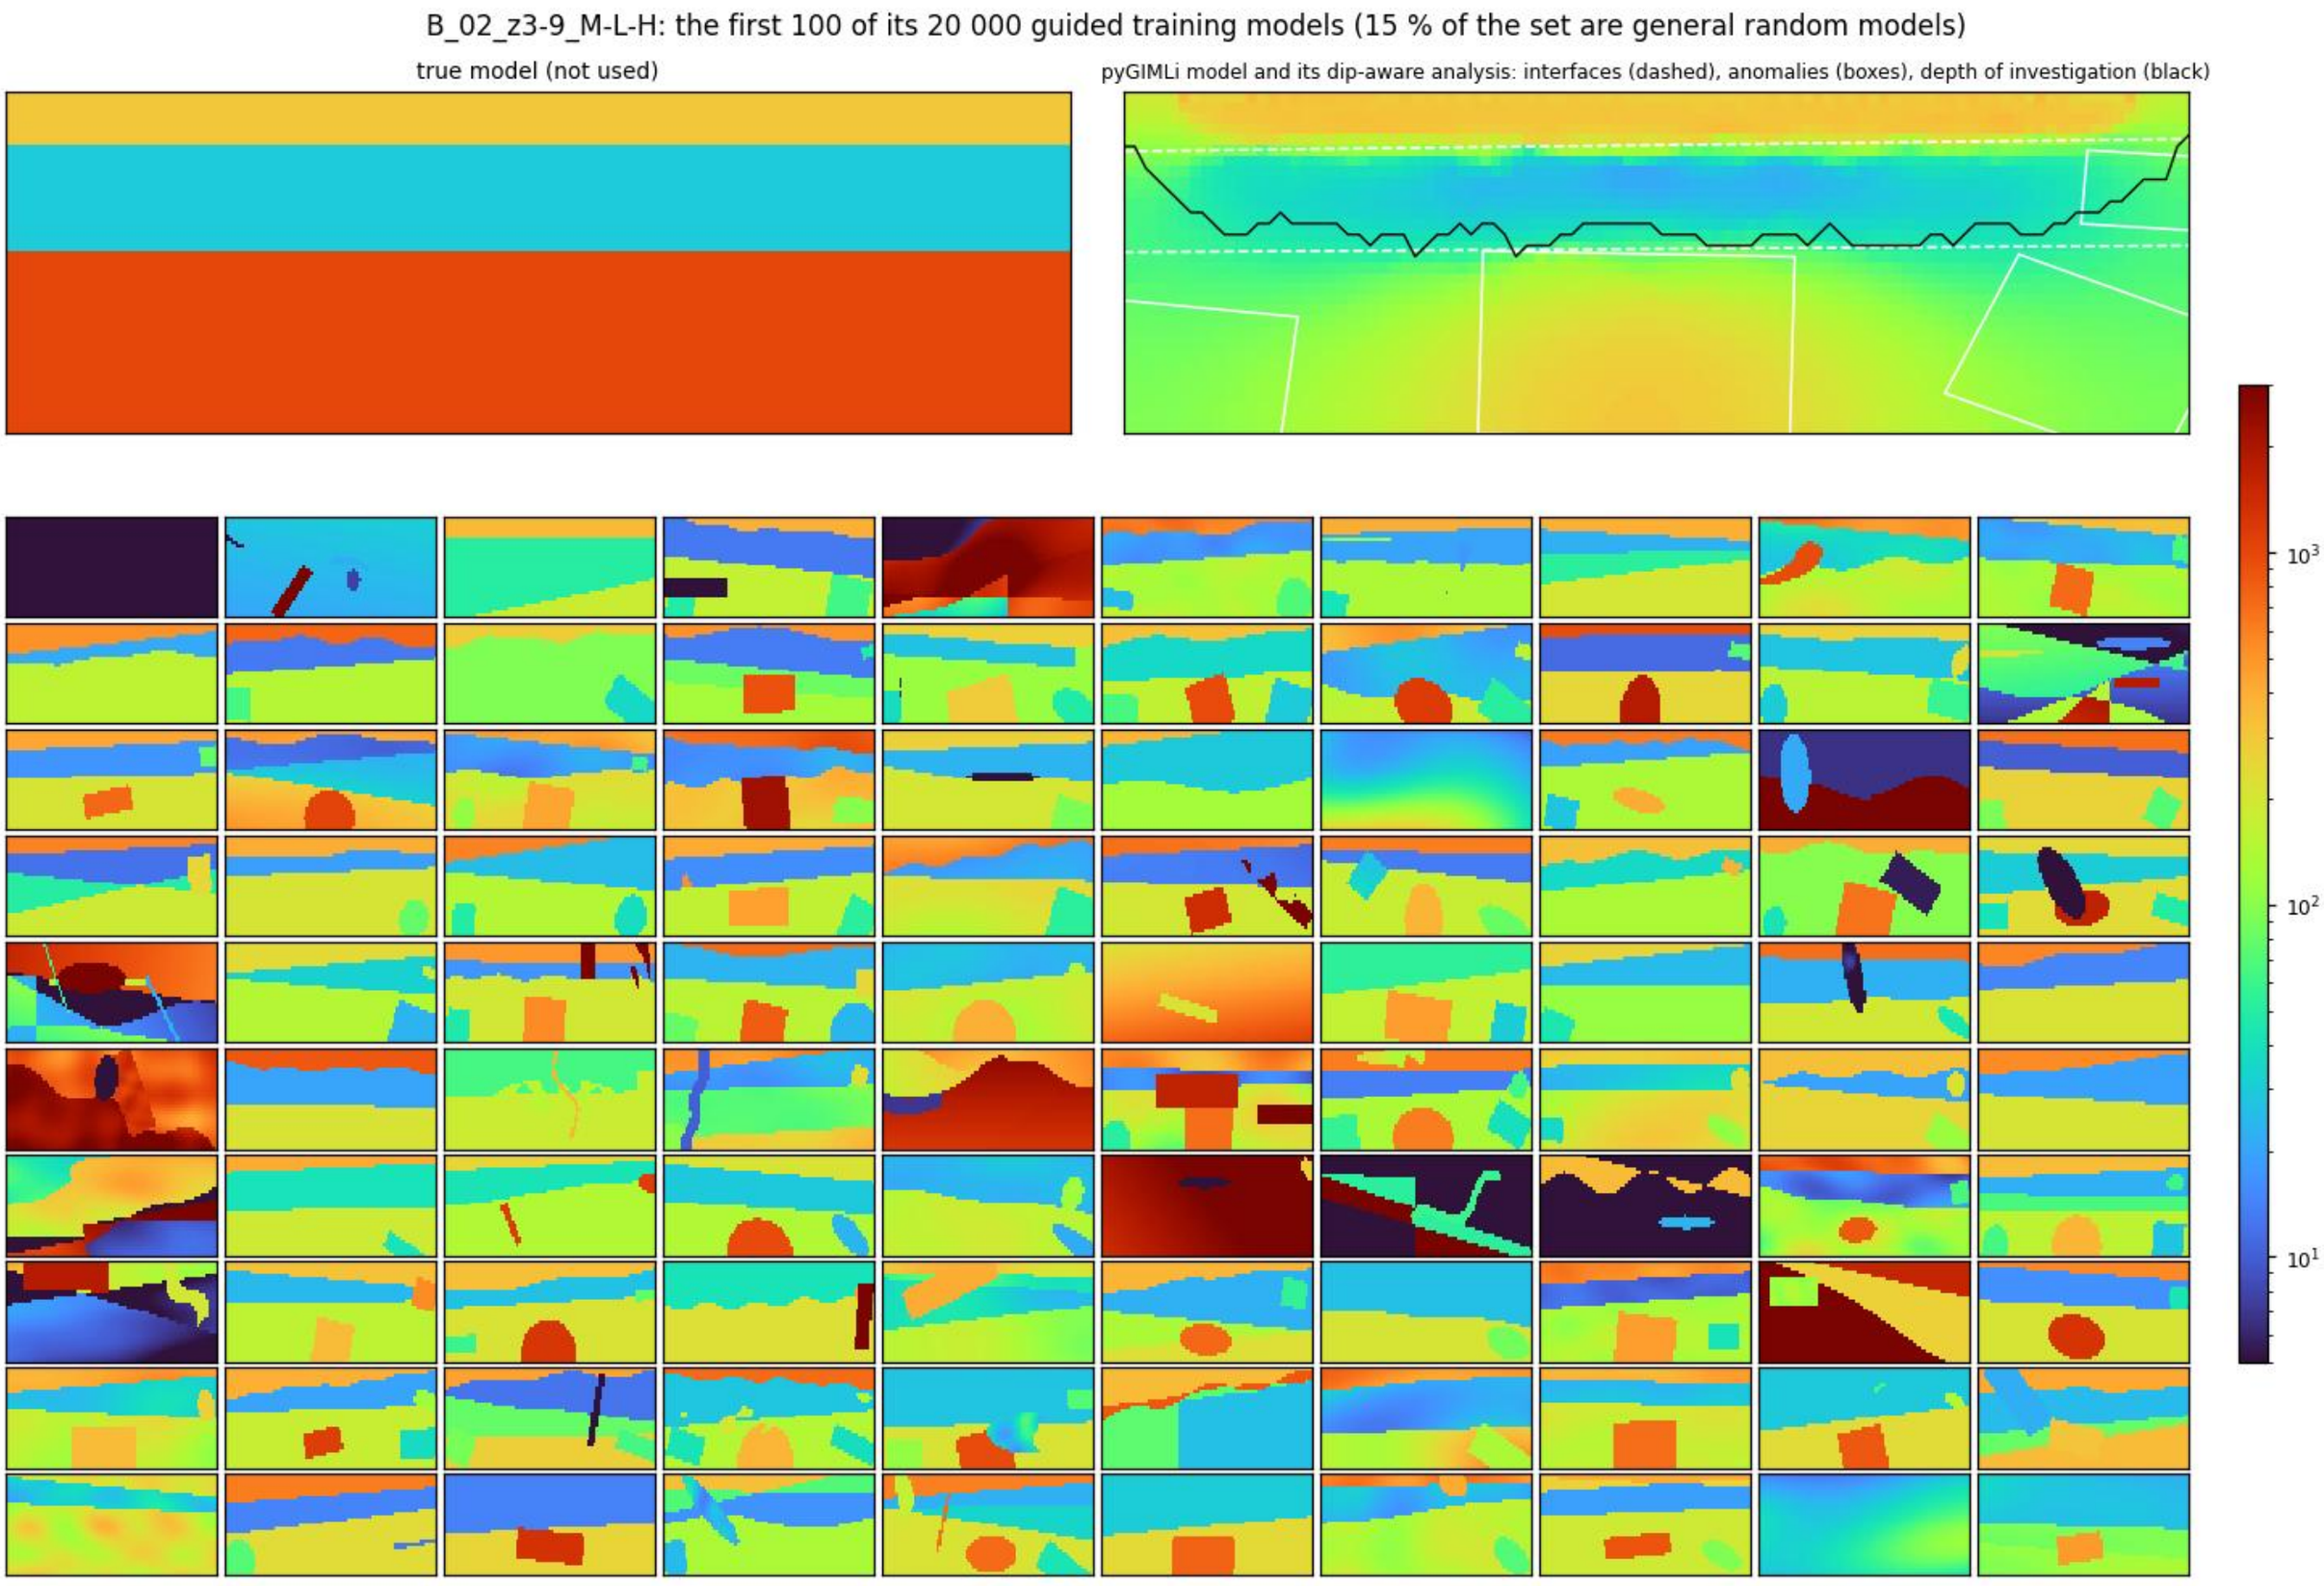
B_02_z3-9_M-L-H: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S12

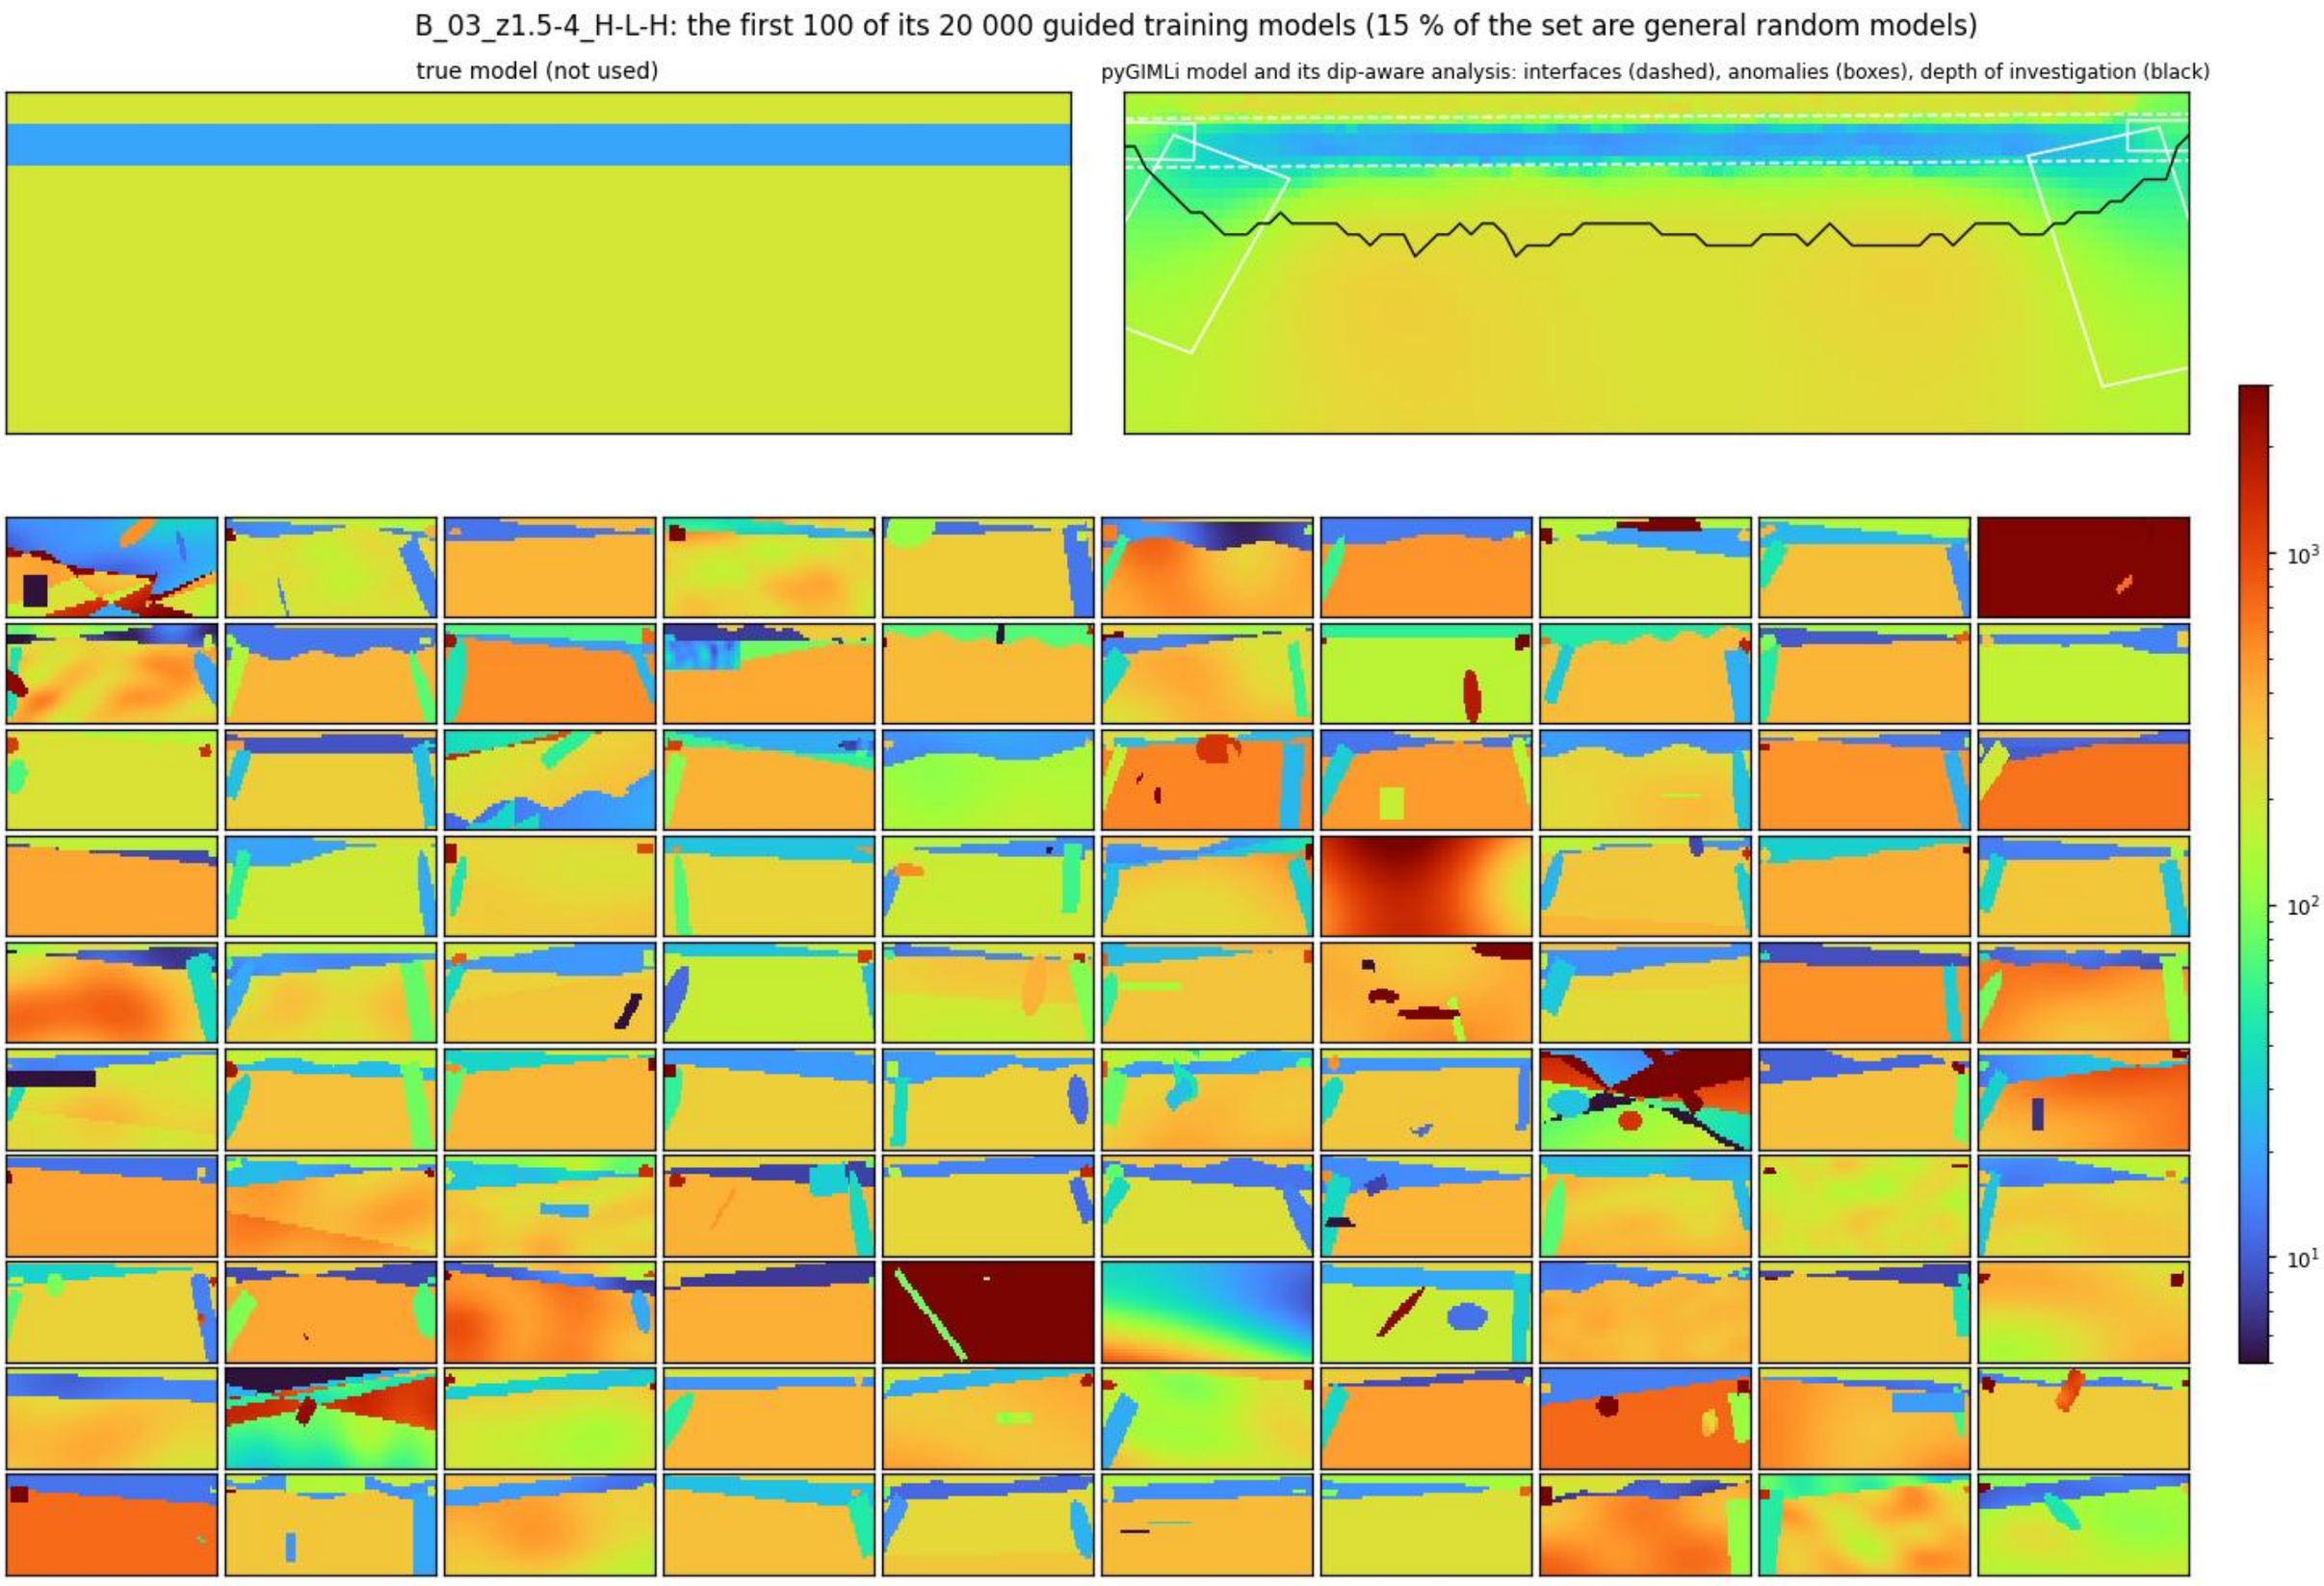
B_03_z1.5-4_H-L-H: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S13

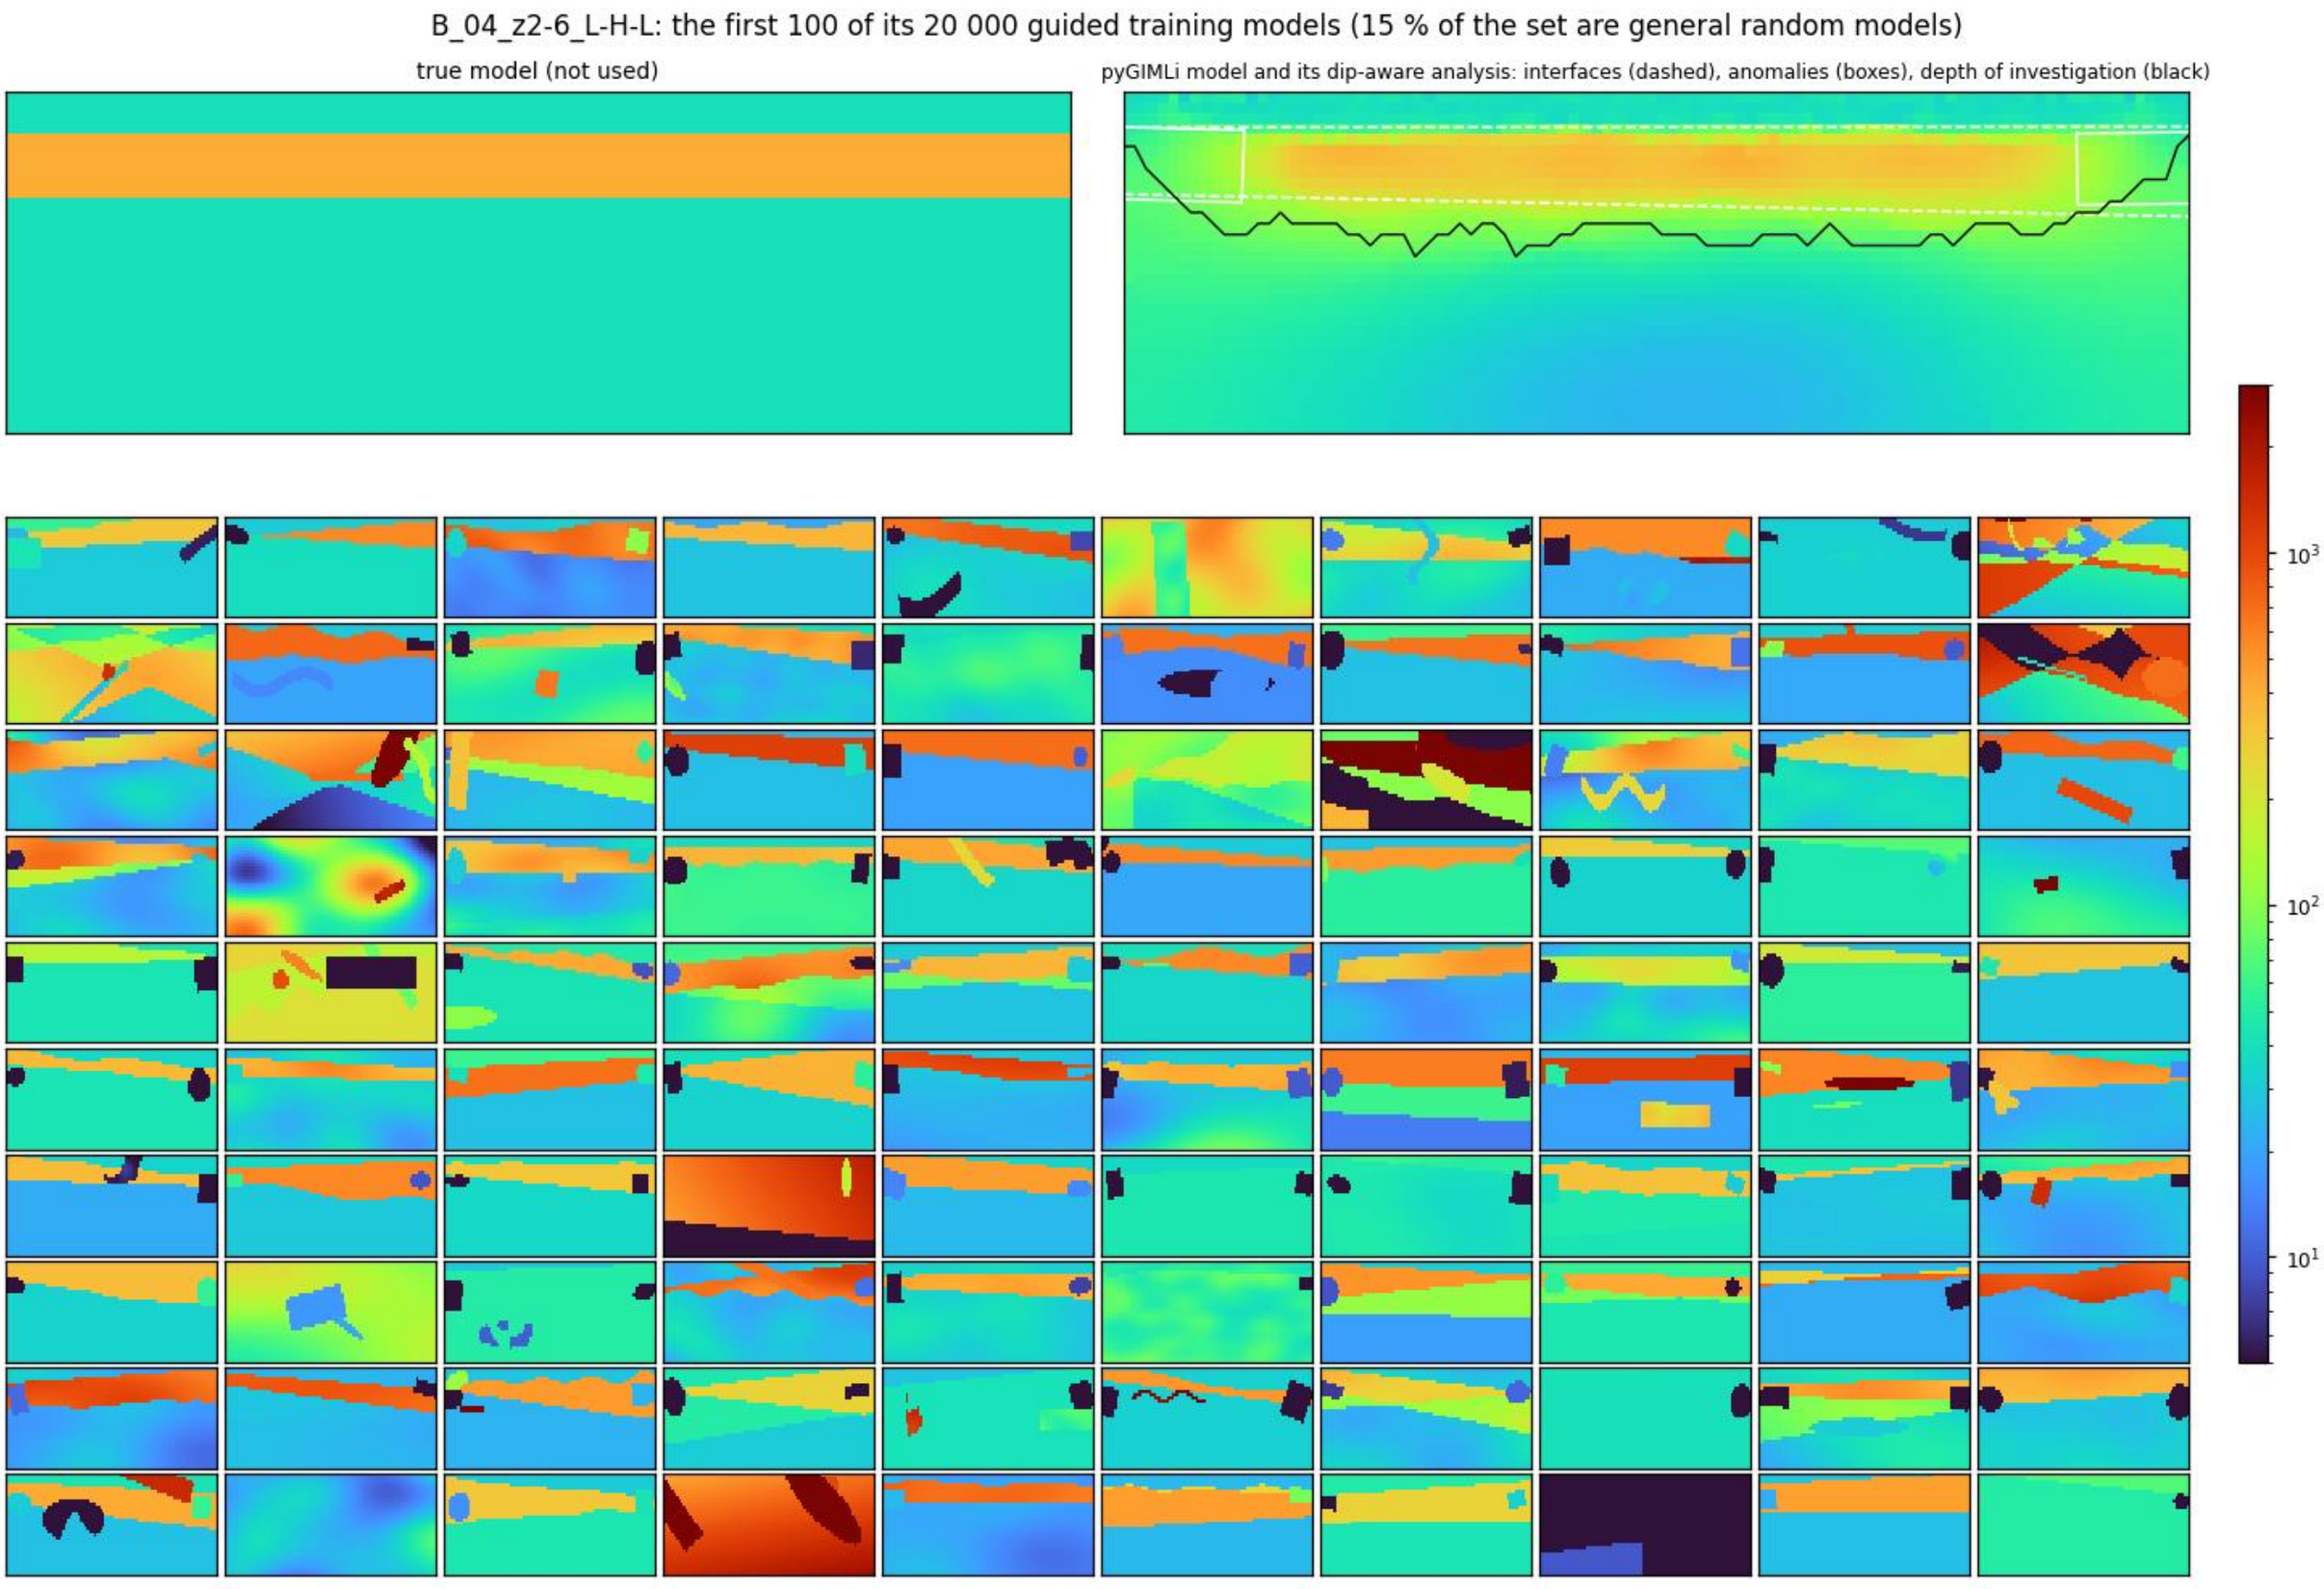
B_04_z2-6_L-H-L: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S14

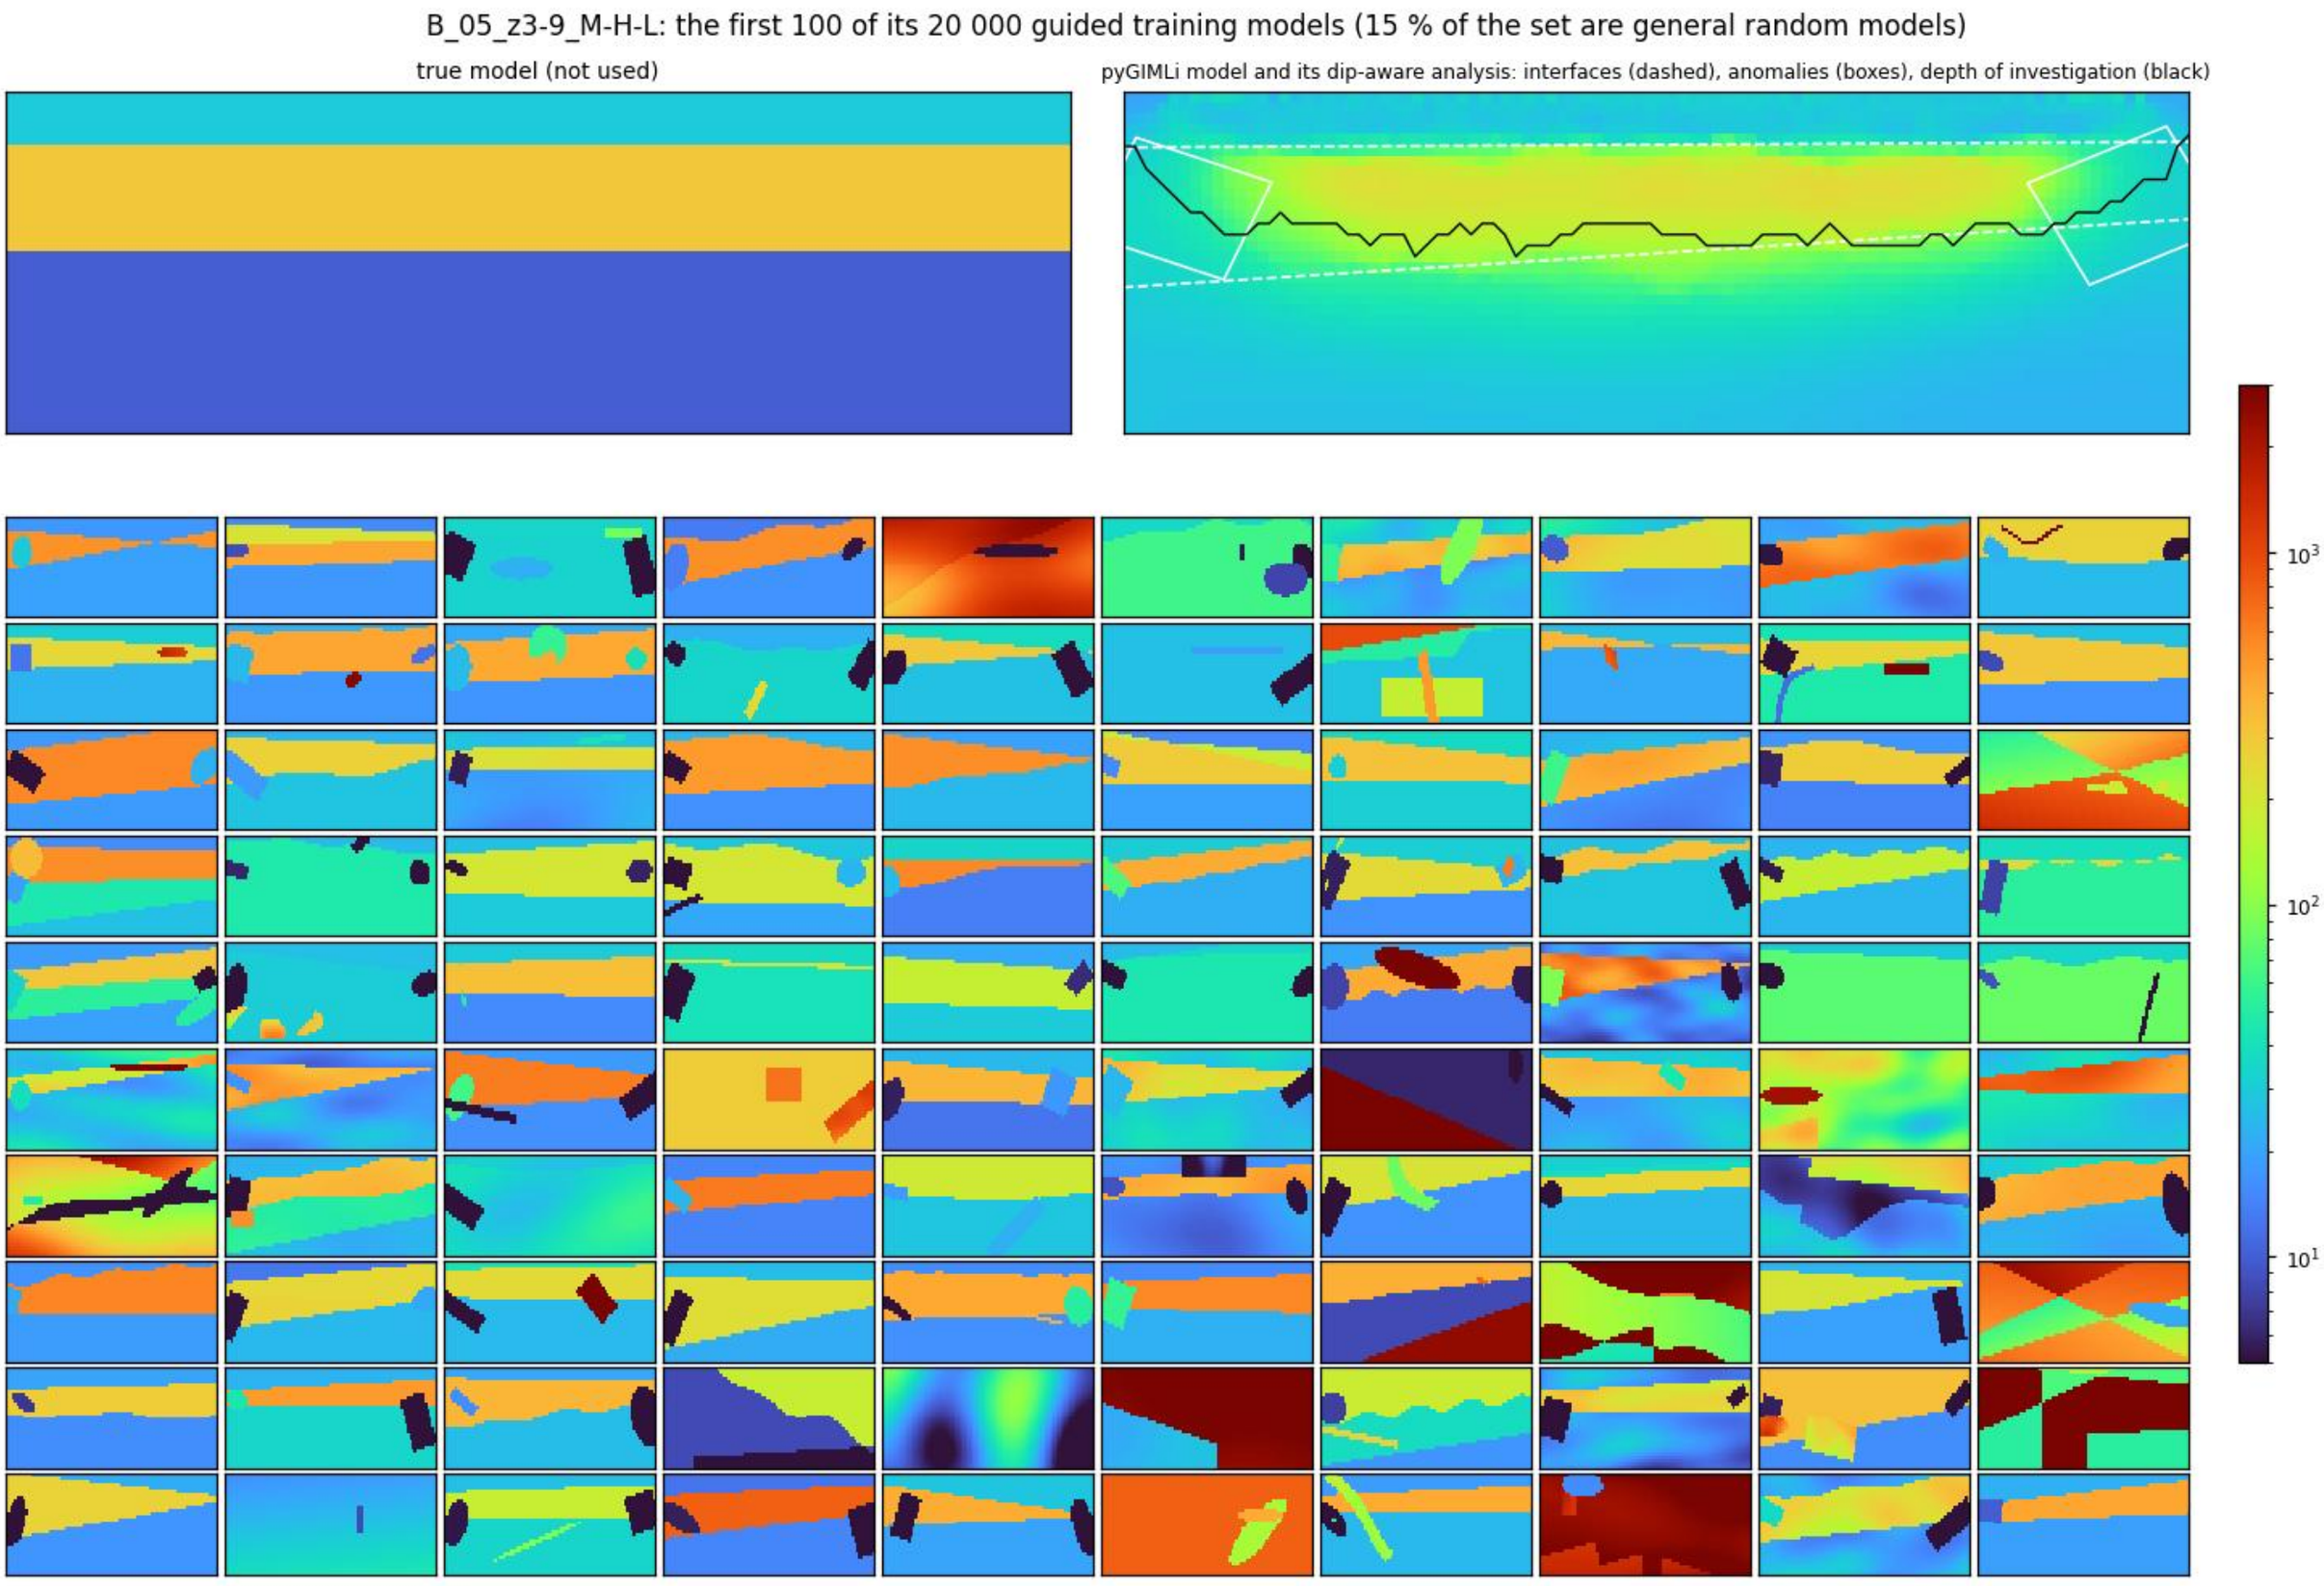
B_05_z3-9_M-H-L: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S15

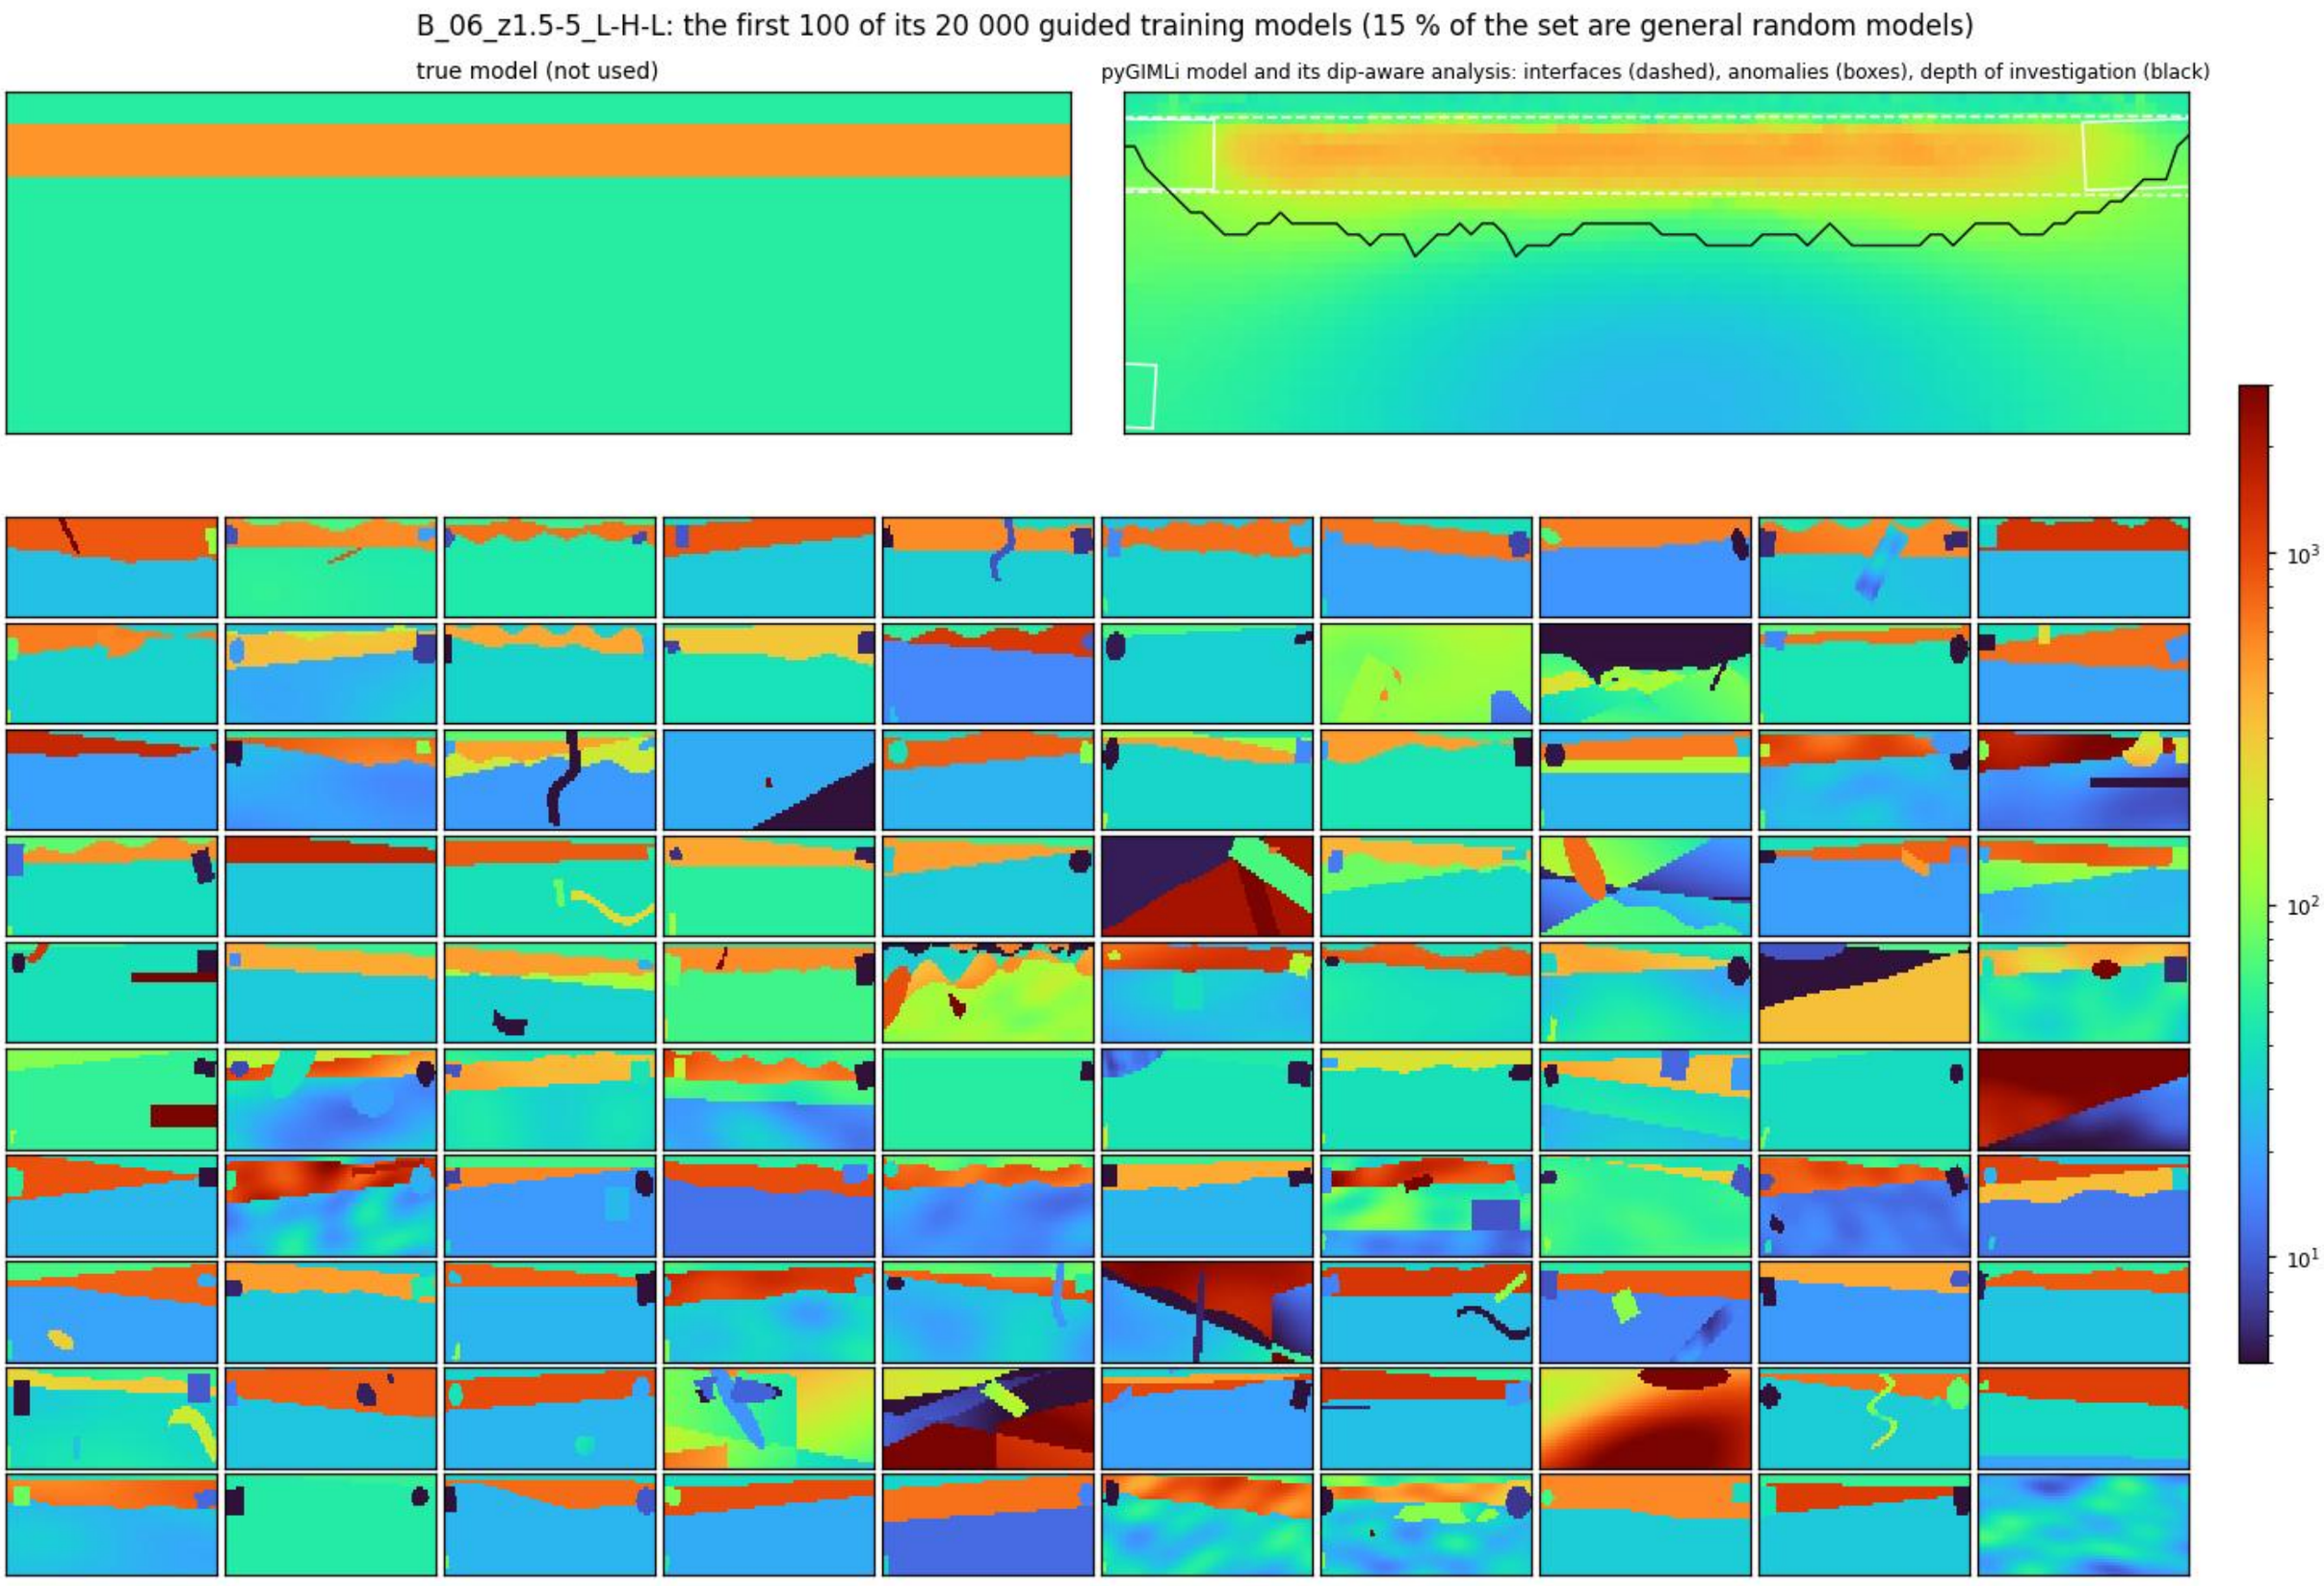
B_06_z1.5-5_L-H-L: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S16

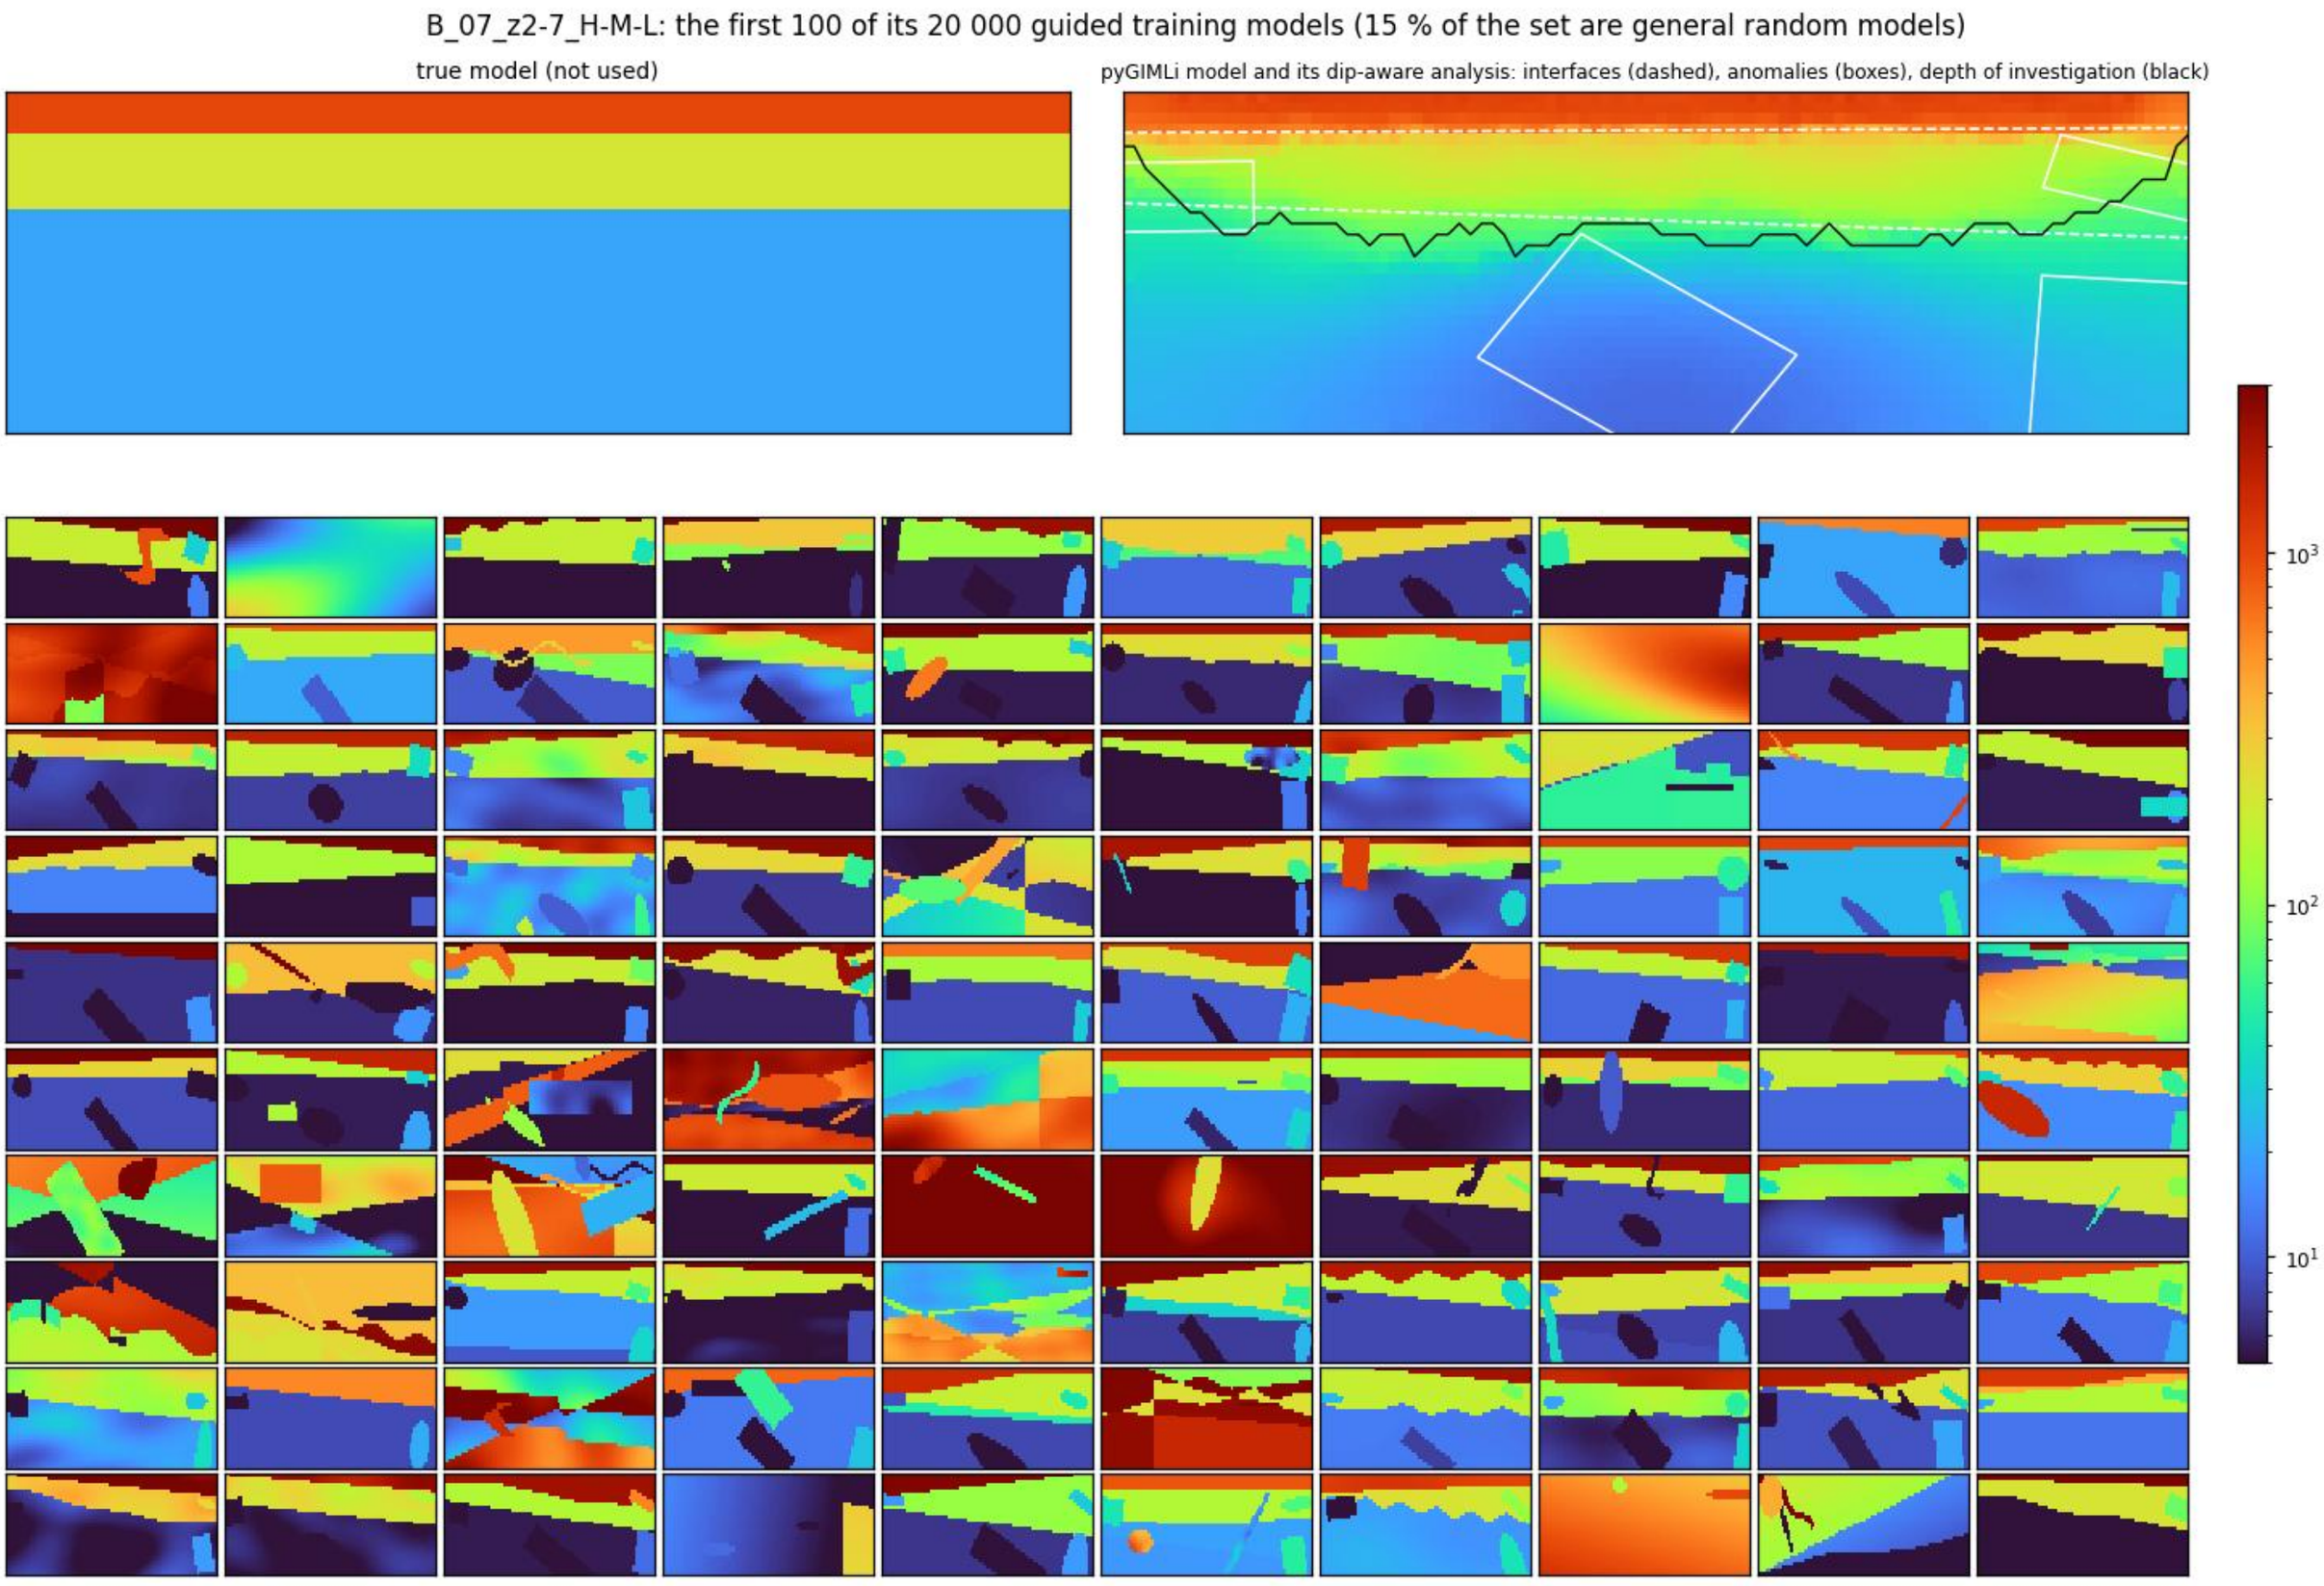
B_07_z2-7_H-M-L: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S17

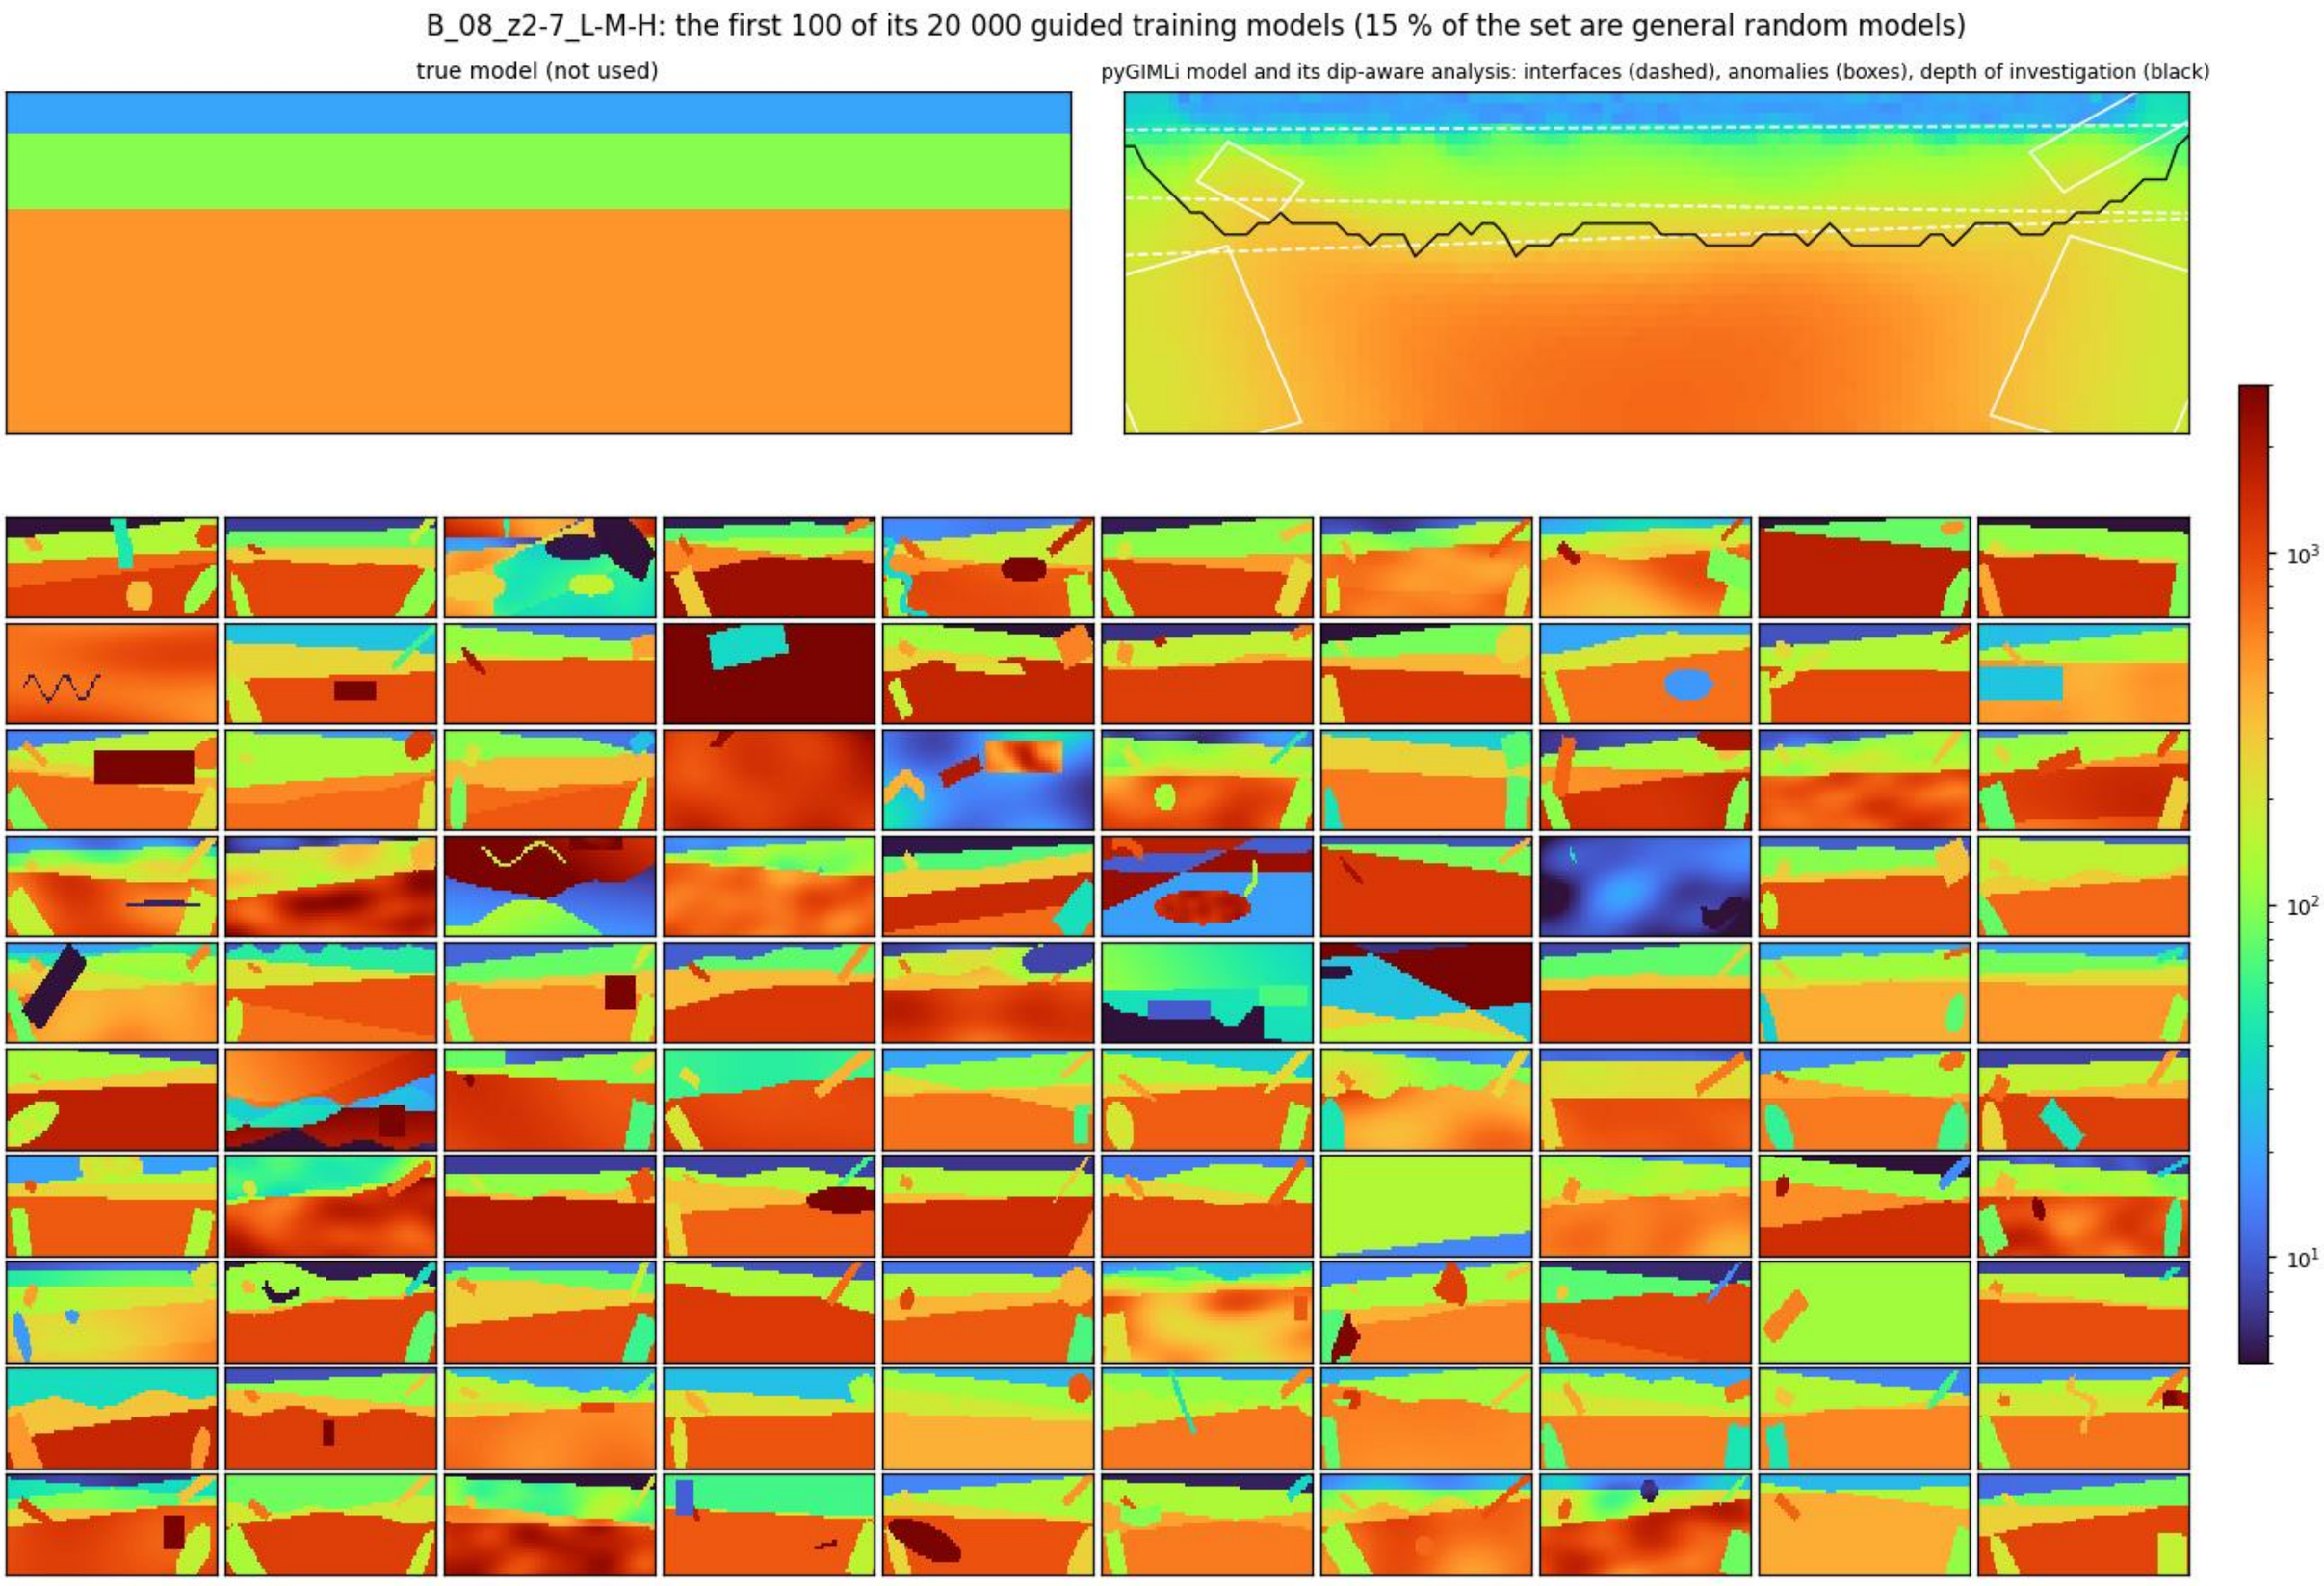
B_08_z2-7_L-M-H: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S18

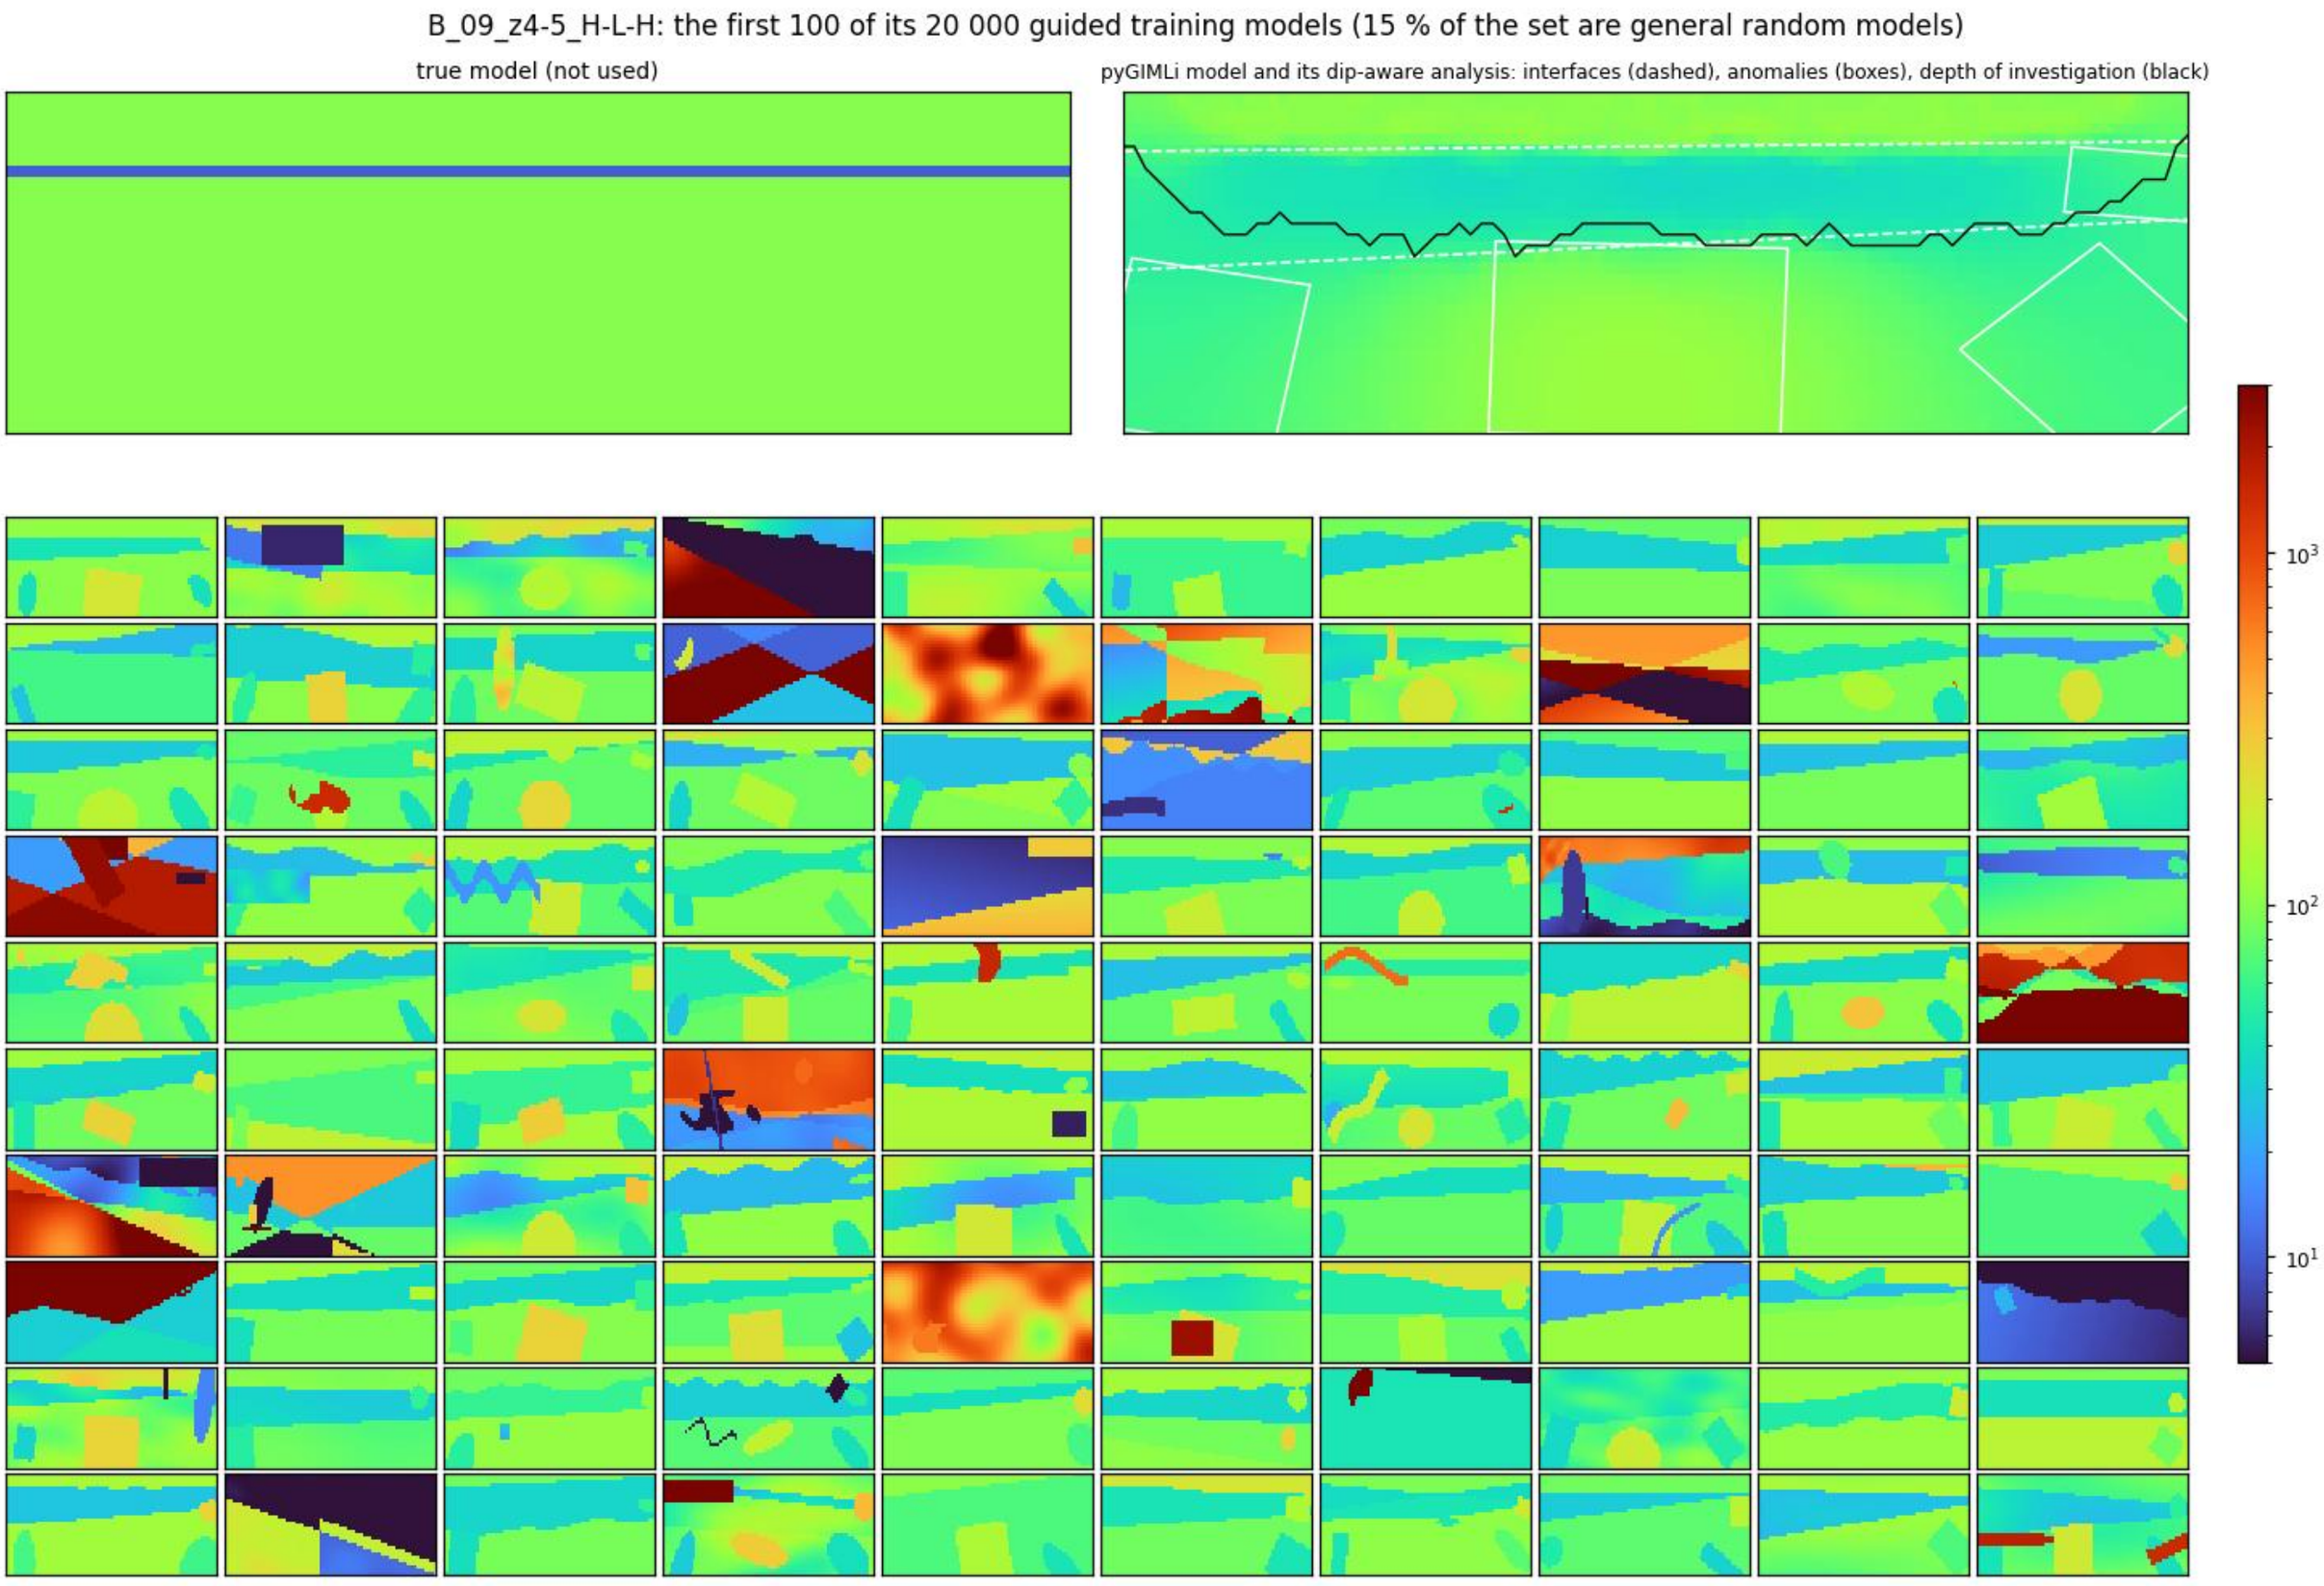
B_09_z4-5_H-L-H: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S19

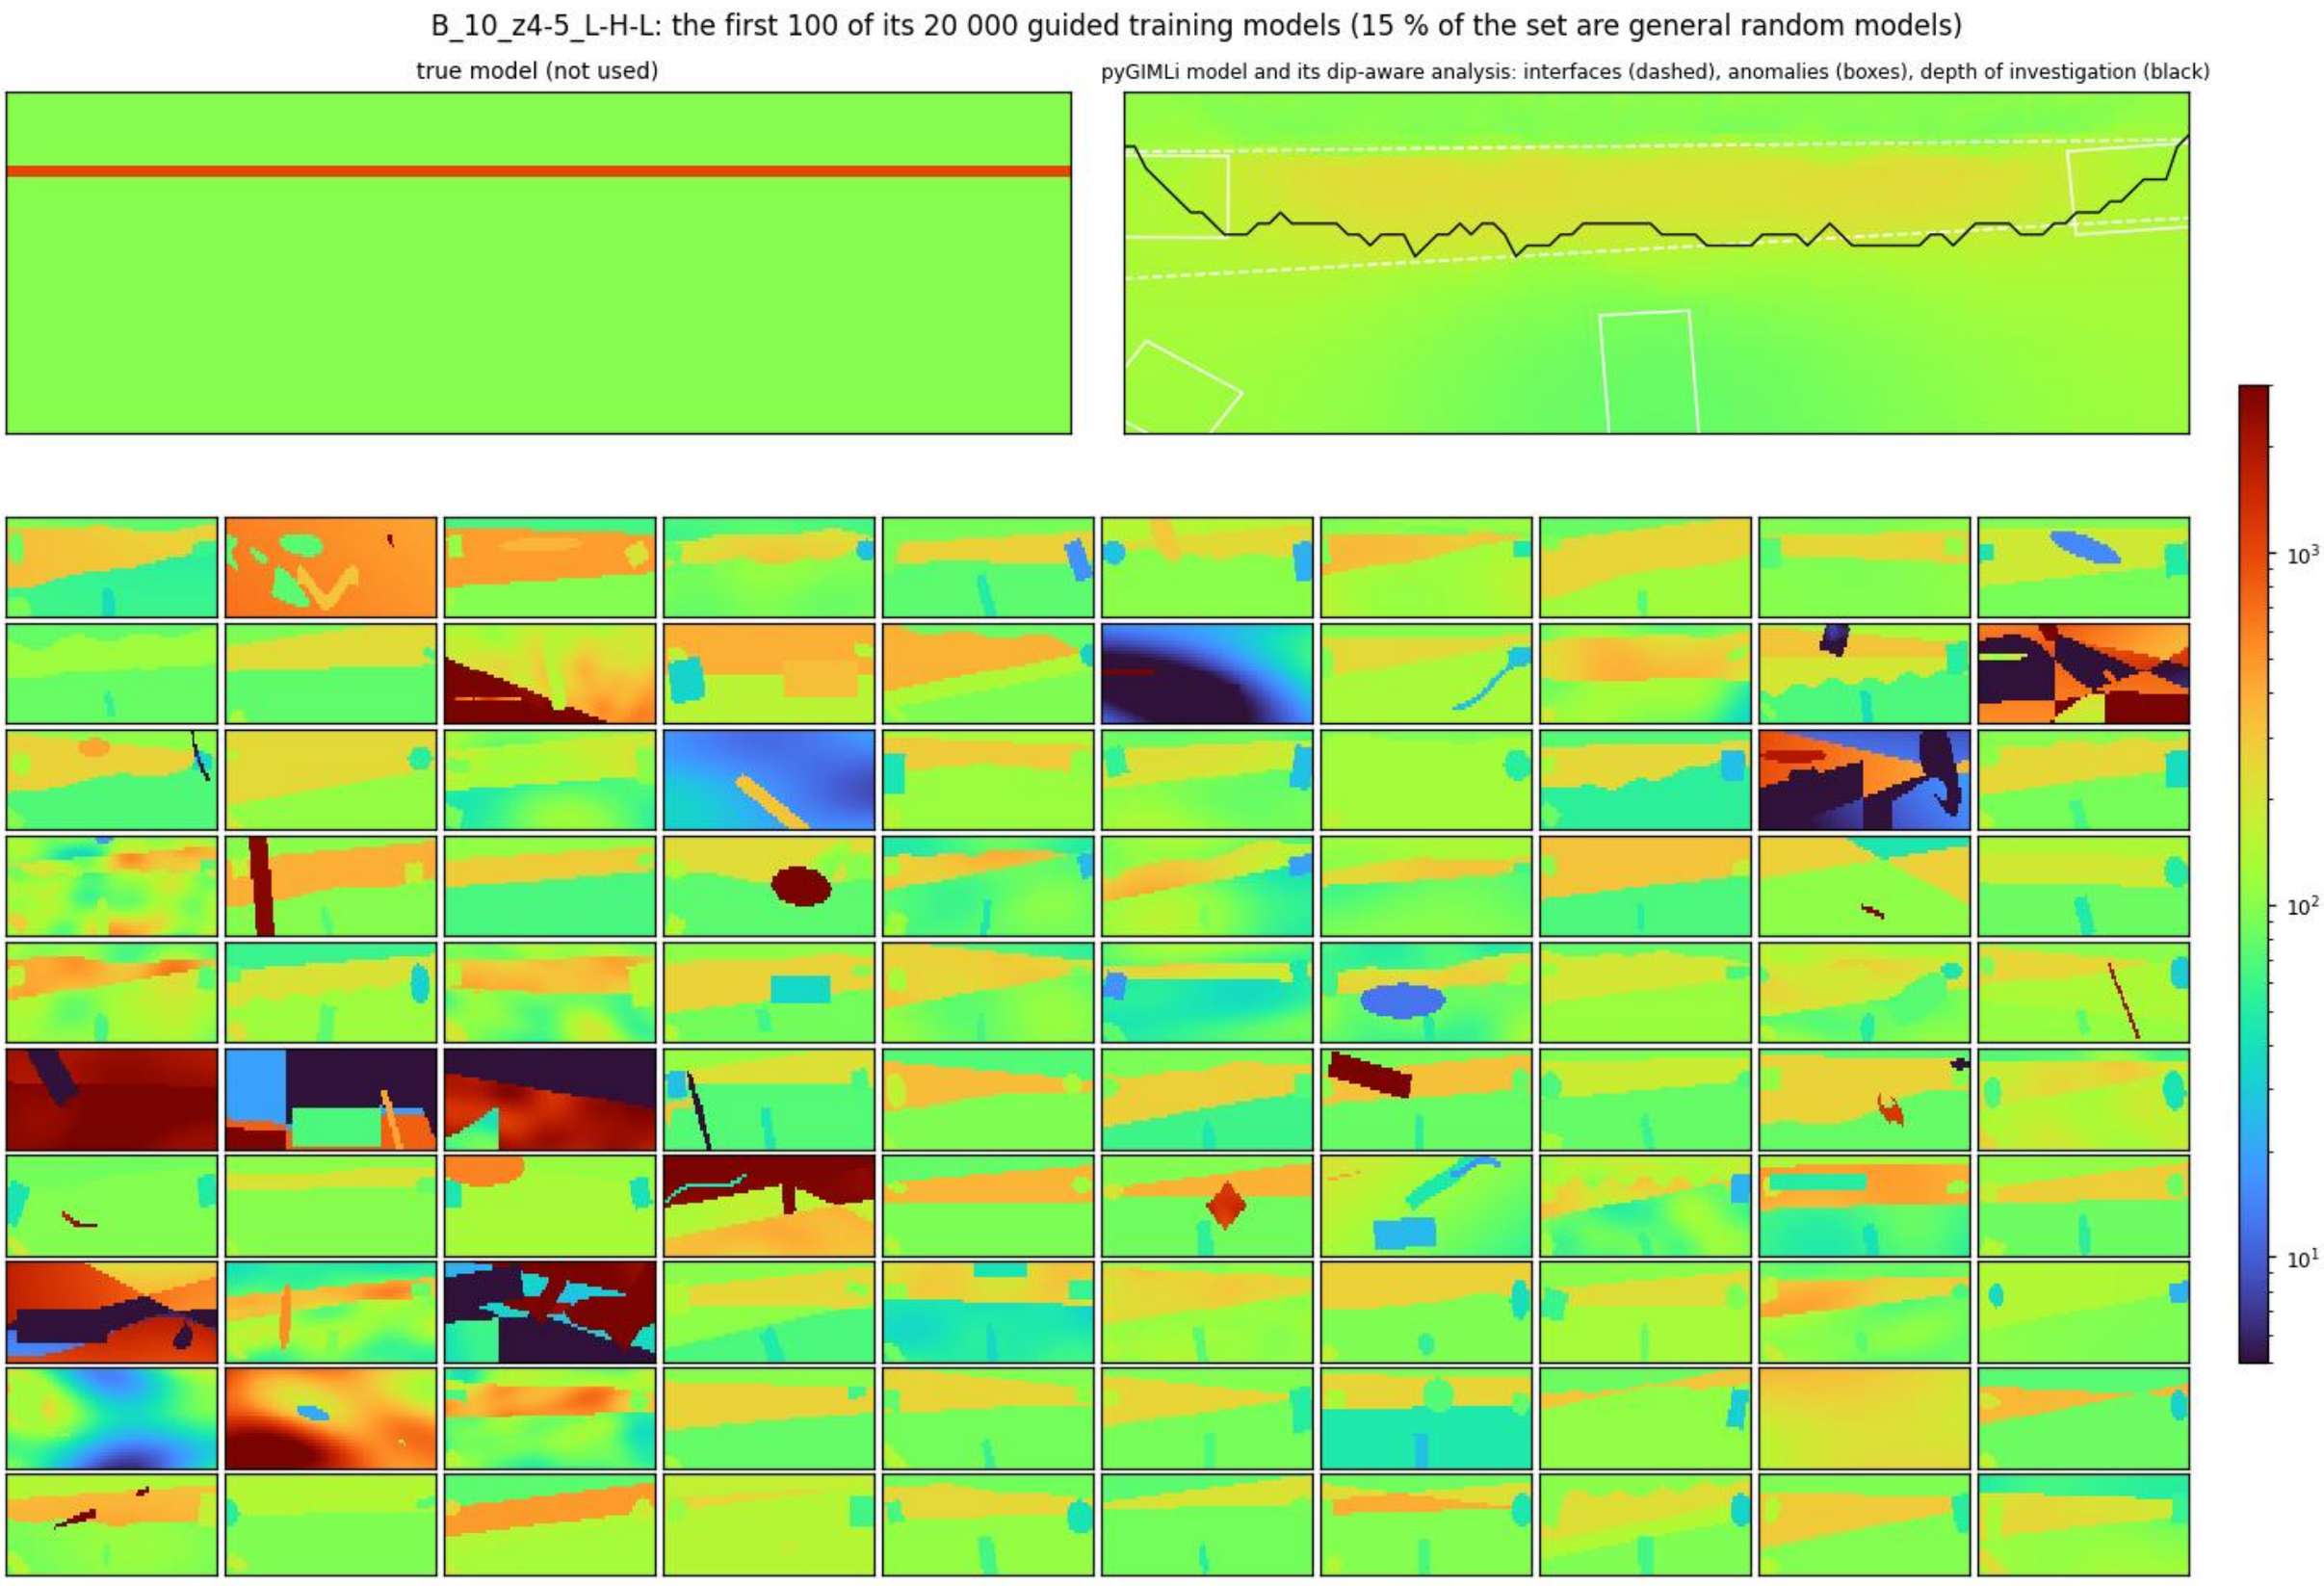
B_10_z4-5_L-H-L: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S20

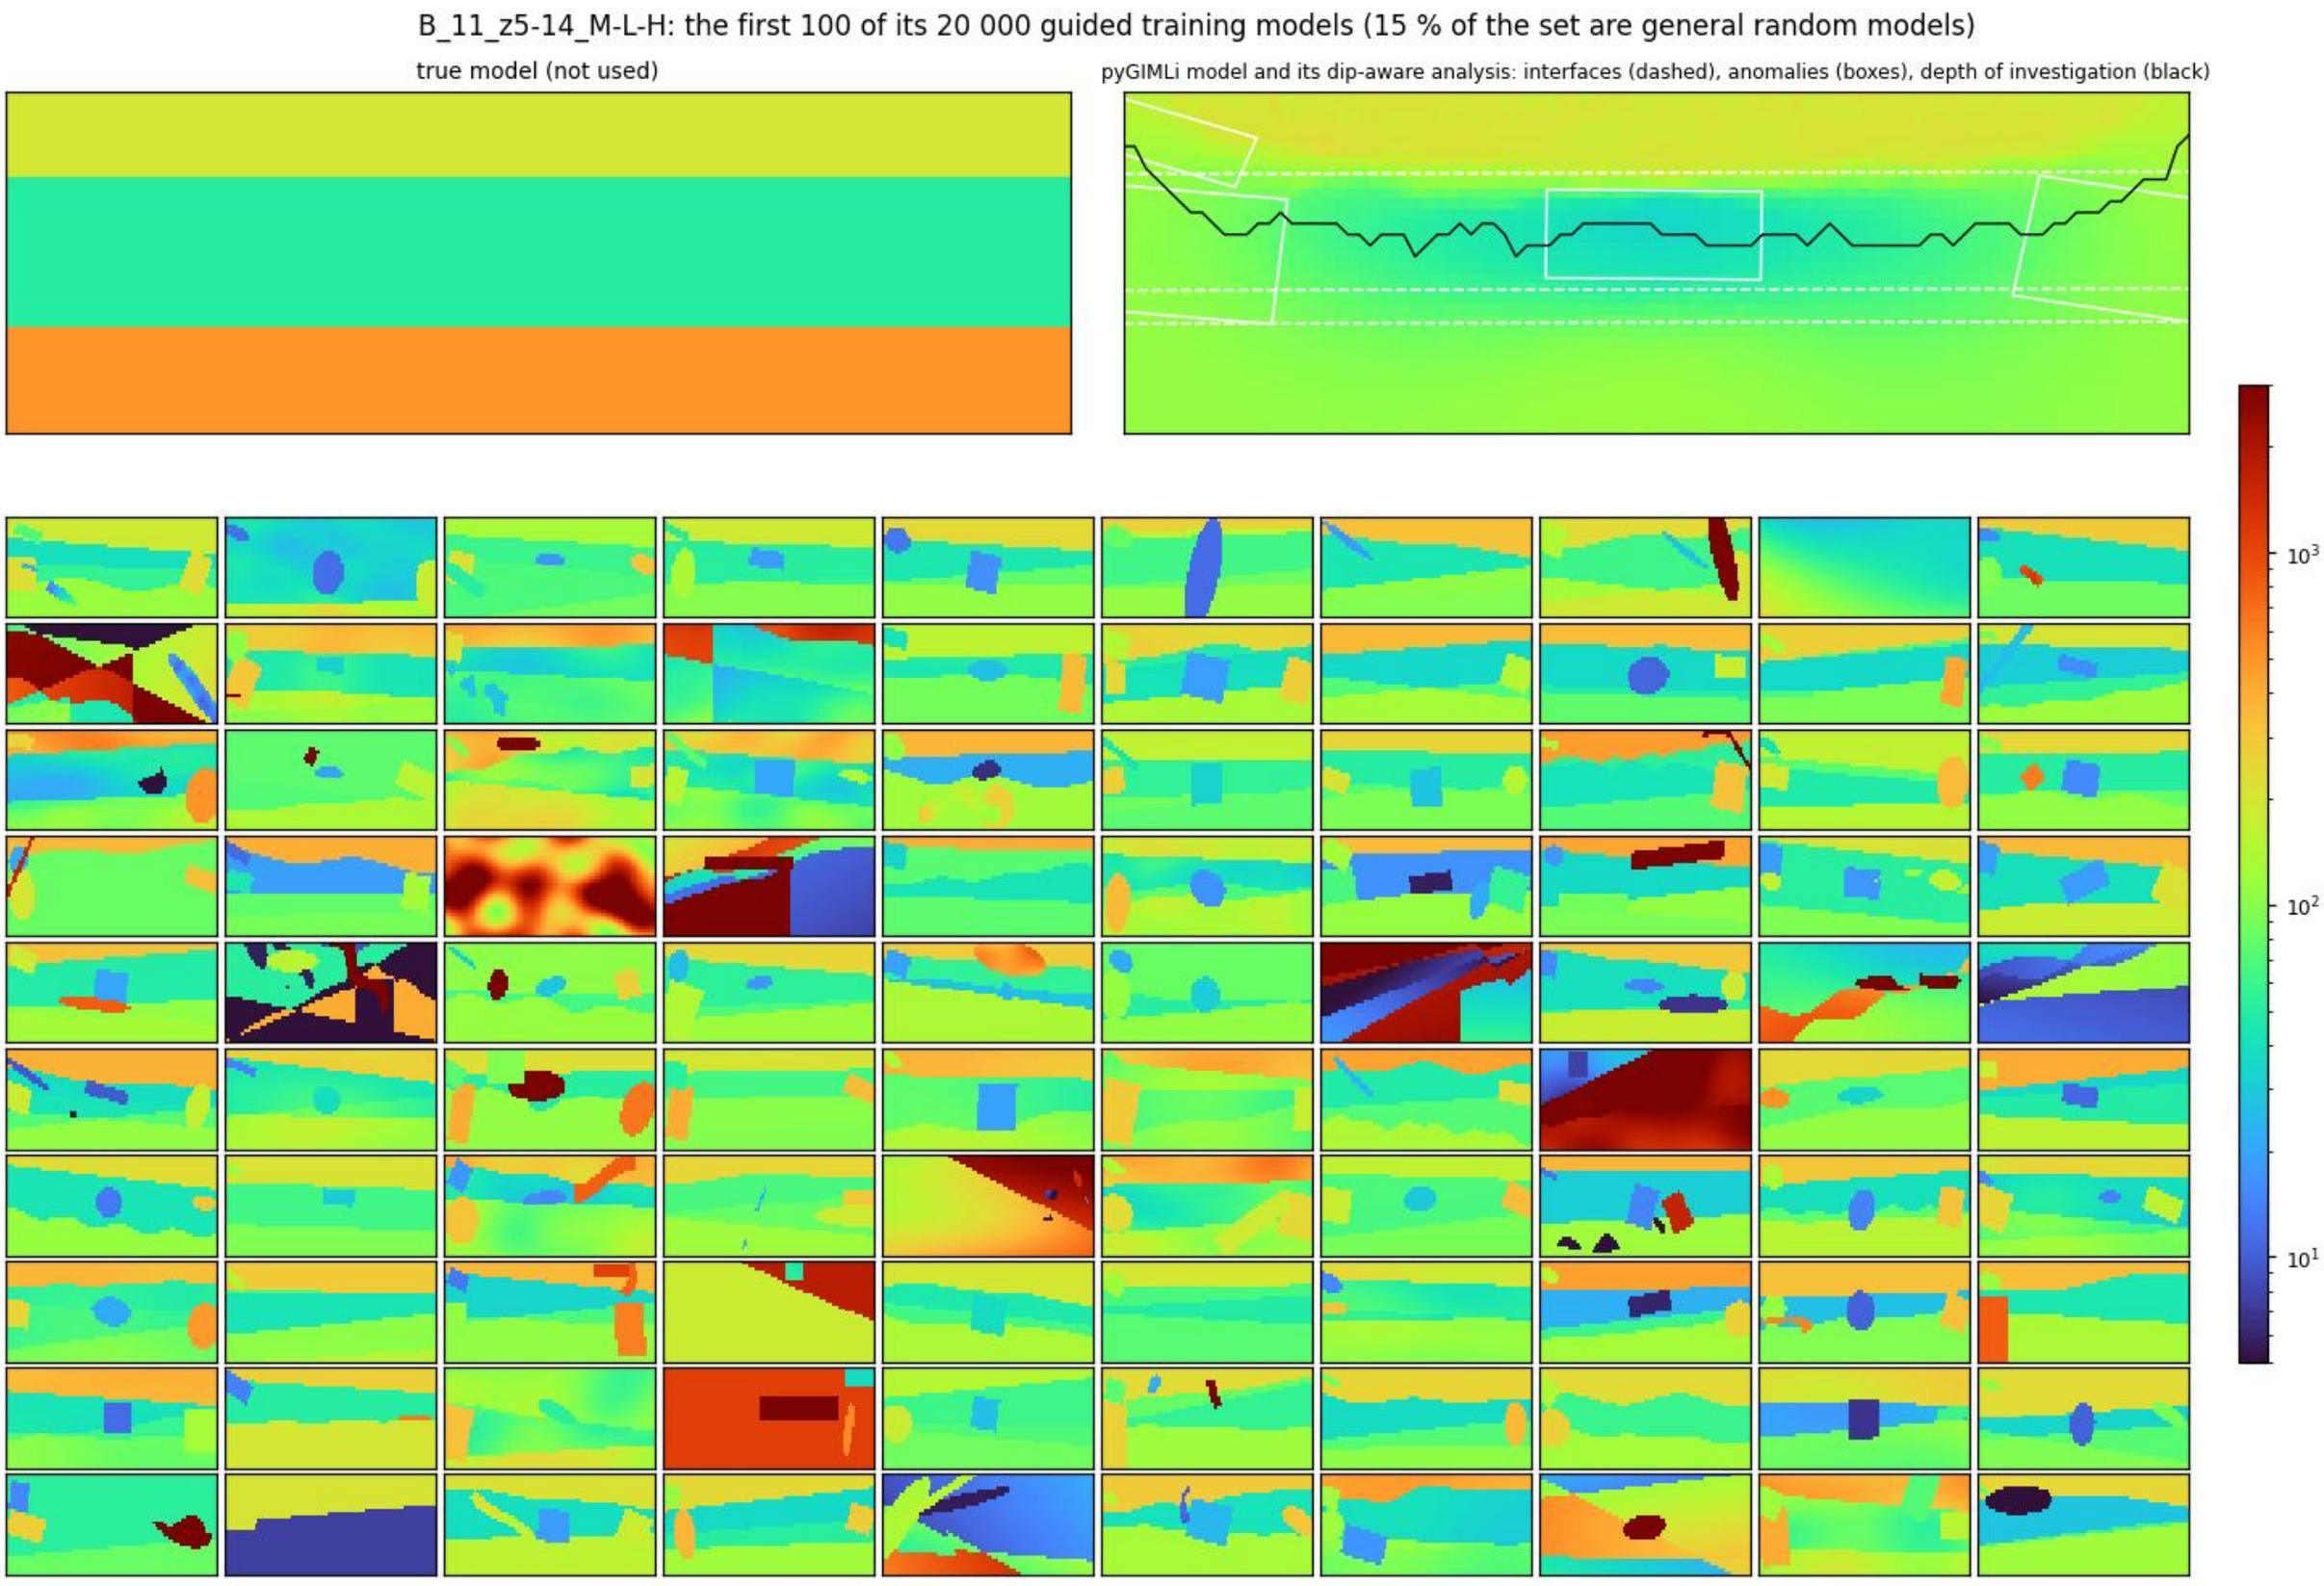
B_11_z5-14_M-L-H: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S21

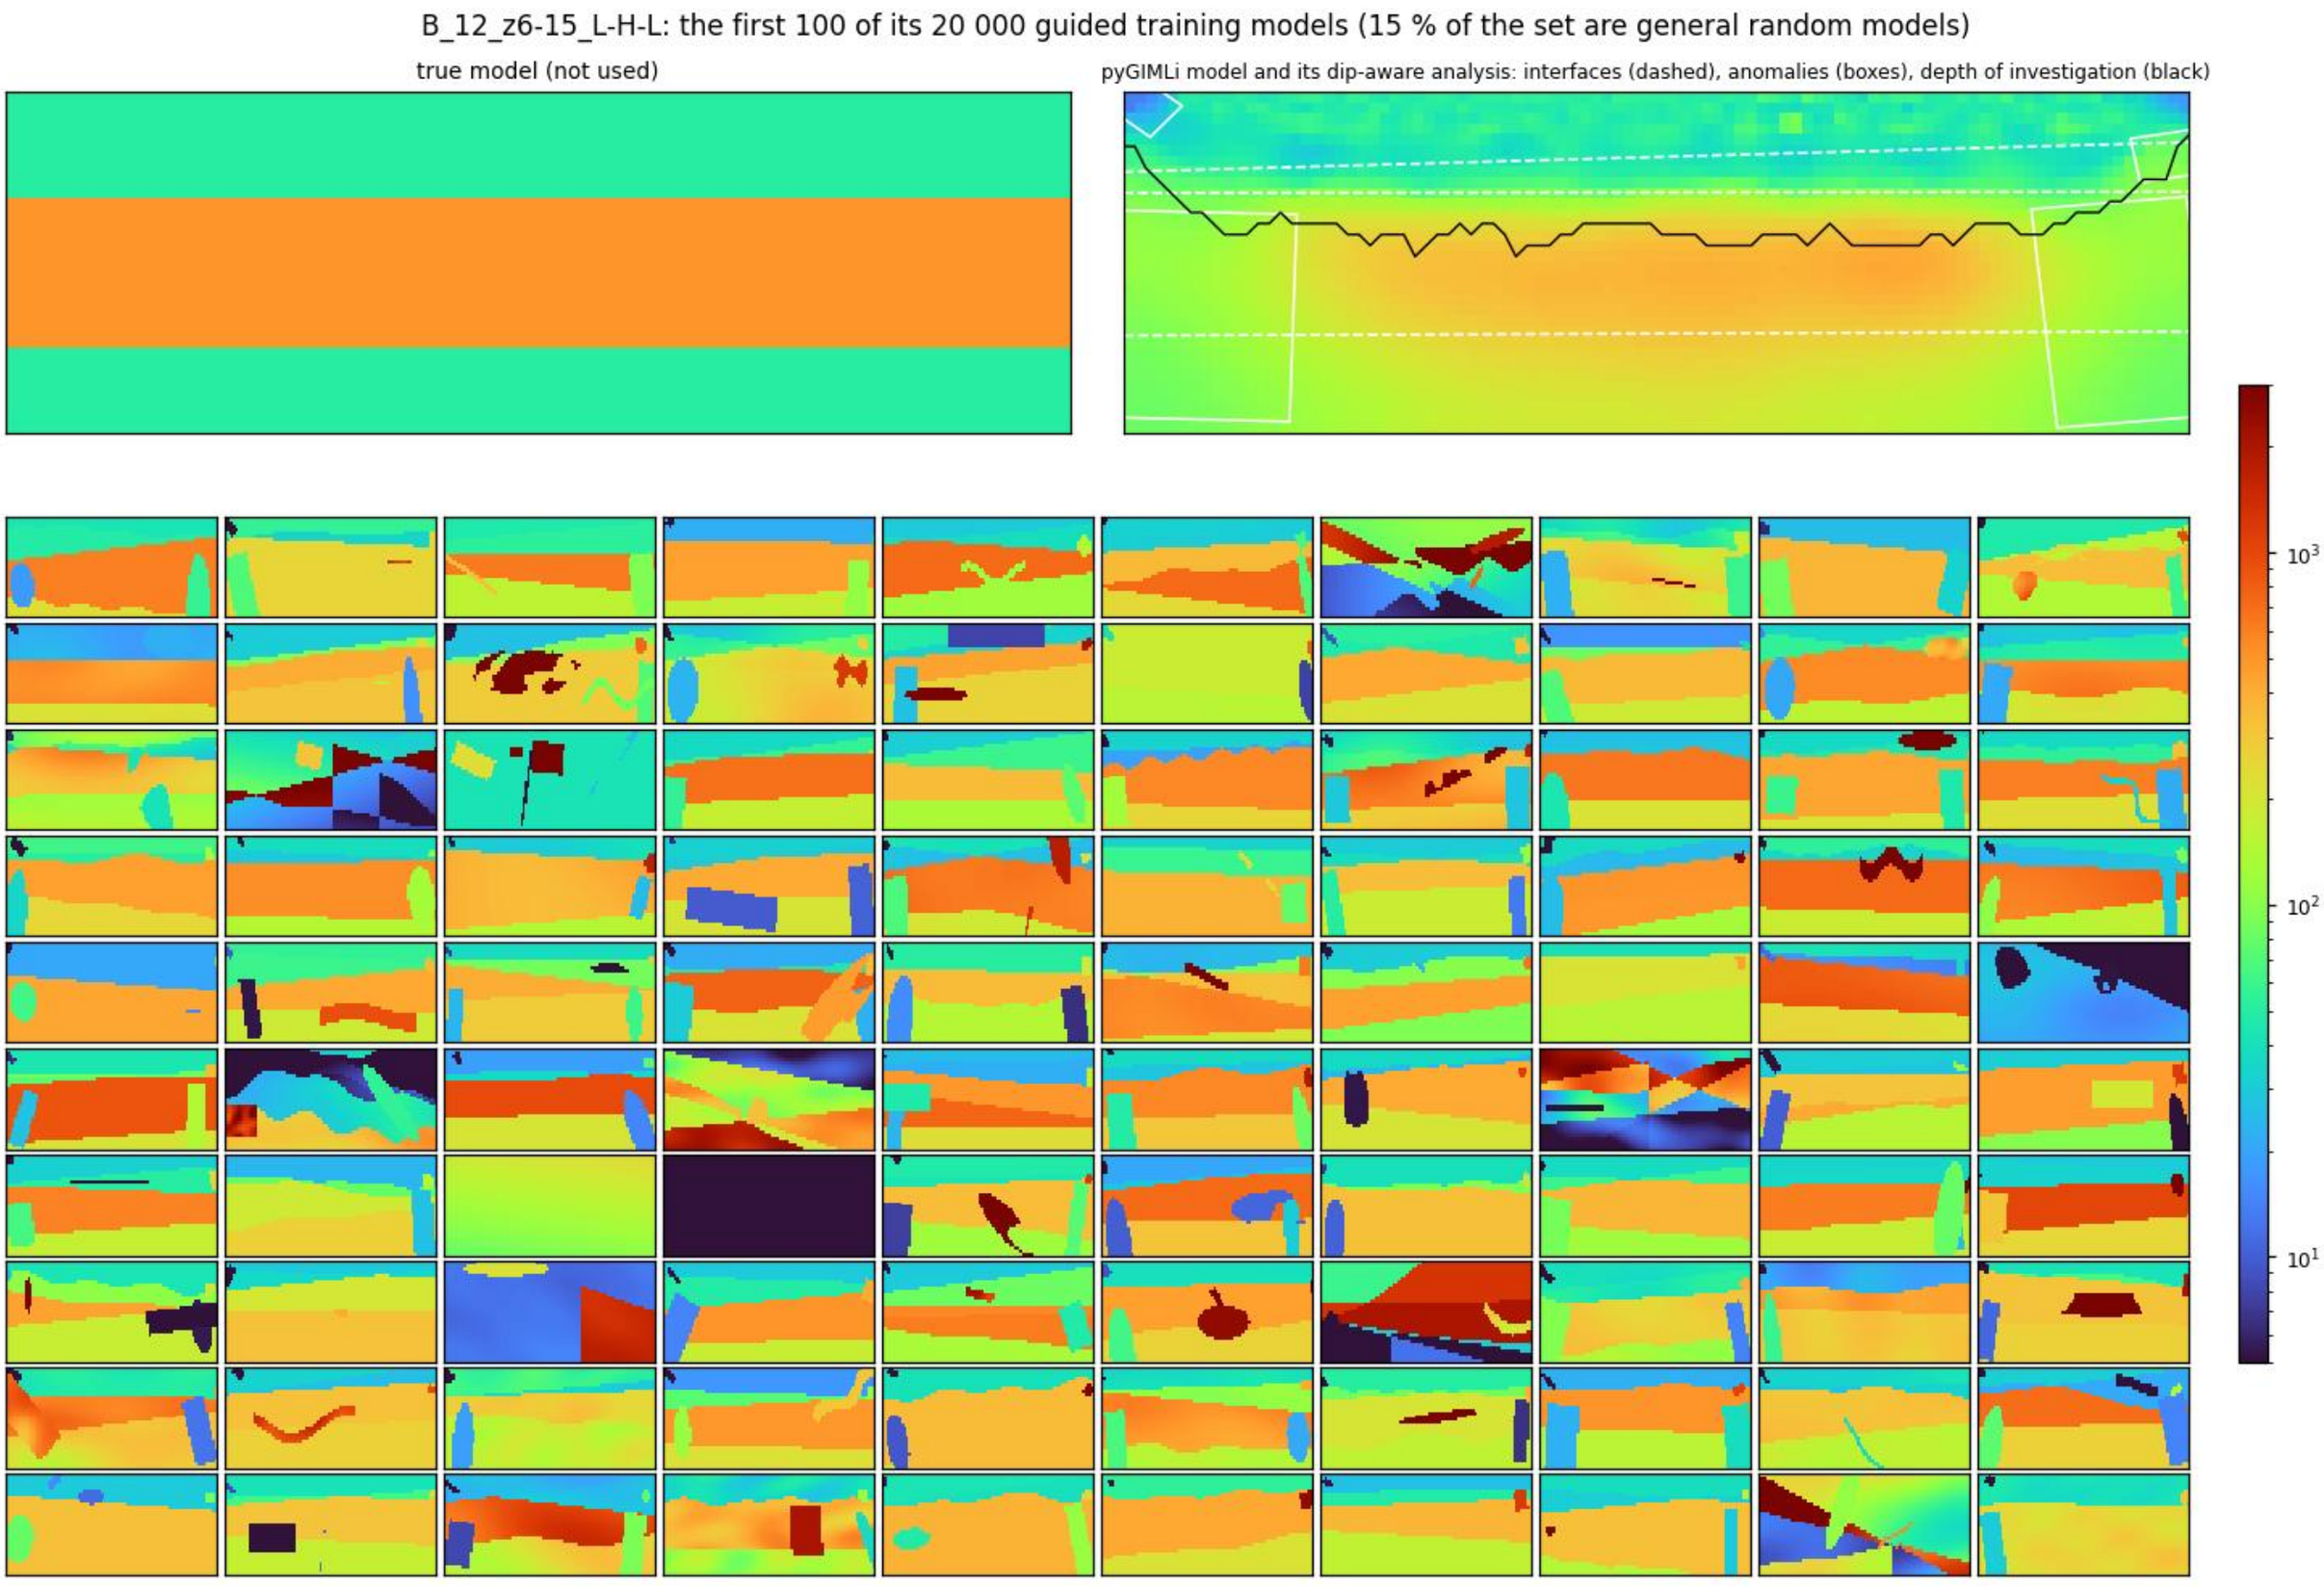
B_12_z6-15_L-H-L: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S22

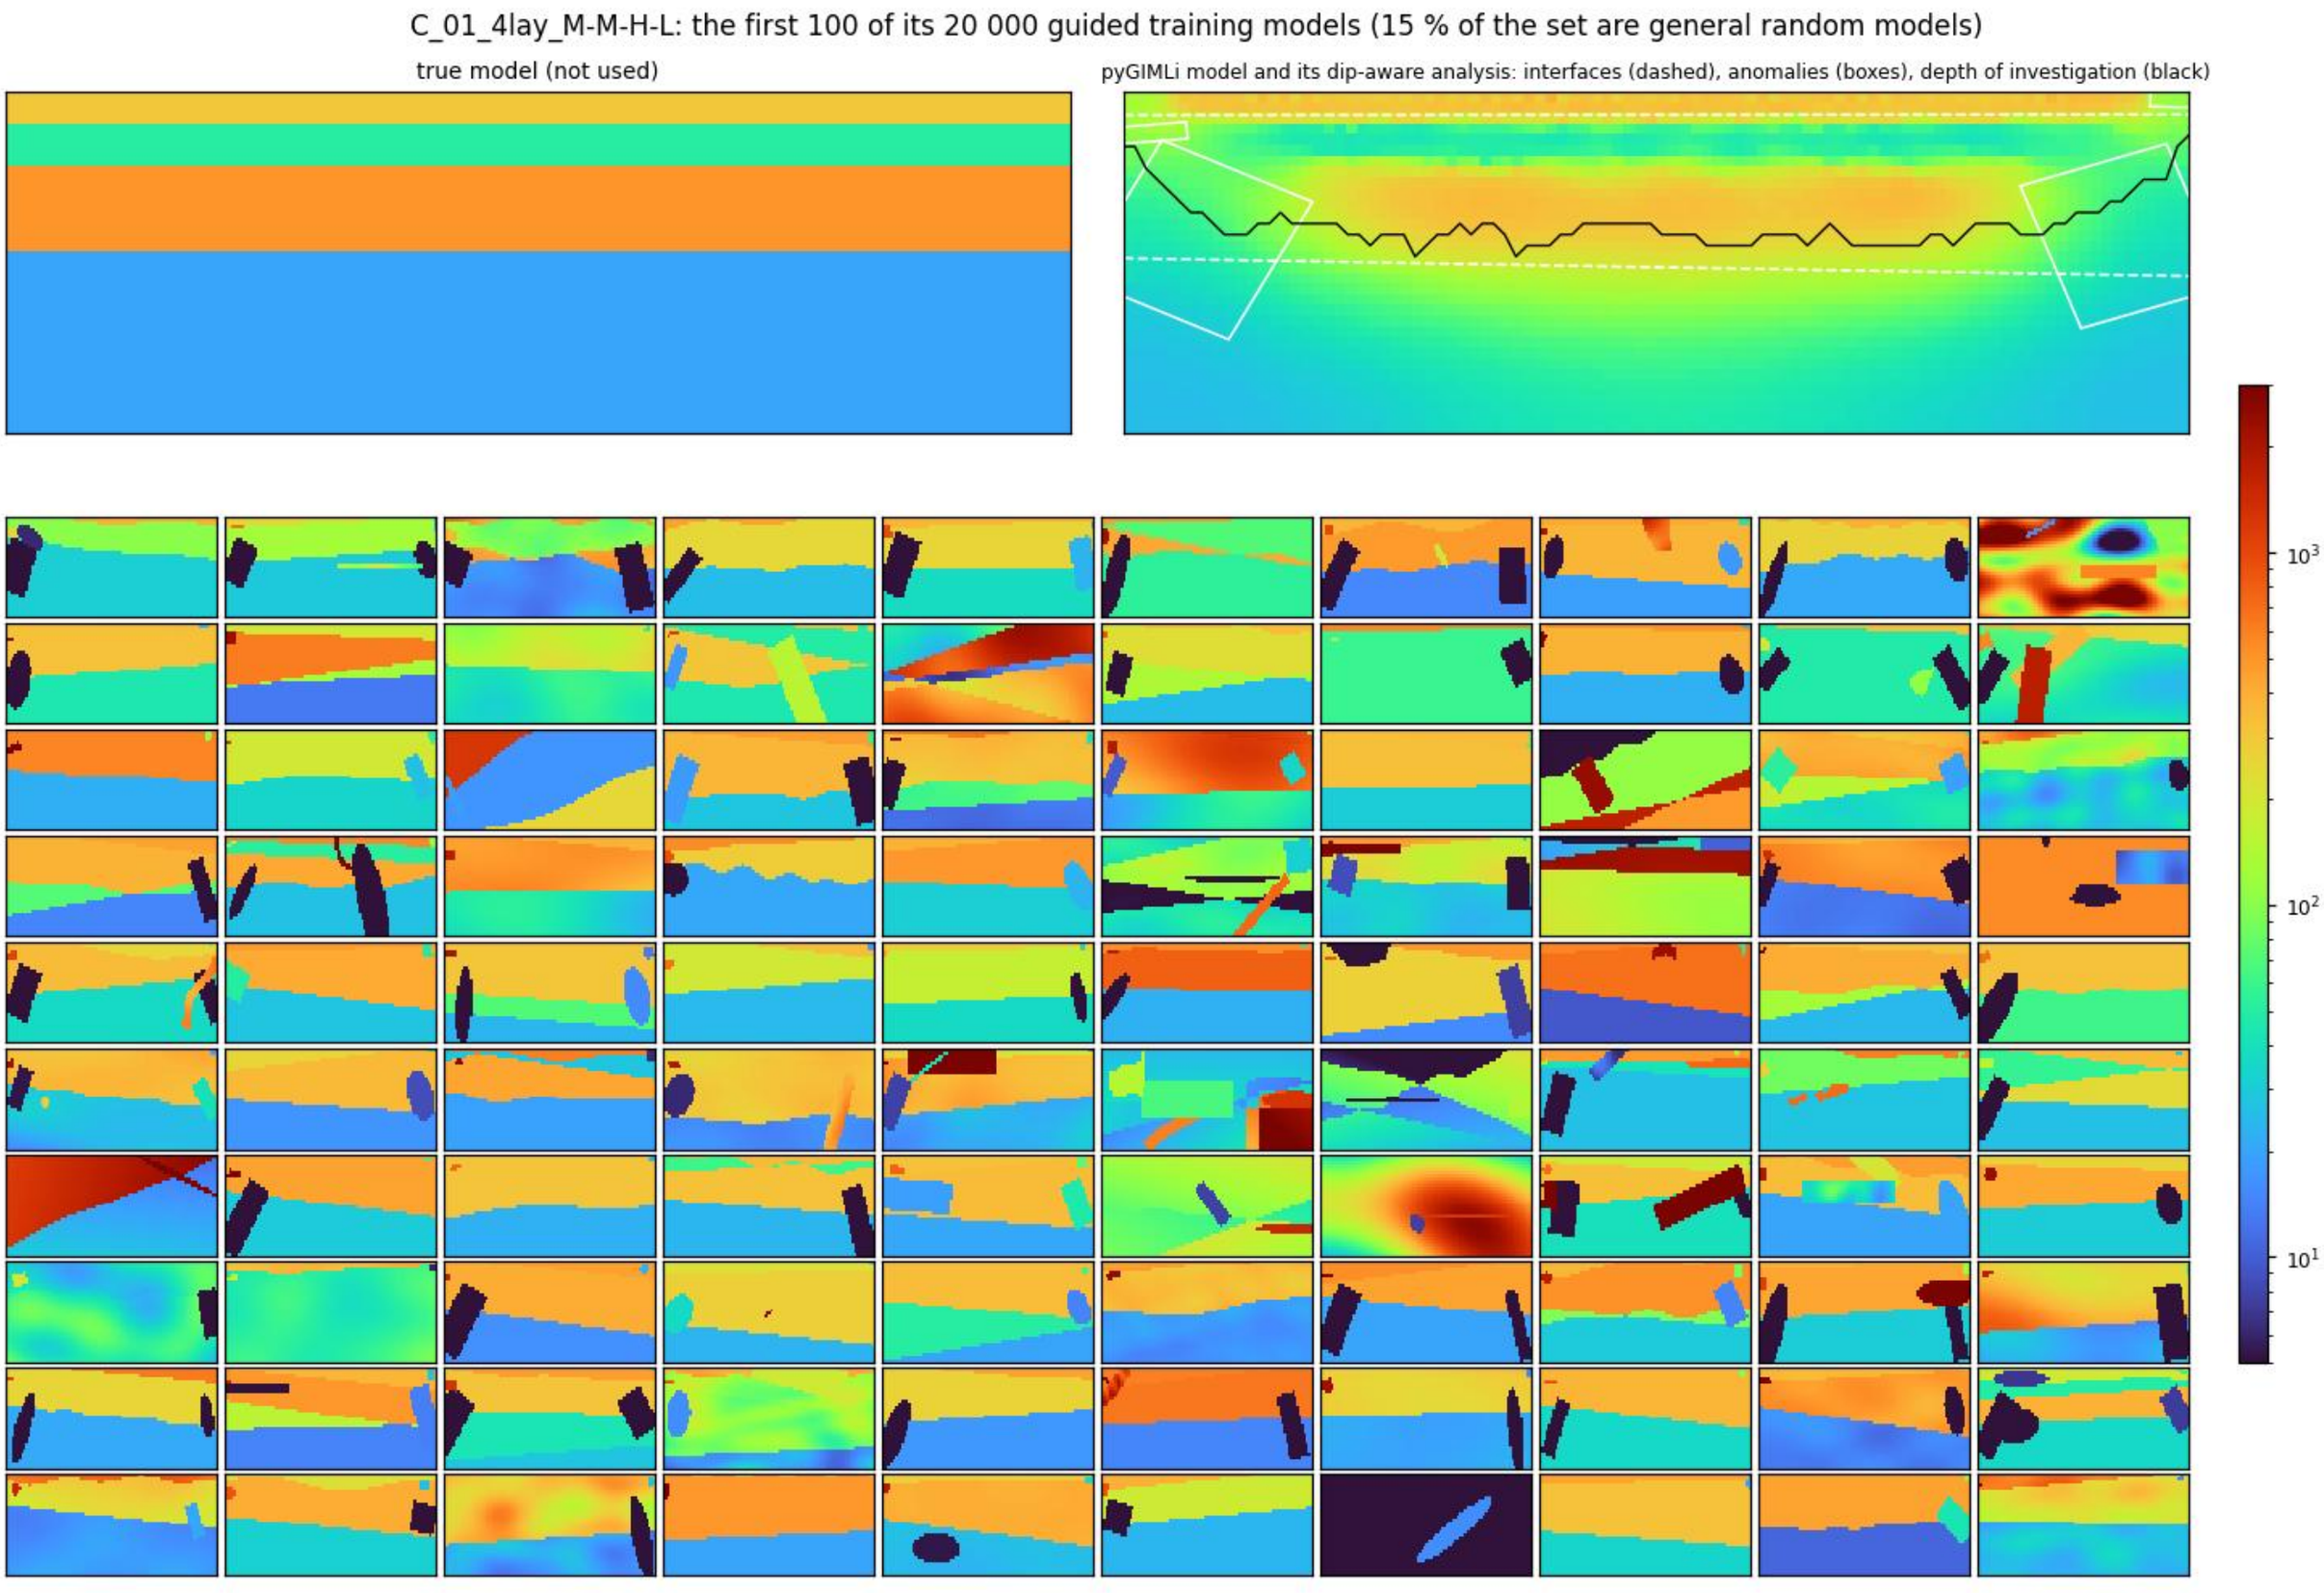
C_01_4lay_M-M-H-L: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S23

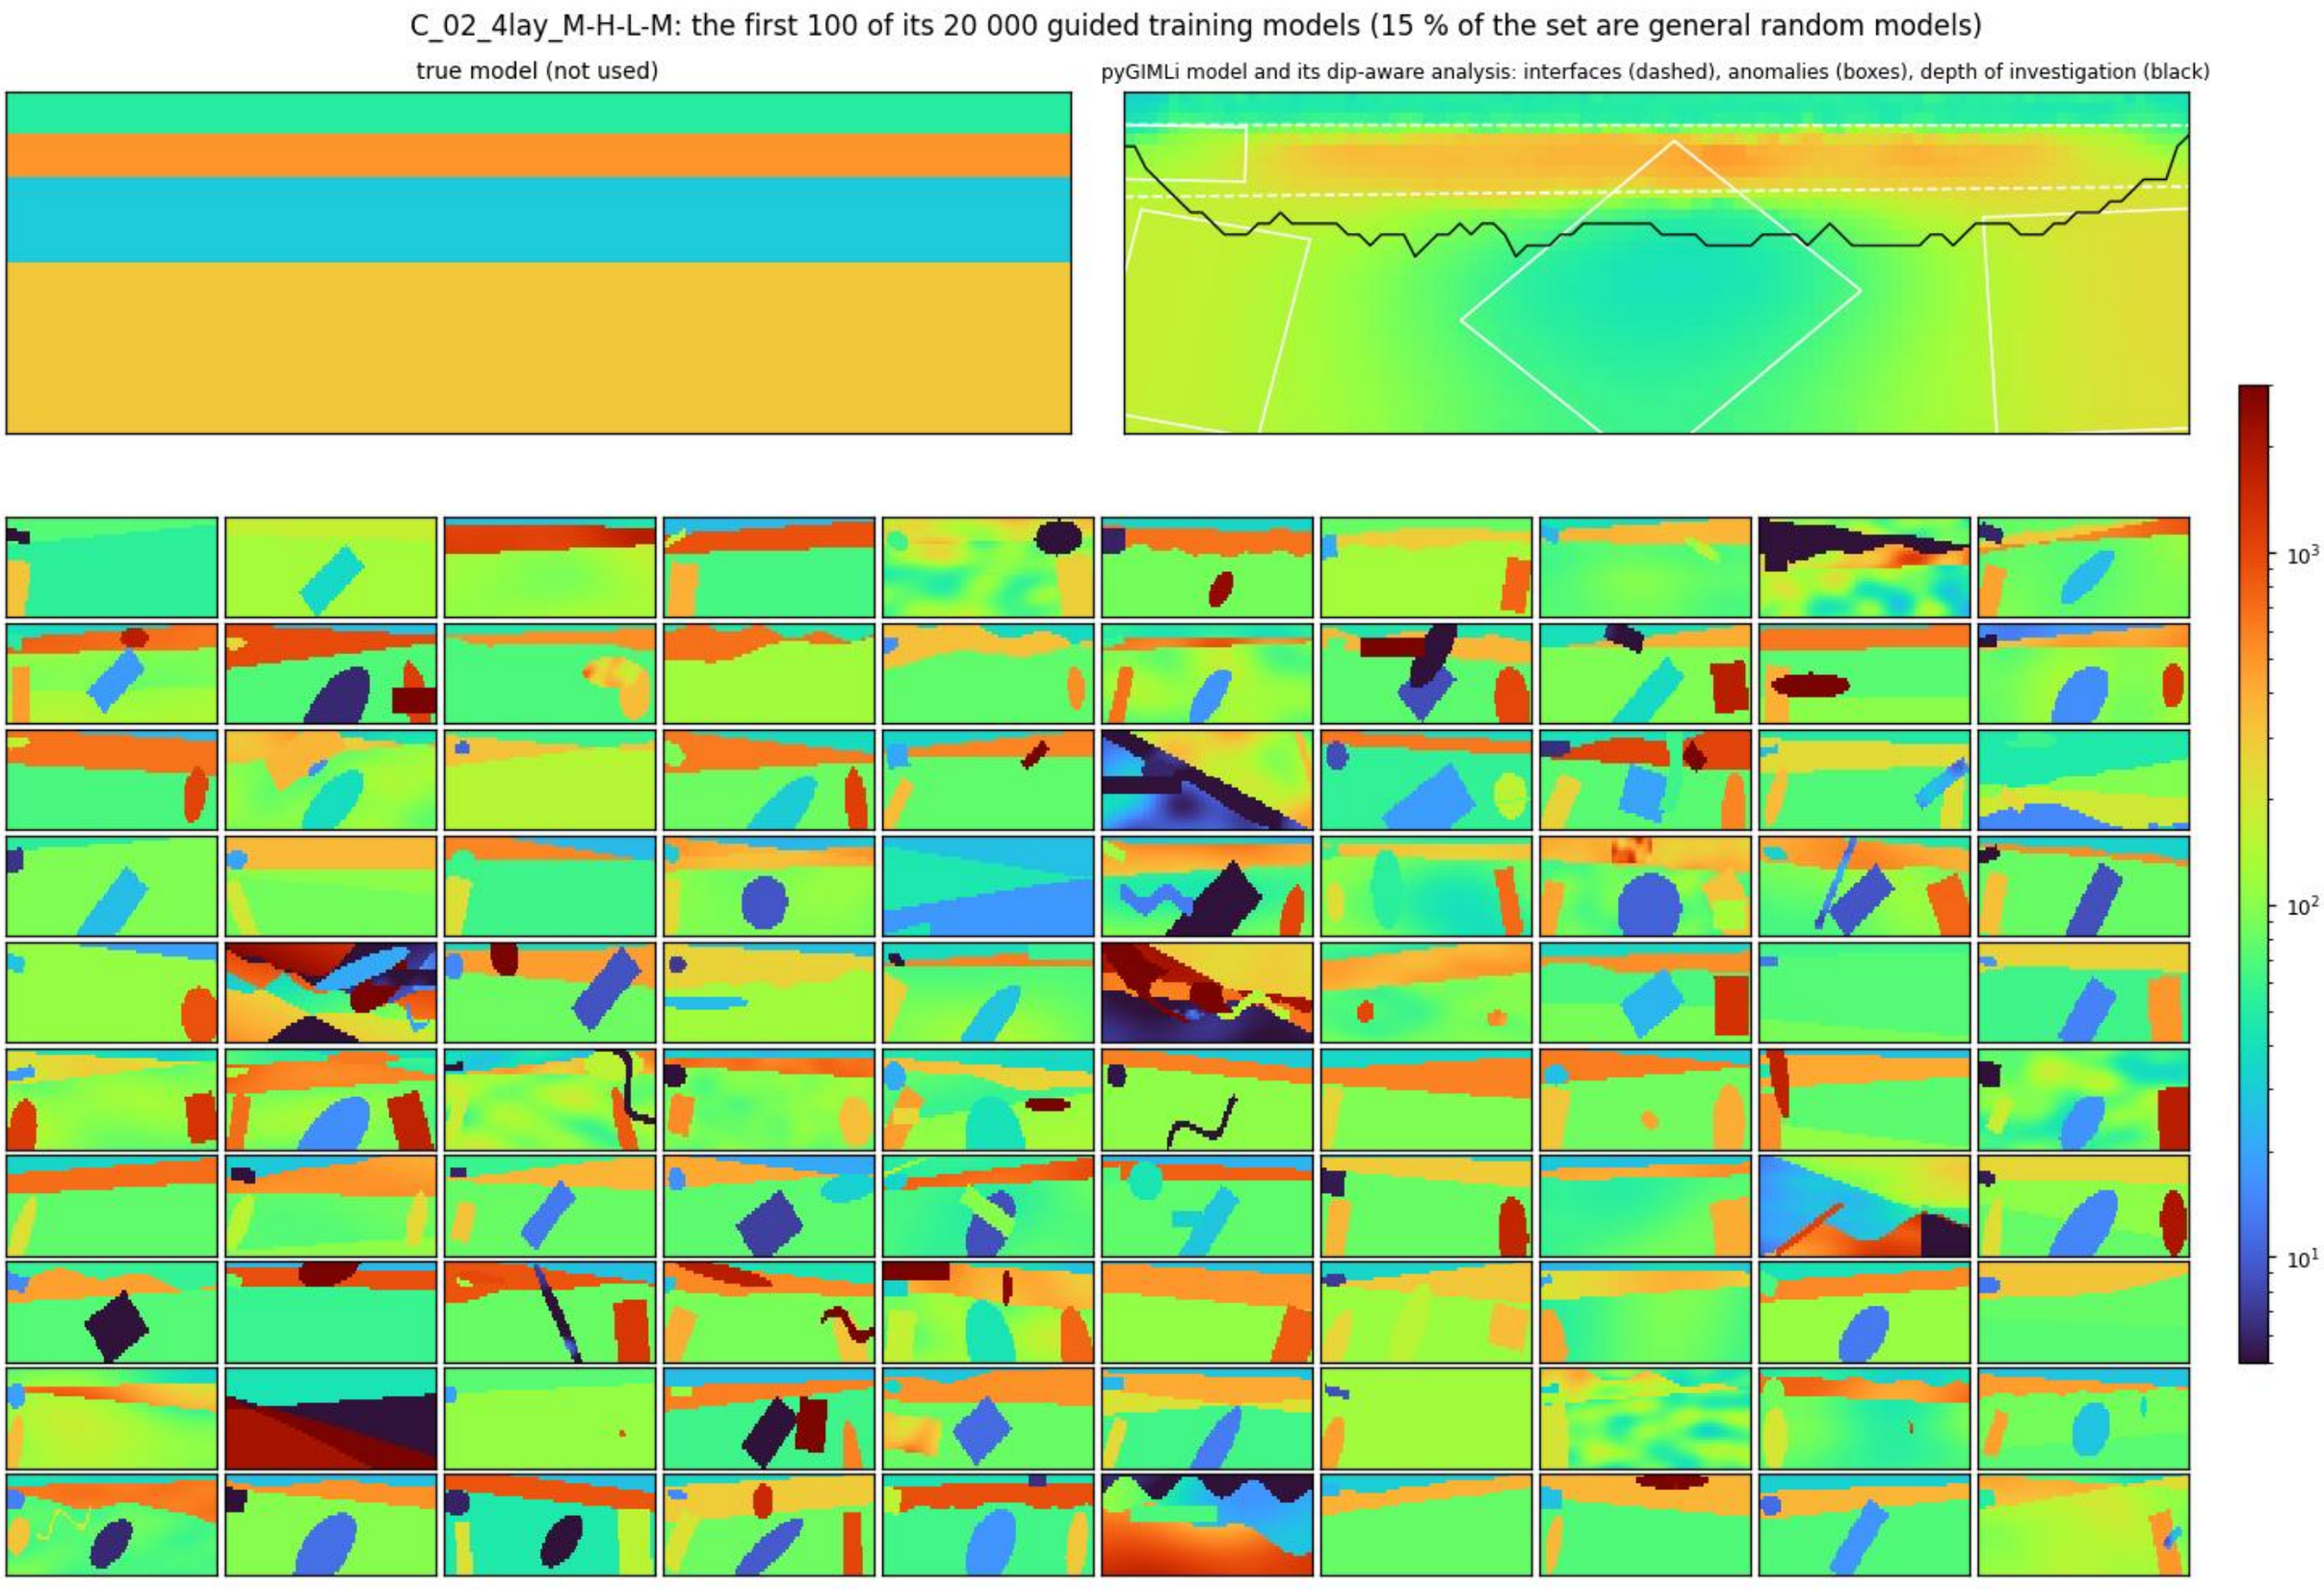
C_02_4lay_M-H-L-M: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S24

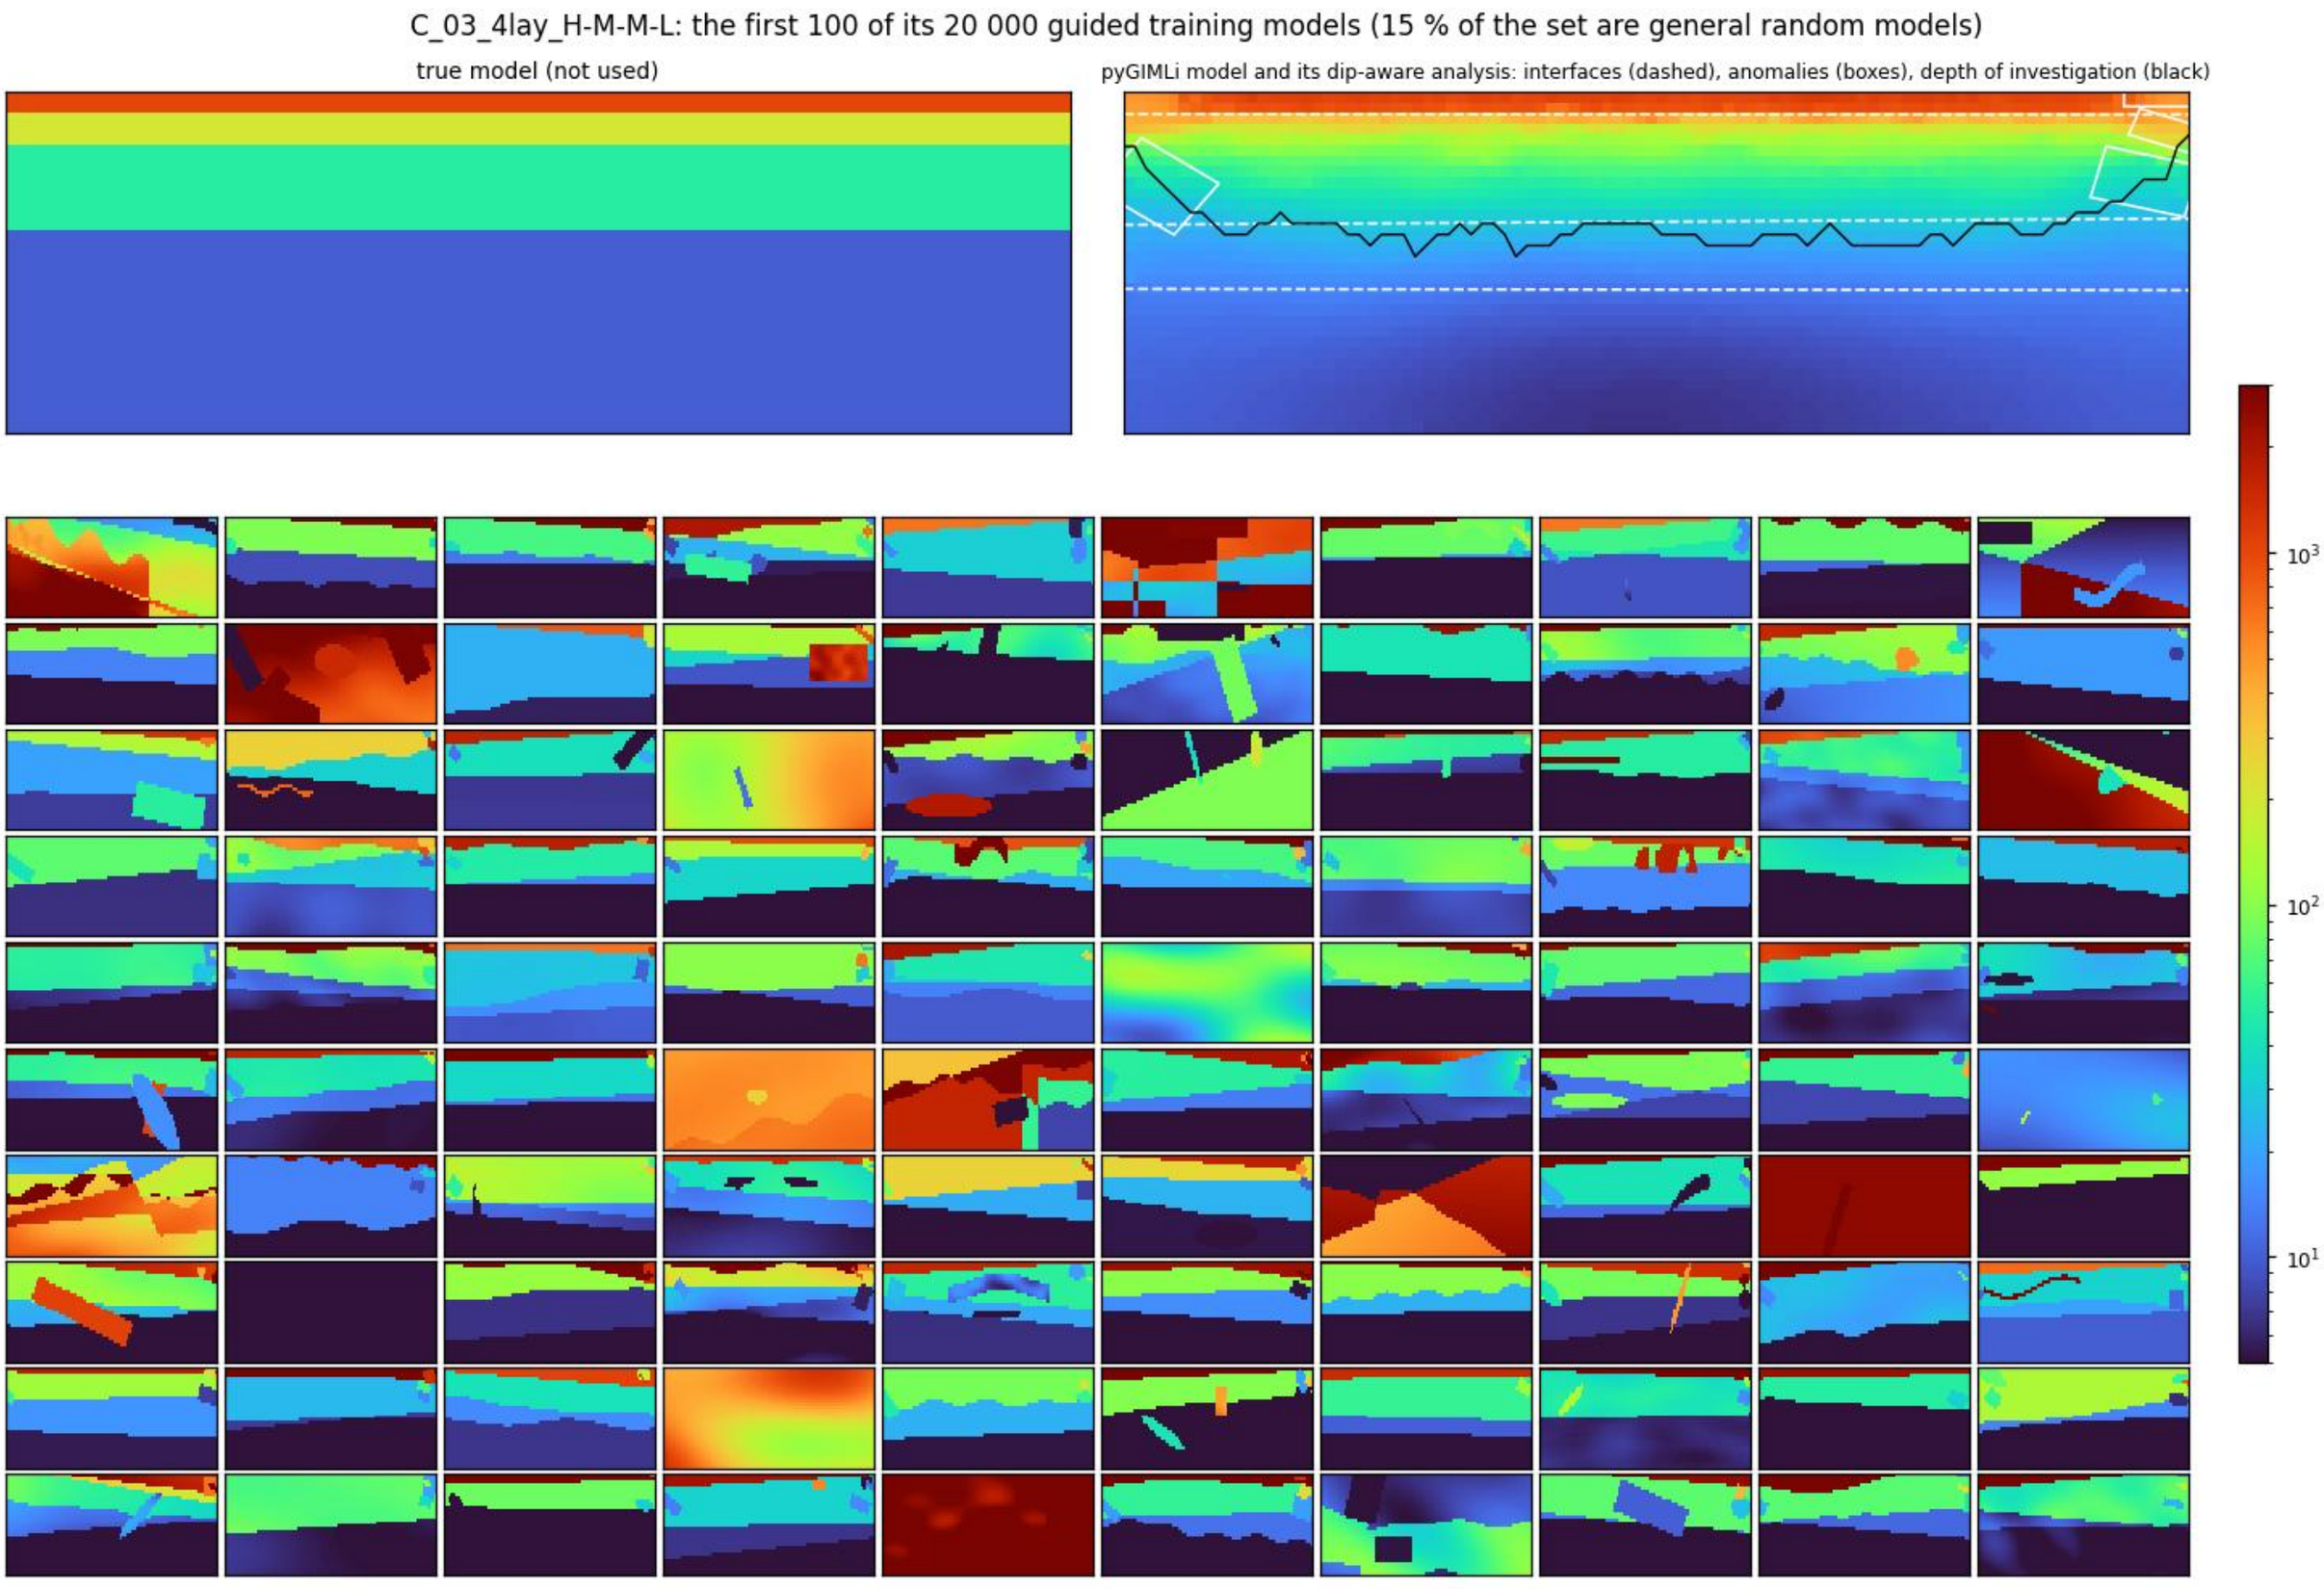
C_03_4lay_H-M-M-L: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S25

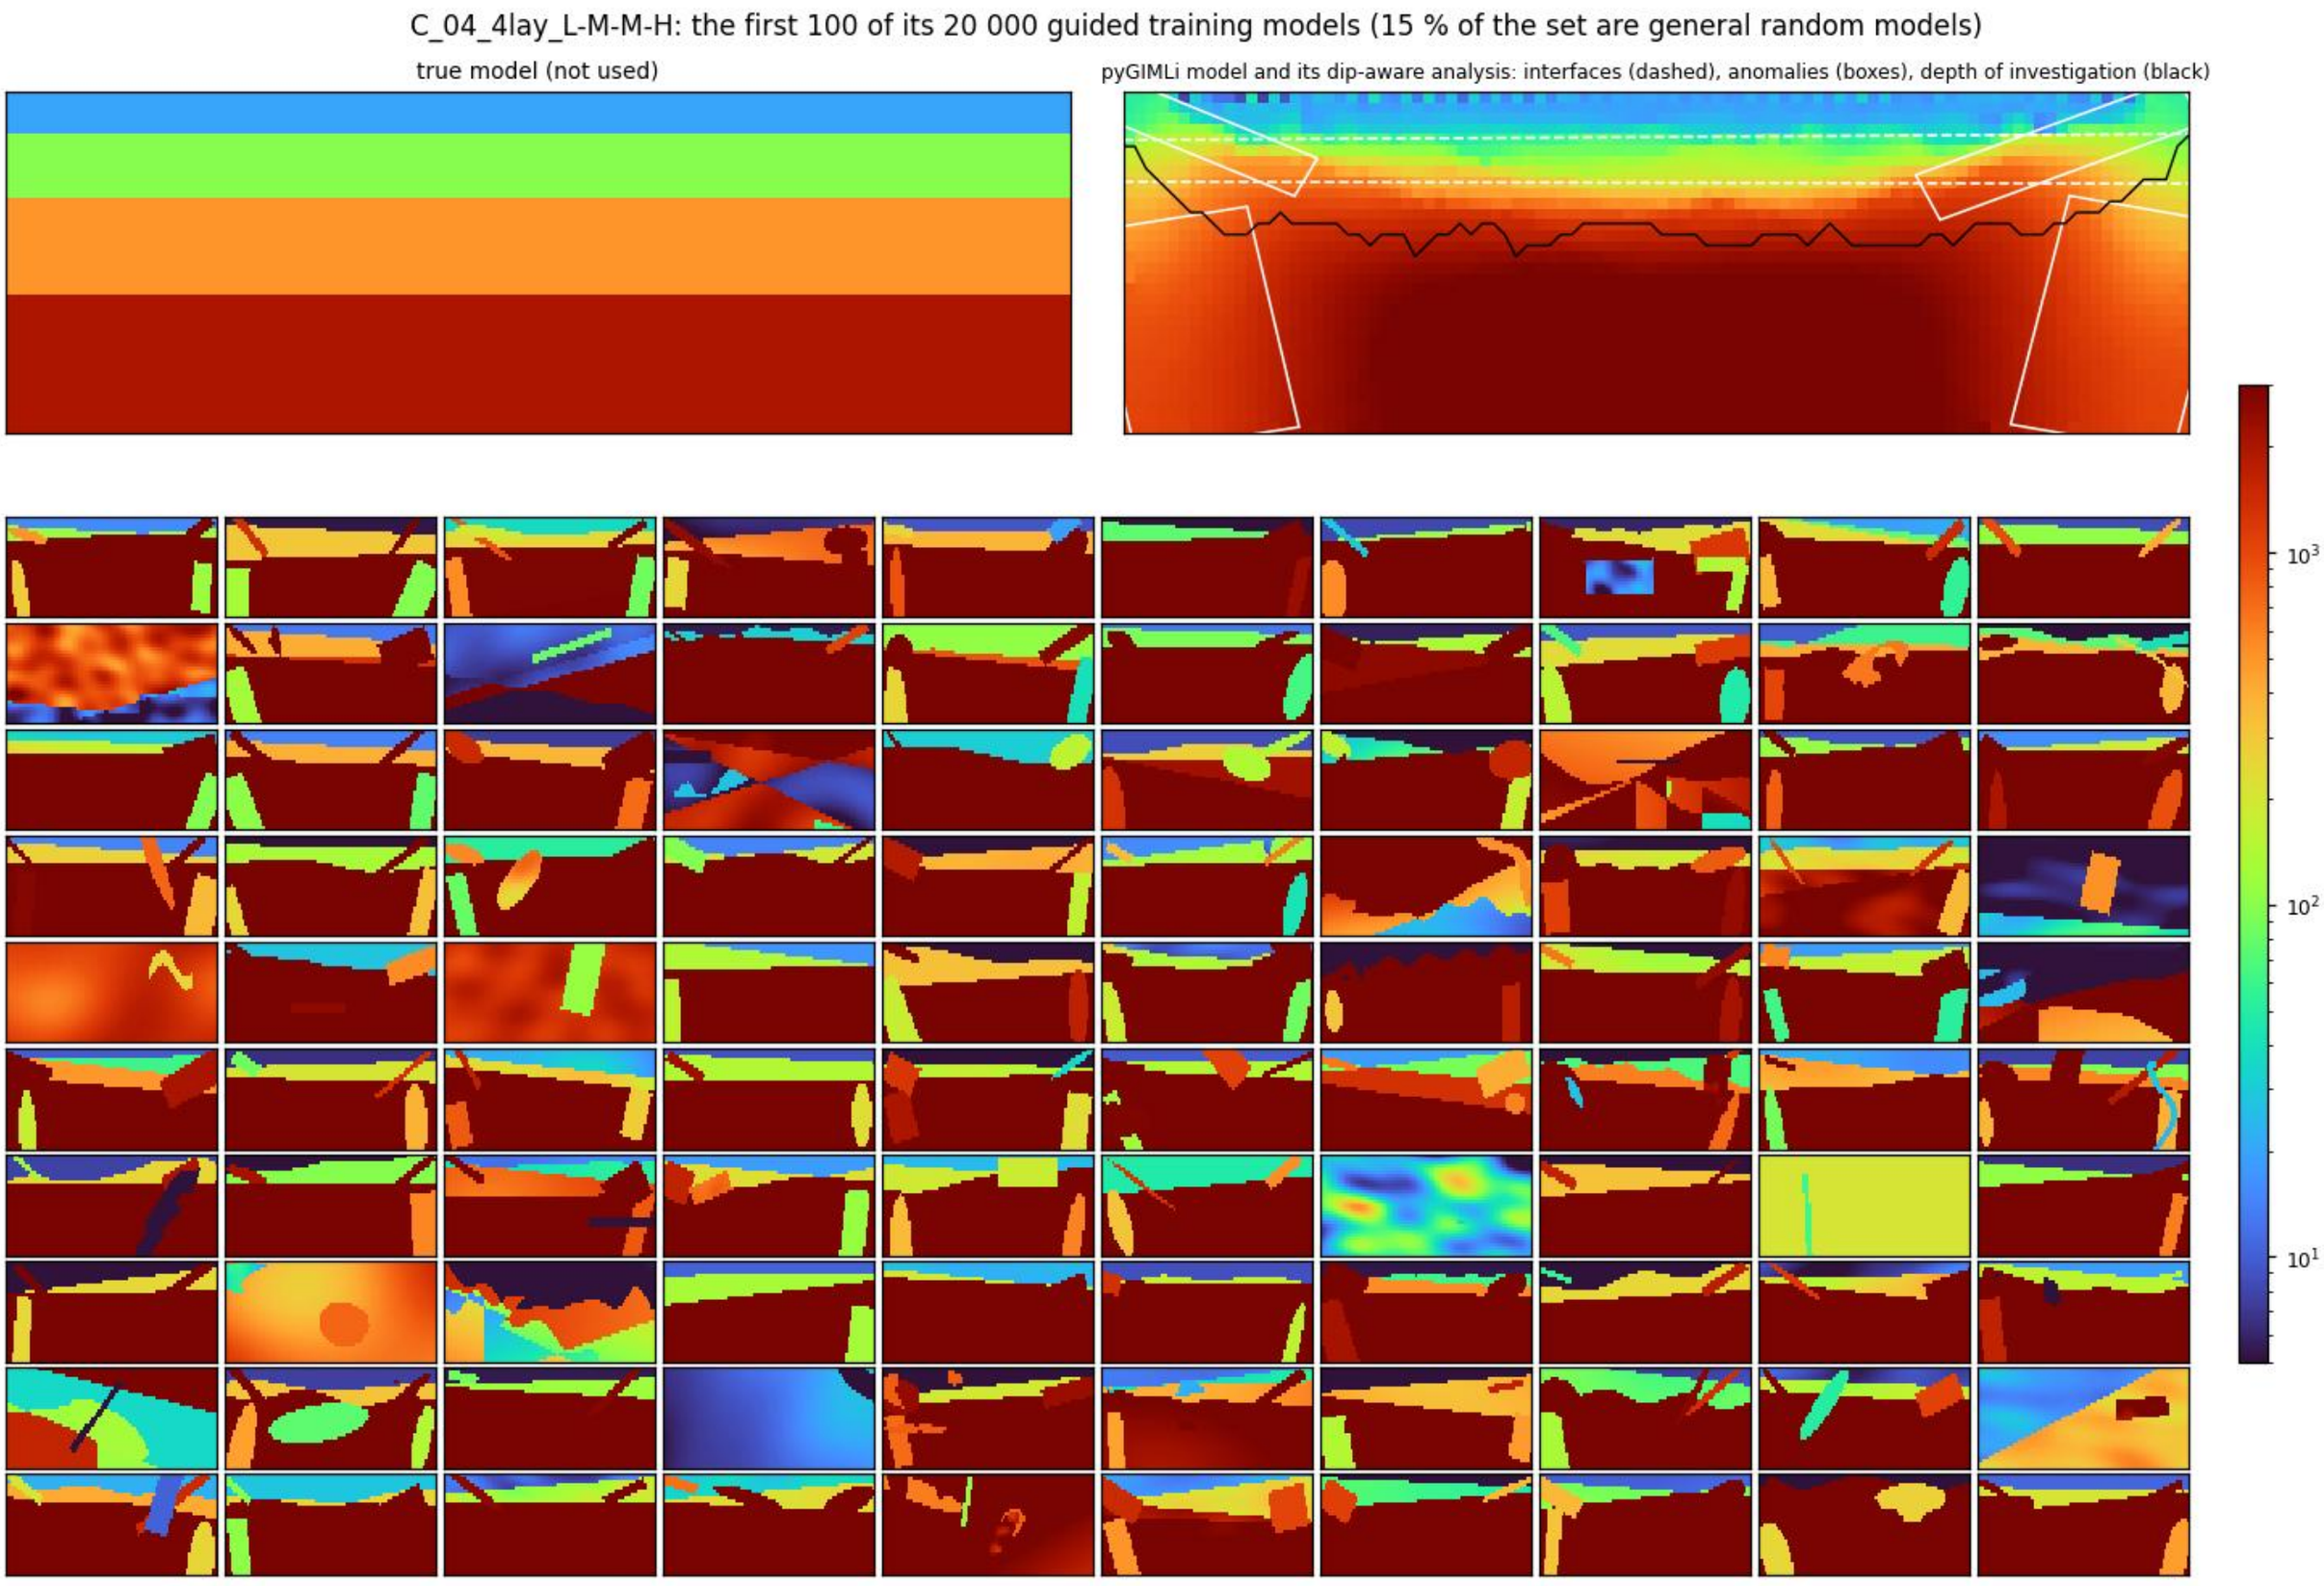
C_04_4lay_L-M-M-H: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S26

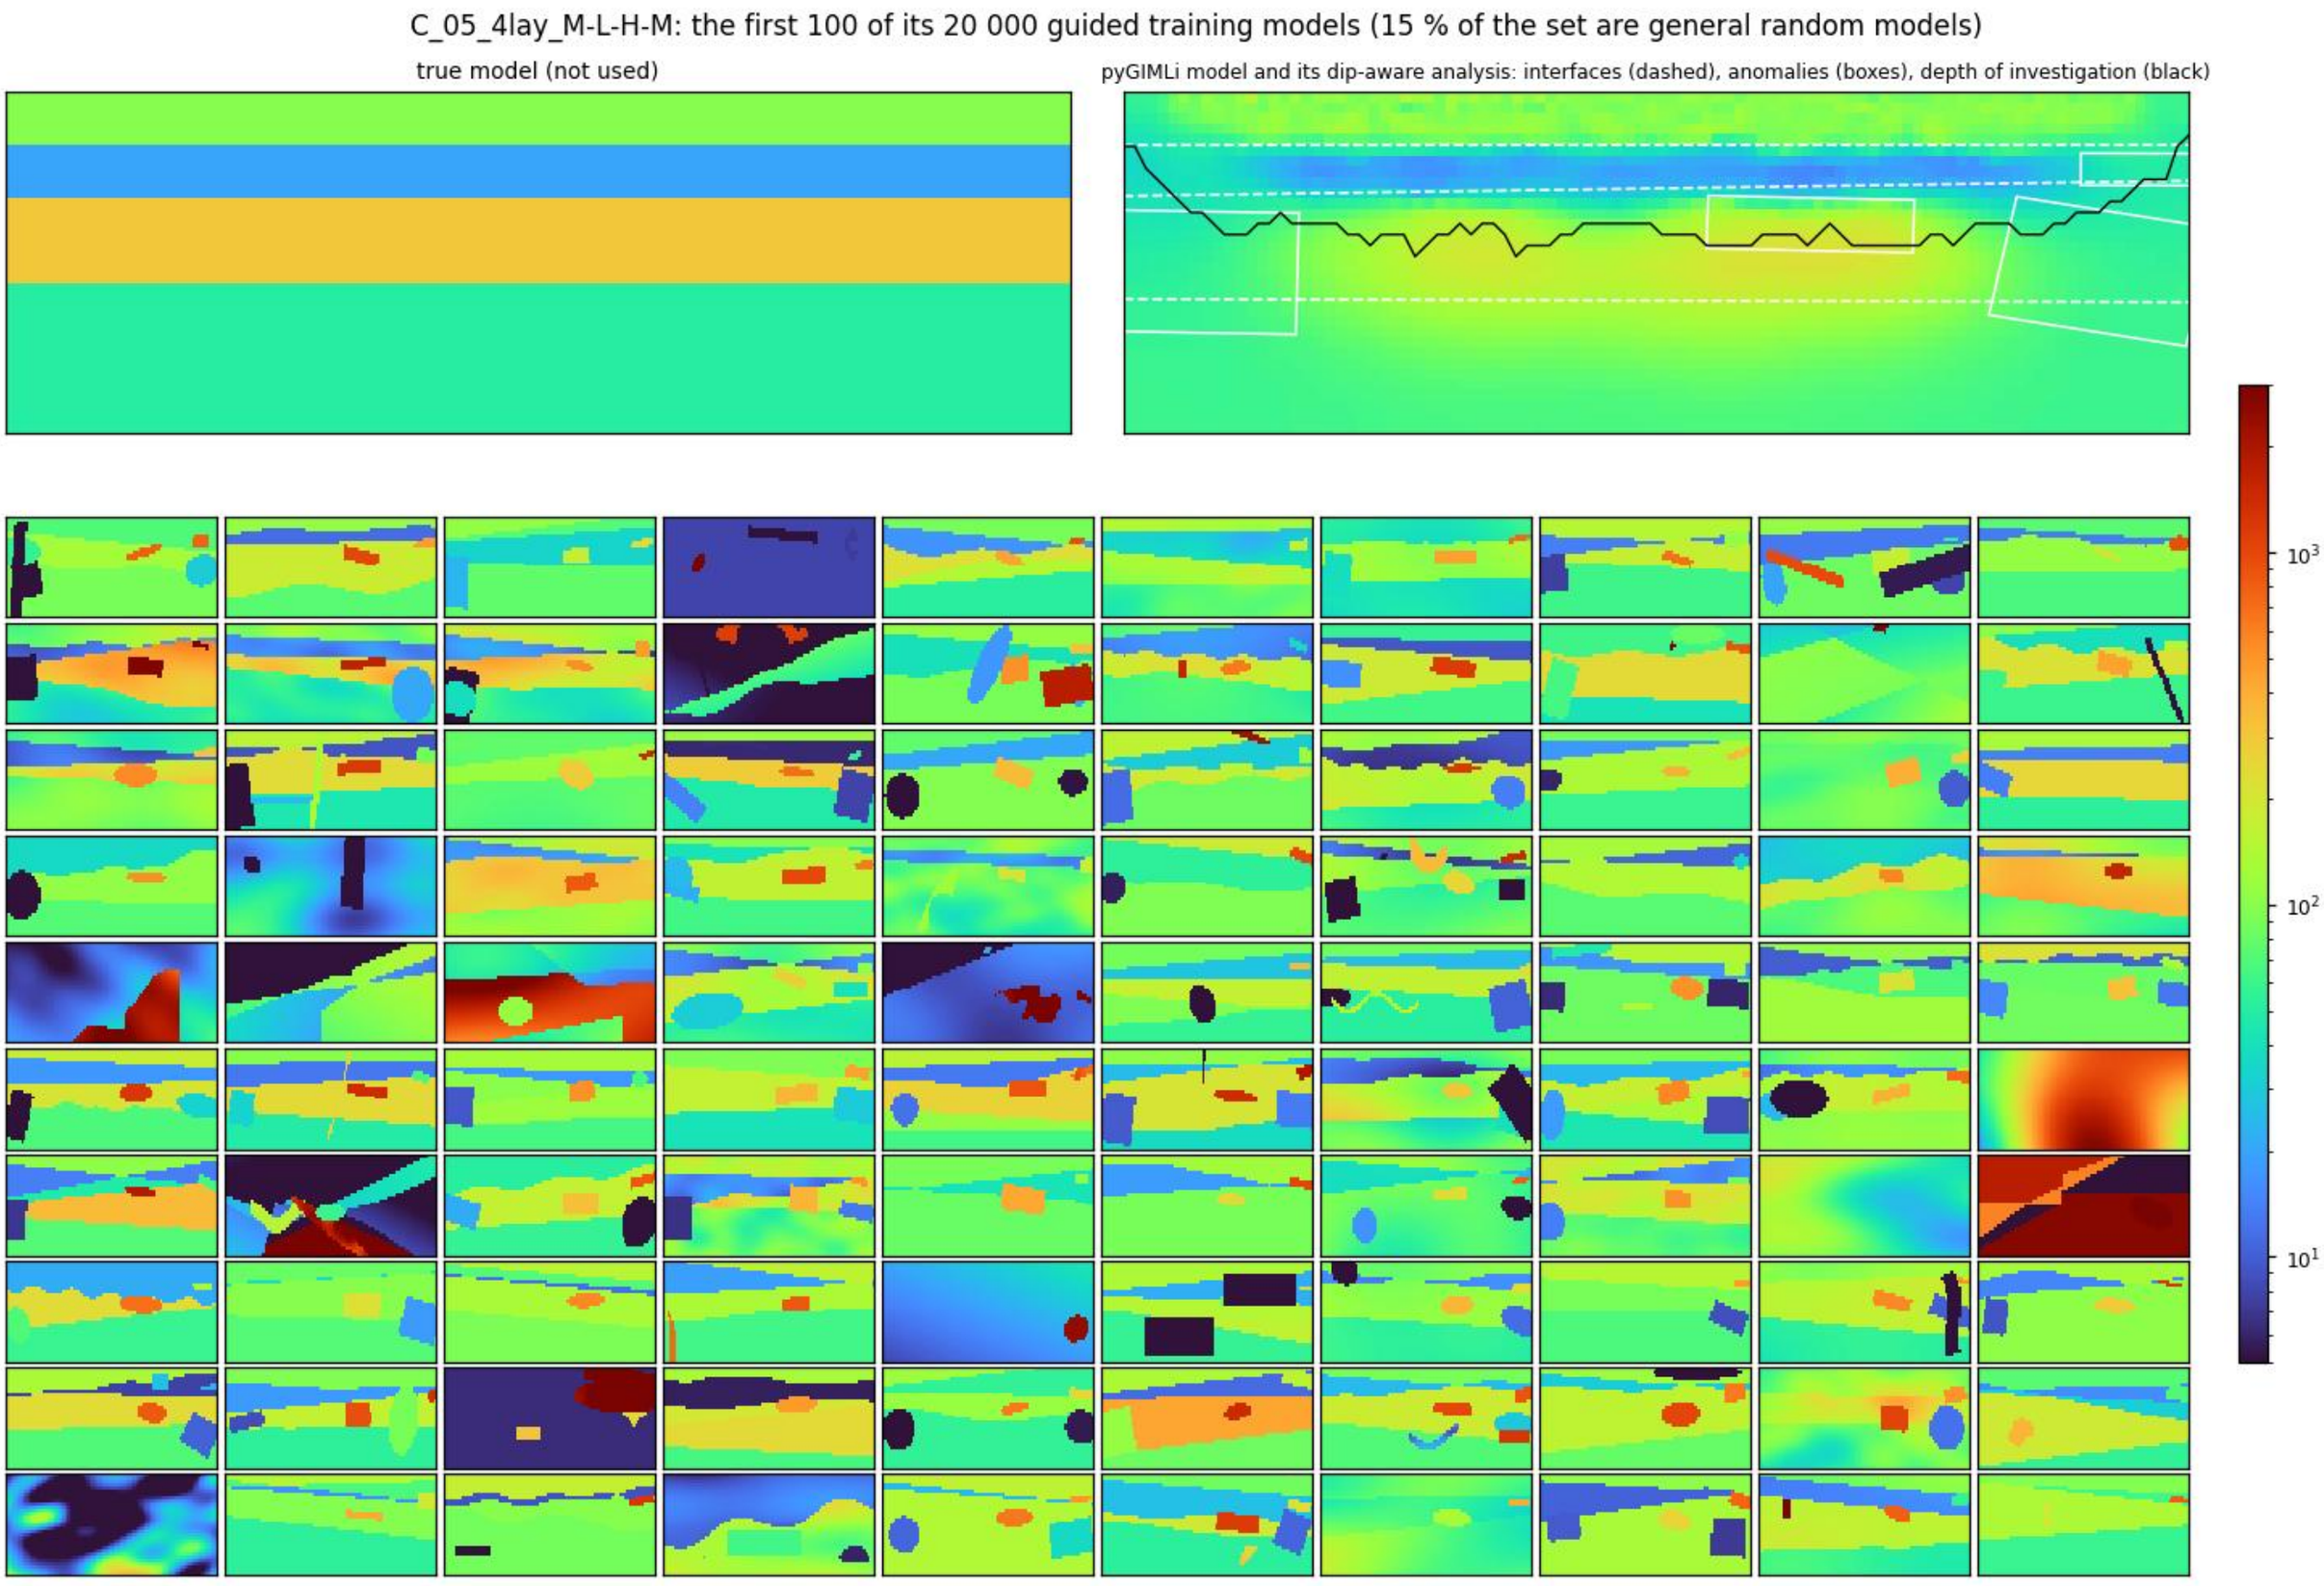
C_05_4lay_M-L-H-M: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S27

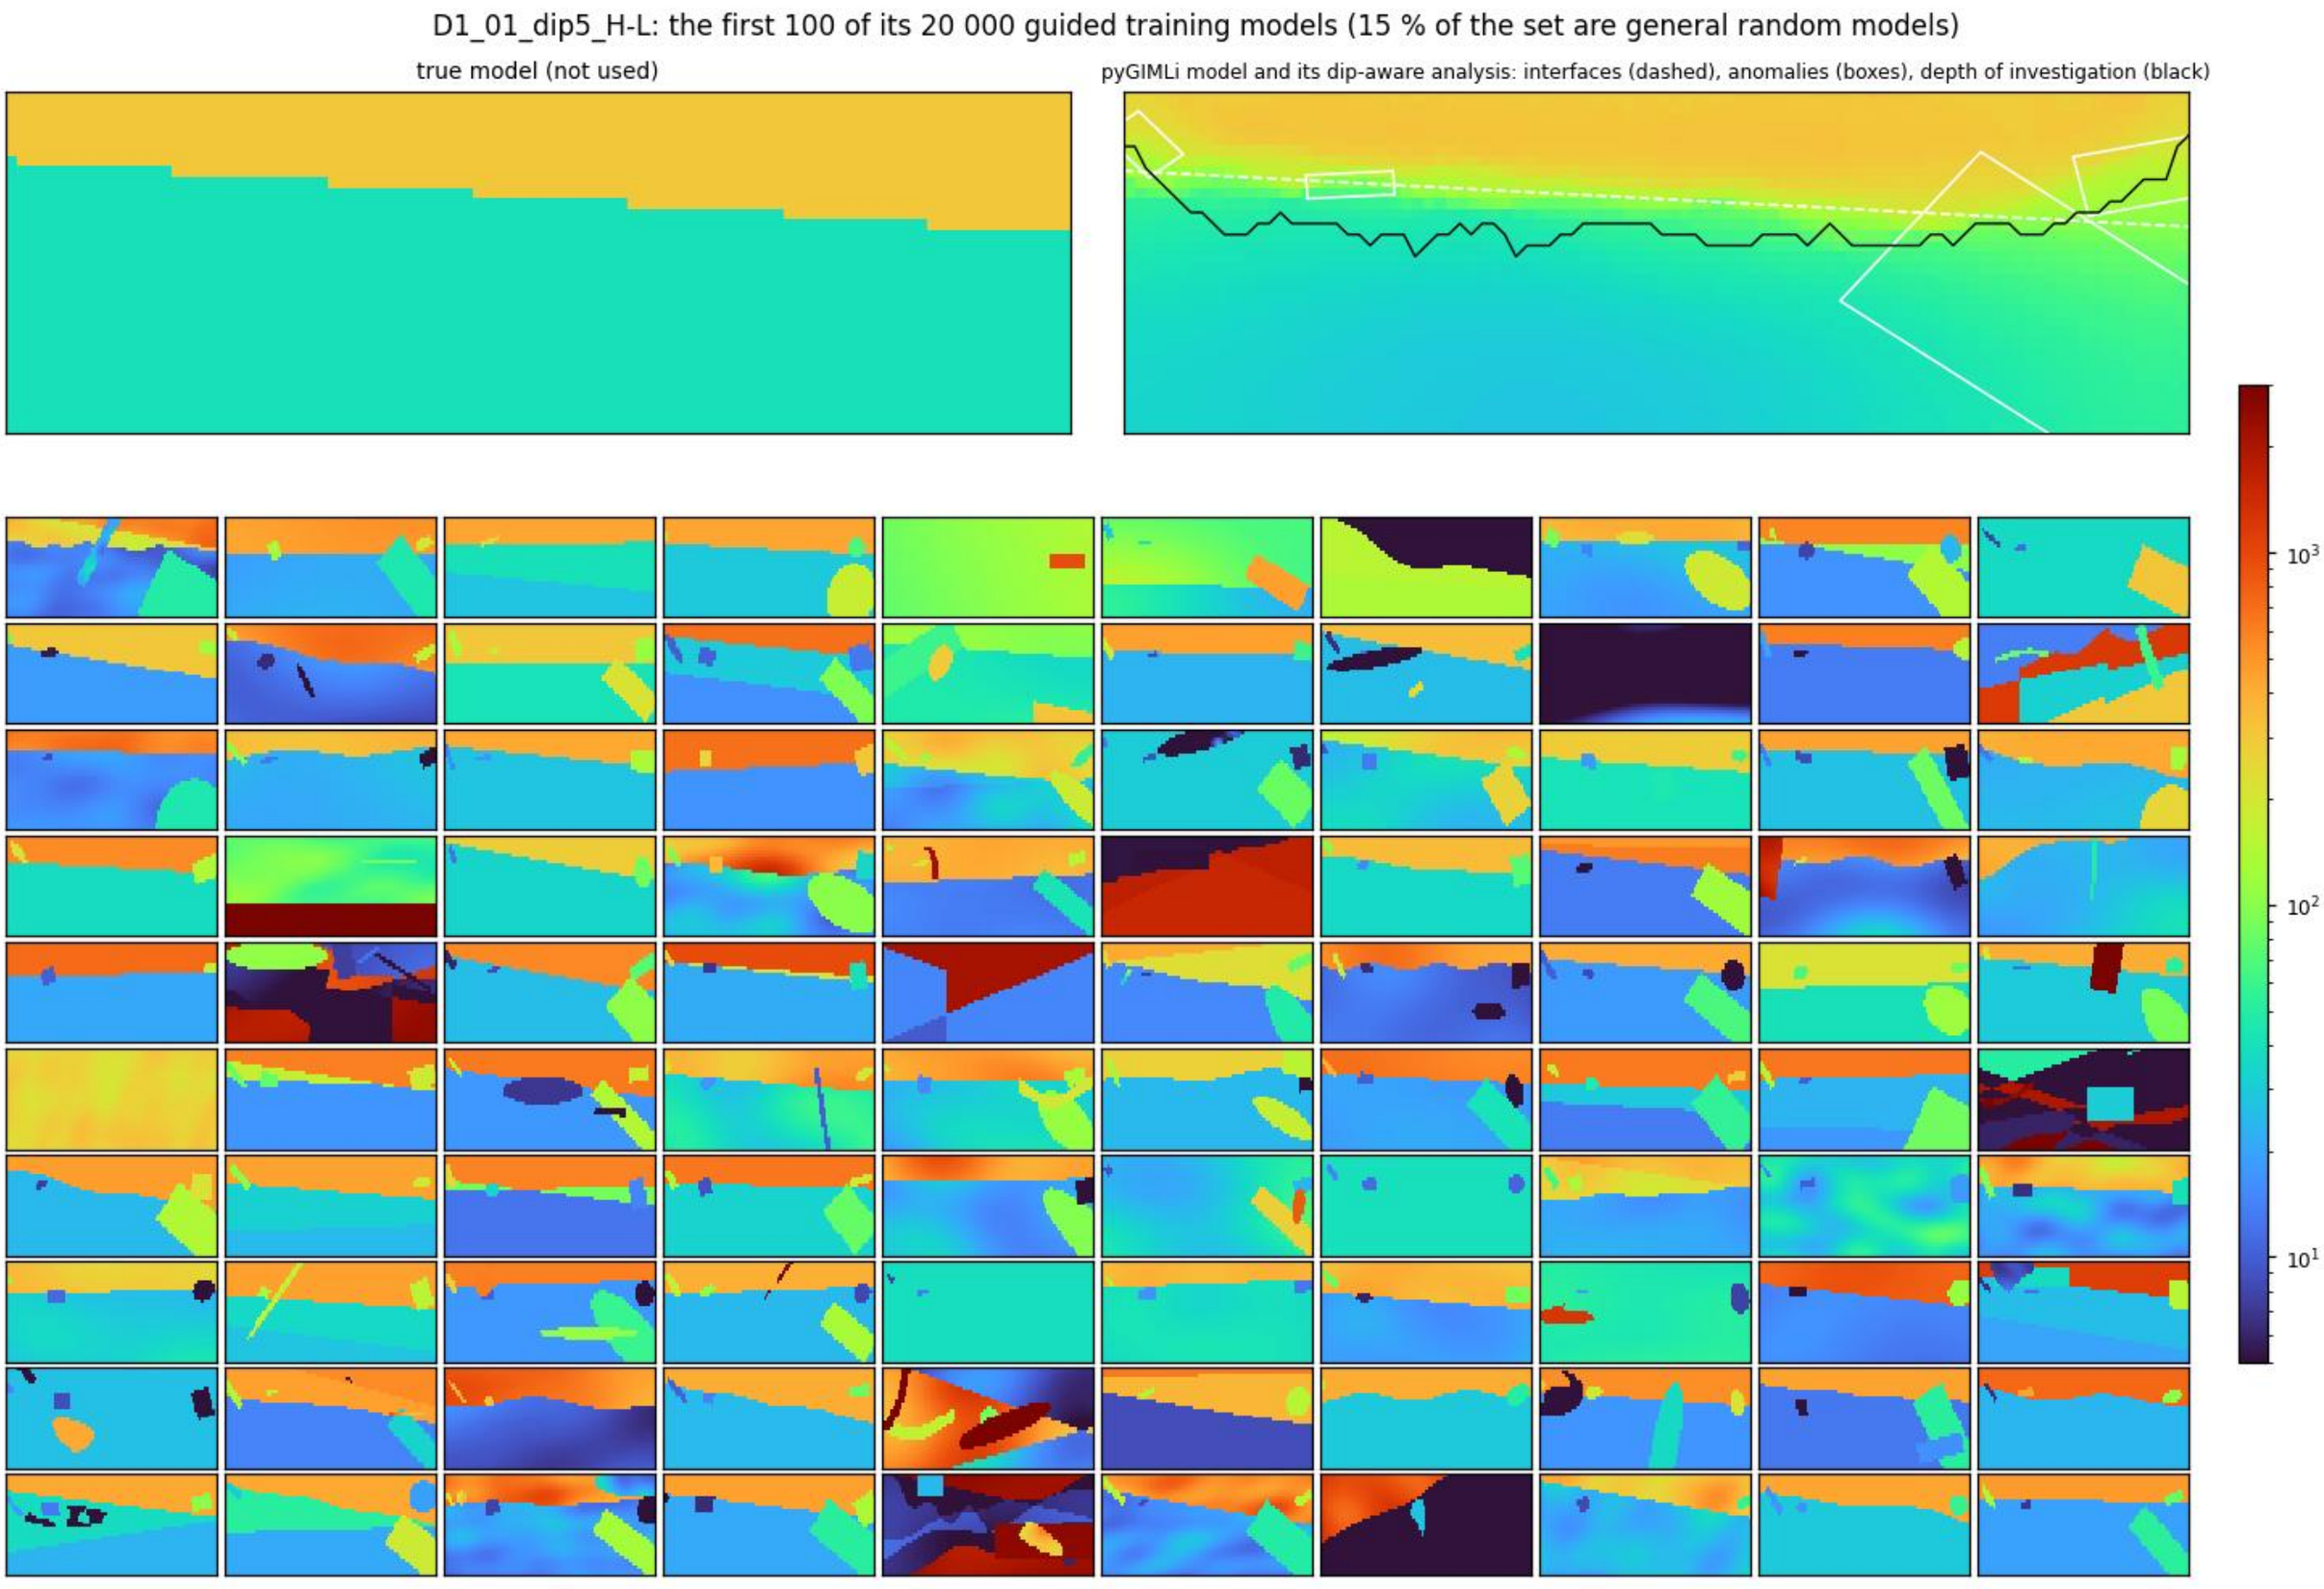
D1_01_dip5_H-L: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S28

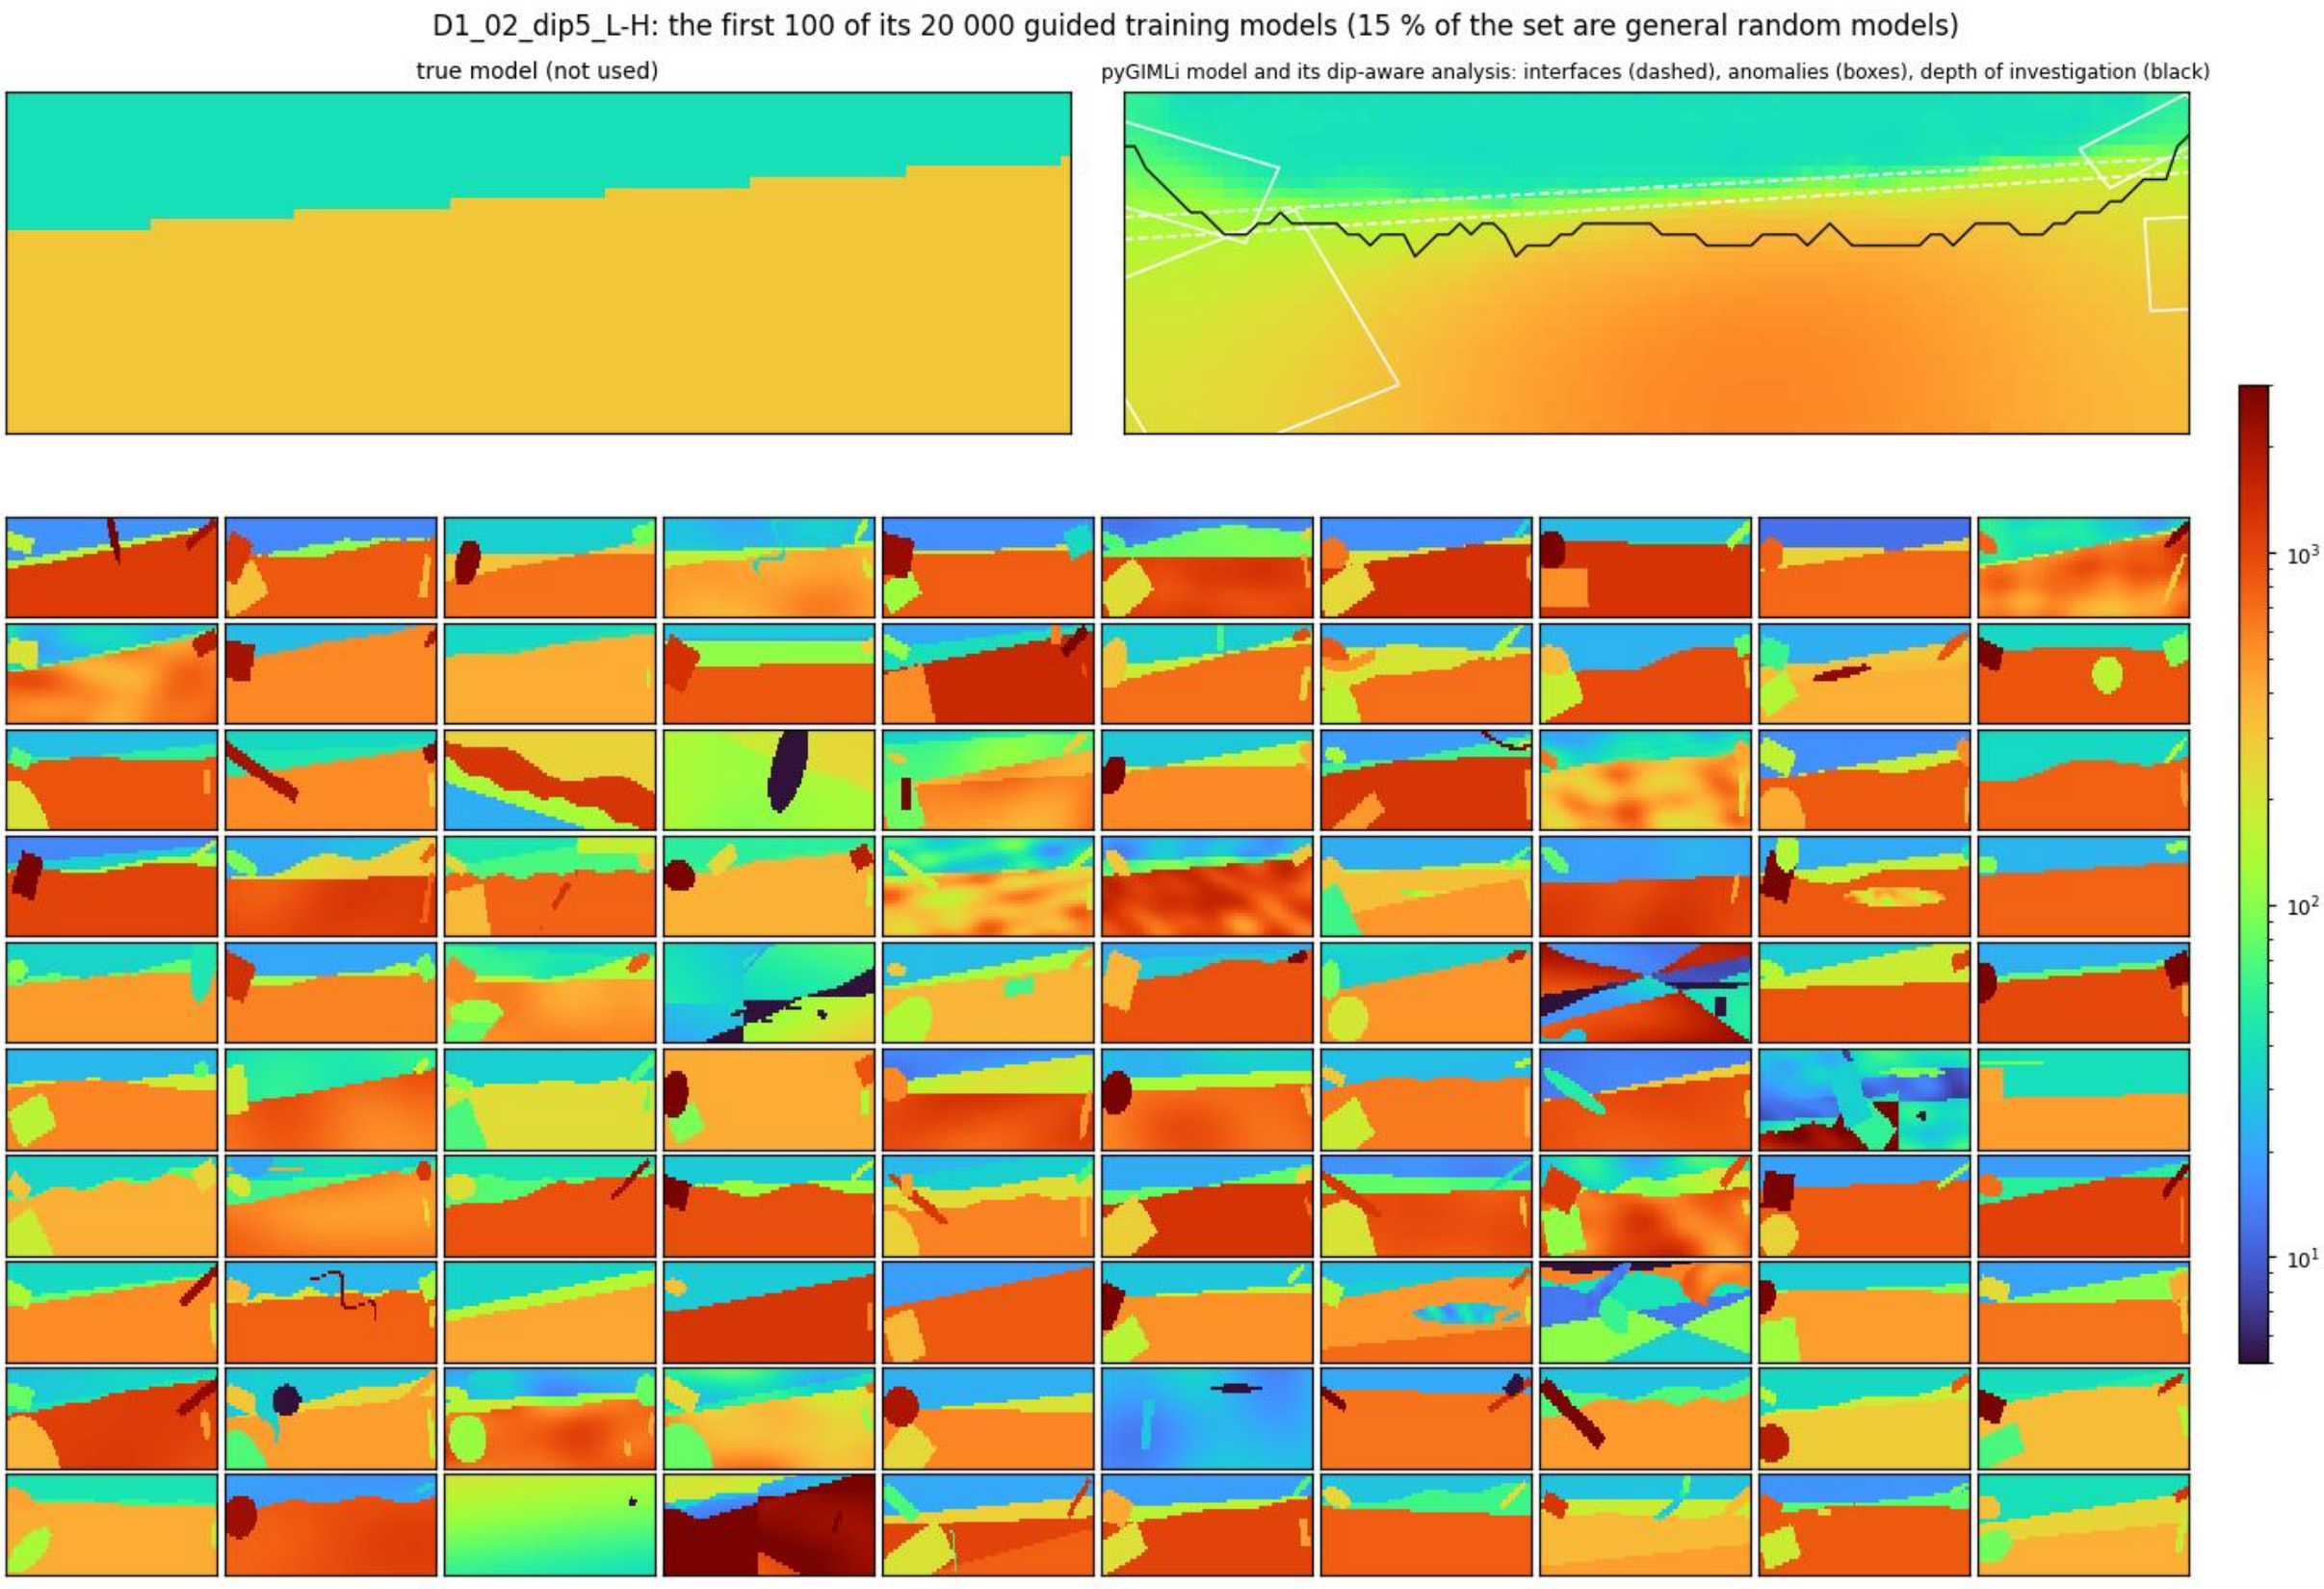
D1_02_dip5_L-H: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S29

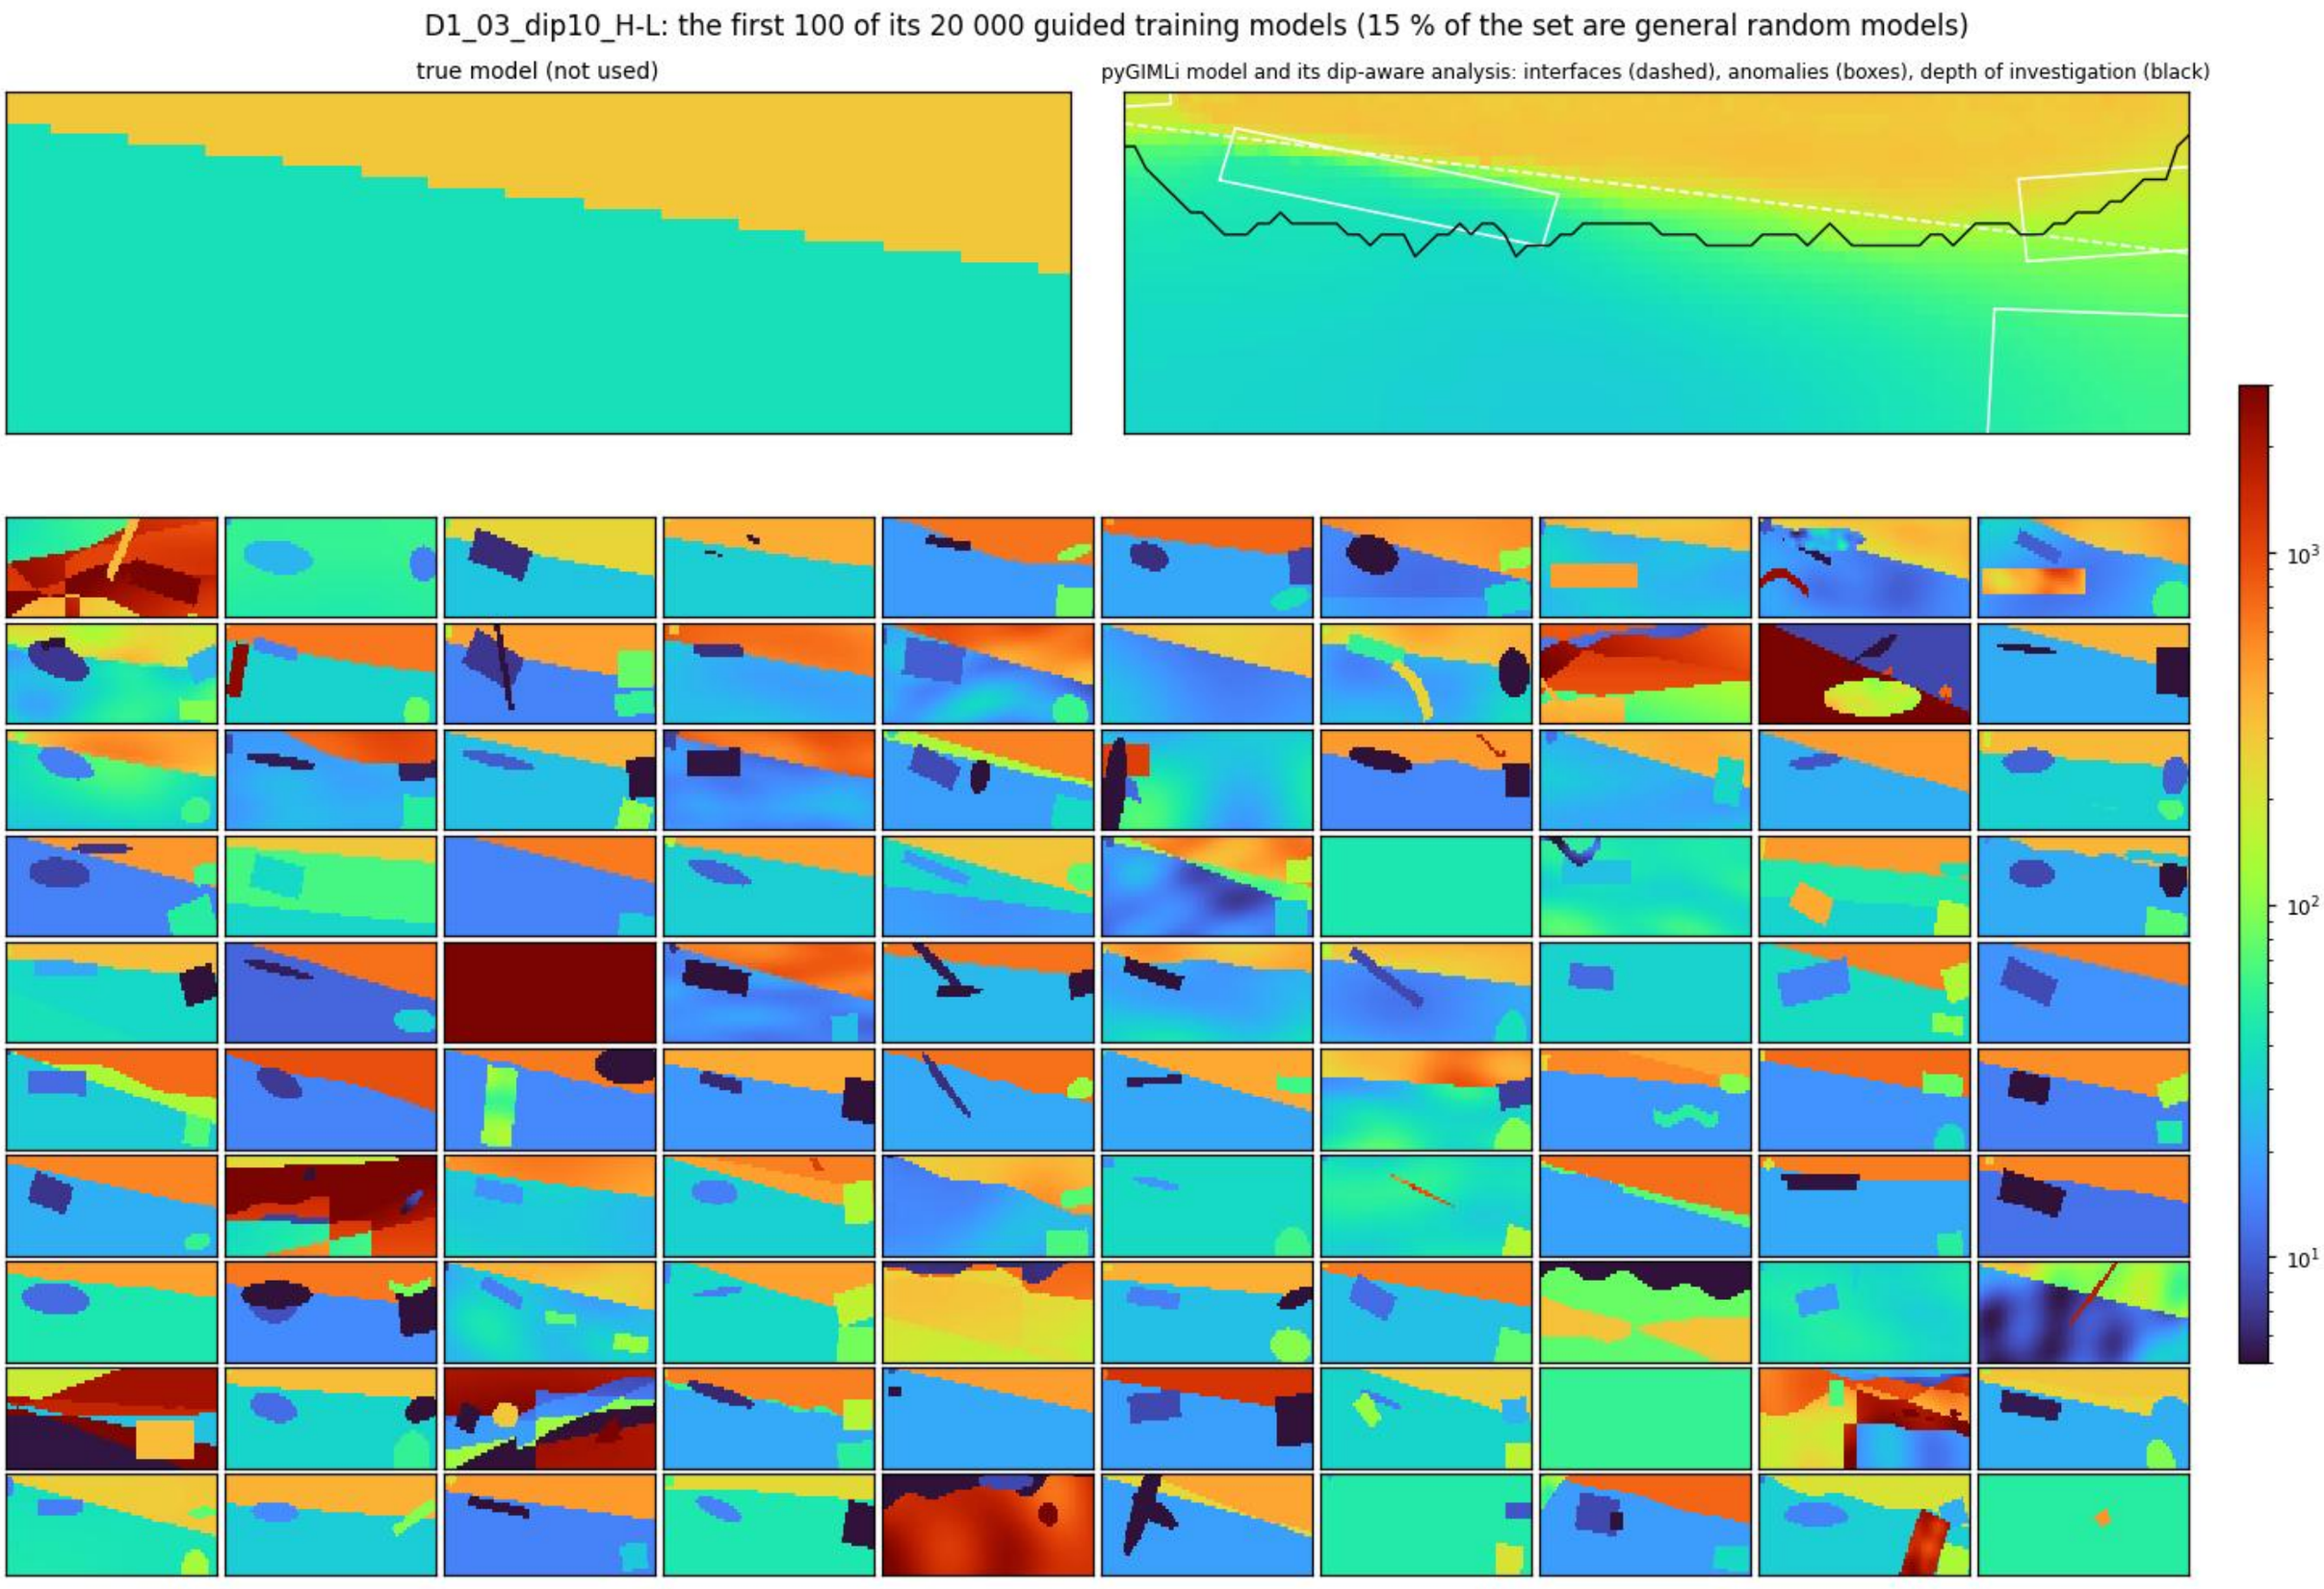
D1_03_dip10_H-L: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S30

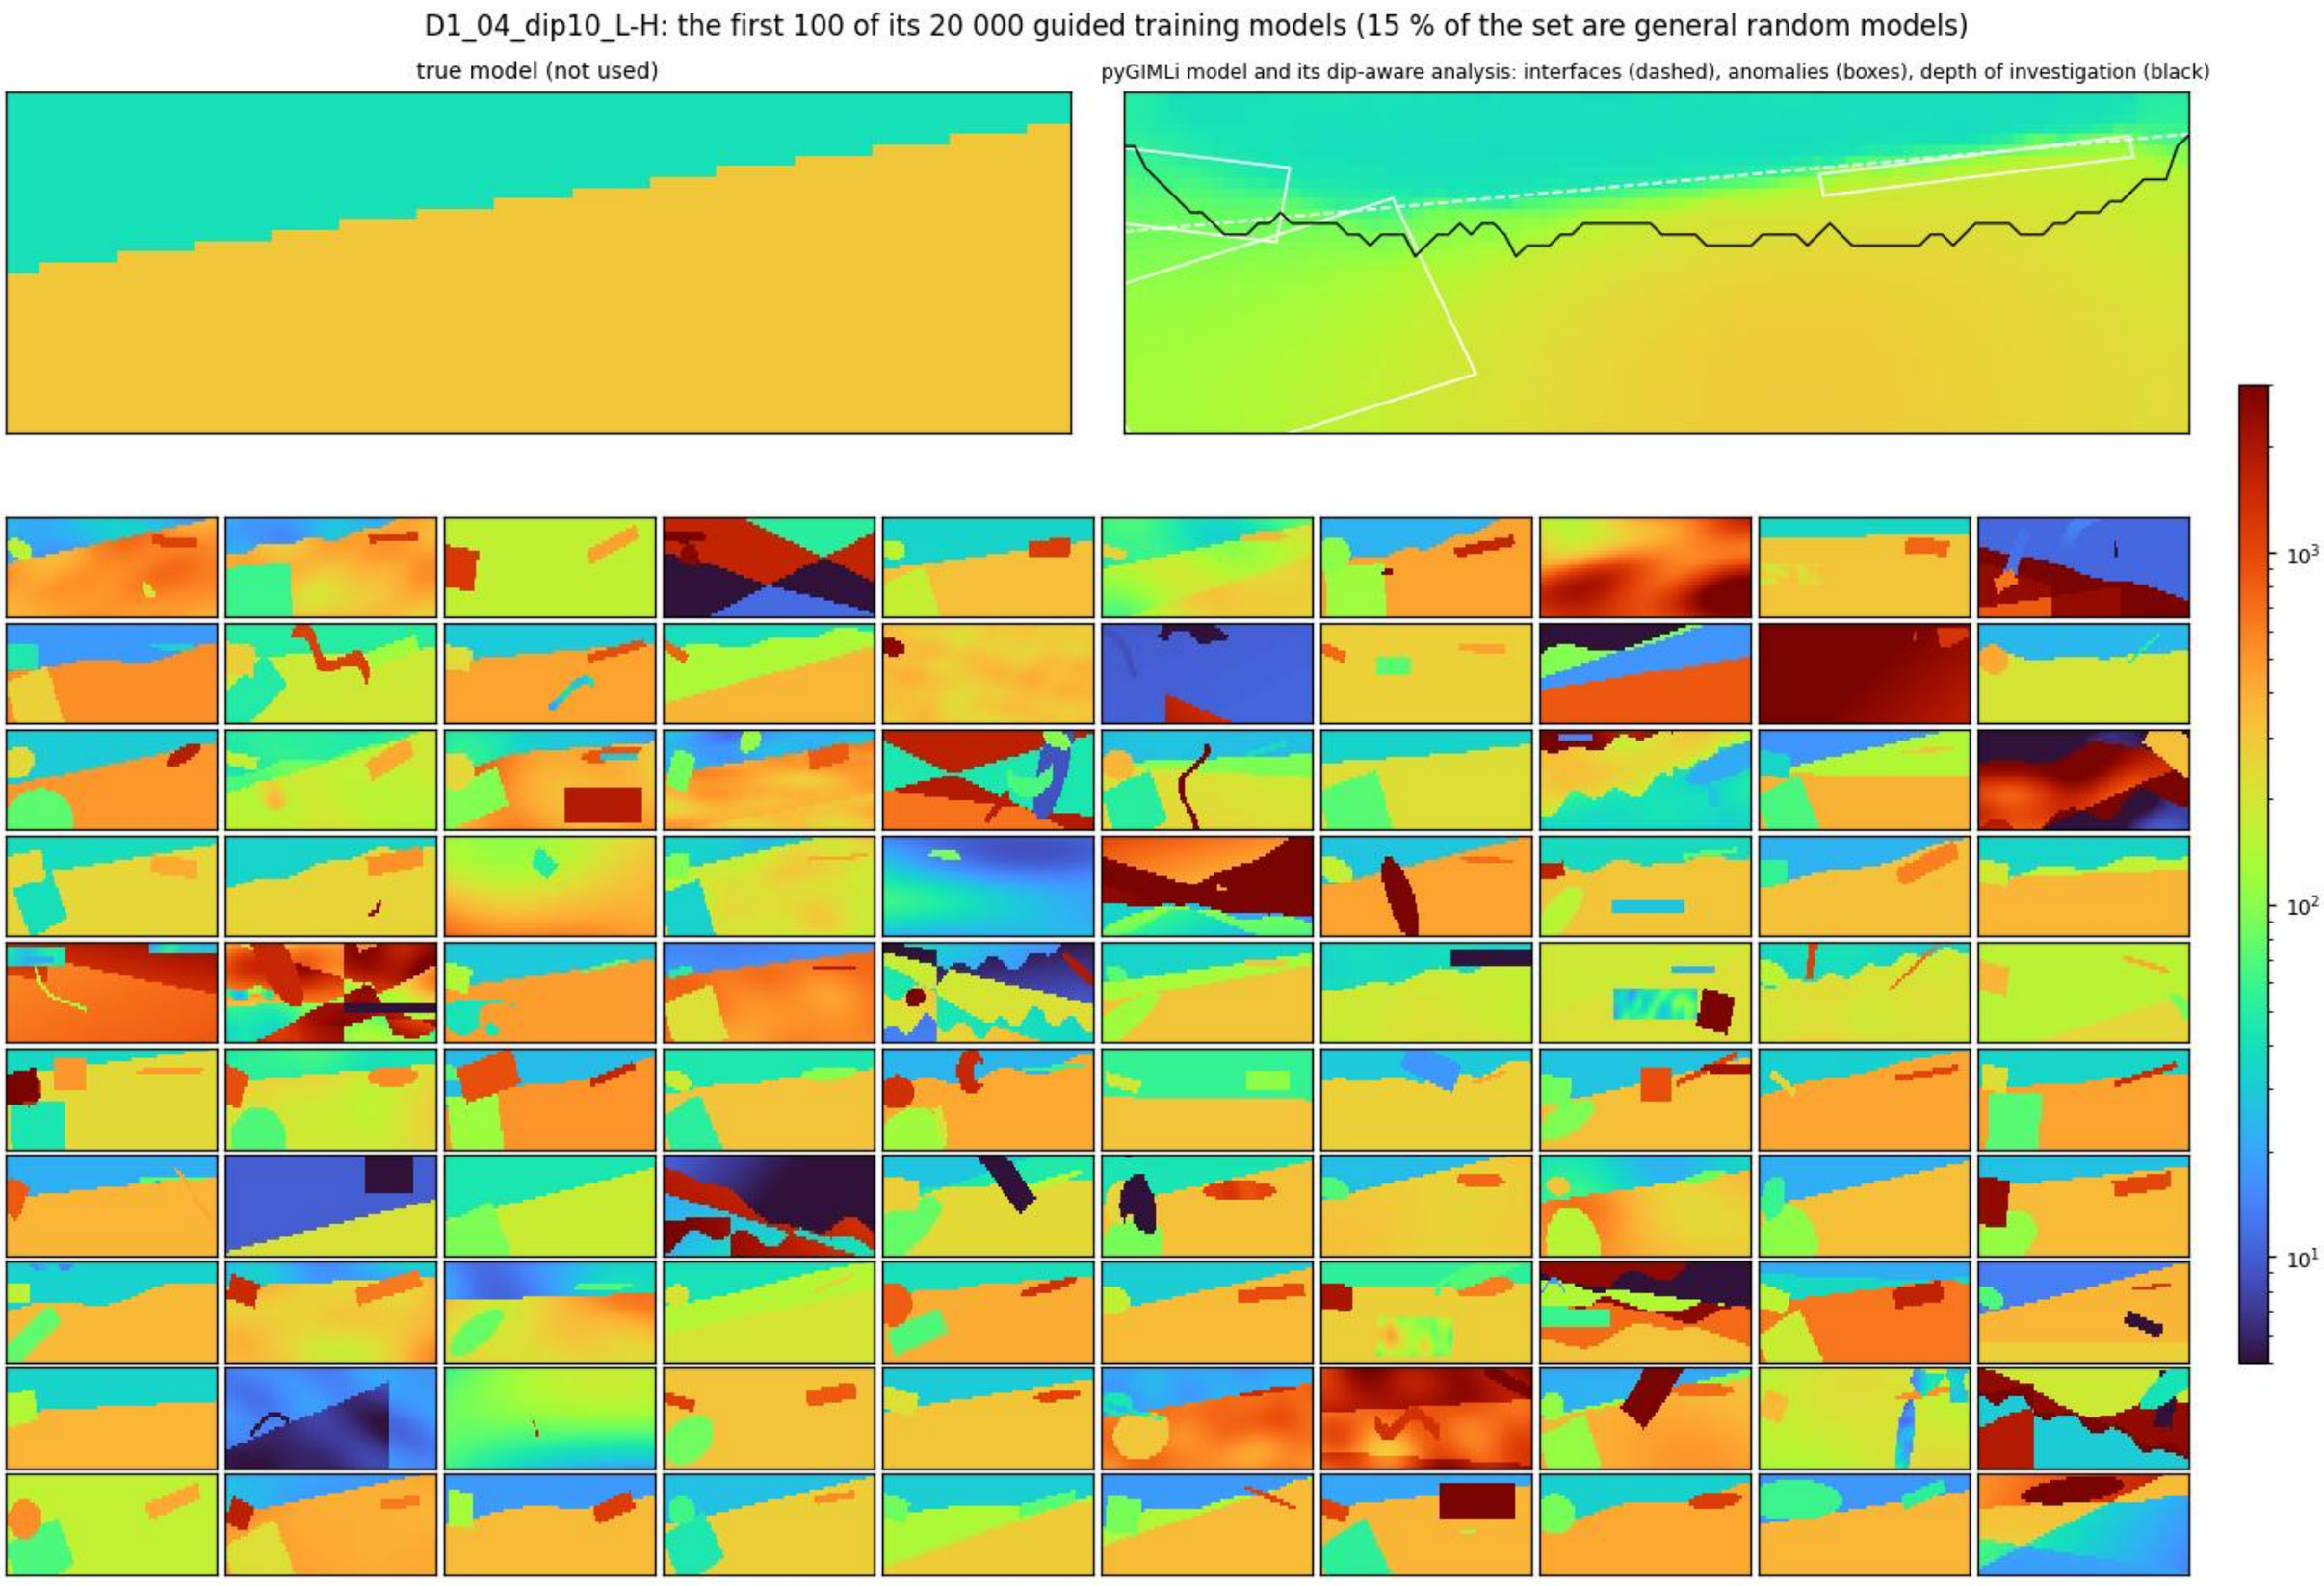
D1_04_dip10_L-H: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S31

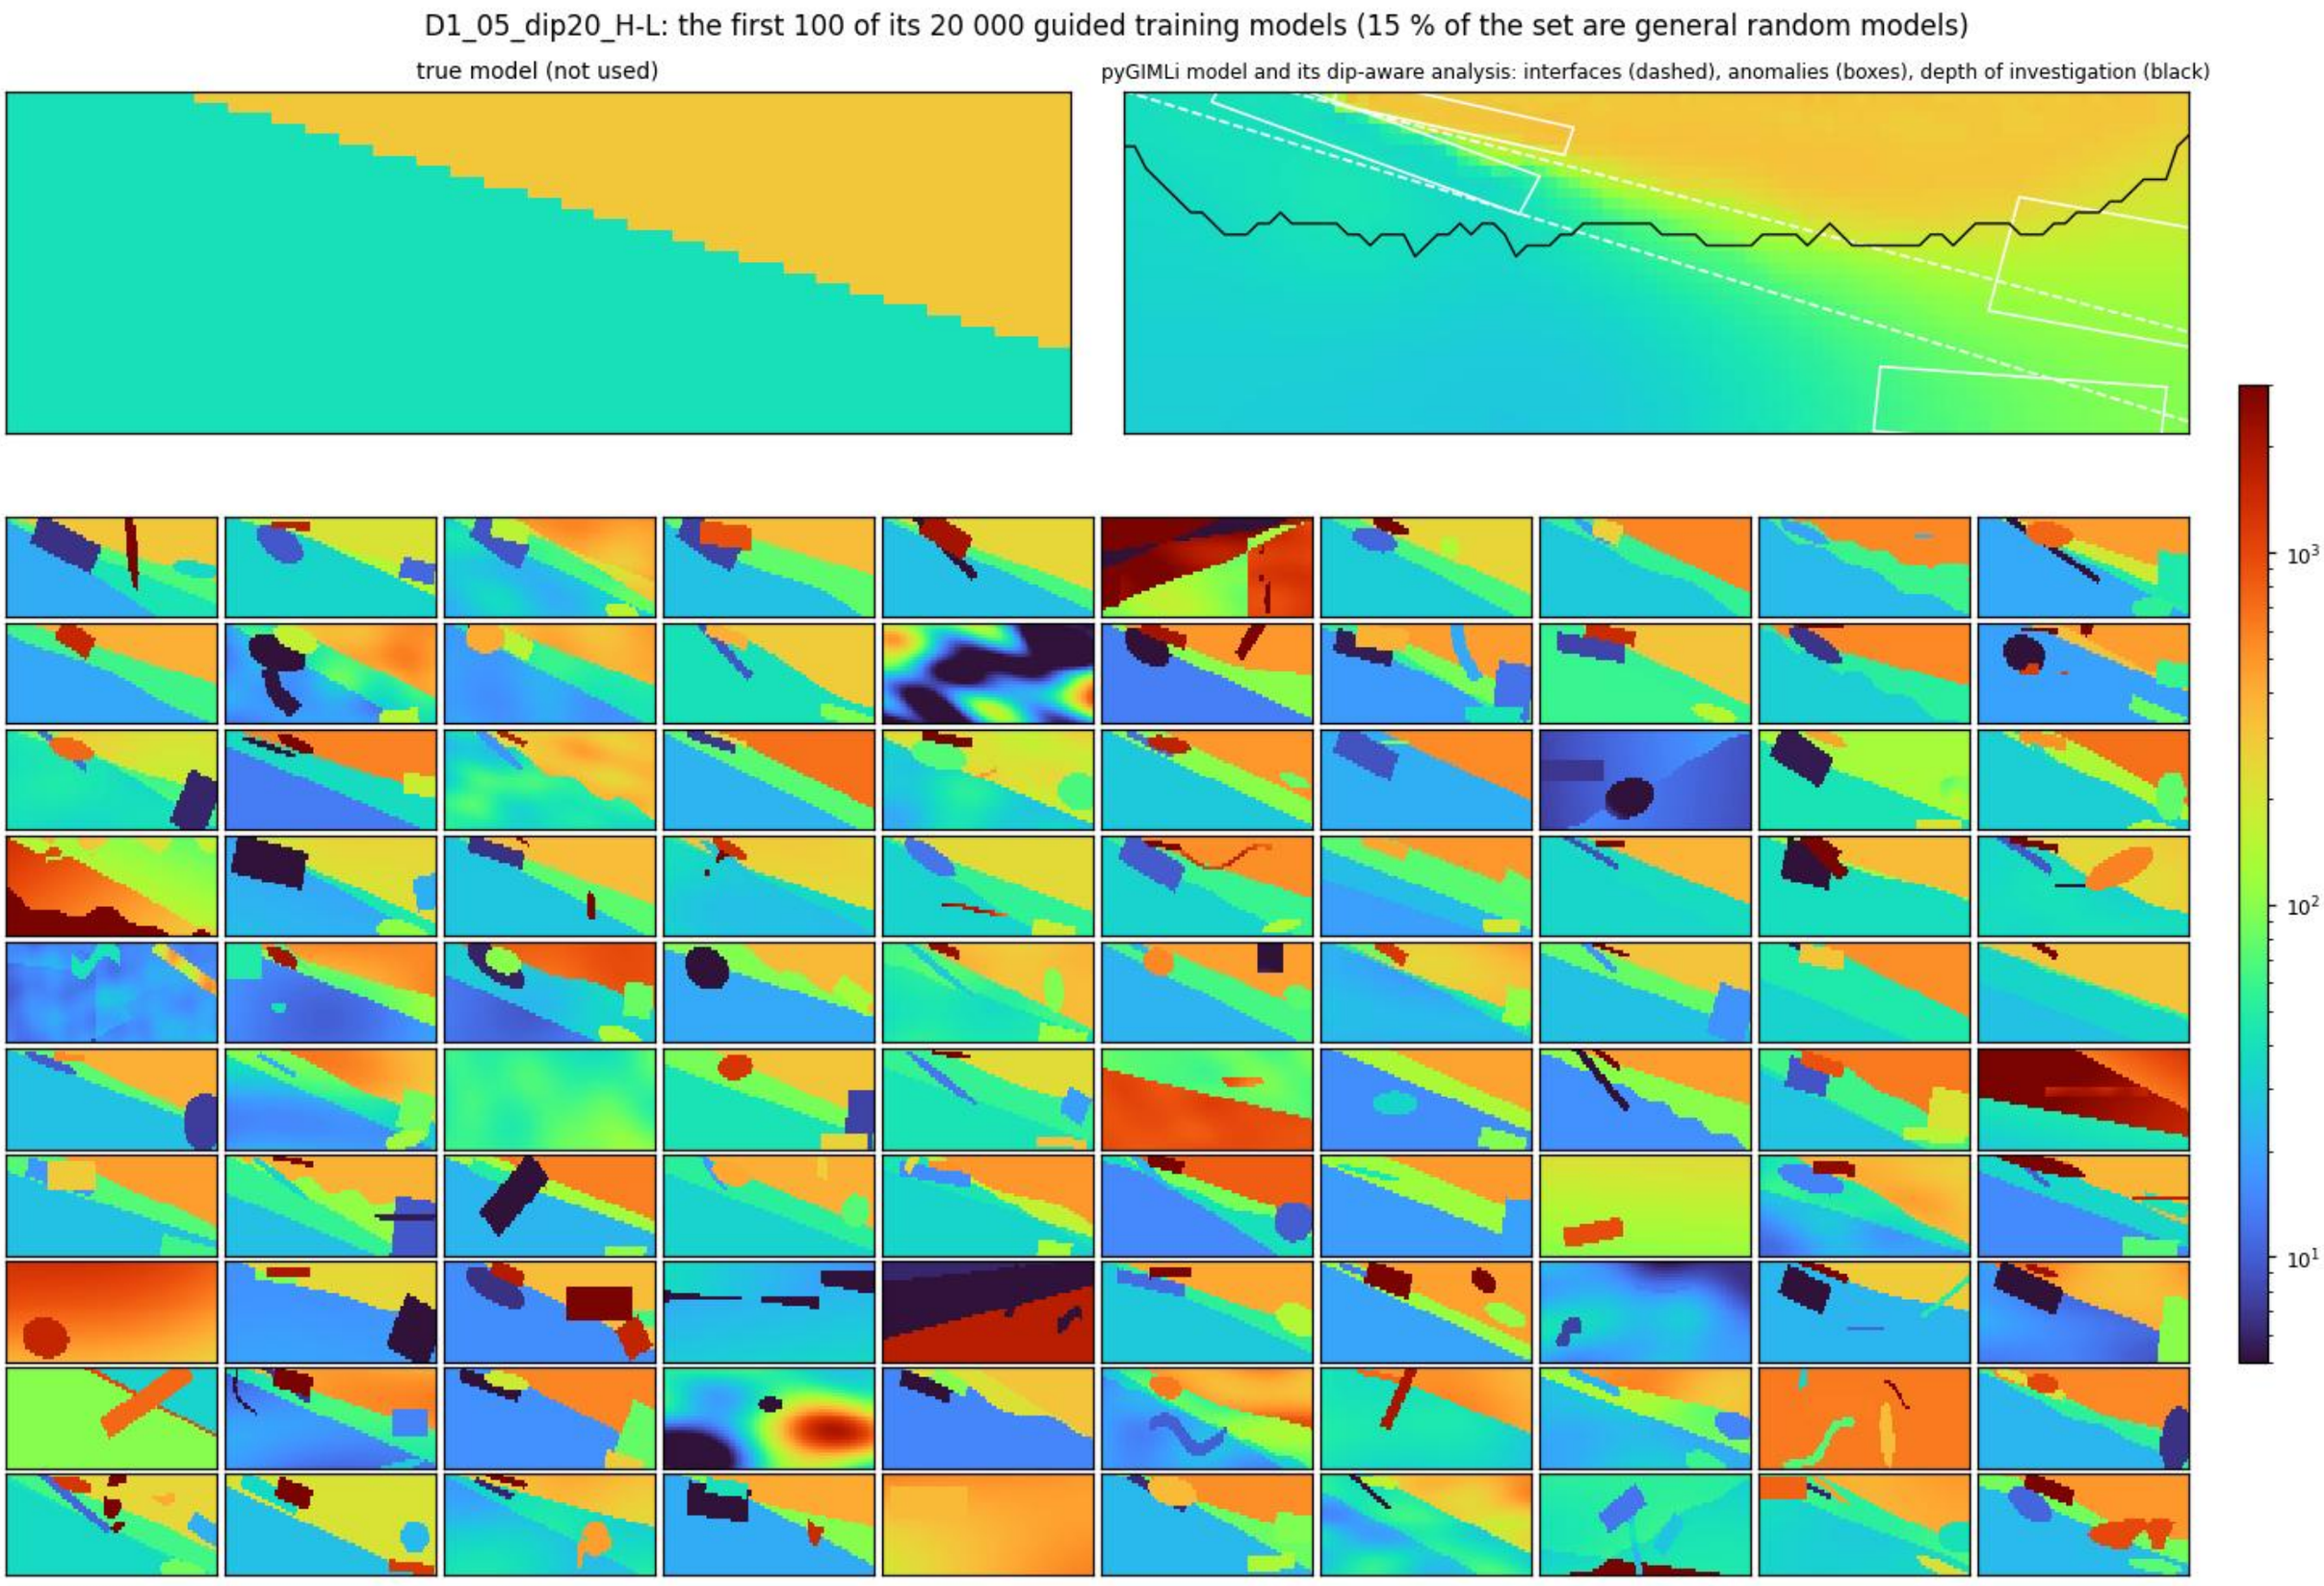
D1_05_dip20_H-L: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S32

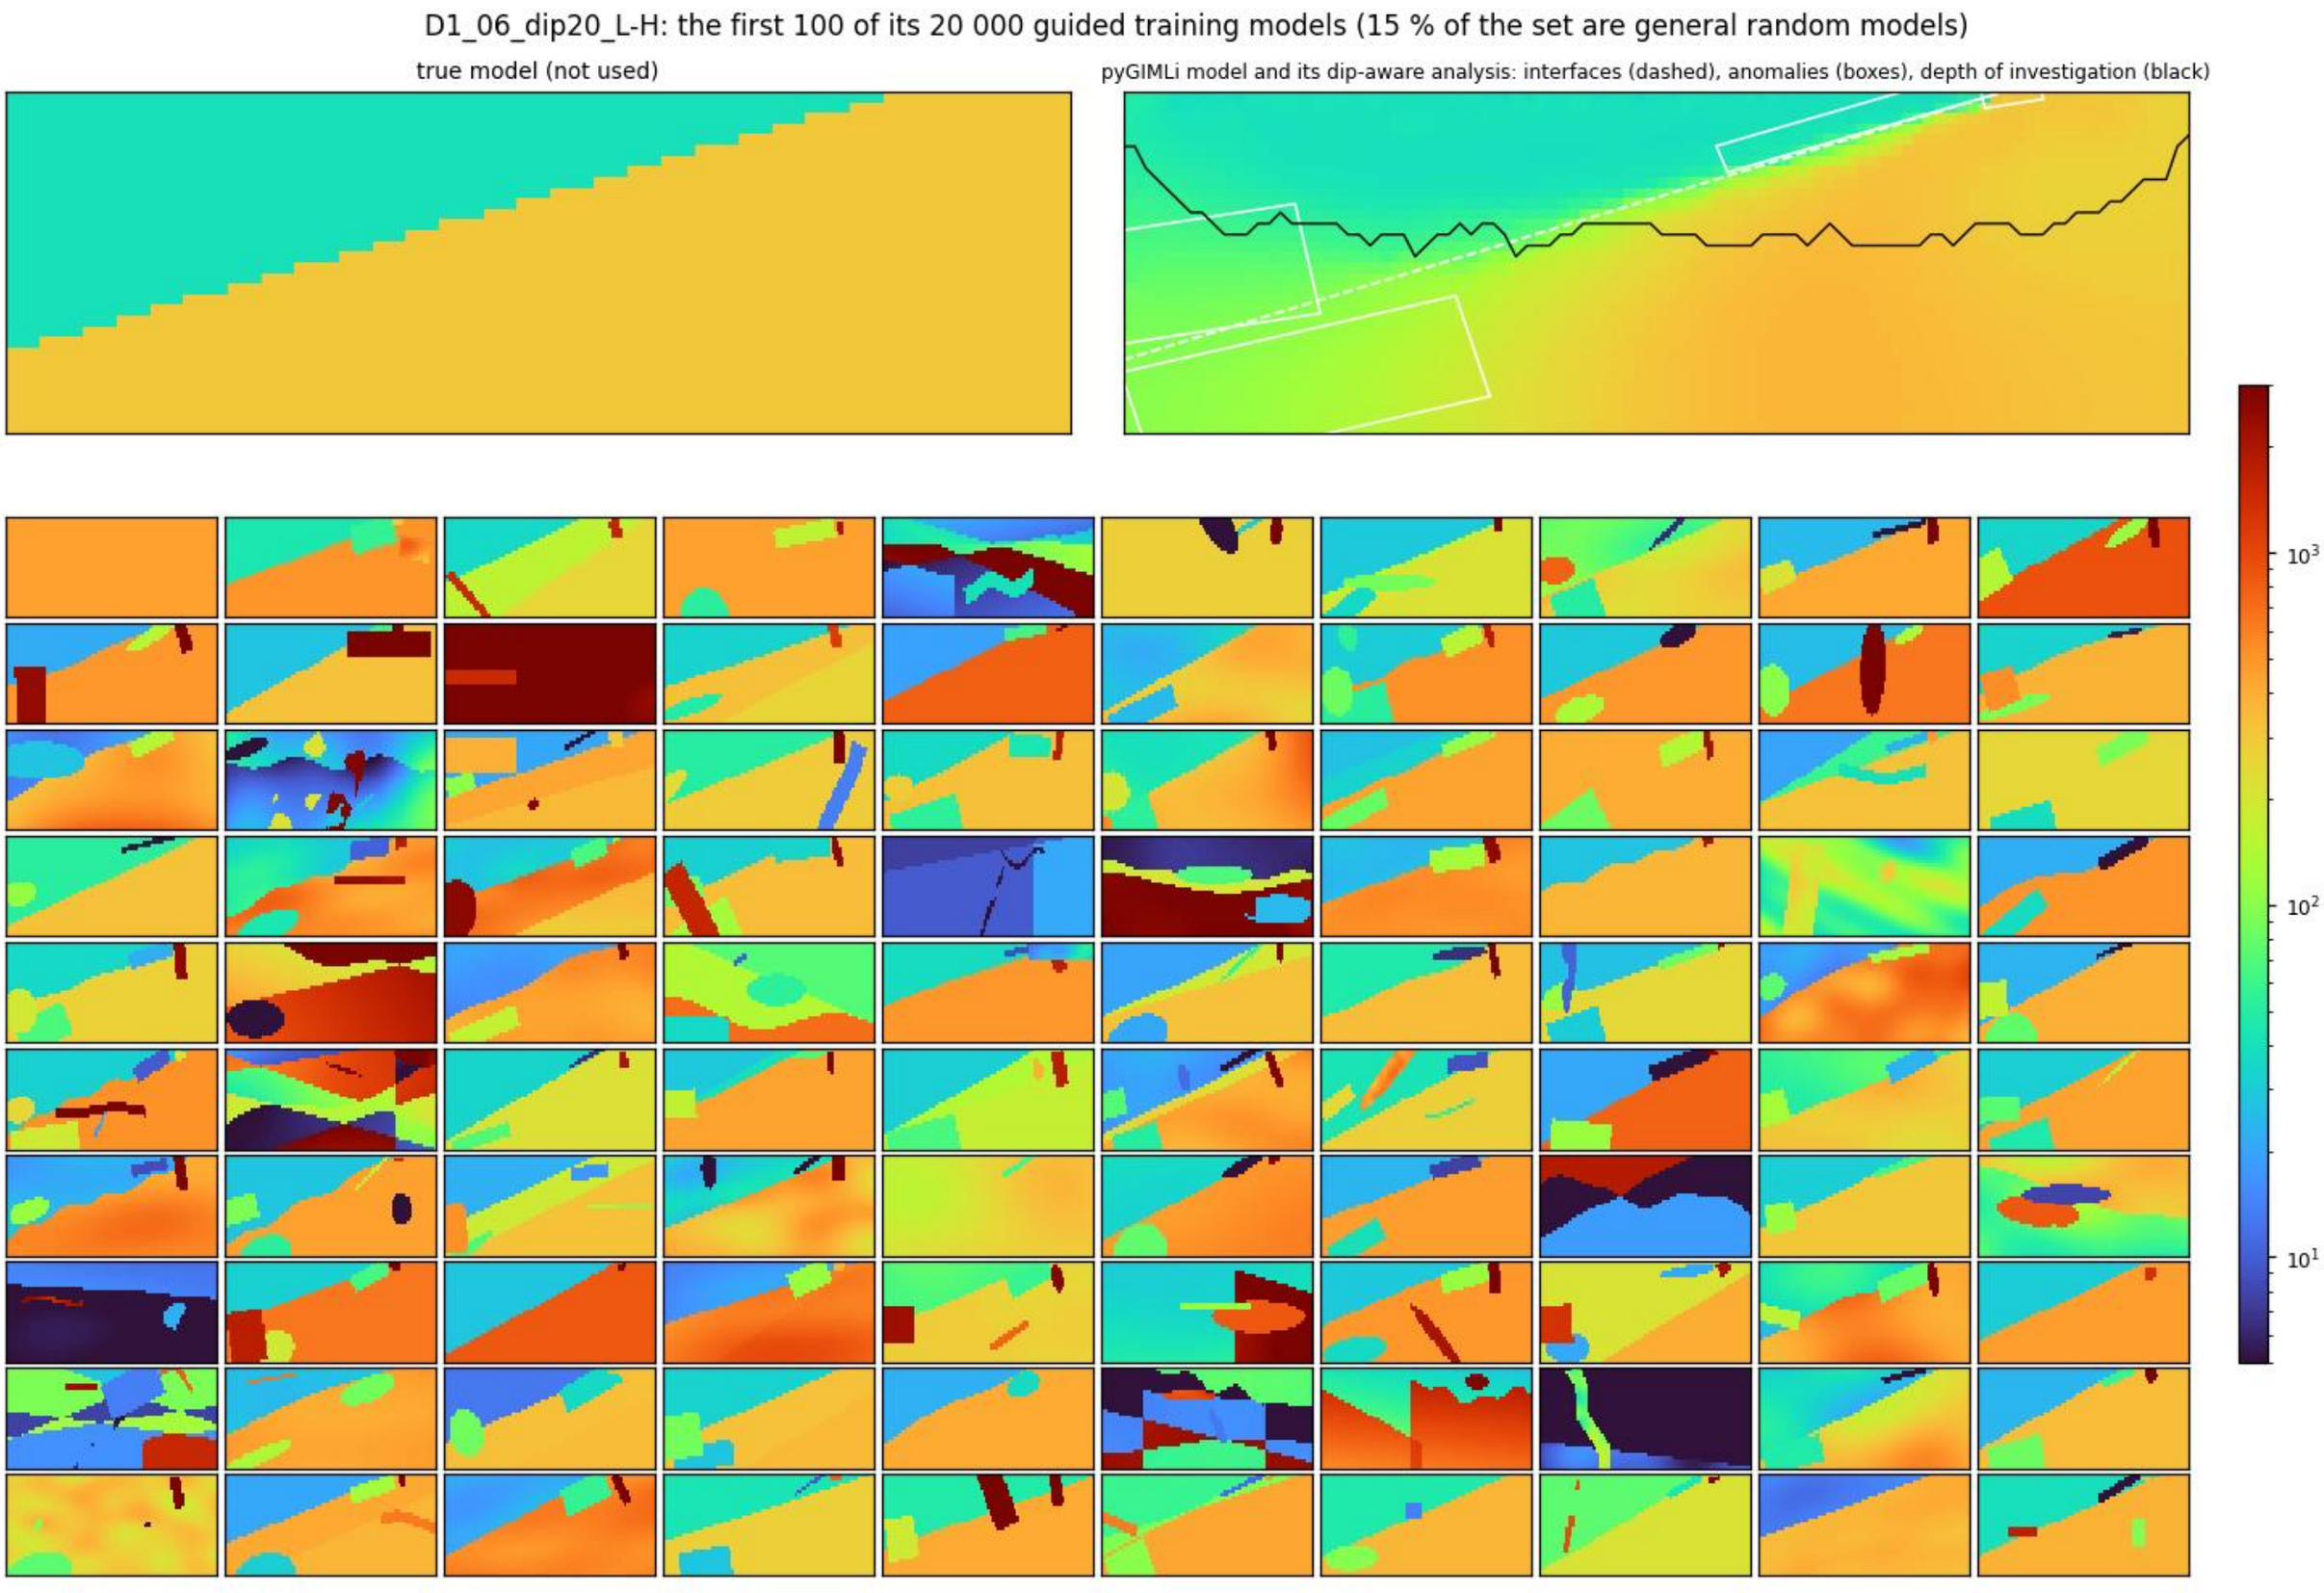
D1_06_dip20_L-H: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S33

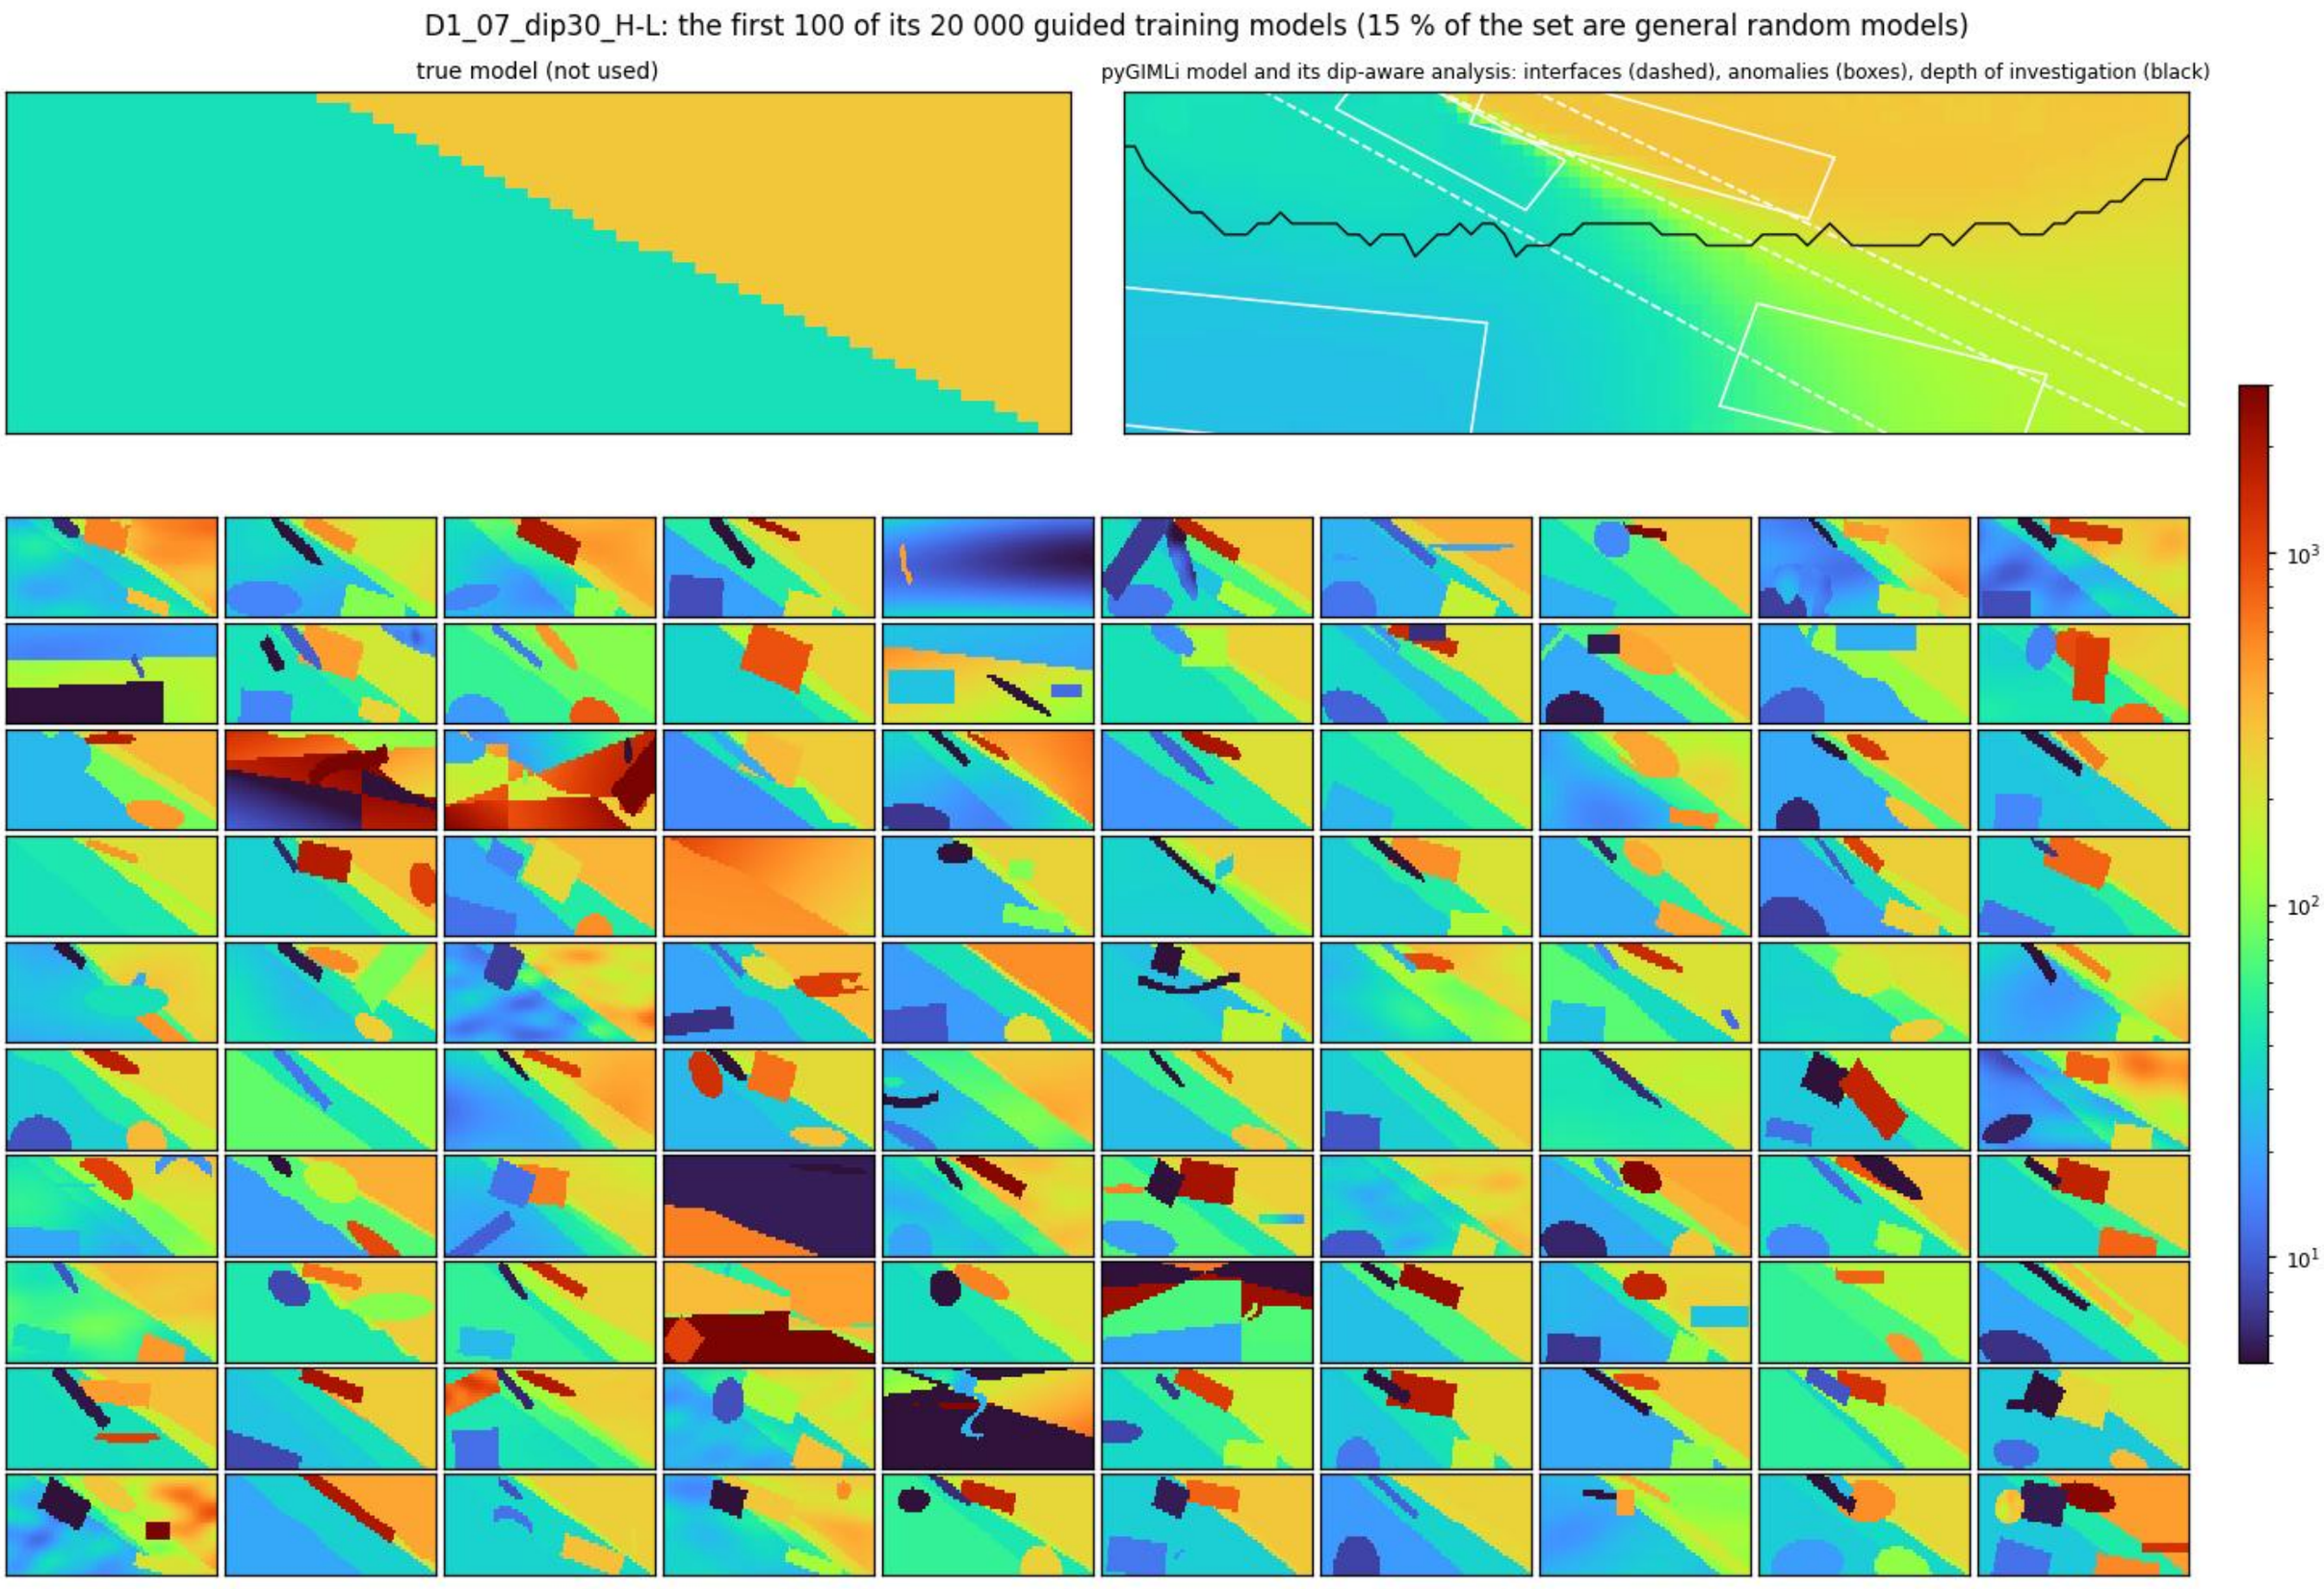
D1_07_dip30_H-L: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S34

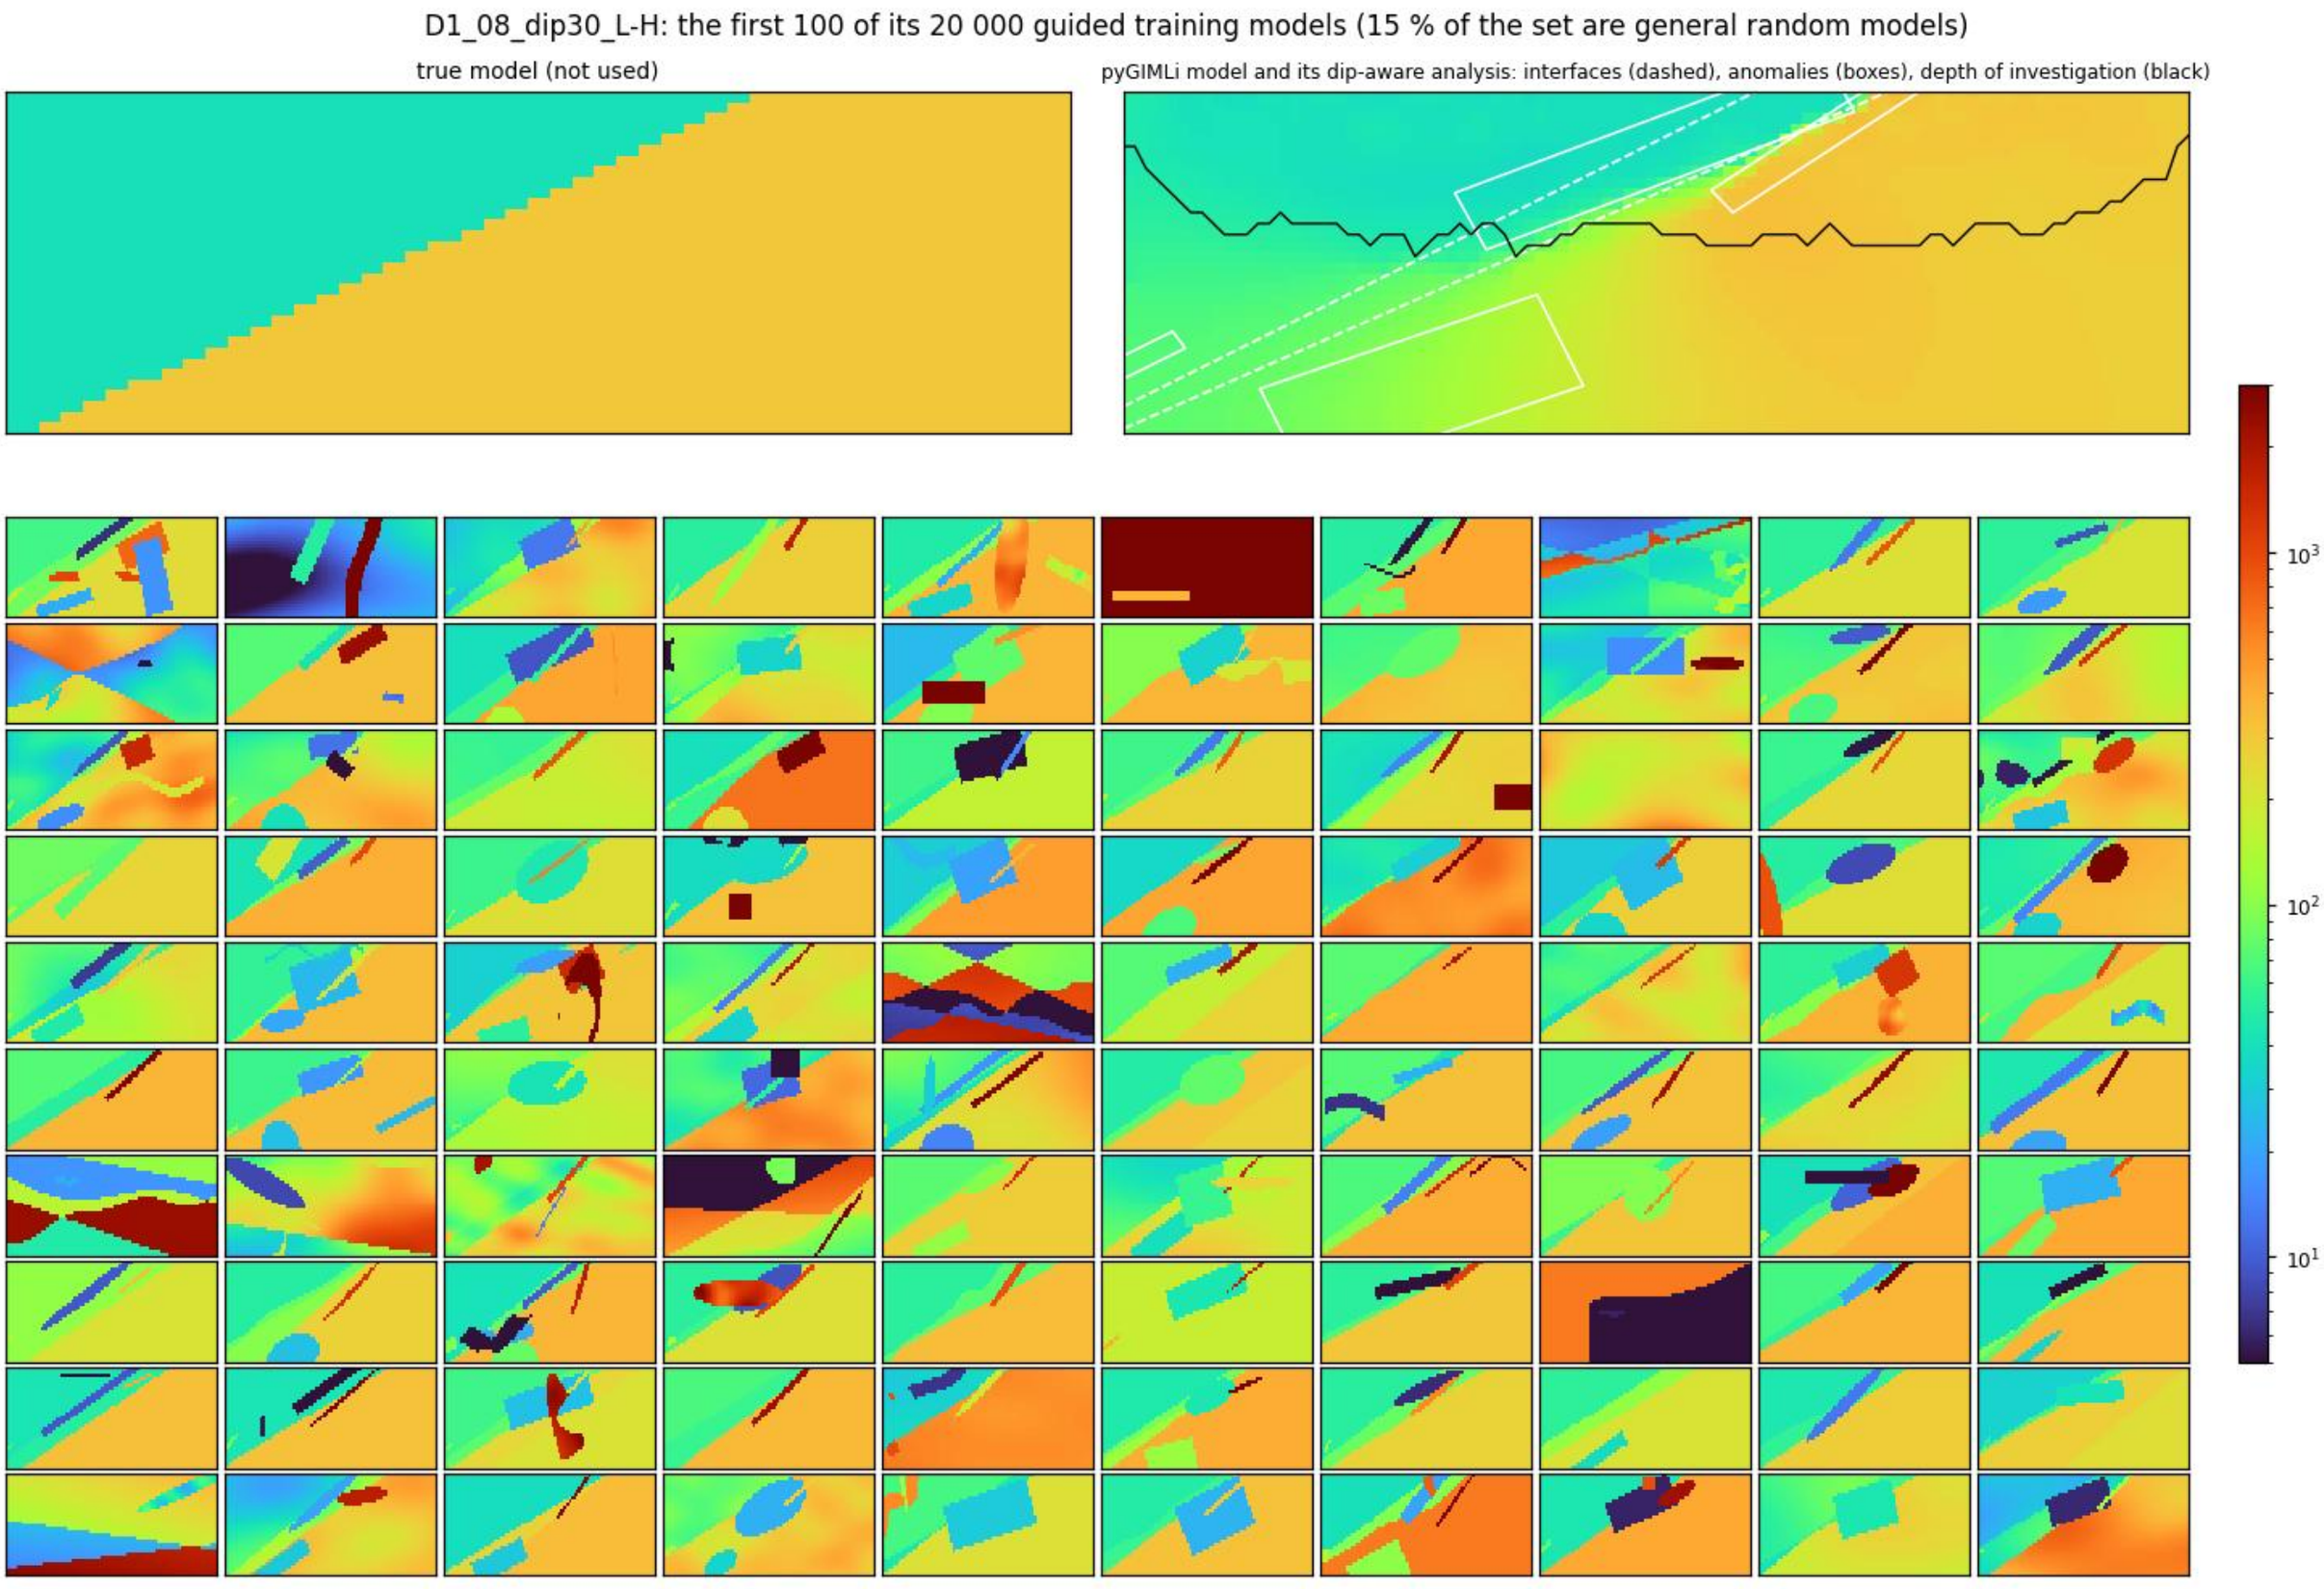
D1_08_dip30_L-H: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S35

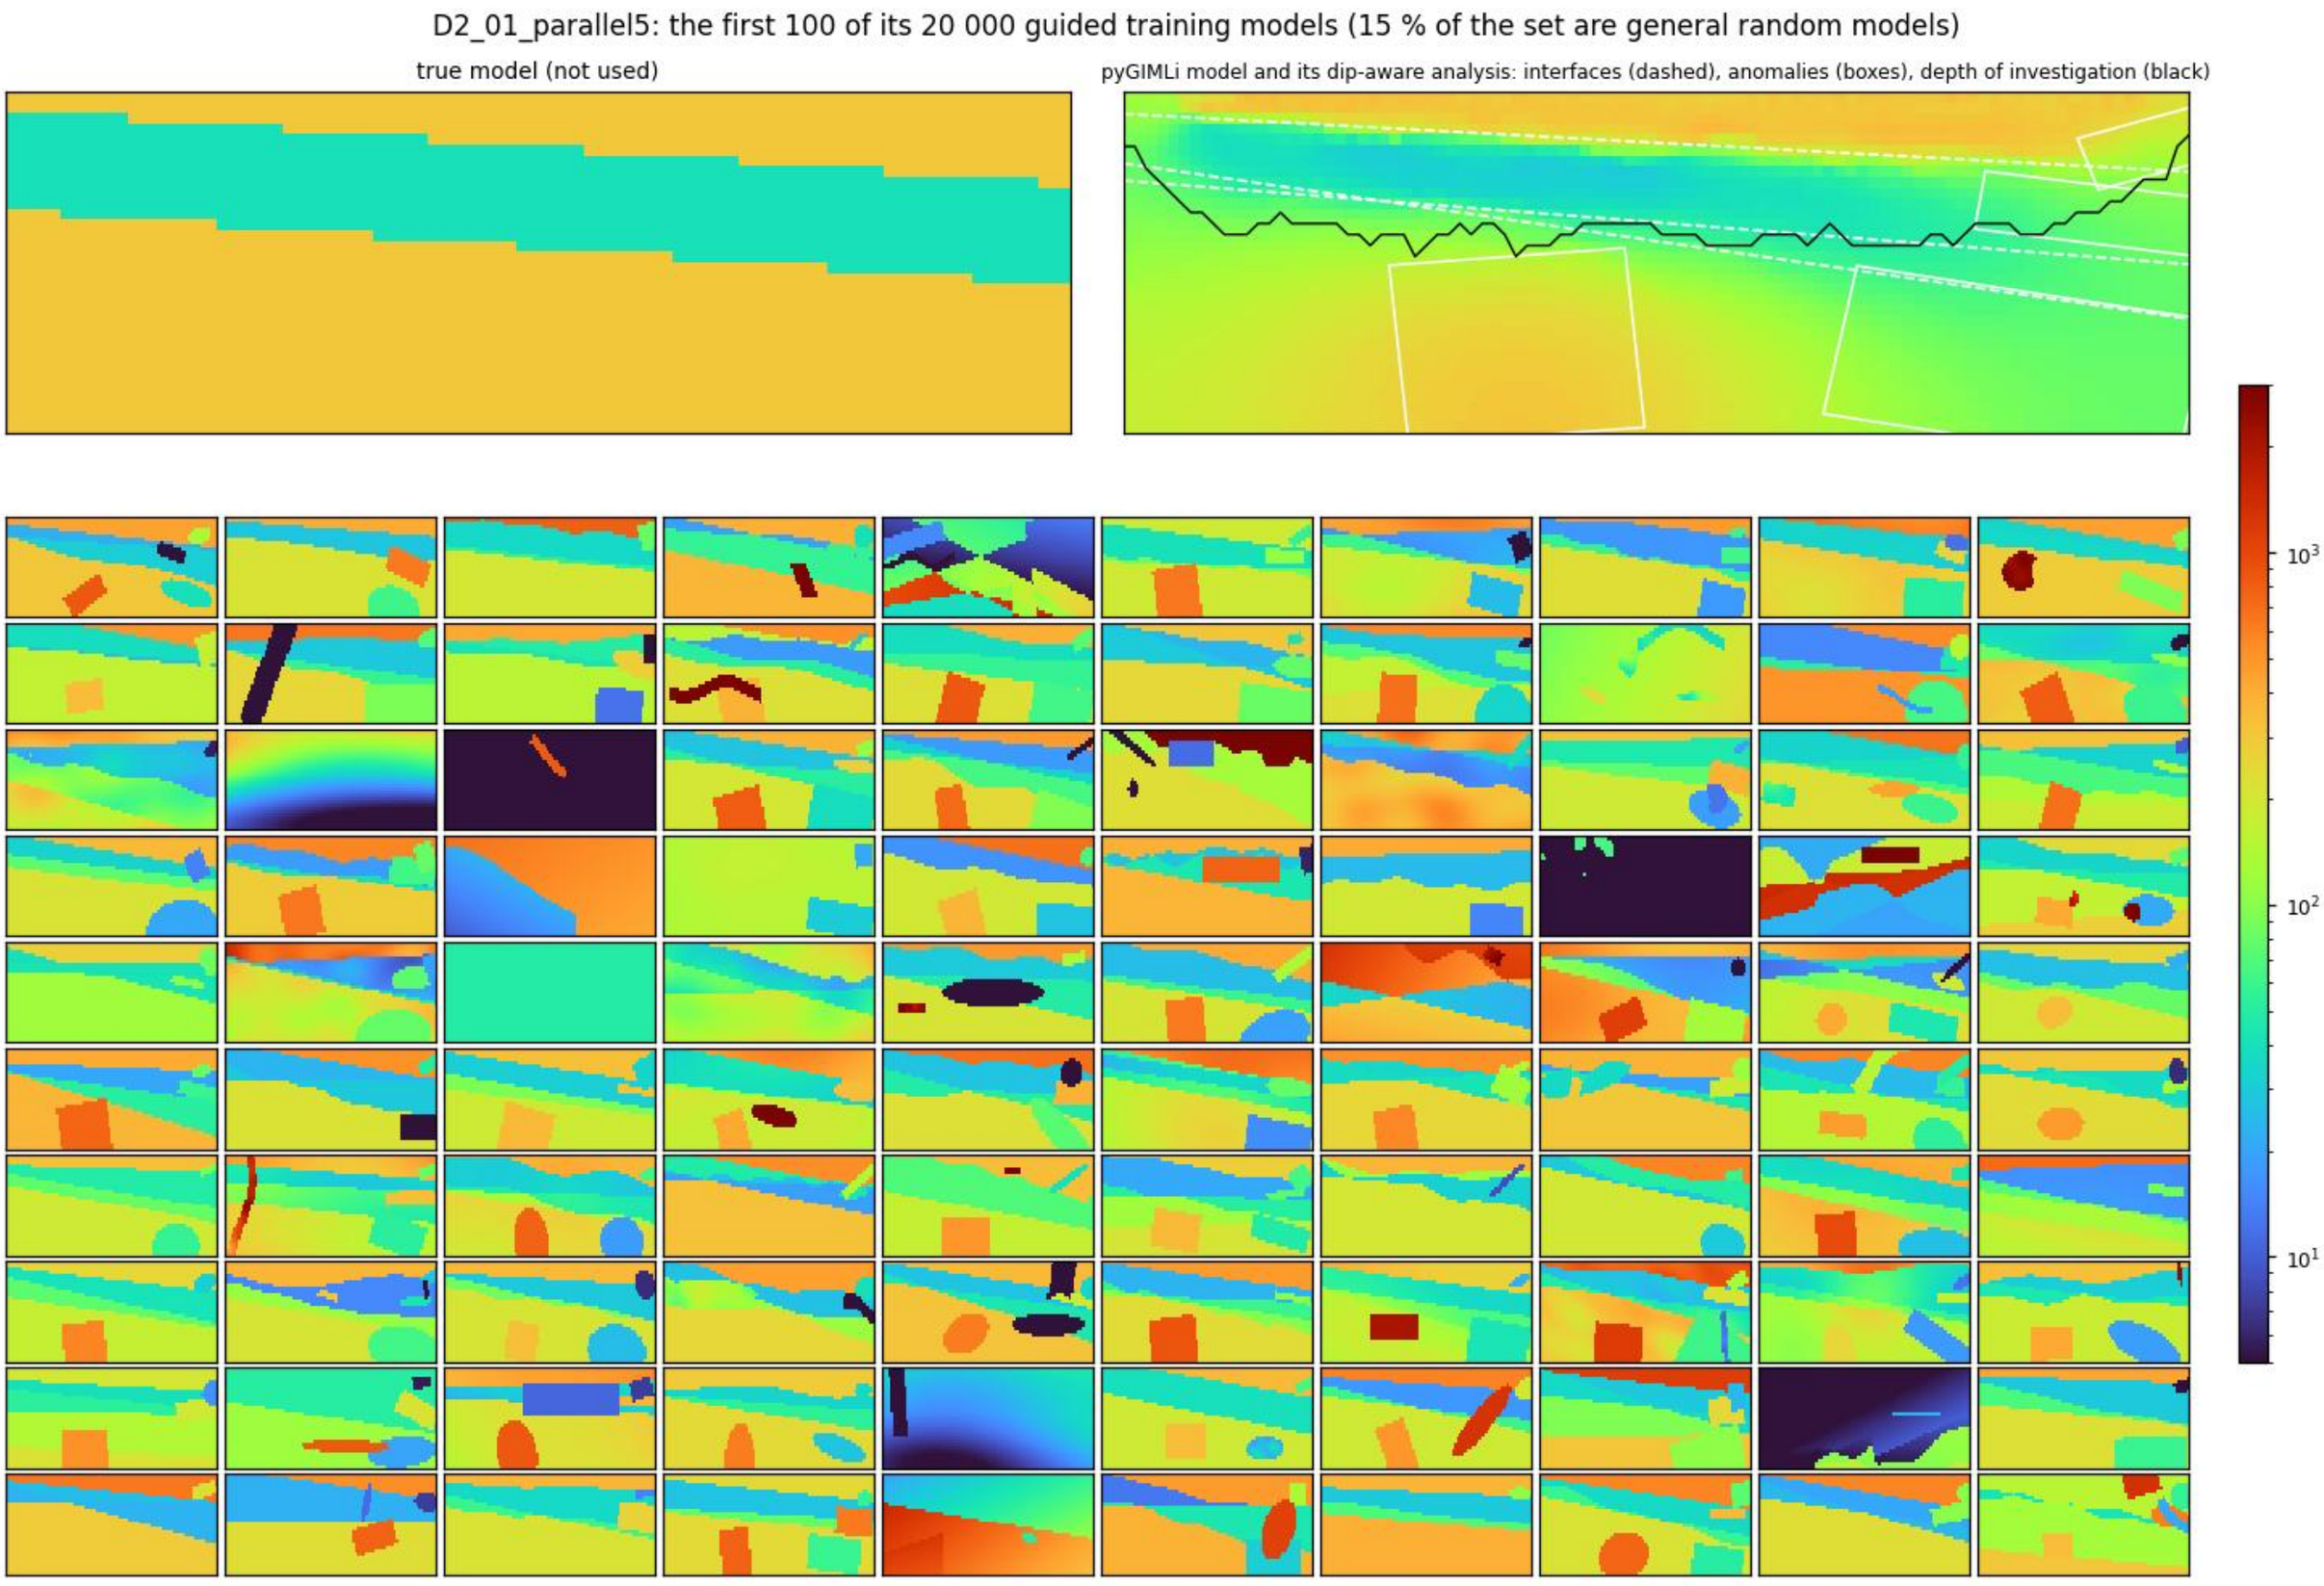
D2_01_parallel5: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S36

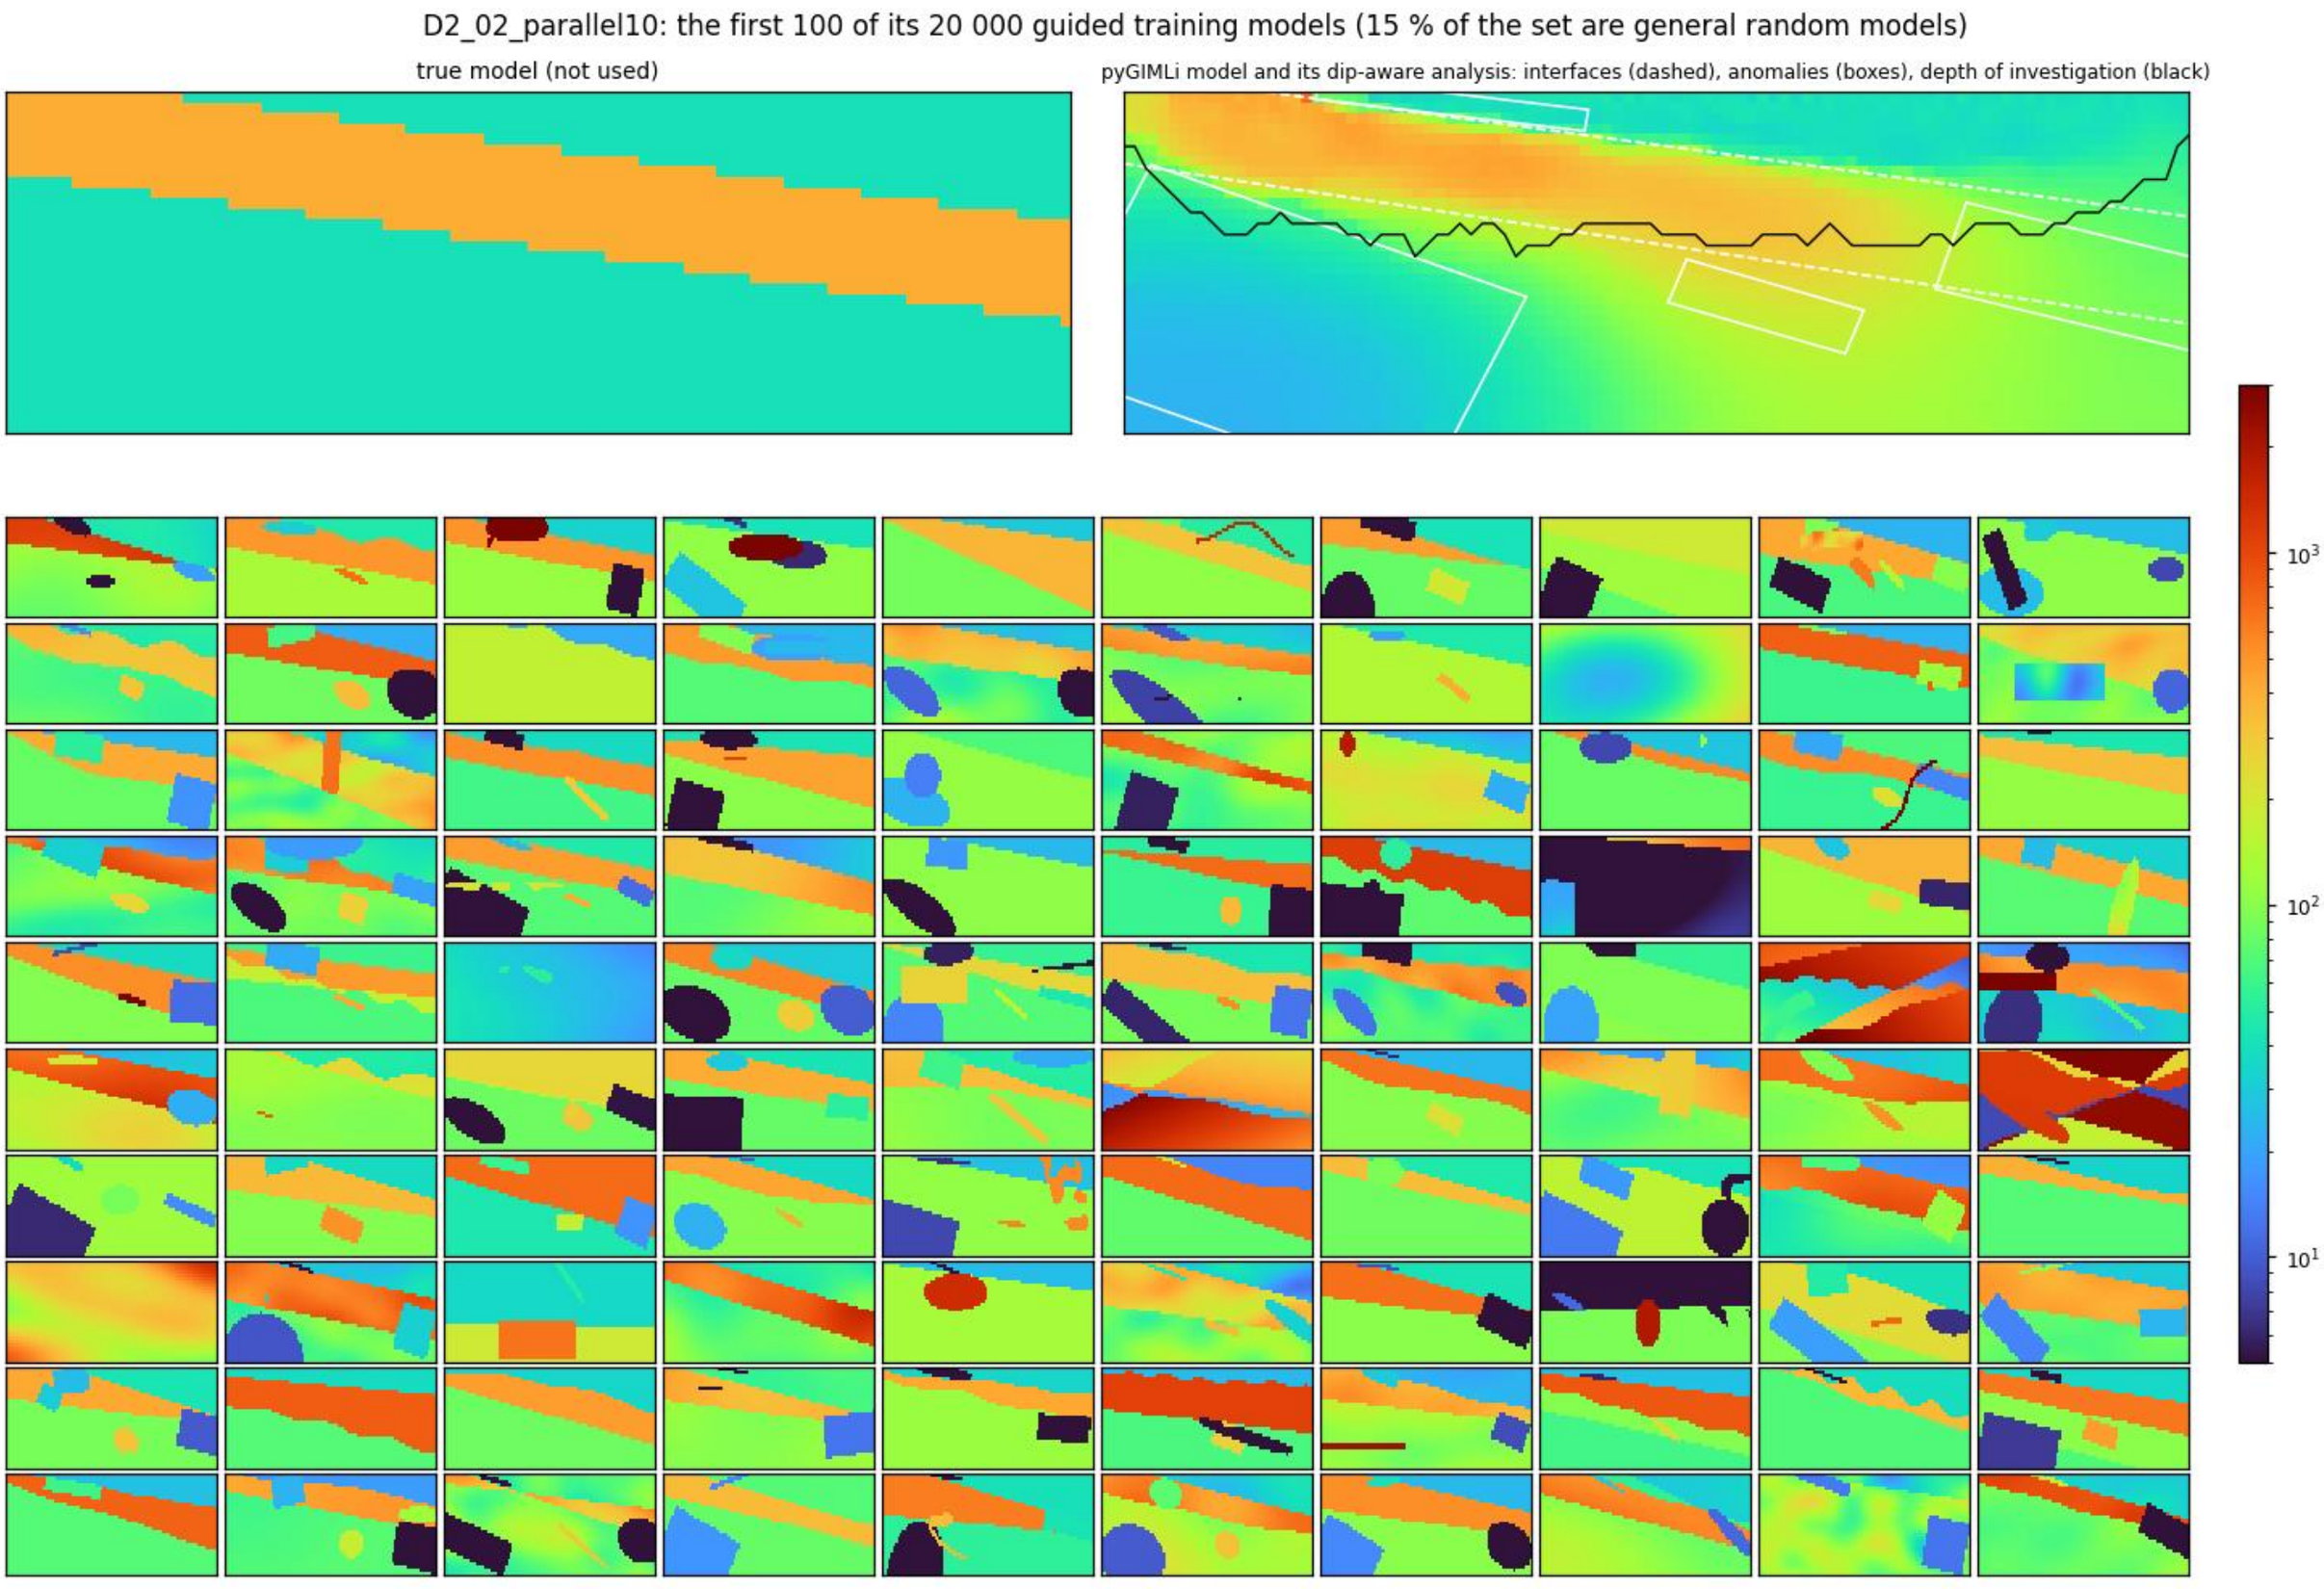
D2_02_parallel10: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S37

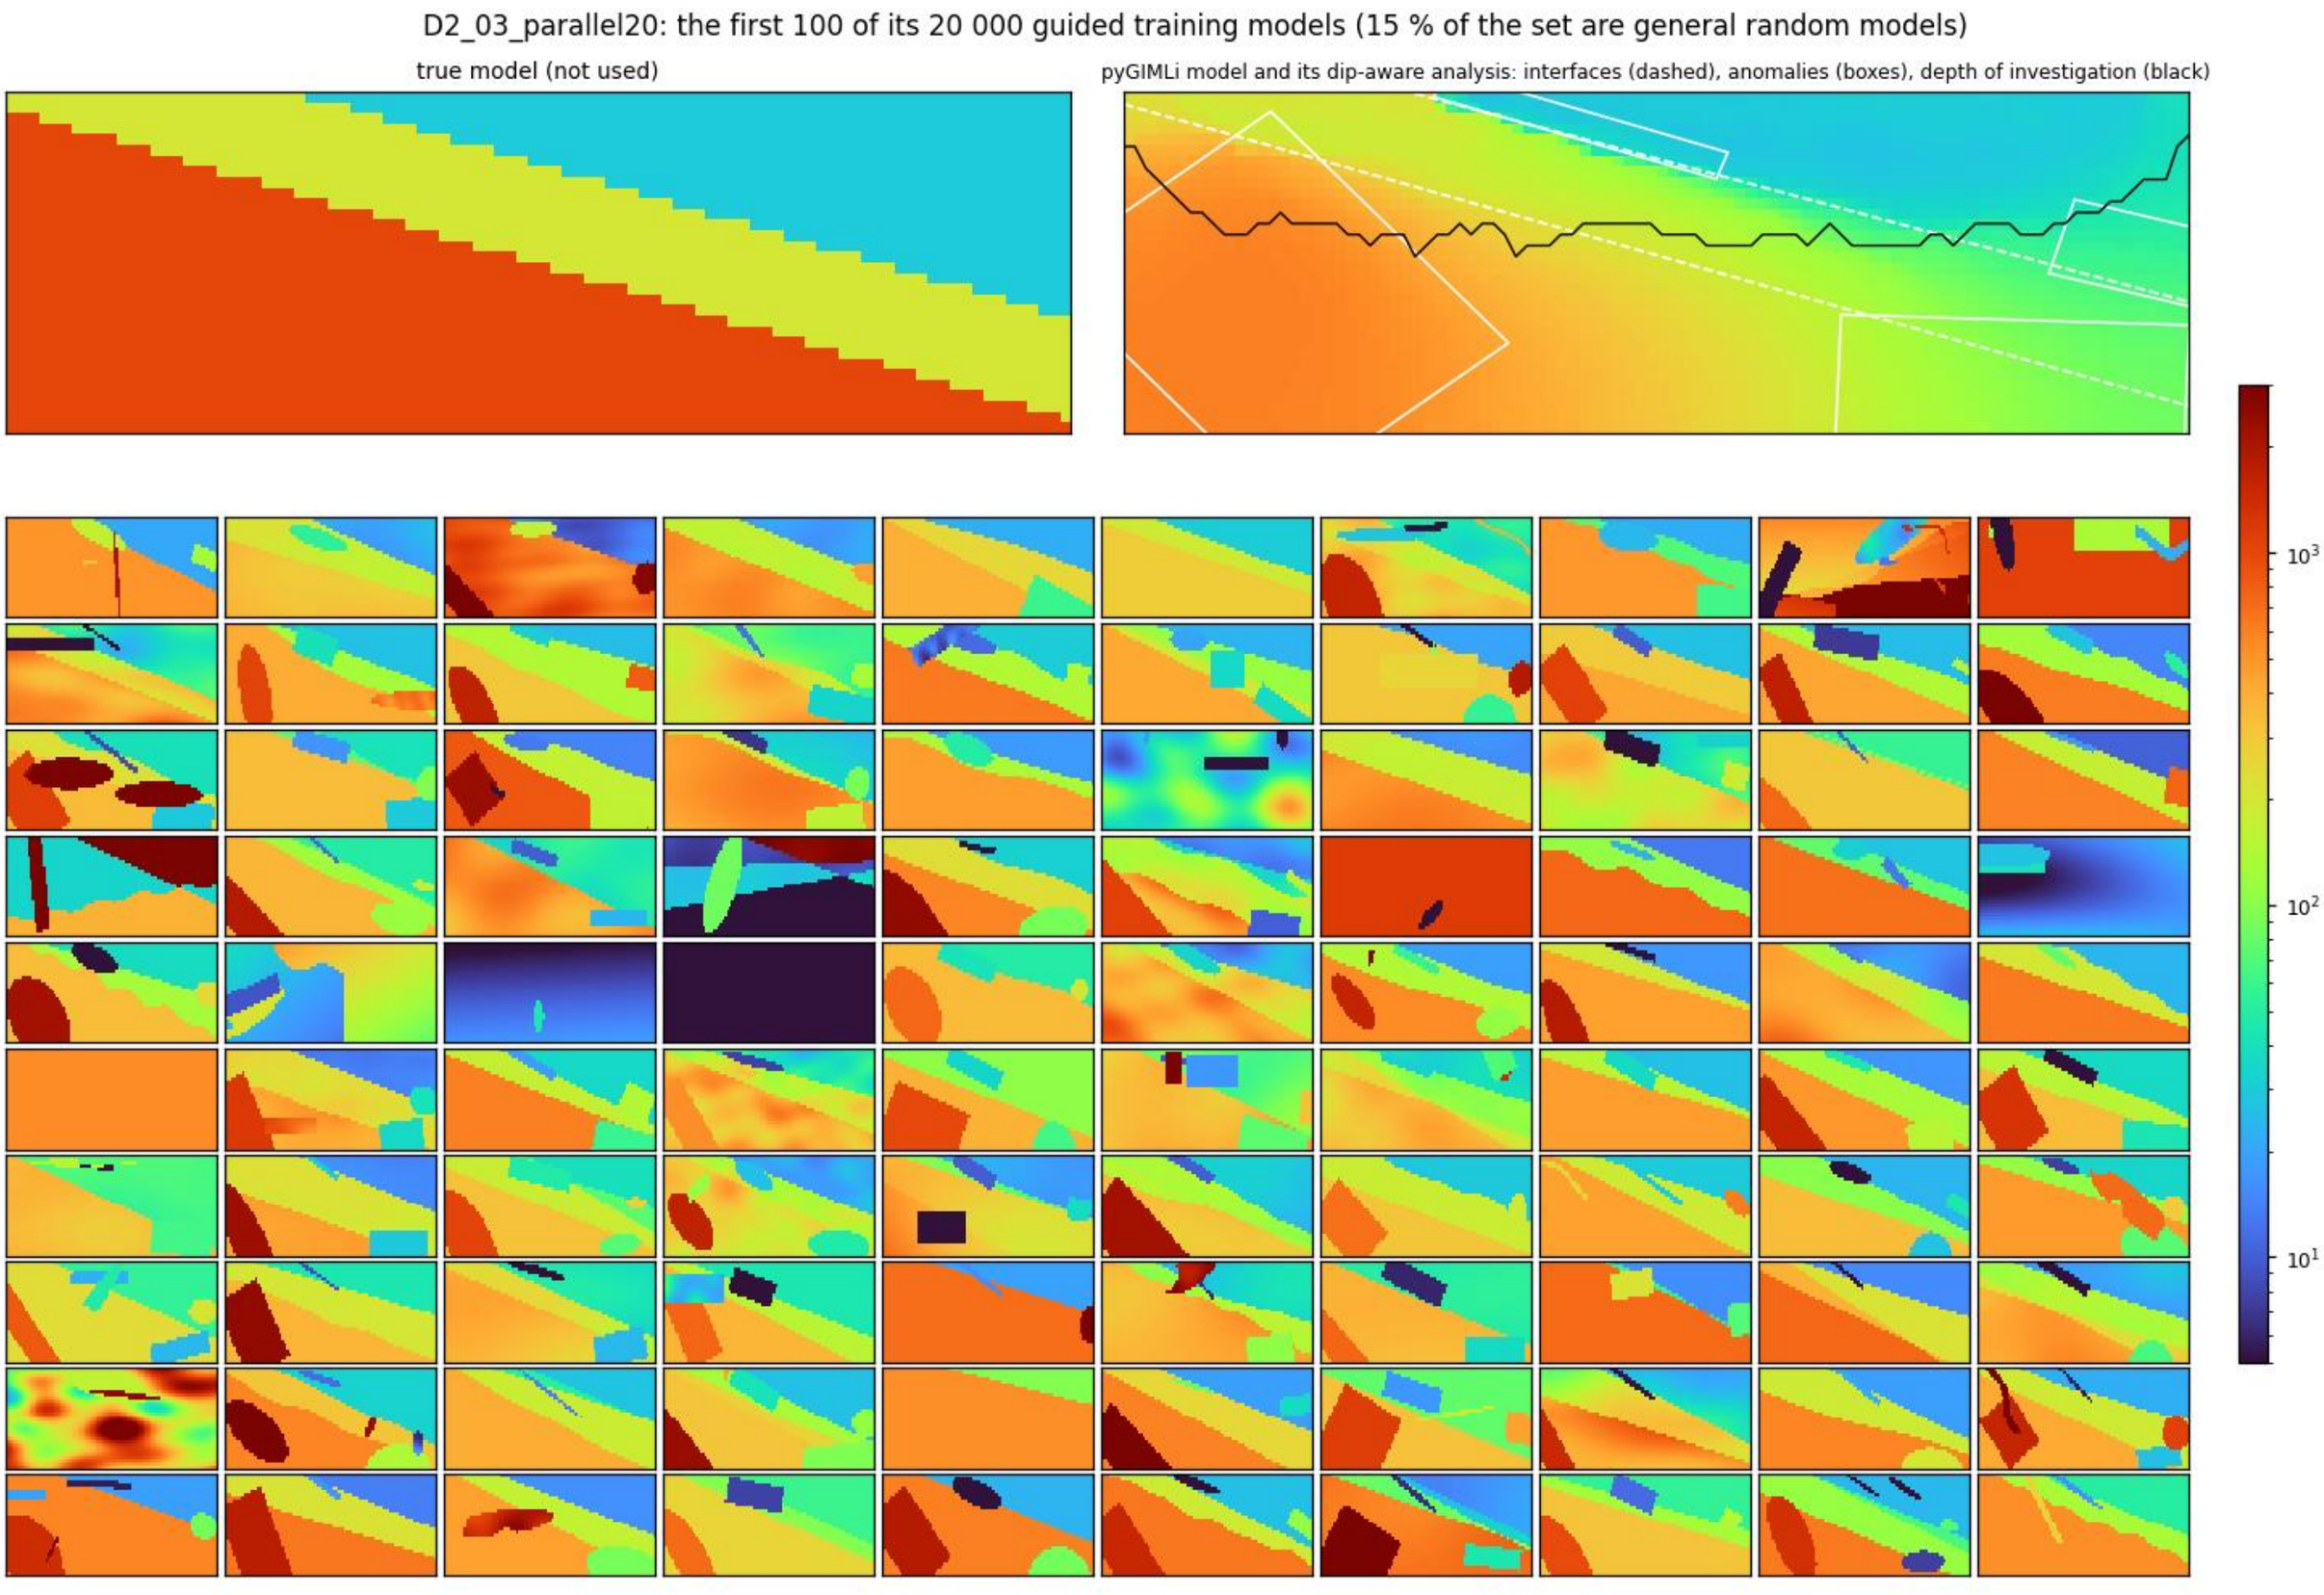
D2_03_parallel20: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S38

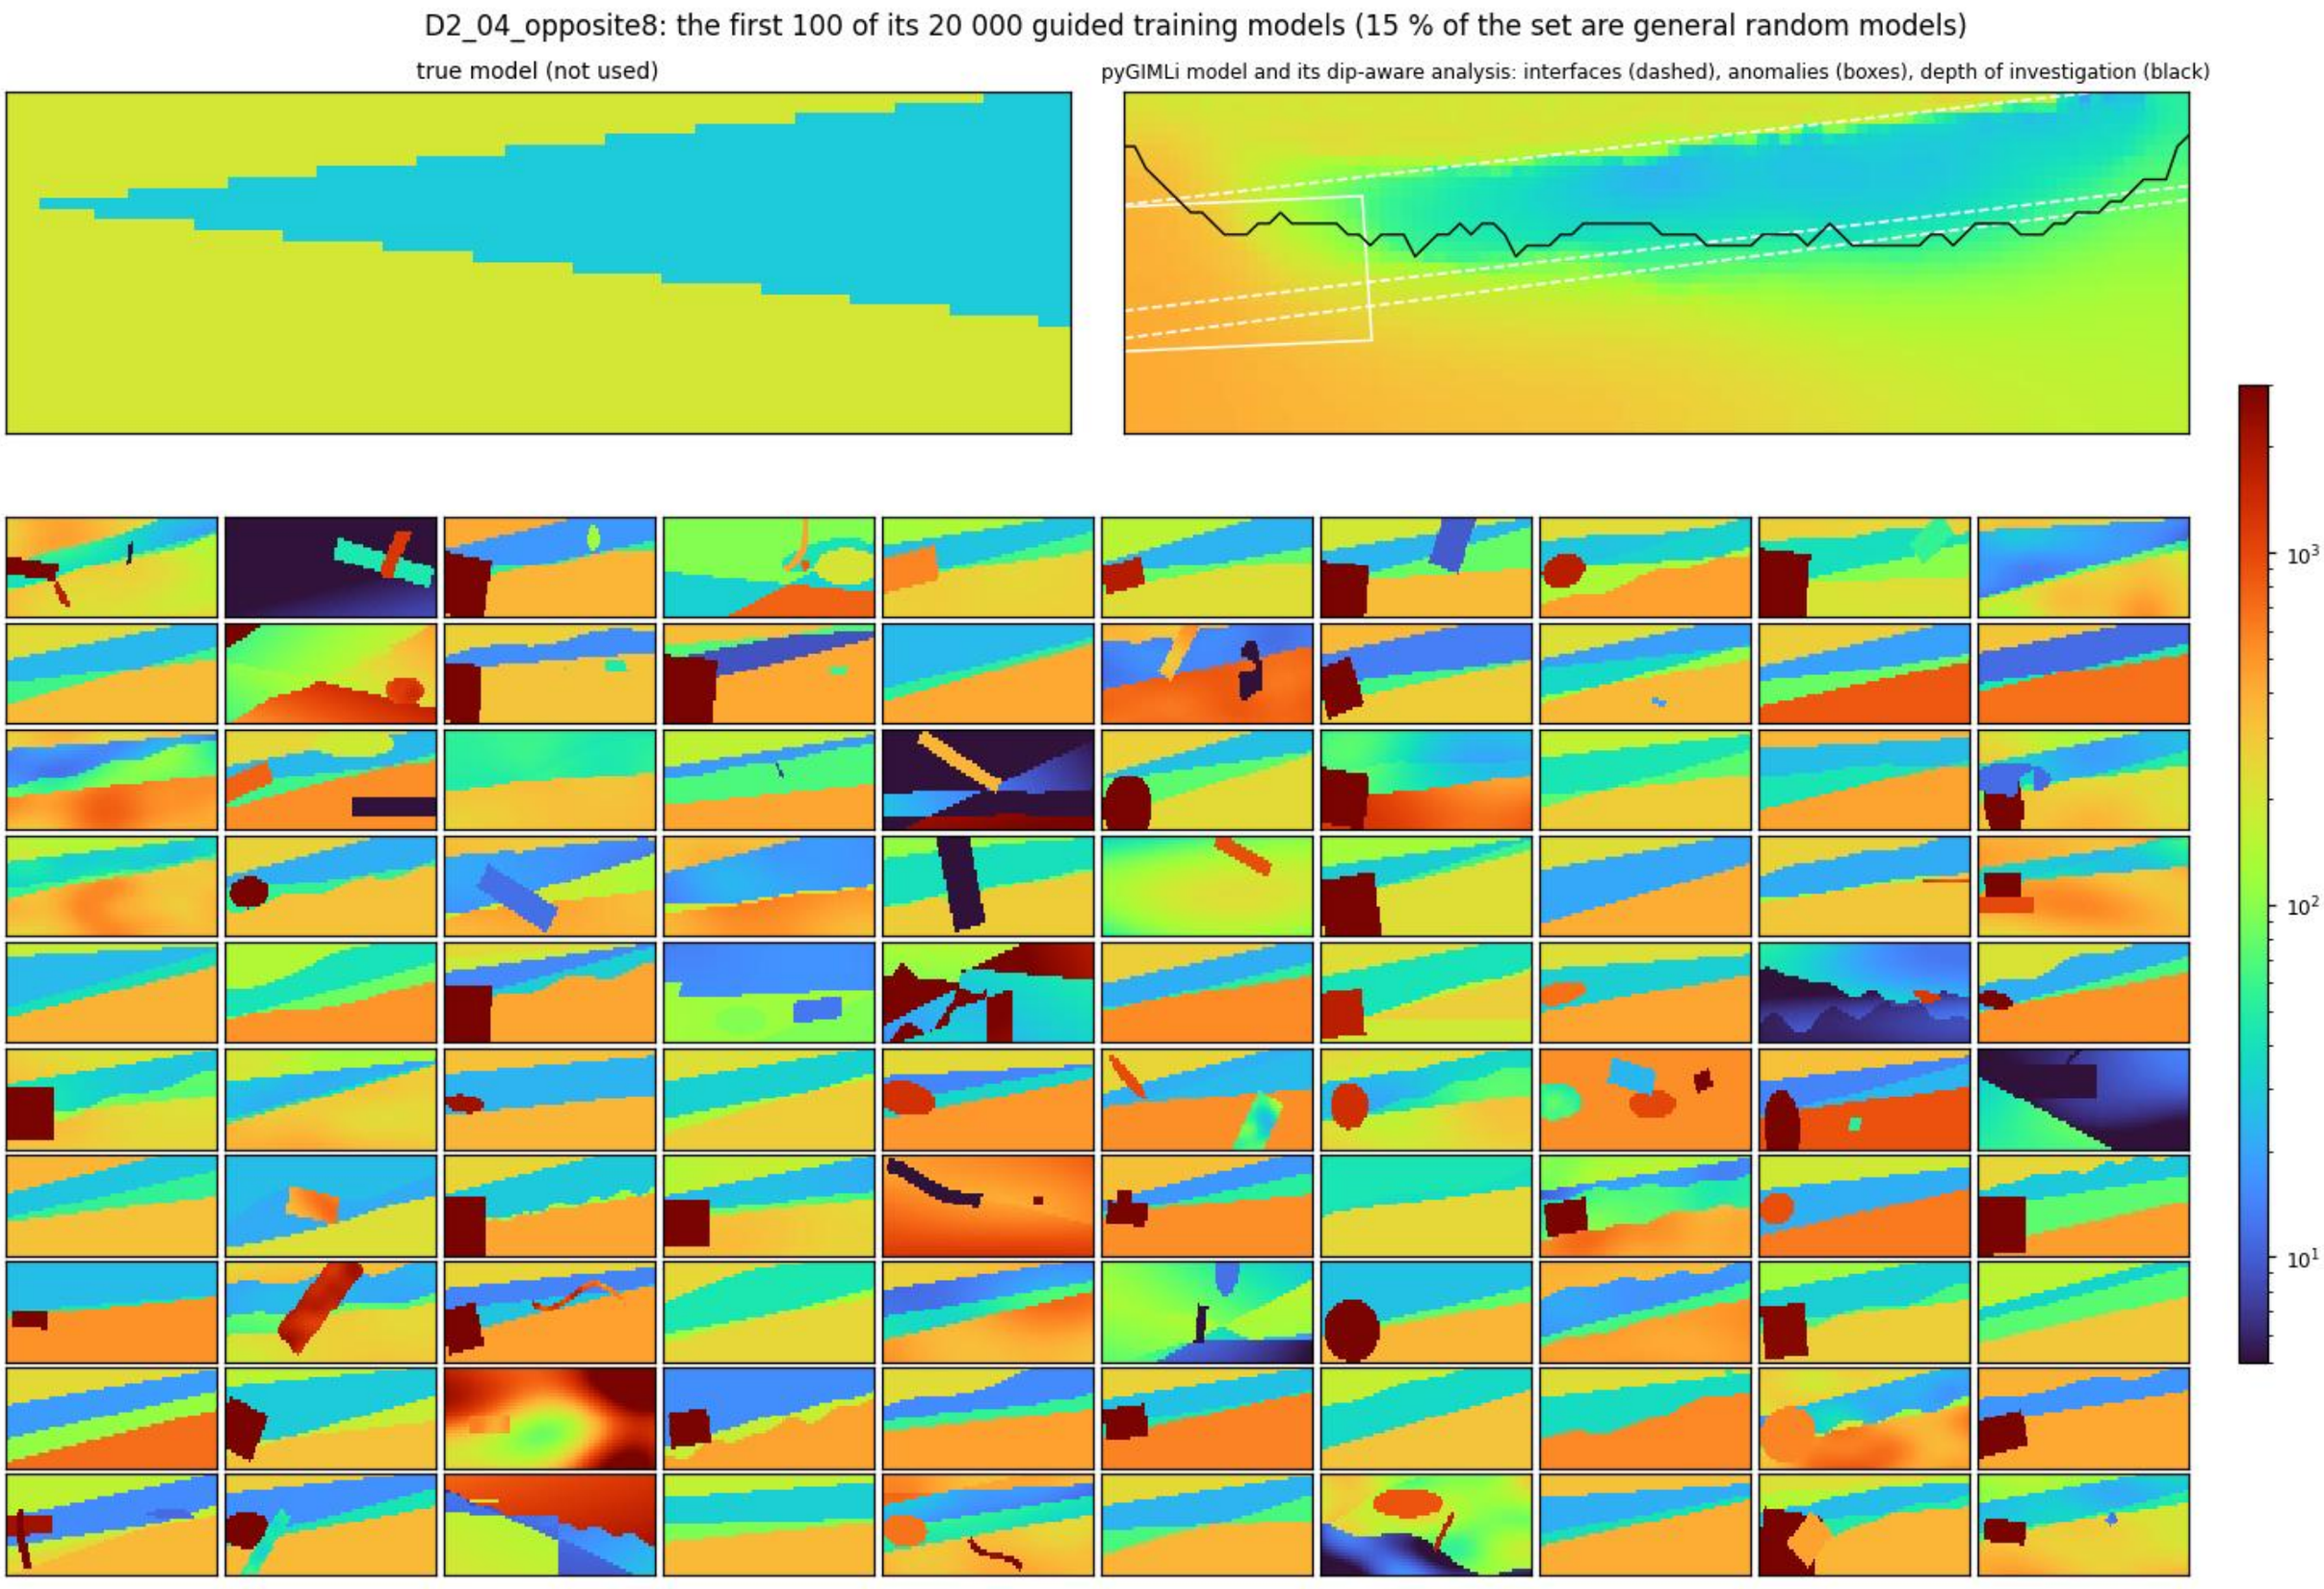
D2_04_opposite8: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S39

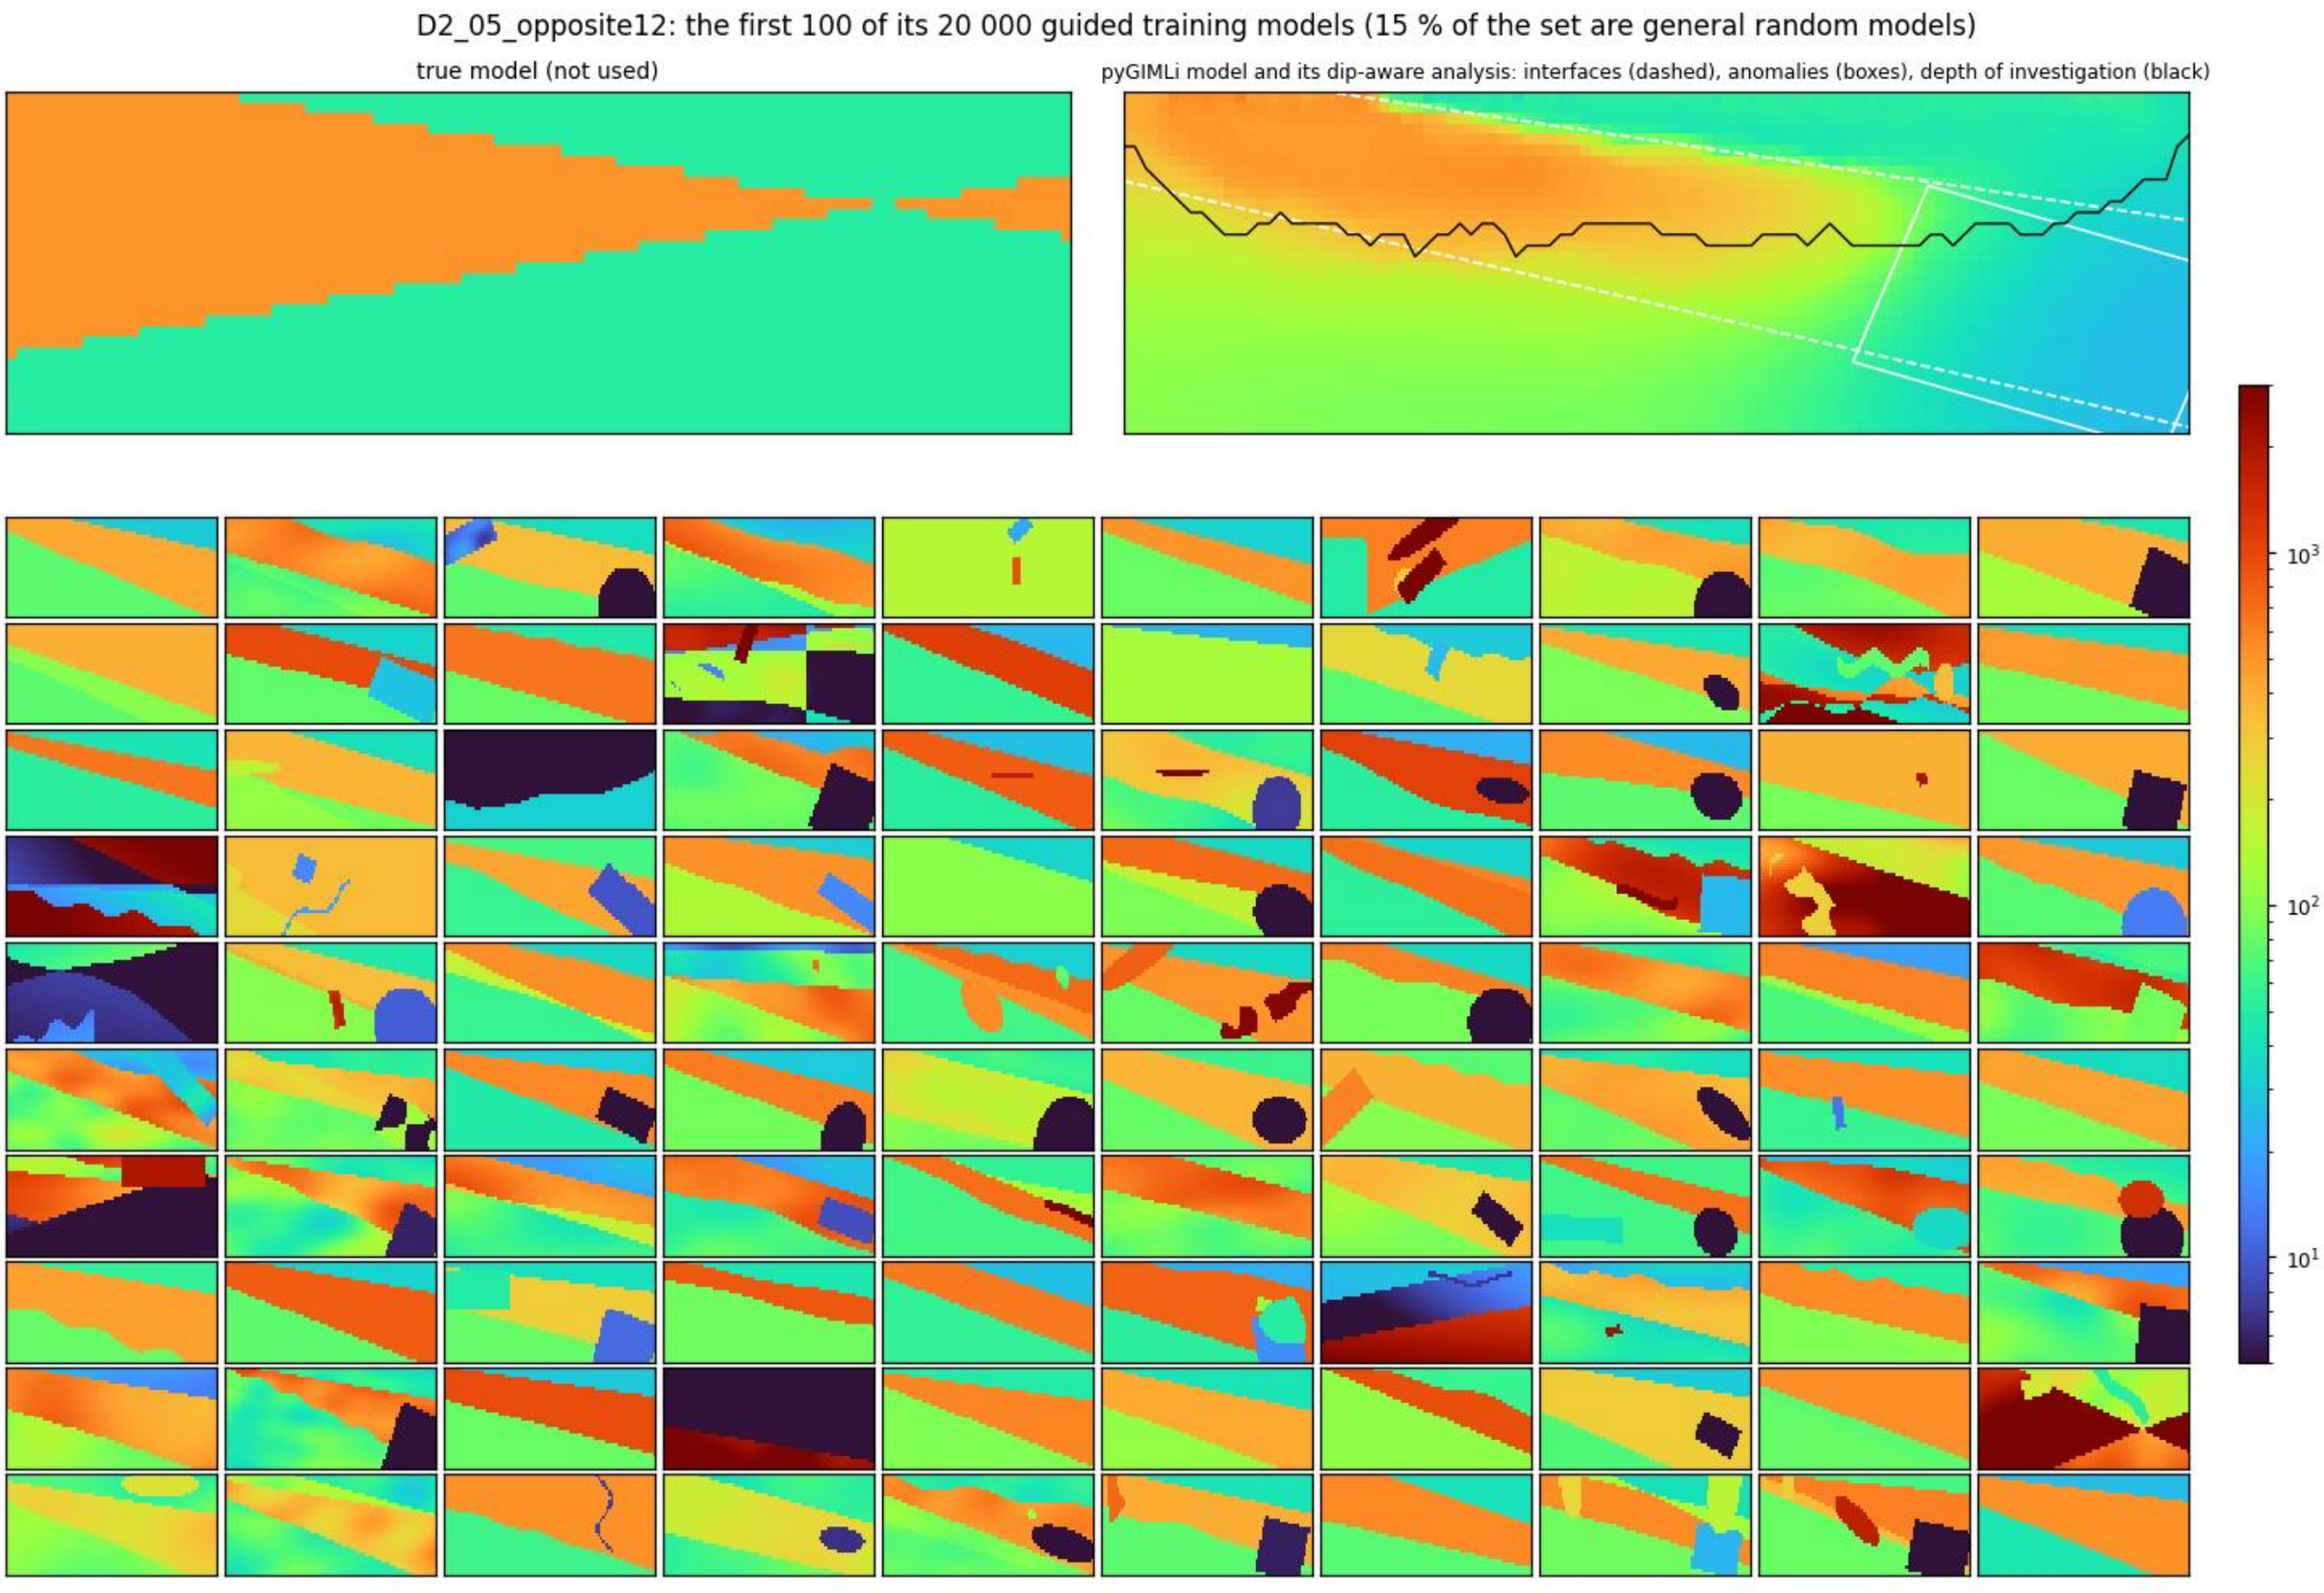
D2_05_opposite12: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S40

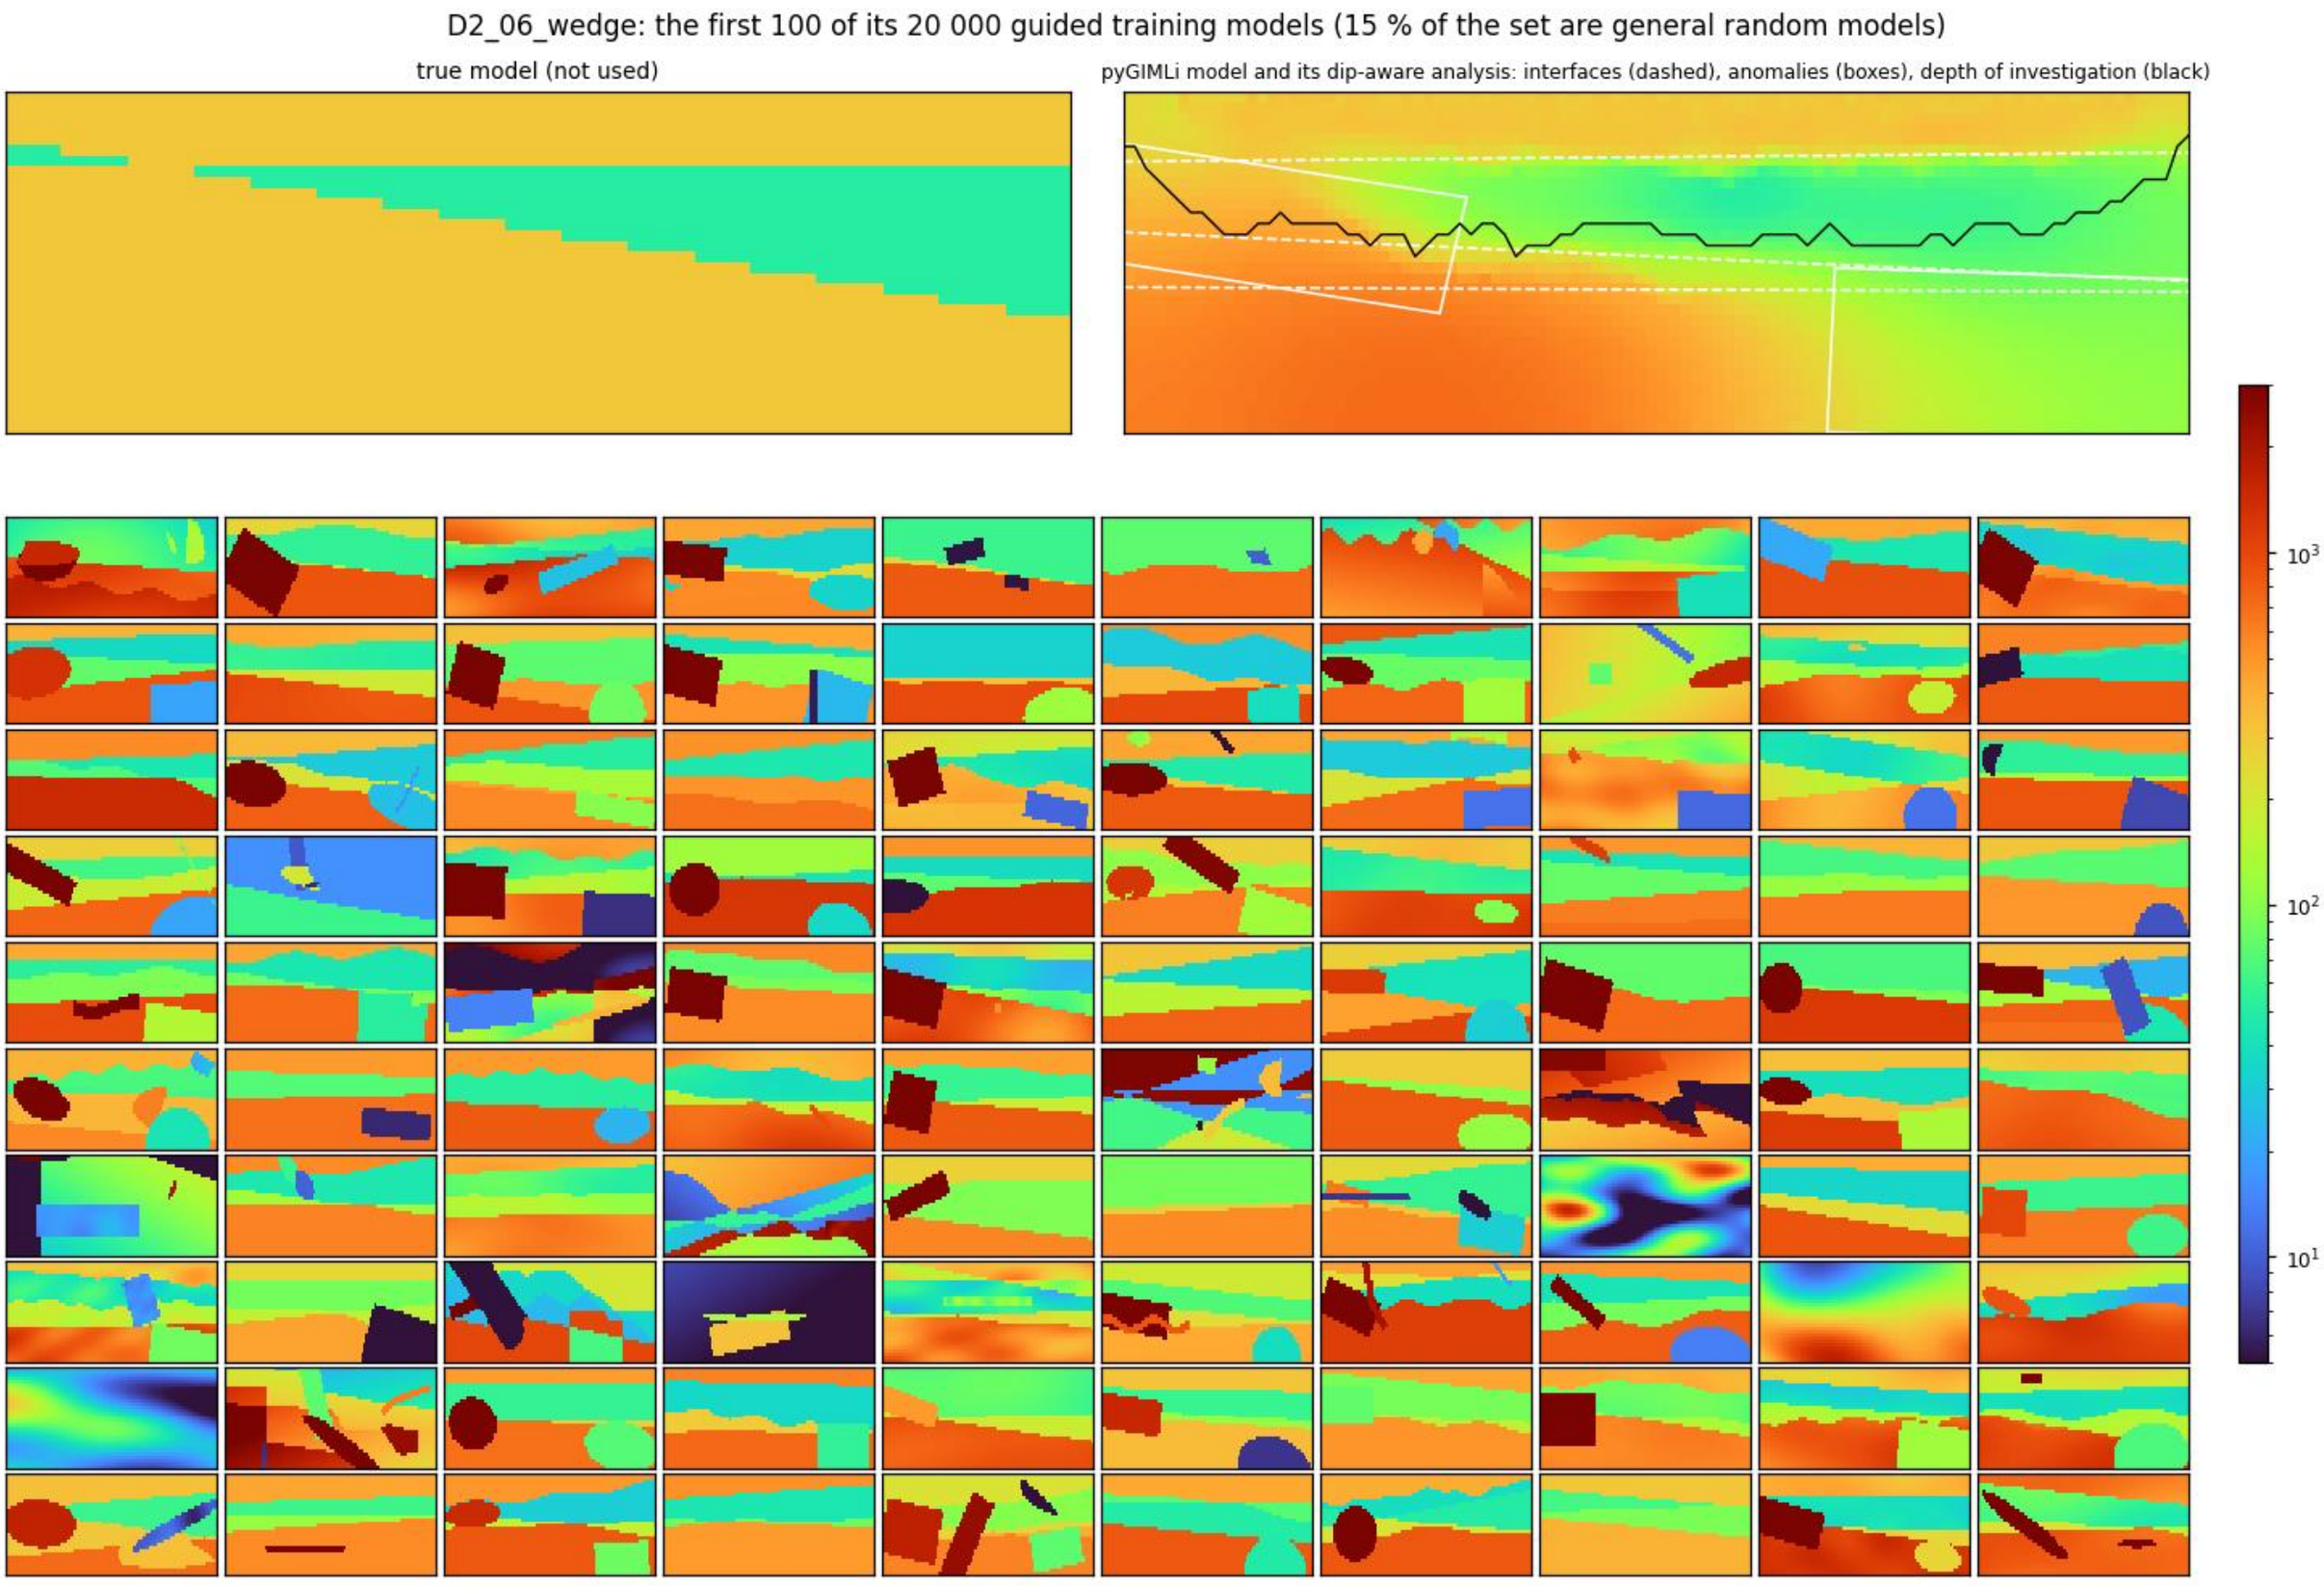
D2_06_wedge: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S41

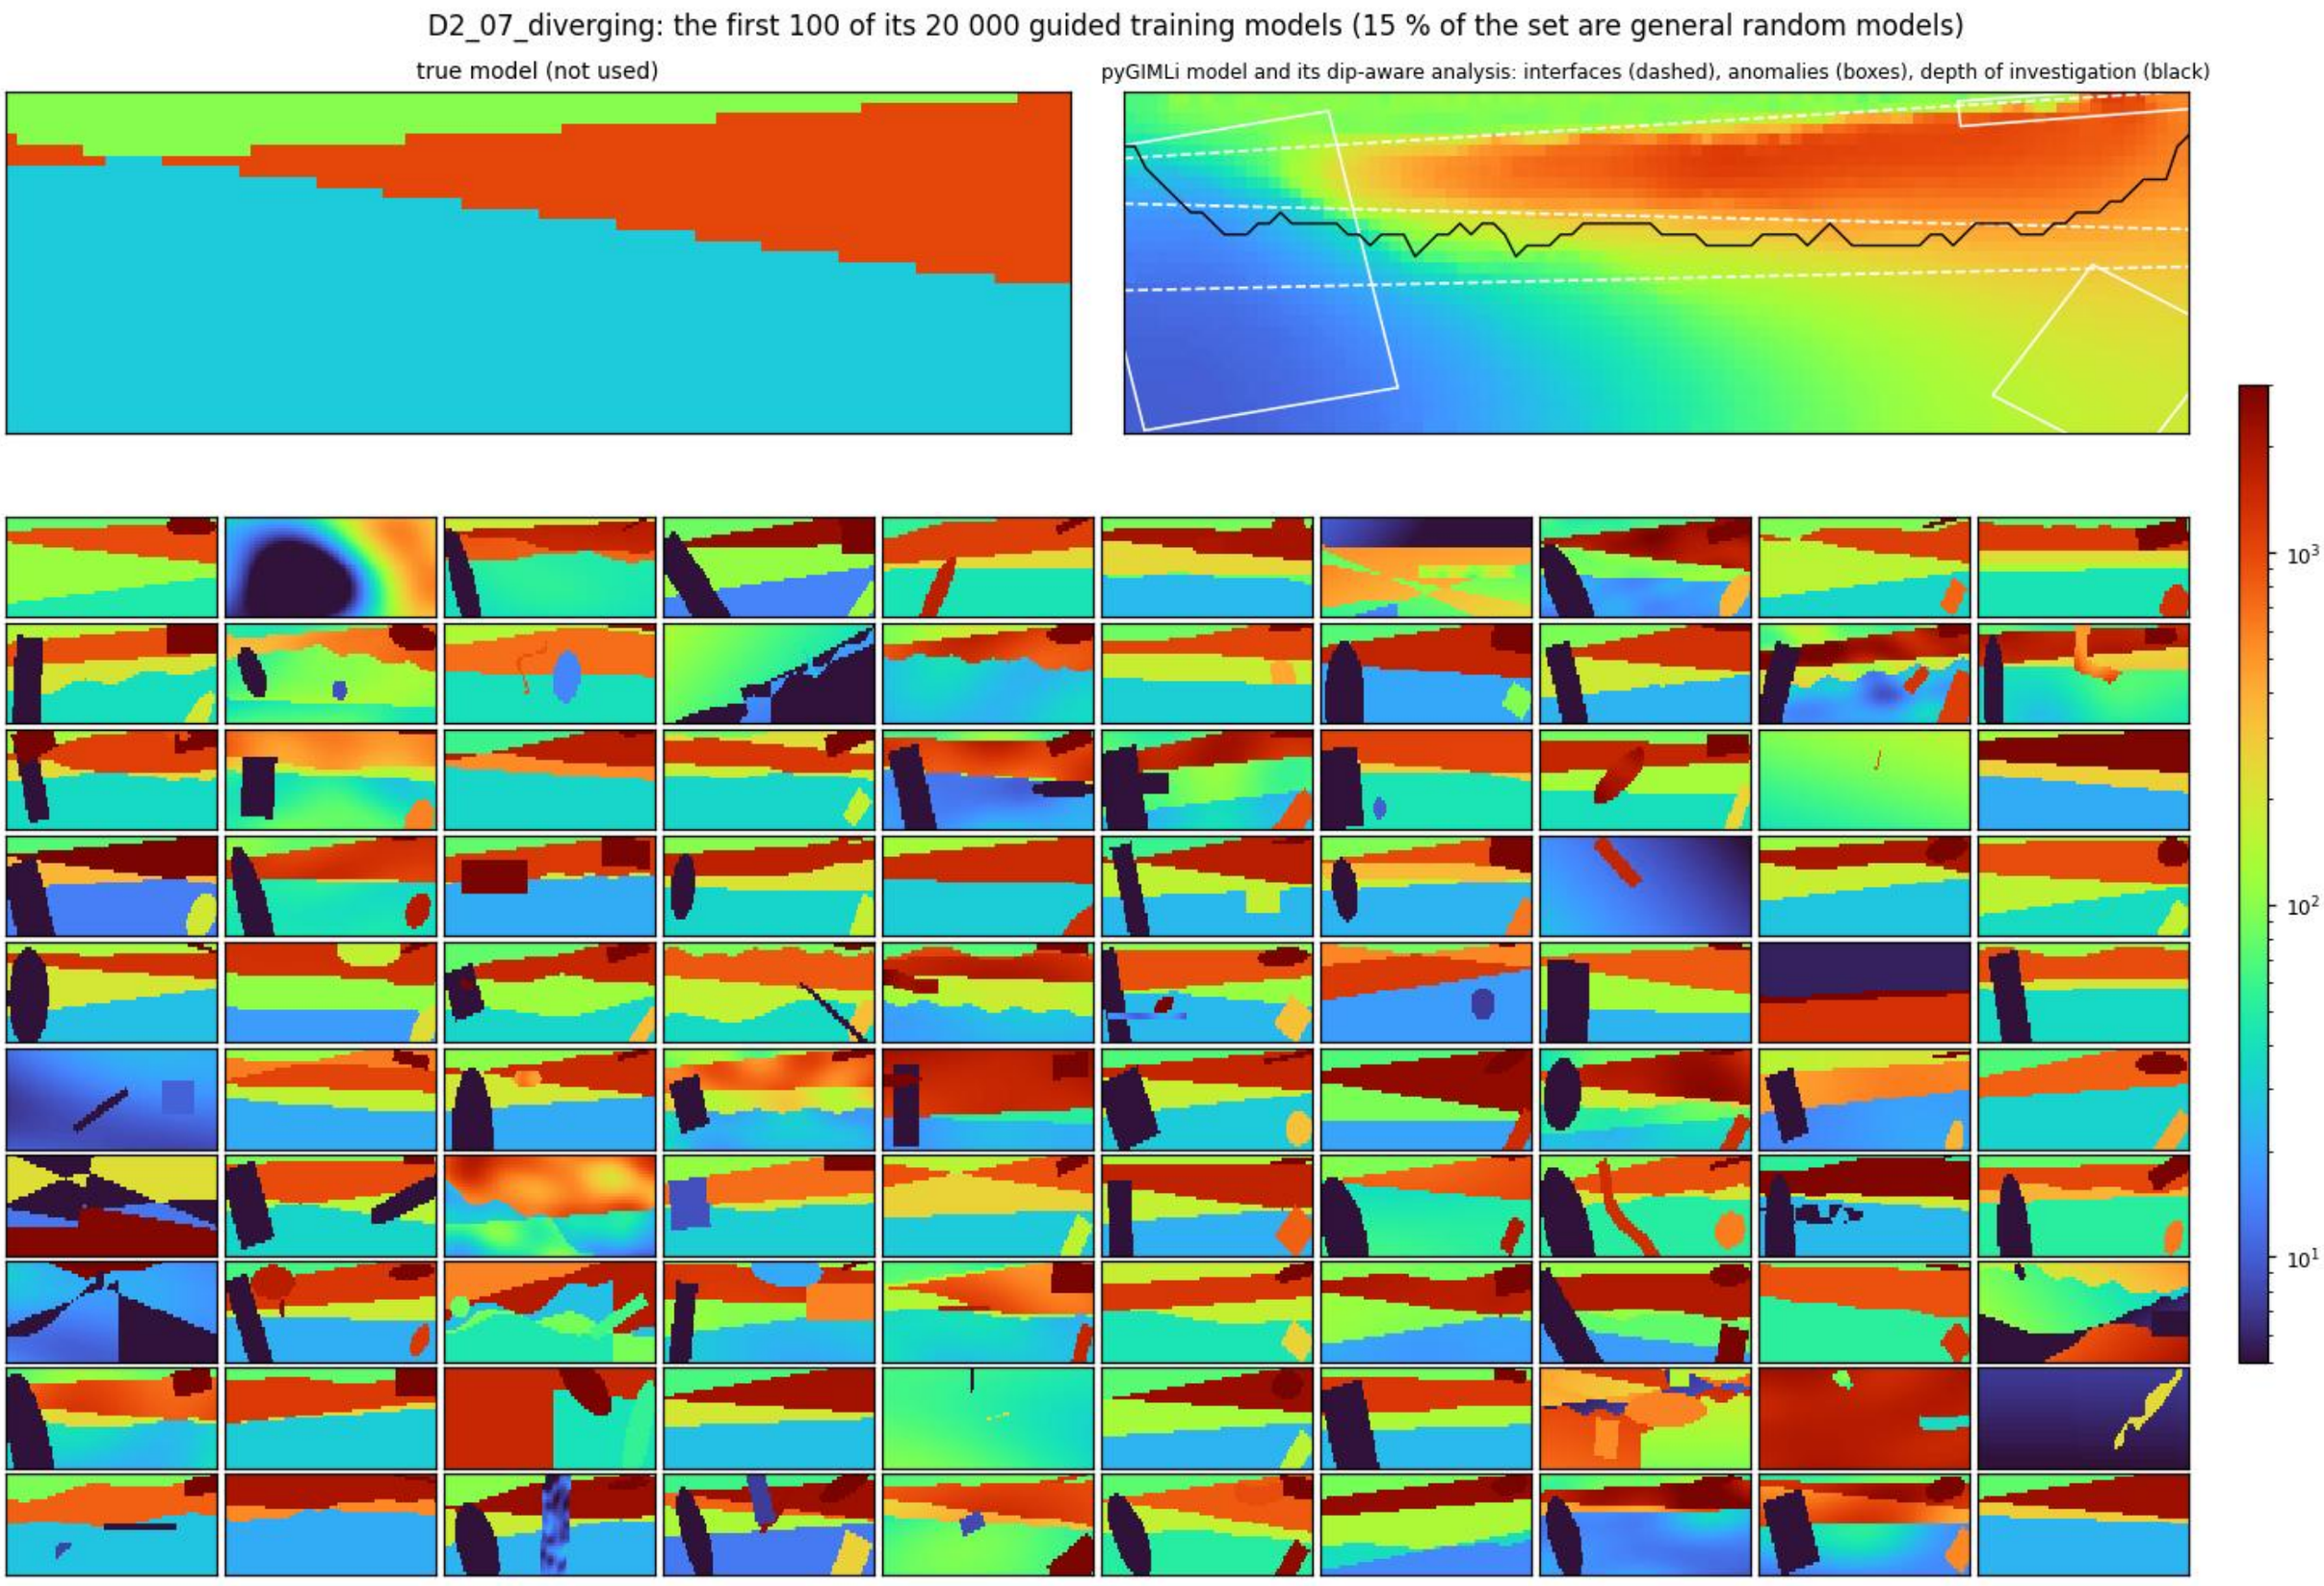
D2_07_diverging: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S42

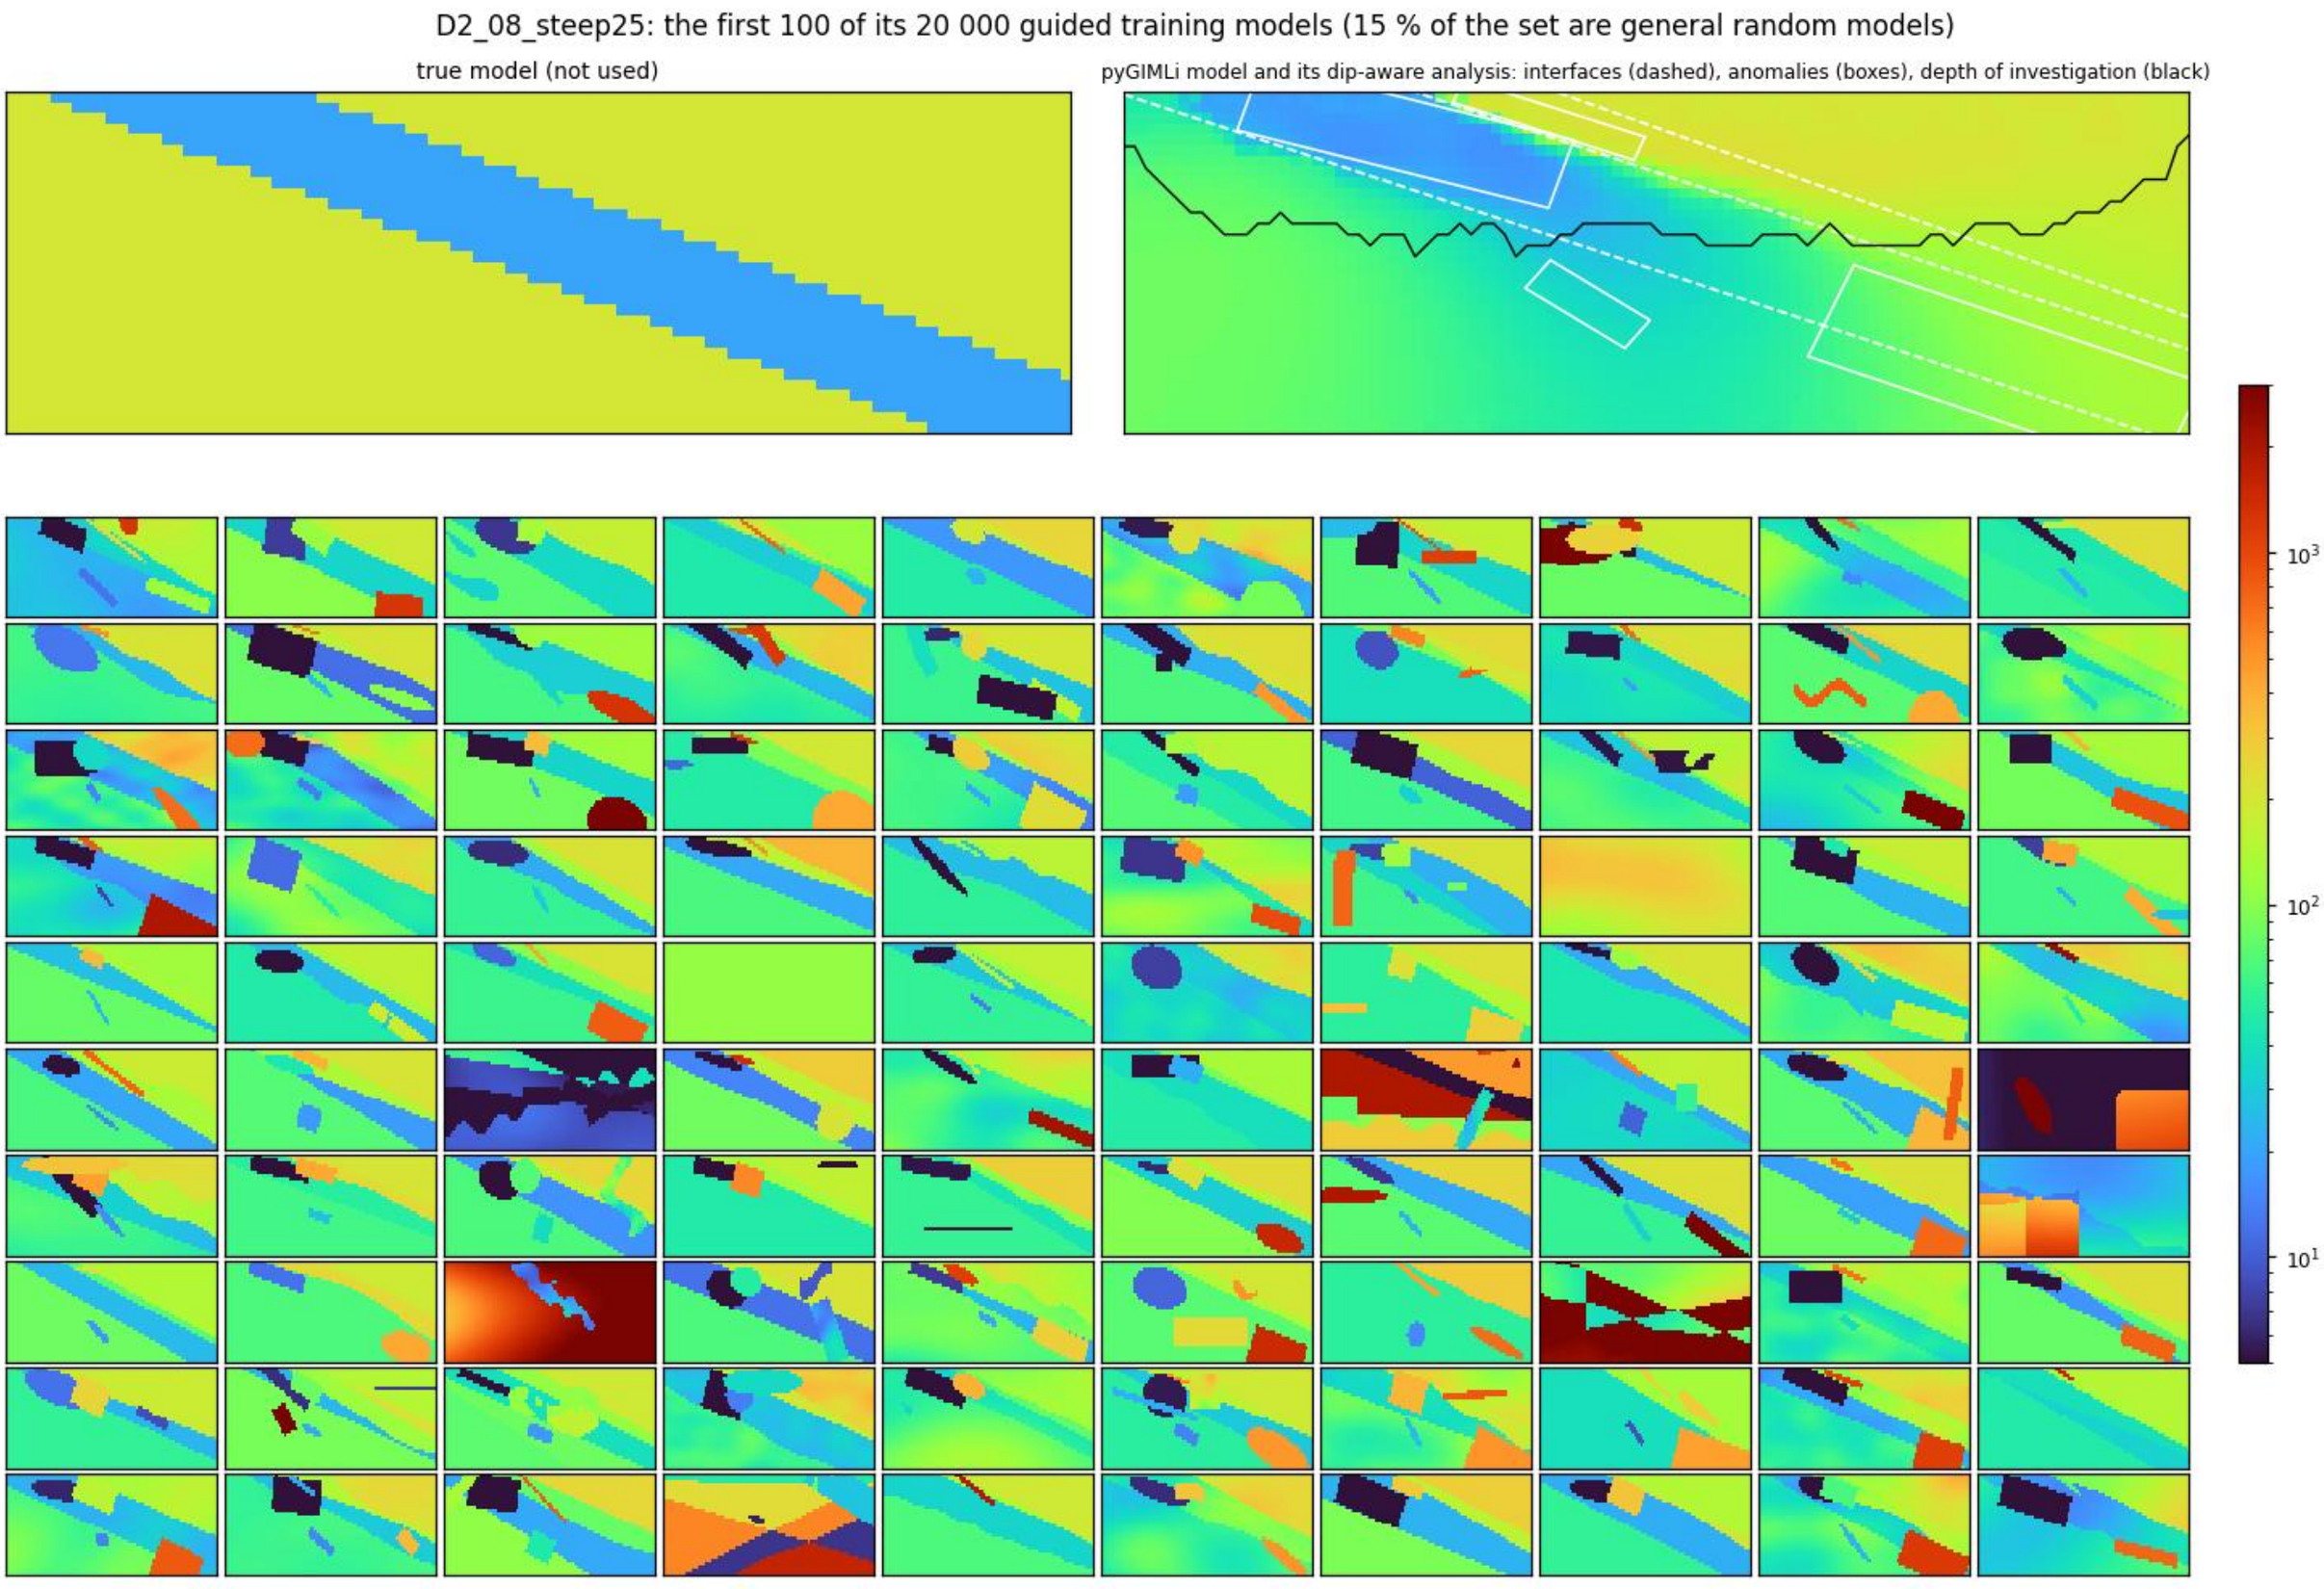
D2_08_steep25: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S43

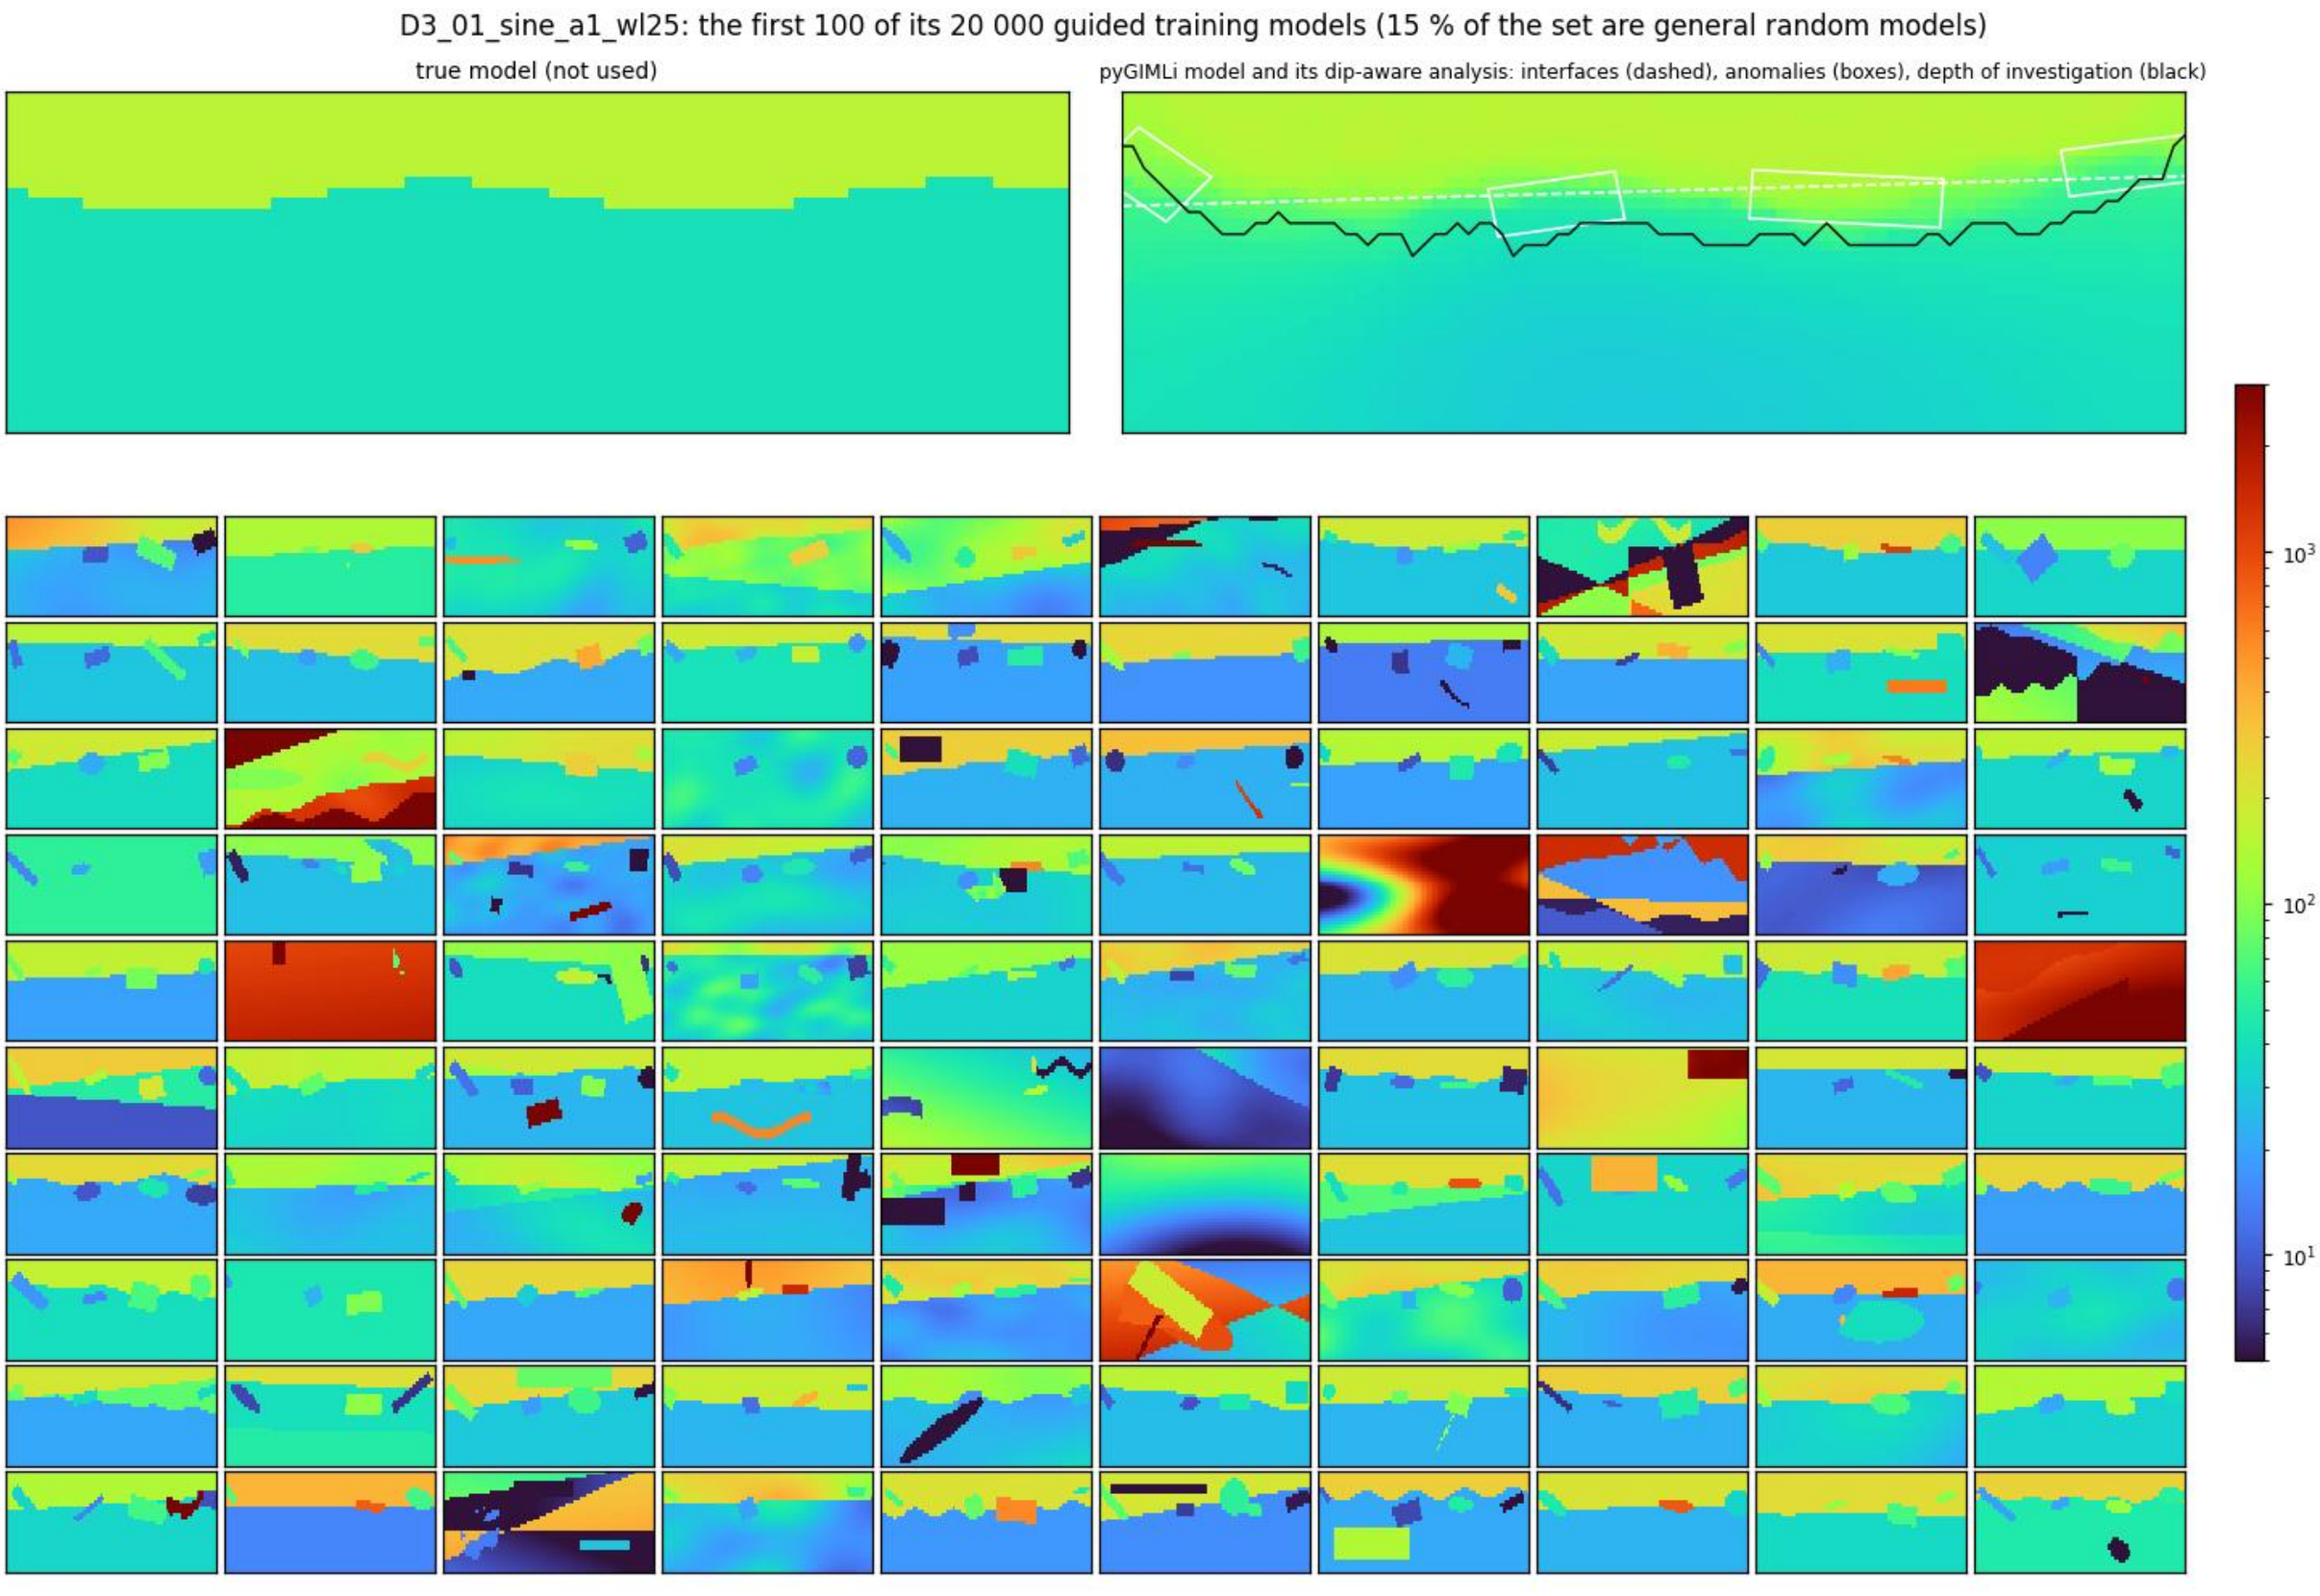
D3_01_sine_a1_wl25: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S44

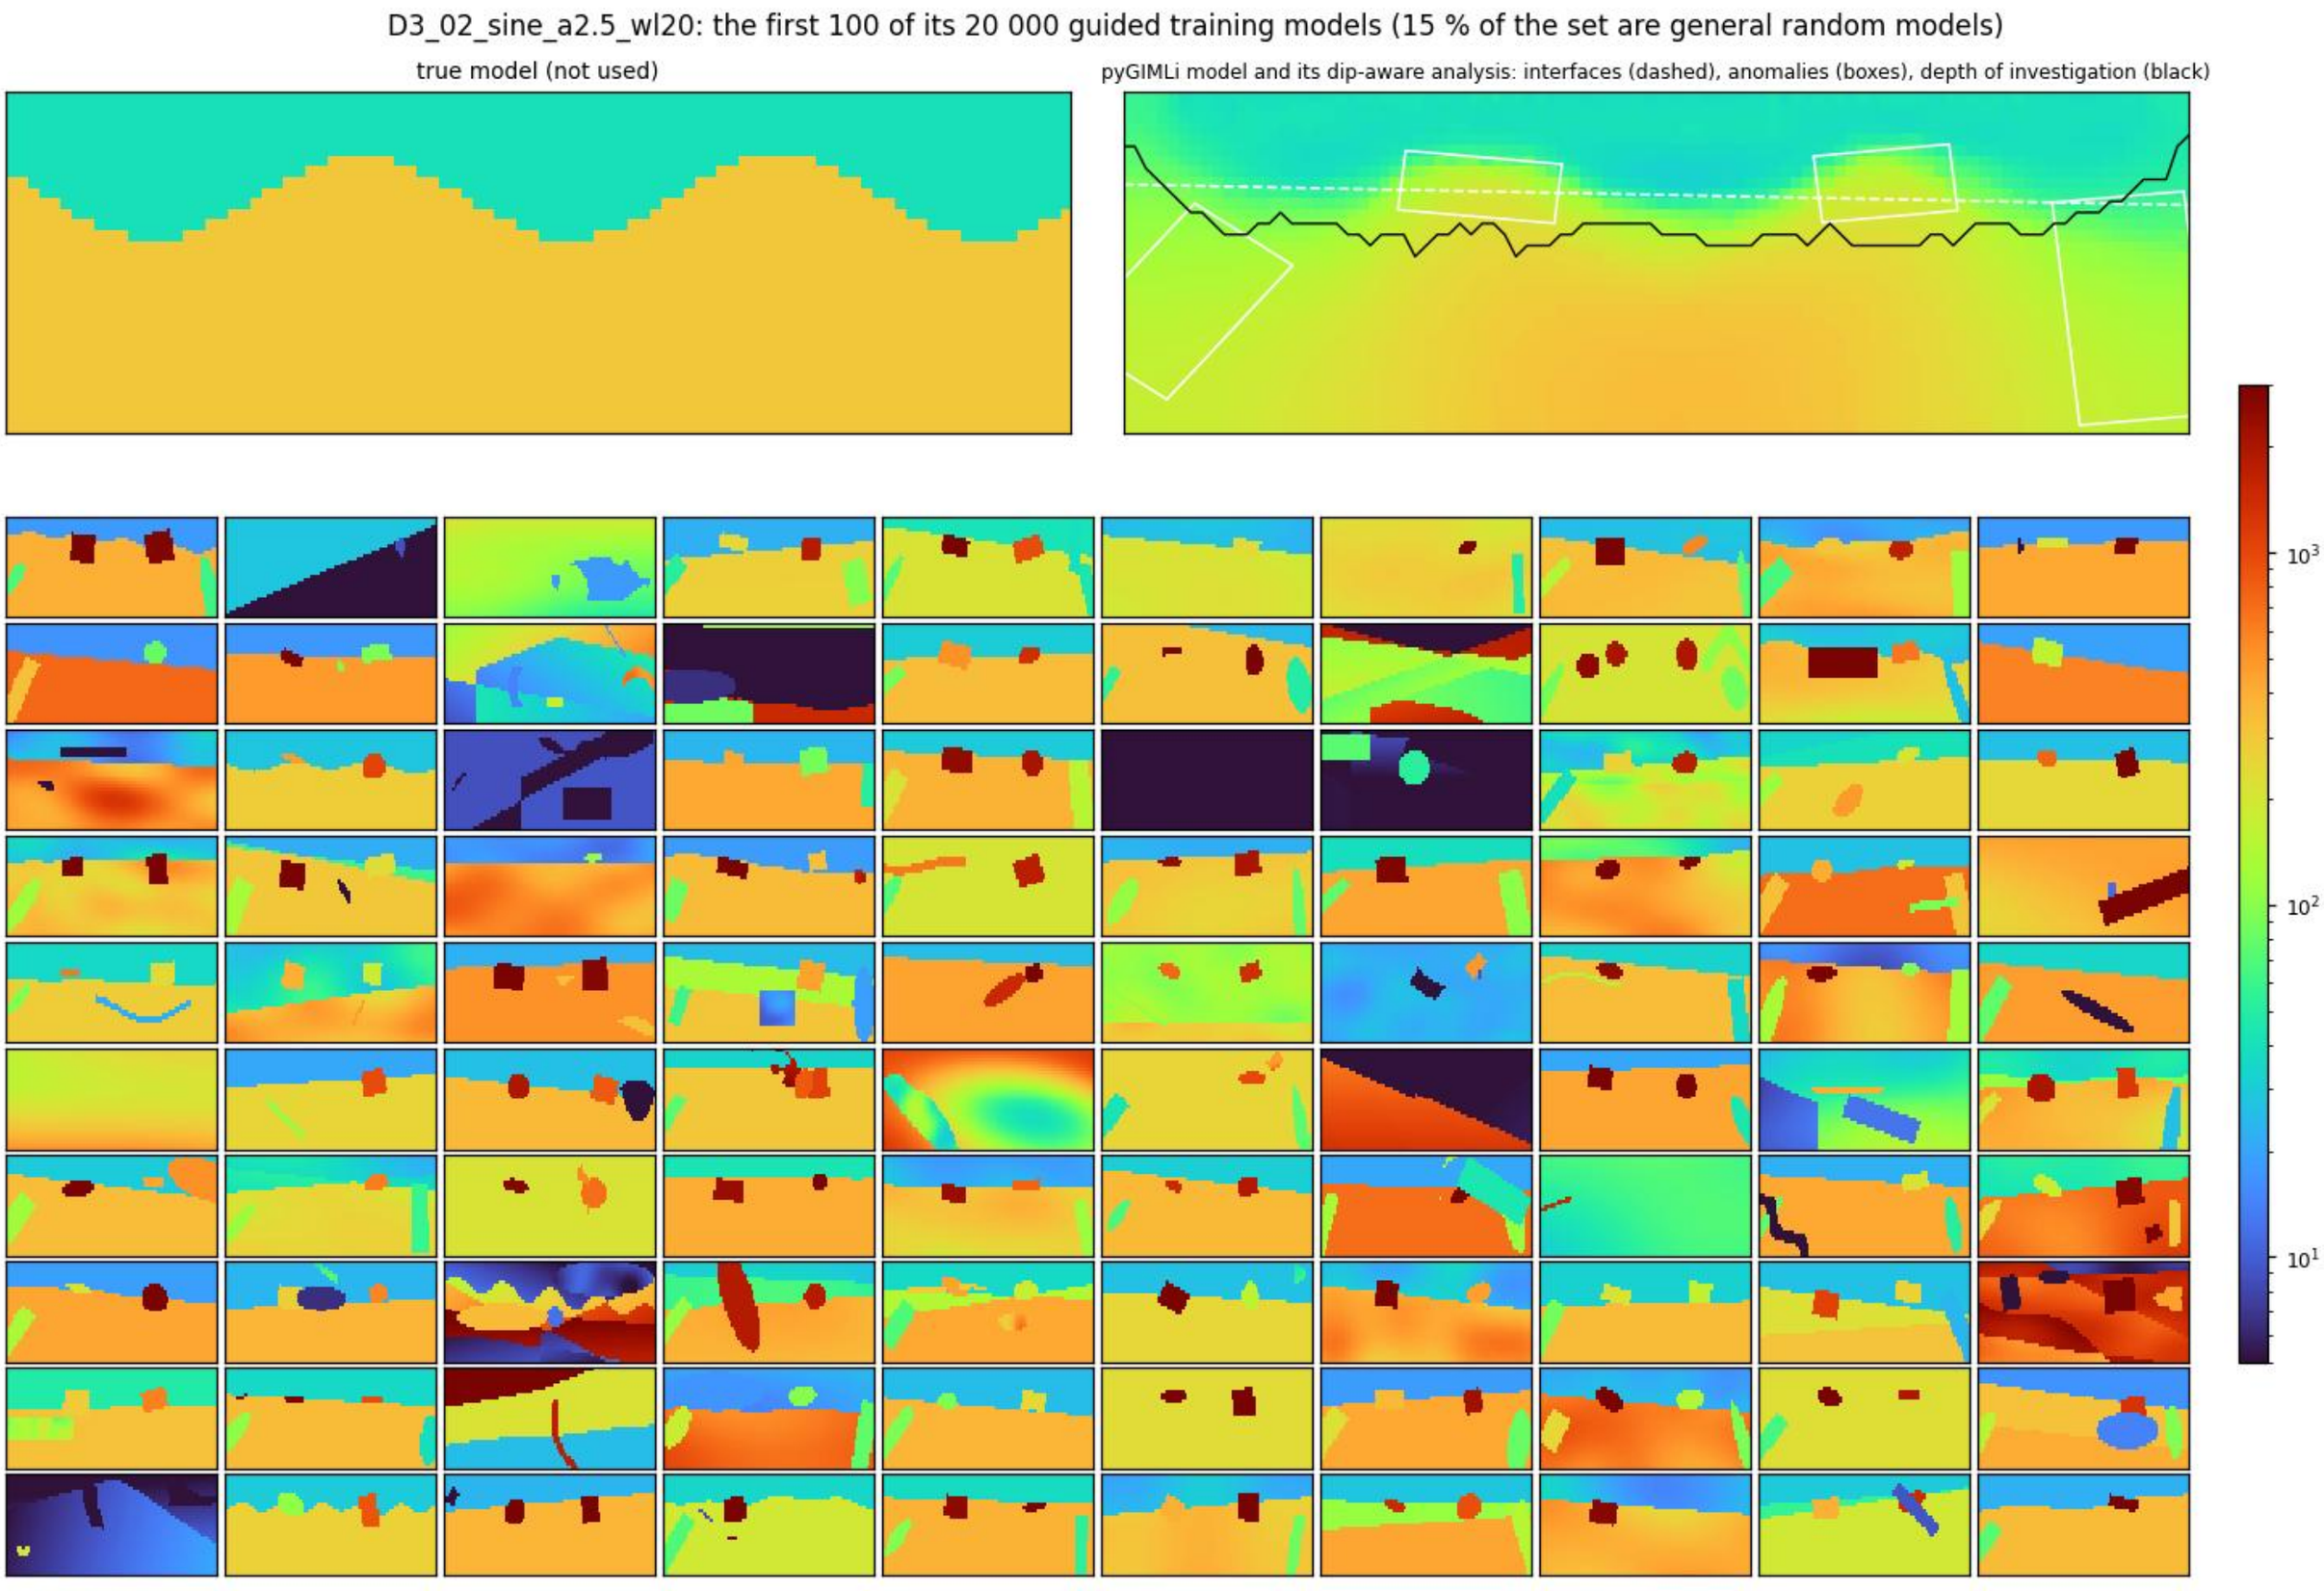
D3_02_sine_a2.5_wl20: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S45

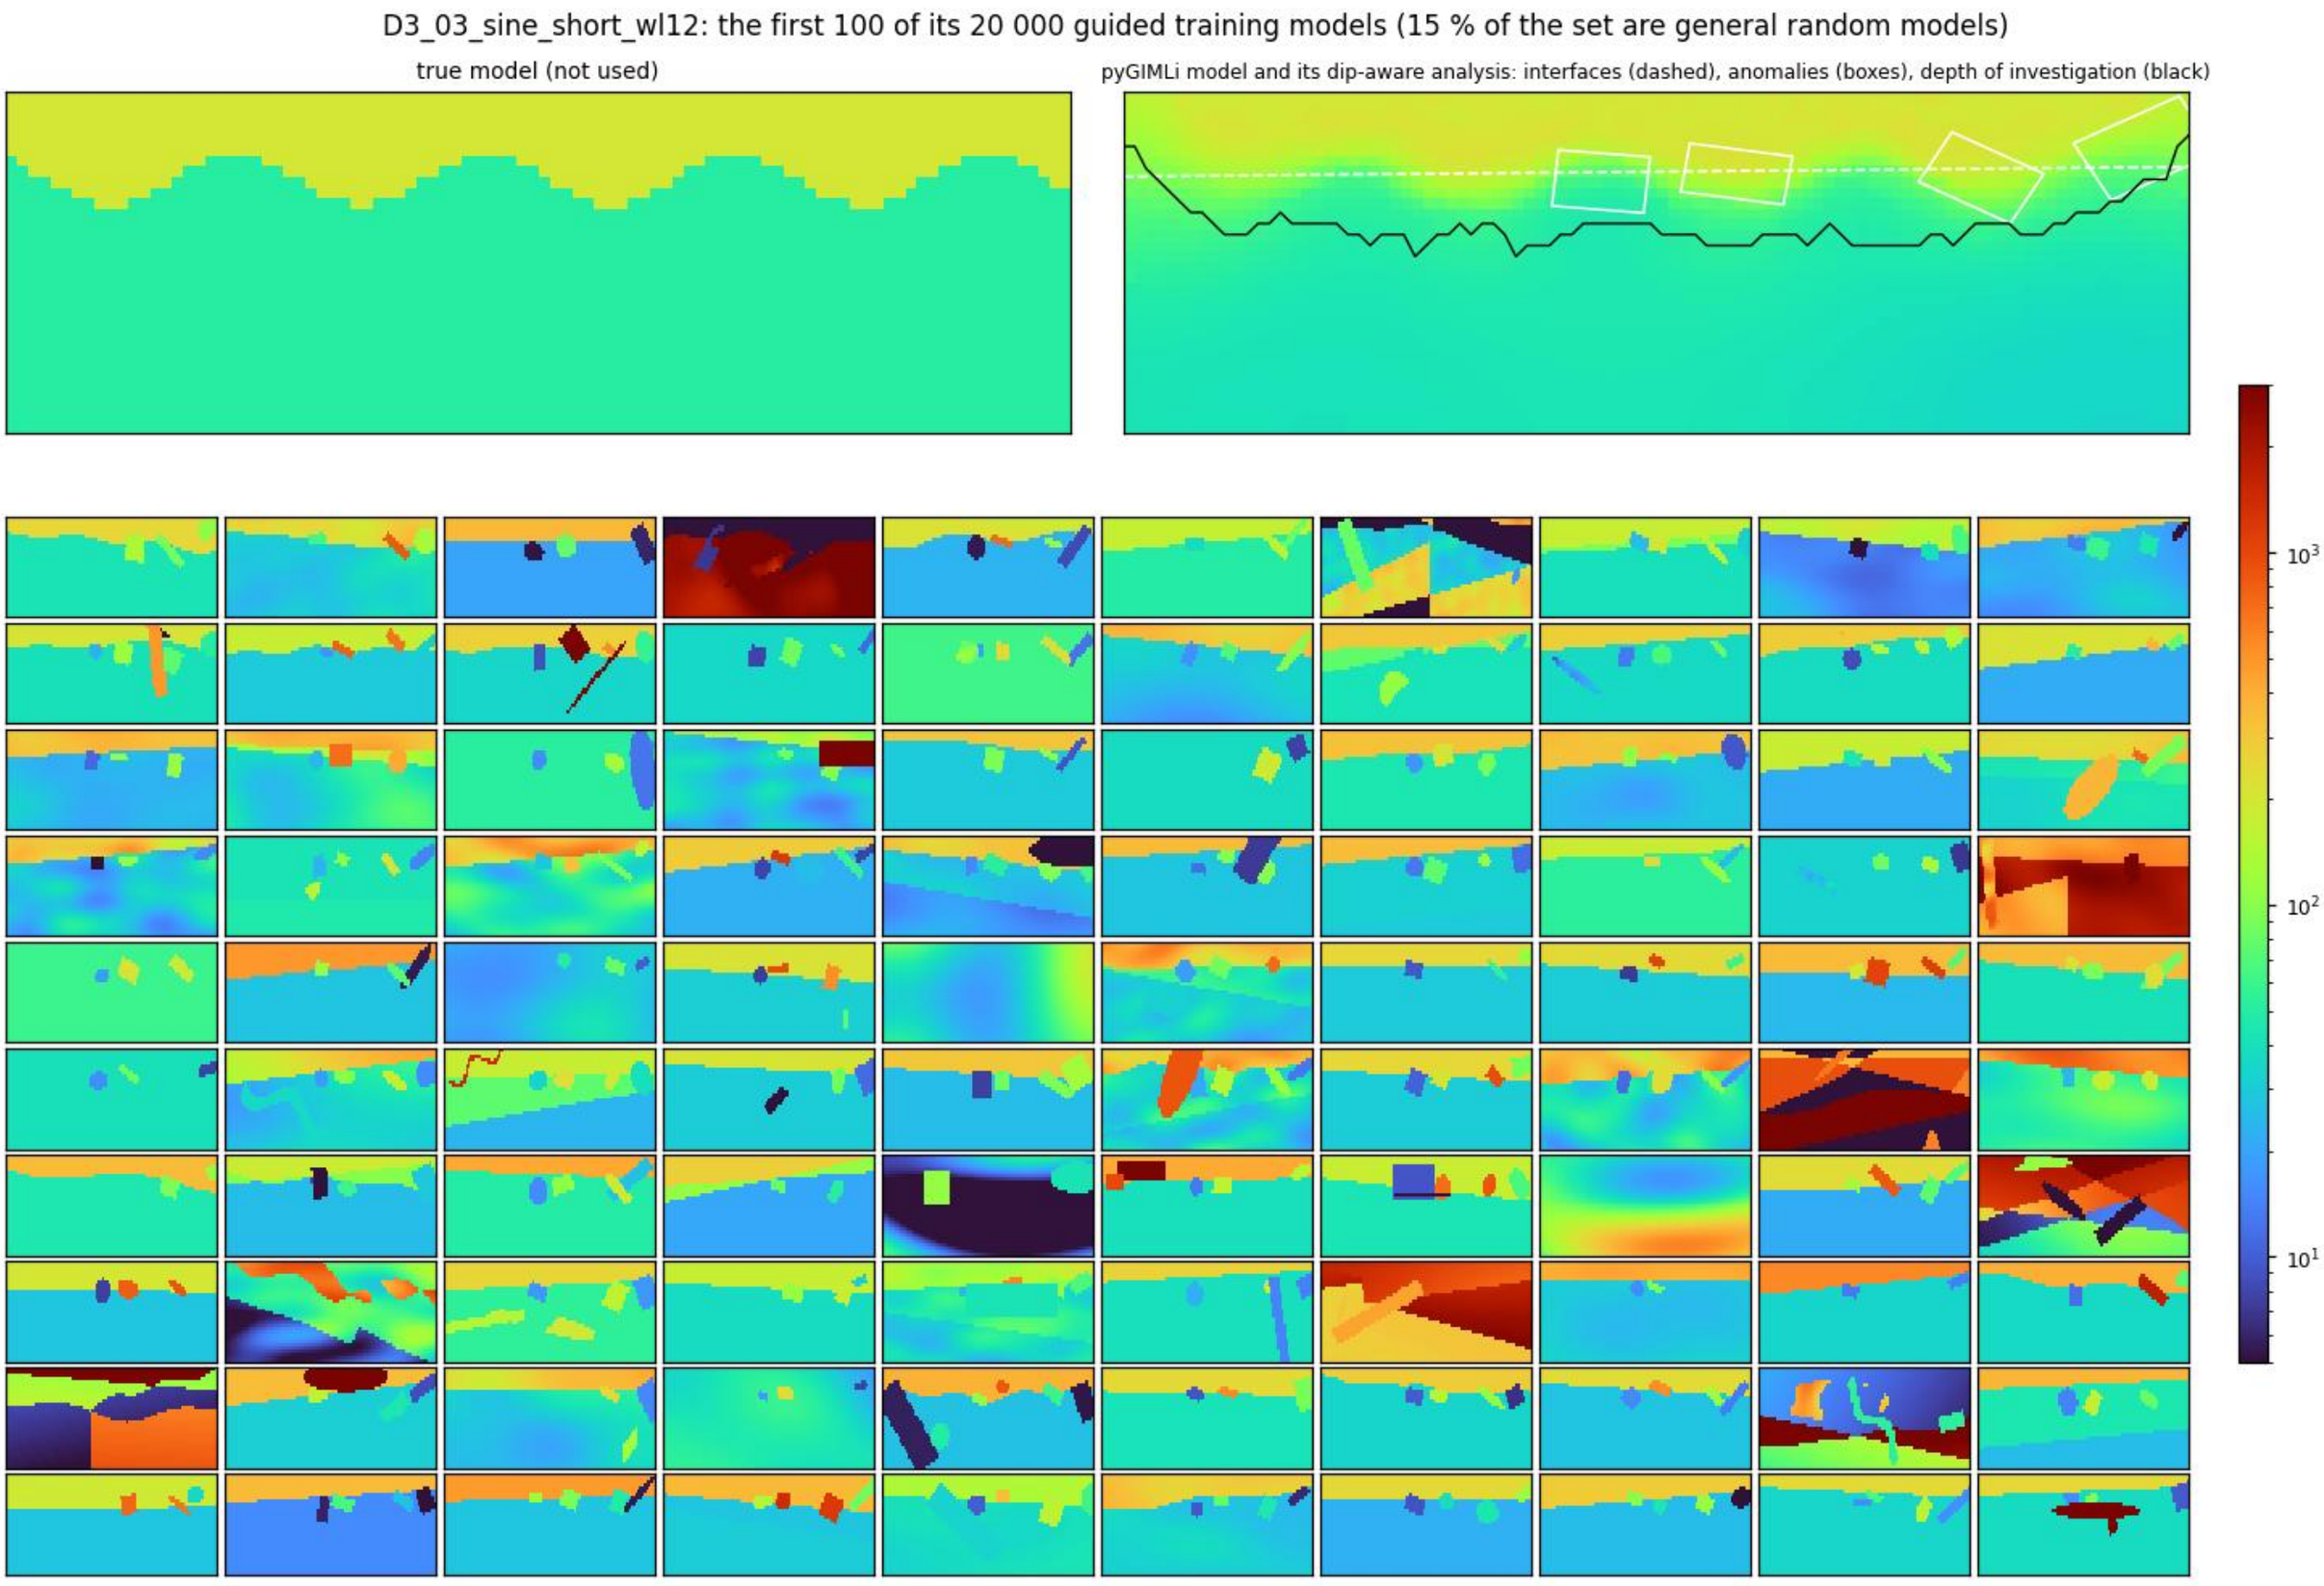
D3_03_sine_short_wl12: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S46

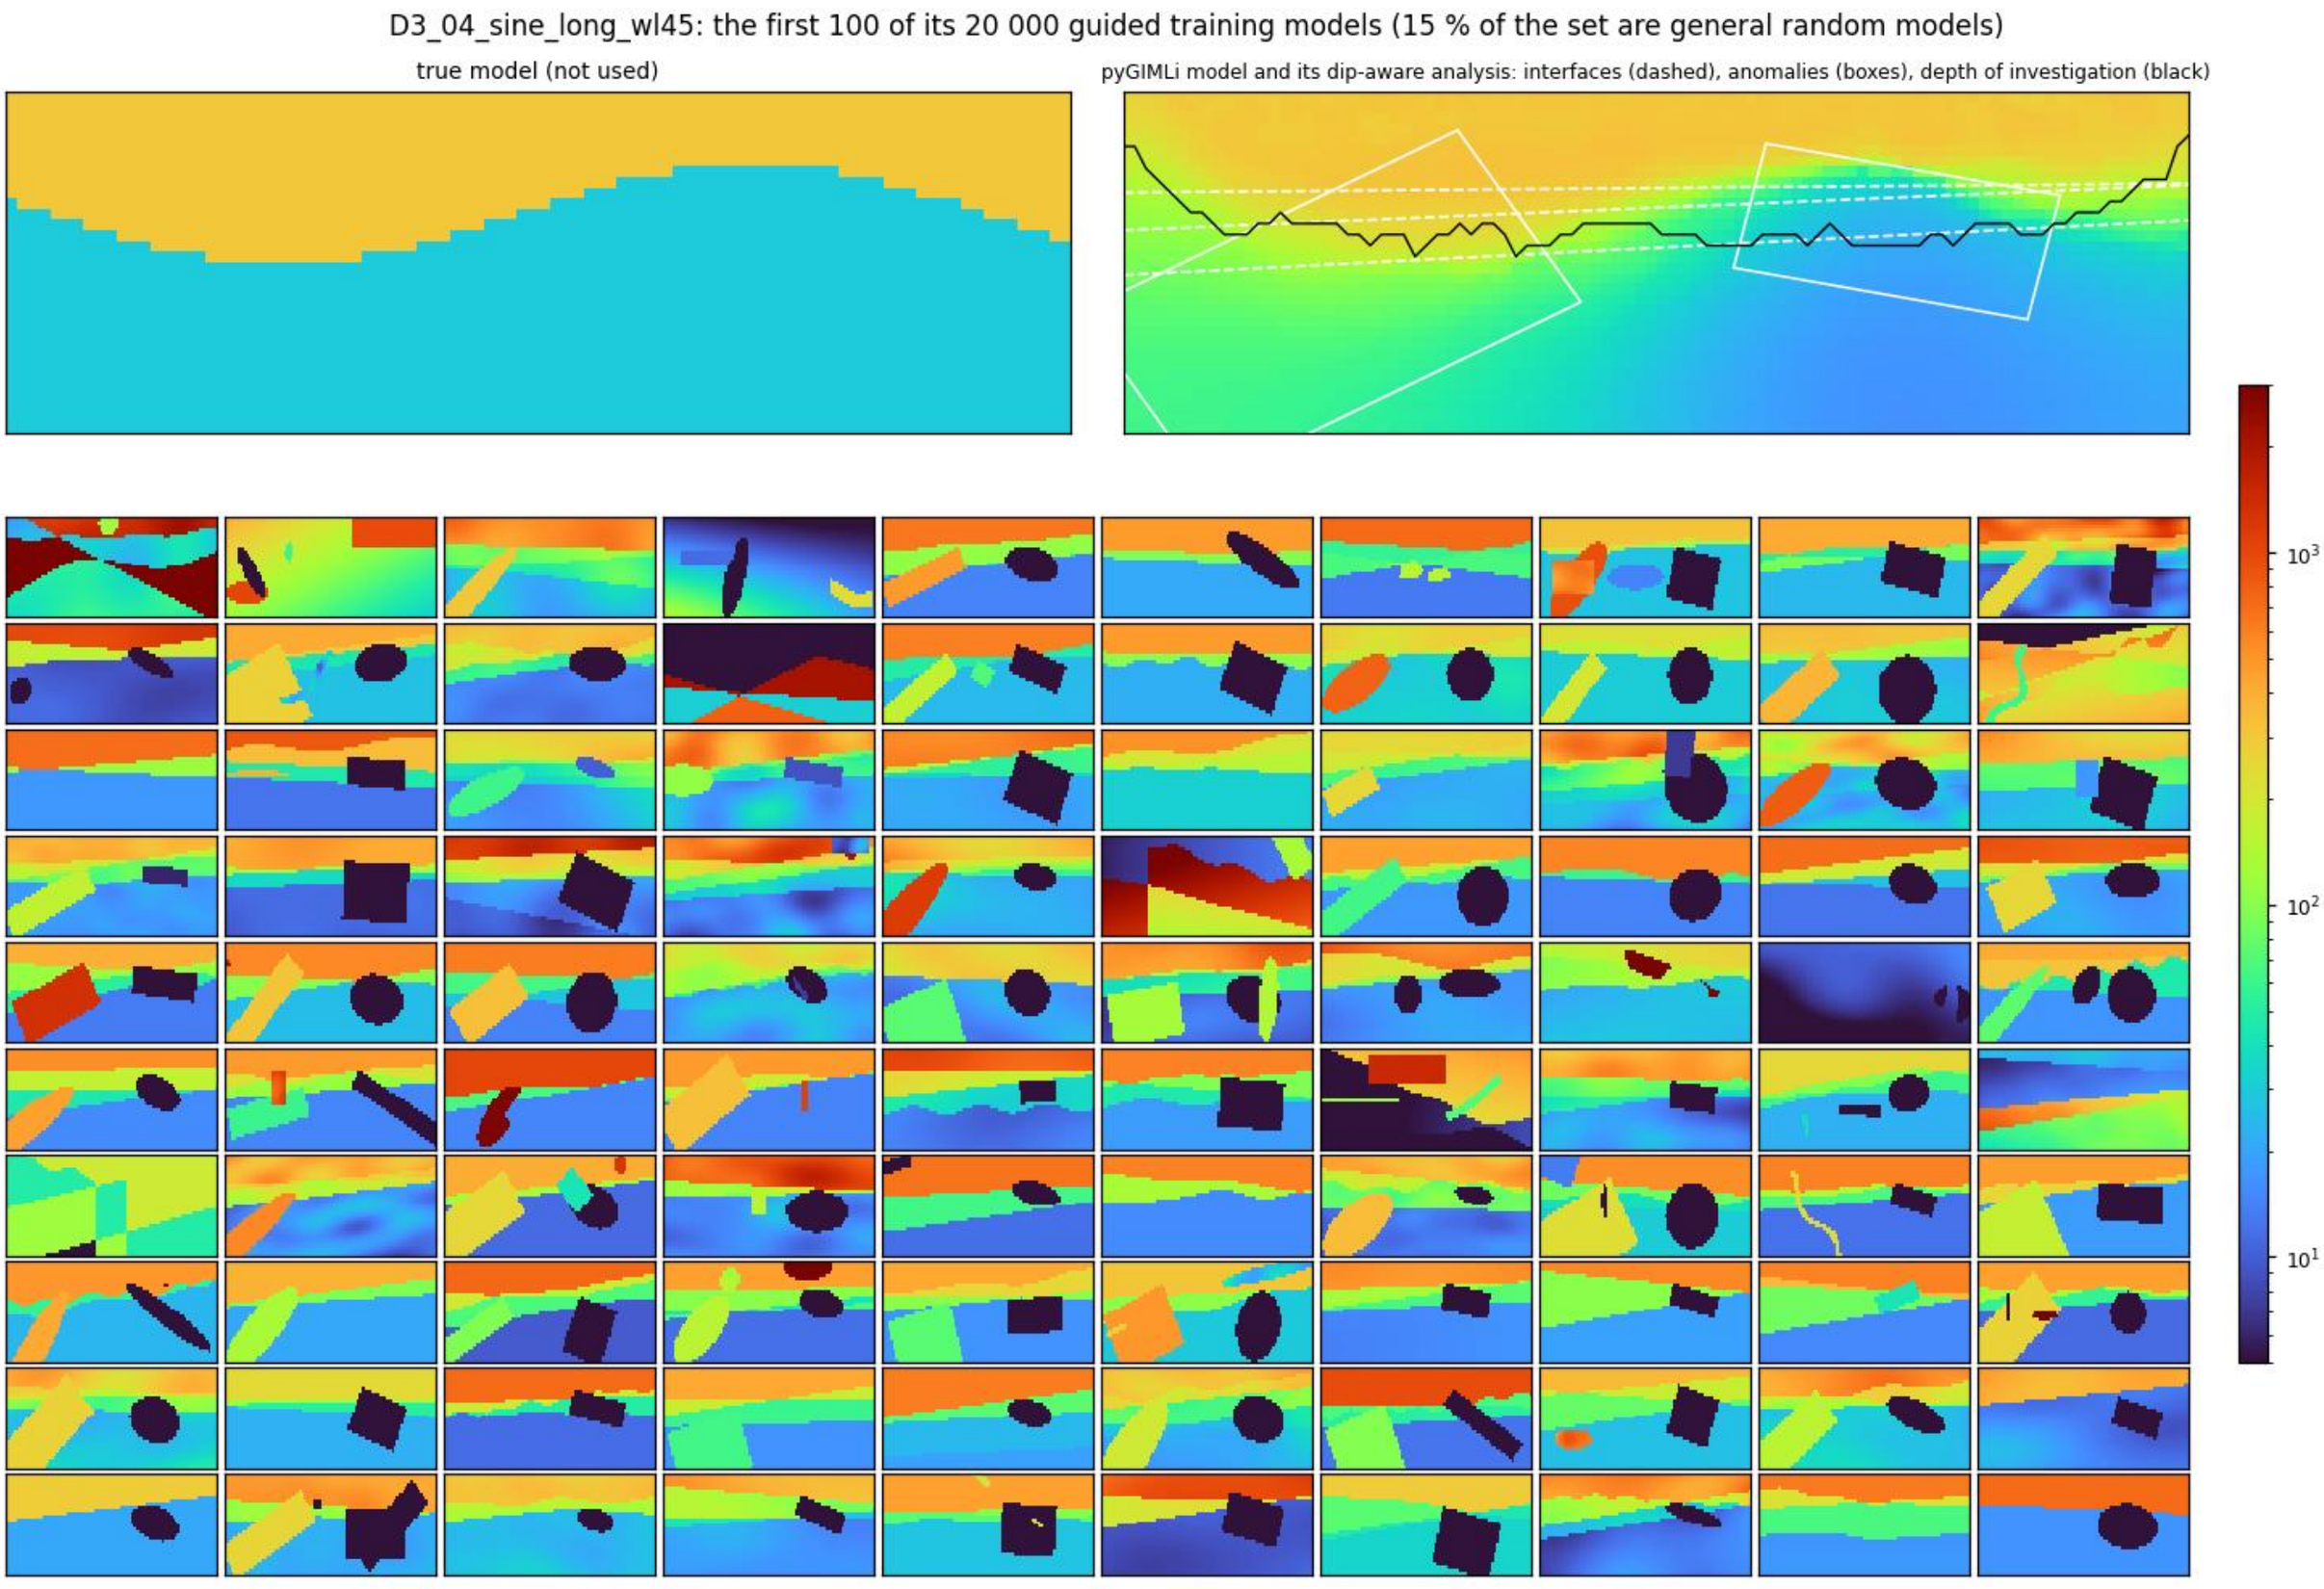
D3_04_sine_long_wl45: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S47

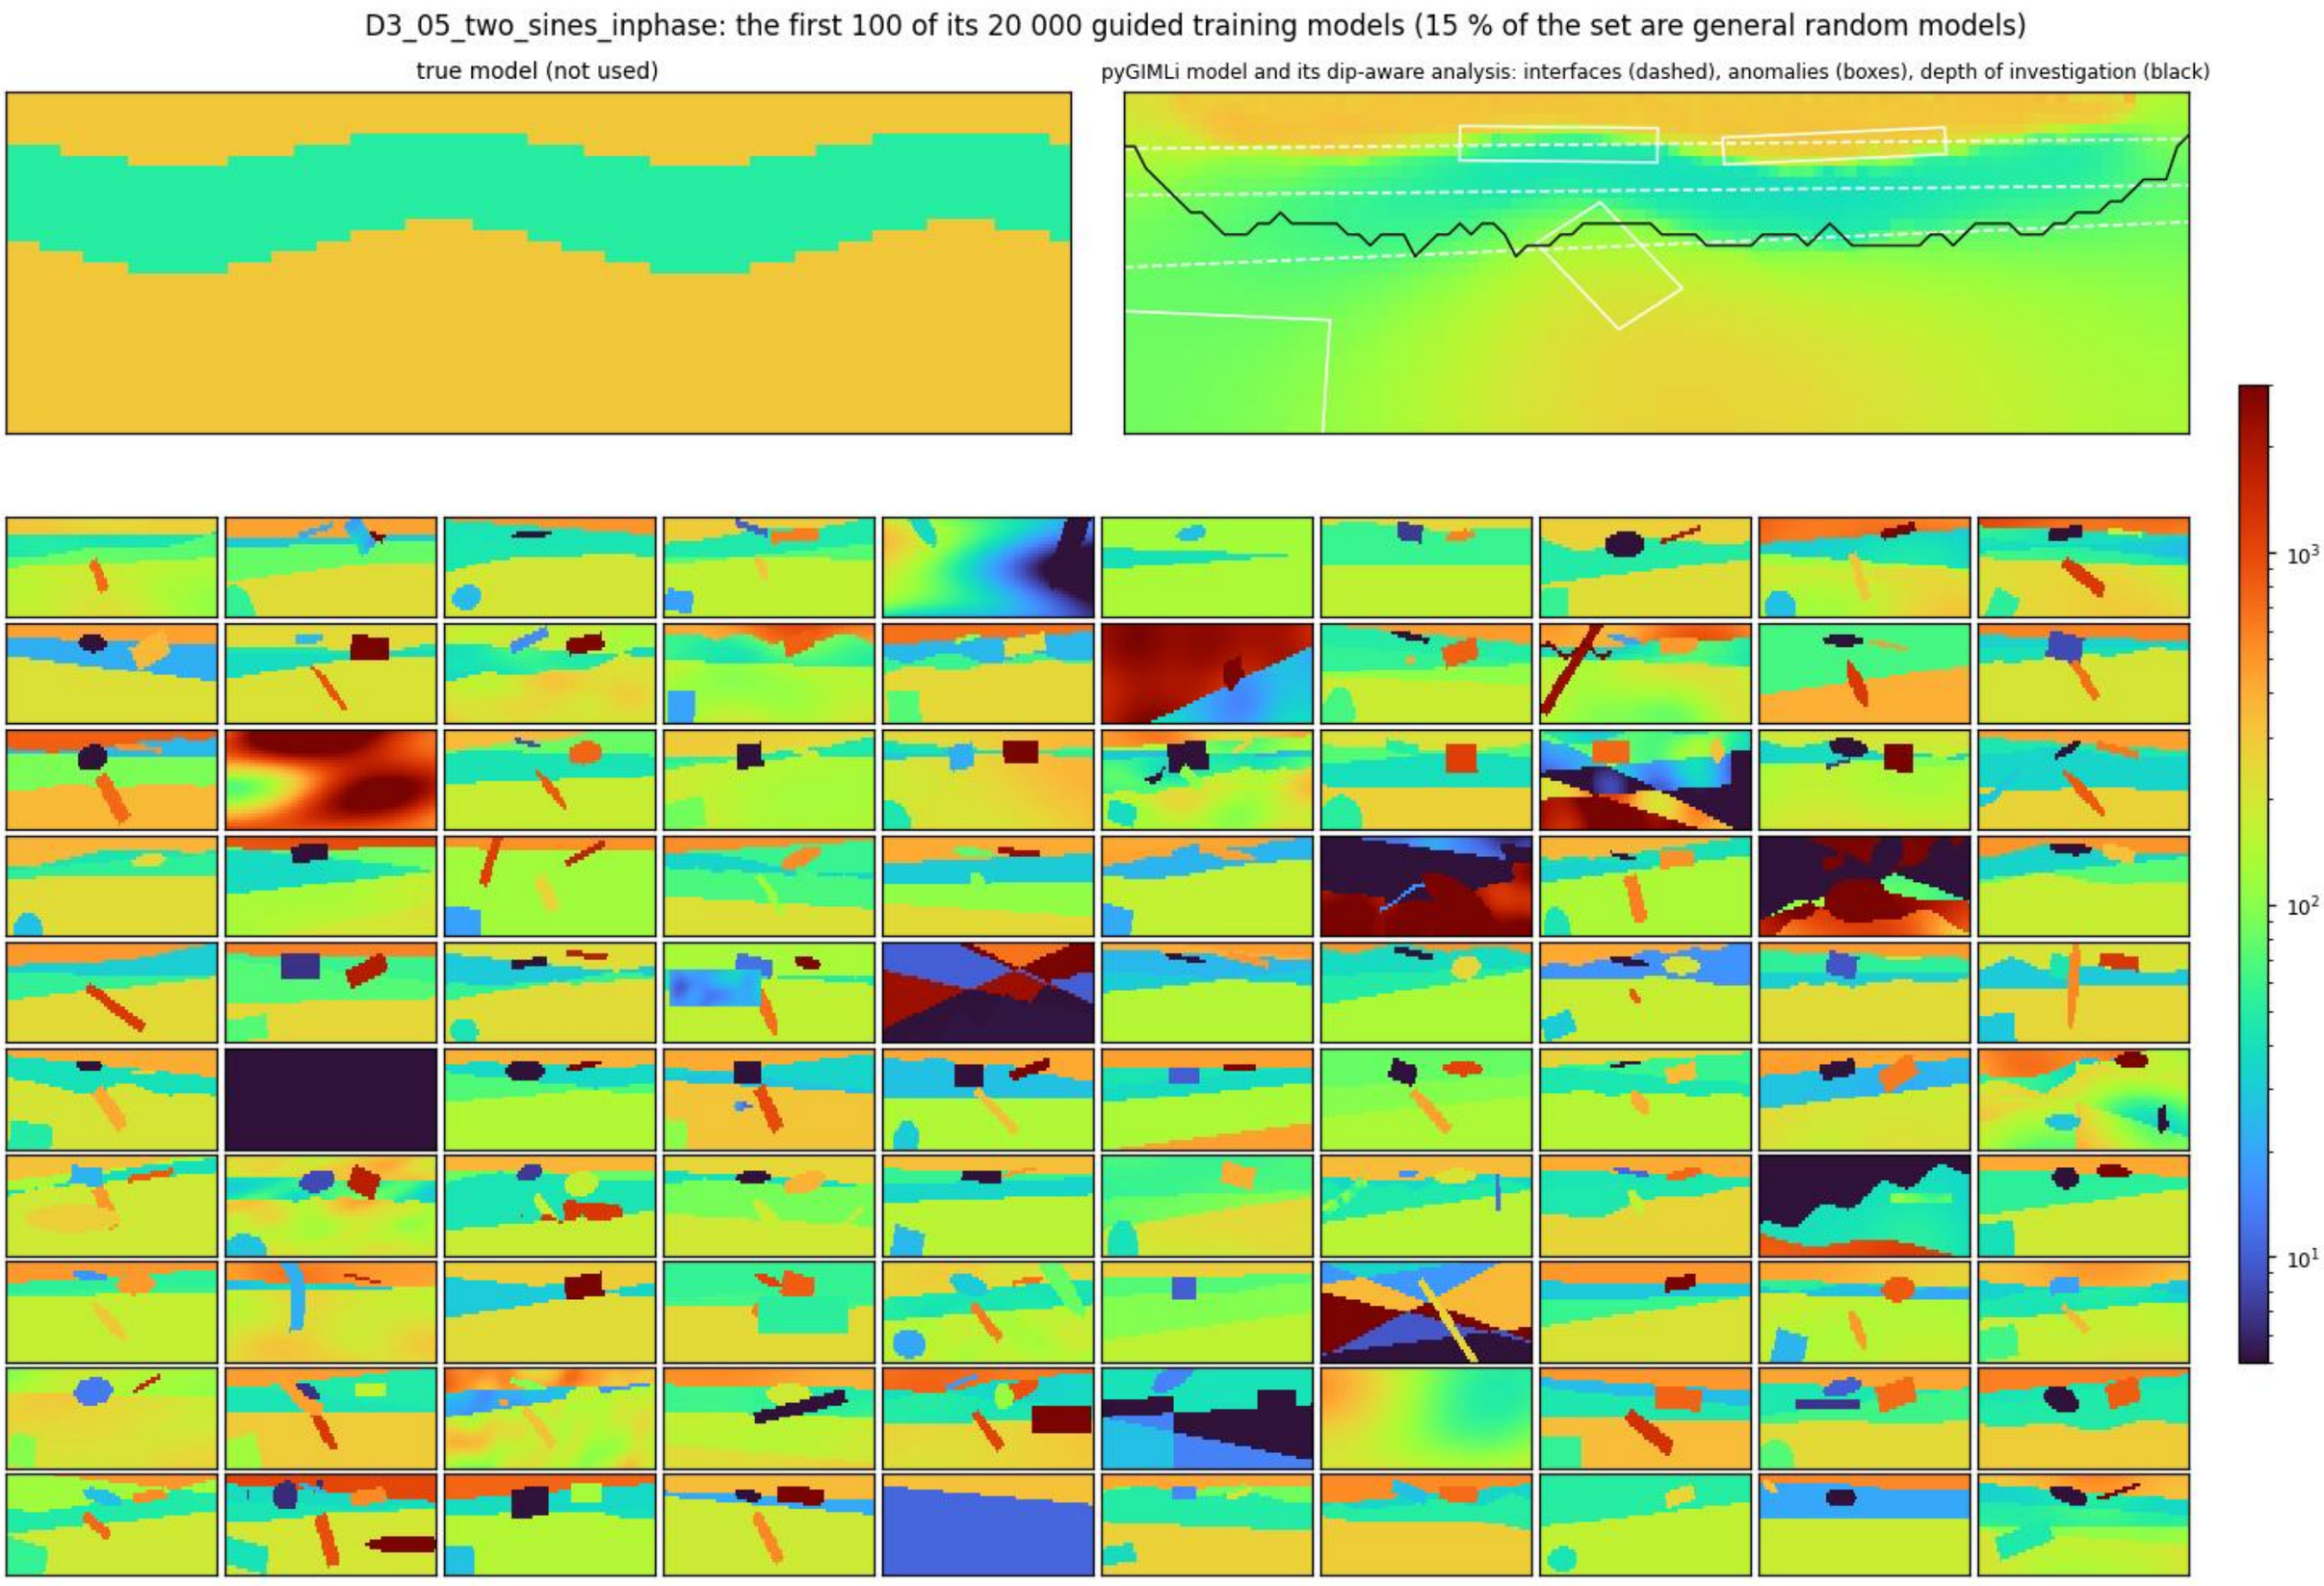
D3_05_two_sines_inphase: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S48

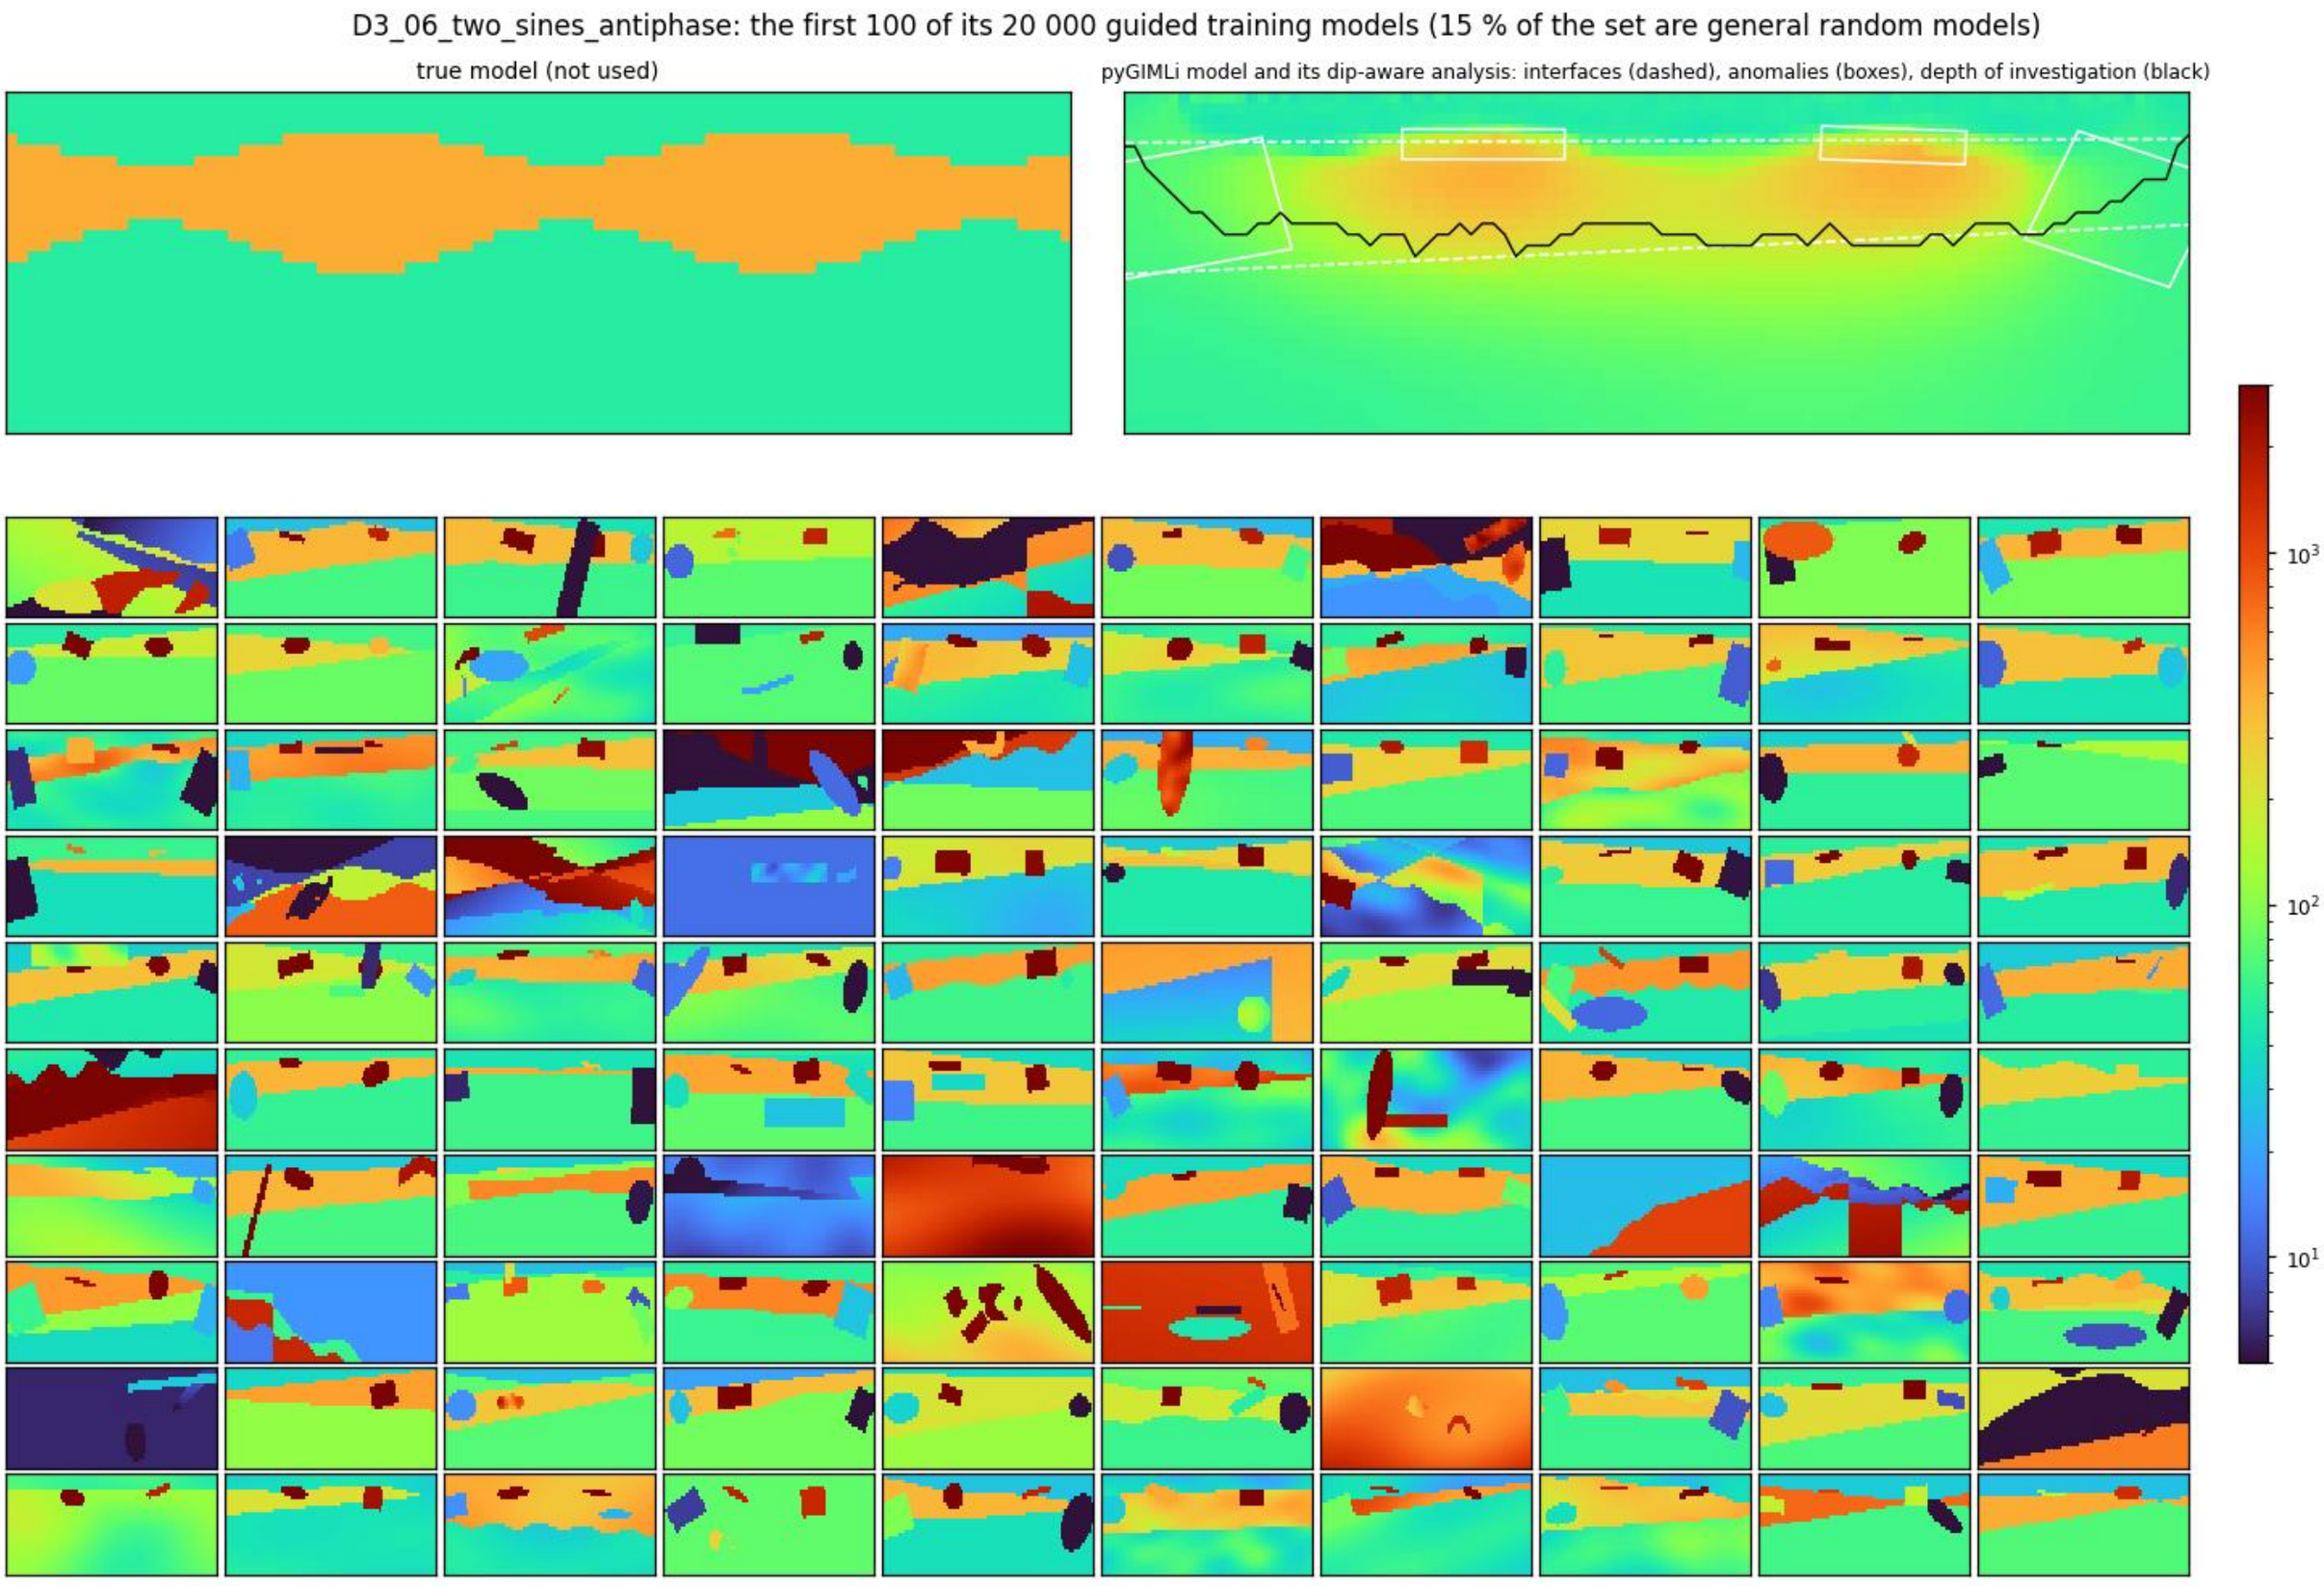
D3_06_two_sines_antiphase: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S49

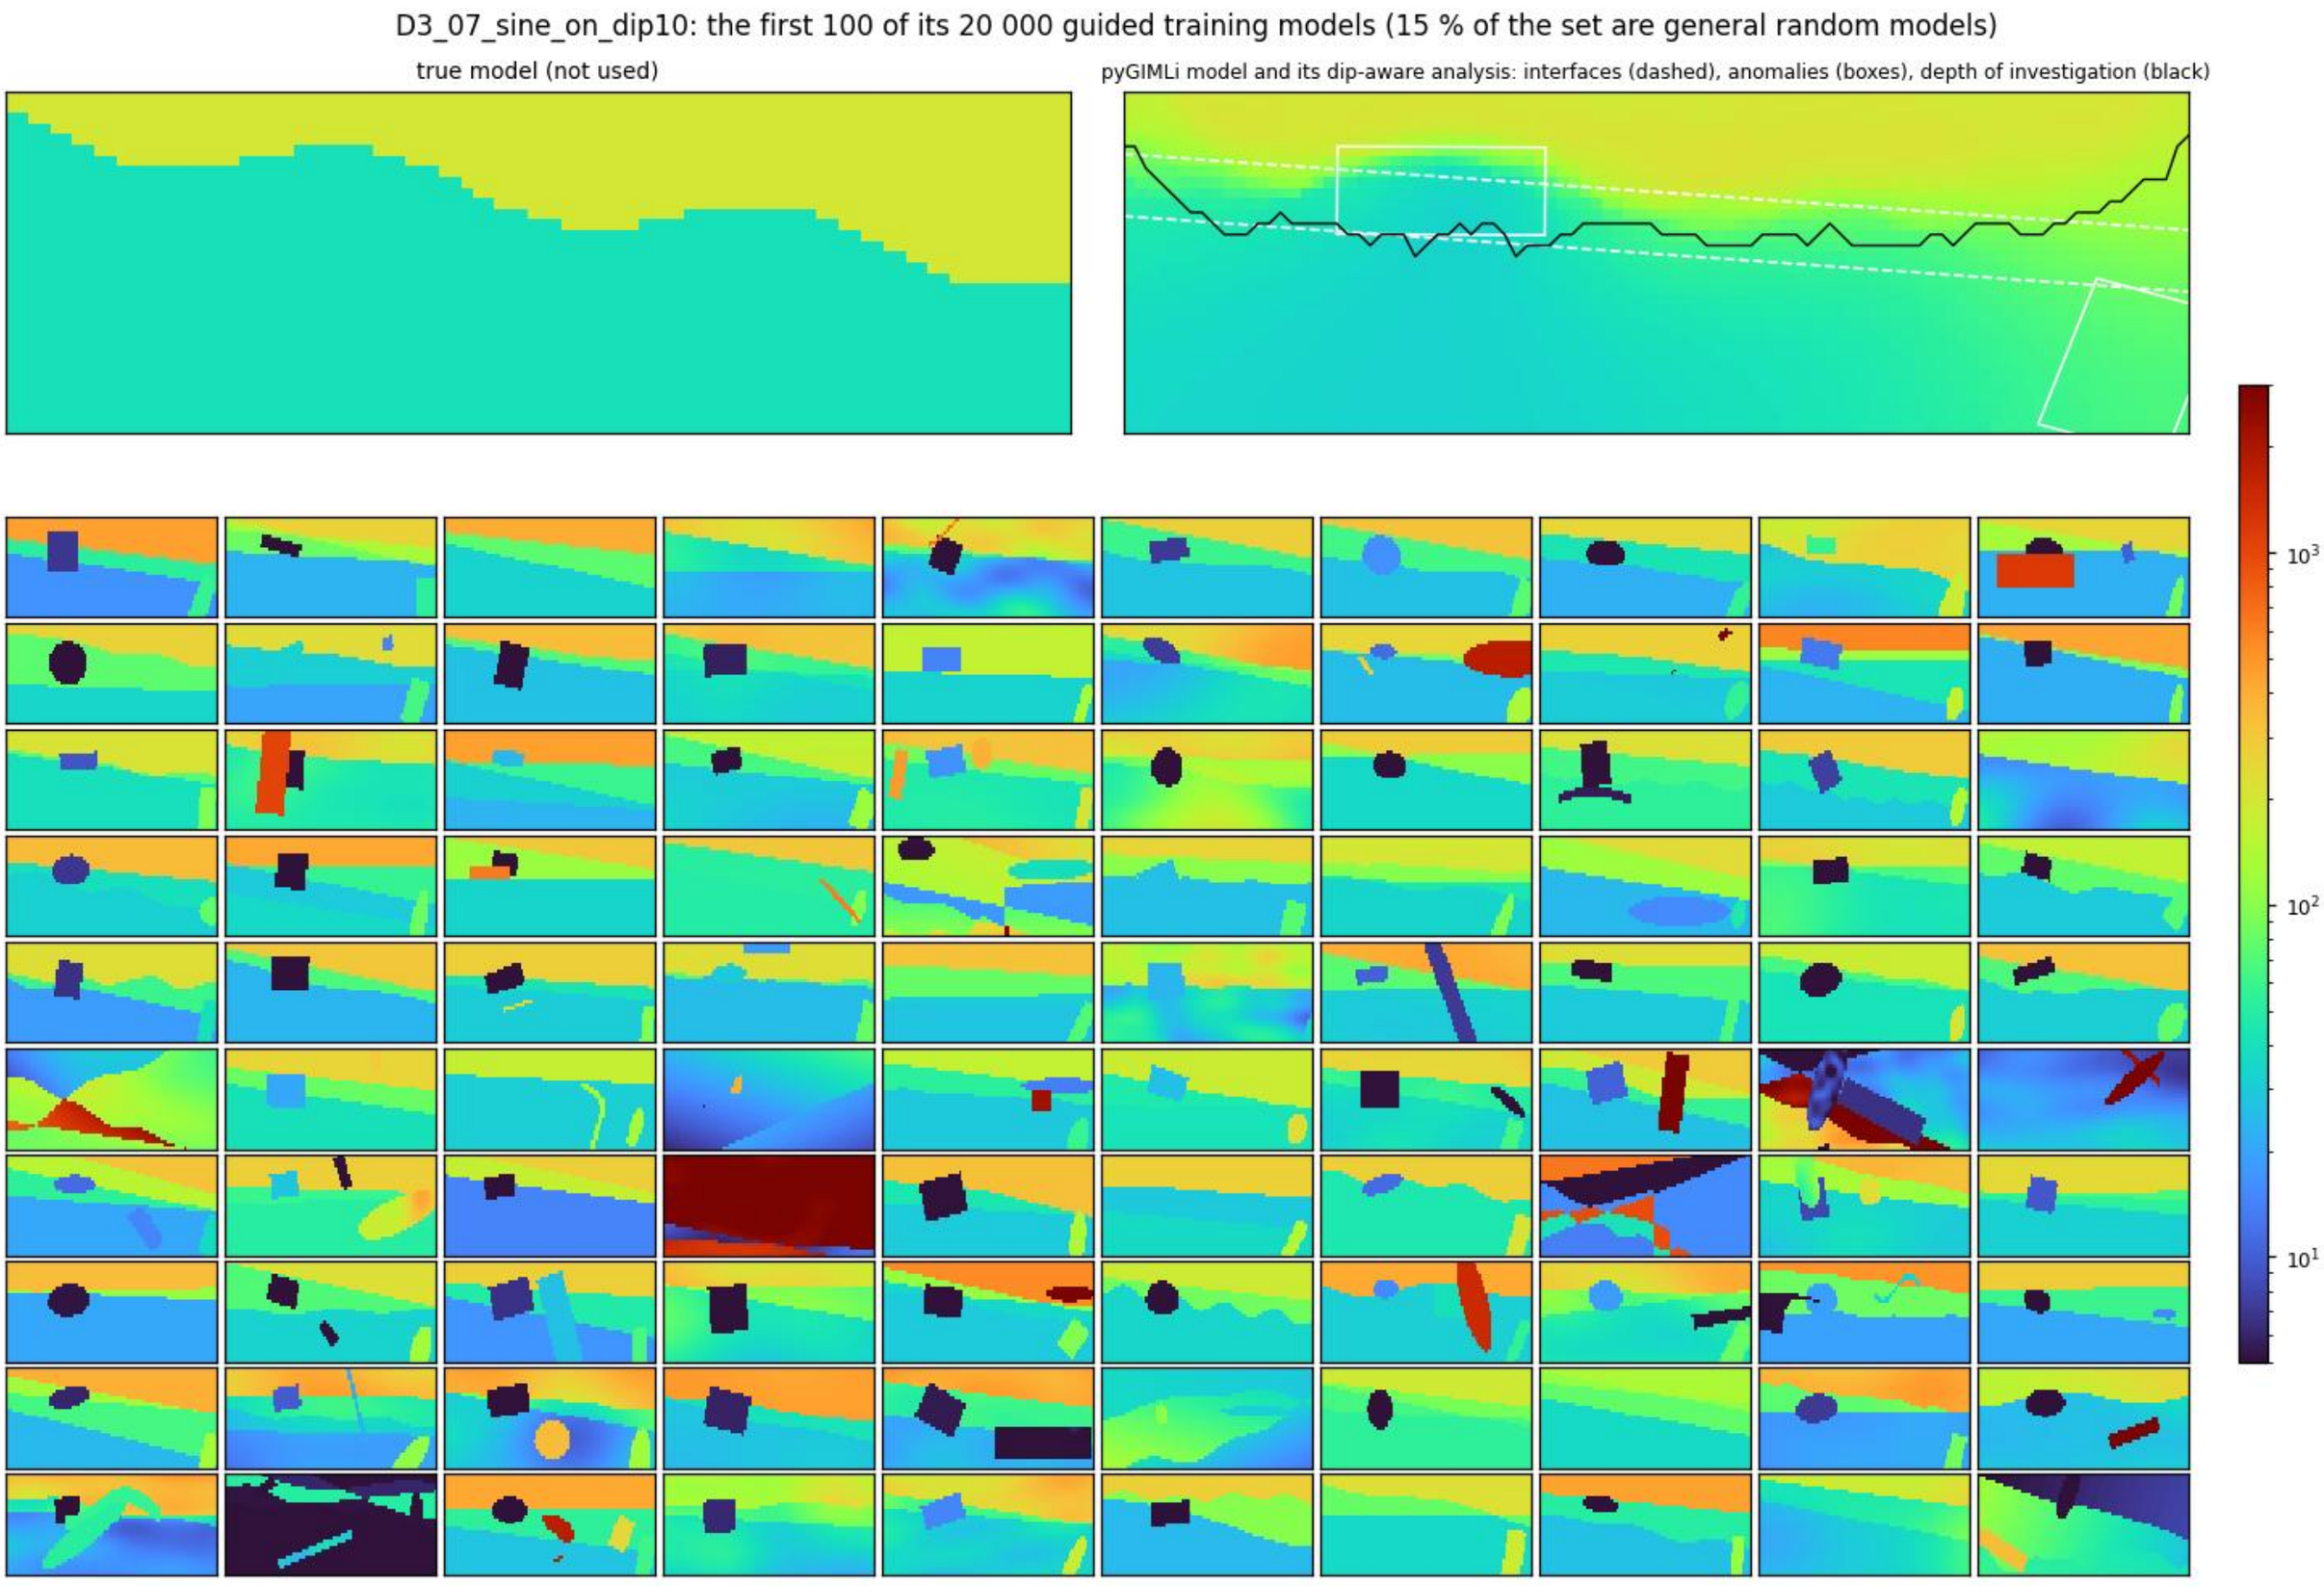
D3_07_sine_on_dip10: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S50

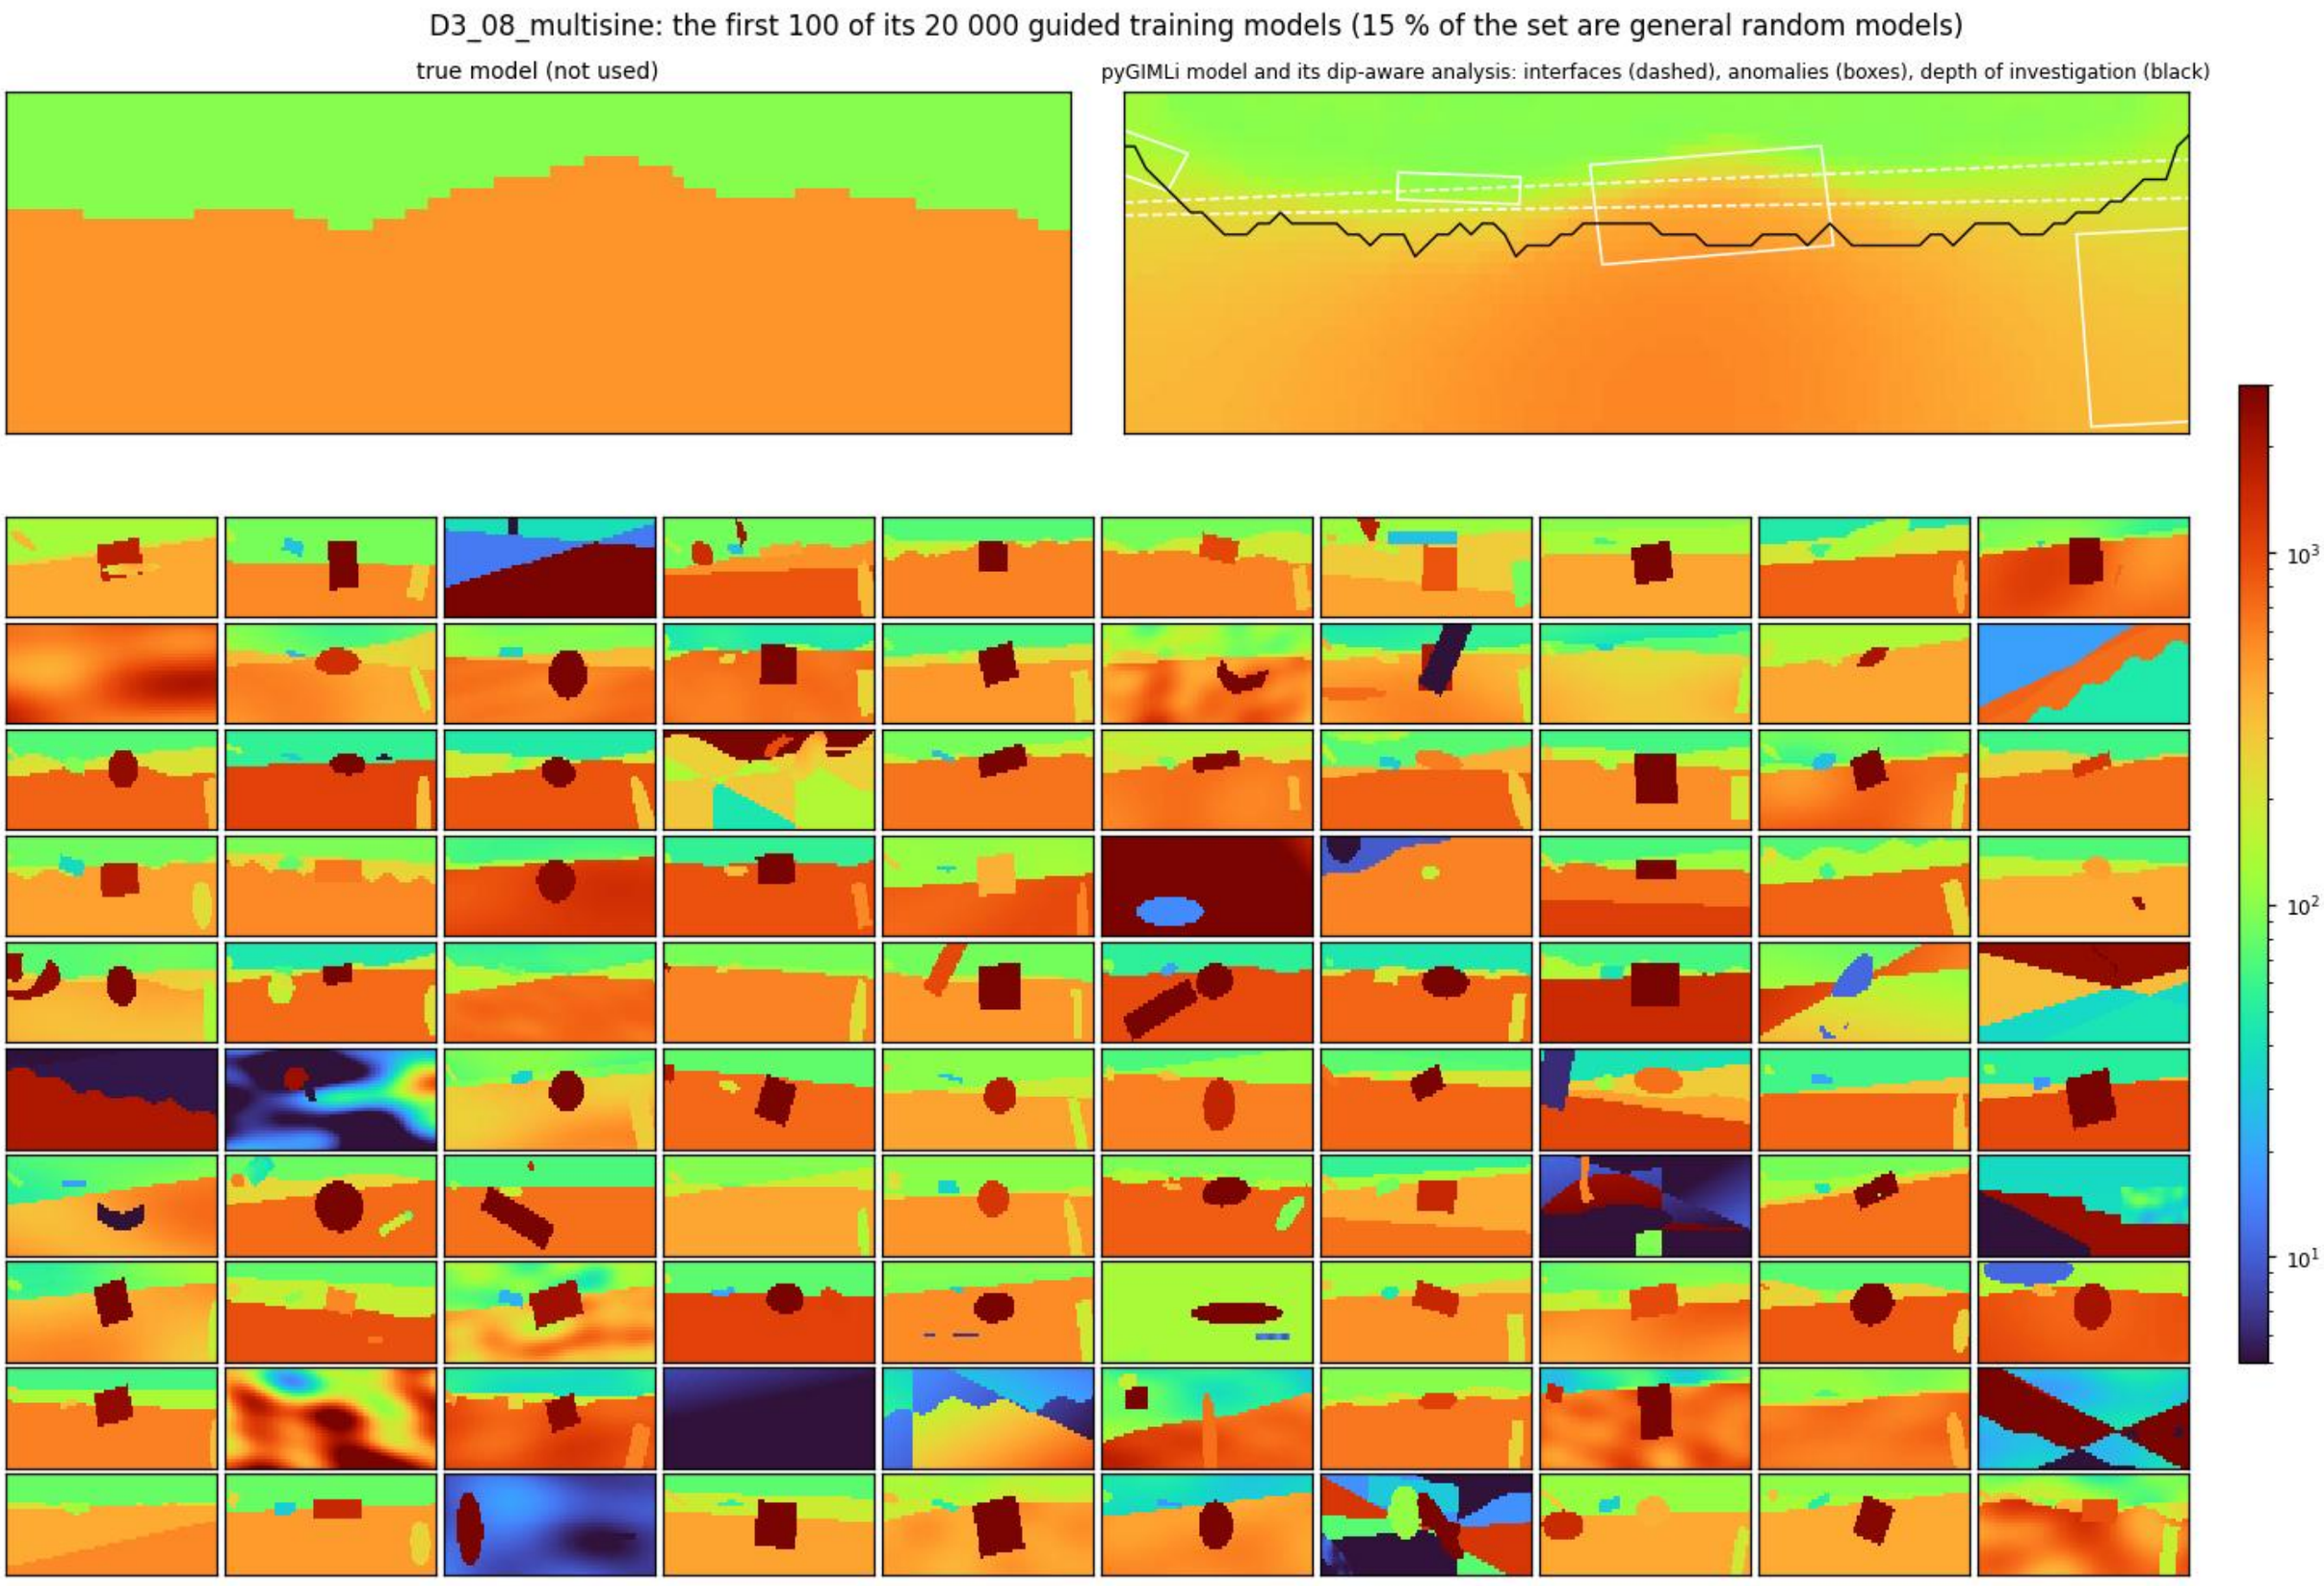
D3_08_multisine: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S51

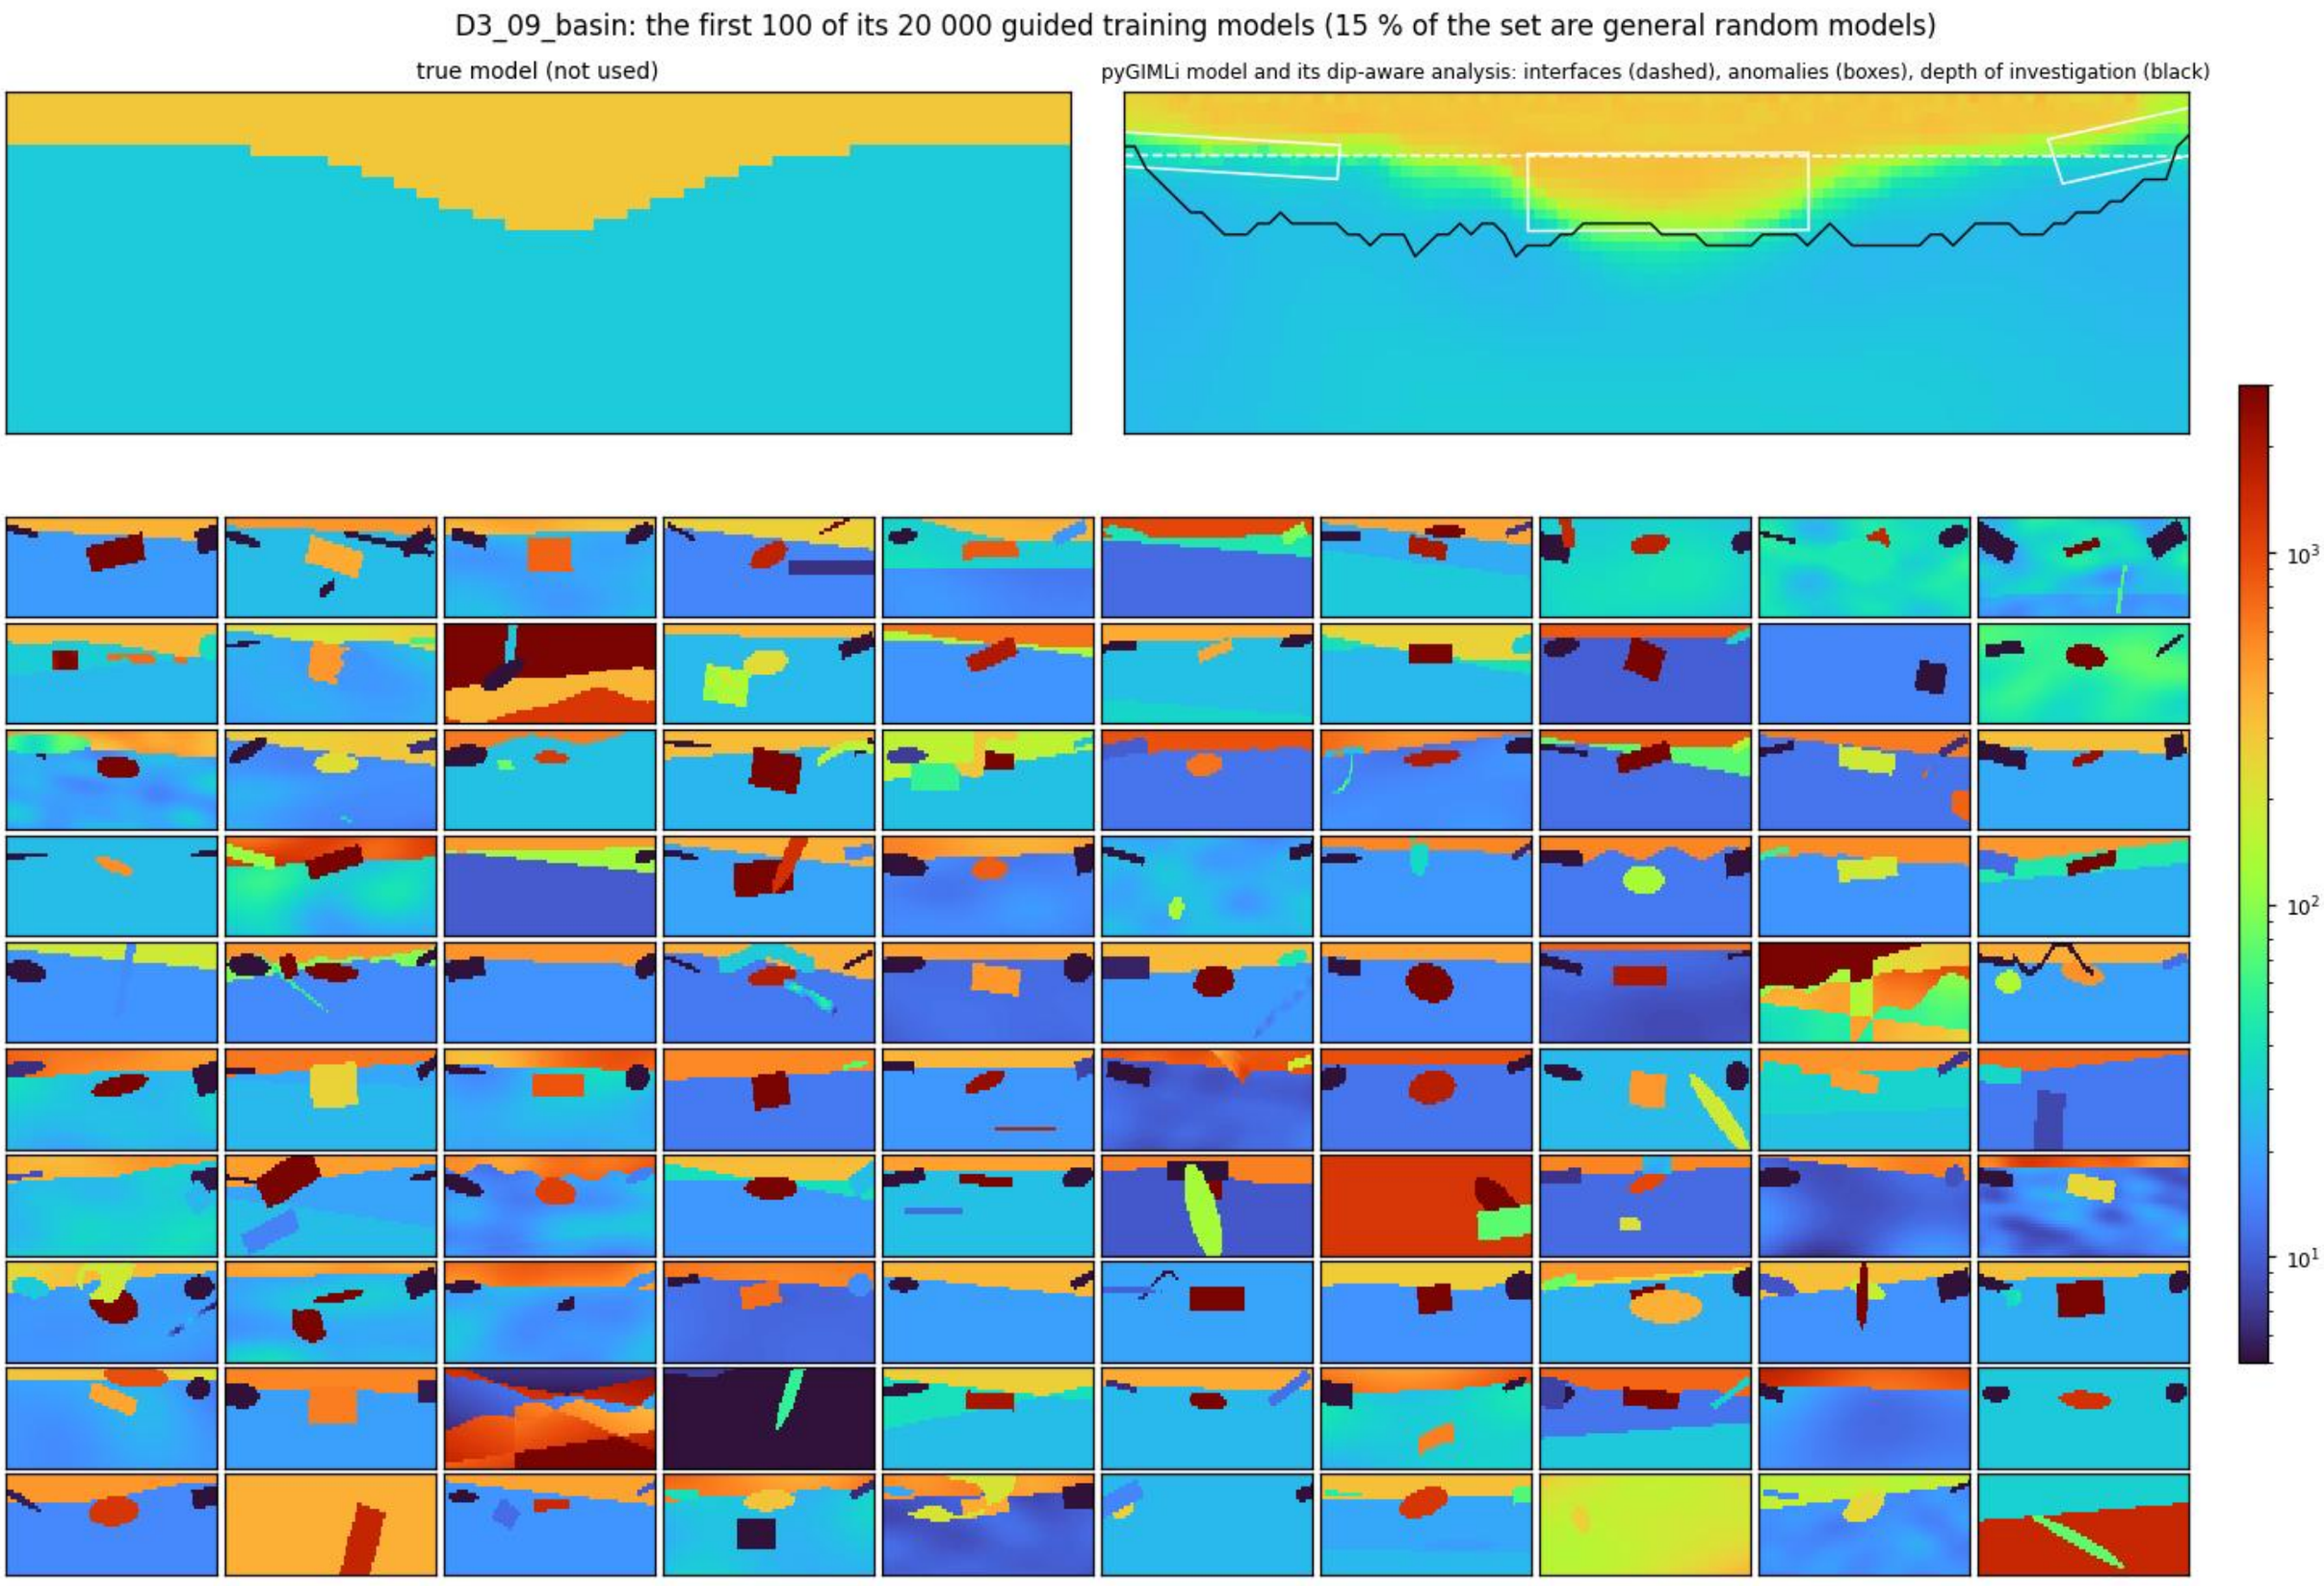
D3_09_basin: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S52

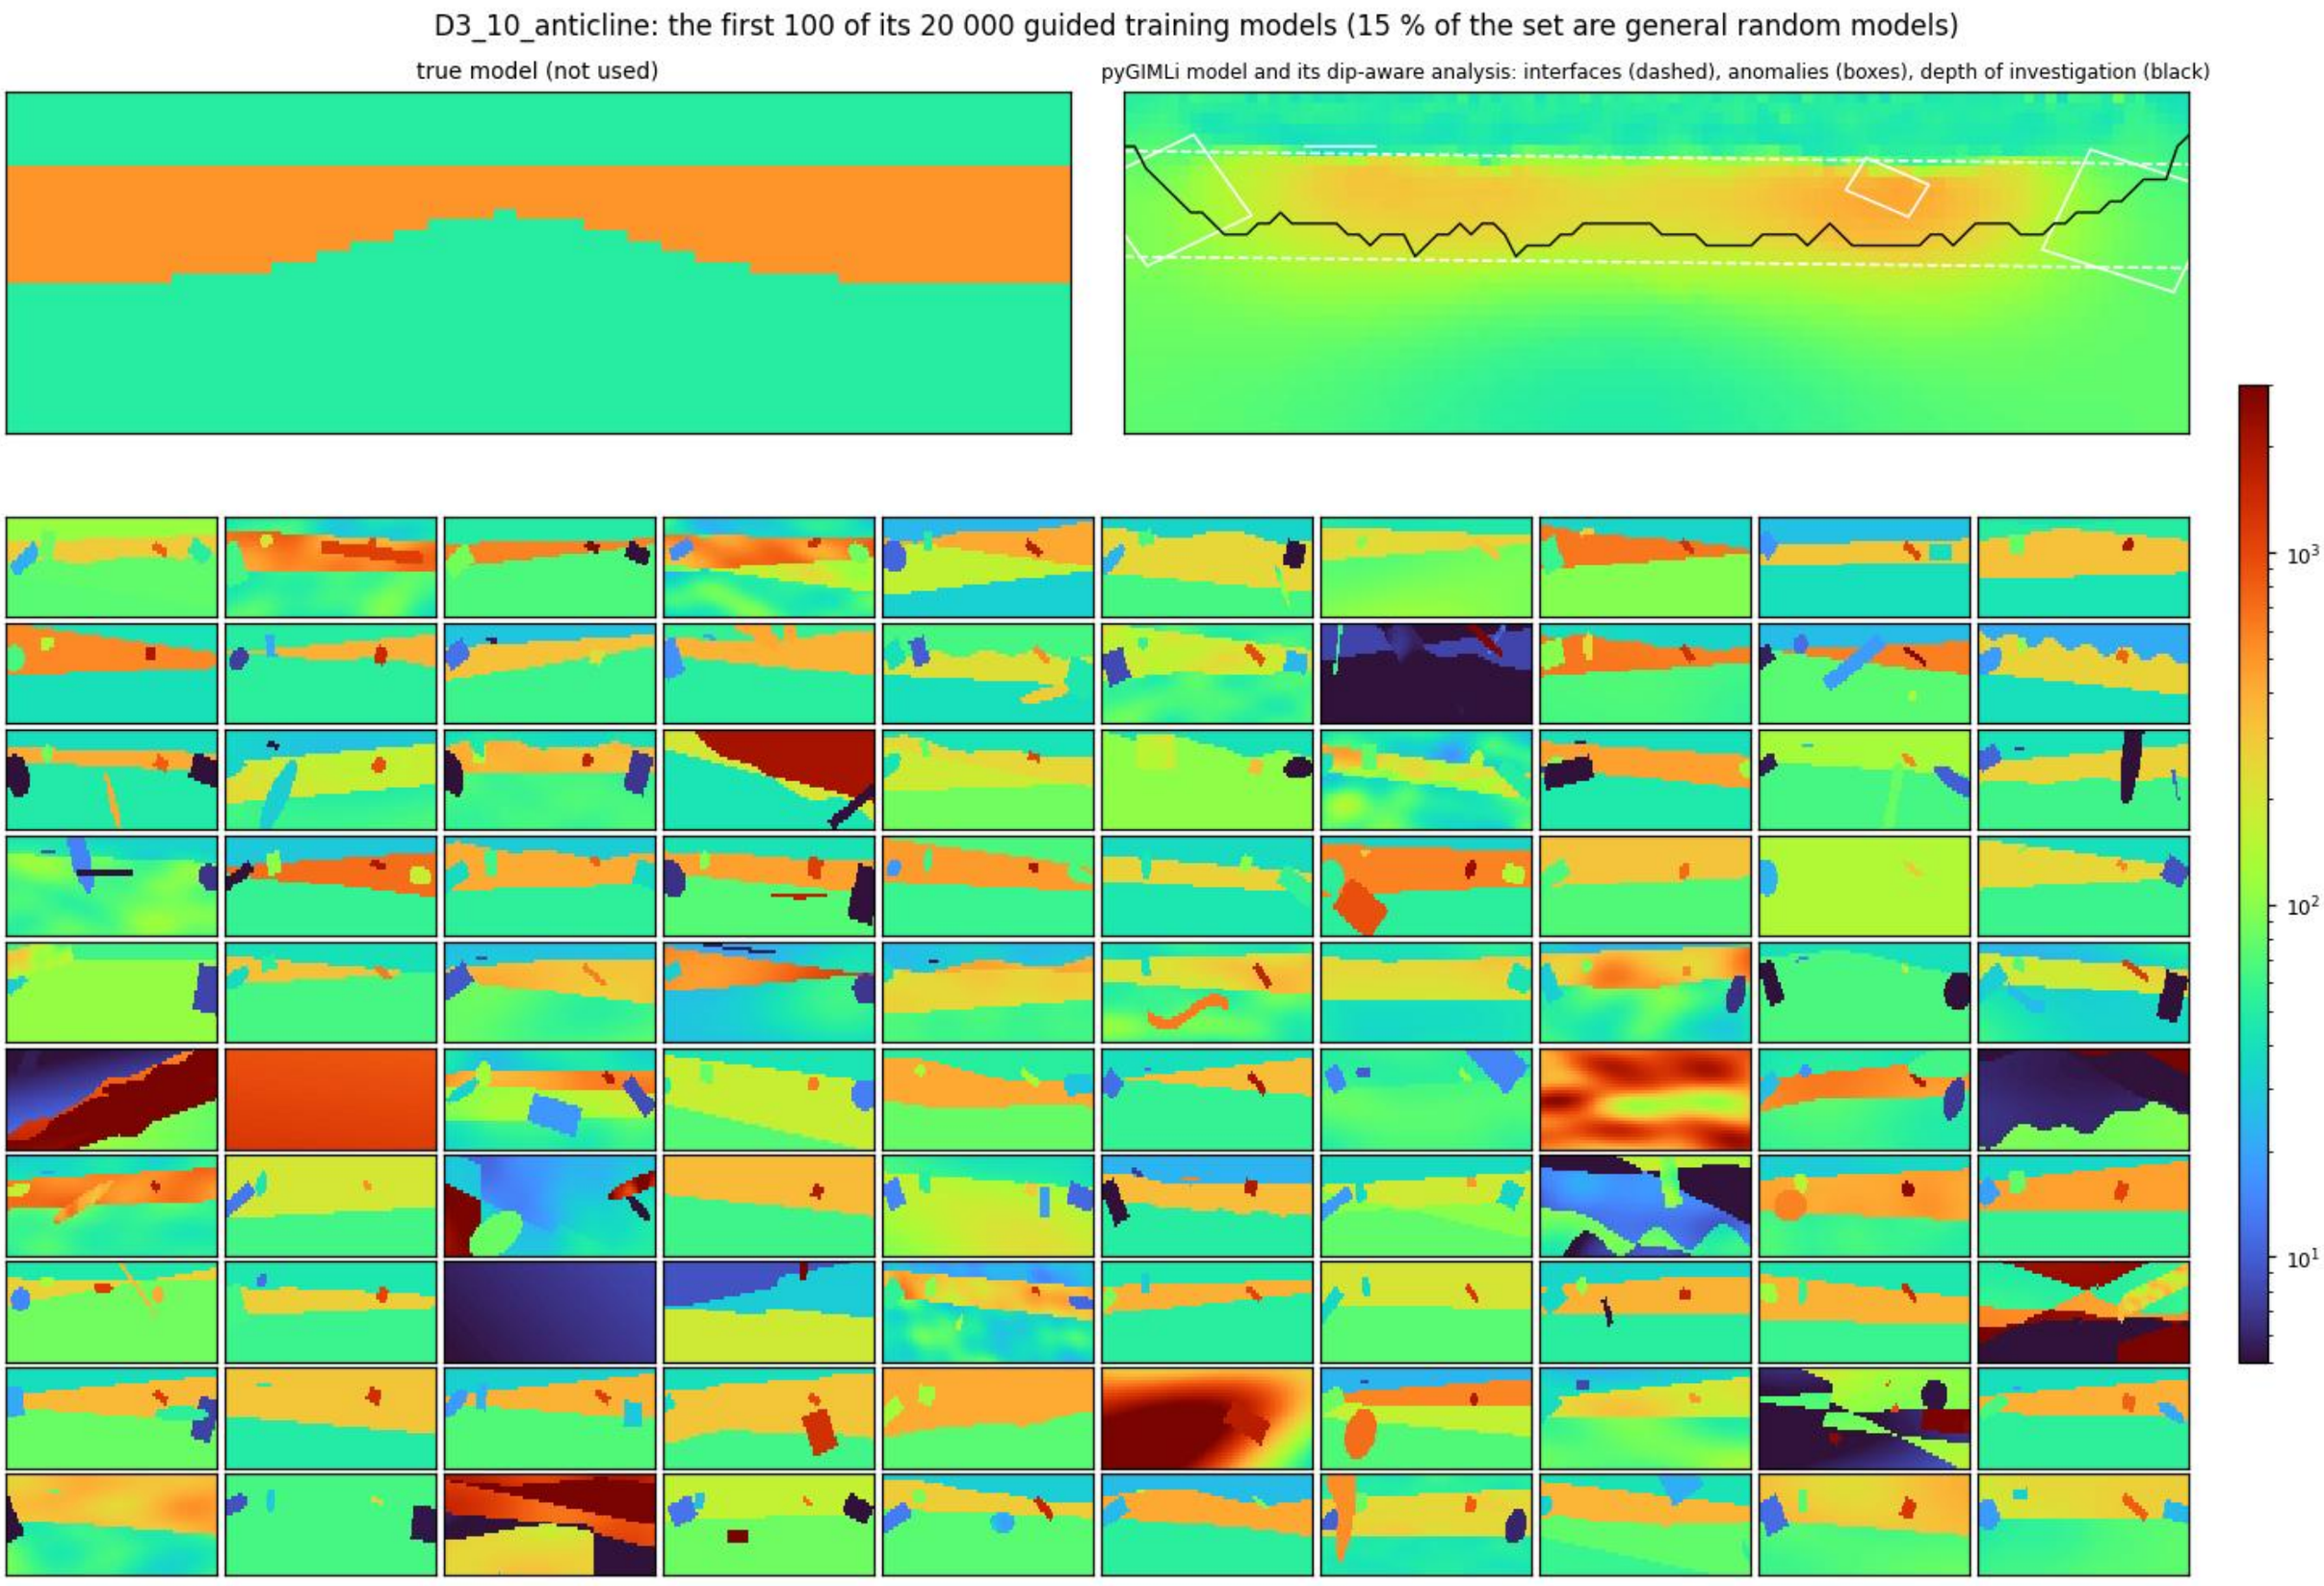
D3_10_anticline: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S53

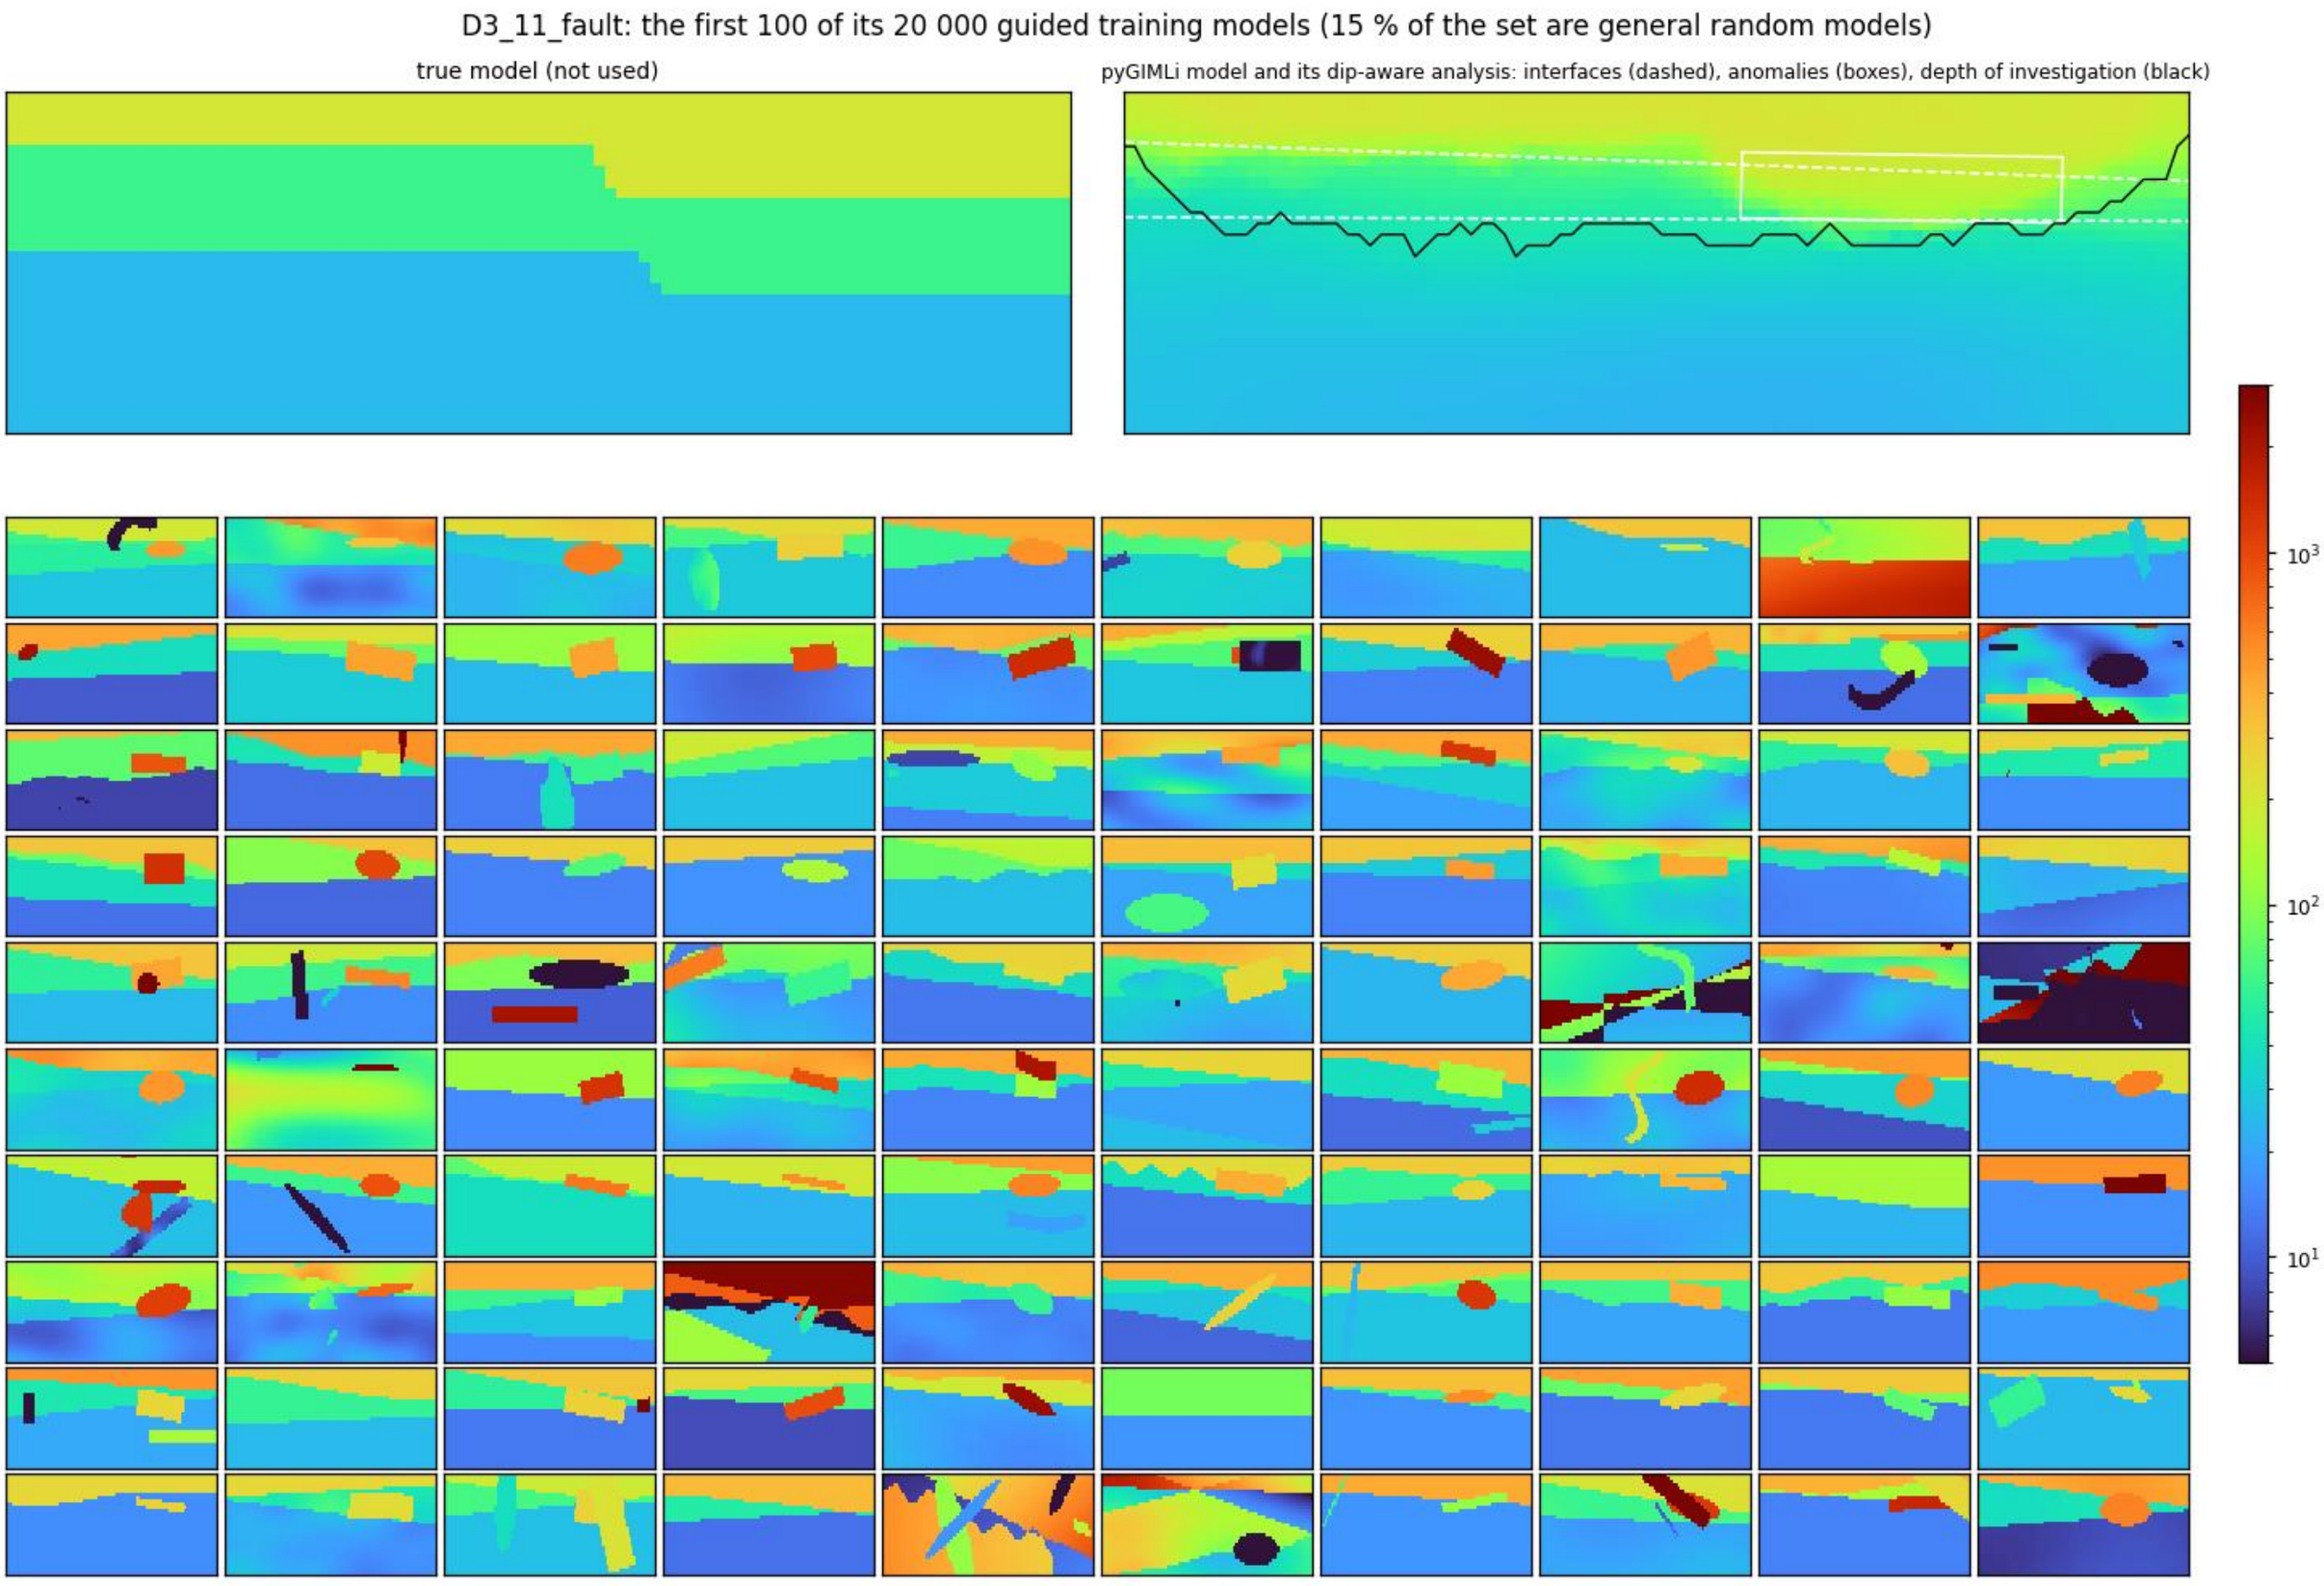
D3_11_fault: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S54

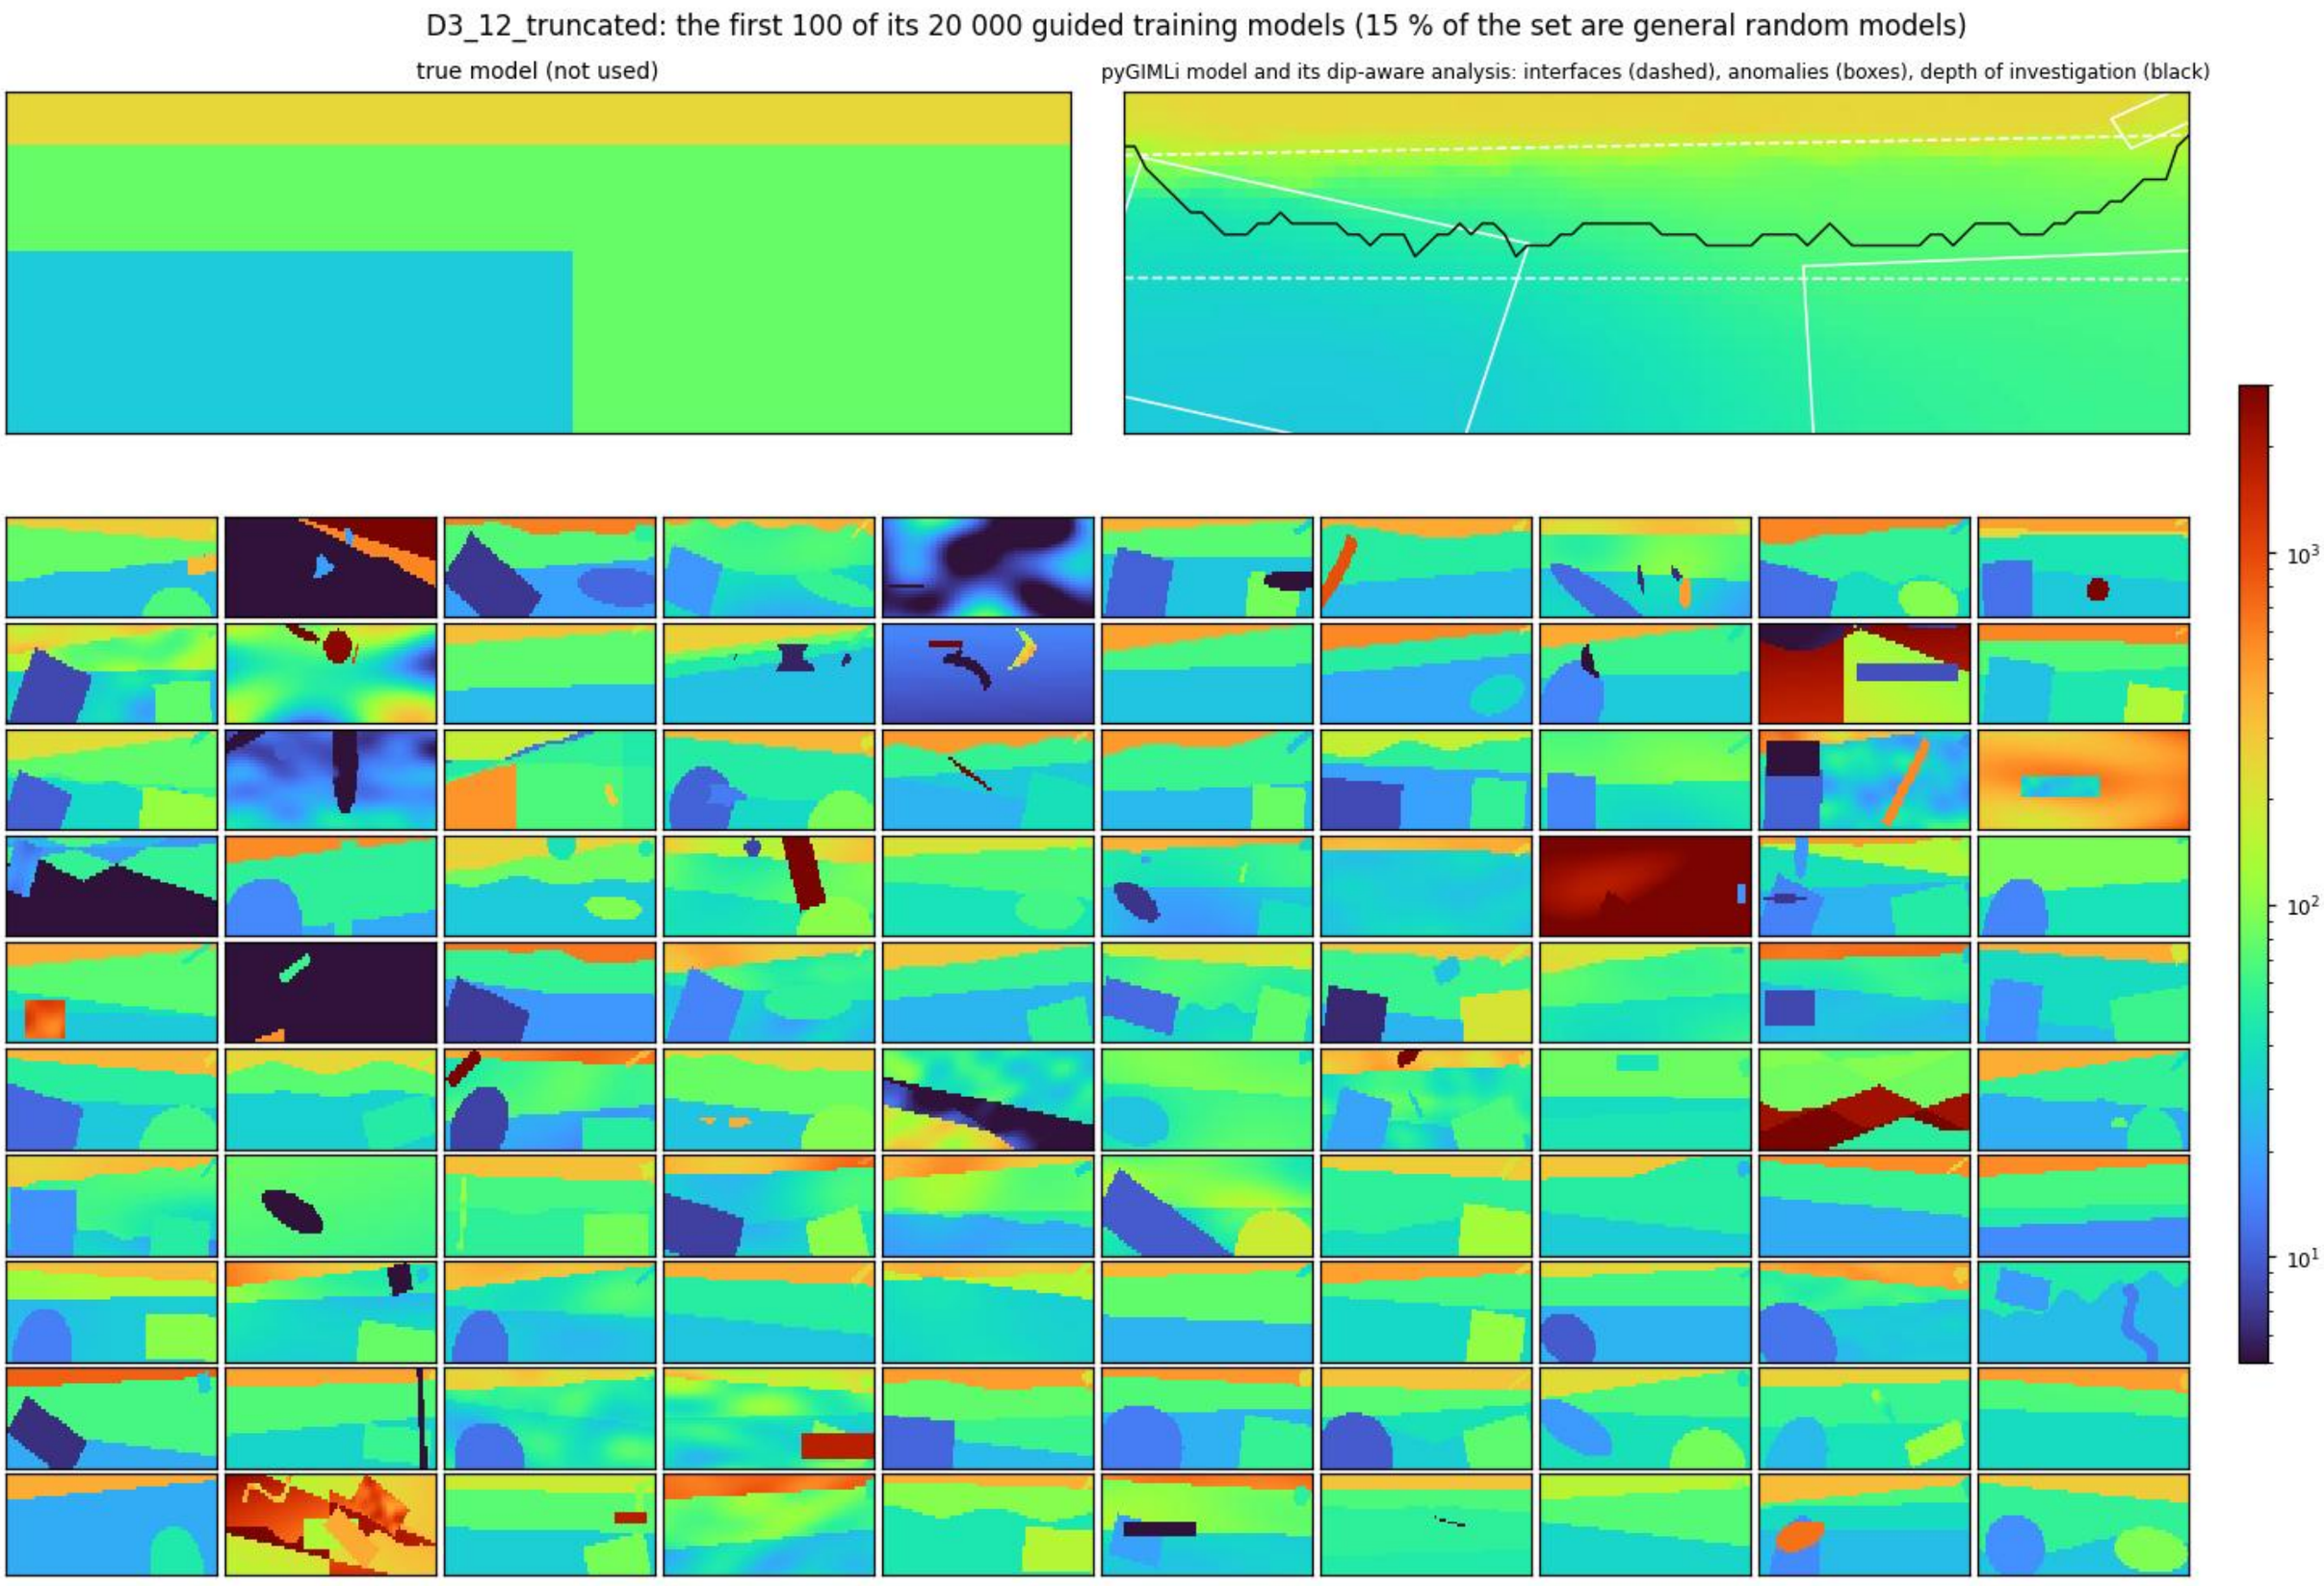
D3_12_truncated: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S55

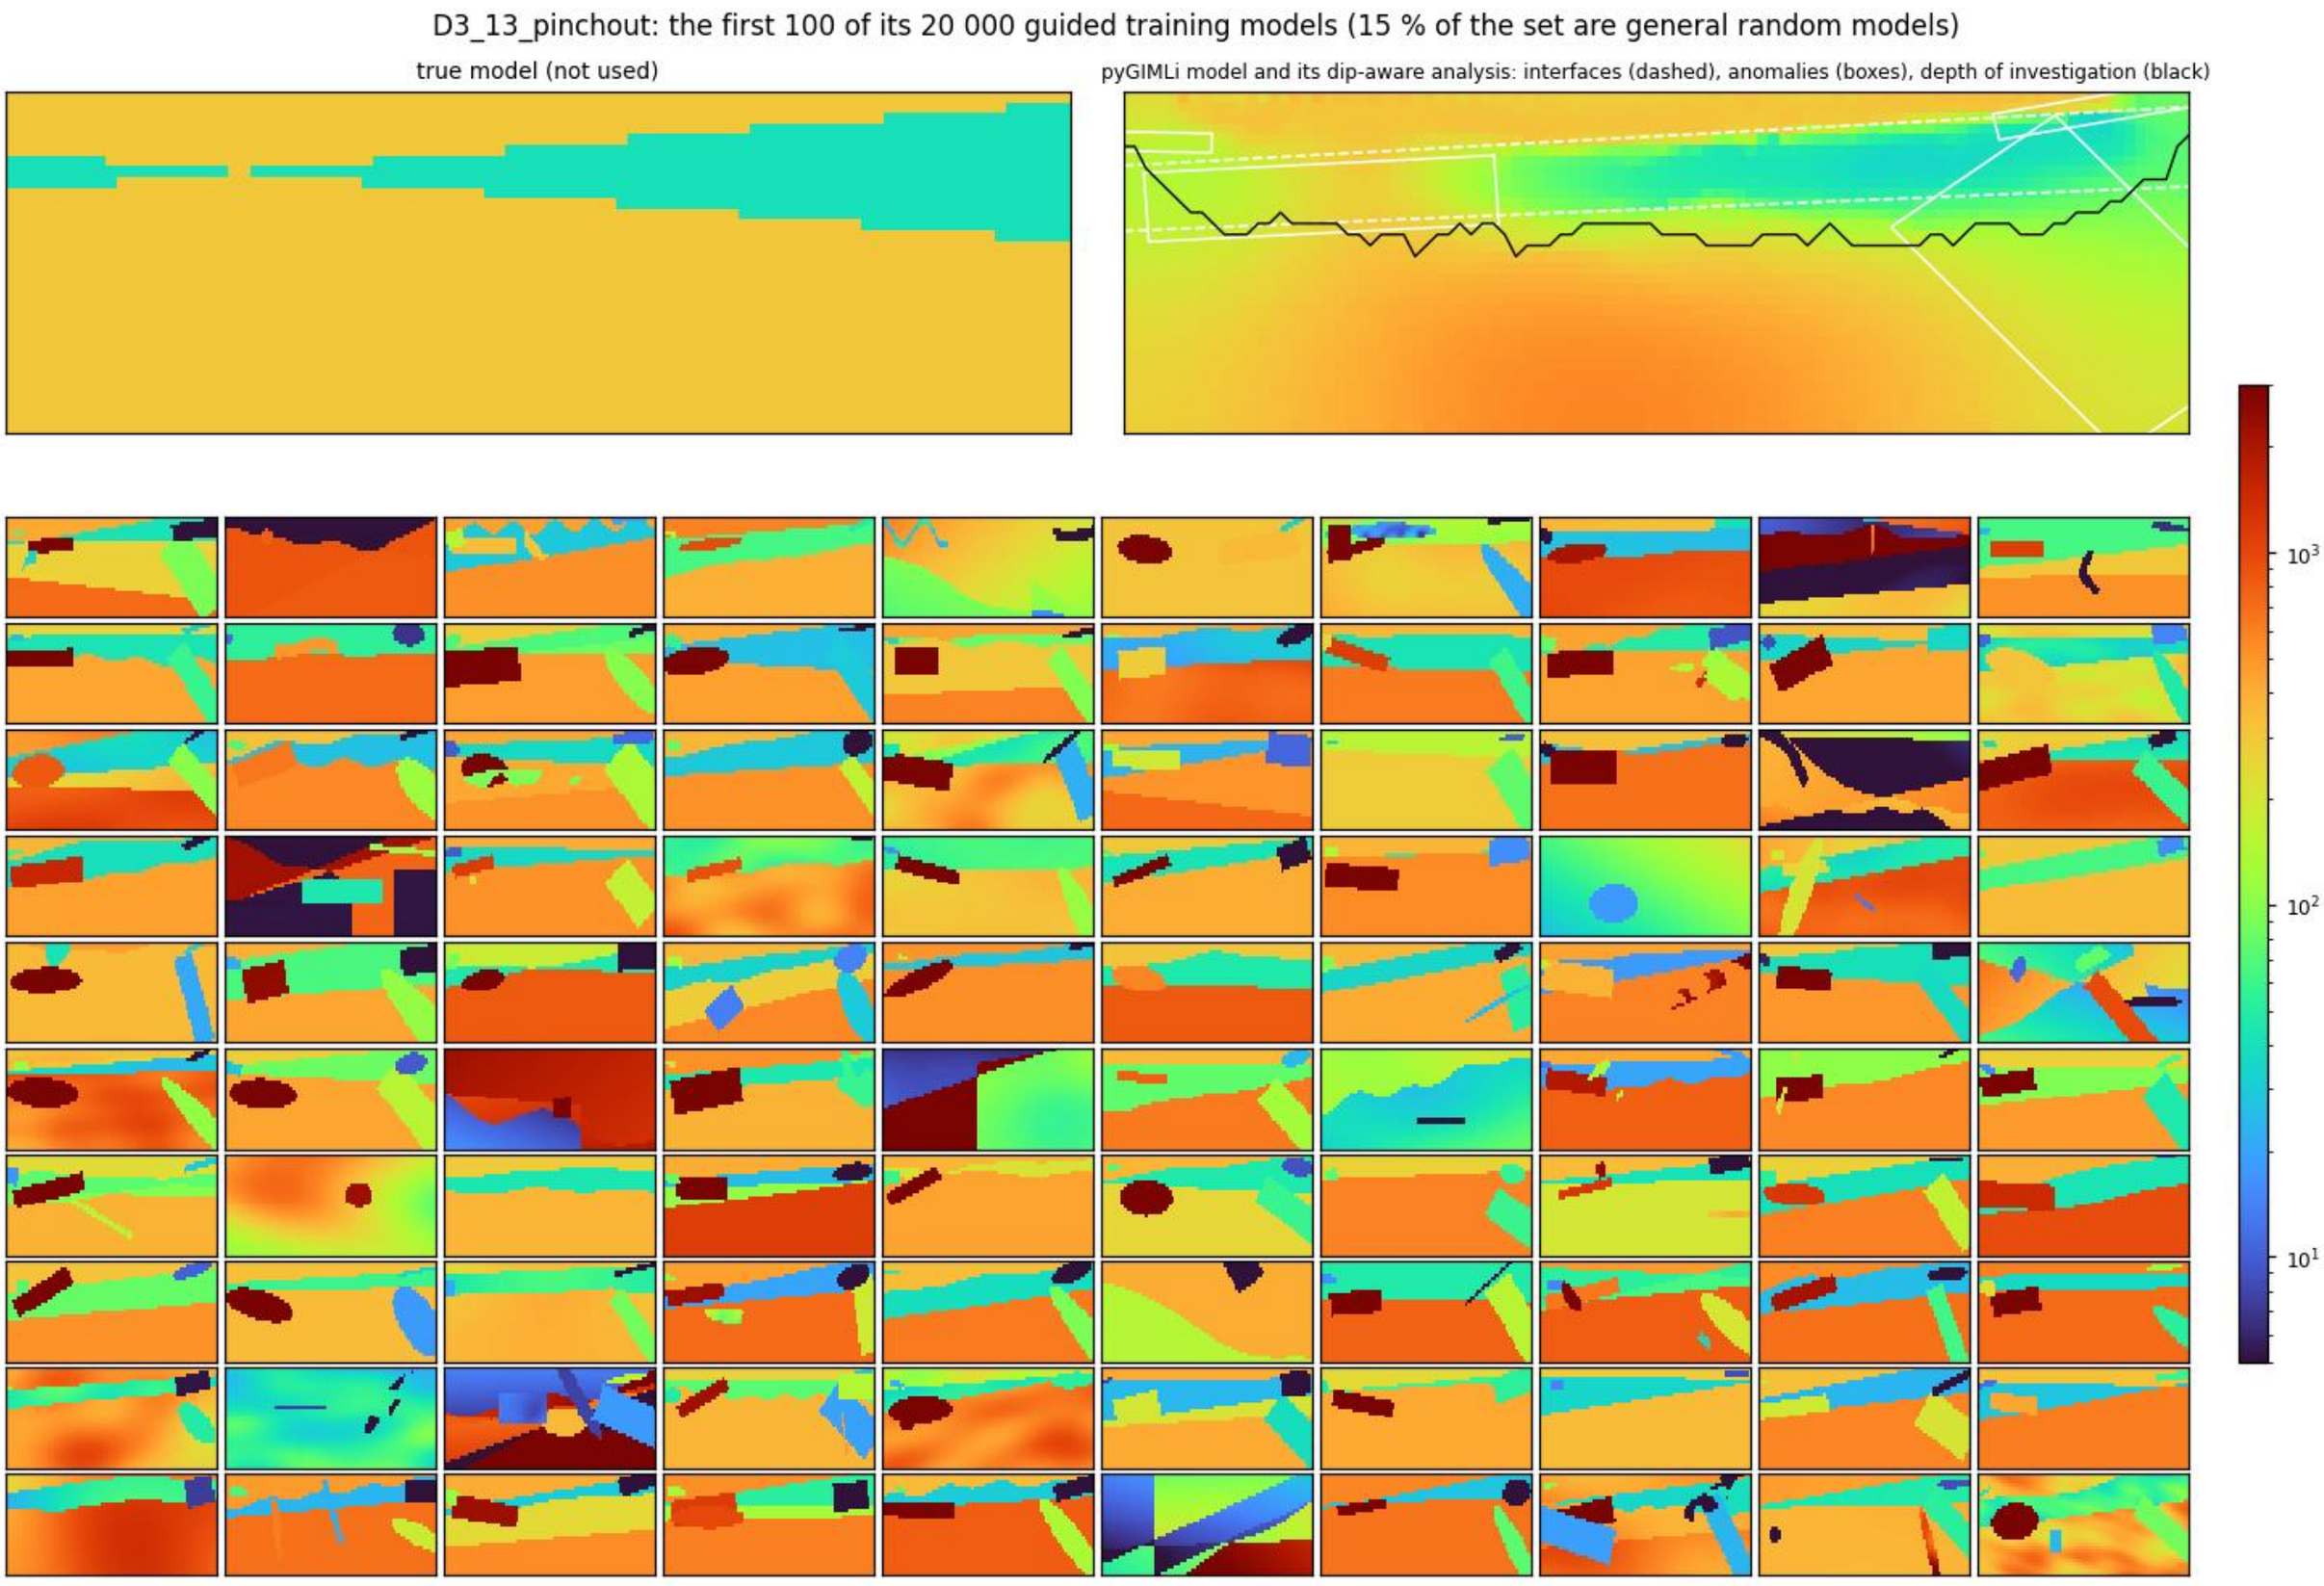
D3_13_pinchout: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S56

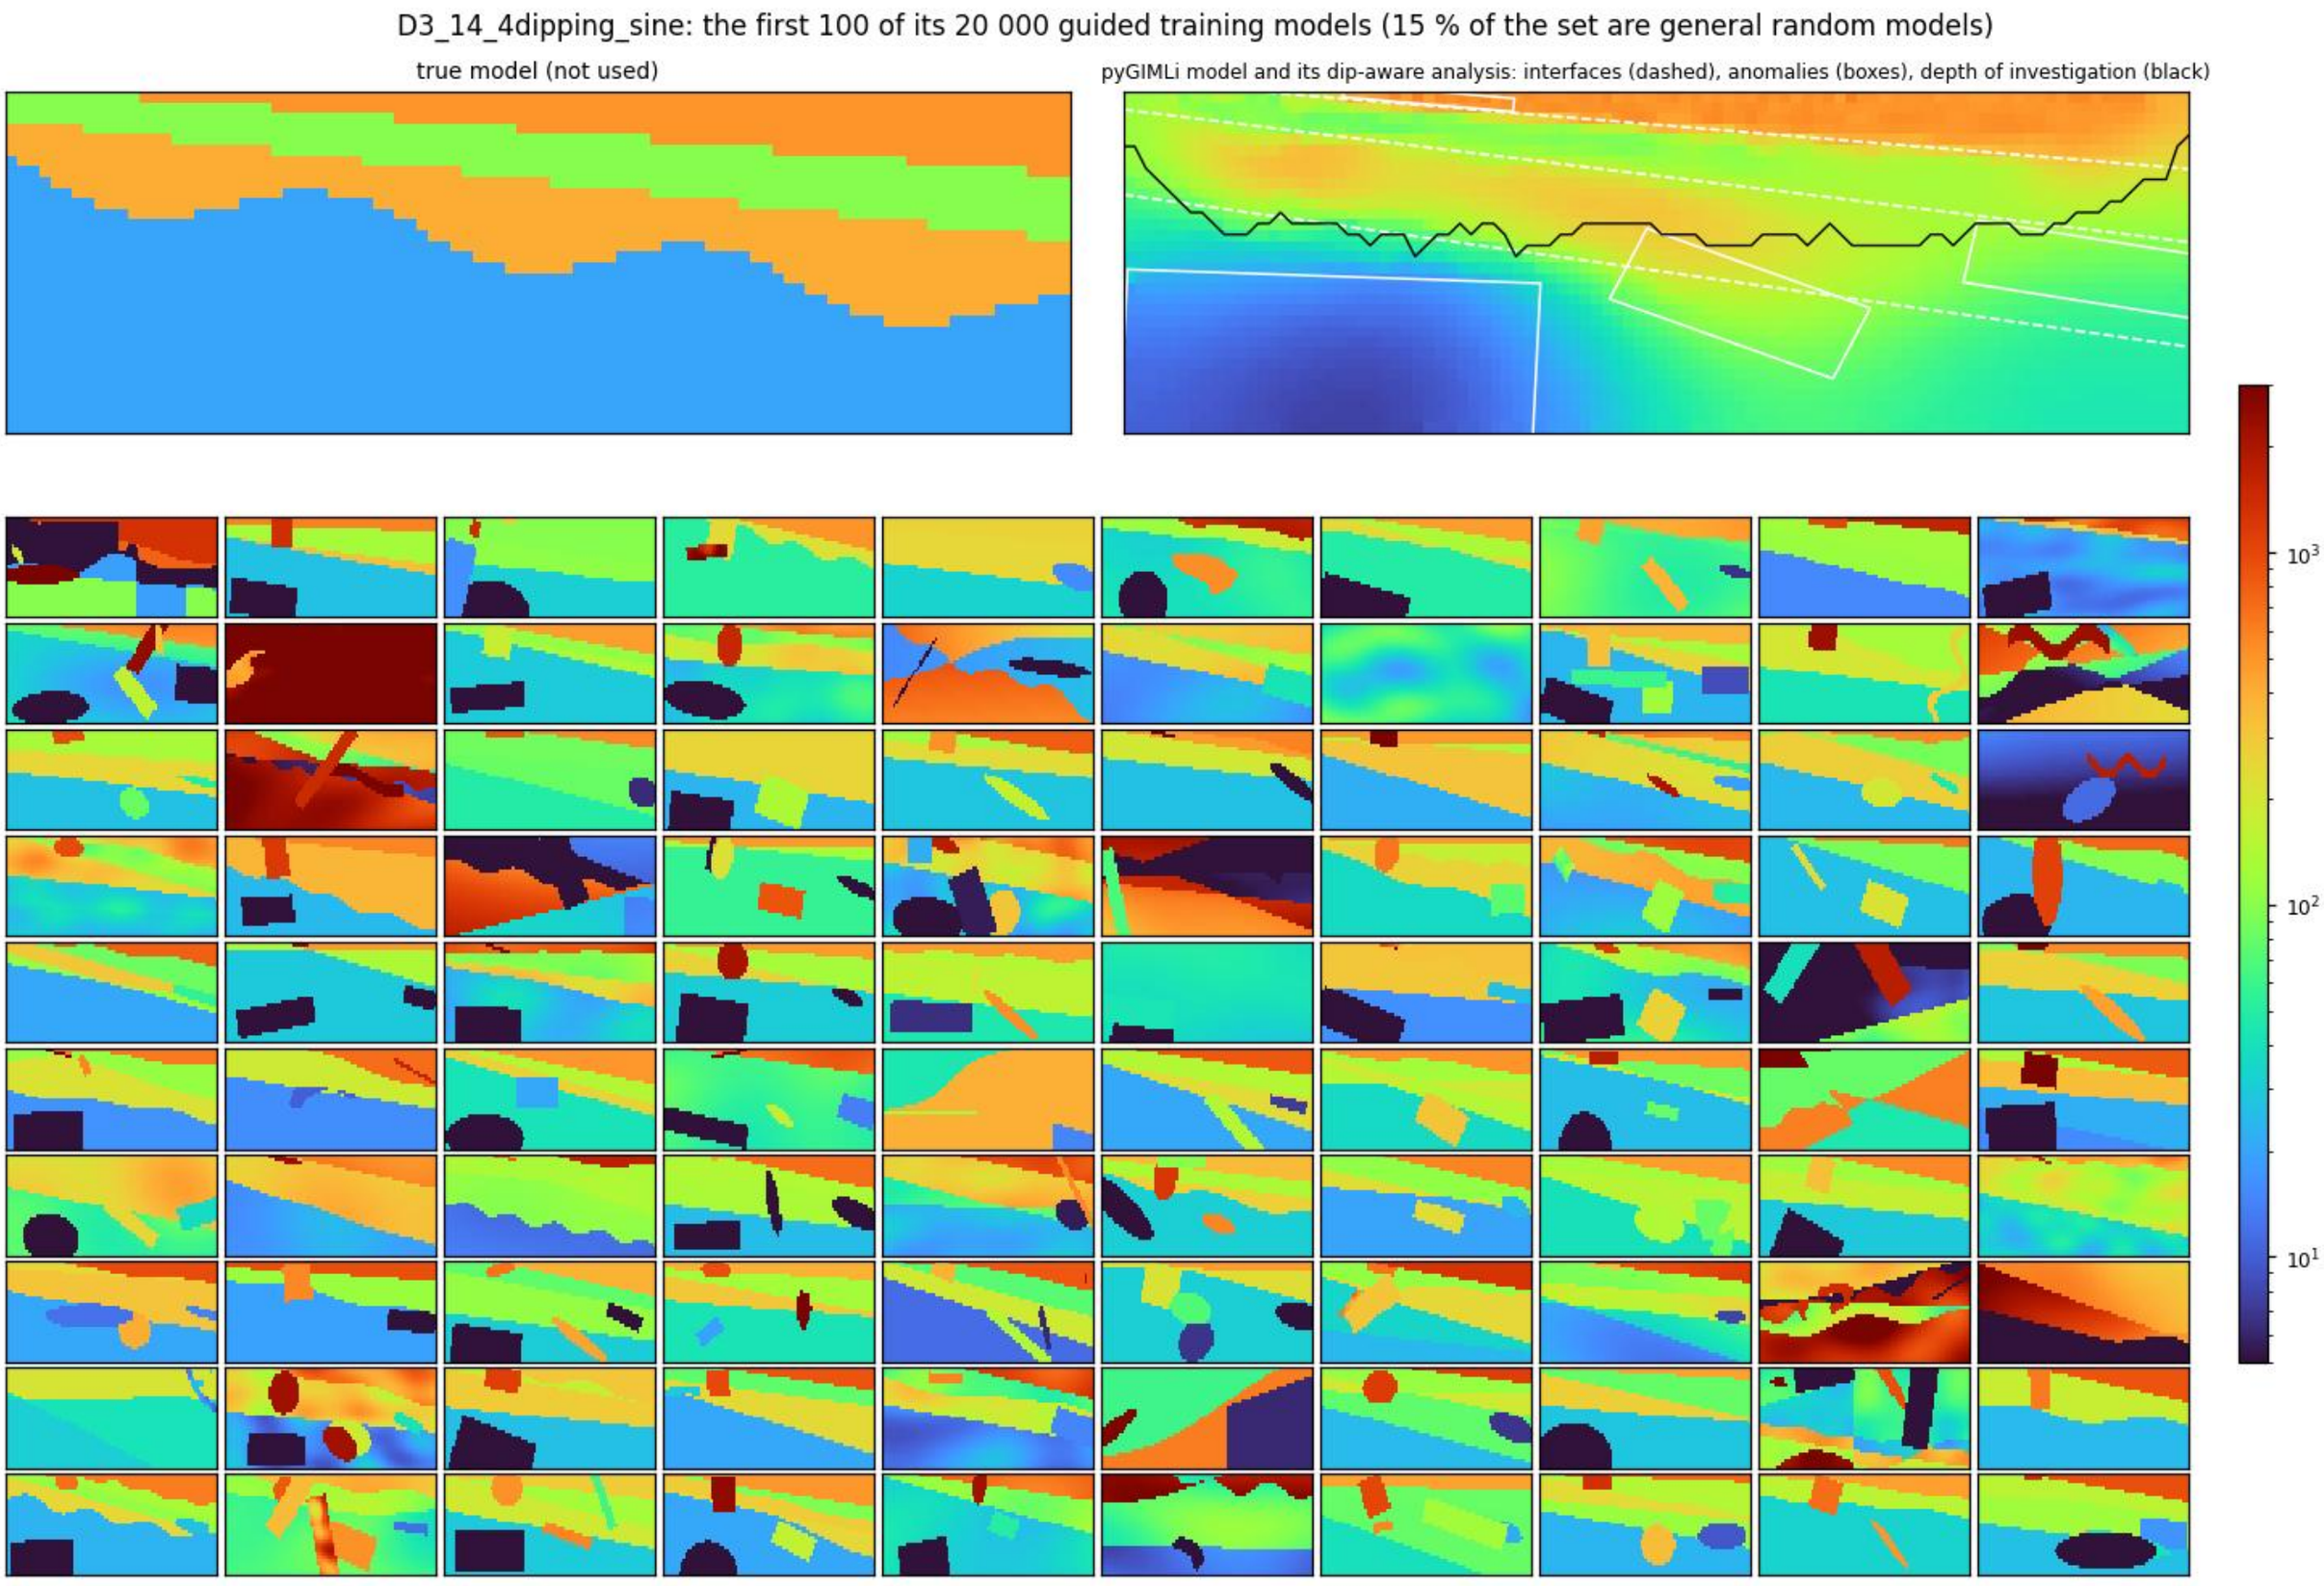
D3_14_4dipping_sine: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S57

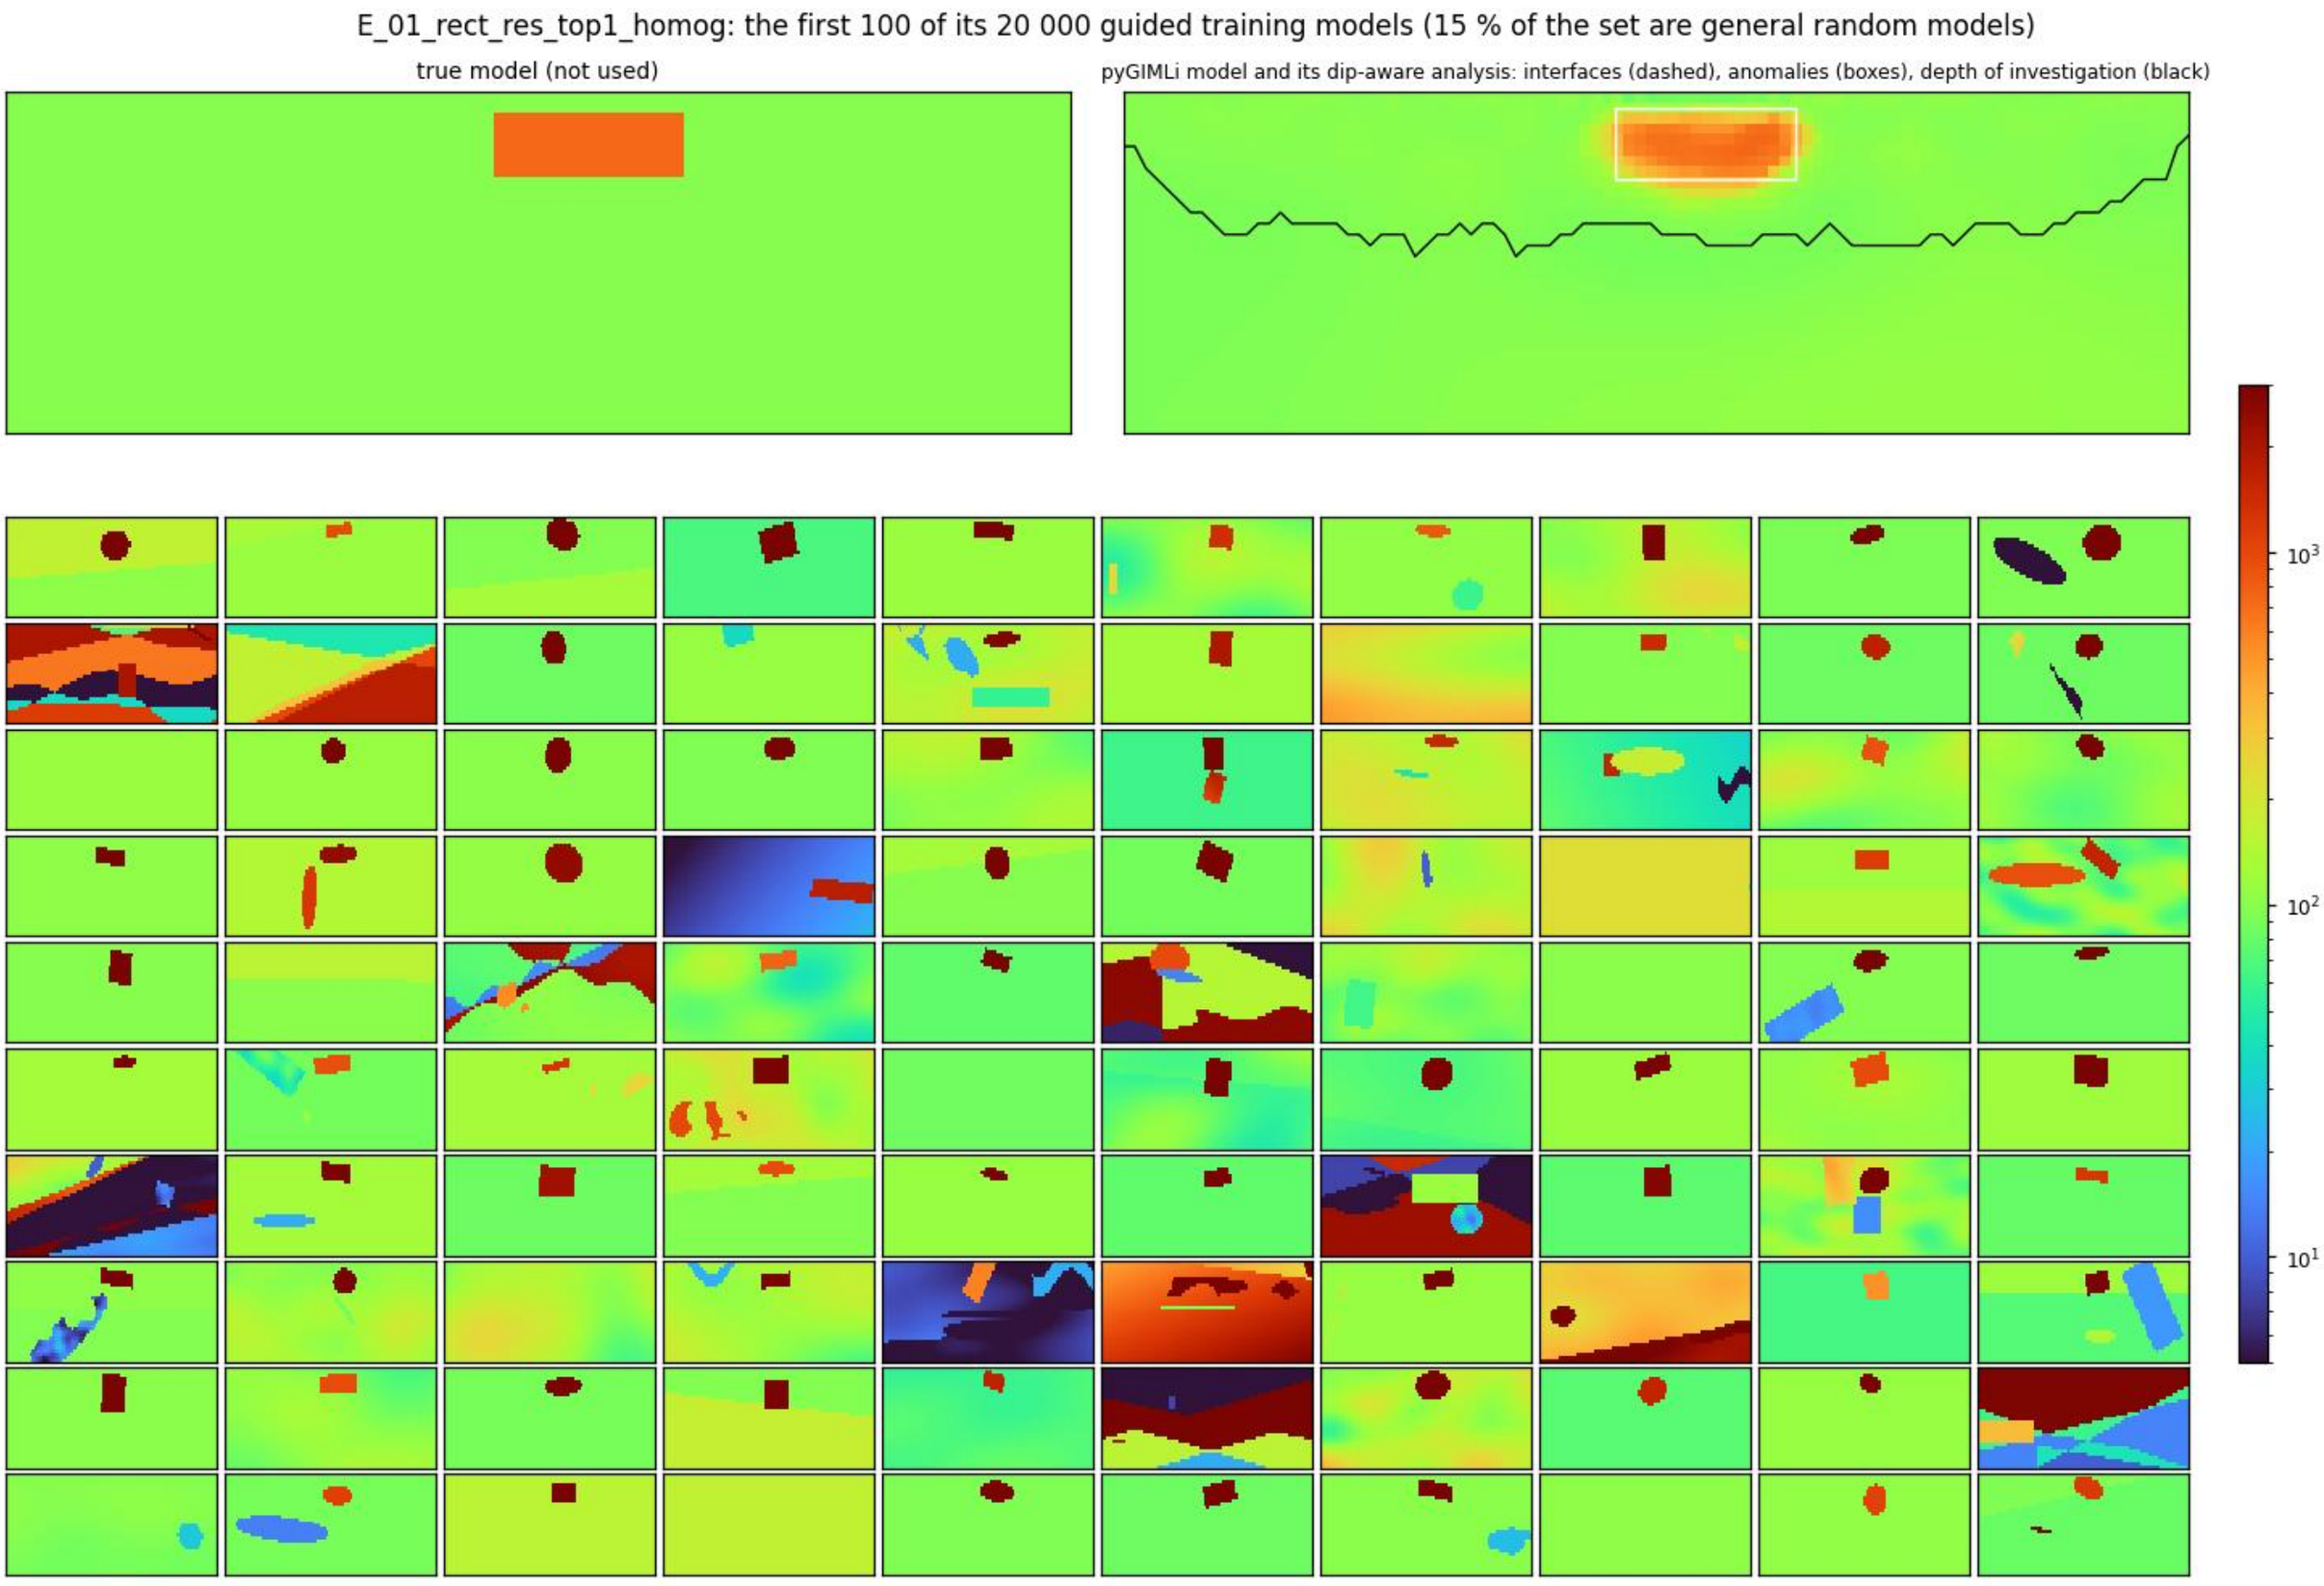
E_01_rect_res_top1_homog: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S58

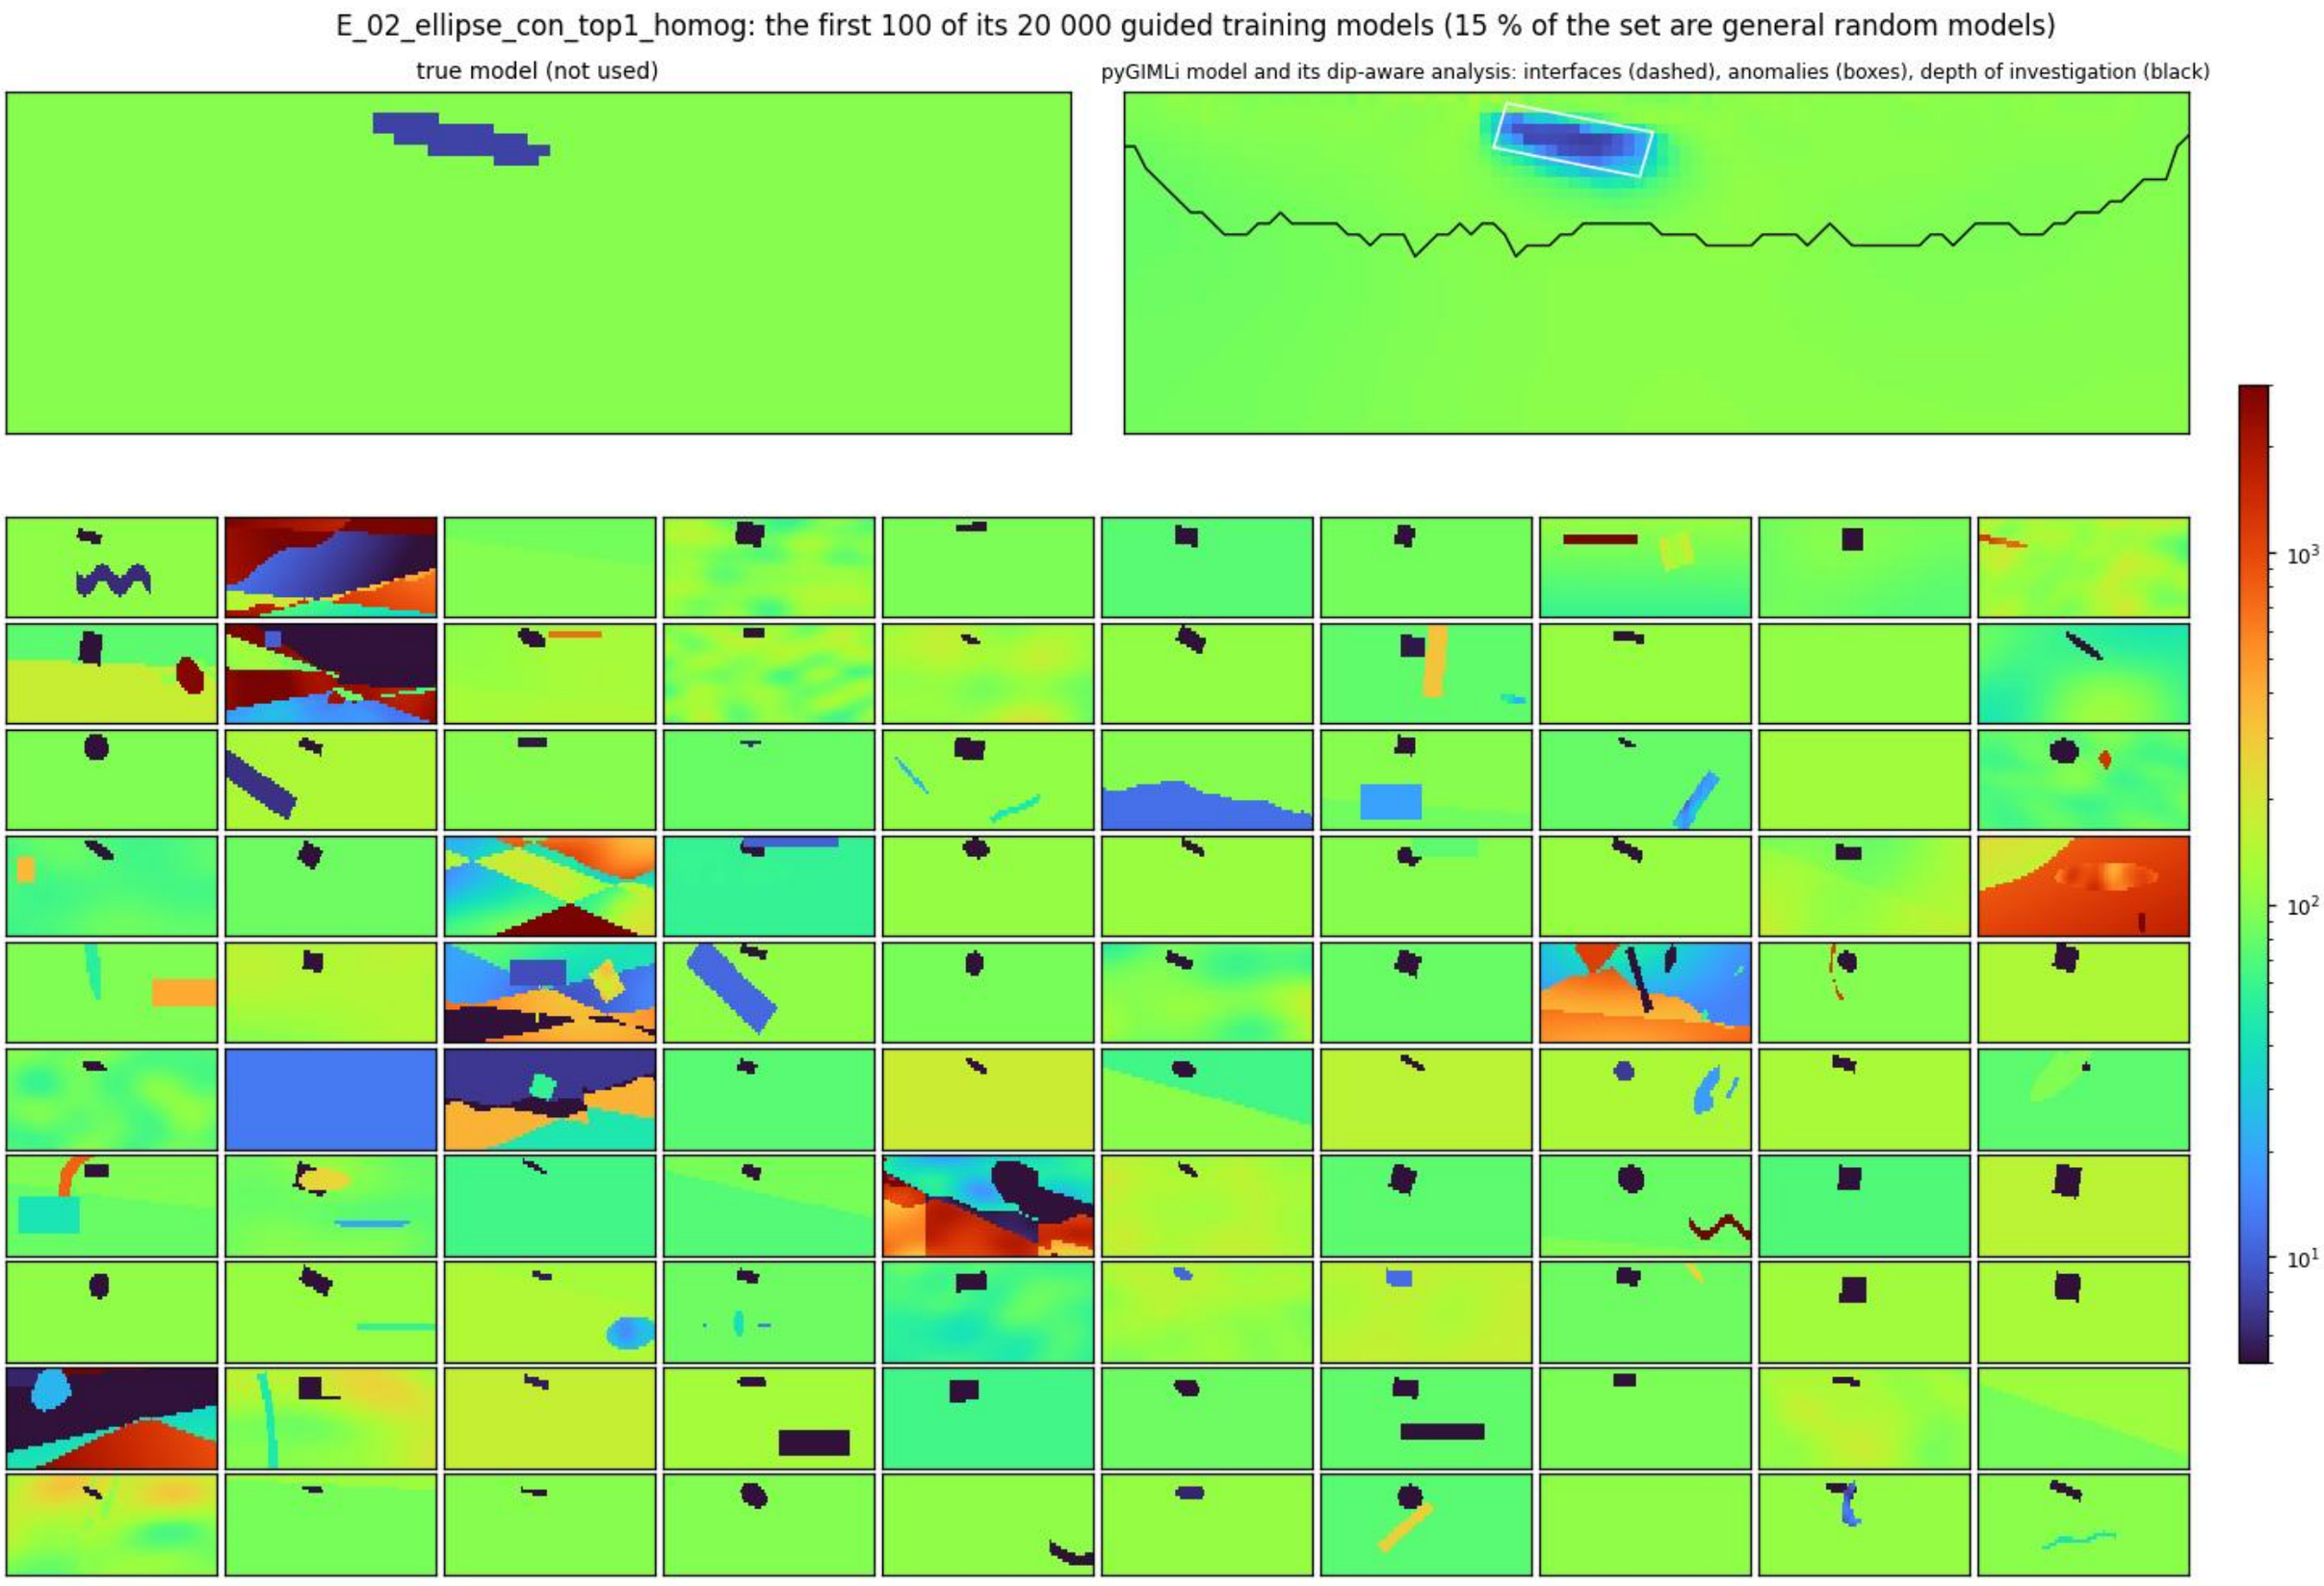
E_02_ellipse_con_top1_homog: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S59

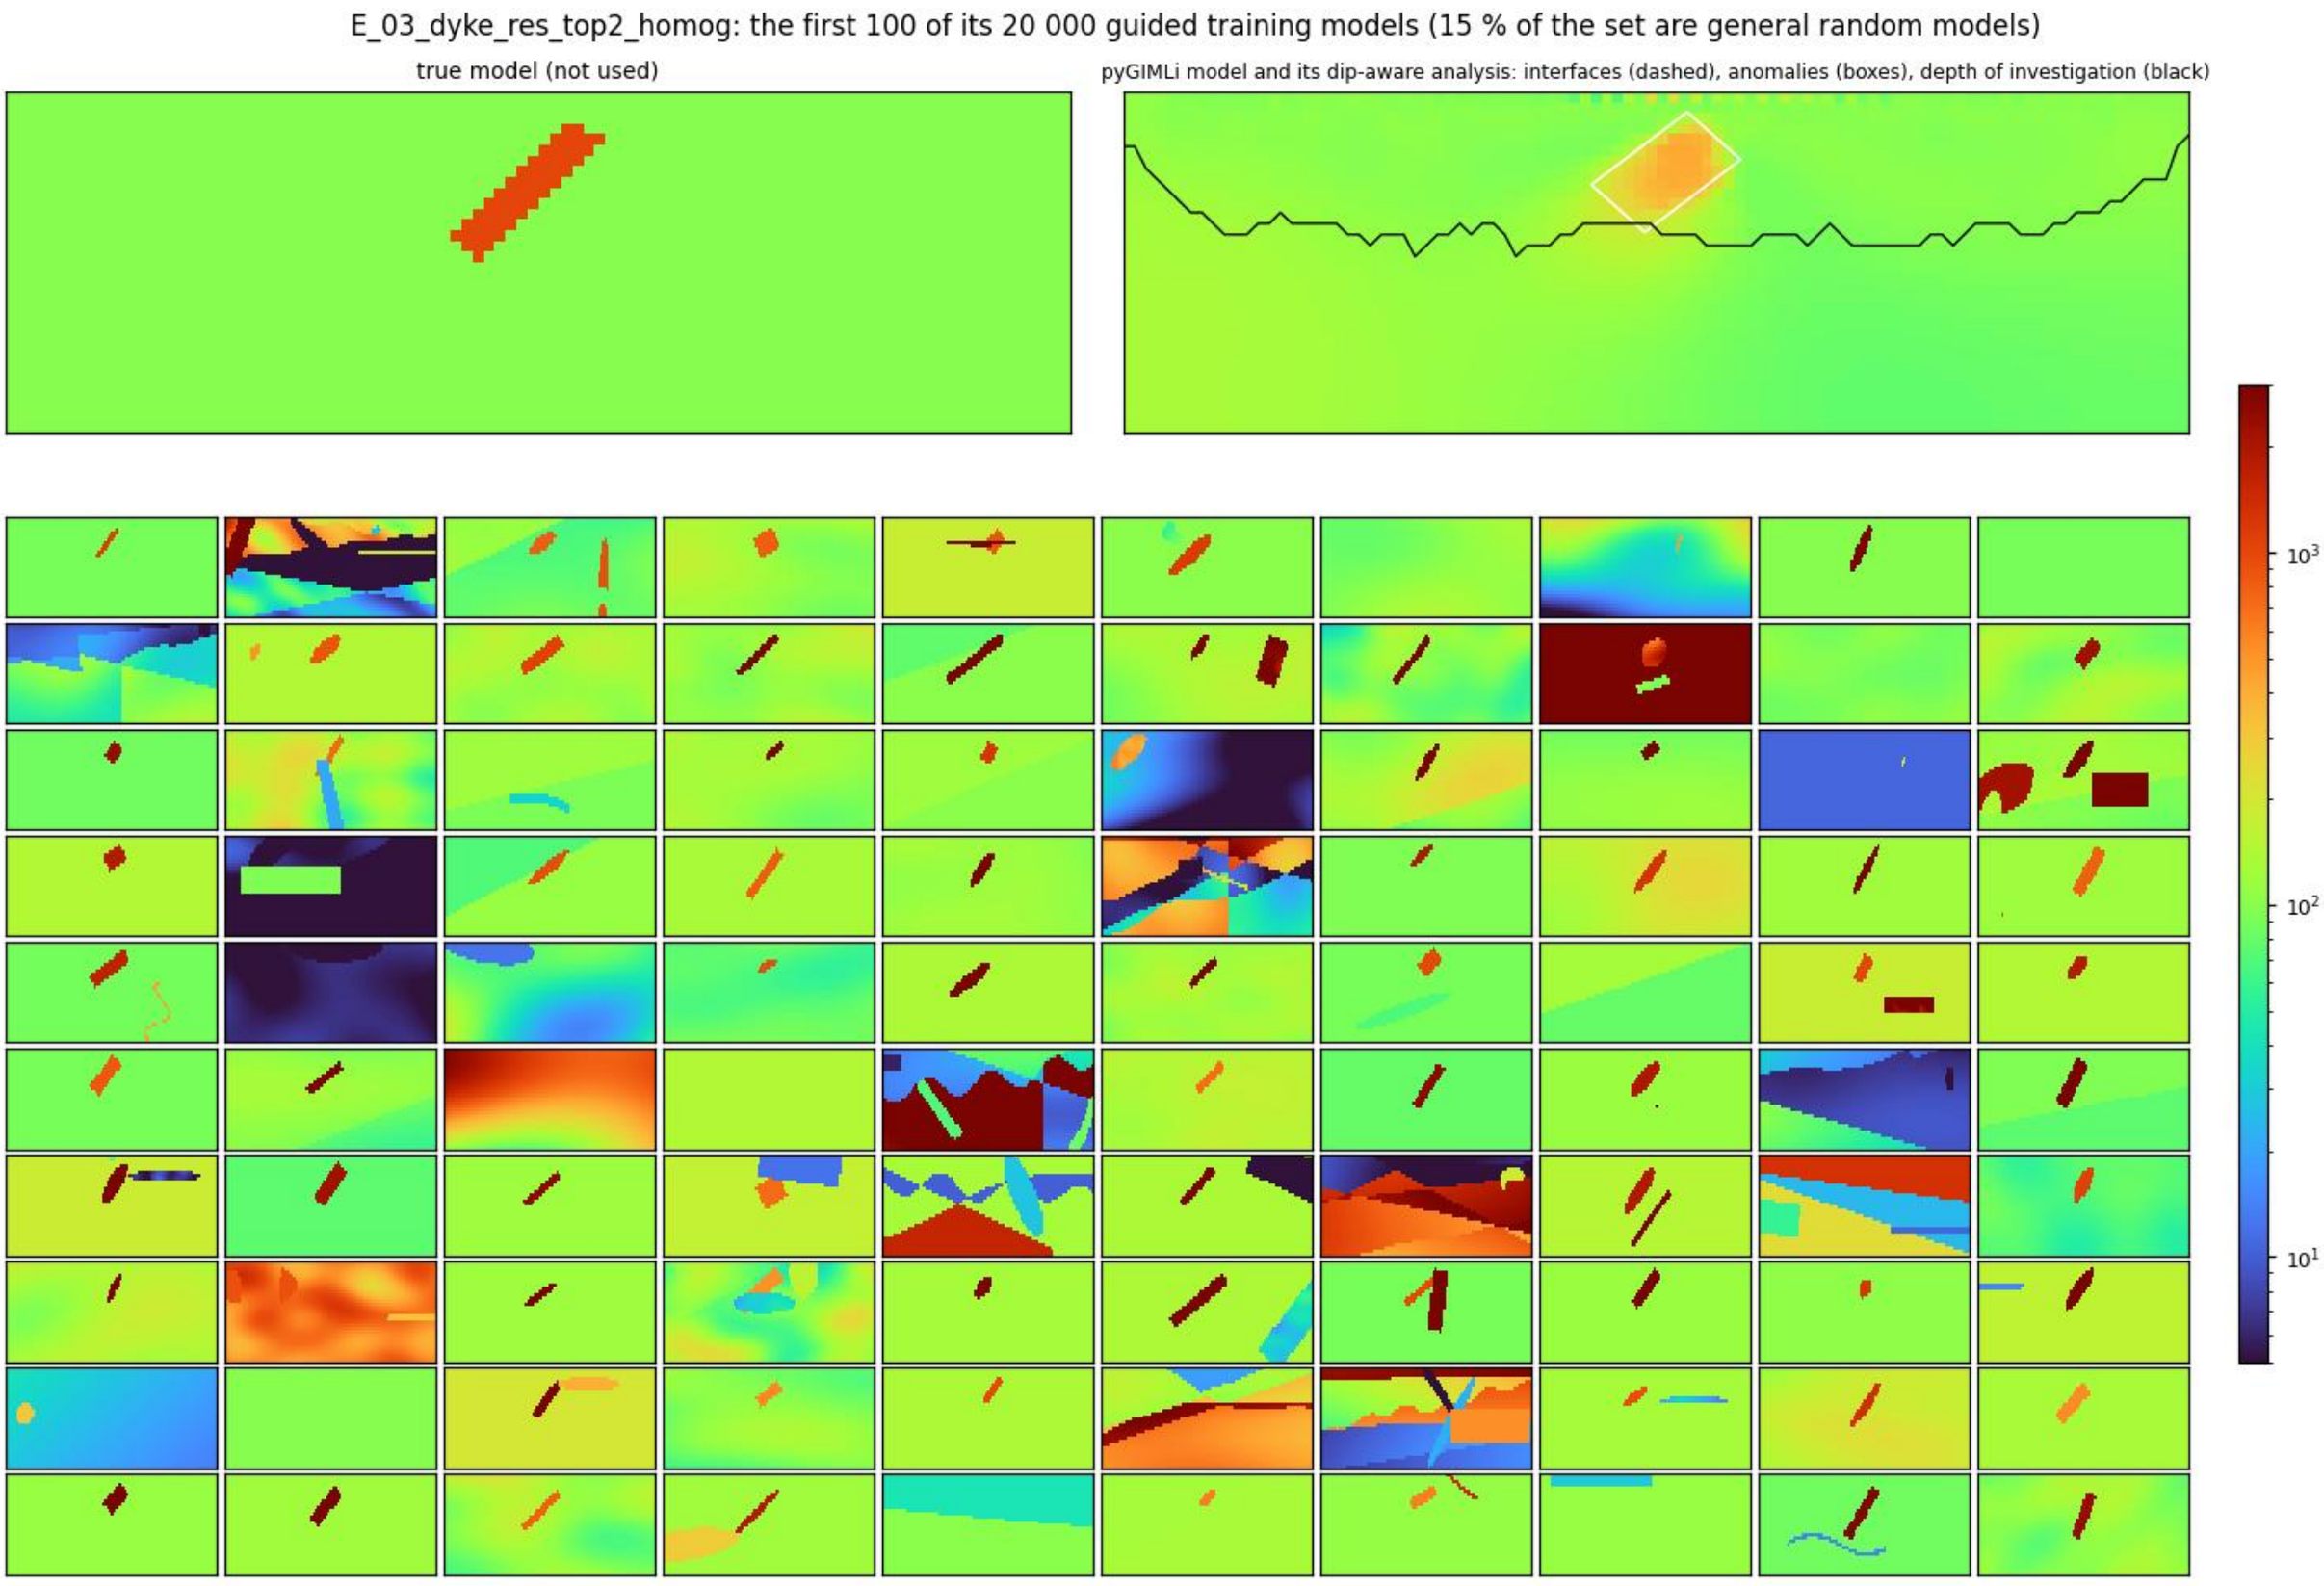
E_03_dyke_res_top2_homog: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S60

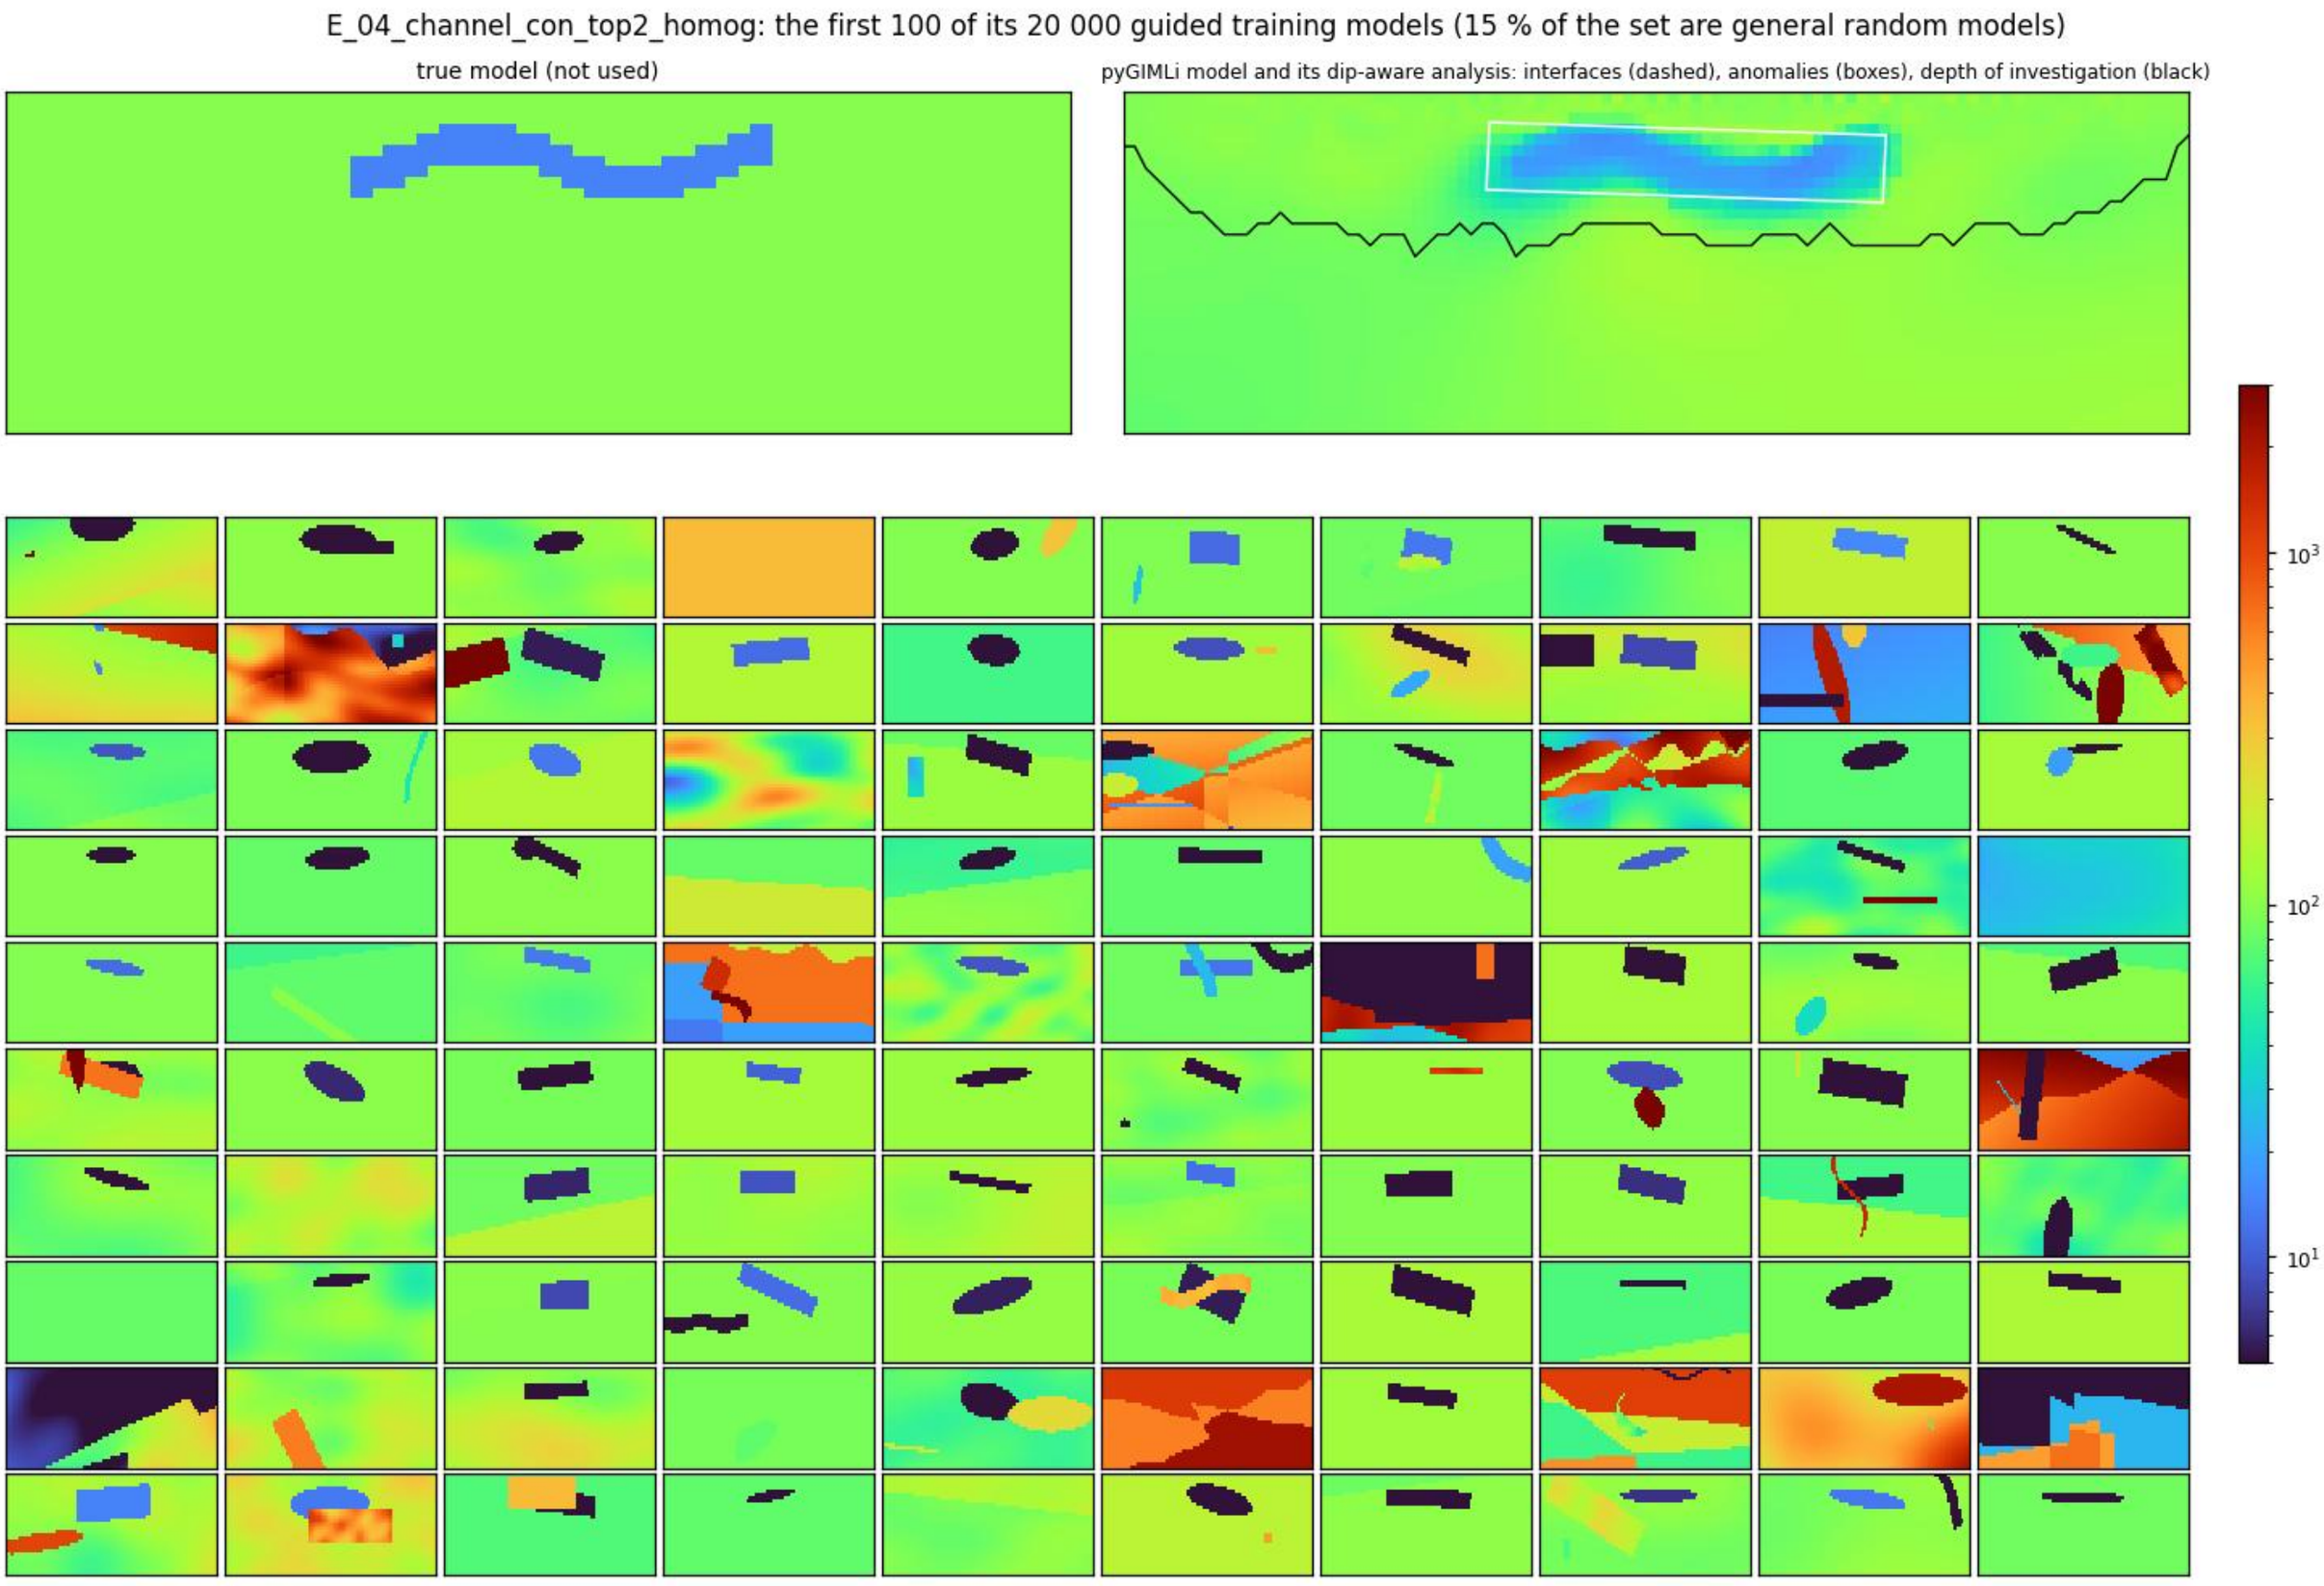
E_04_channel_con_top2_homog: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S61

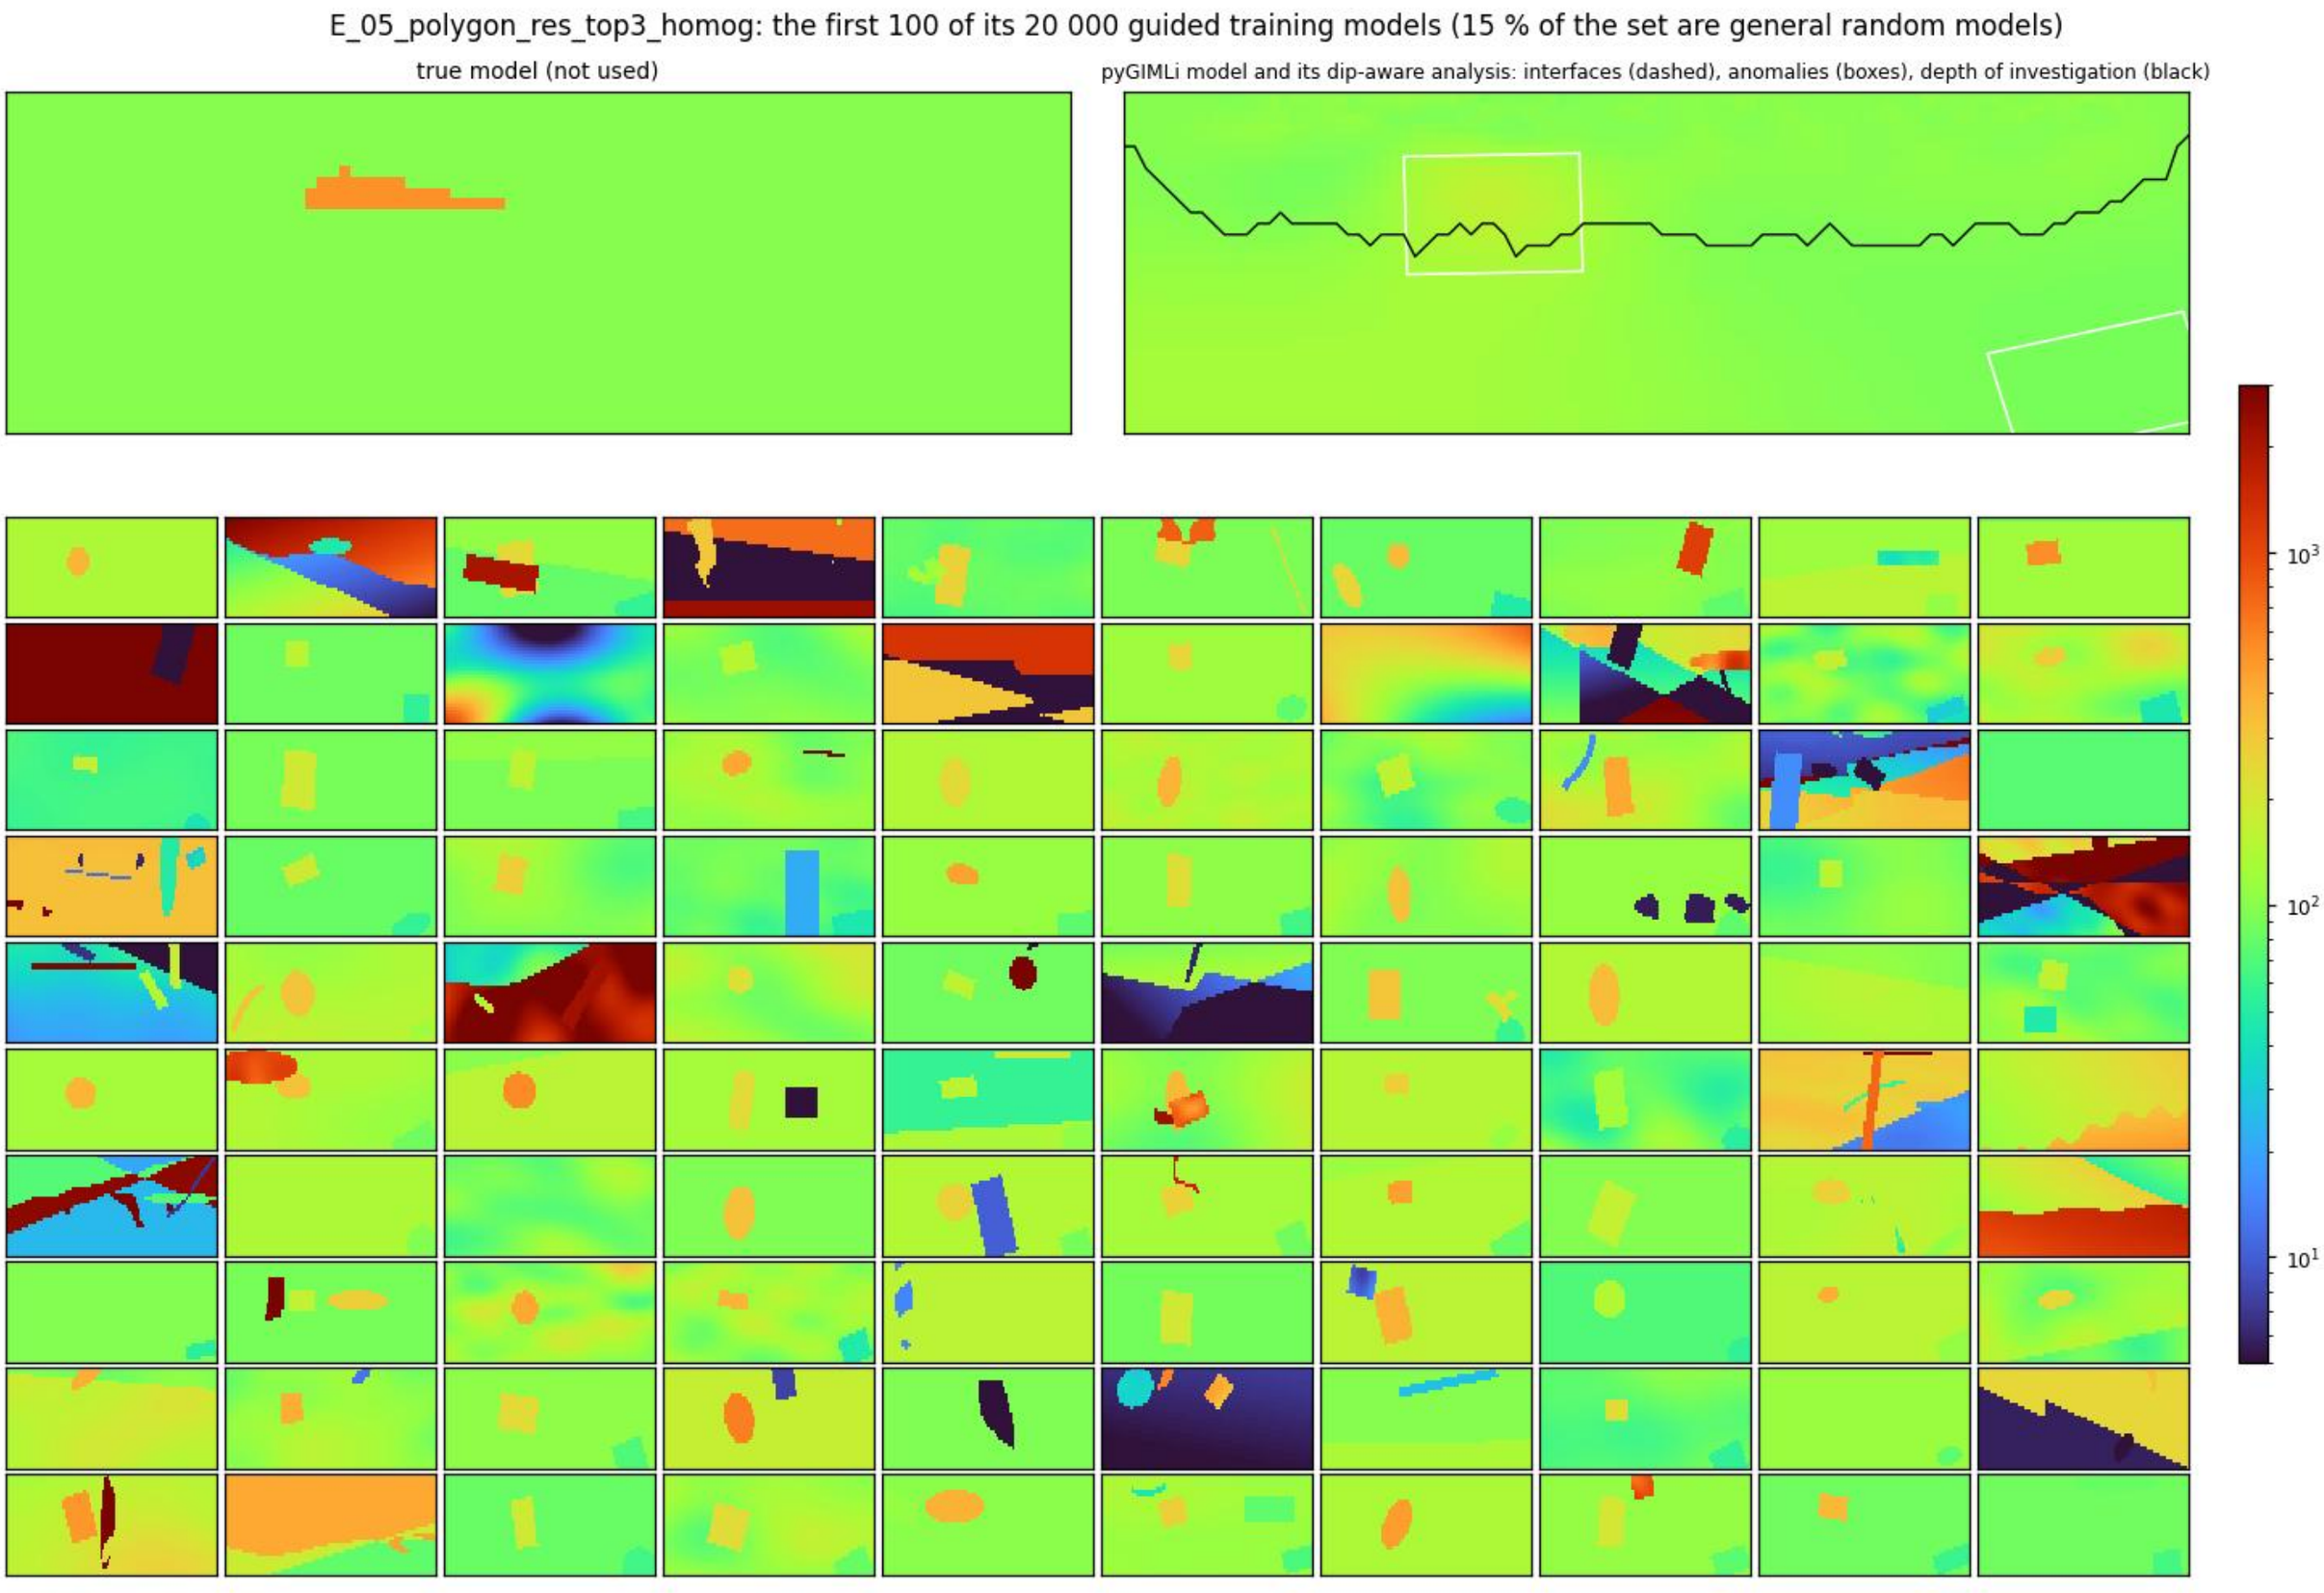
E_05_polygon_res_top3_homog: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S62

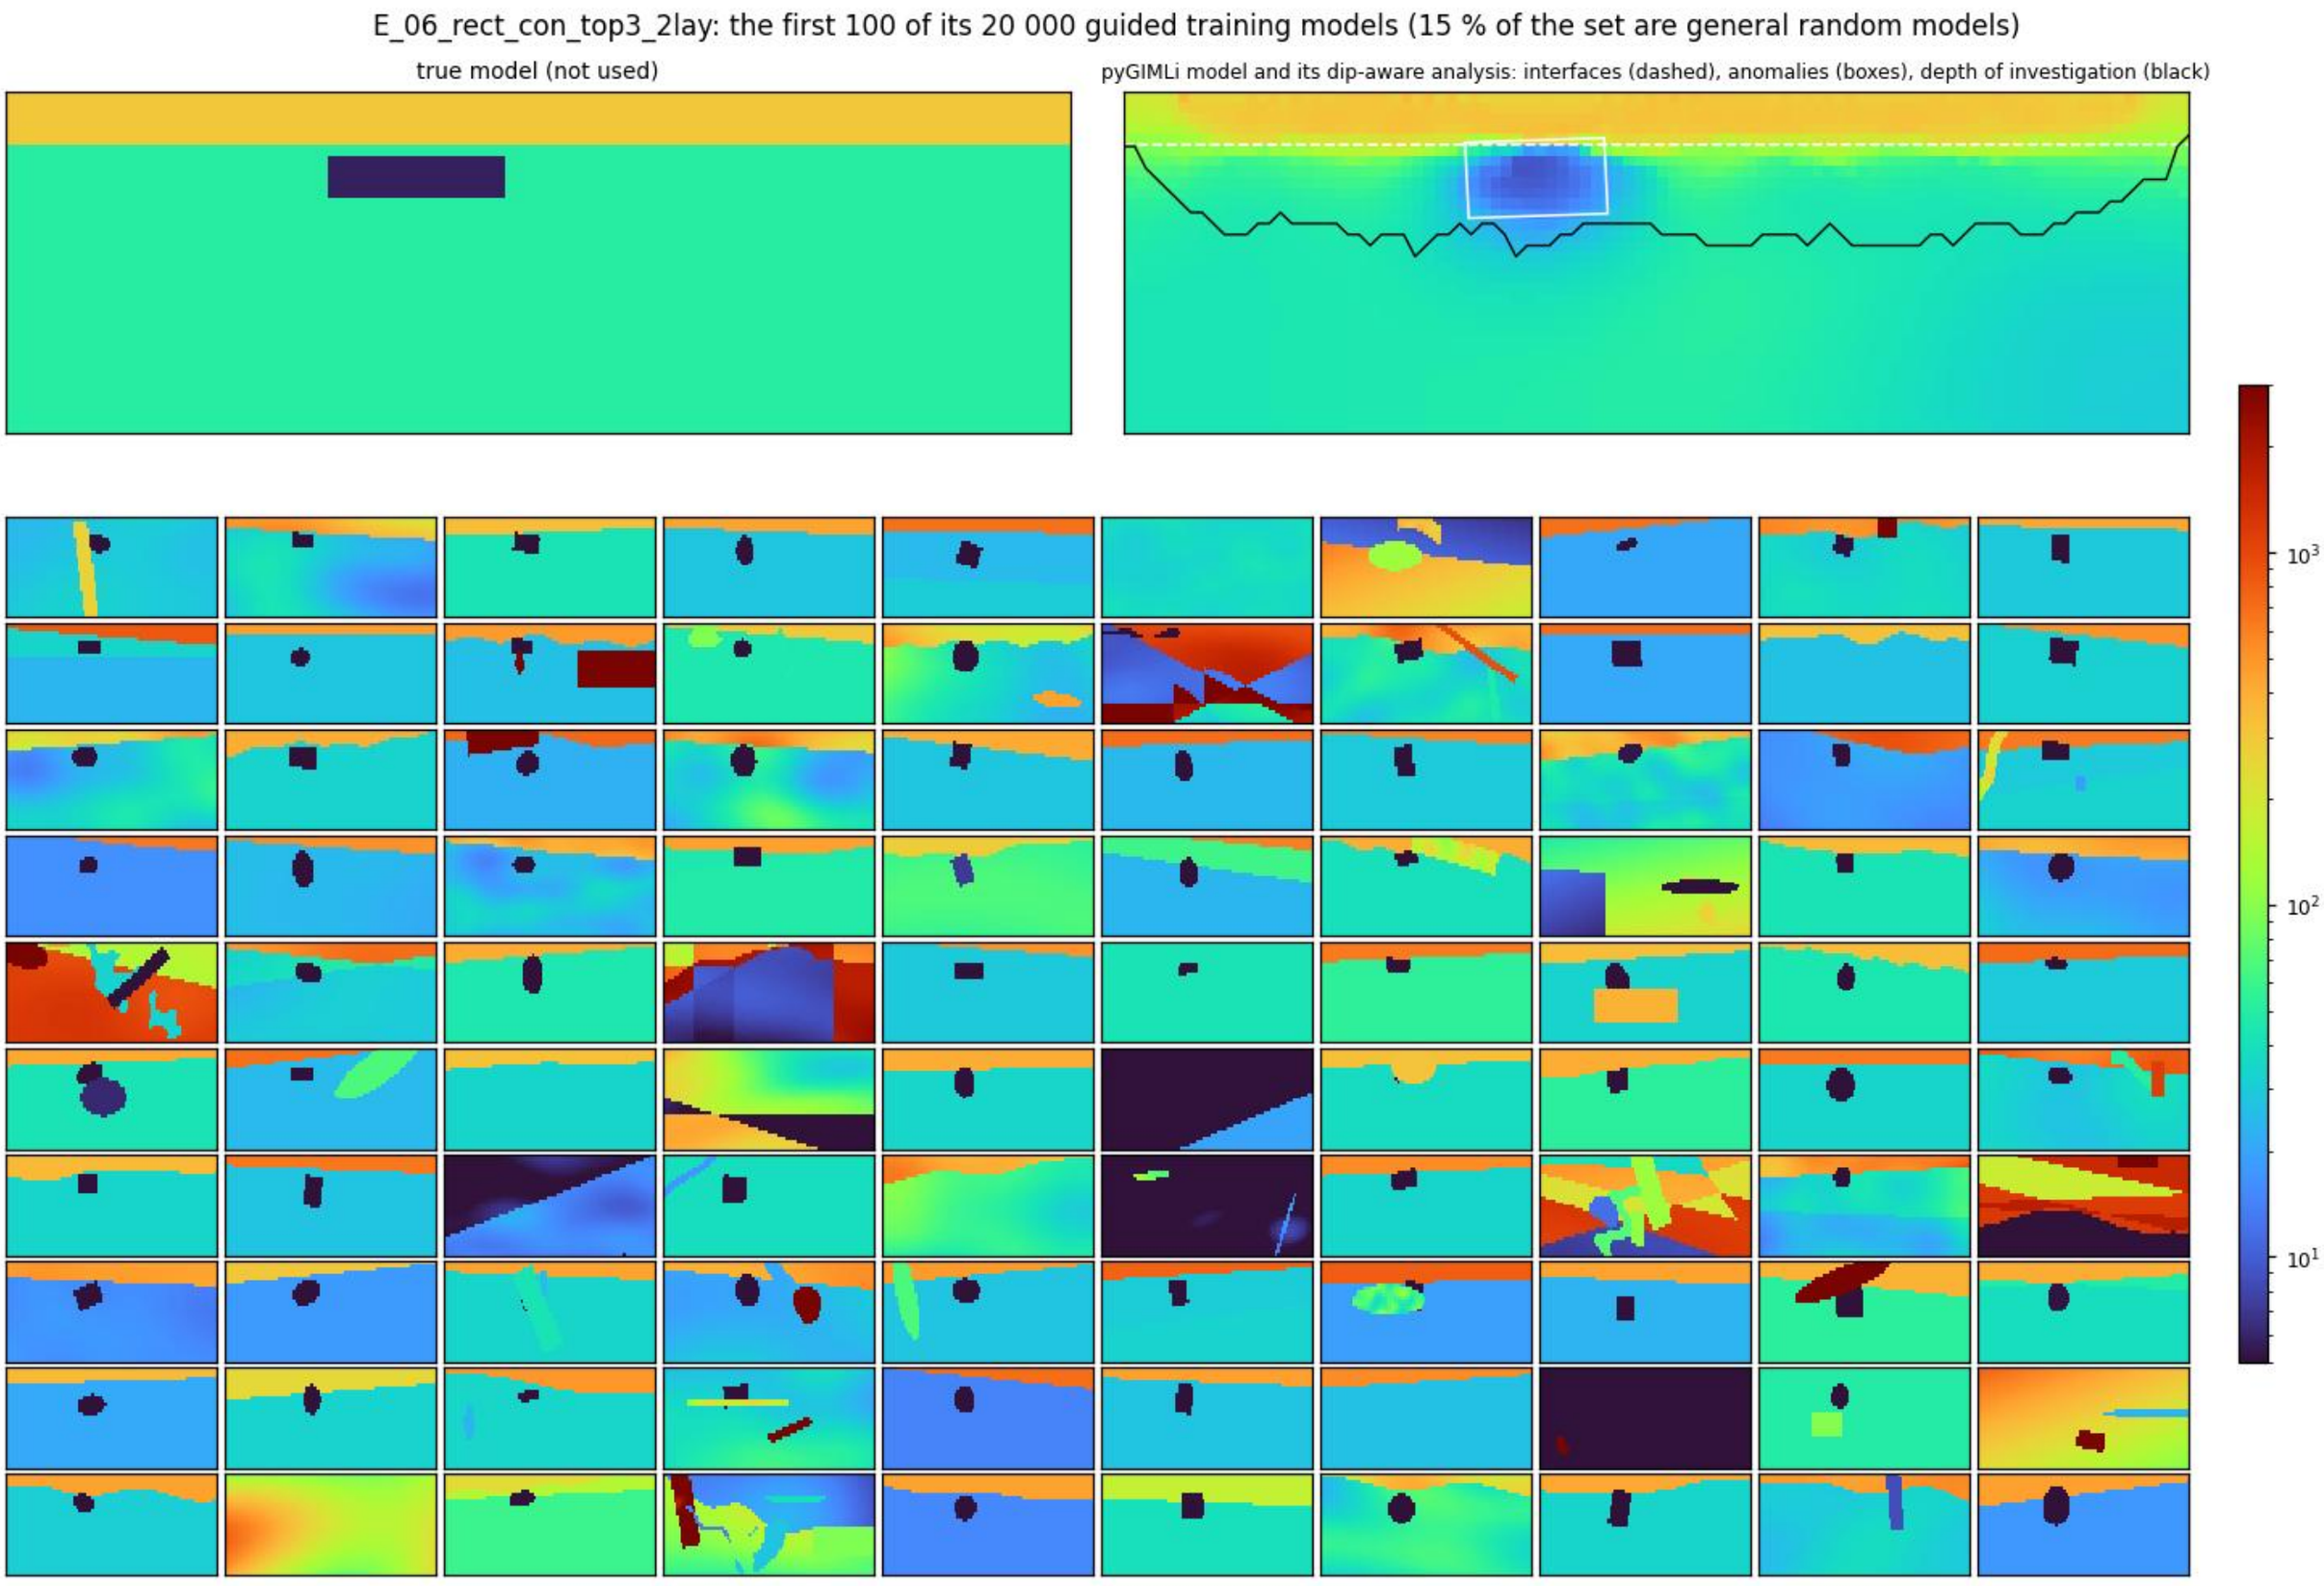
E_06_rect_con_top3_2lay: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S63

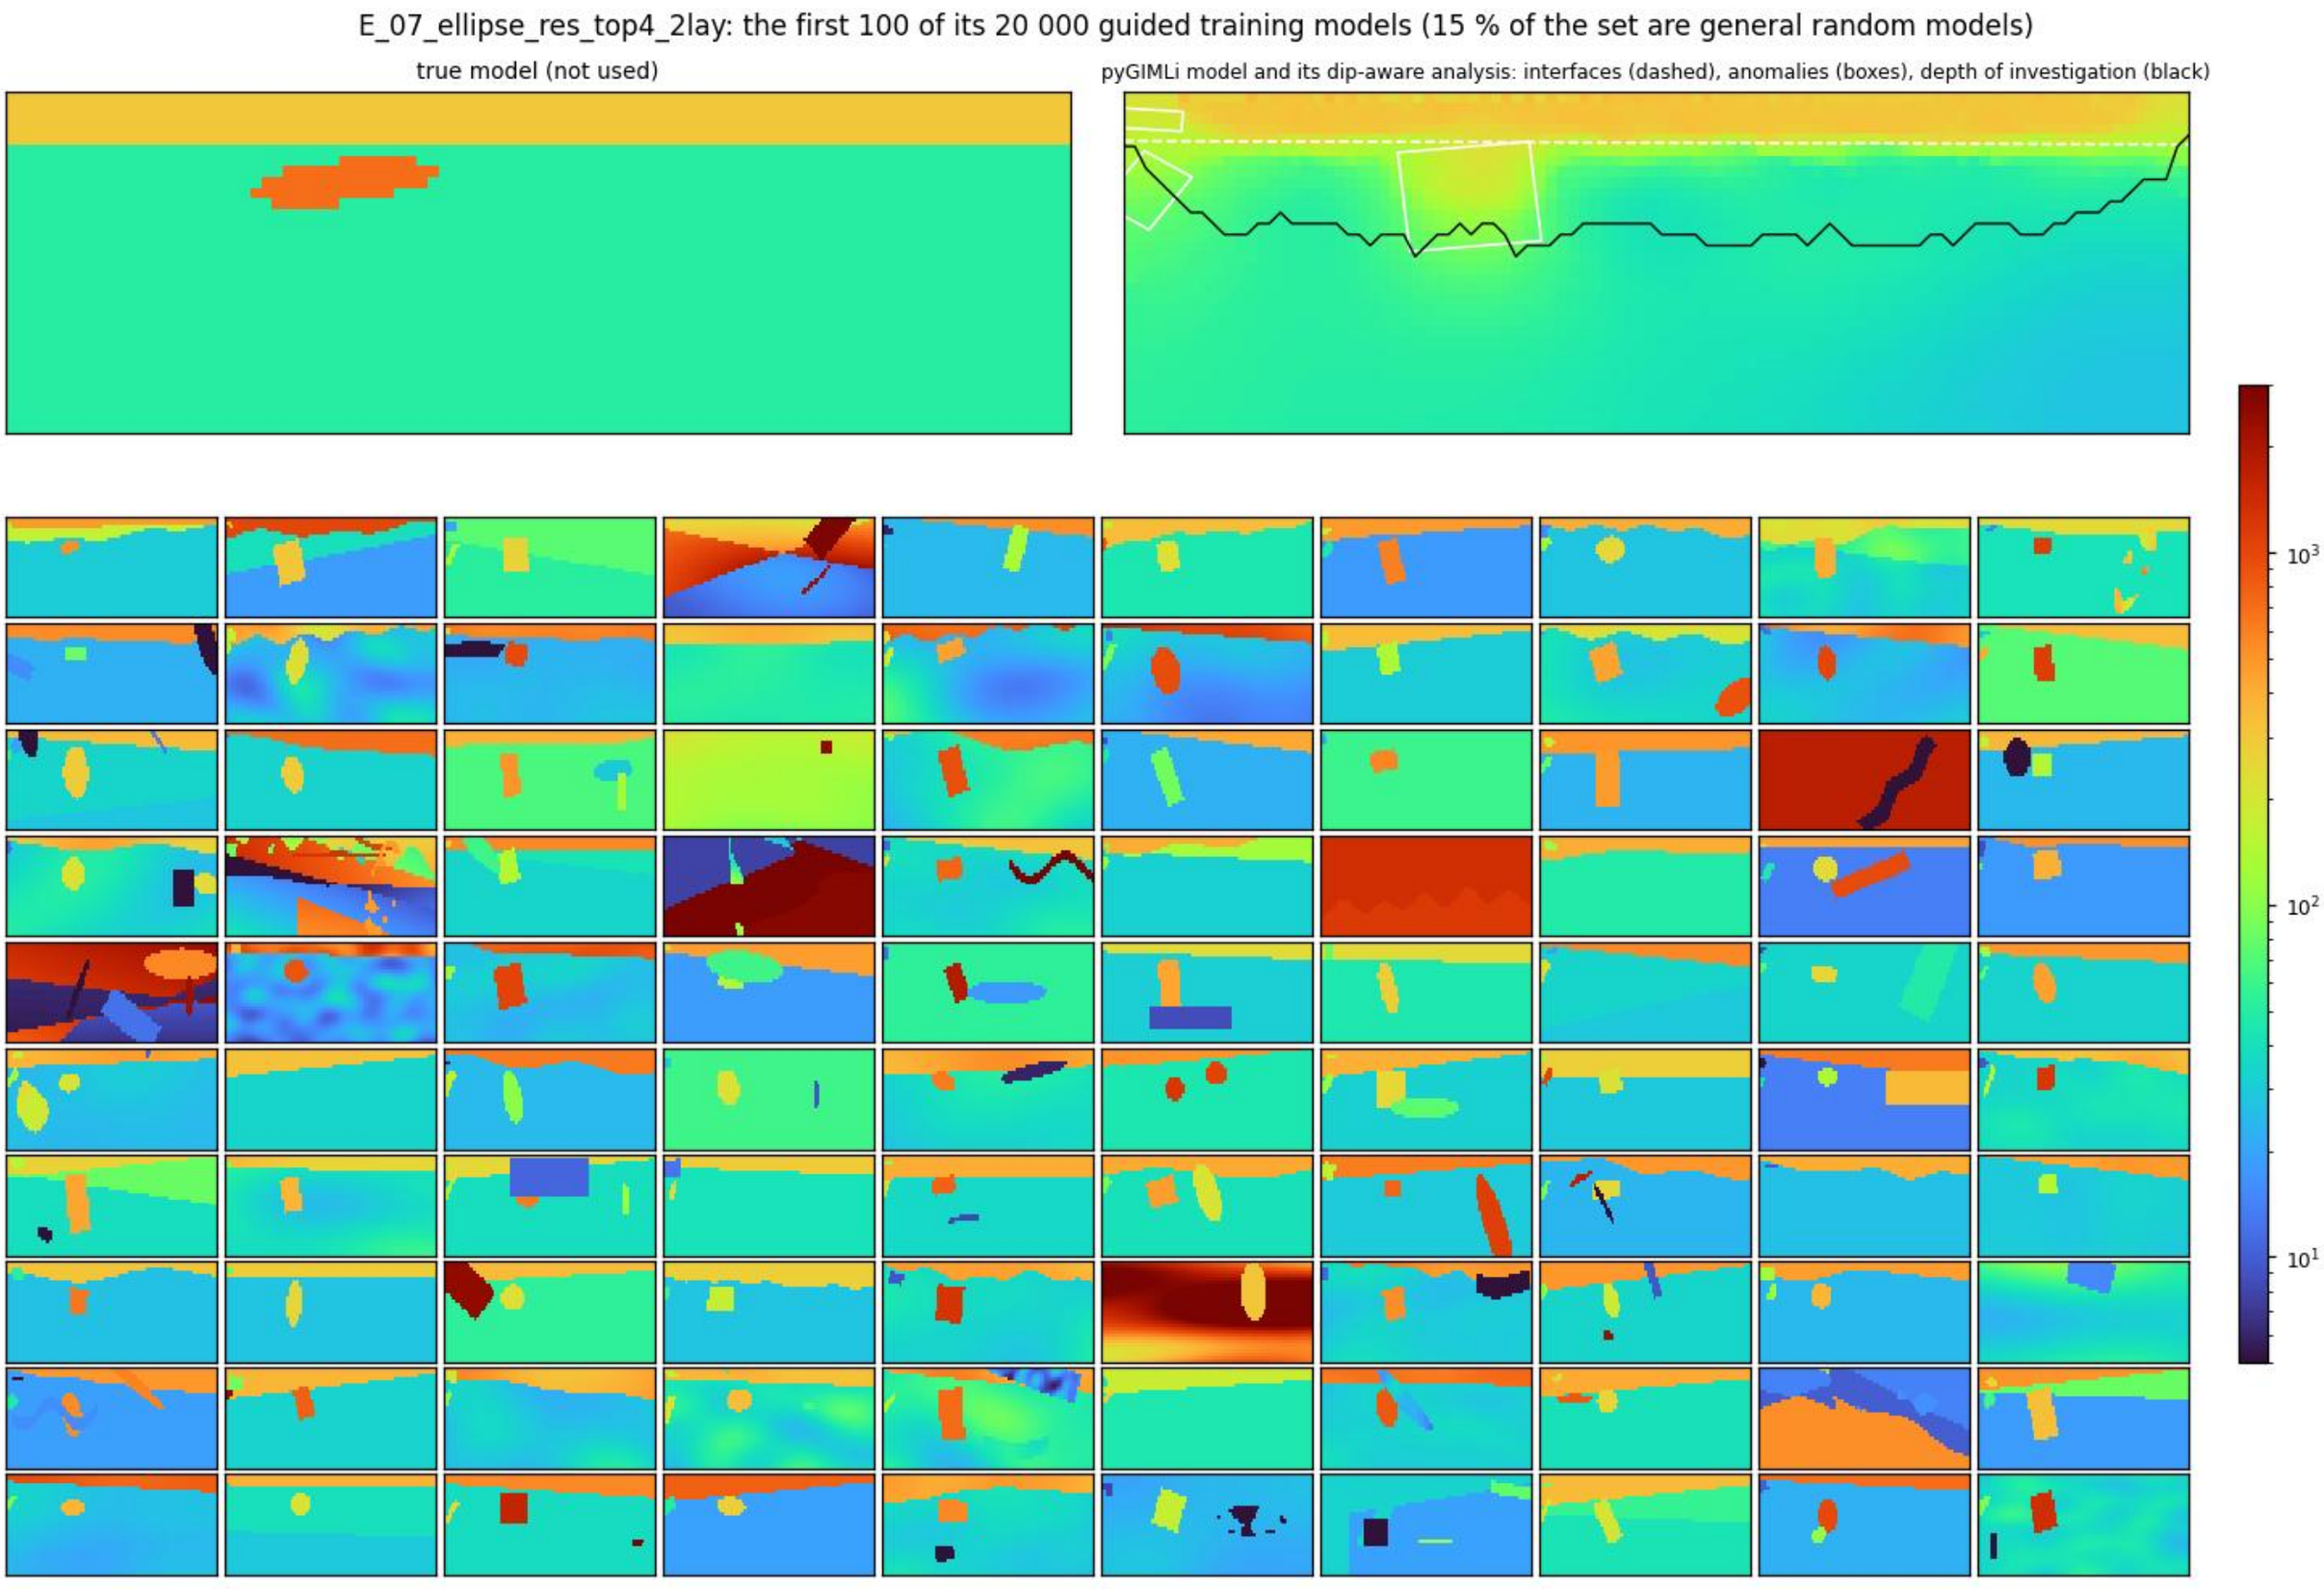
E_07_ellipse_res_top4_2lay: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S64

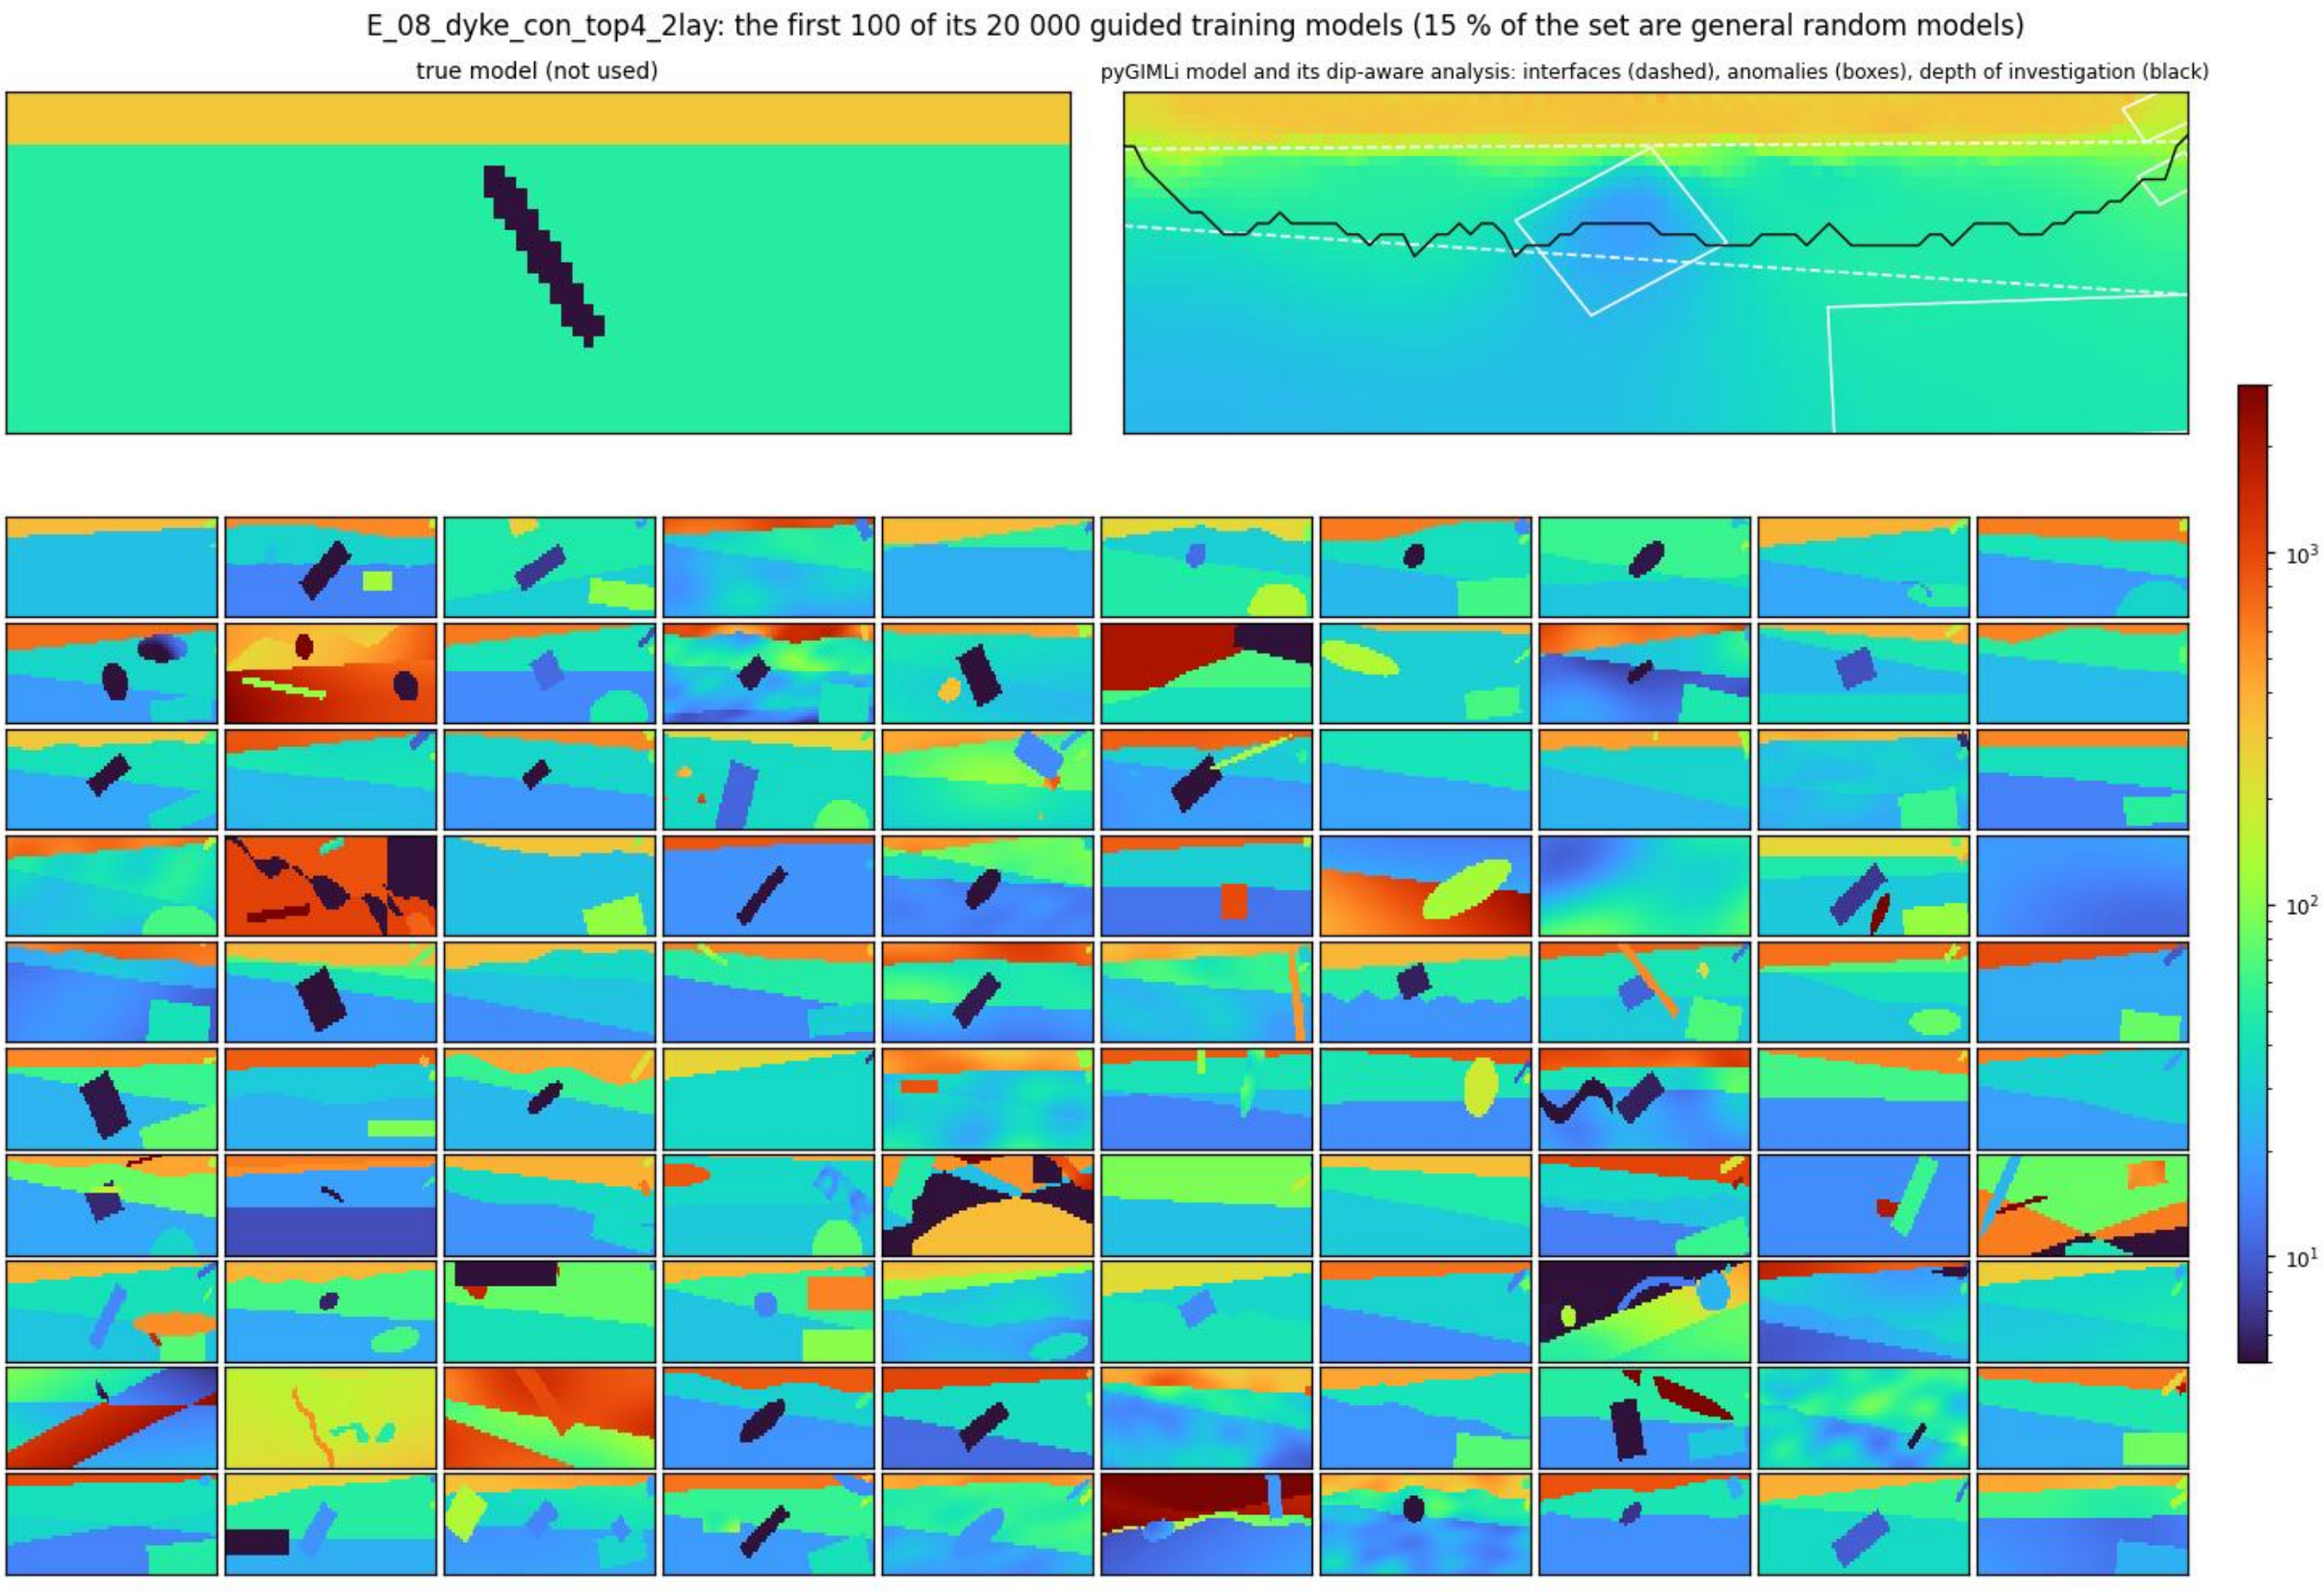
E_08_dyke_con_top4_2lay: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S65

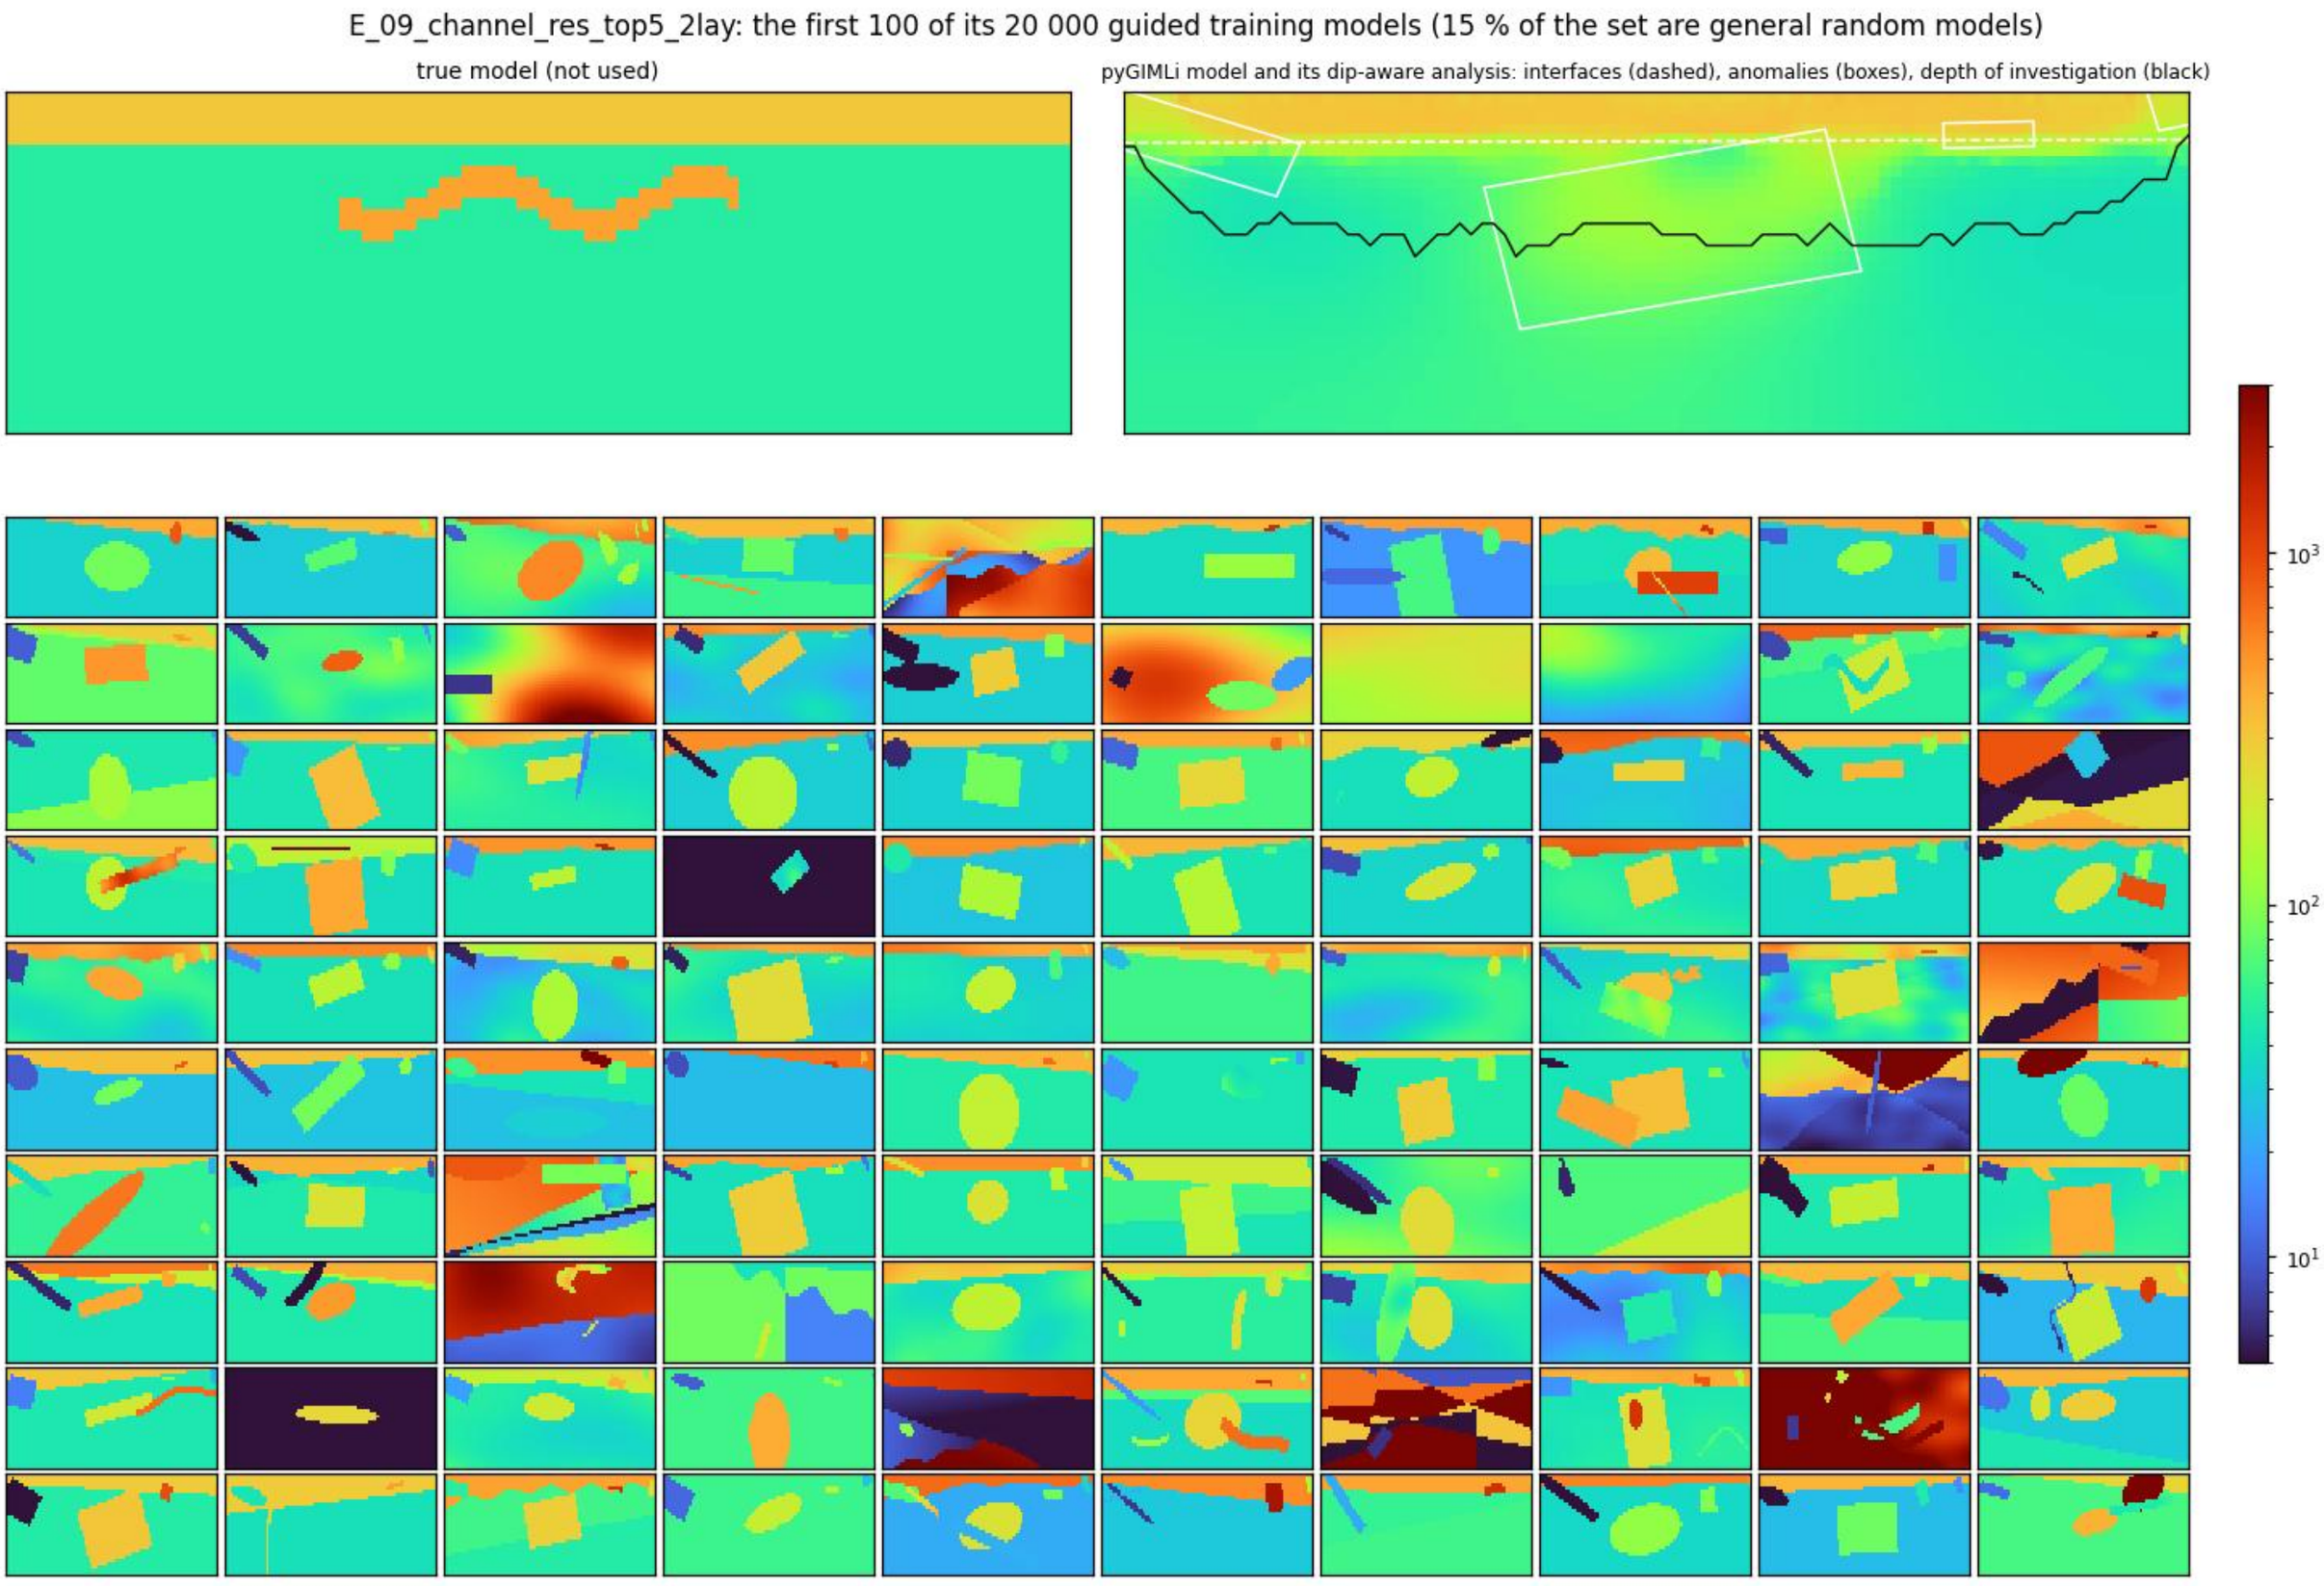
E_09_channel_res_top5_2lay: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S66

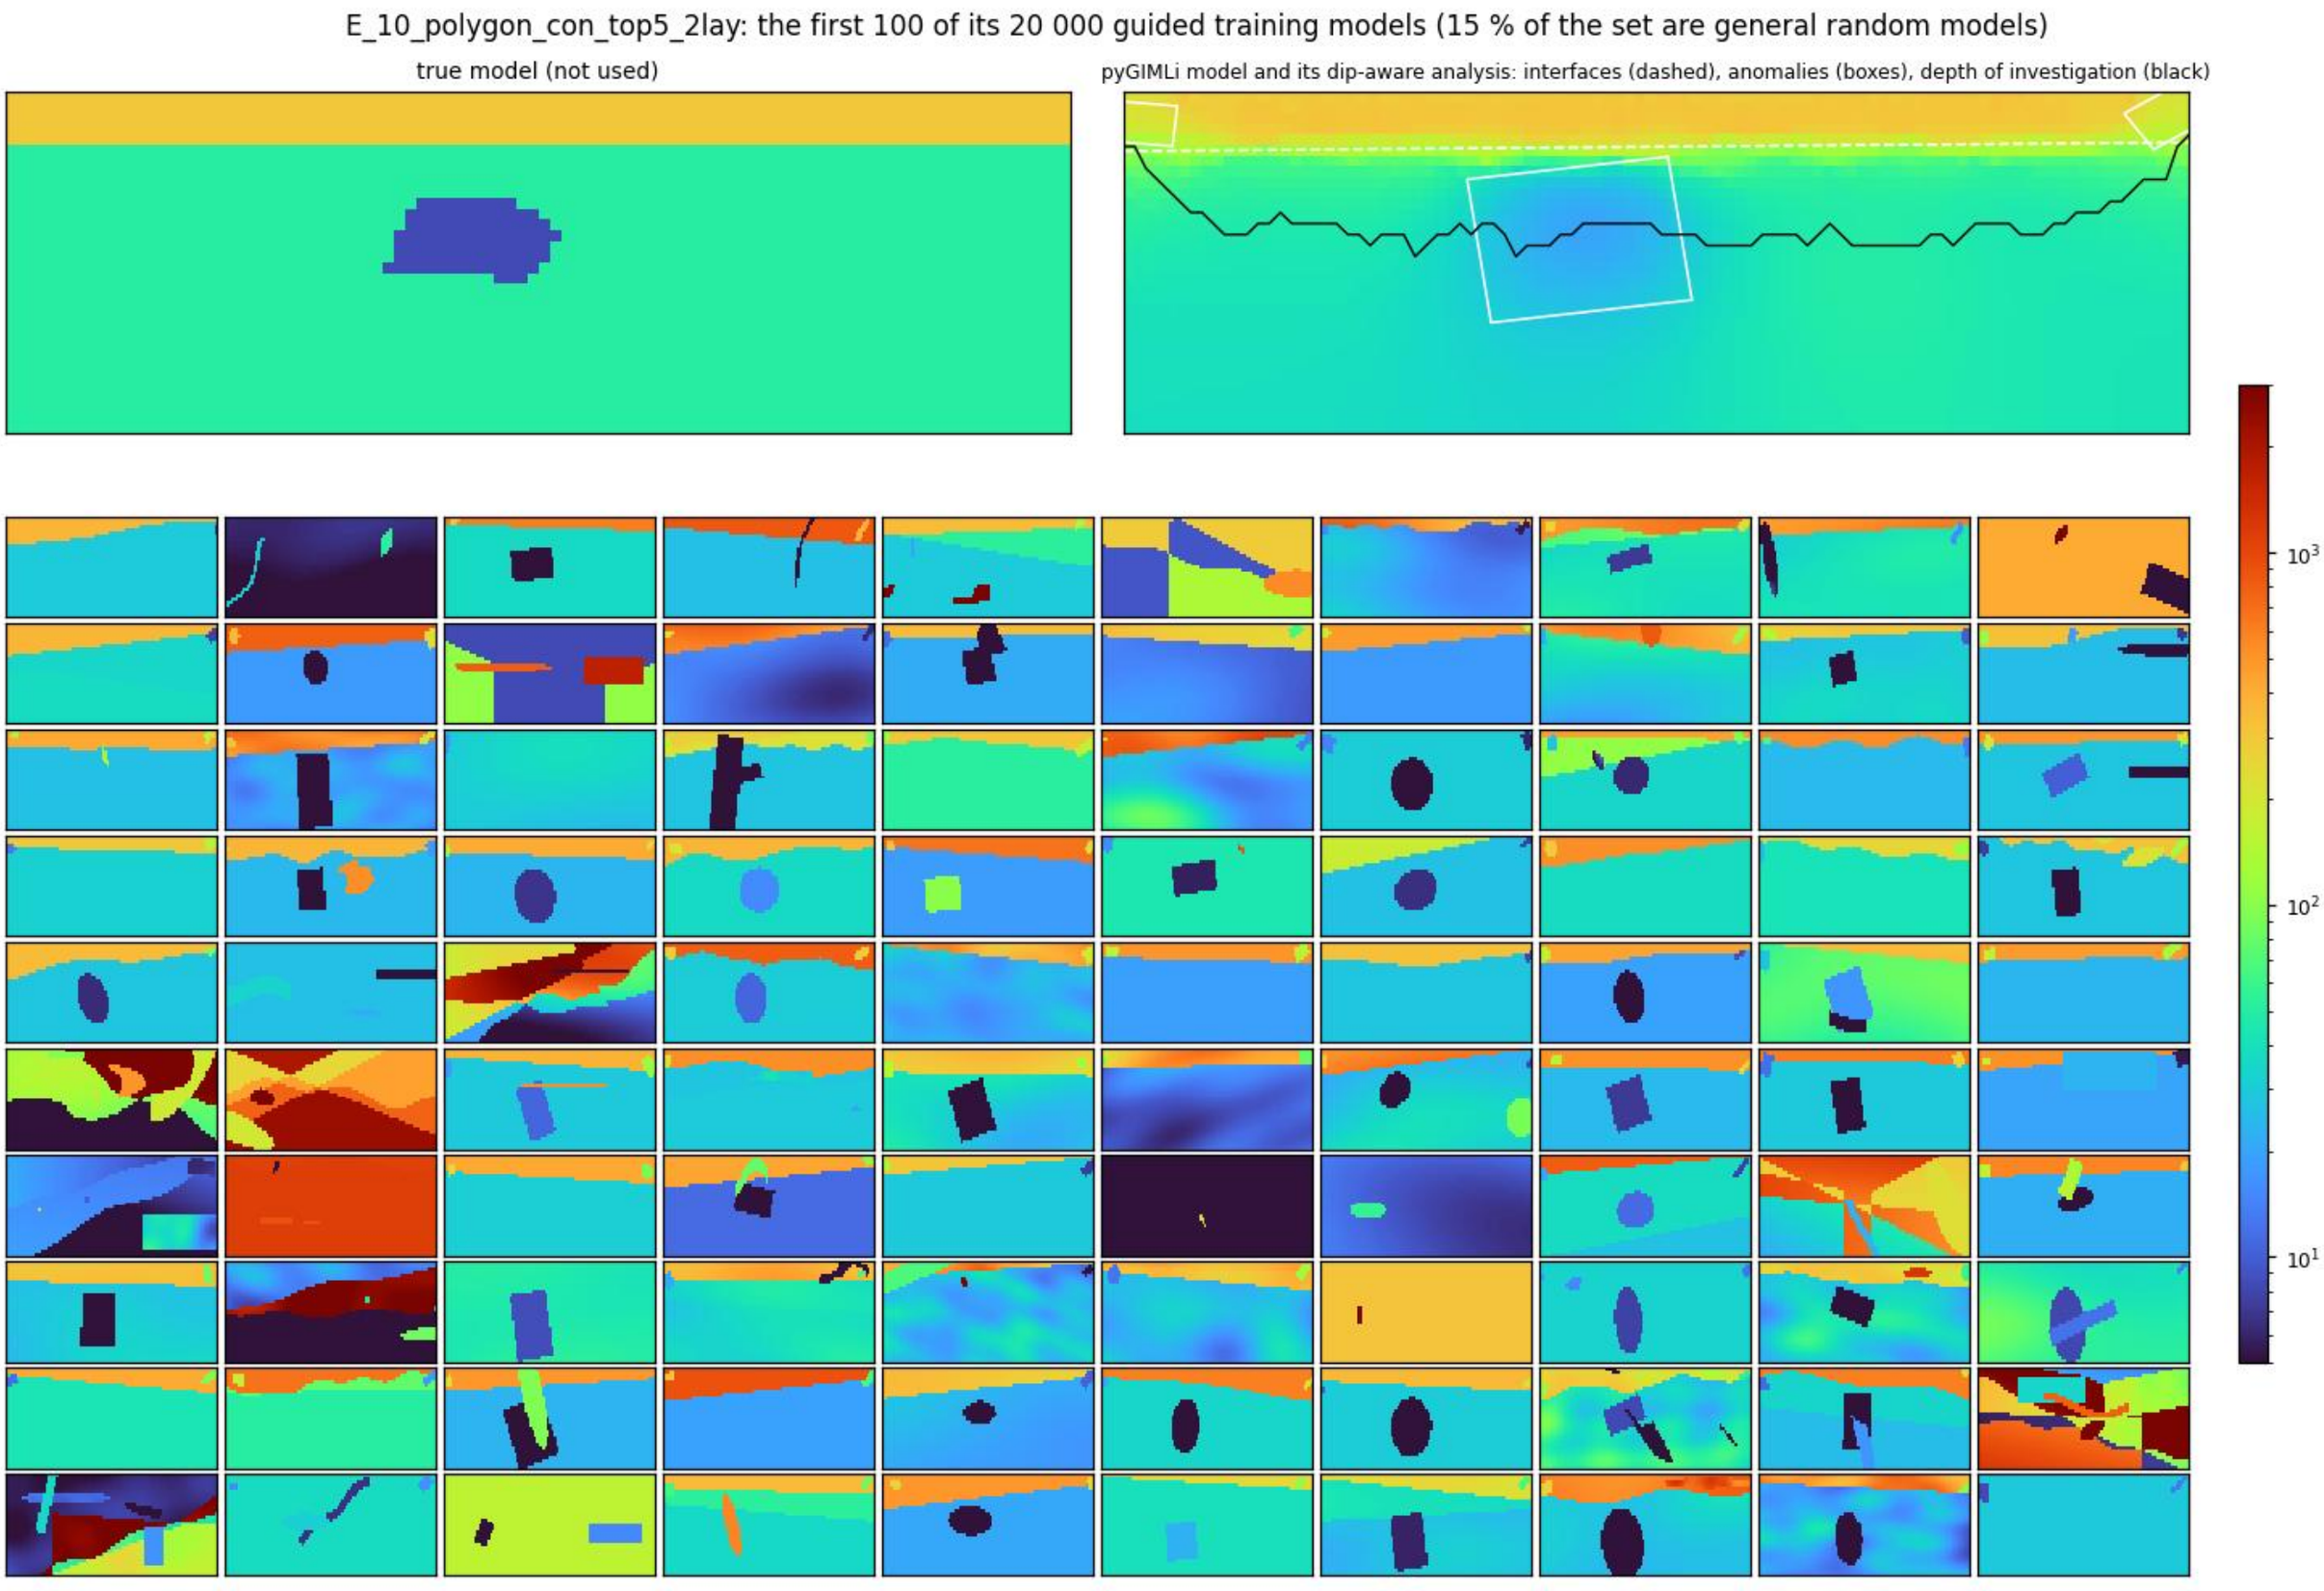
E_10_polygon_con_top5_2lay: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S67

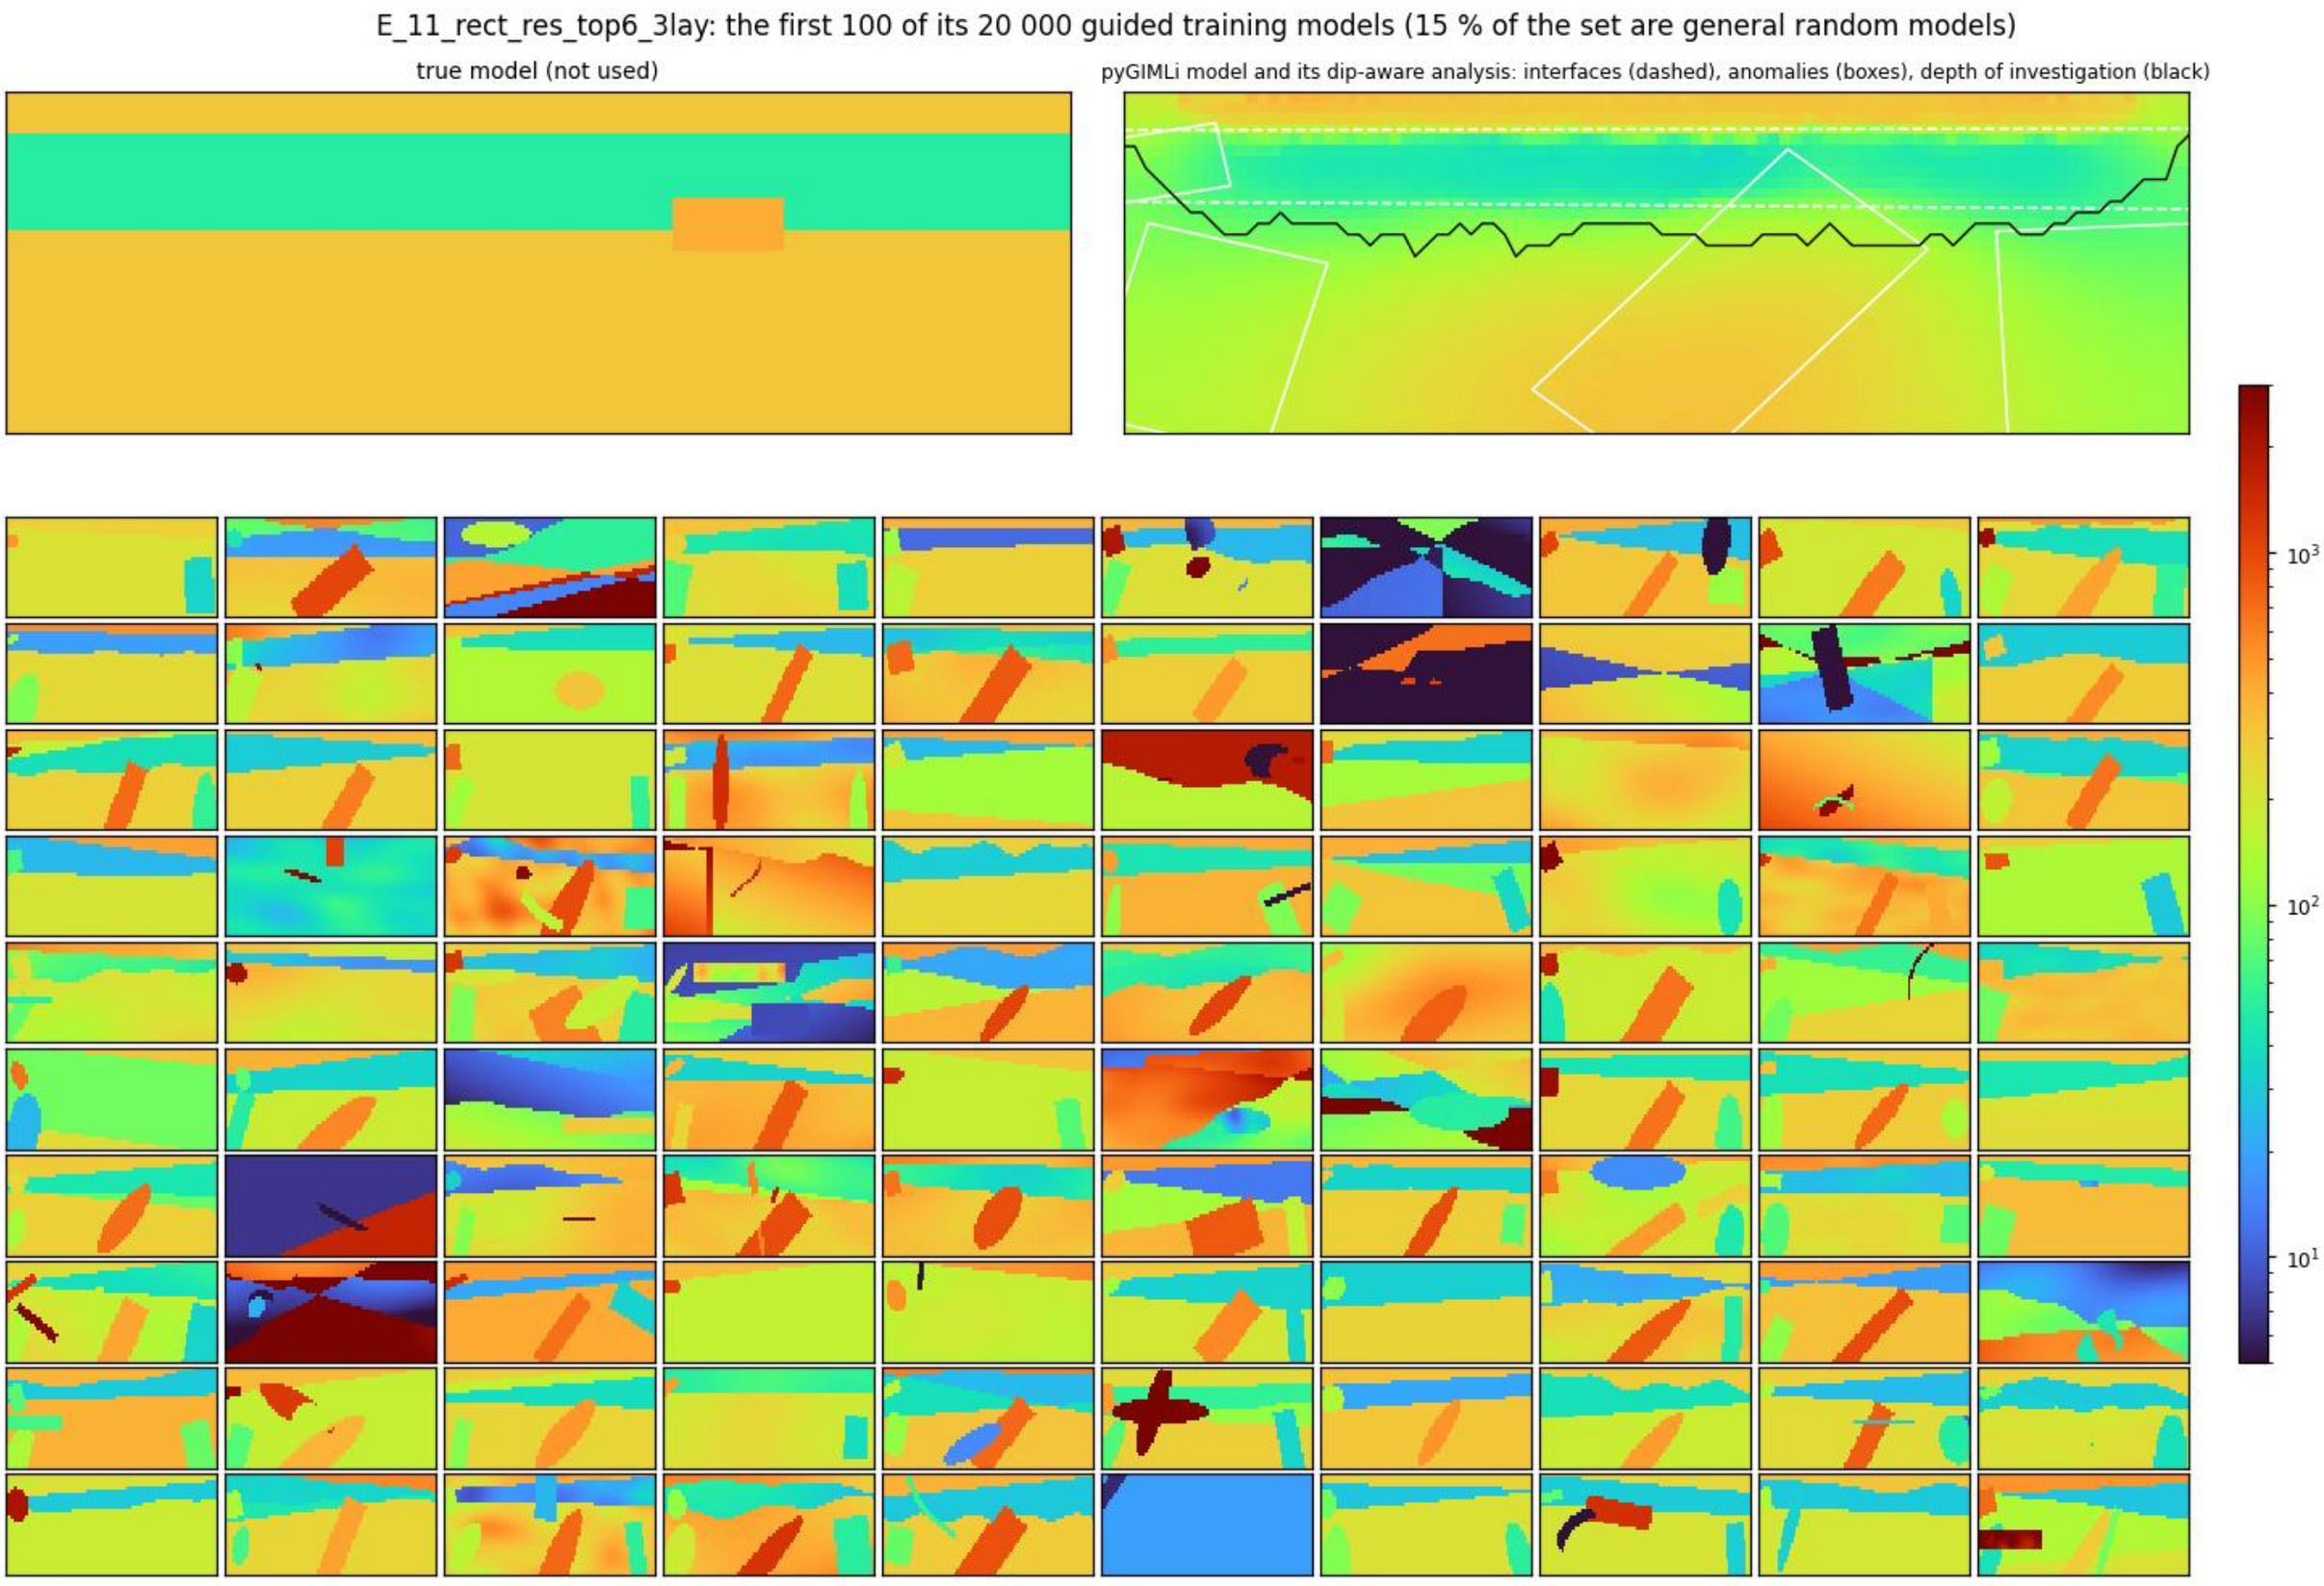
E_11_rect_res_top6_3lay: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S68

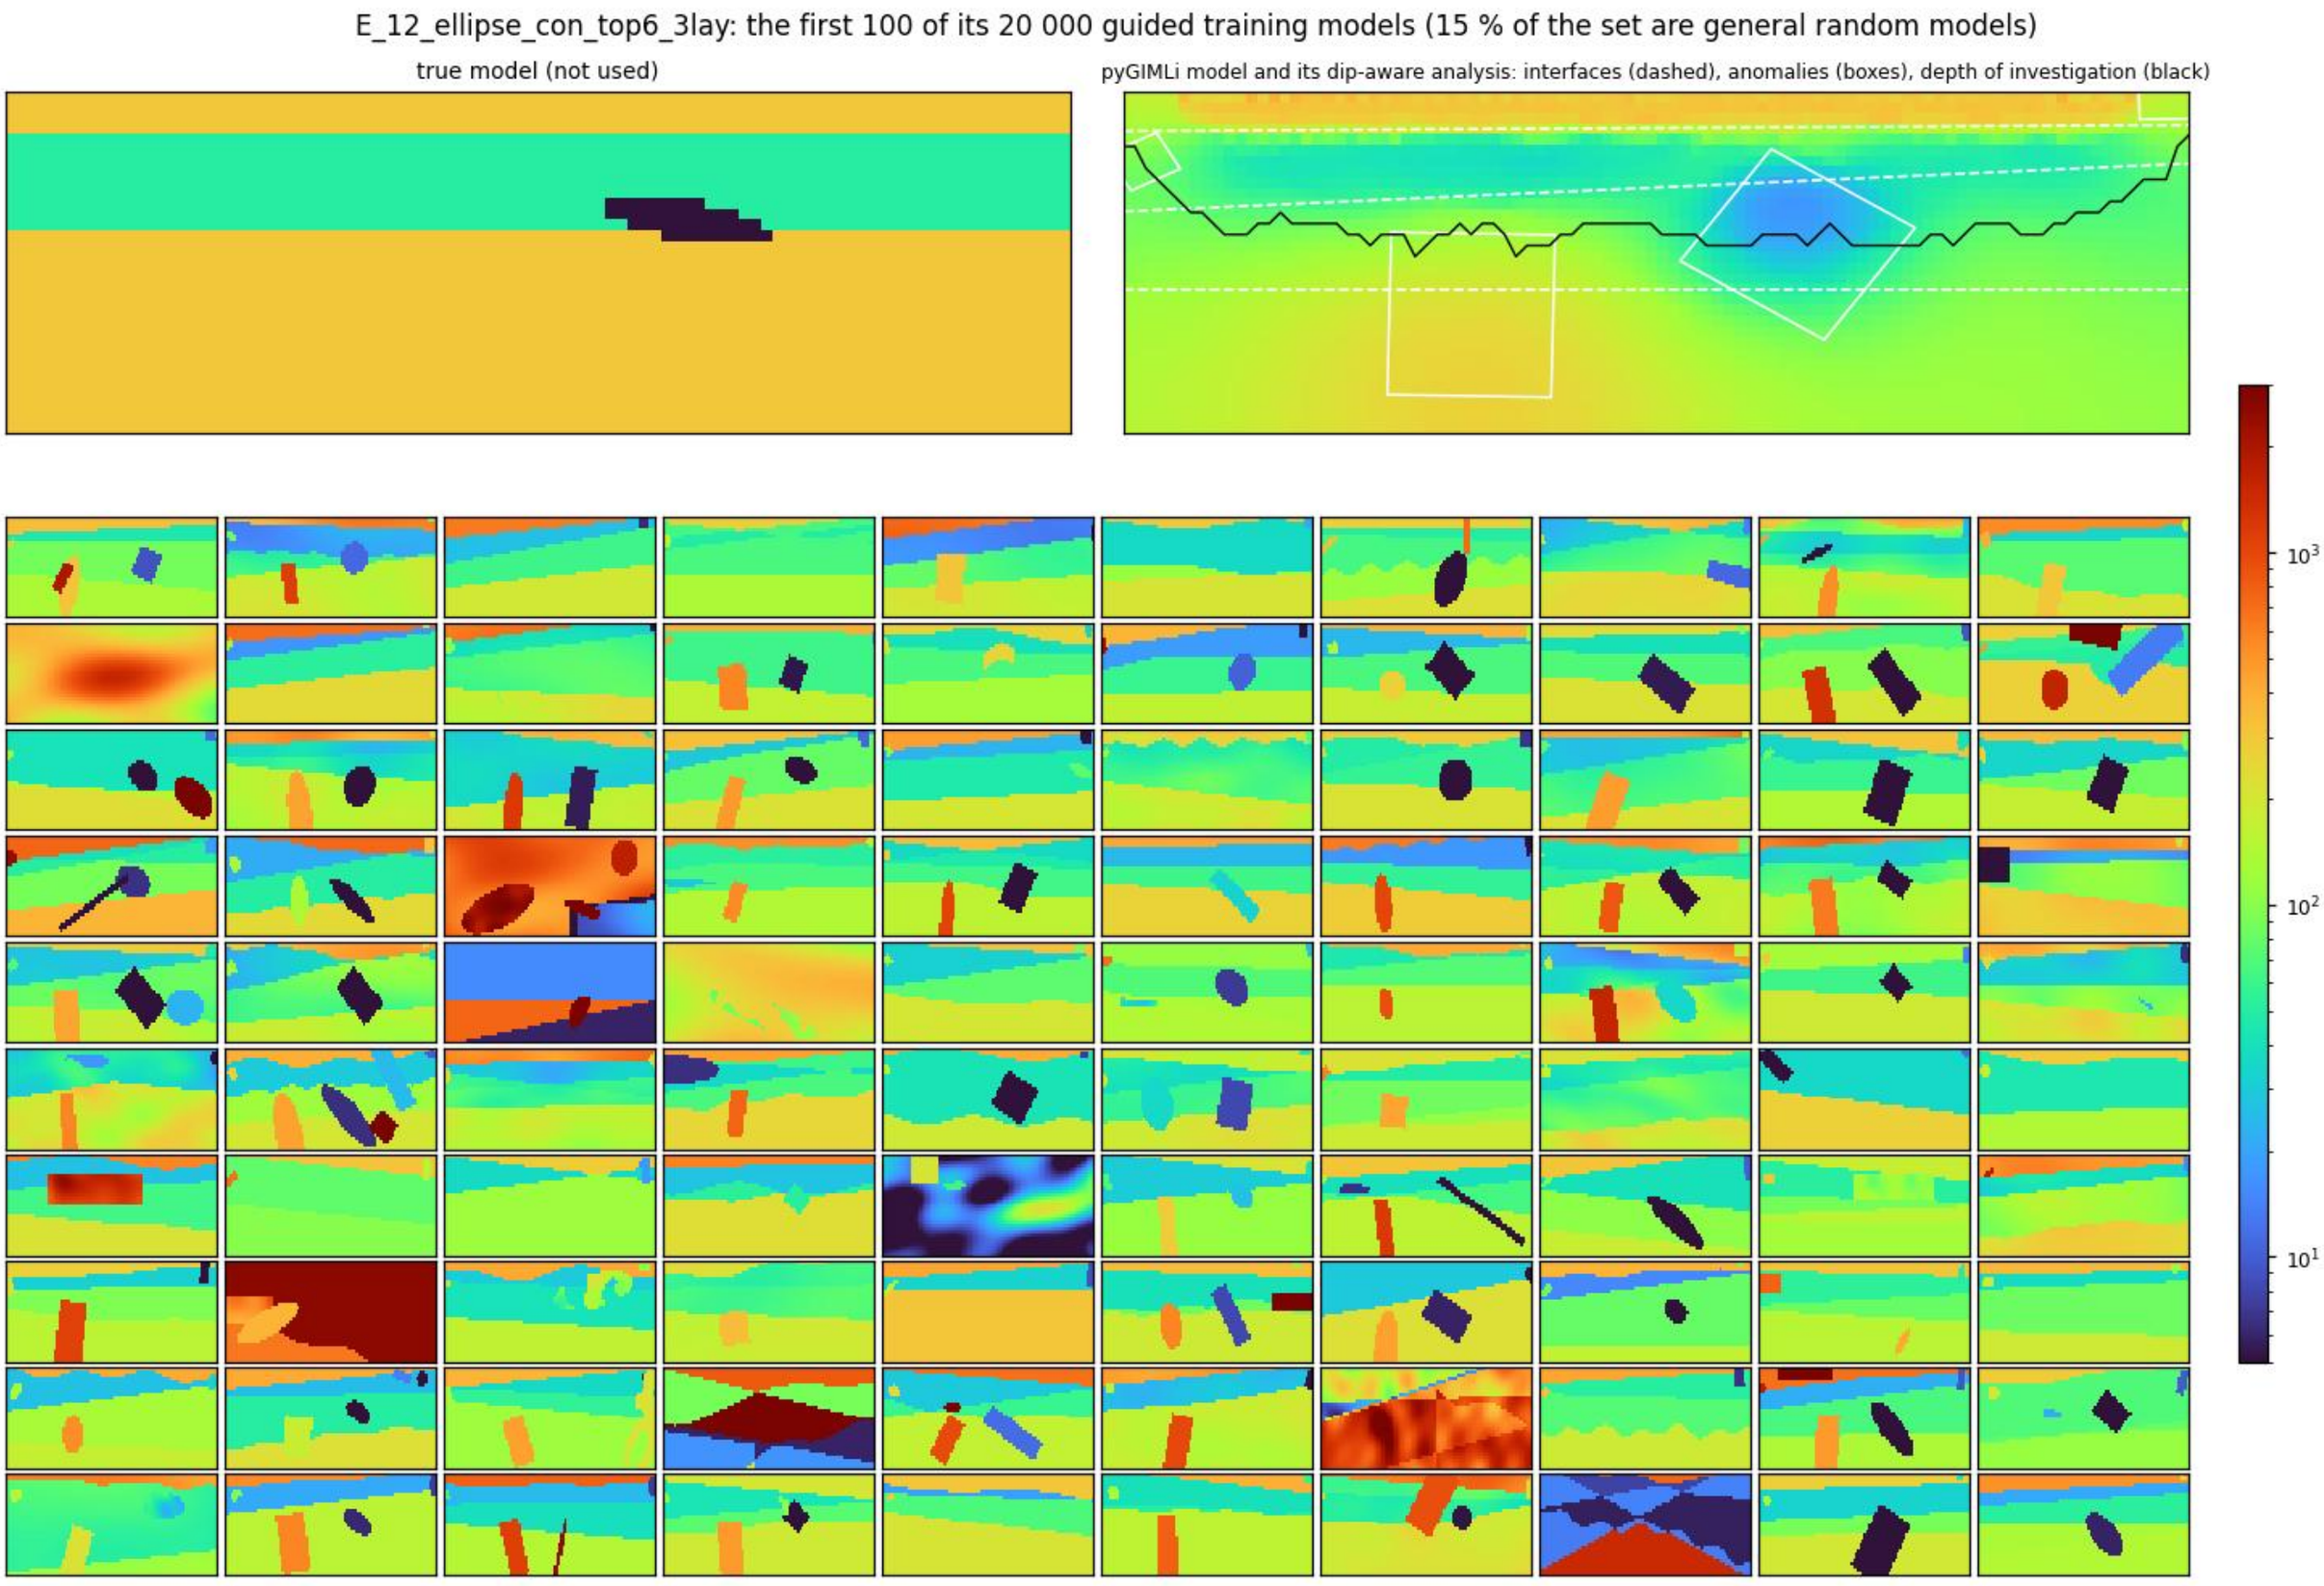
E_12_ellipse_con_top6_3lay: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S69

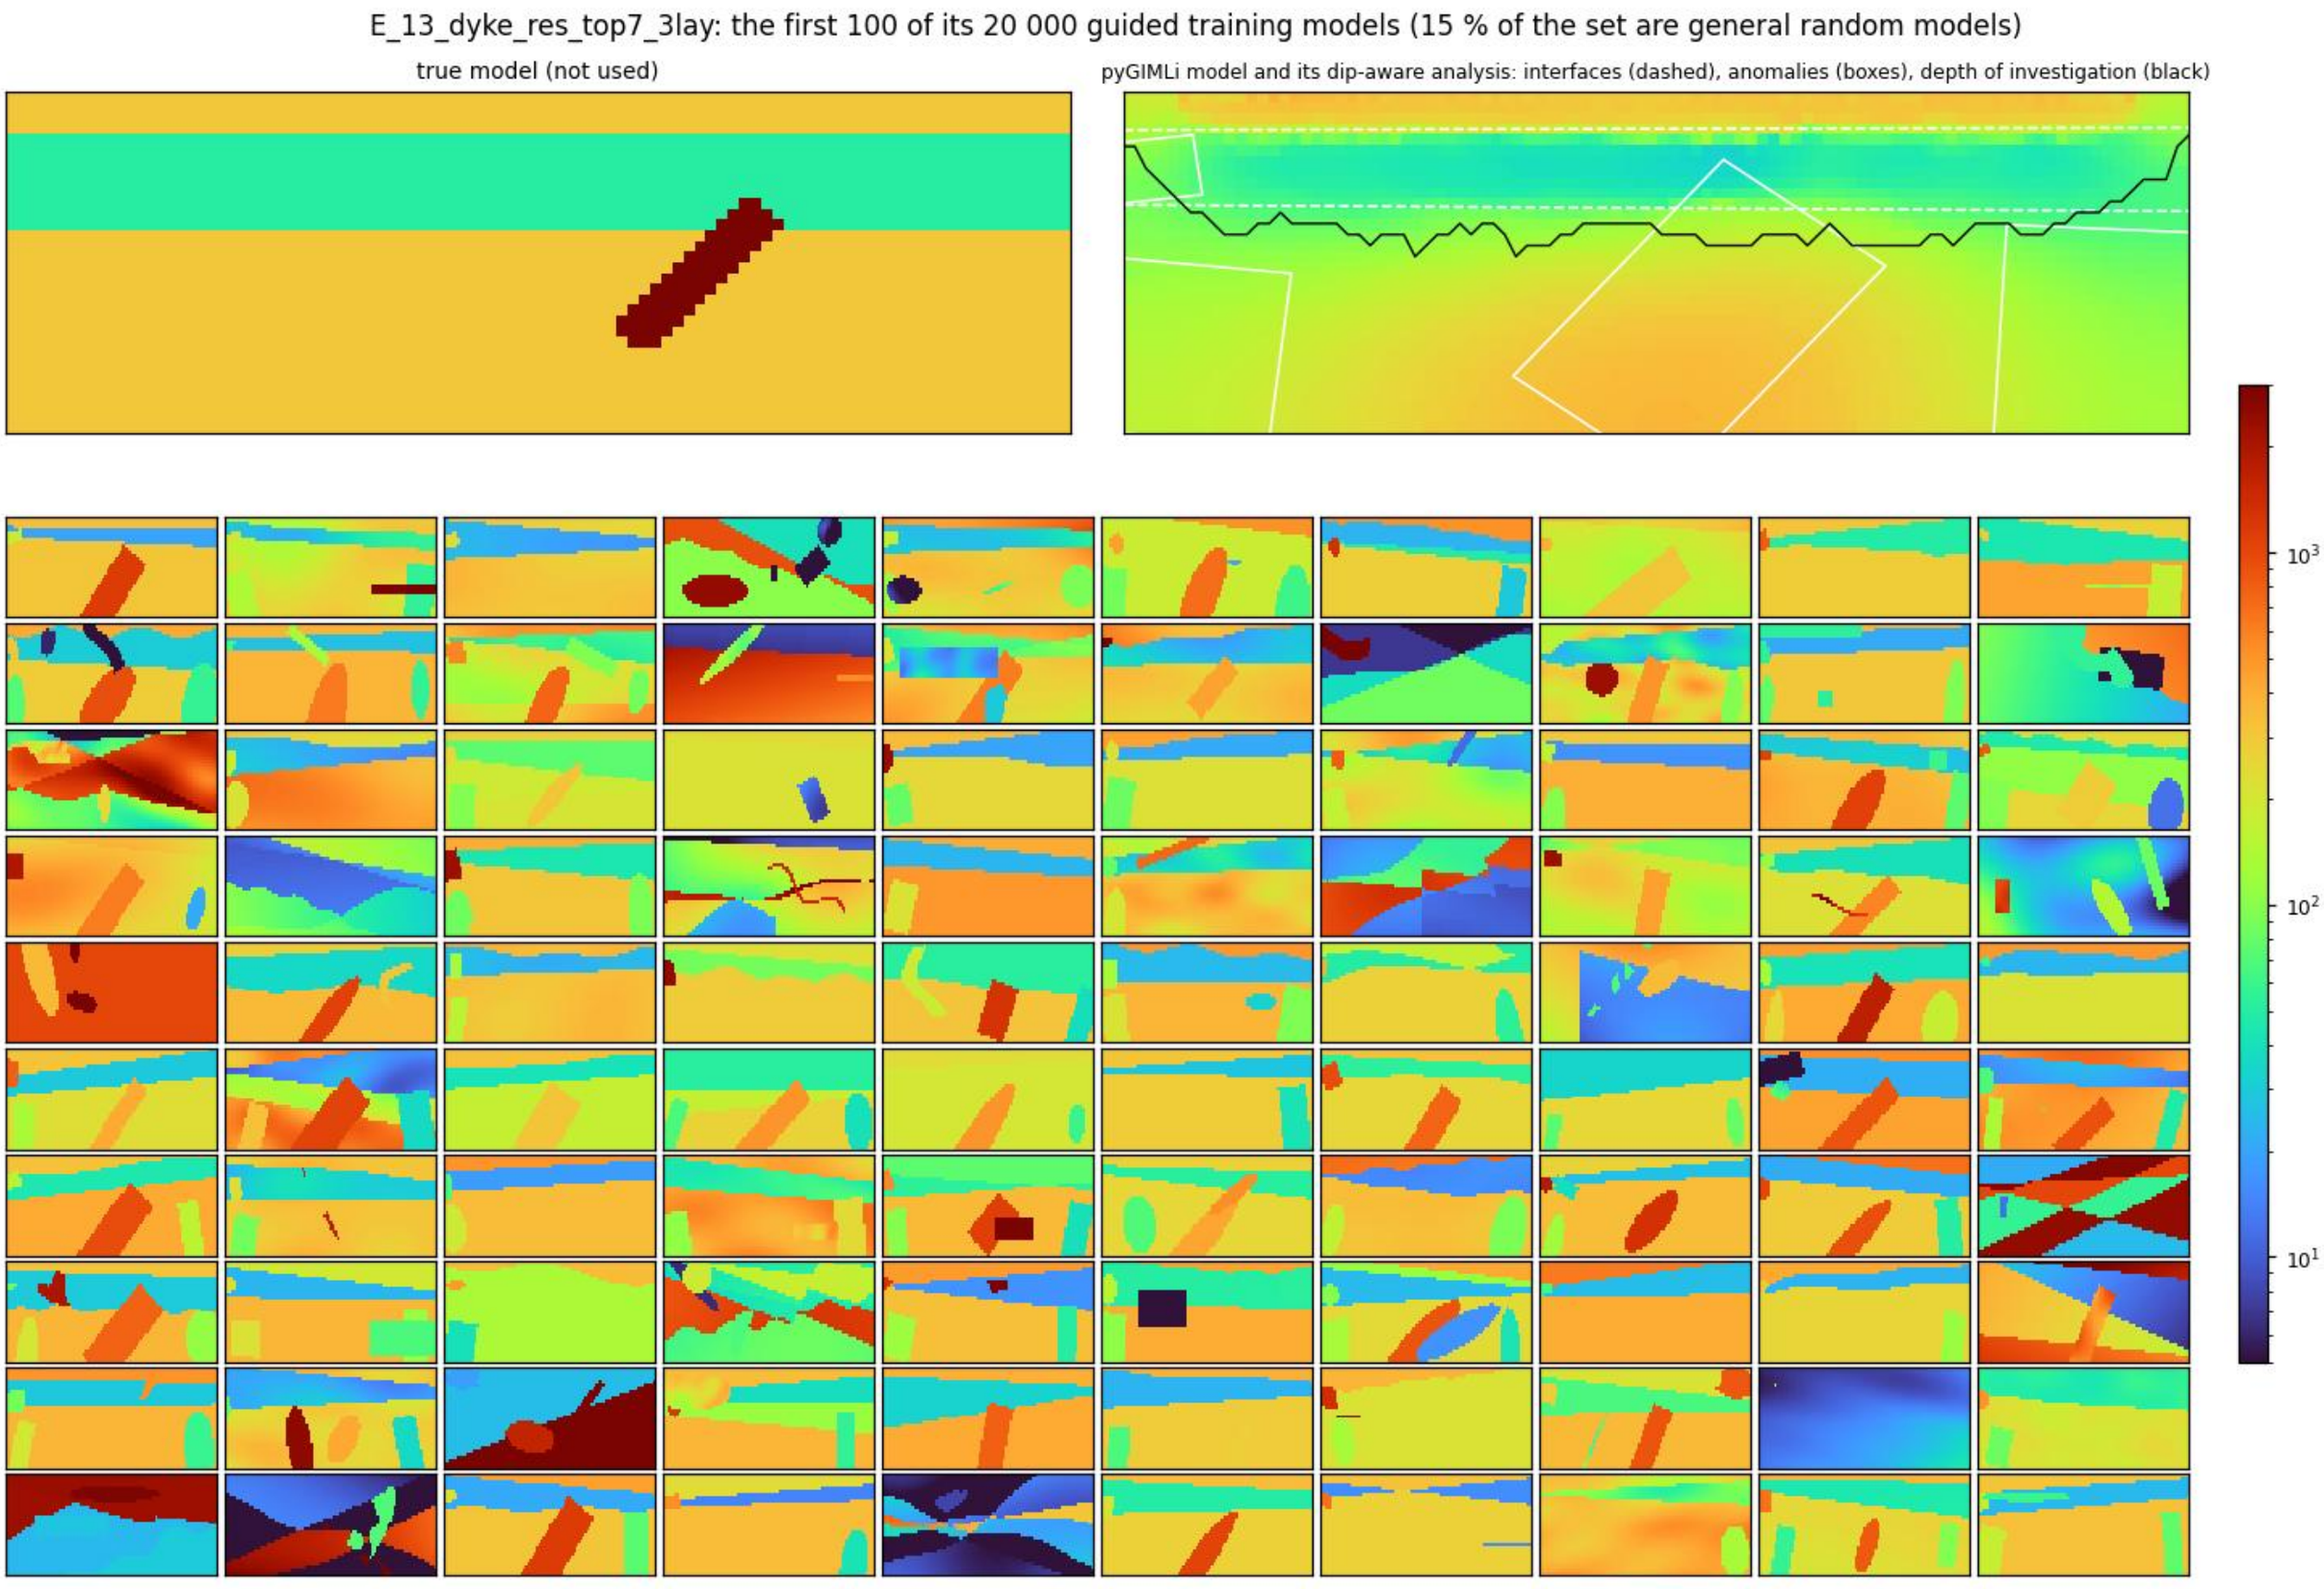
E_13_dyke_res_top7_3lay: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S70

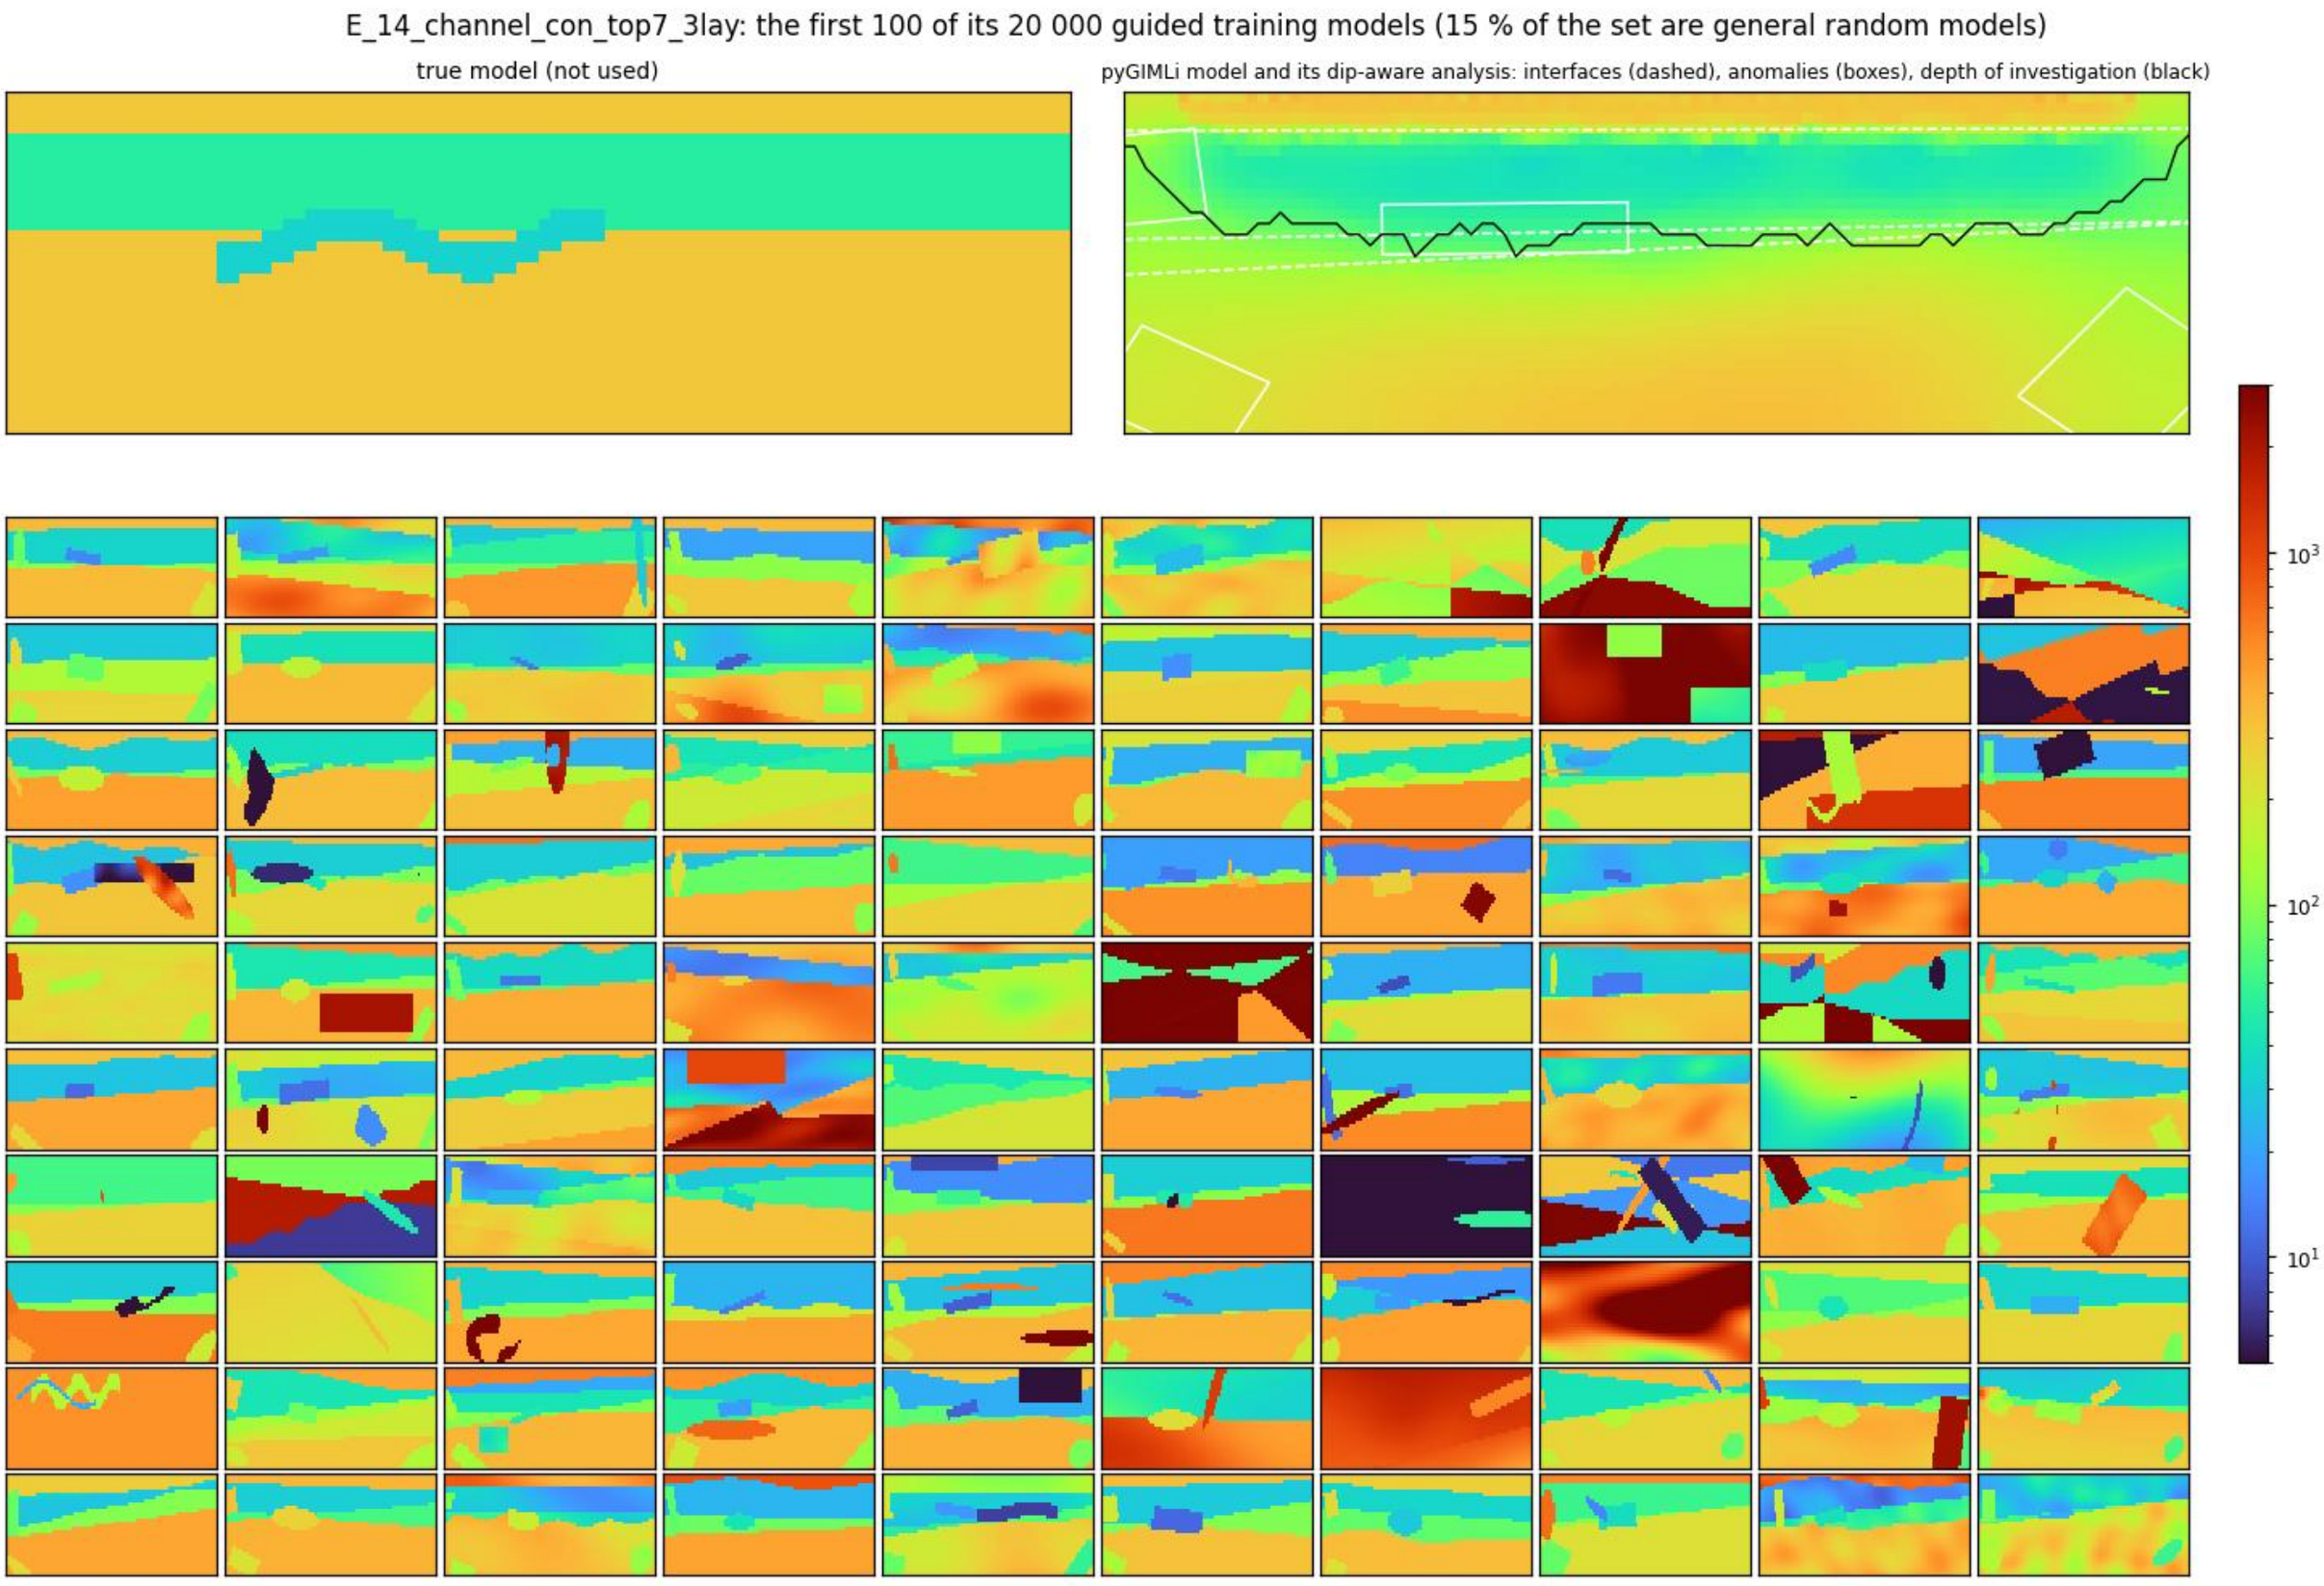
E_14_channel_con_top7_3lay: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S71

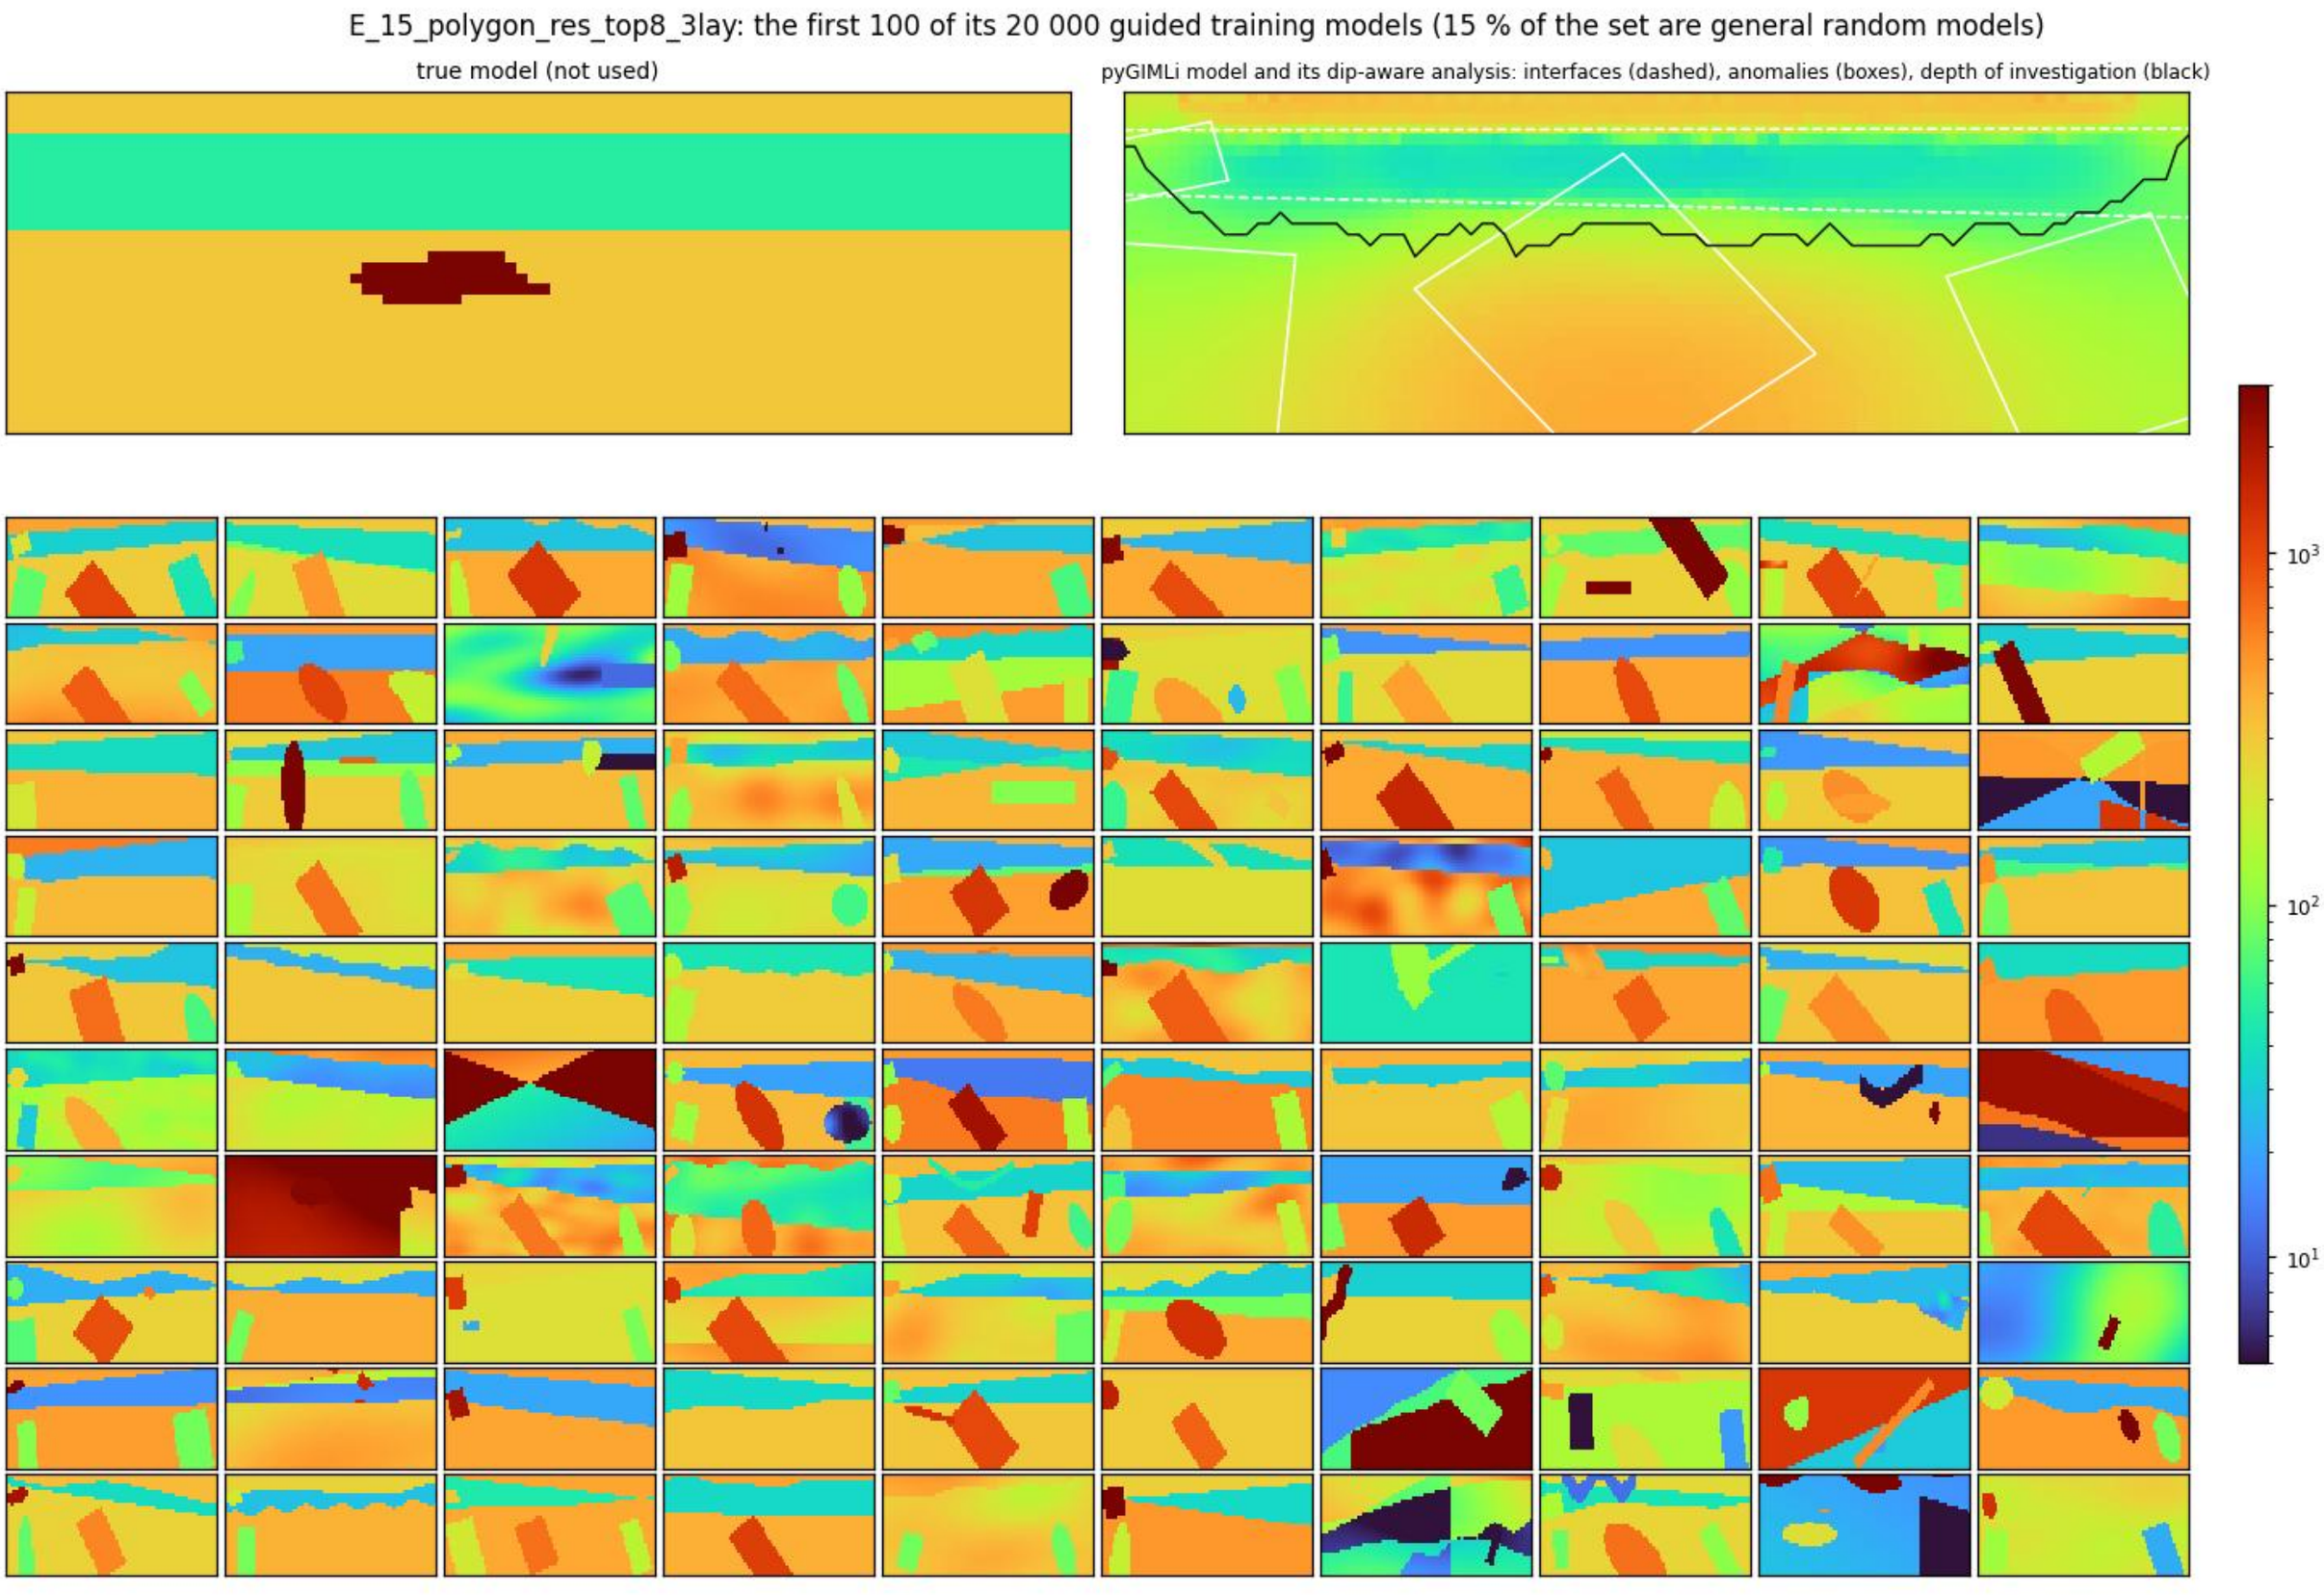
E_15_polygon_res_top8_3lay: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S72

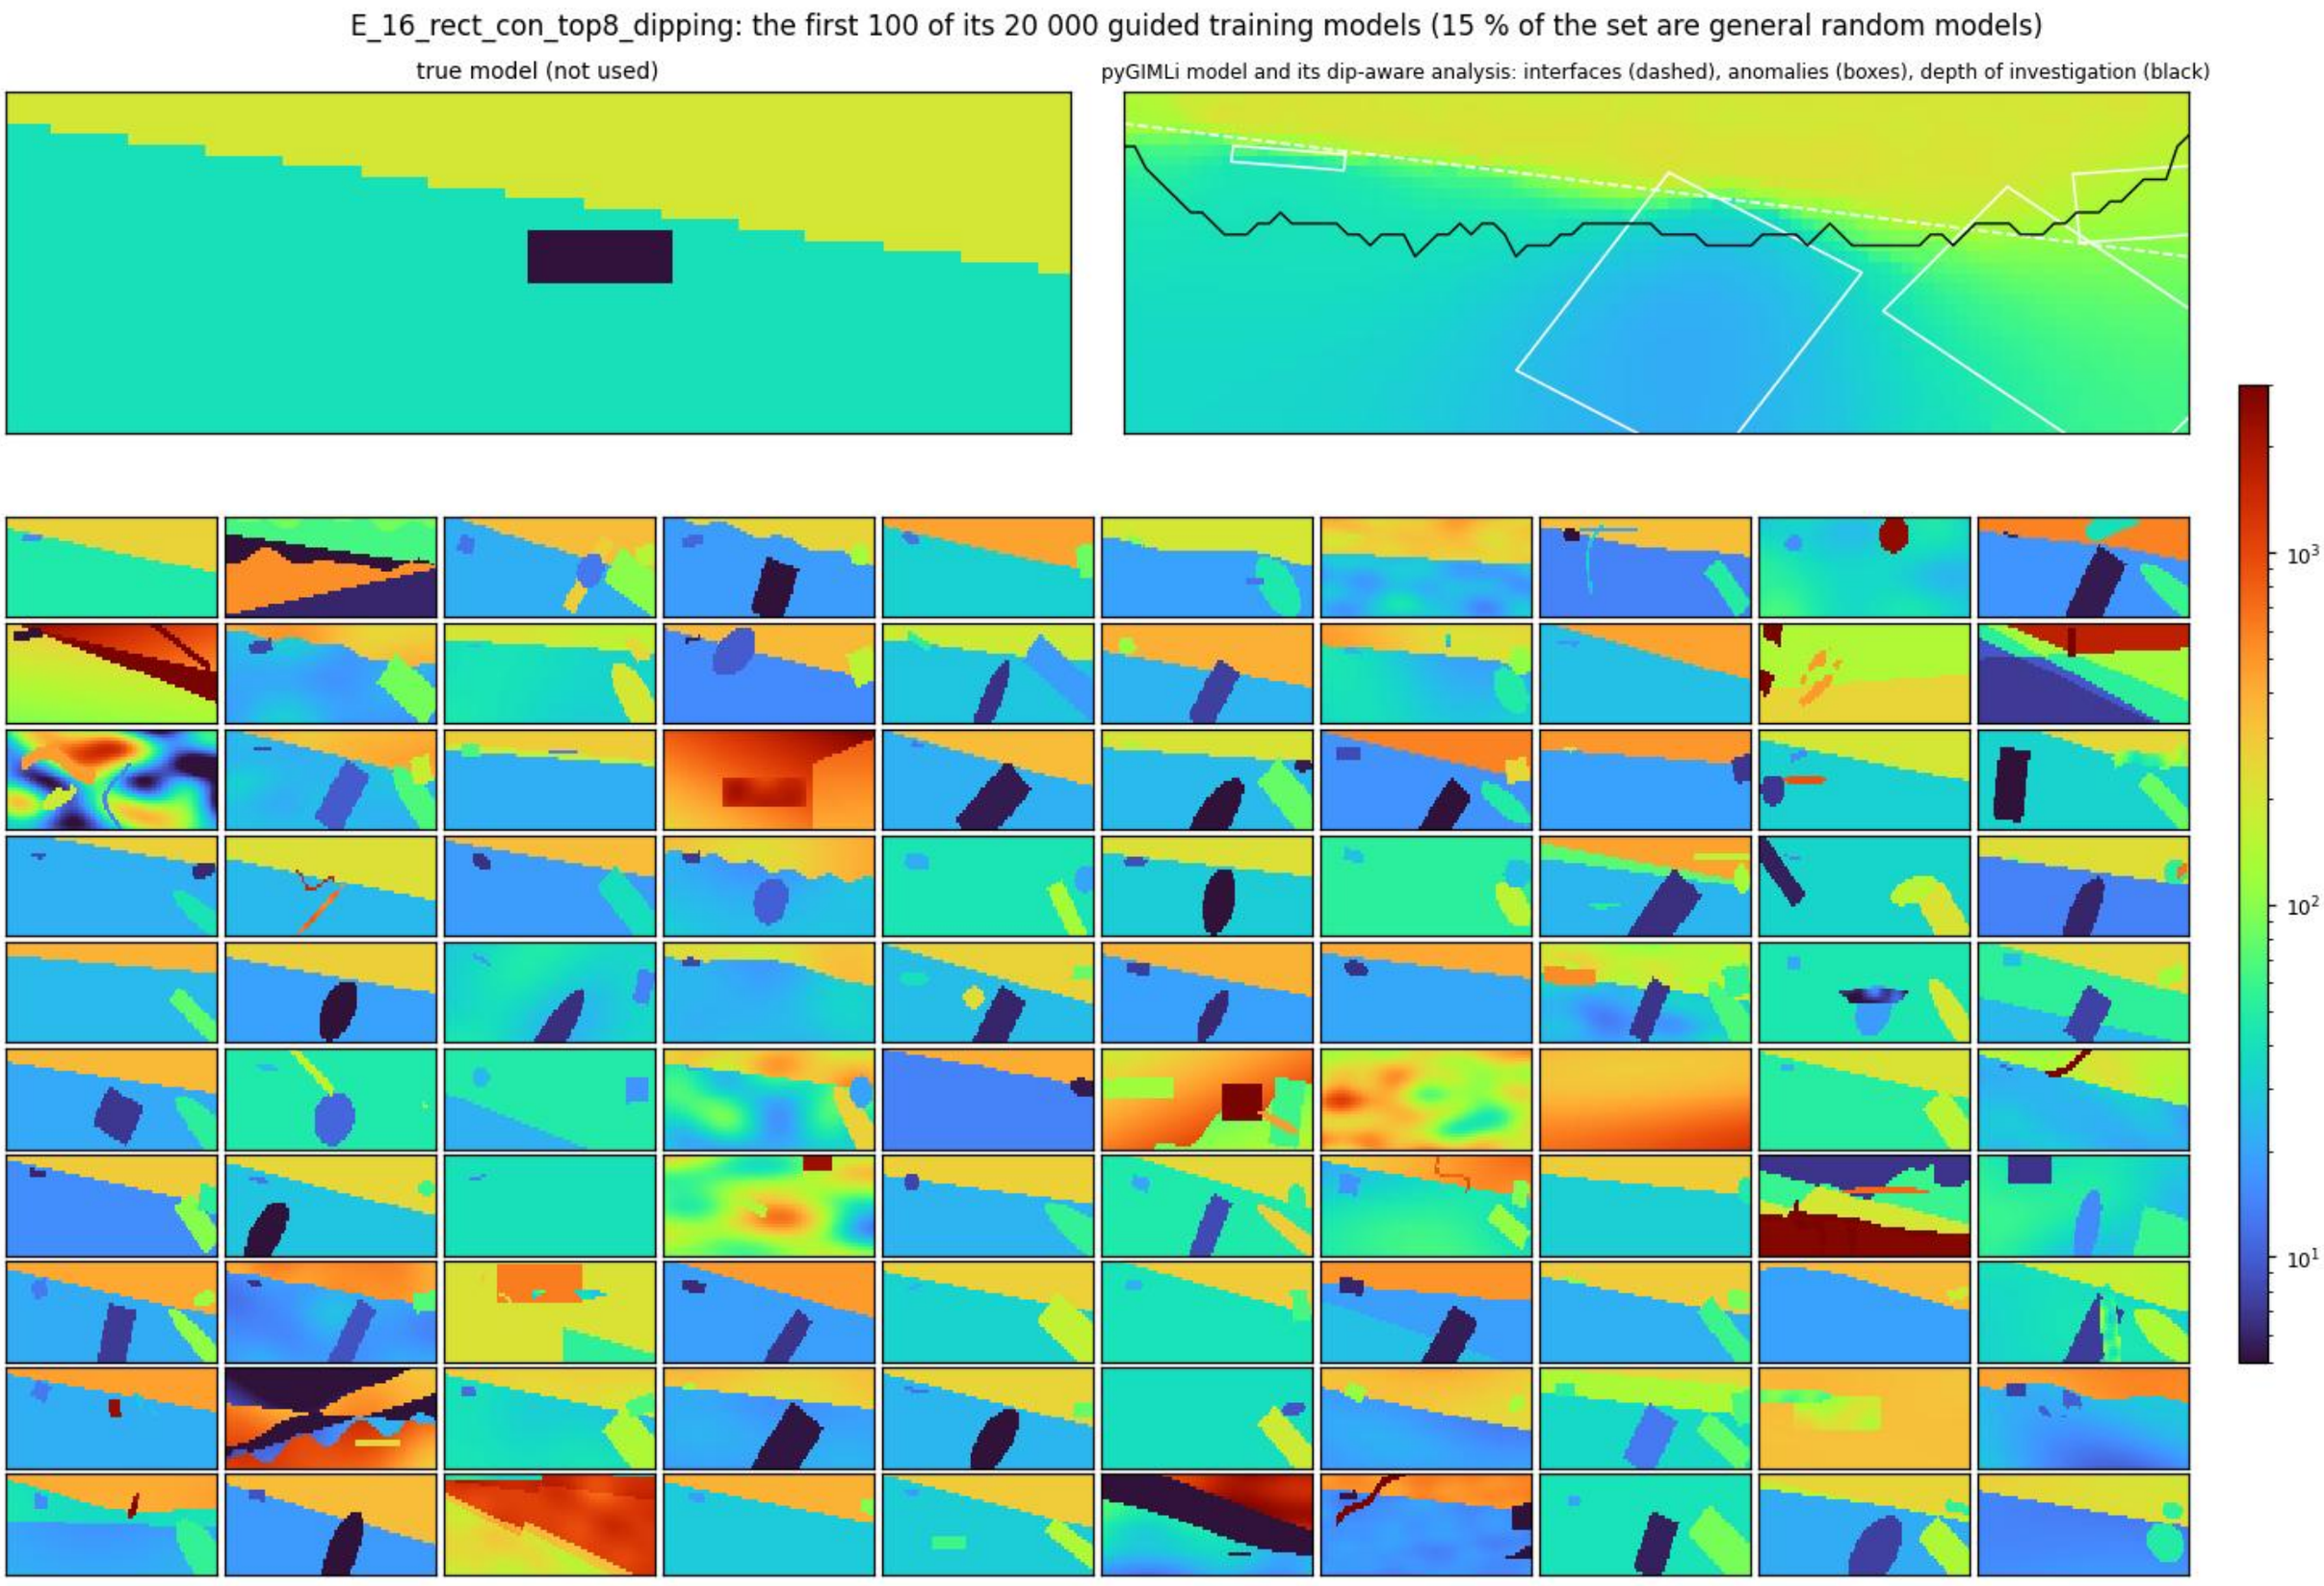
E_16_rect_con_top8_dipping: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S73

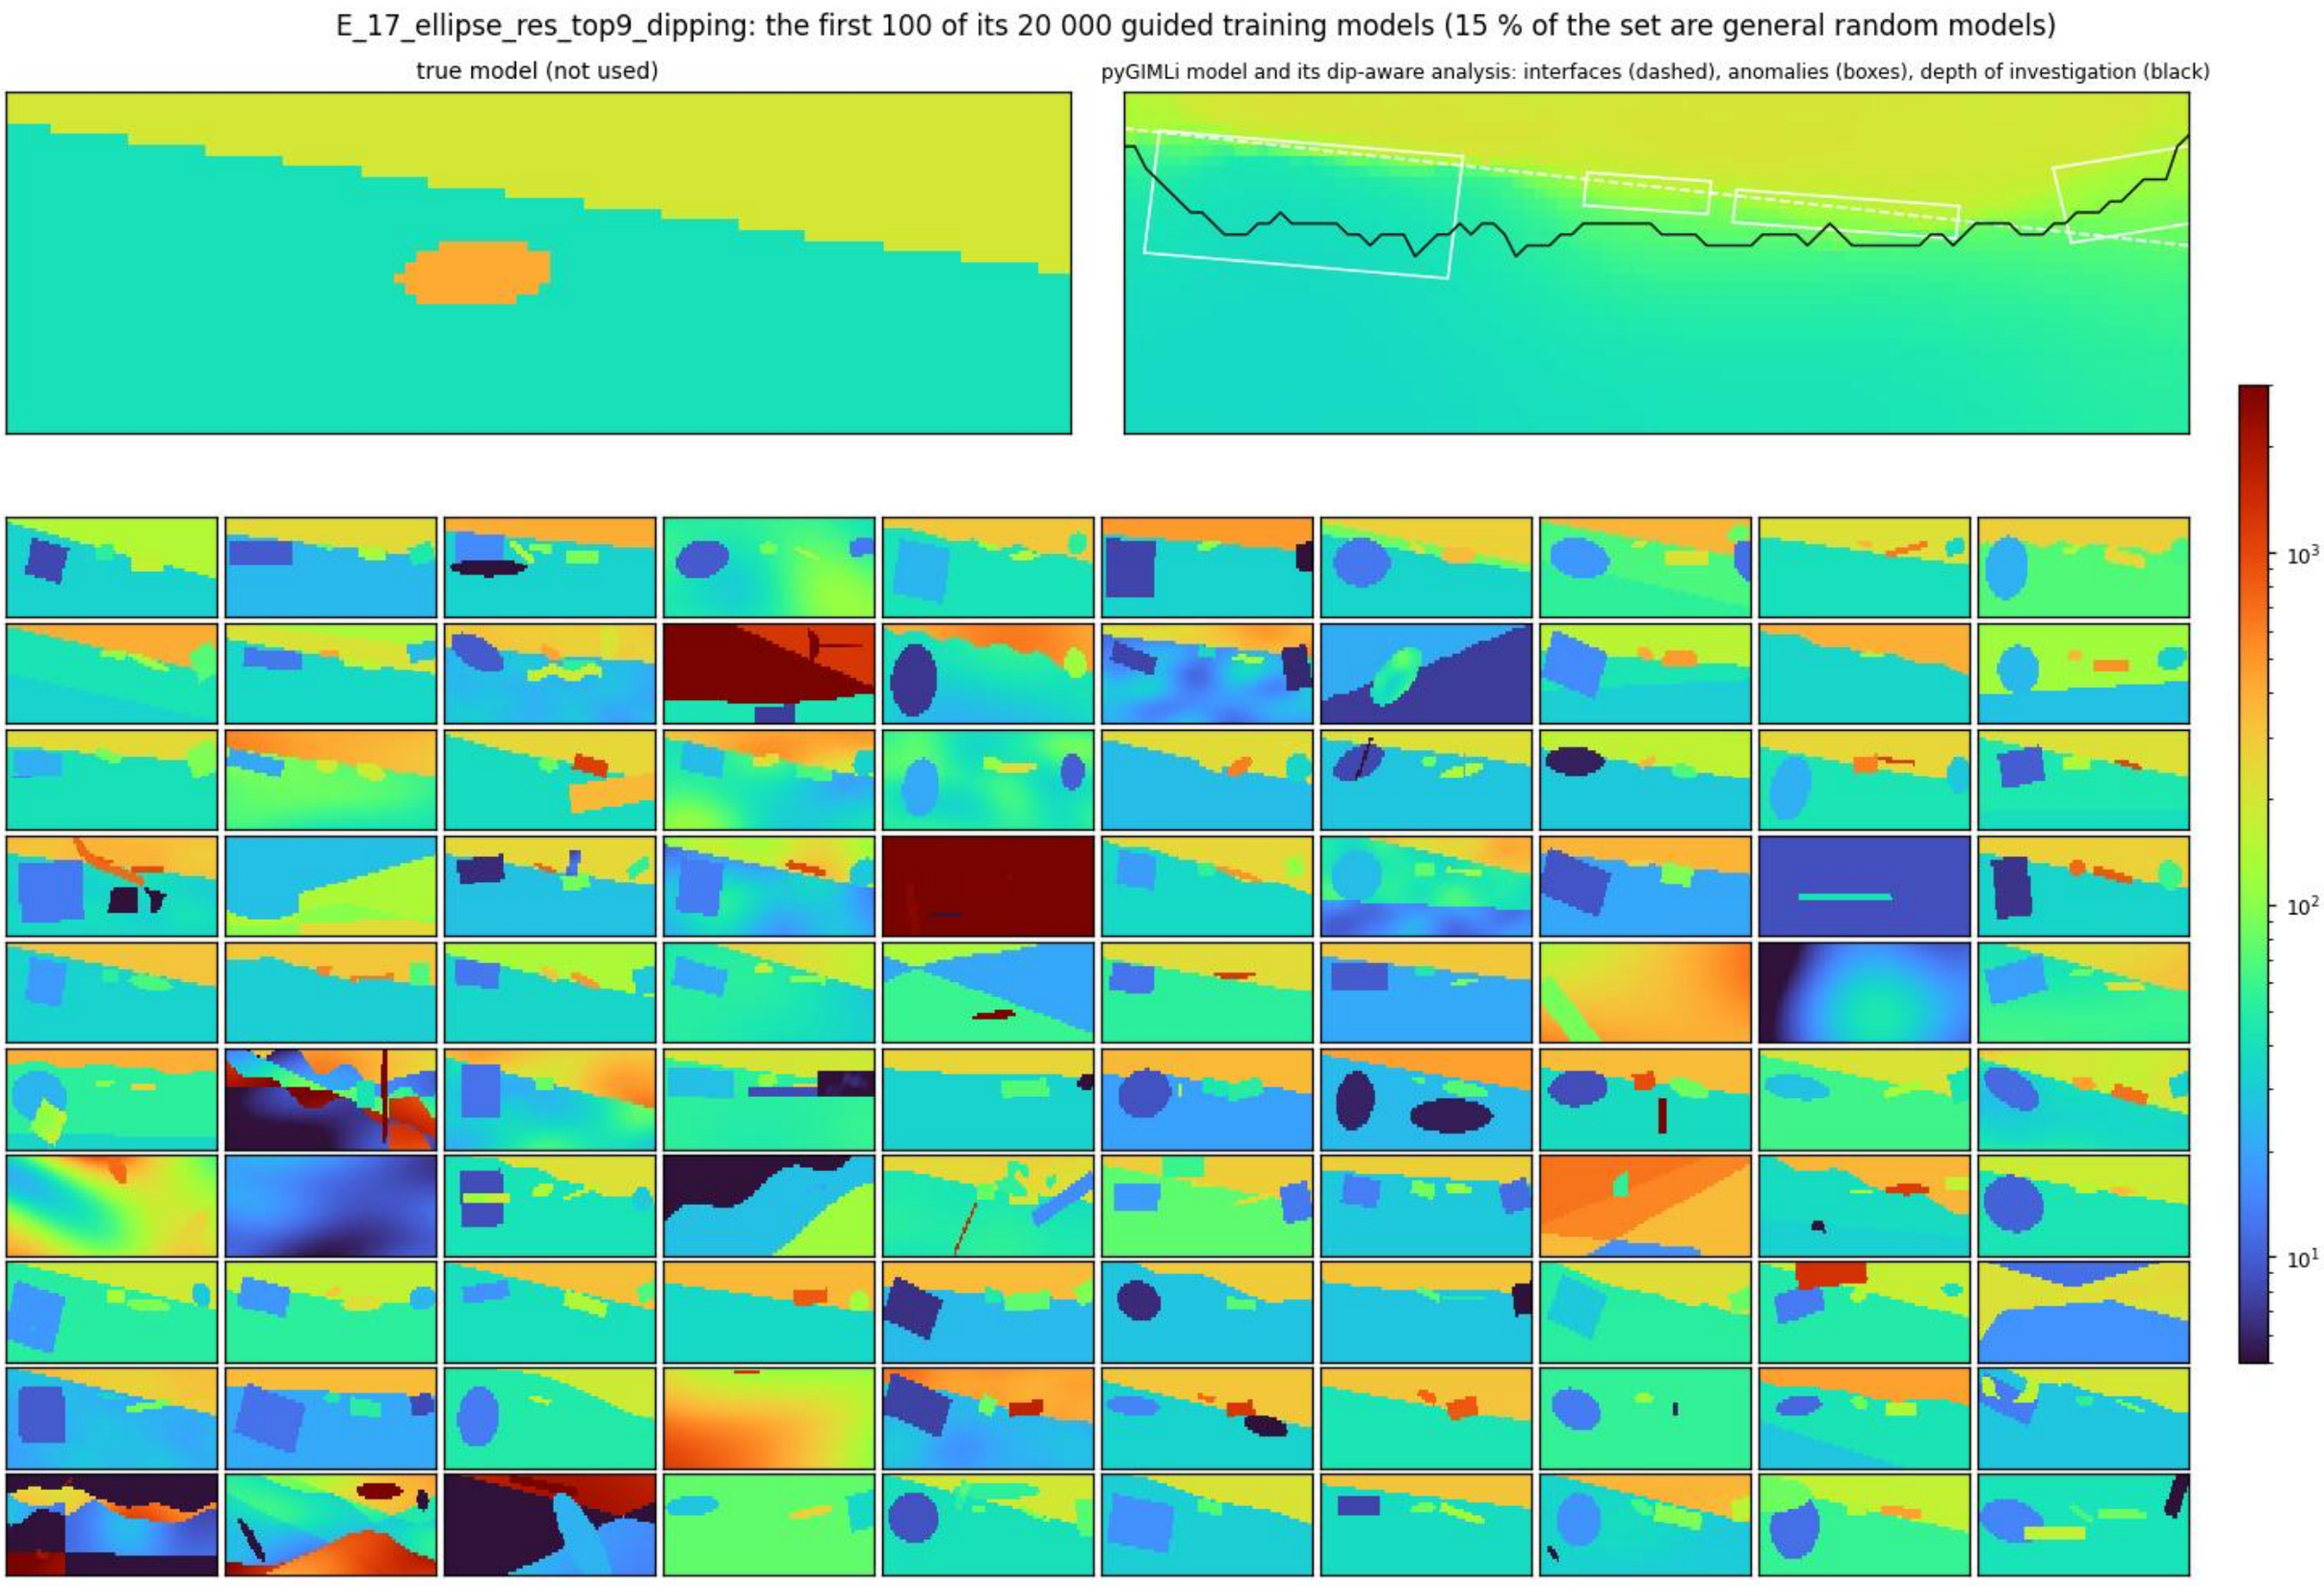
E_17_ellipse_res_top9_dipping: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S74

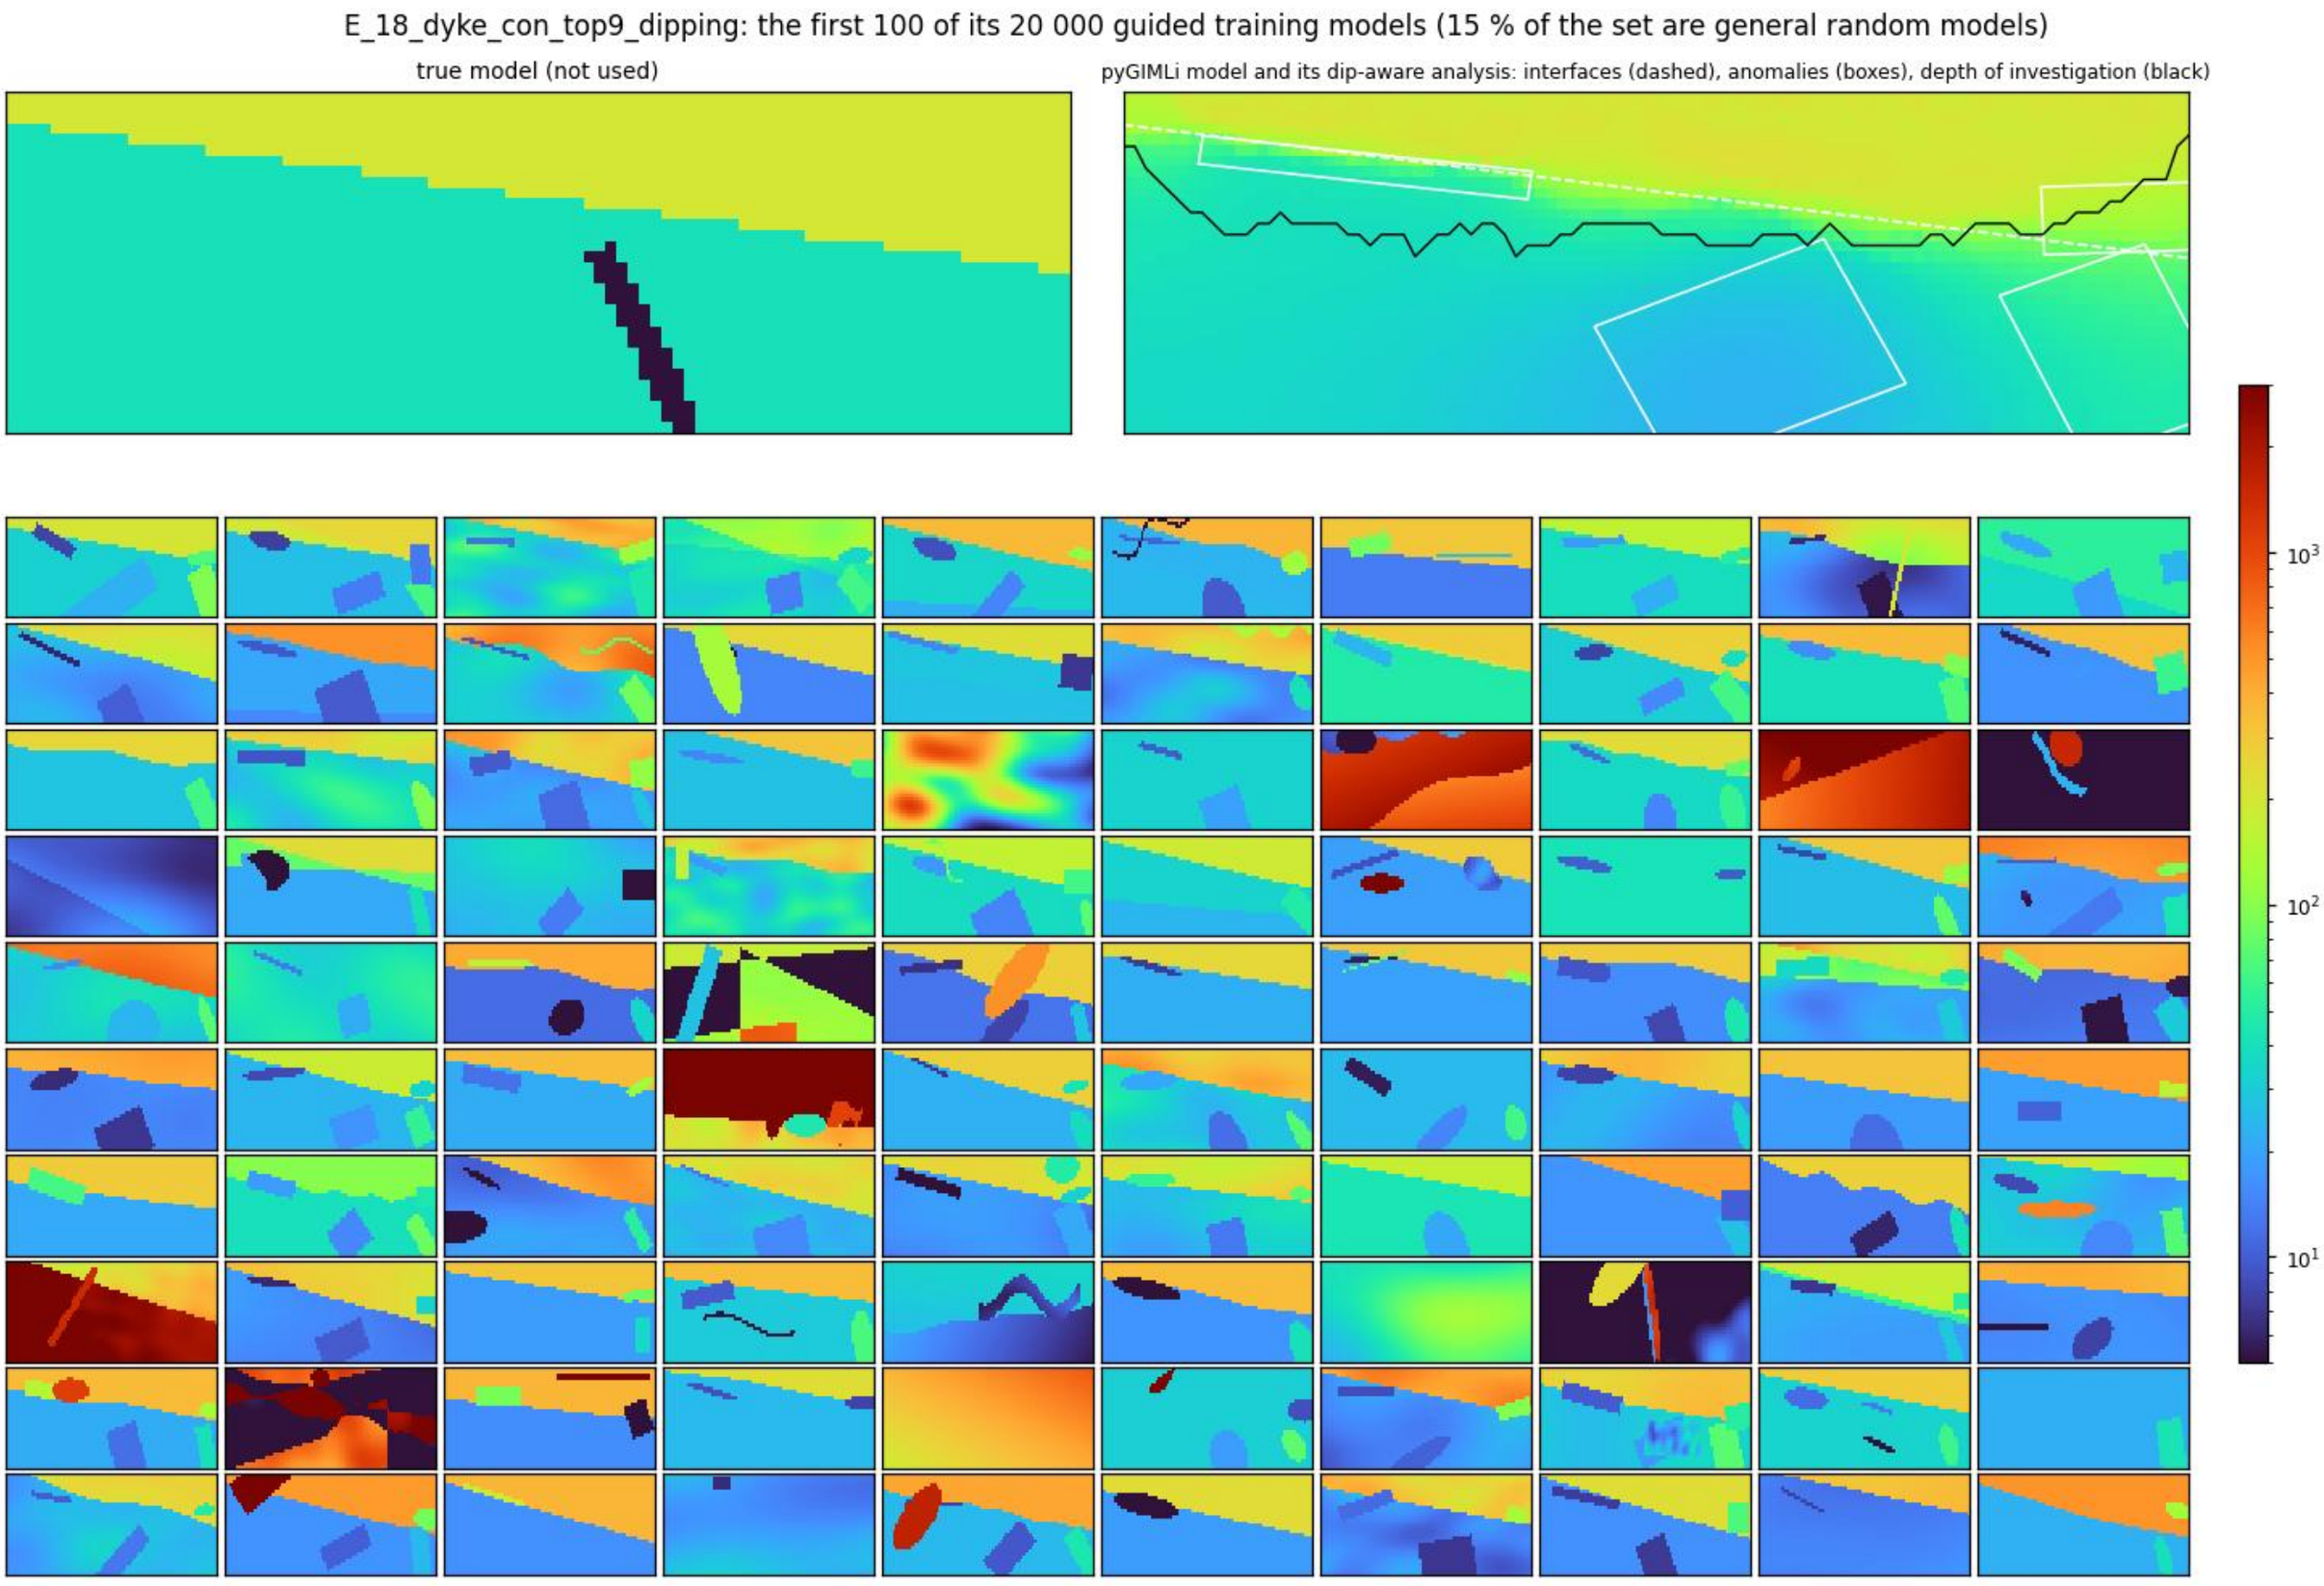
E_18_dyke_con_top9_dipping: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S75

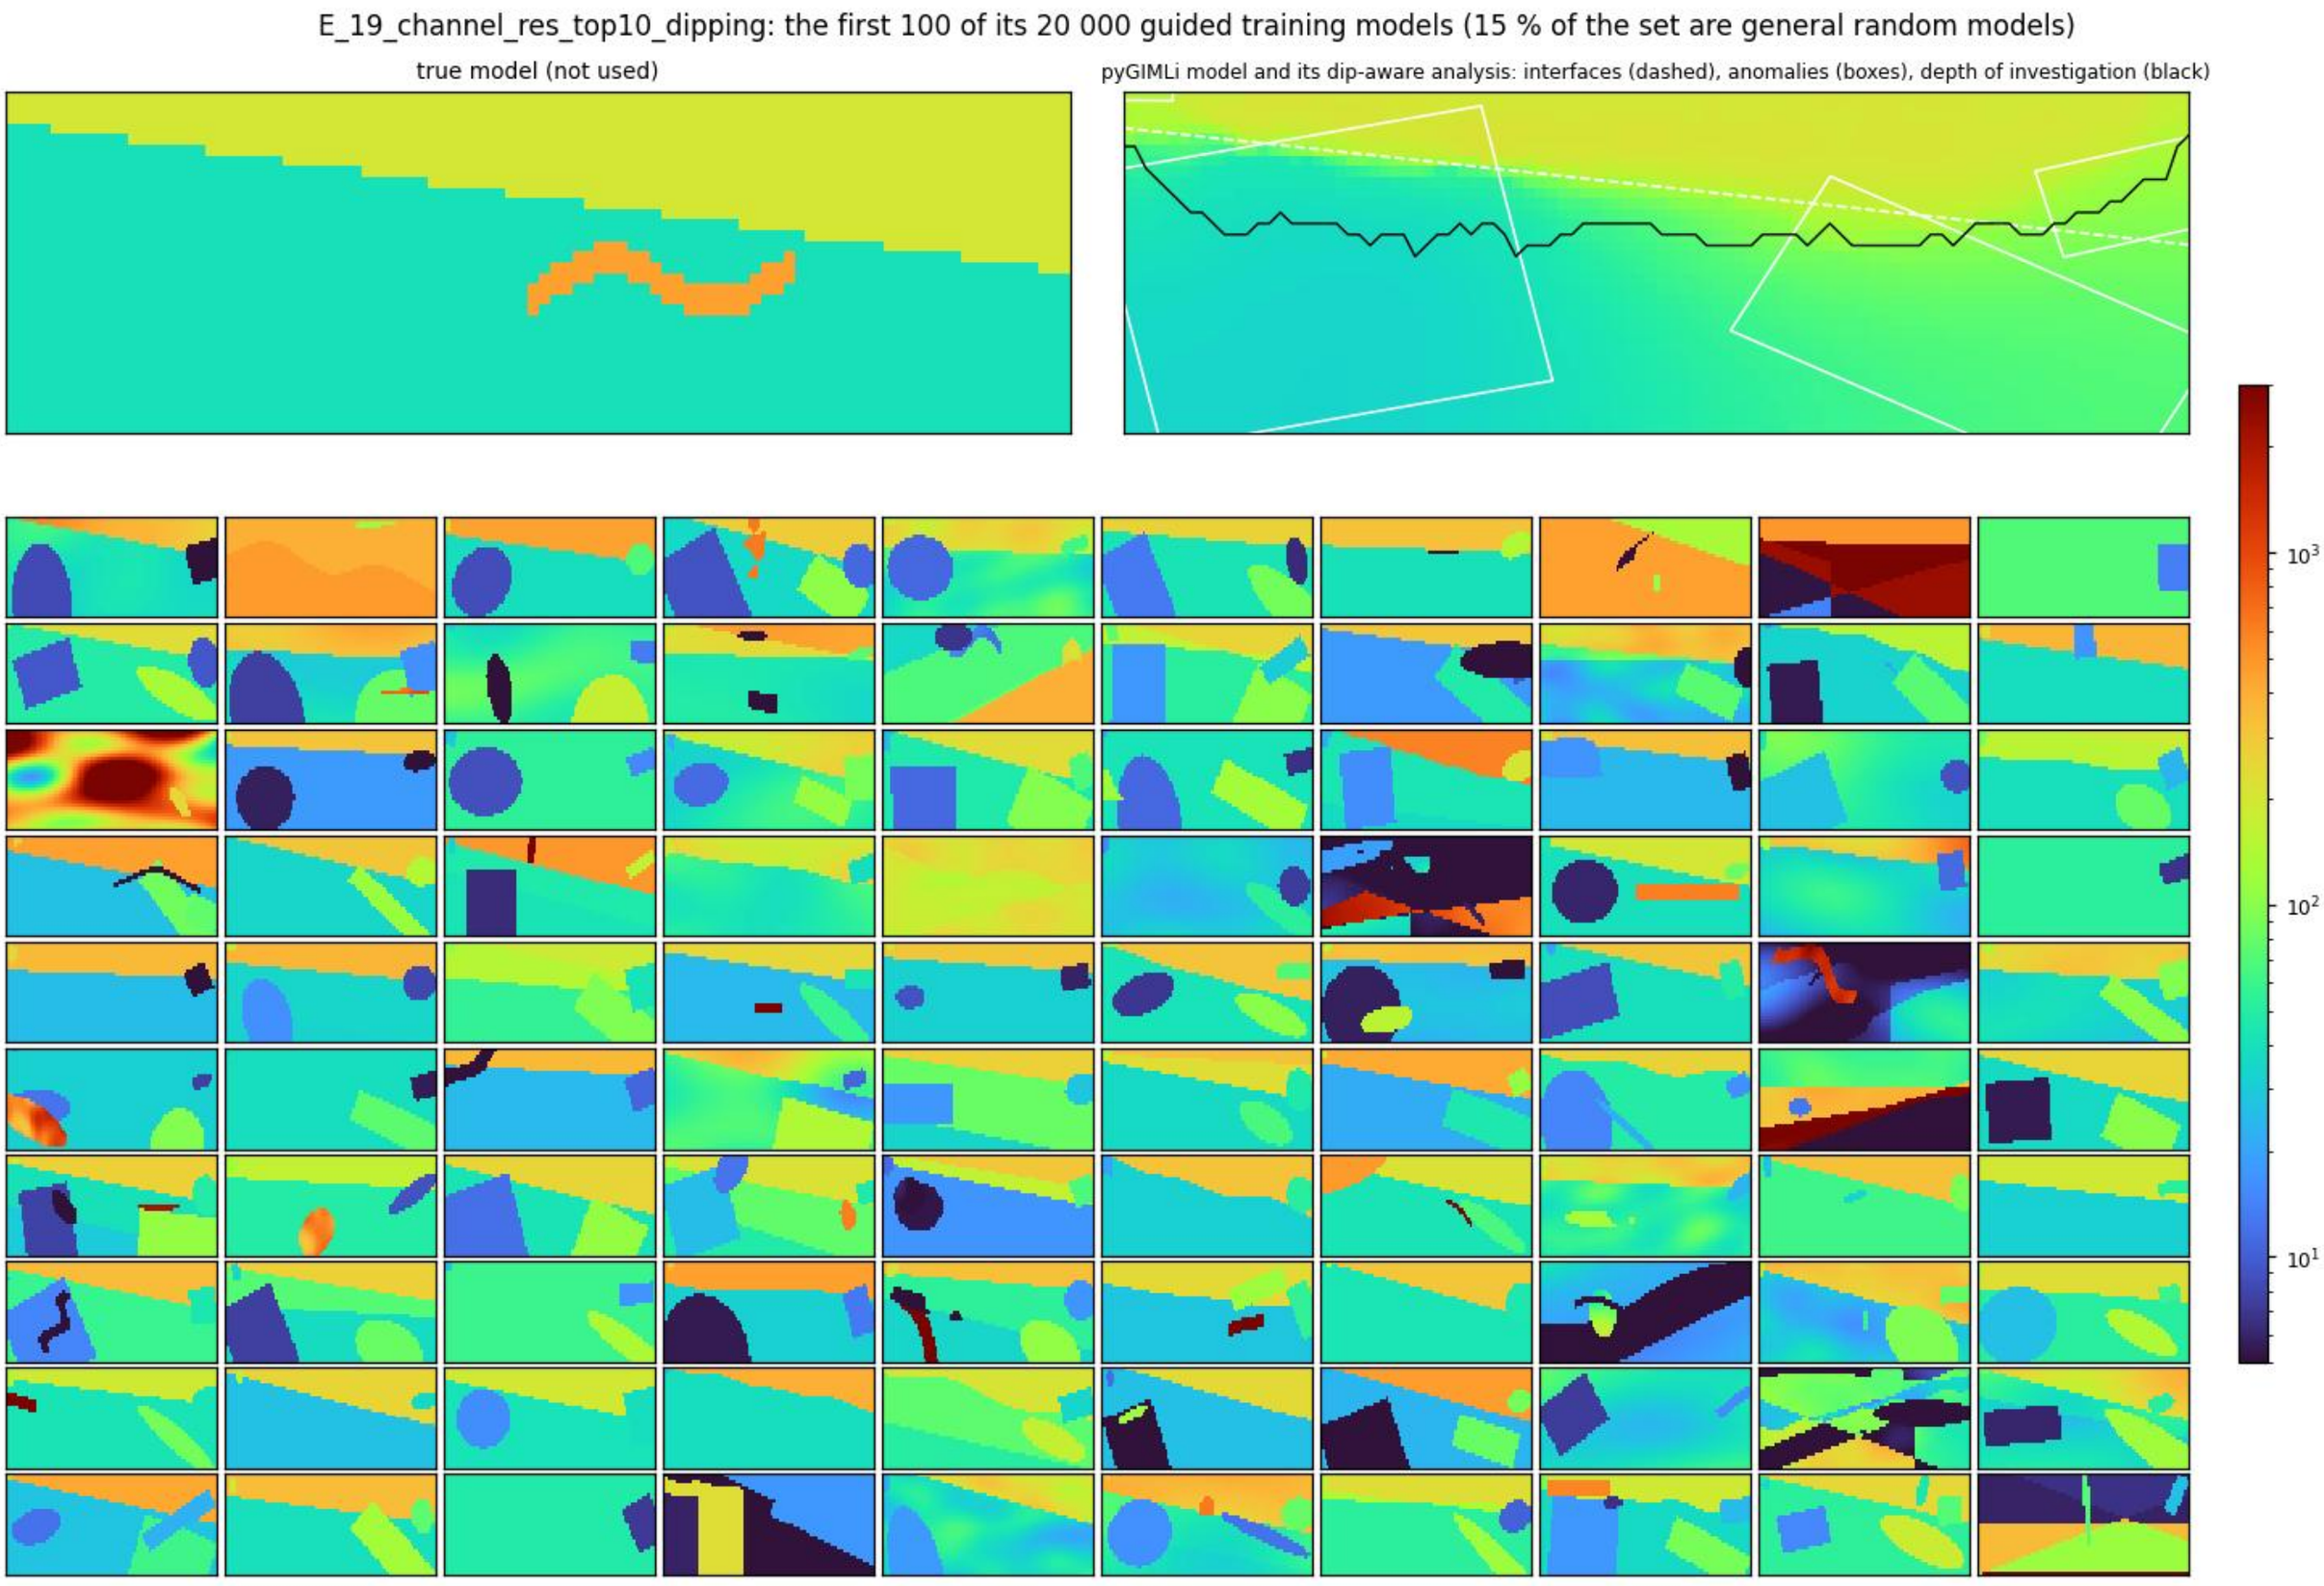
E_19_channel_res_top10_dipping: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S76

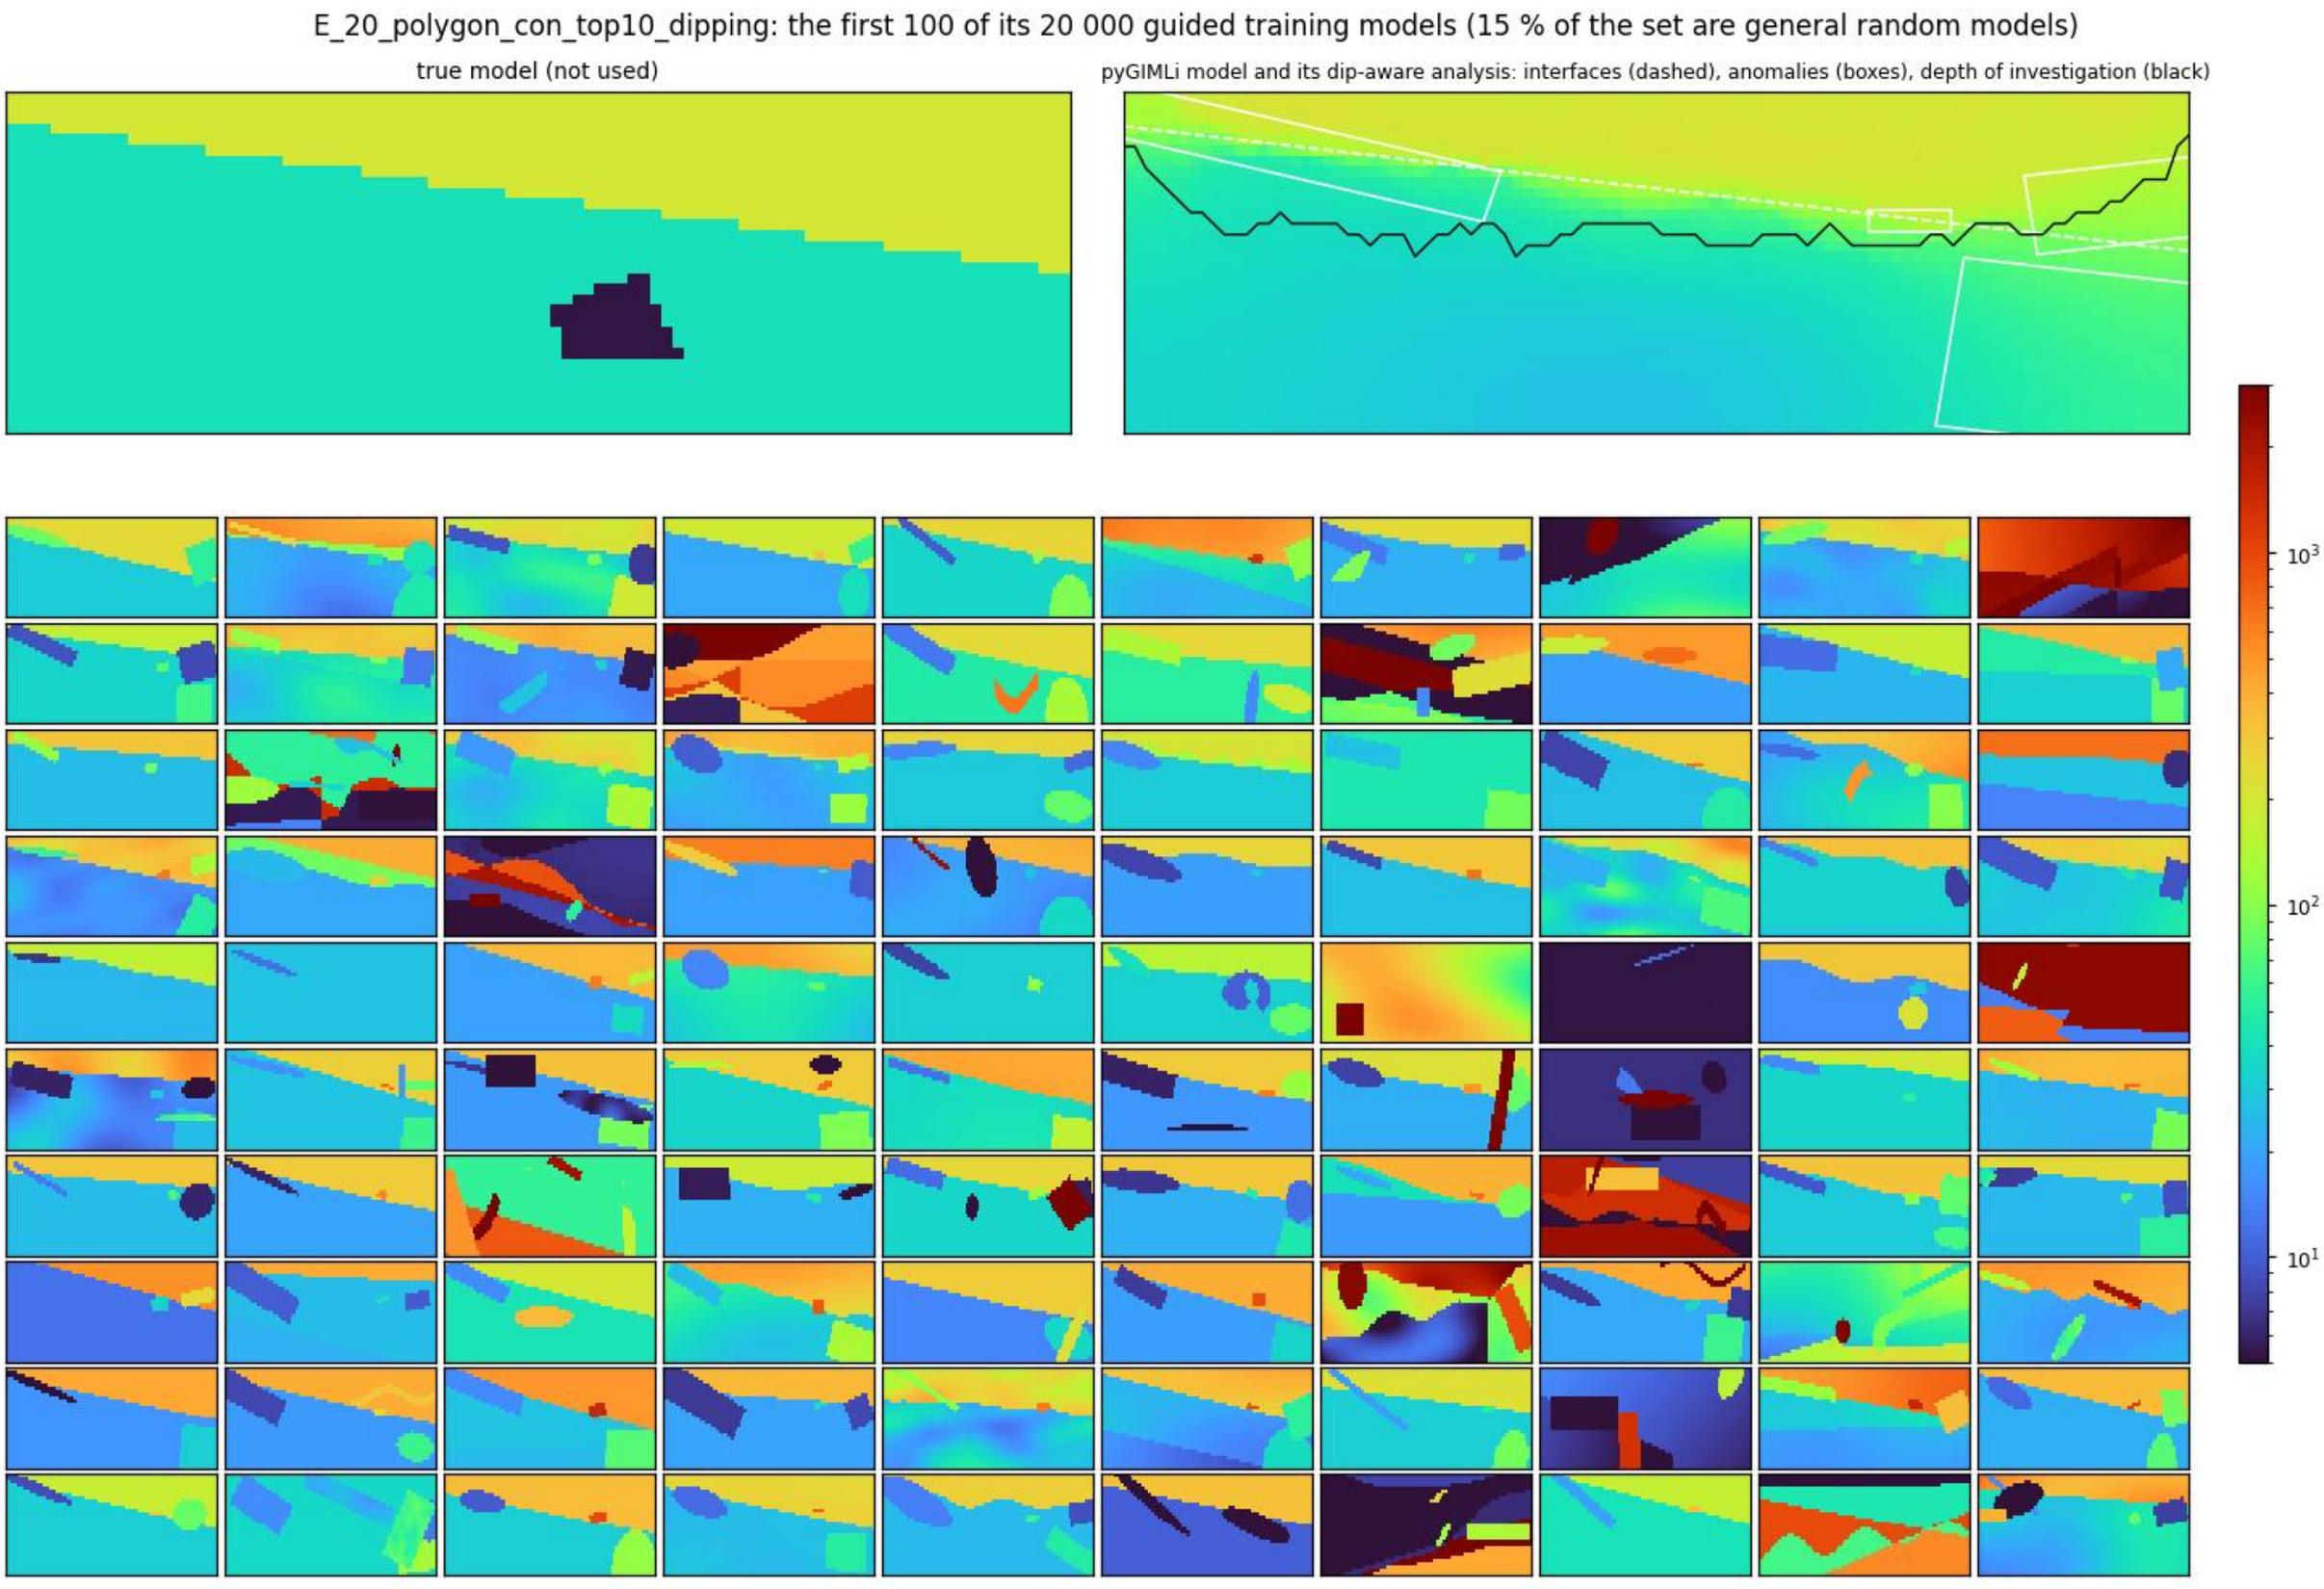
E_20_polygon_con_top10_dipping: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S77

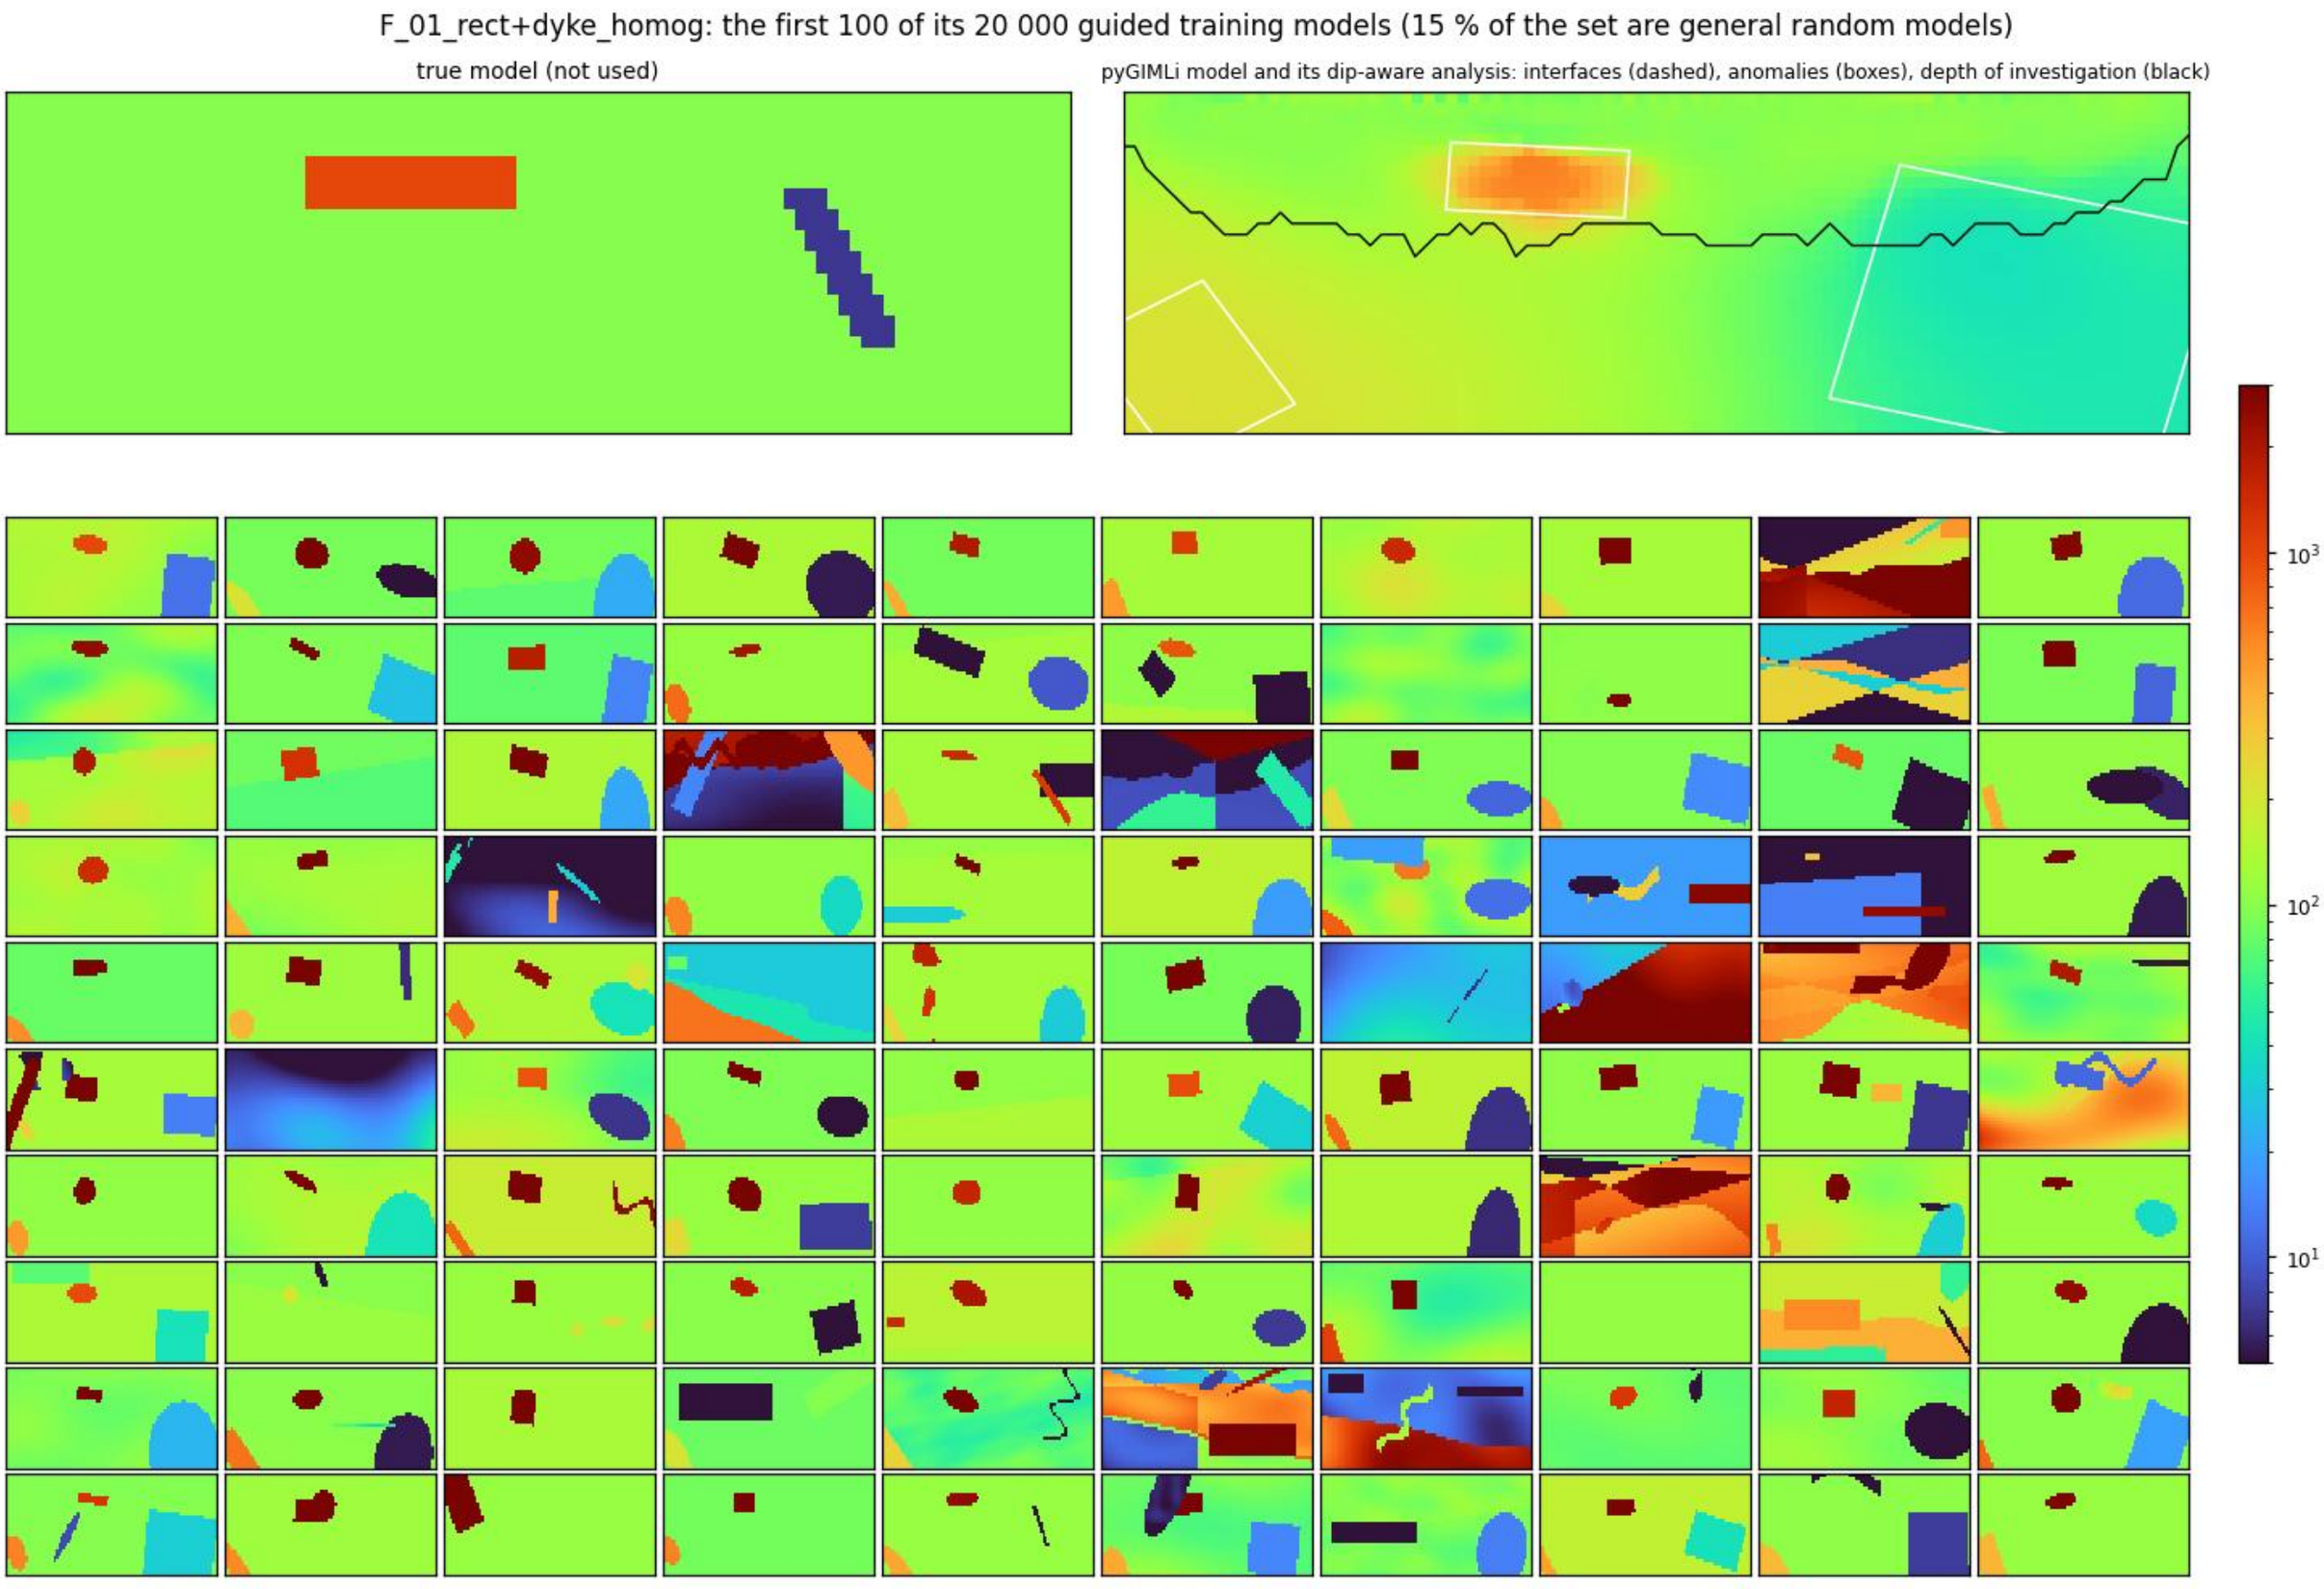
F_01_rect+dyke_homog: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S78

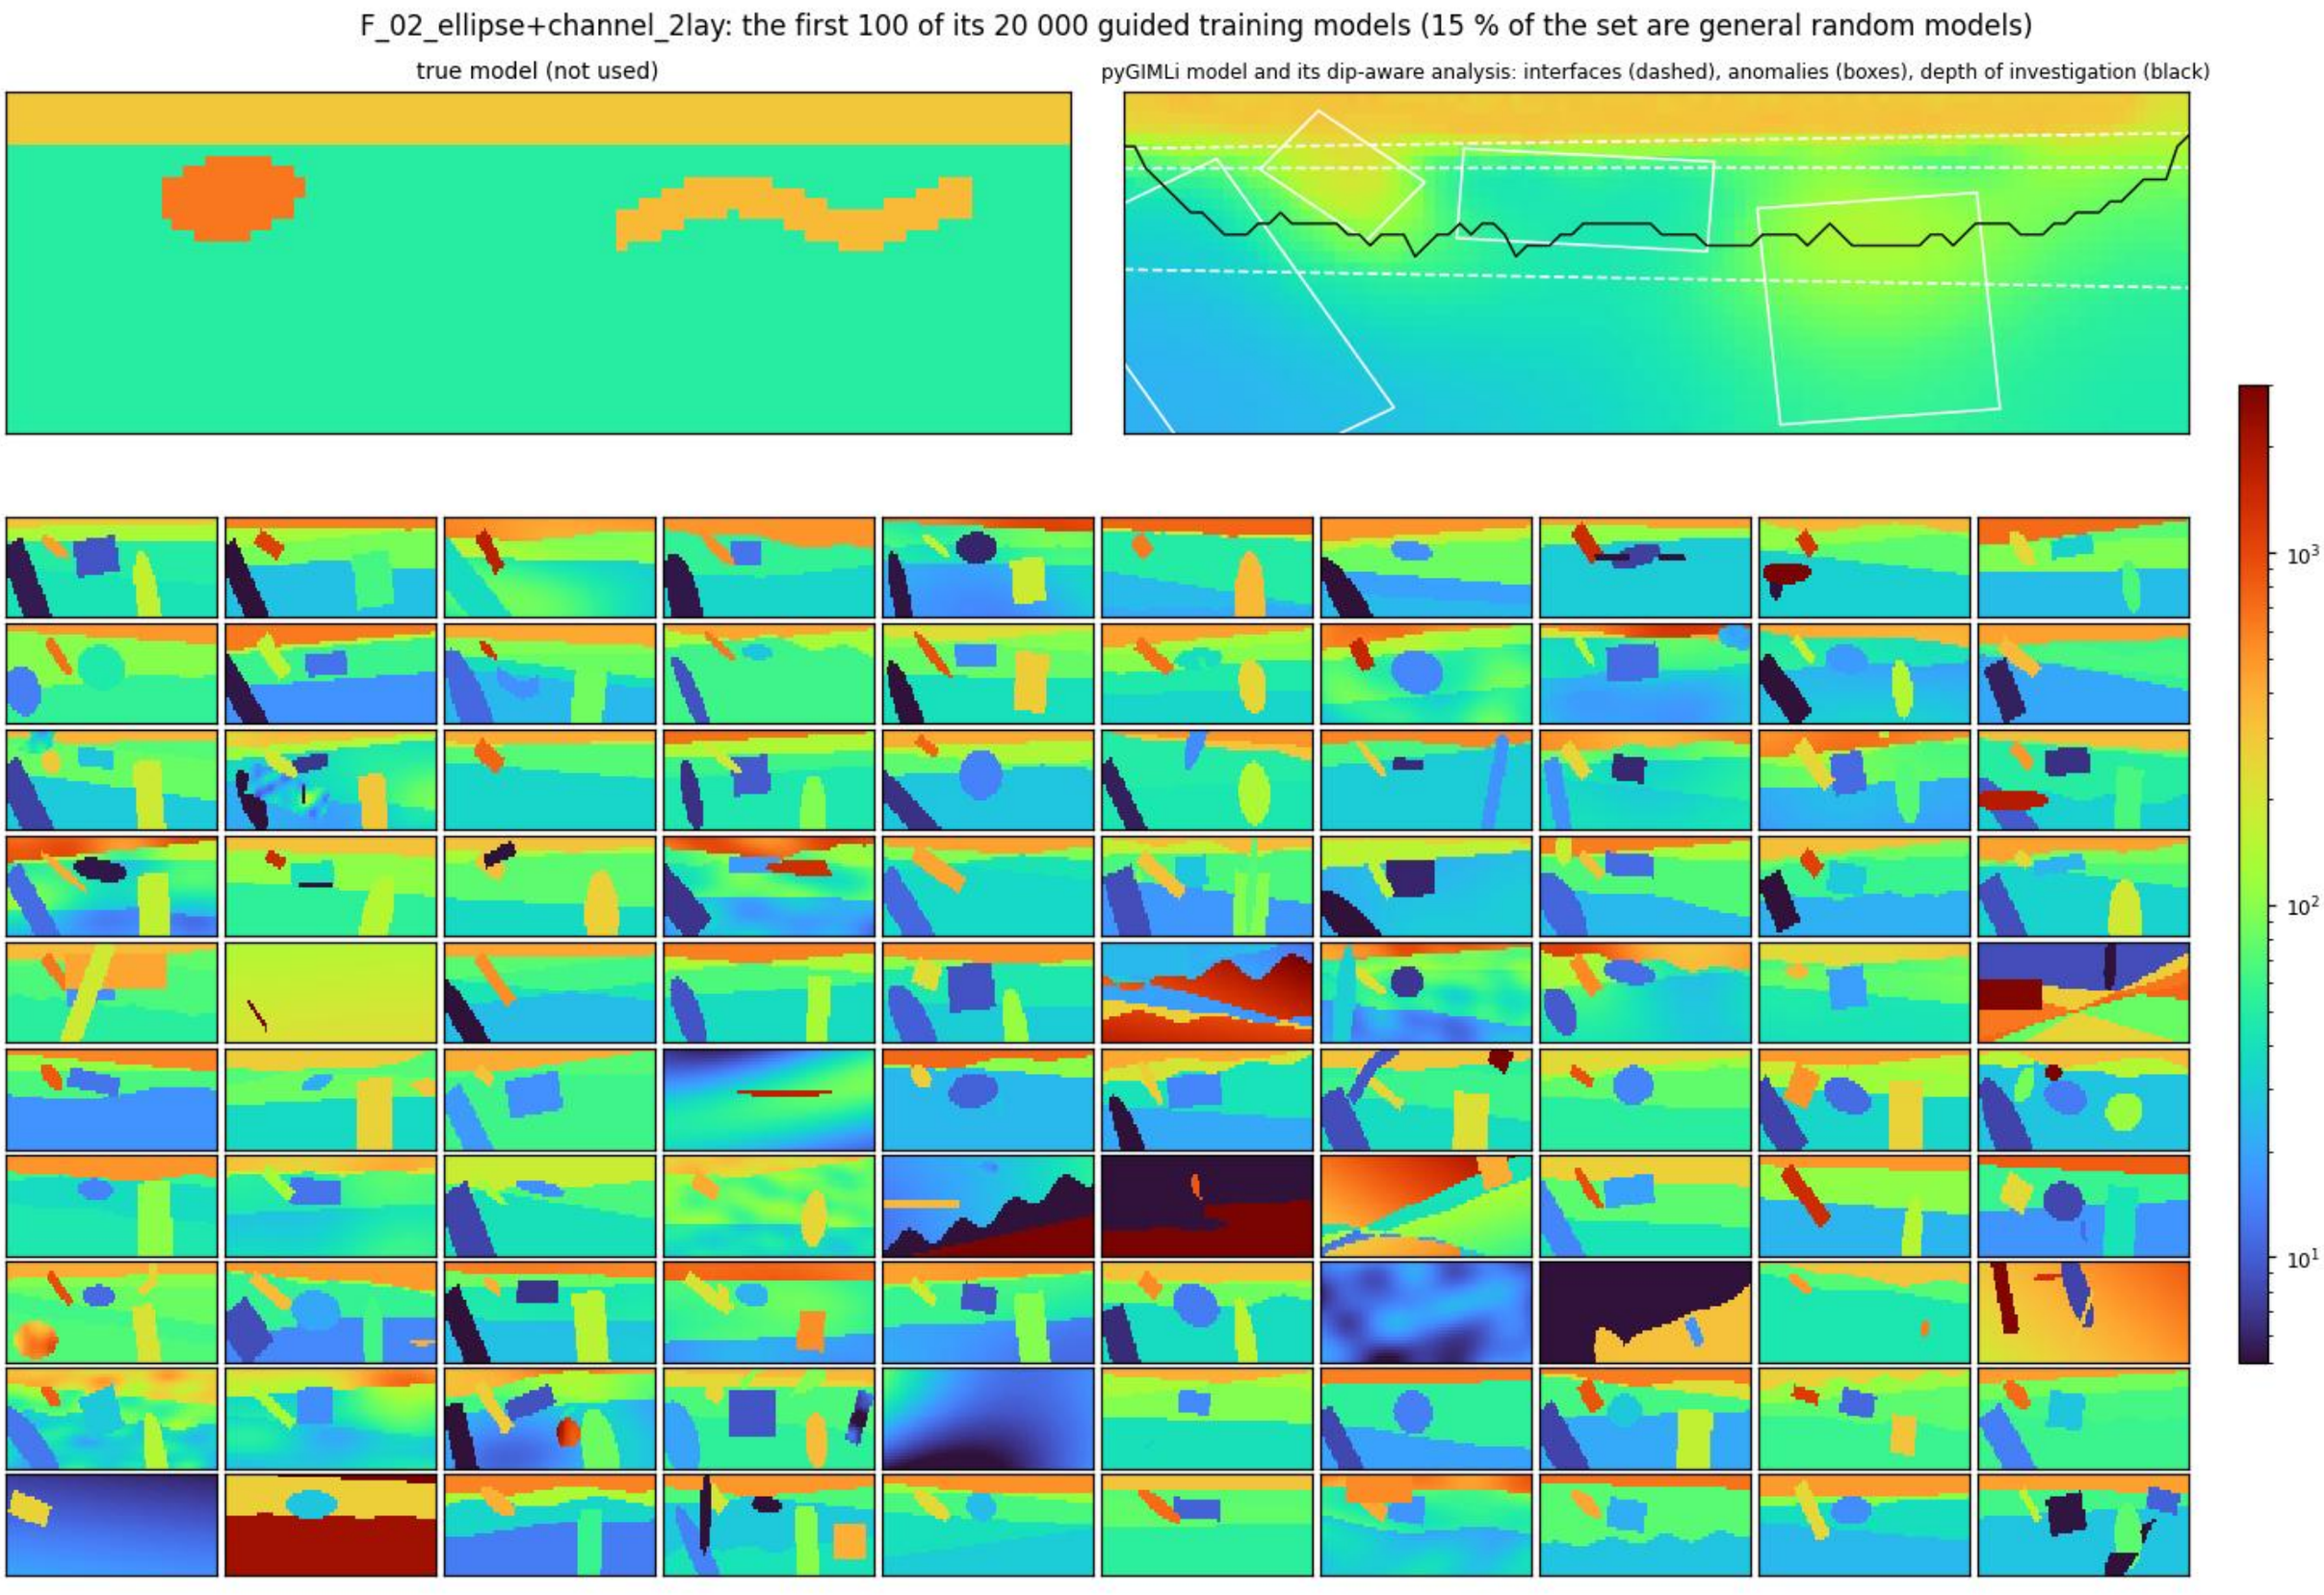
F_02_ellipse+channel_2lay: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S79

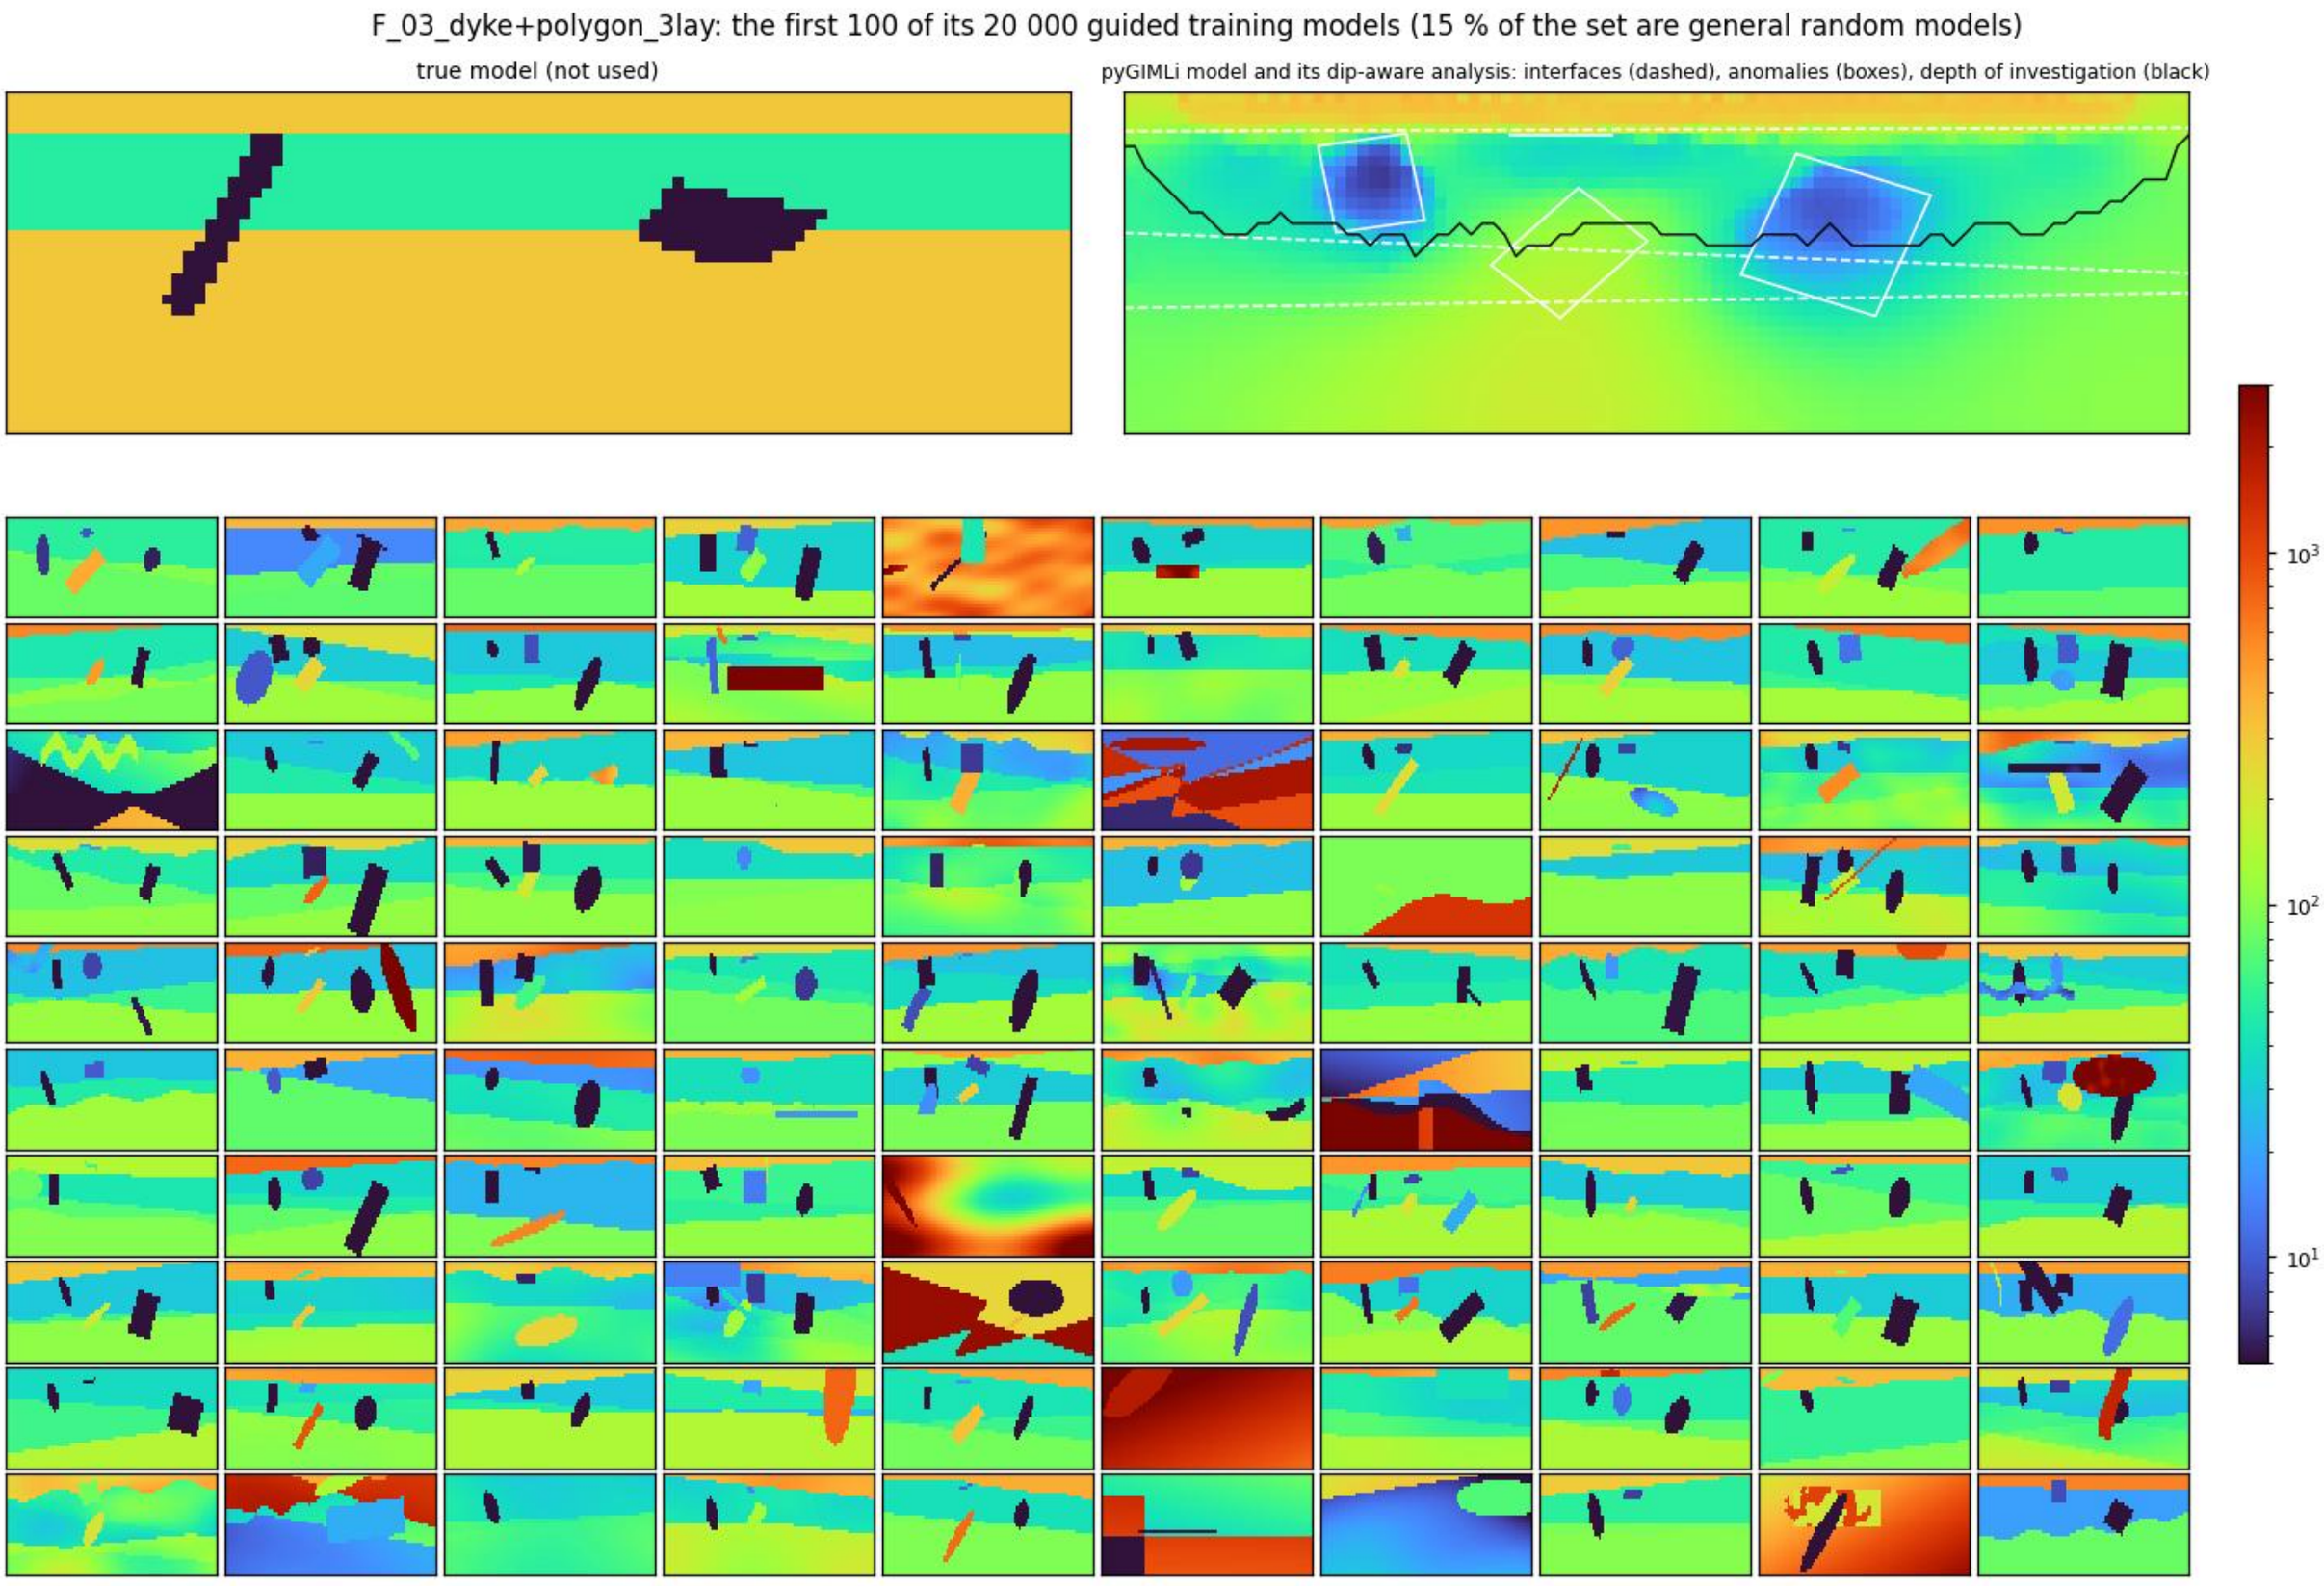
F_03_dyke+polygon_3lay: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S80

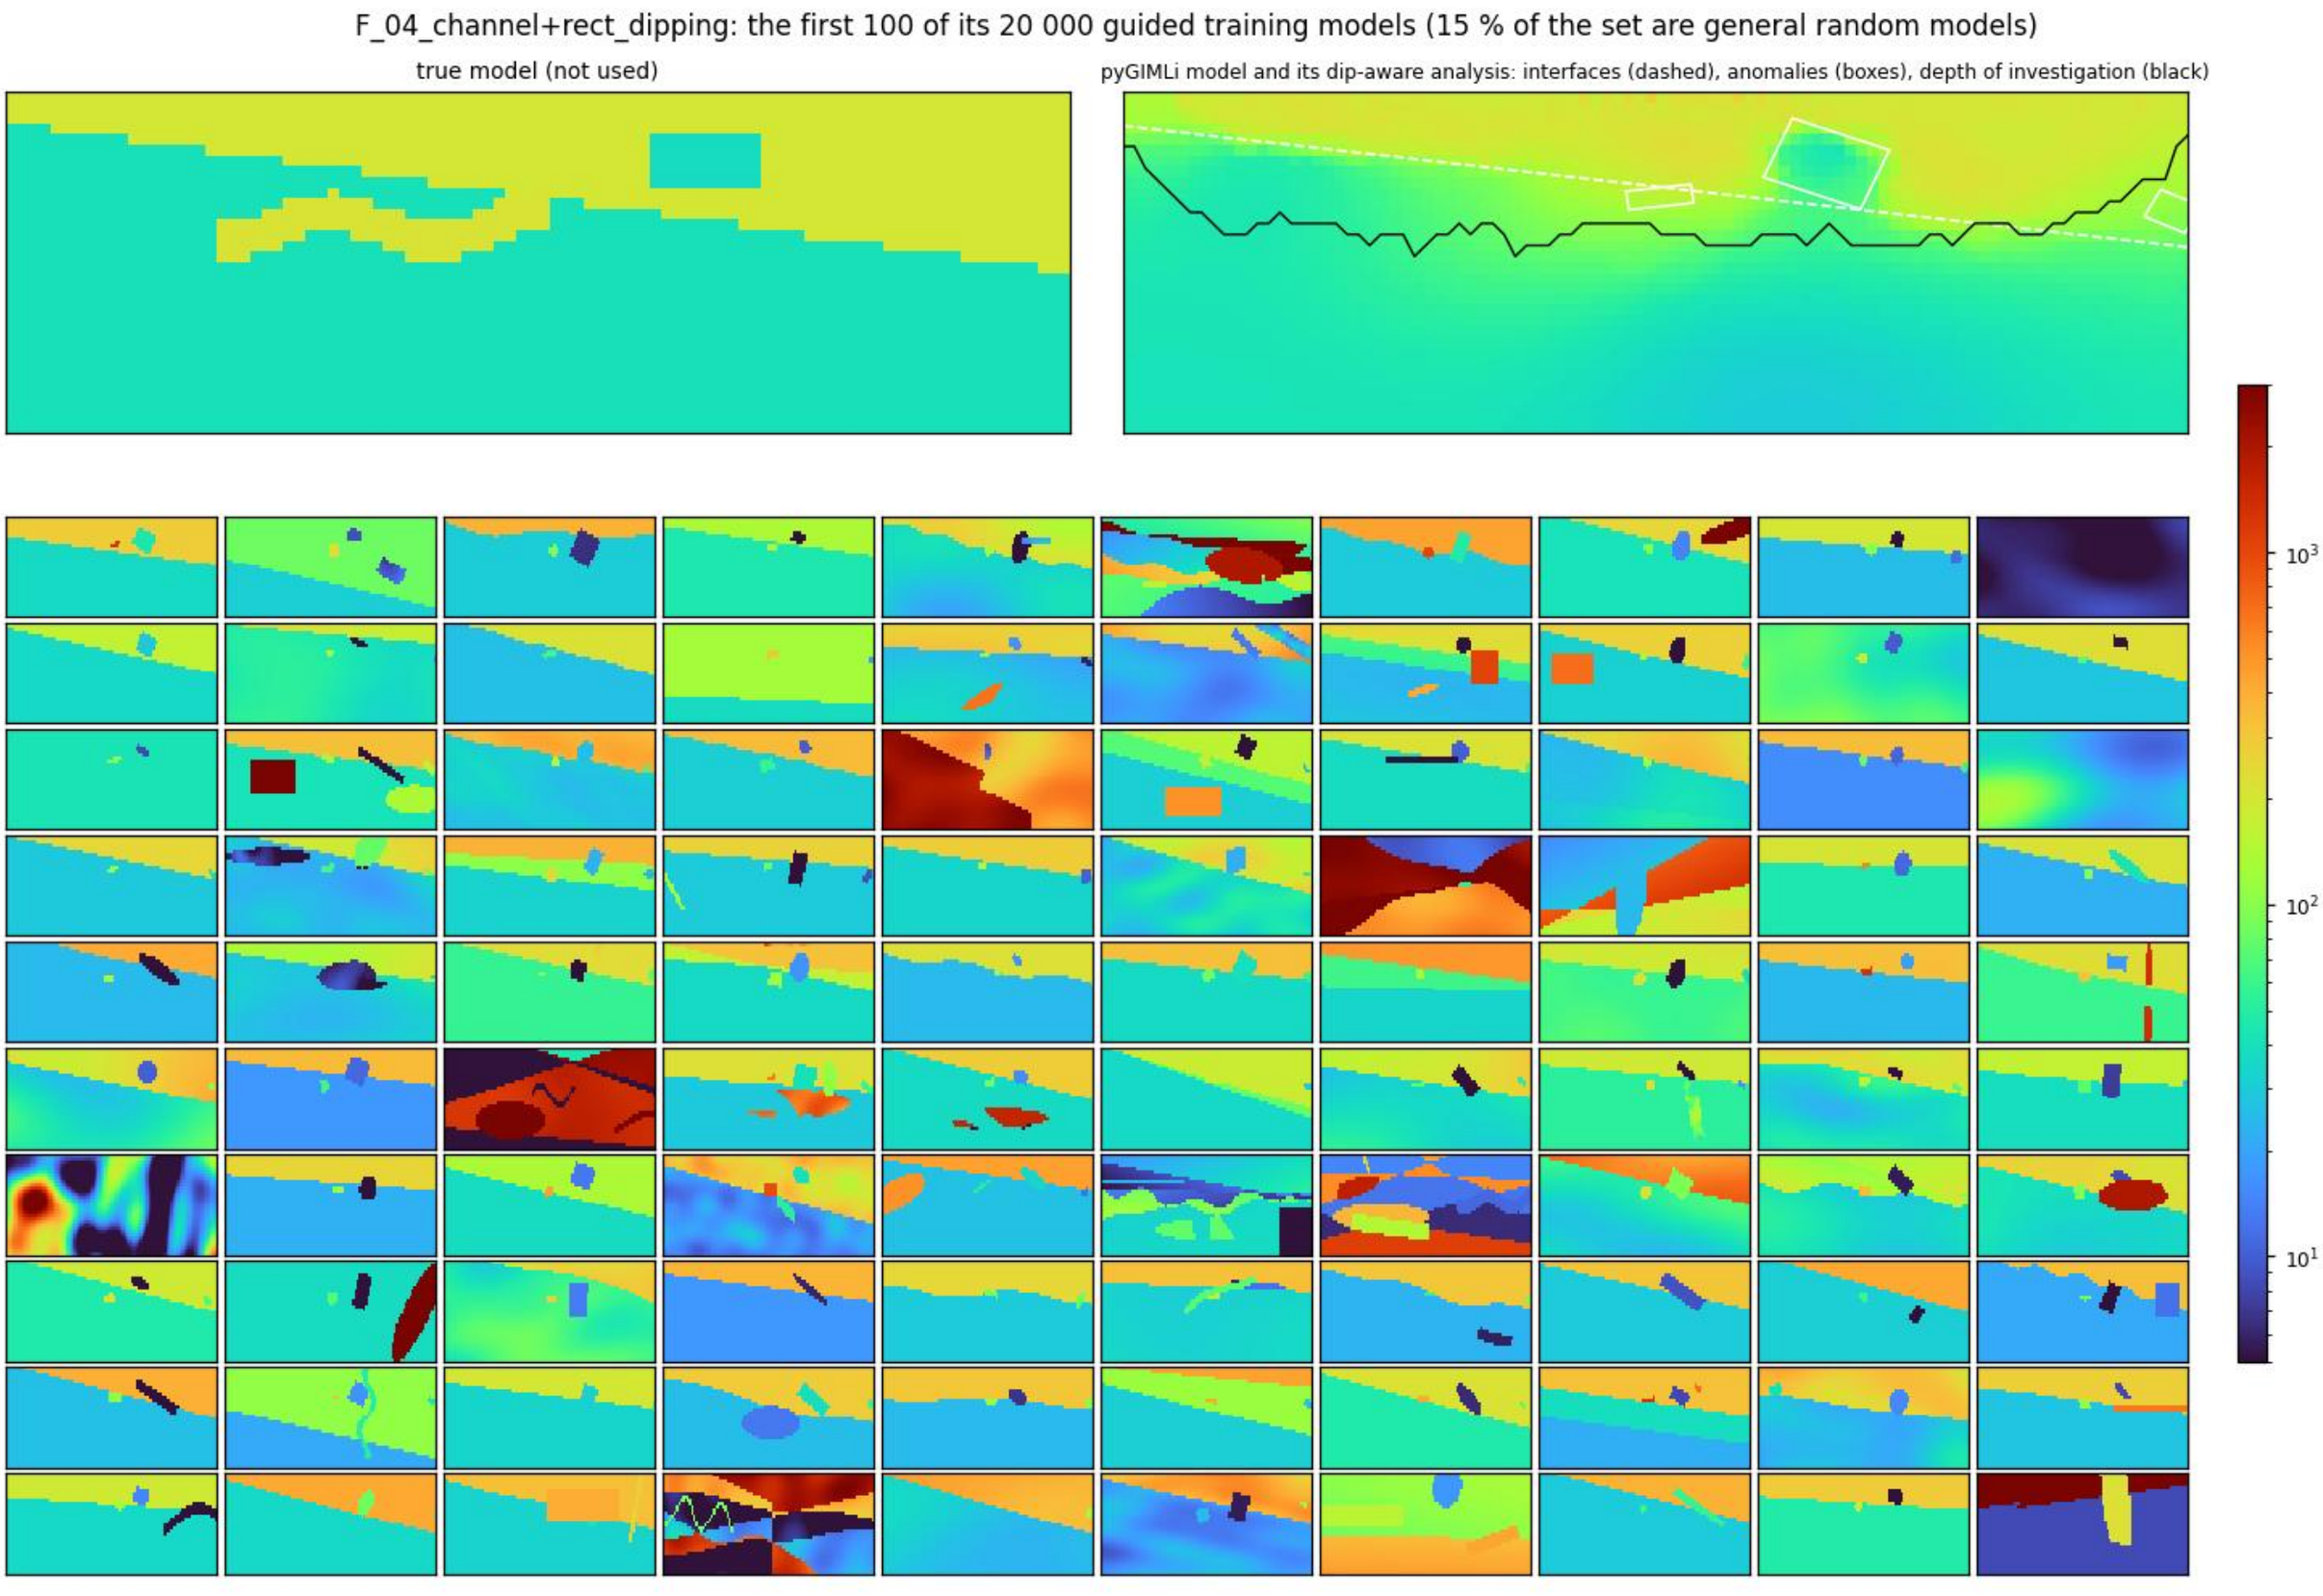
F_04_channel+rect_dipping: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S81

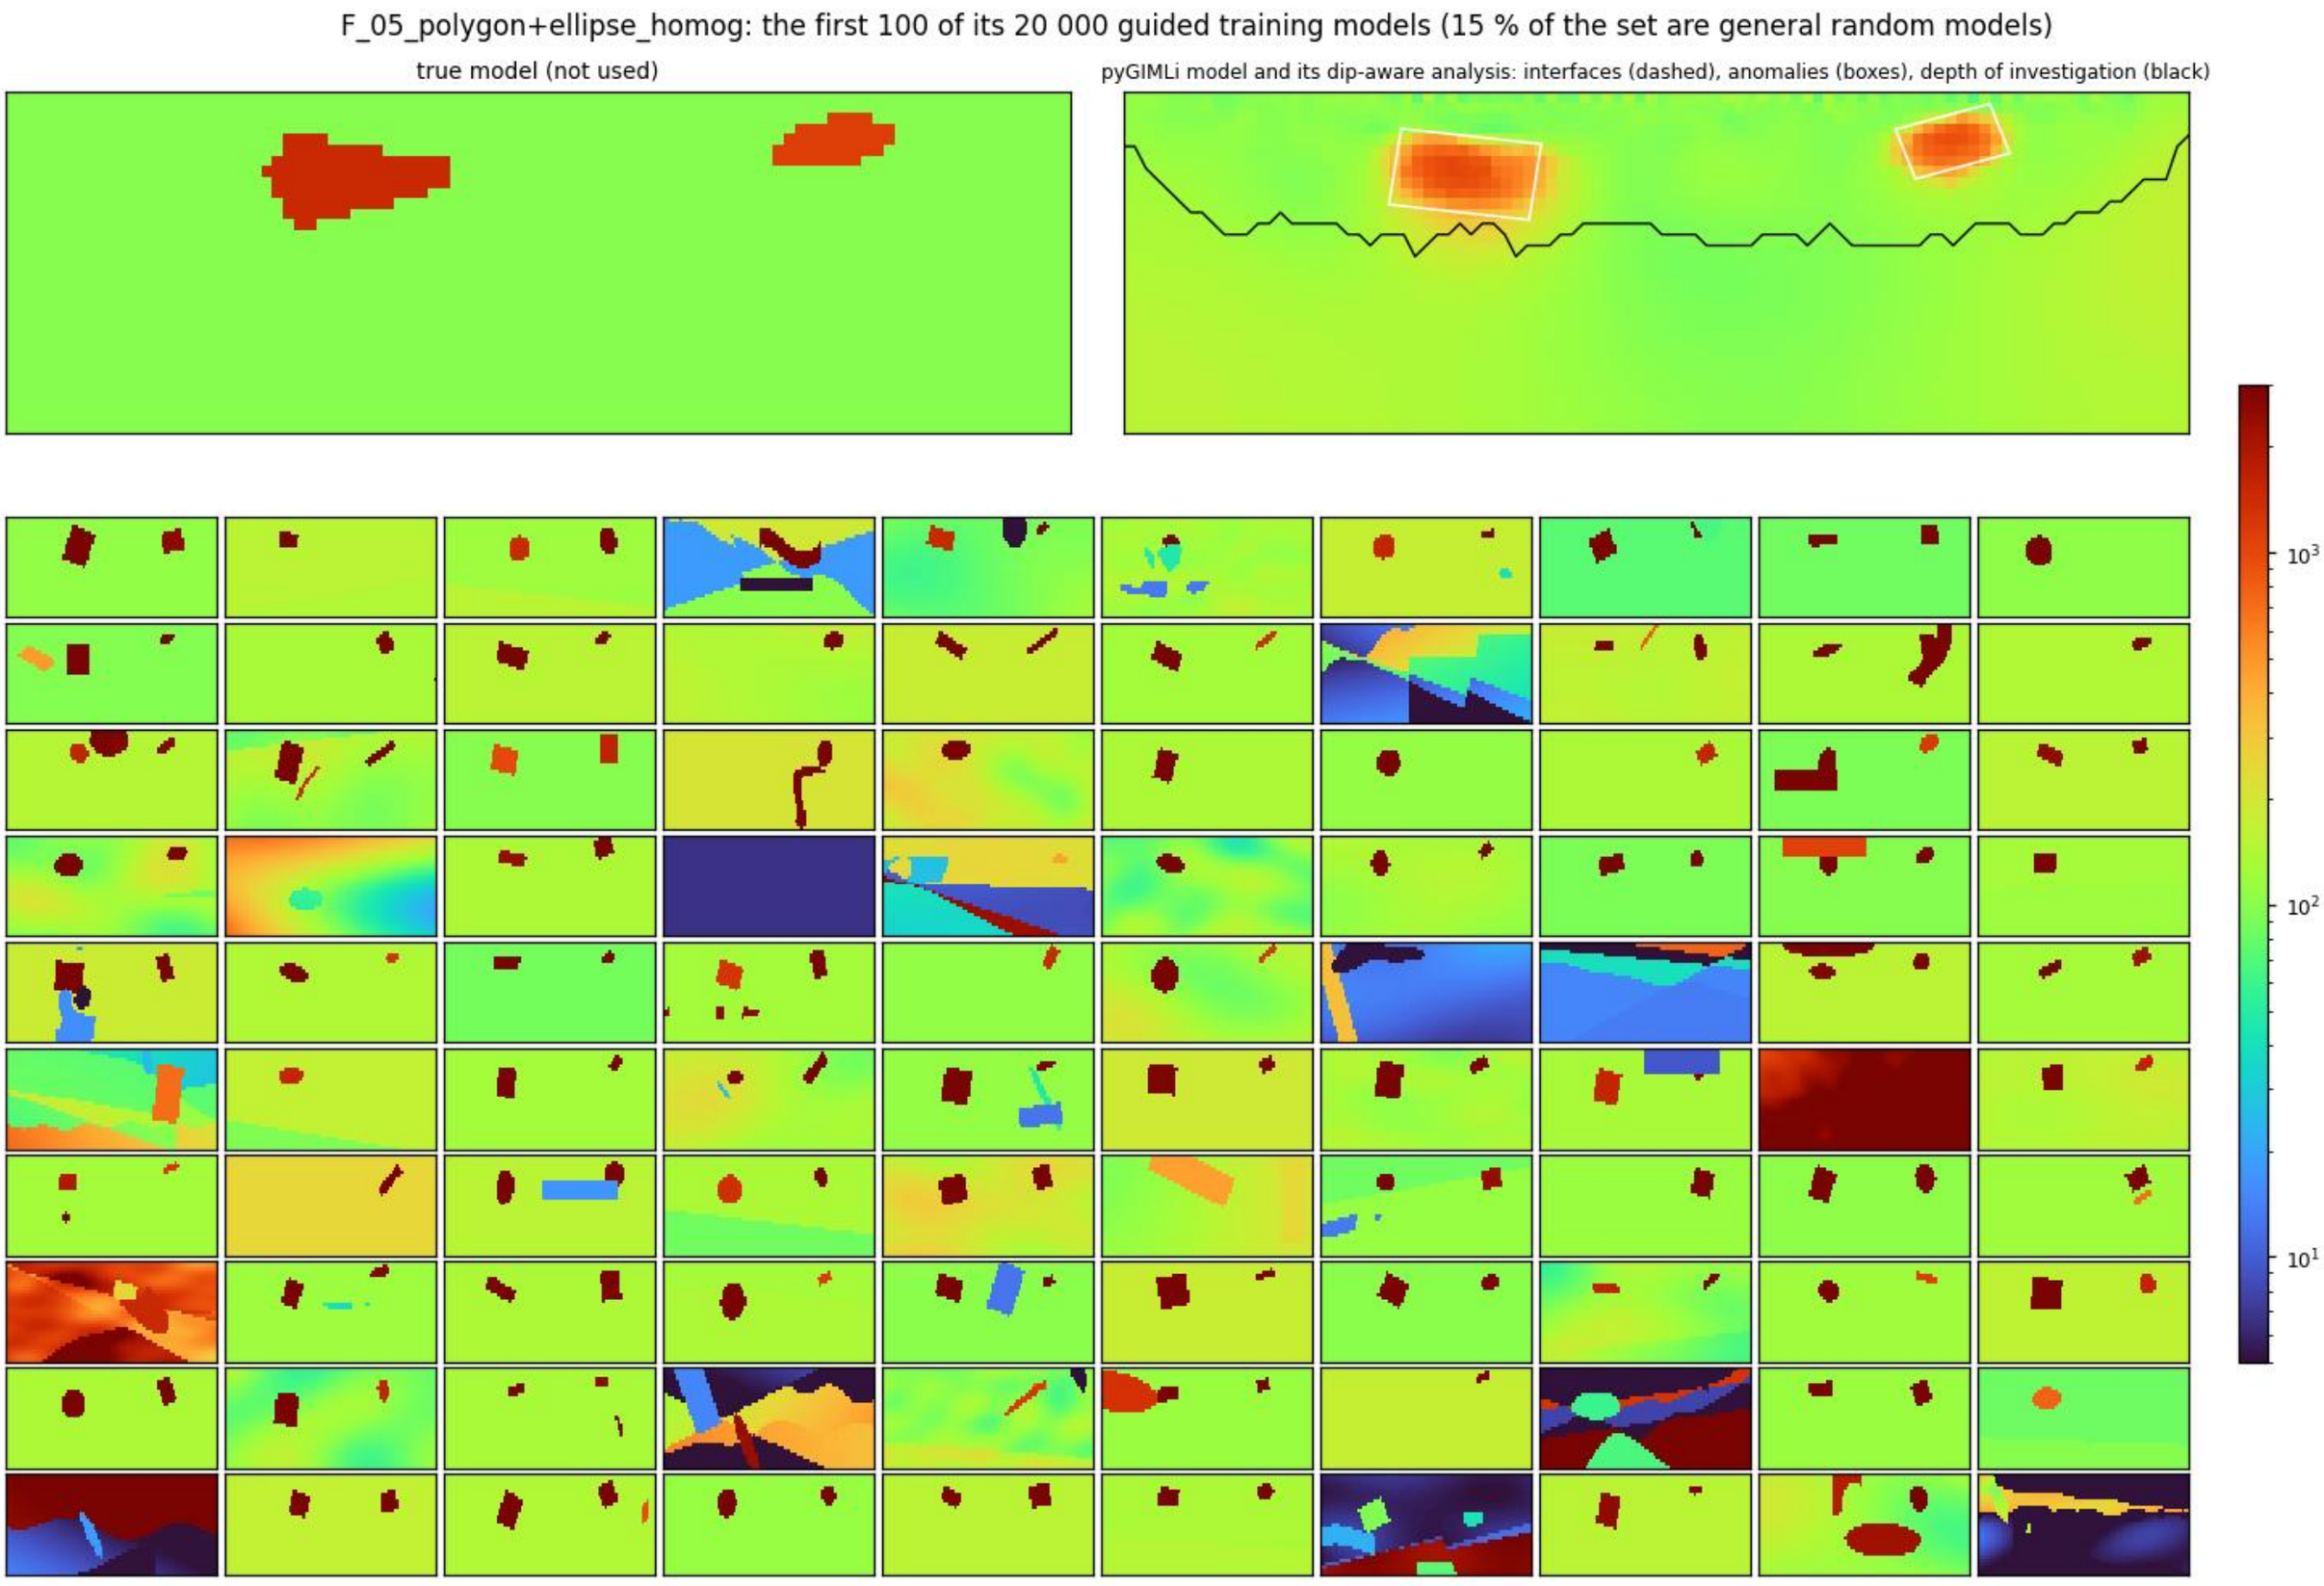
F_05_polygon+ellipse_homog: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S82

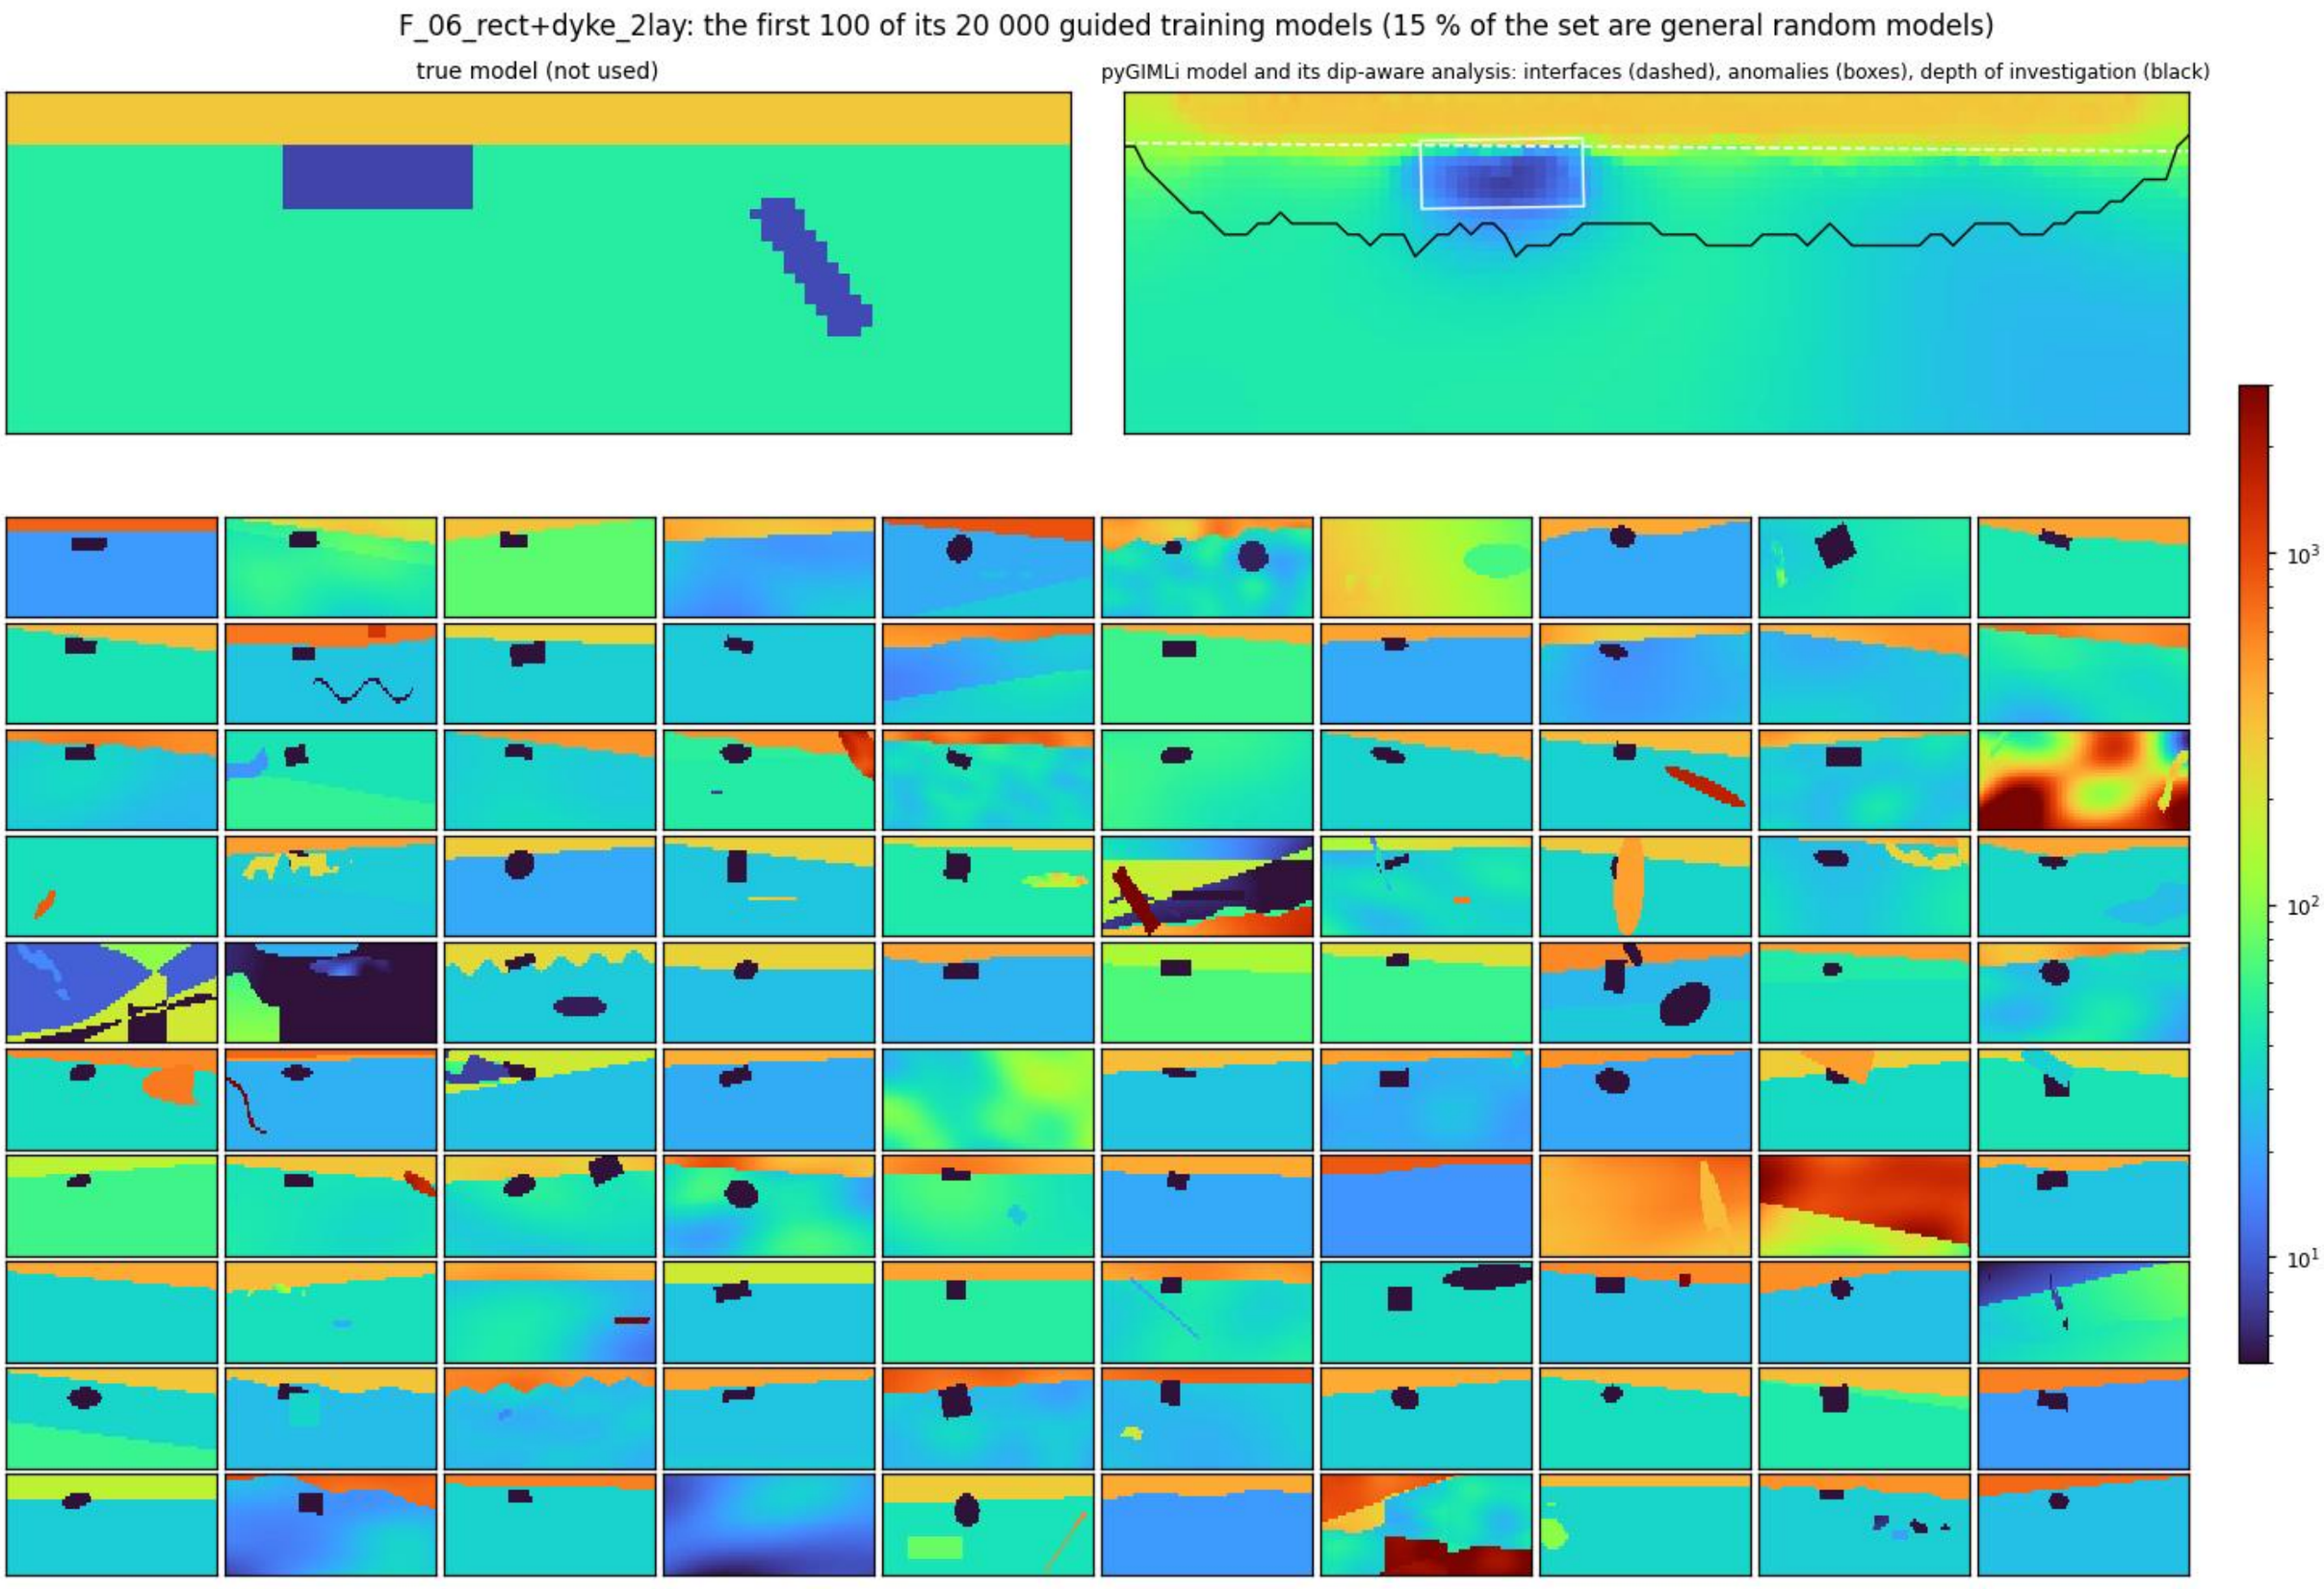
F_06_rect+dyke_2lay: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S83

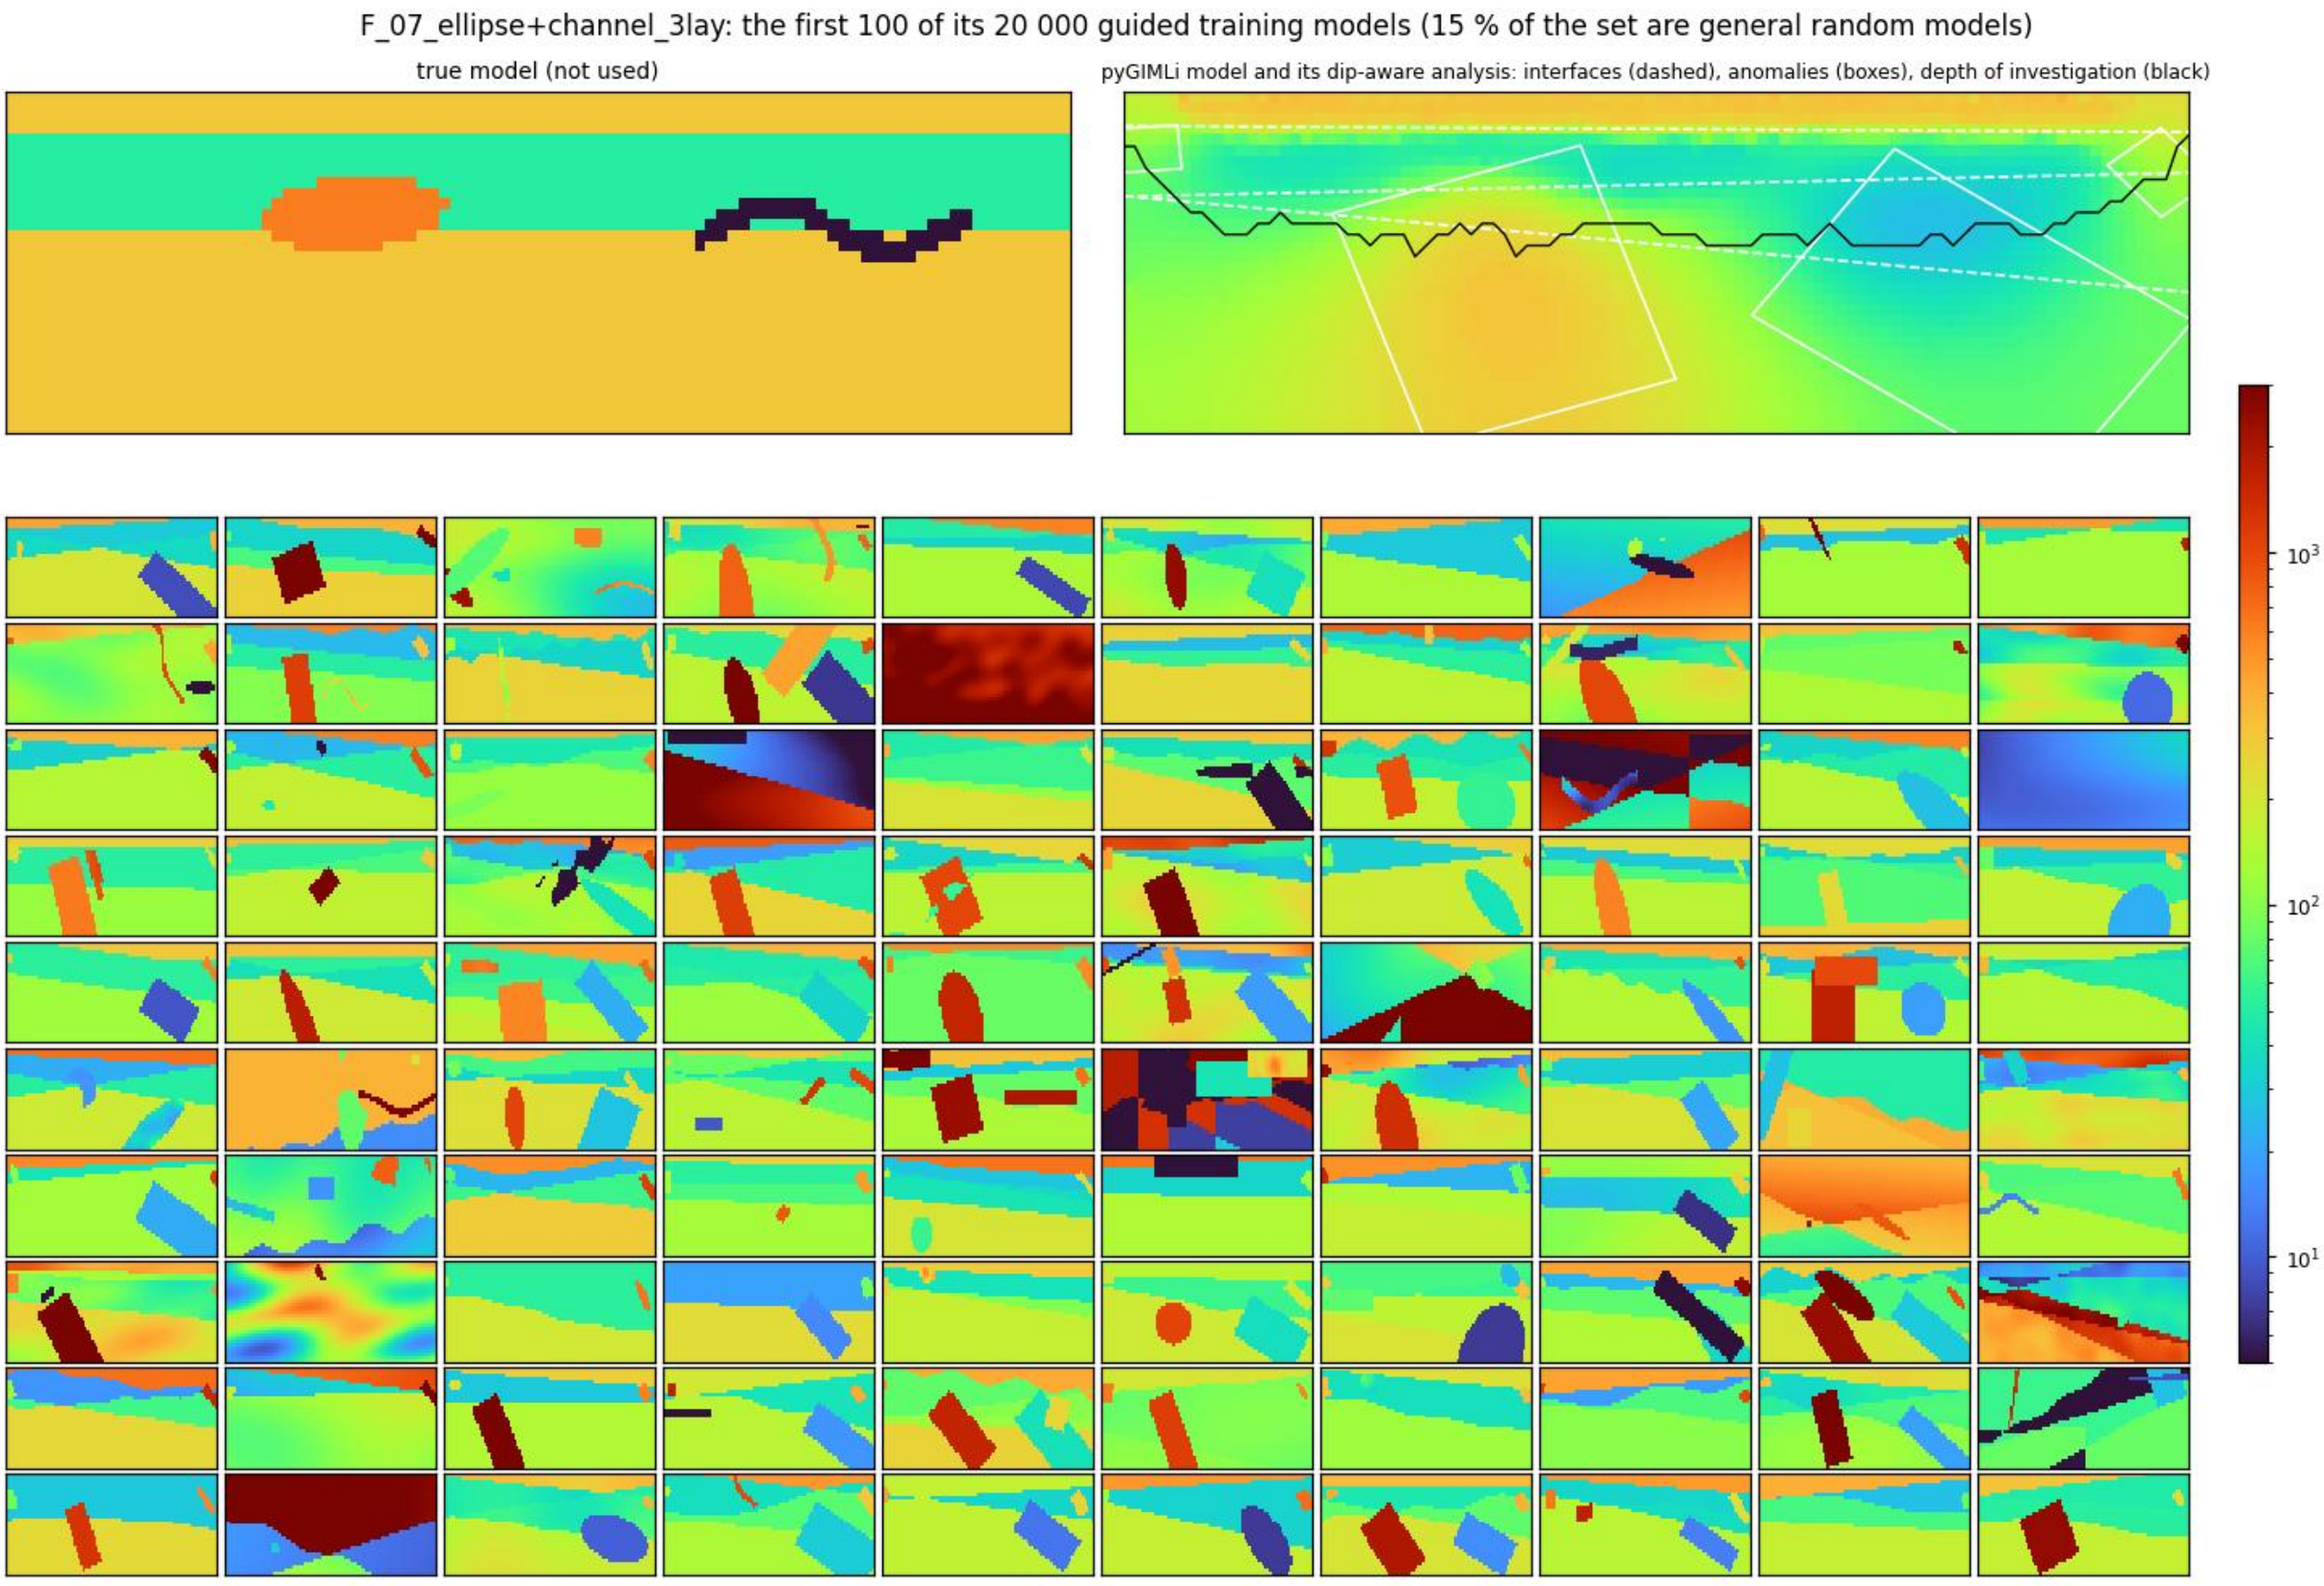
F_07_ellipse+channel_3lay: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S84

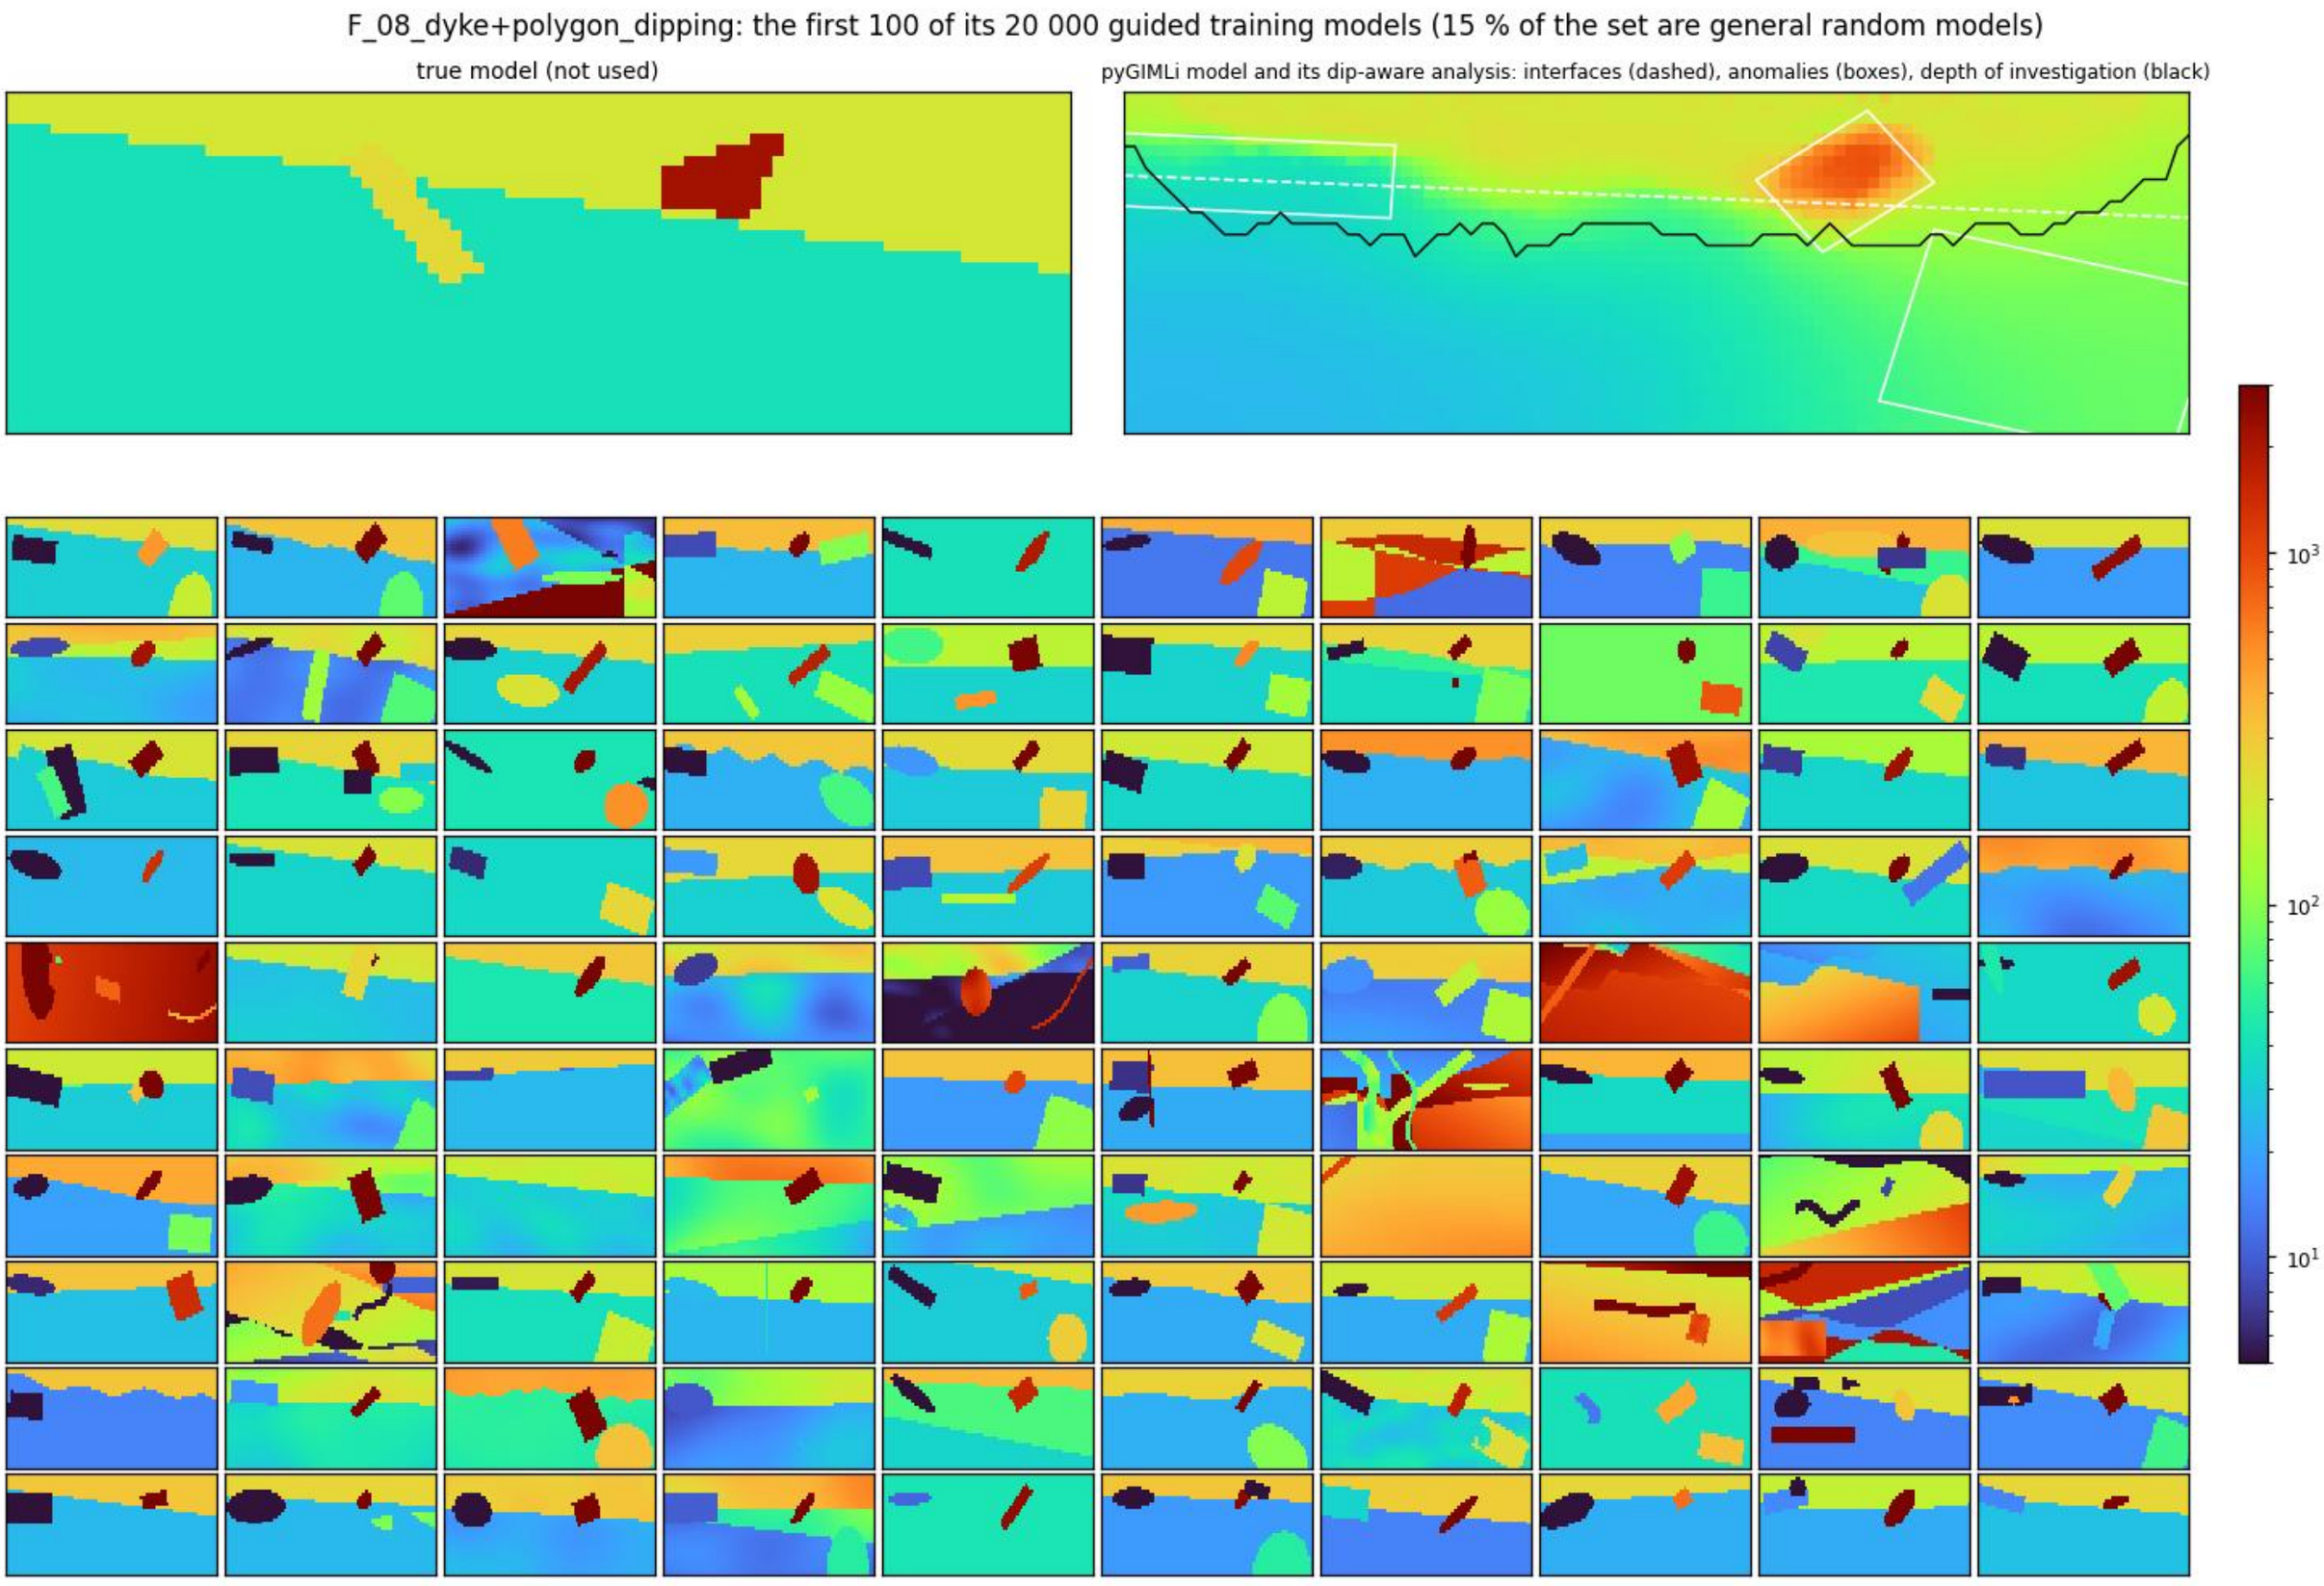
F_08_dyke+polygon_dipping: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S85

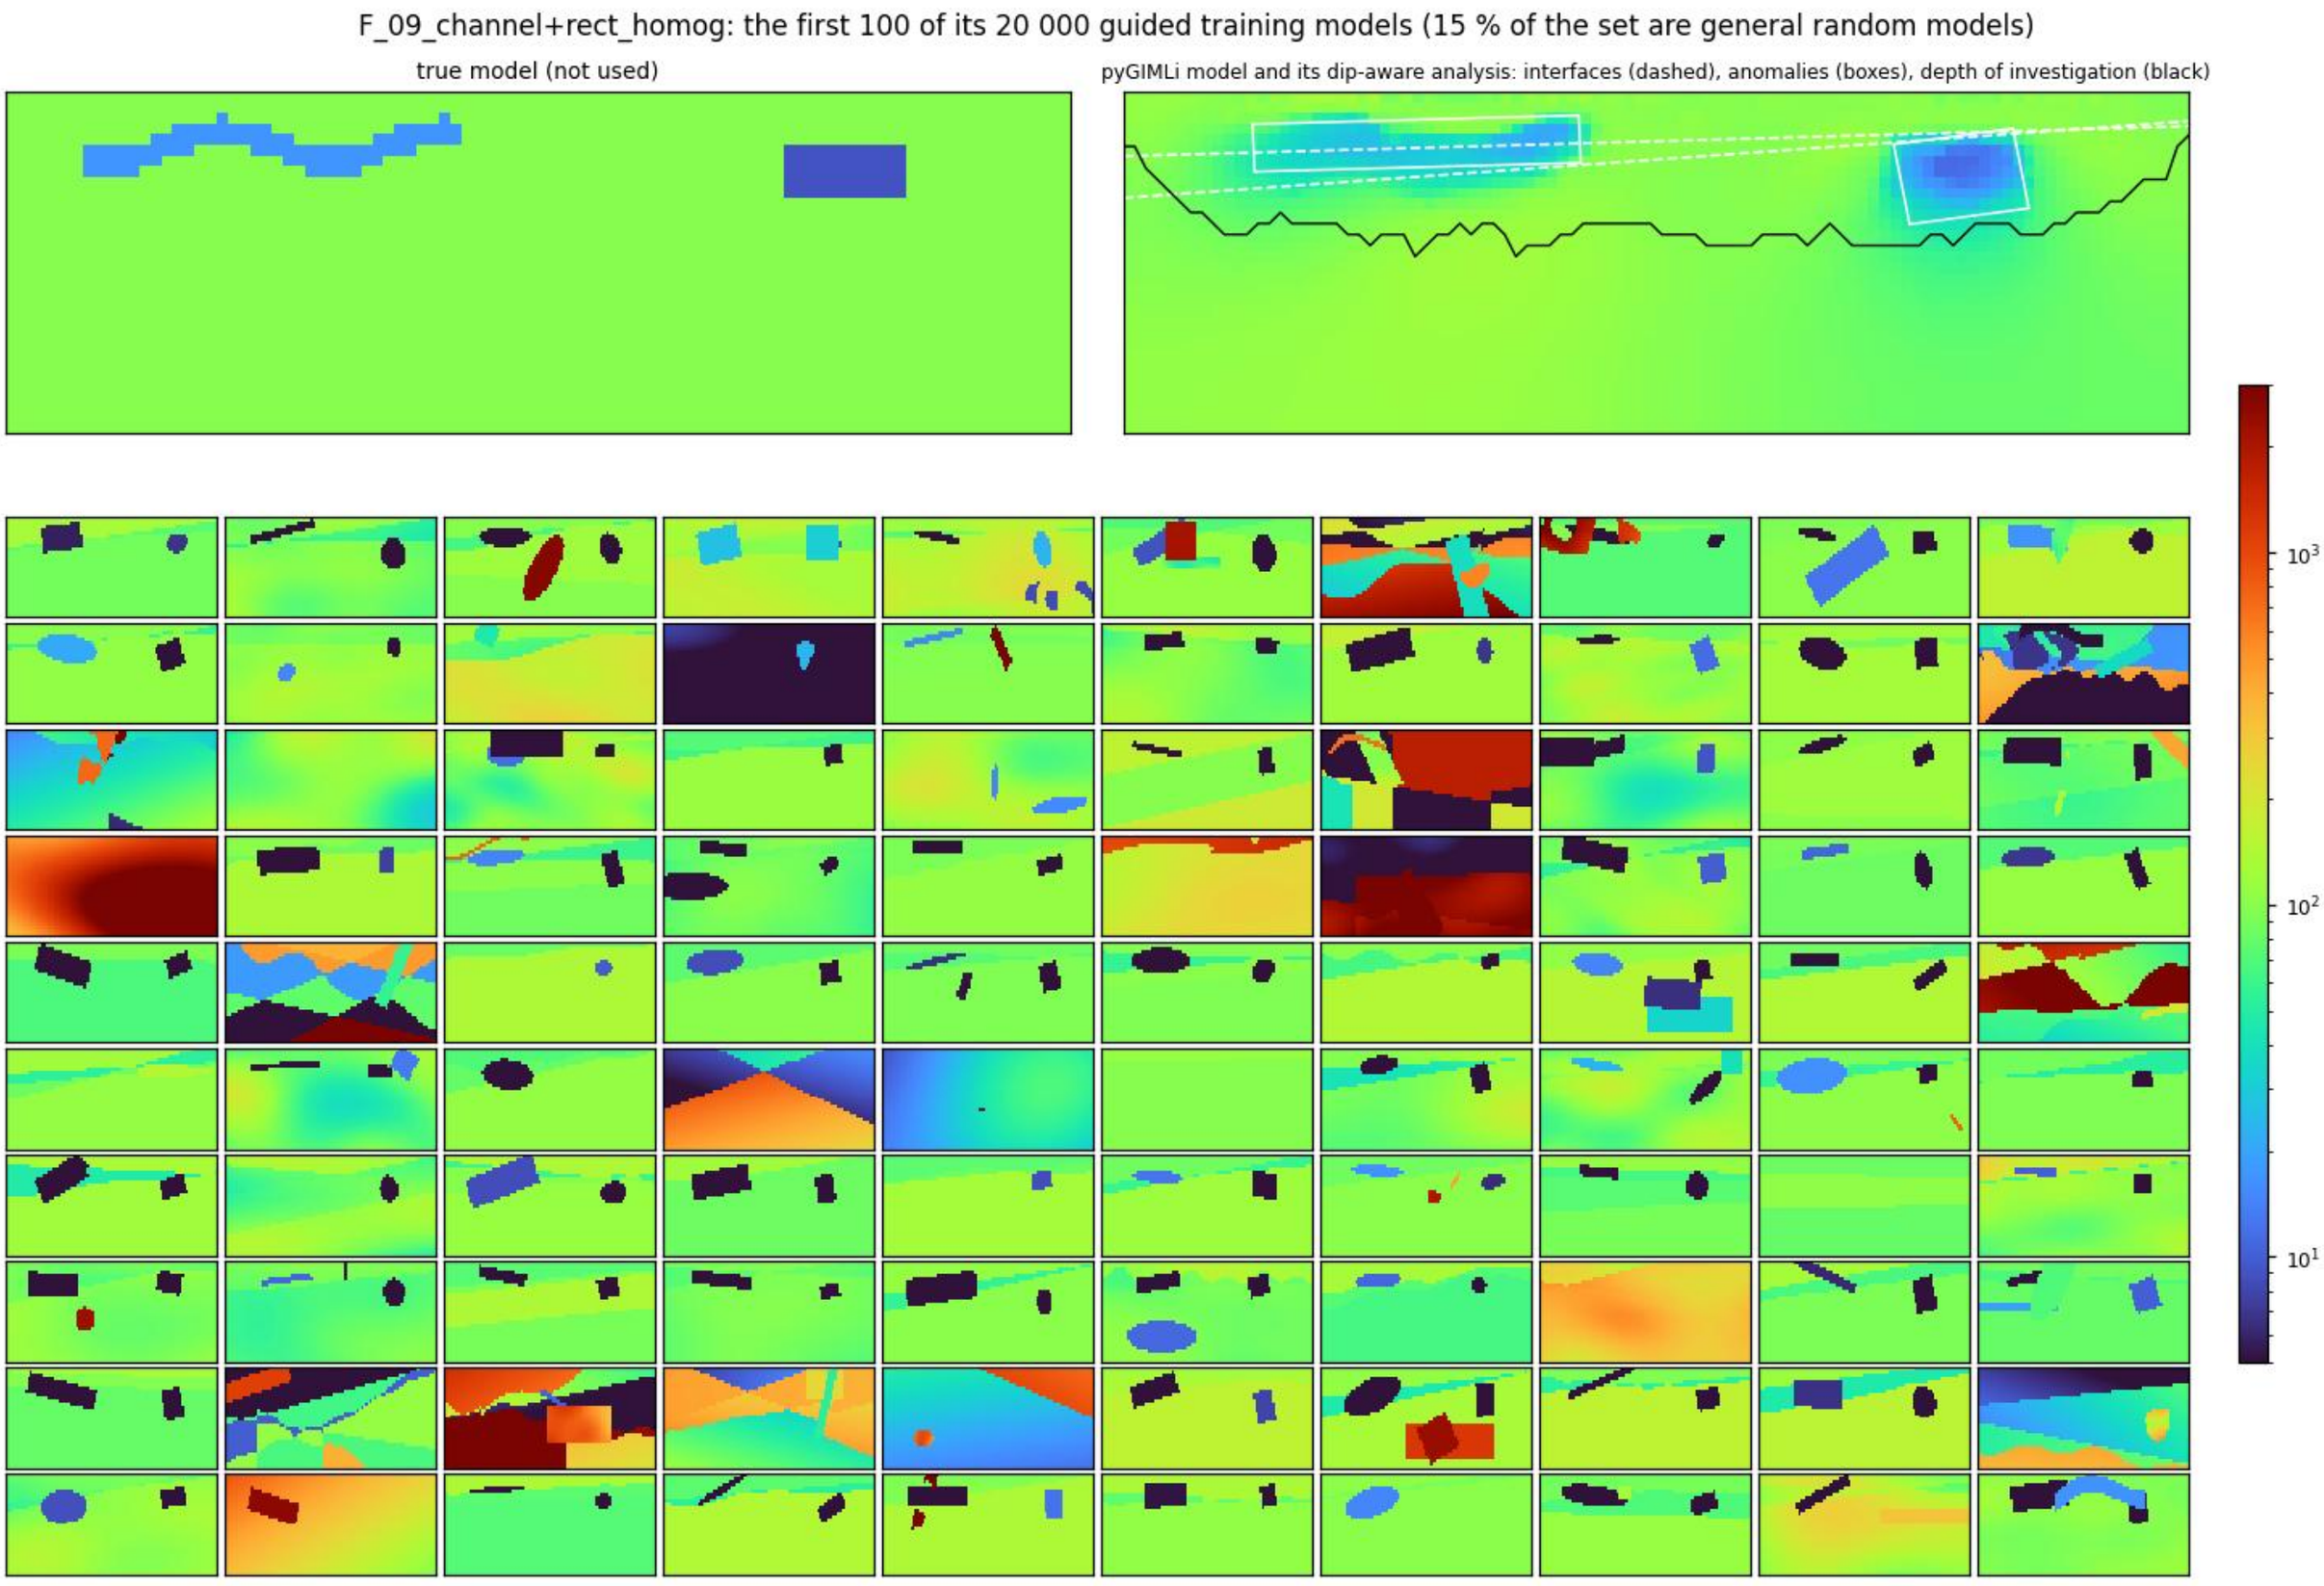
F_09_channel+rect_homog: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S86

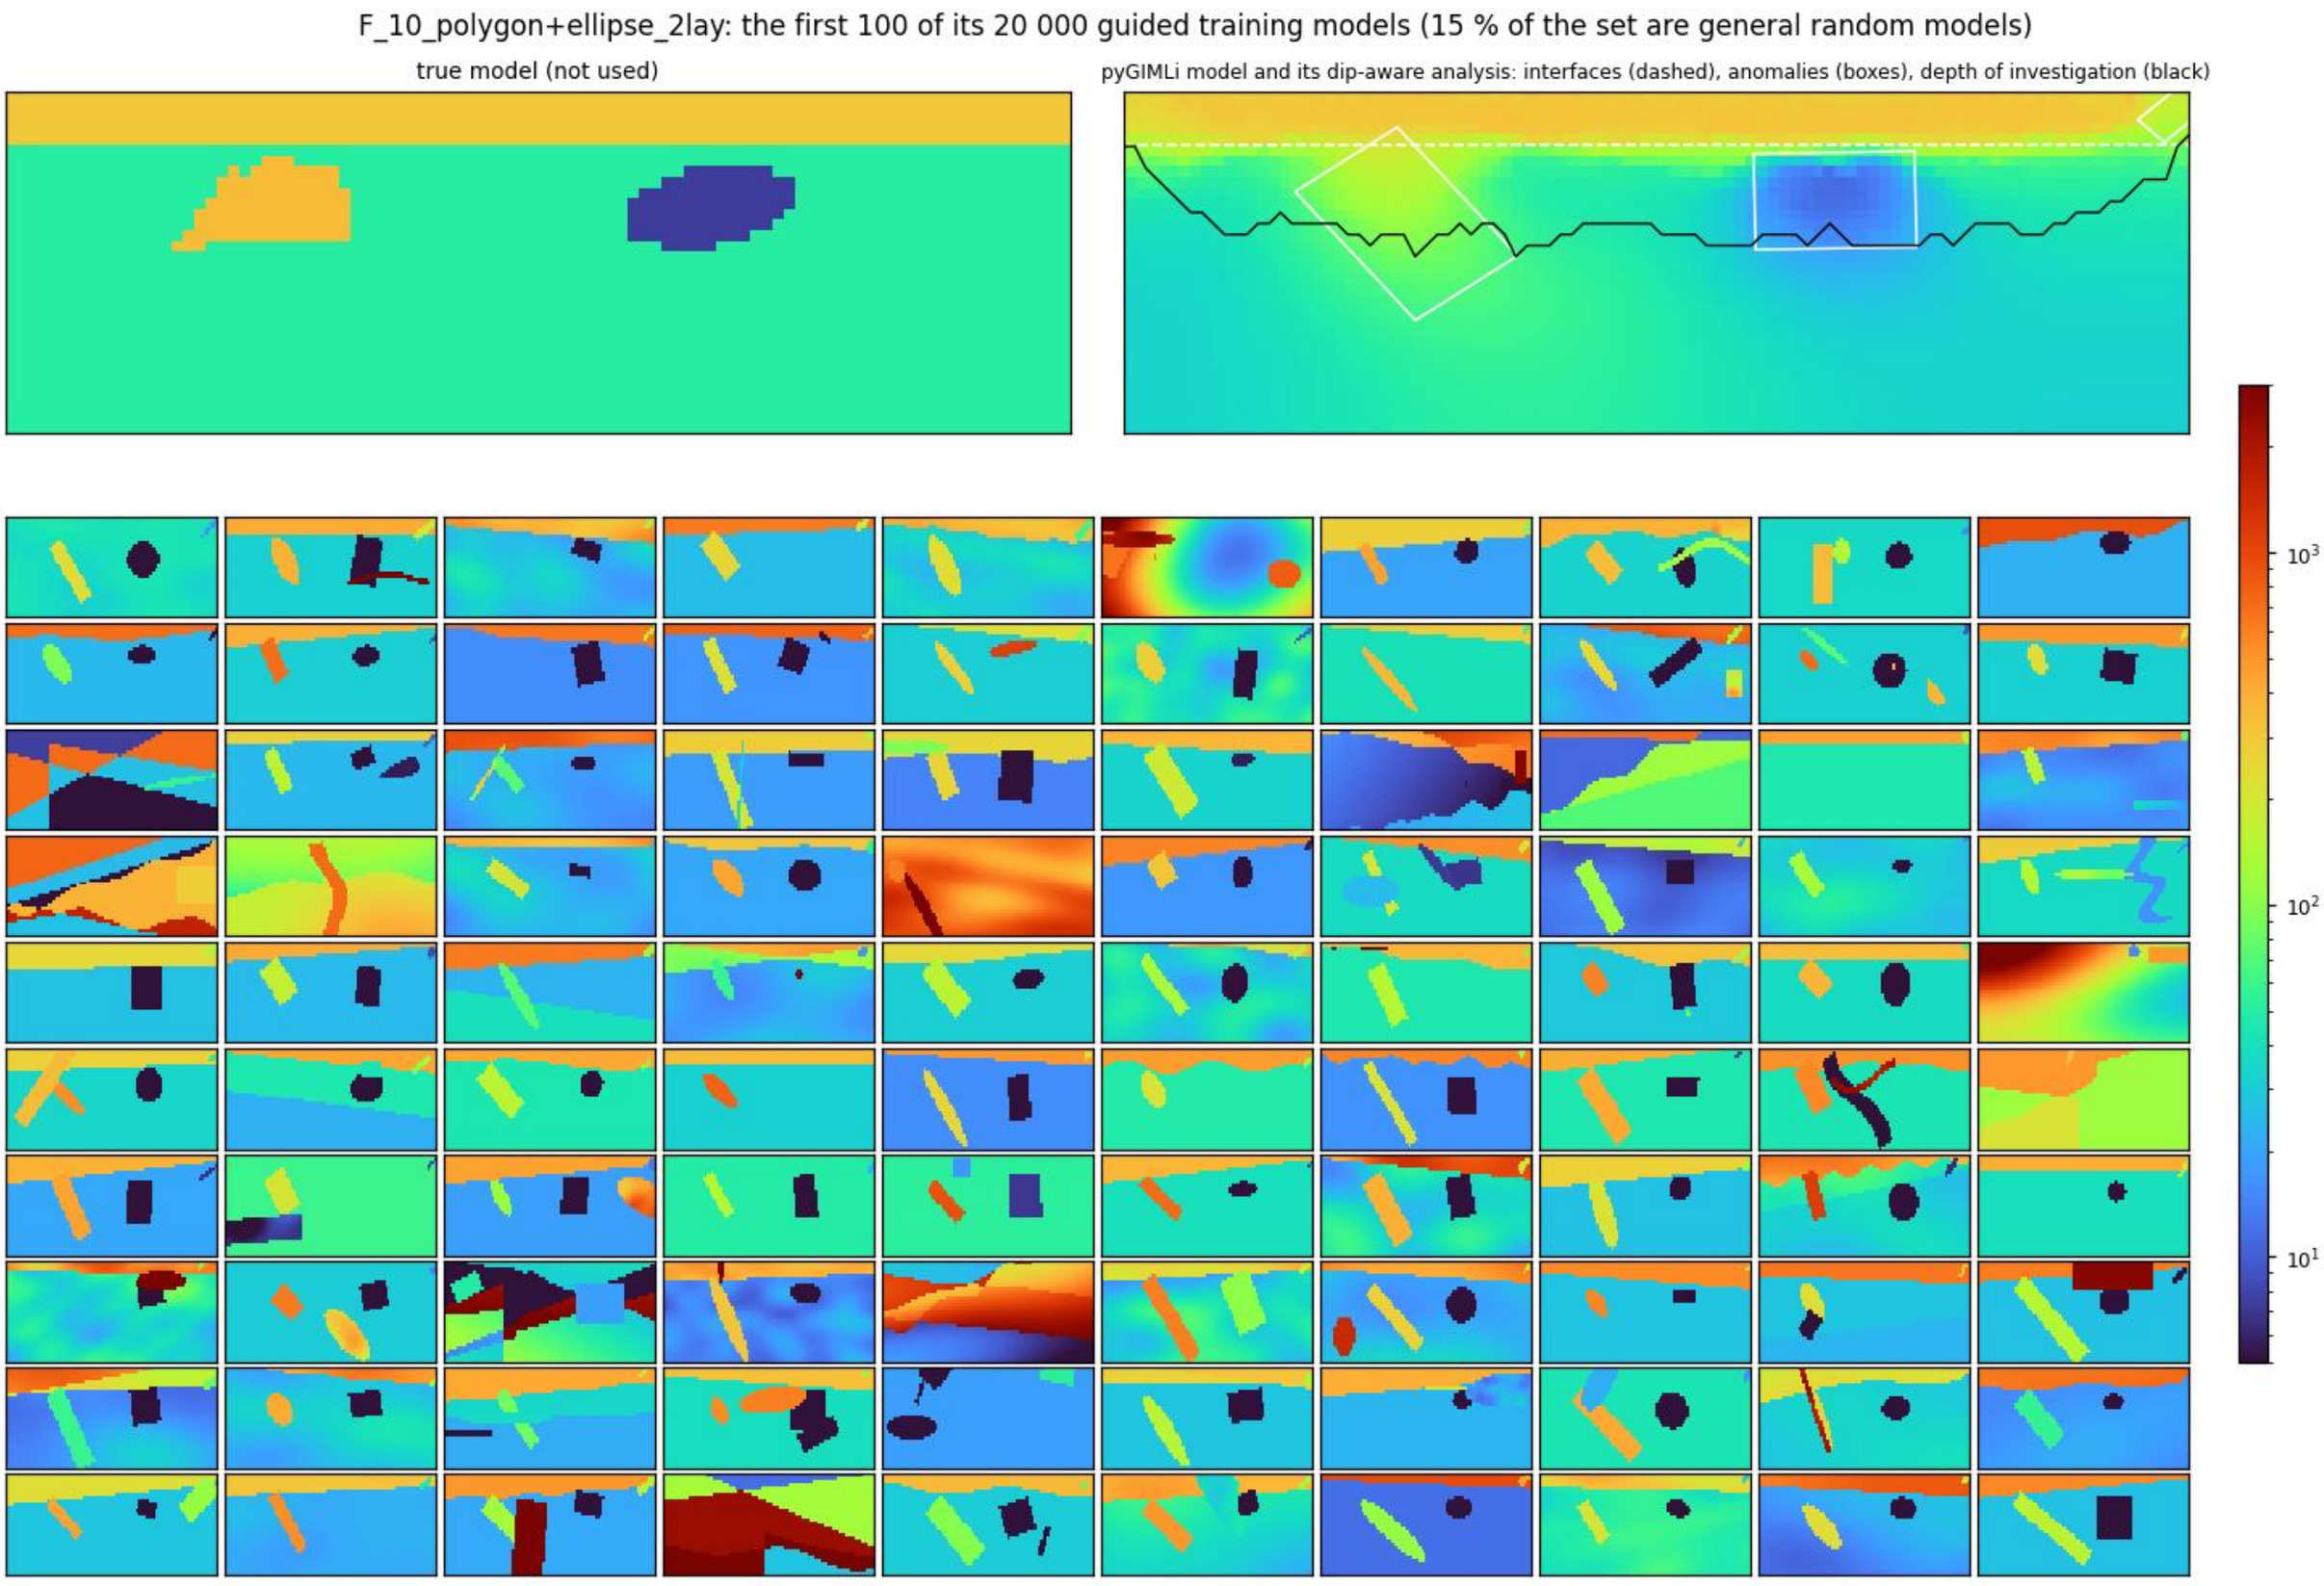
F_10_polygon+ellipse_2lay: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S87

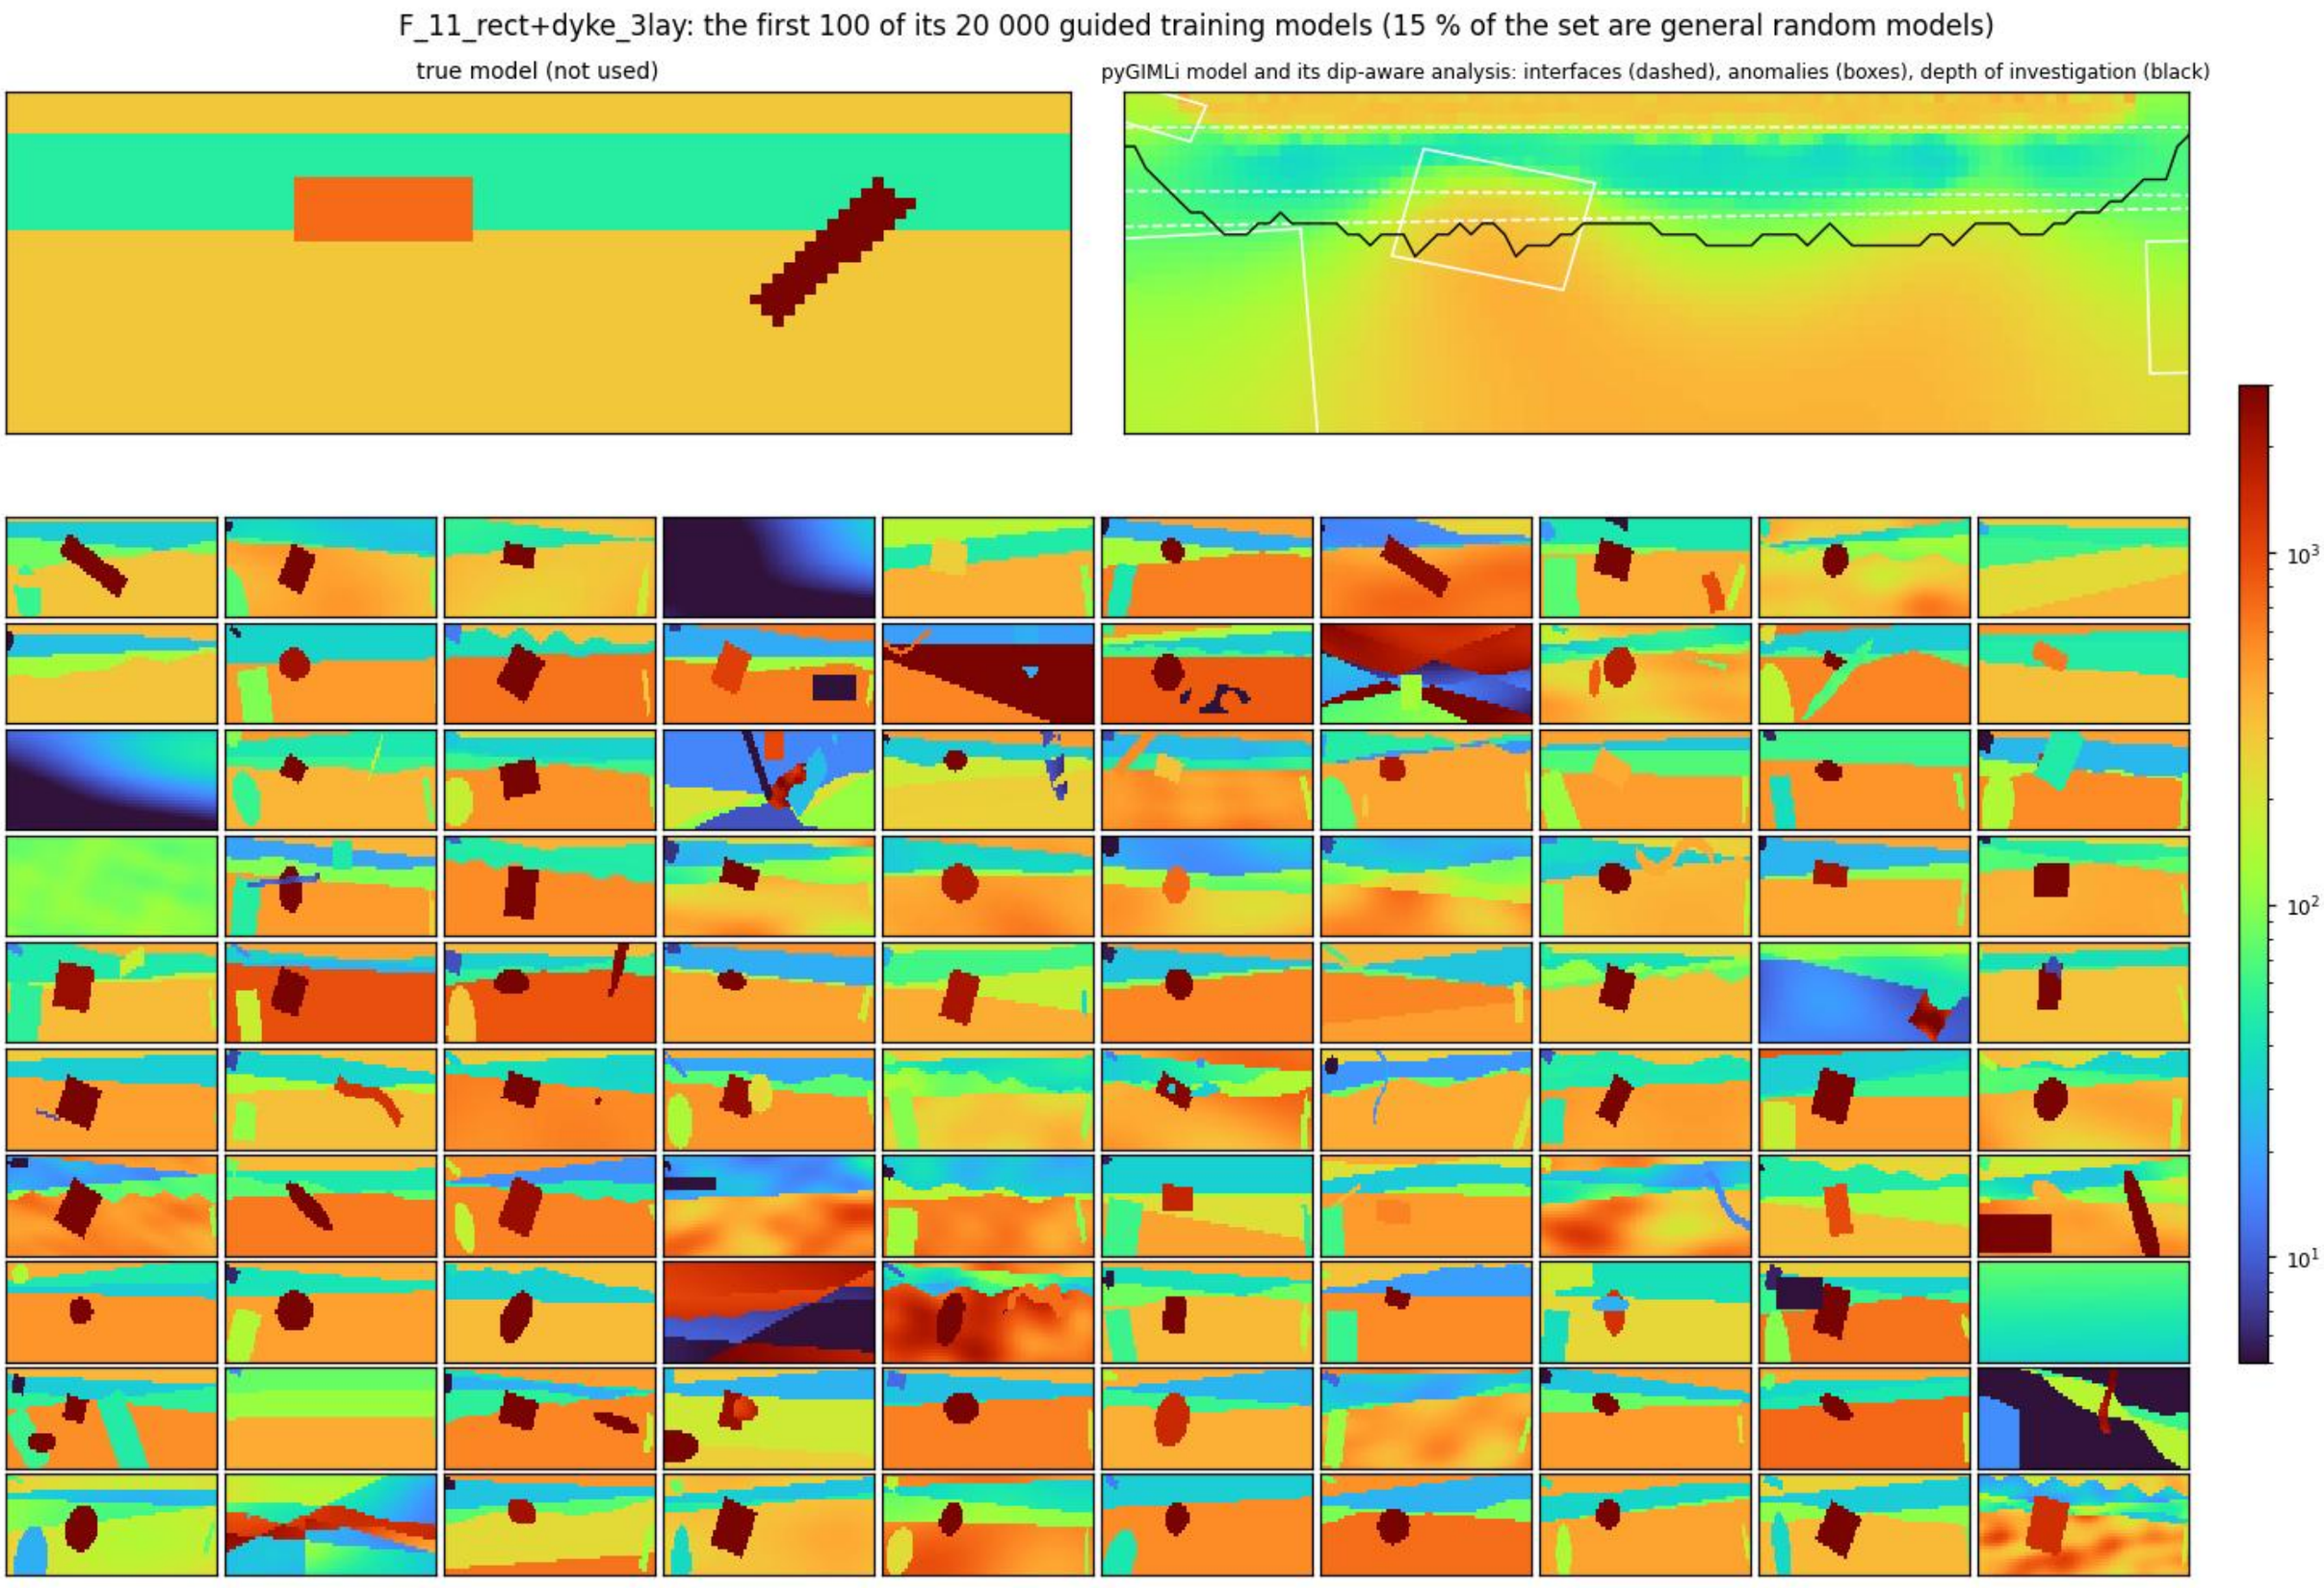
F_11_rect+dyke_3lay: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S88

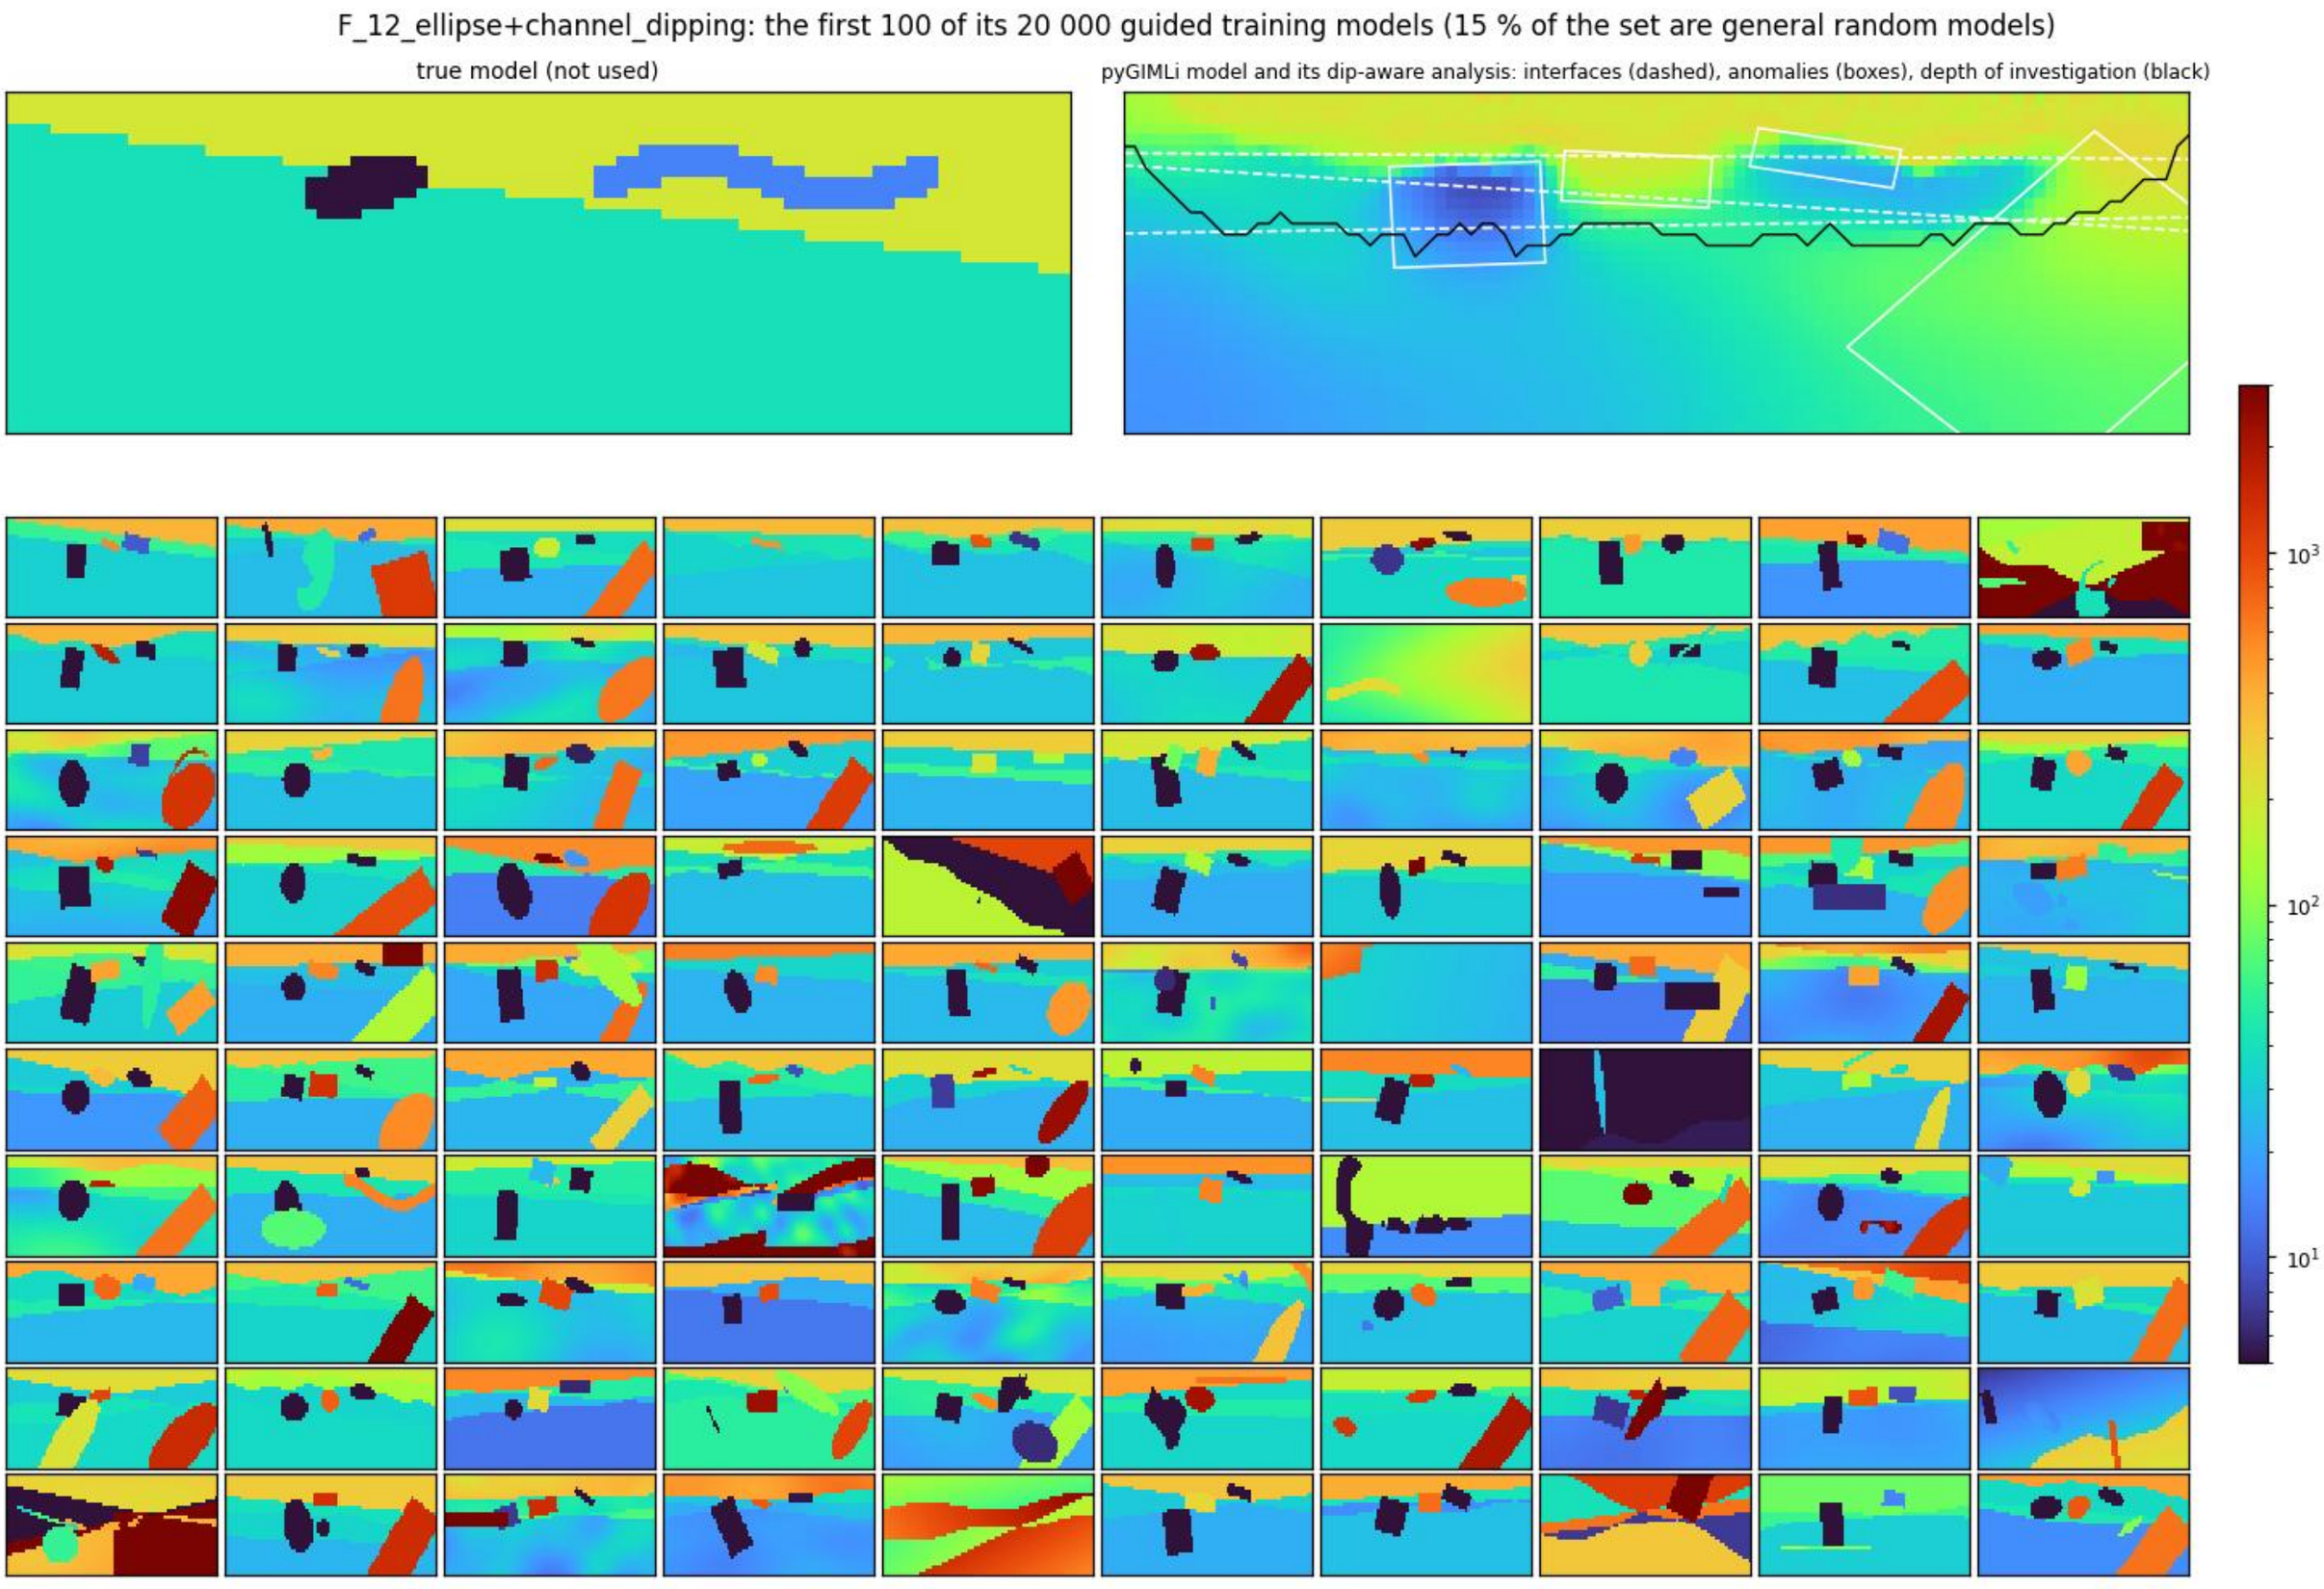
F_12_ellipse+channel_dipping: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S89

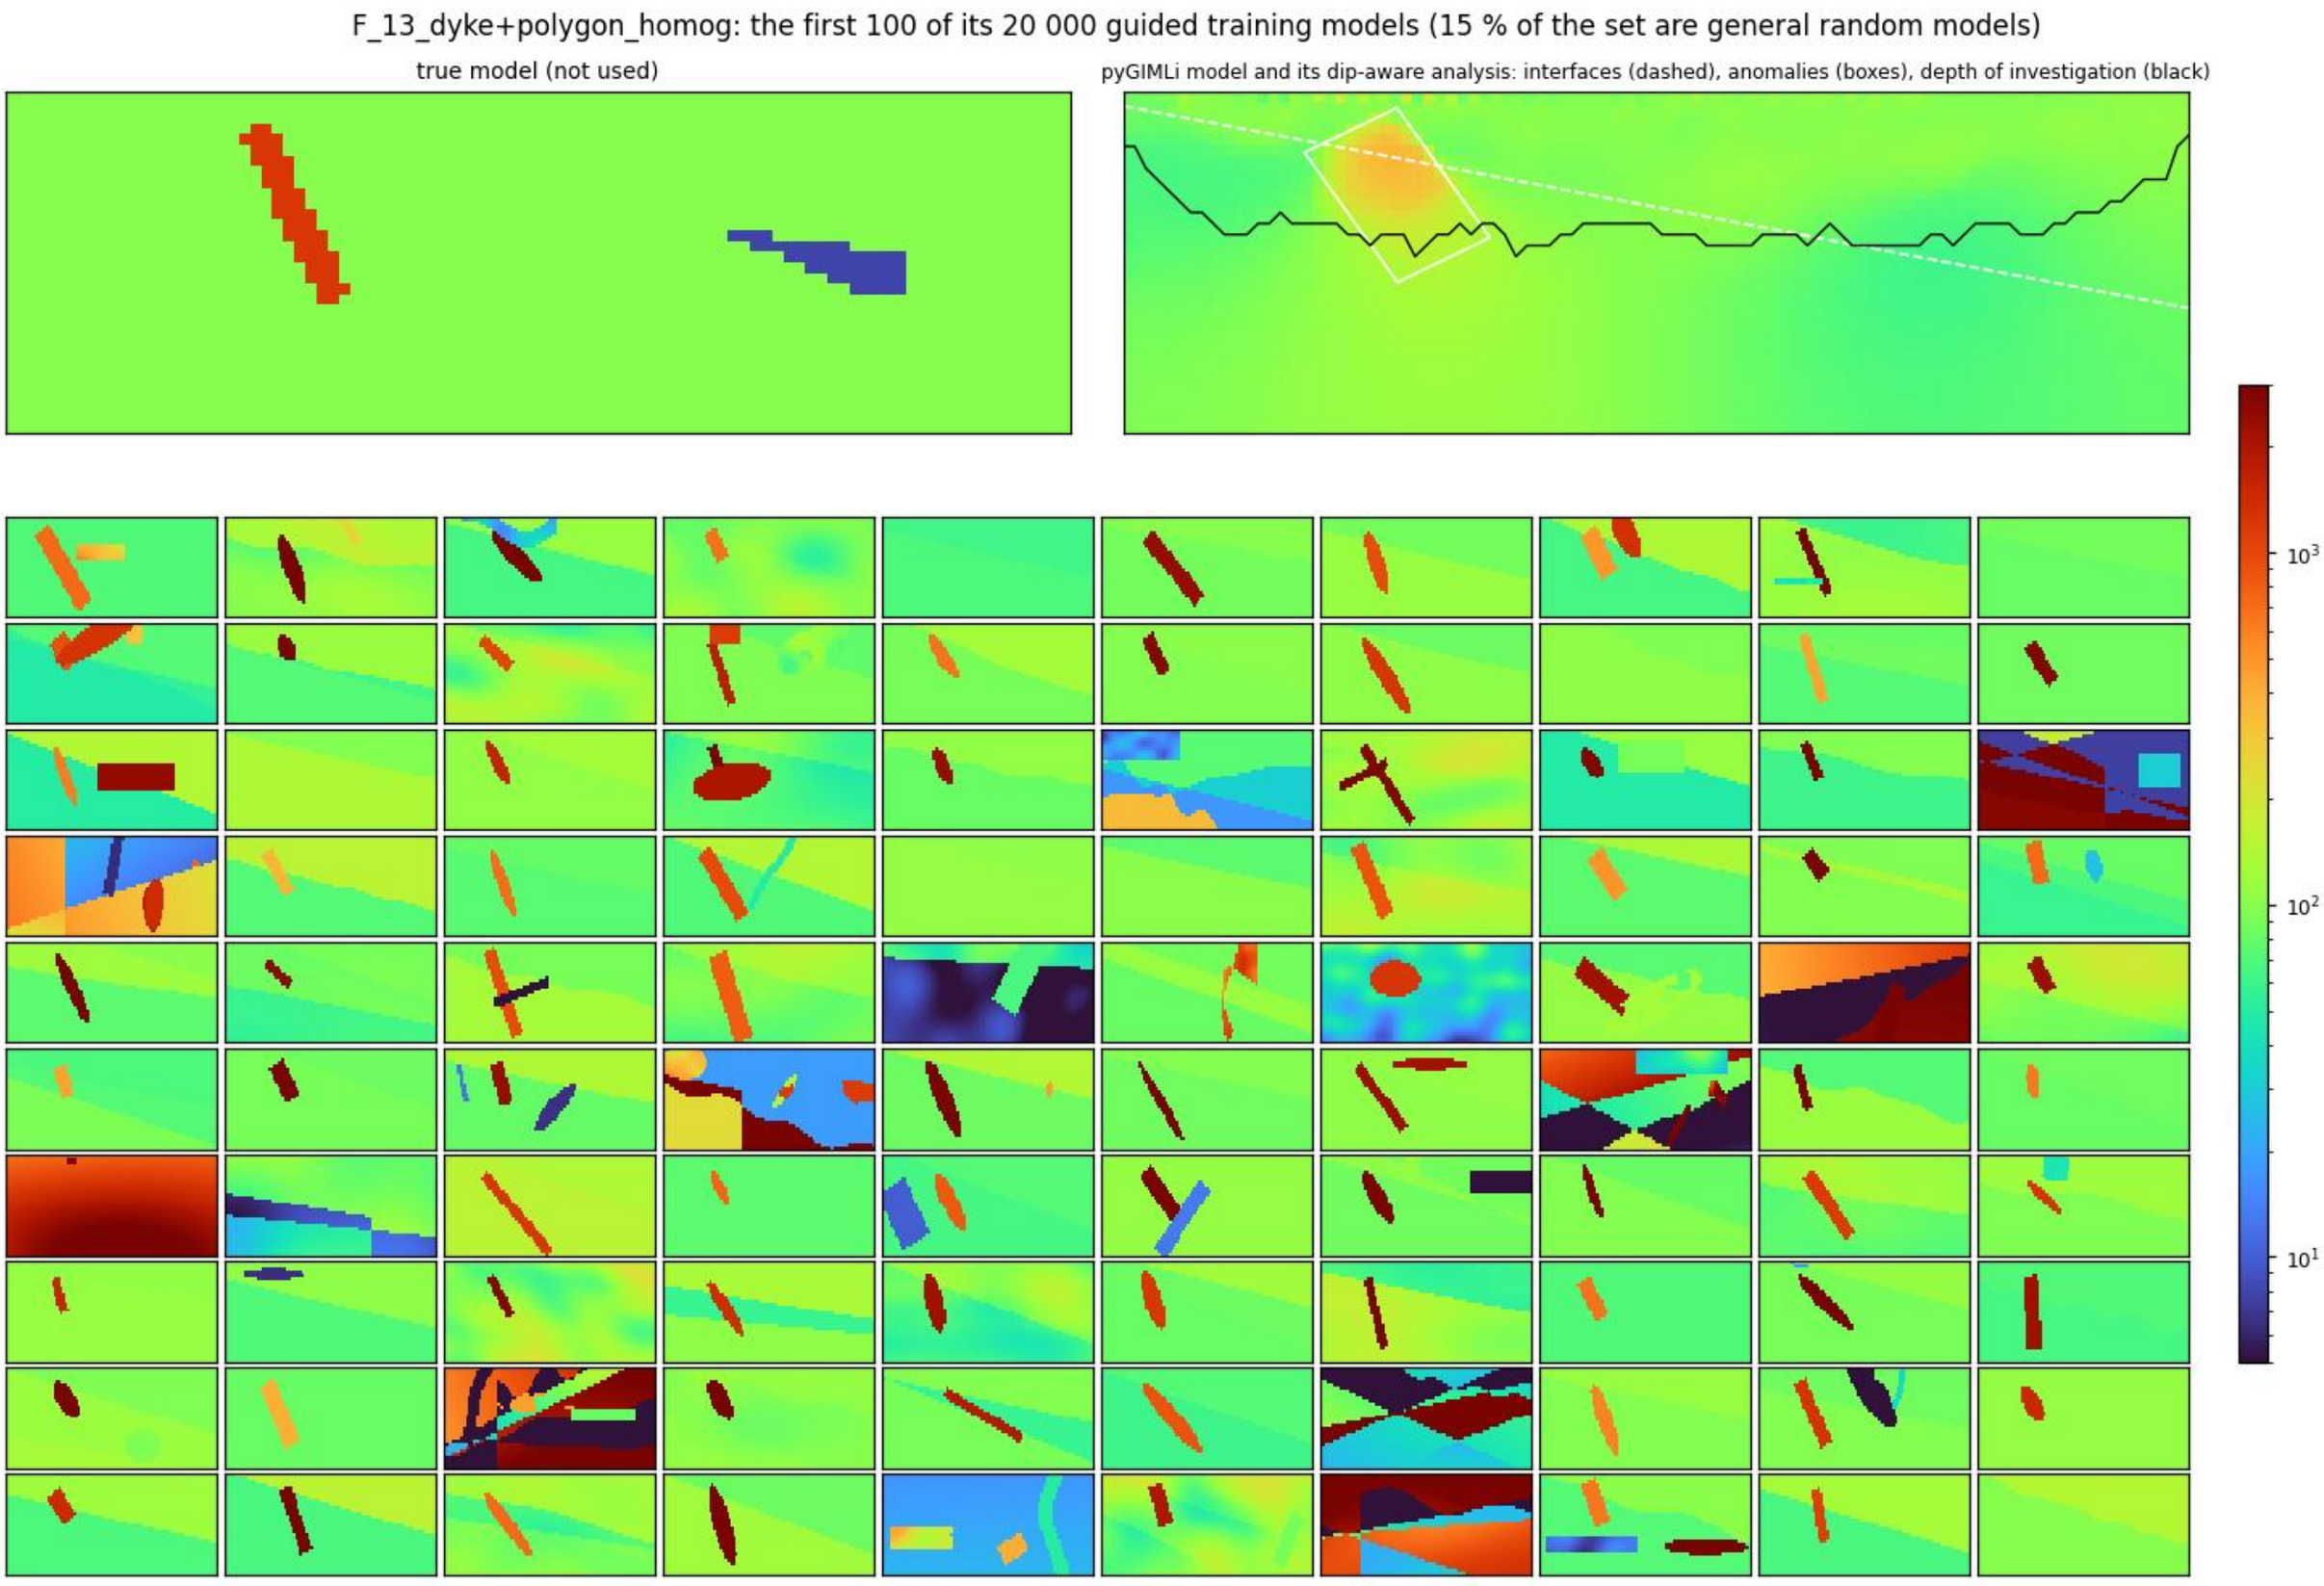
F_13_dyke+polygon_homog: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S90

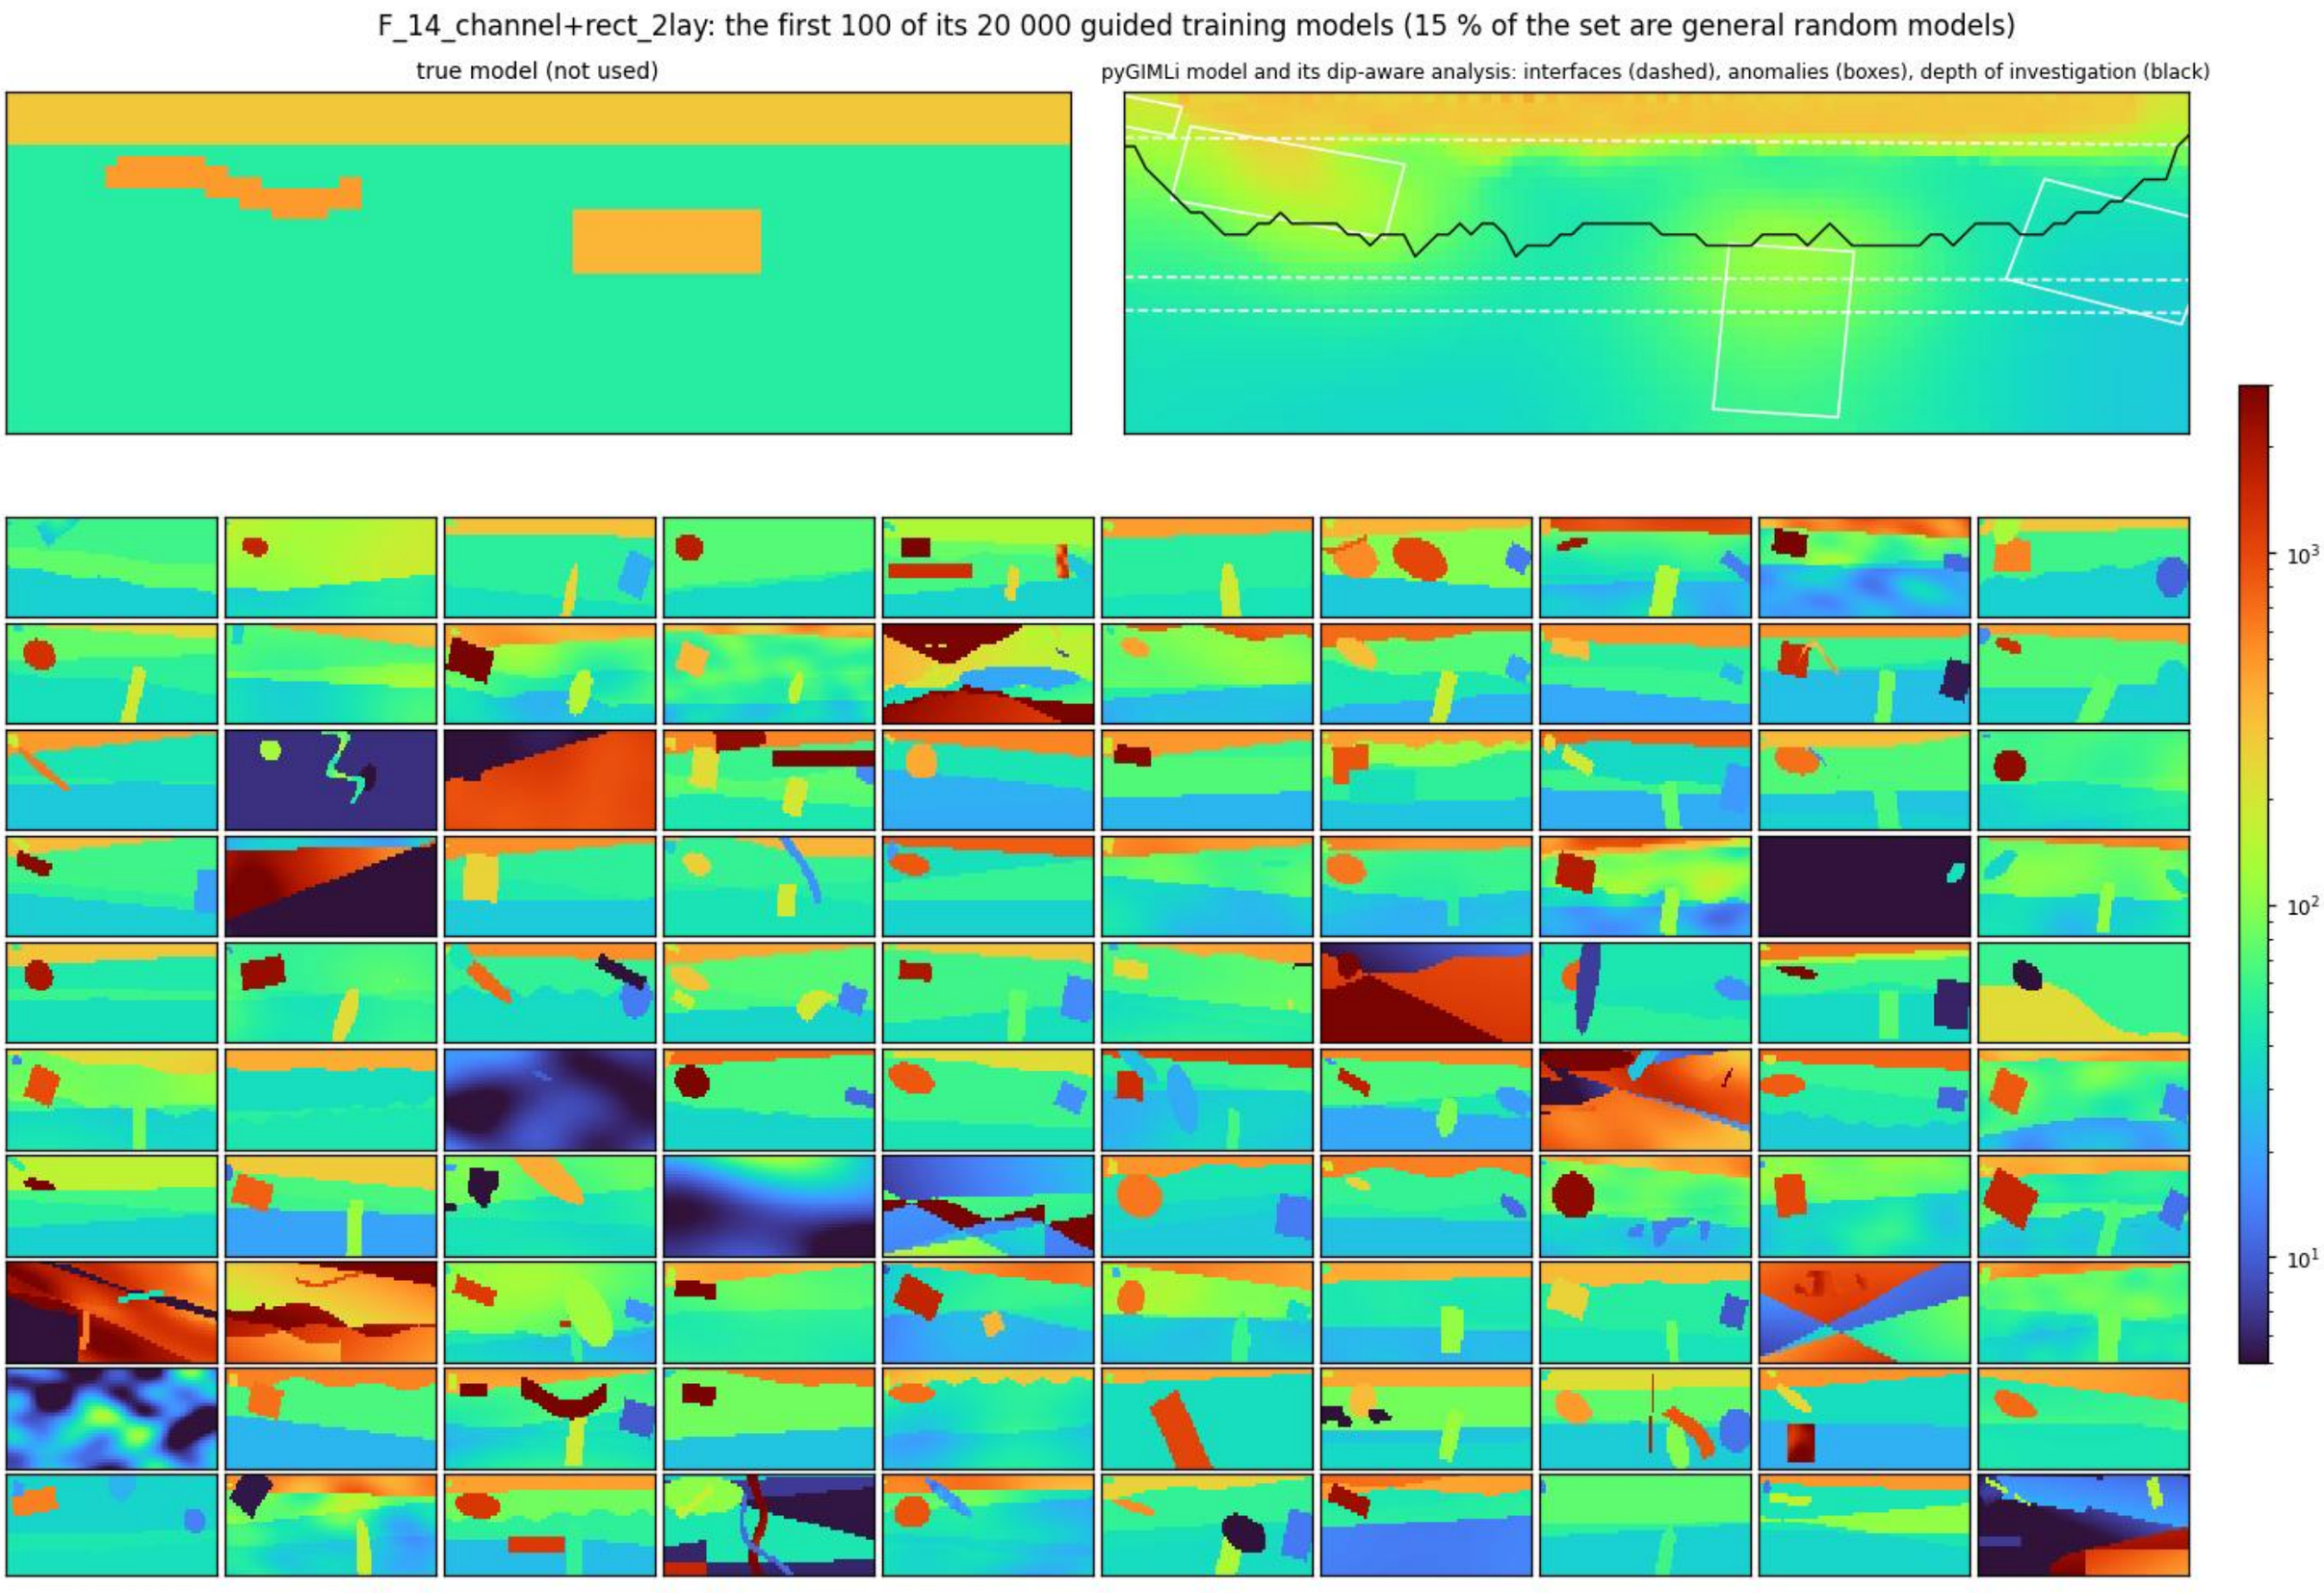
F_14_channel+rect_2lay: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S91

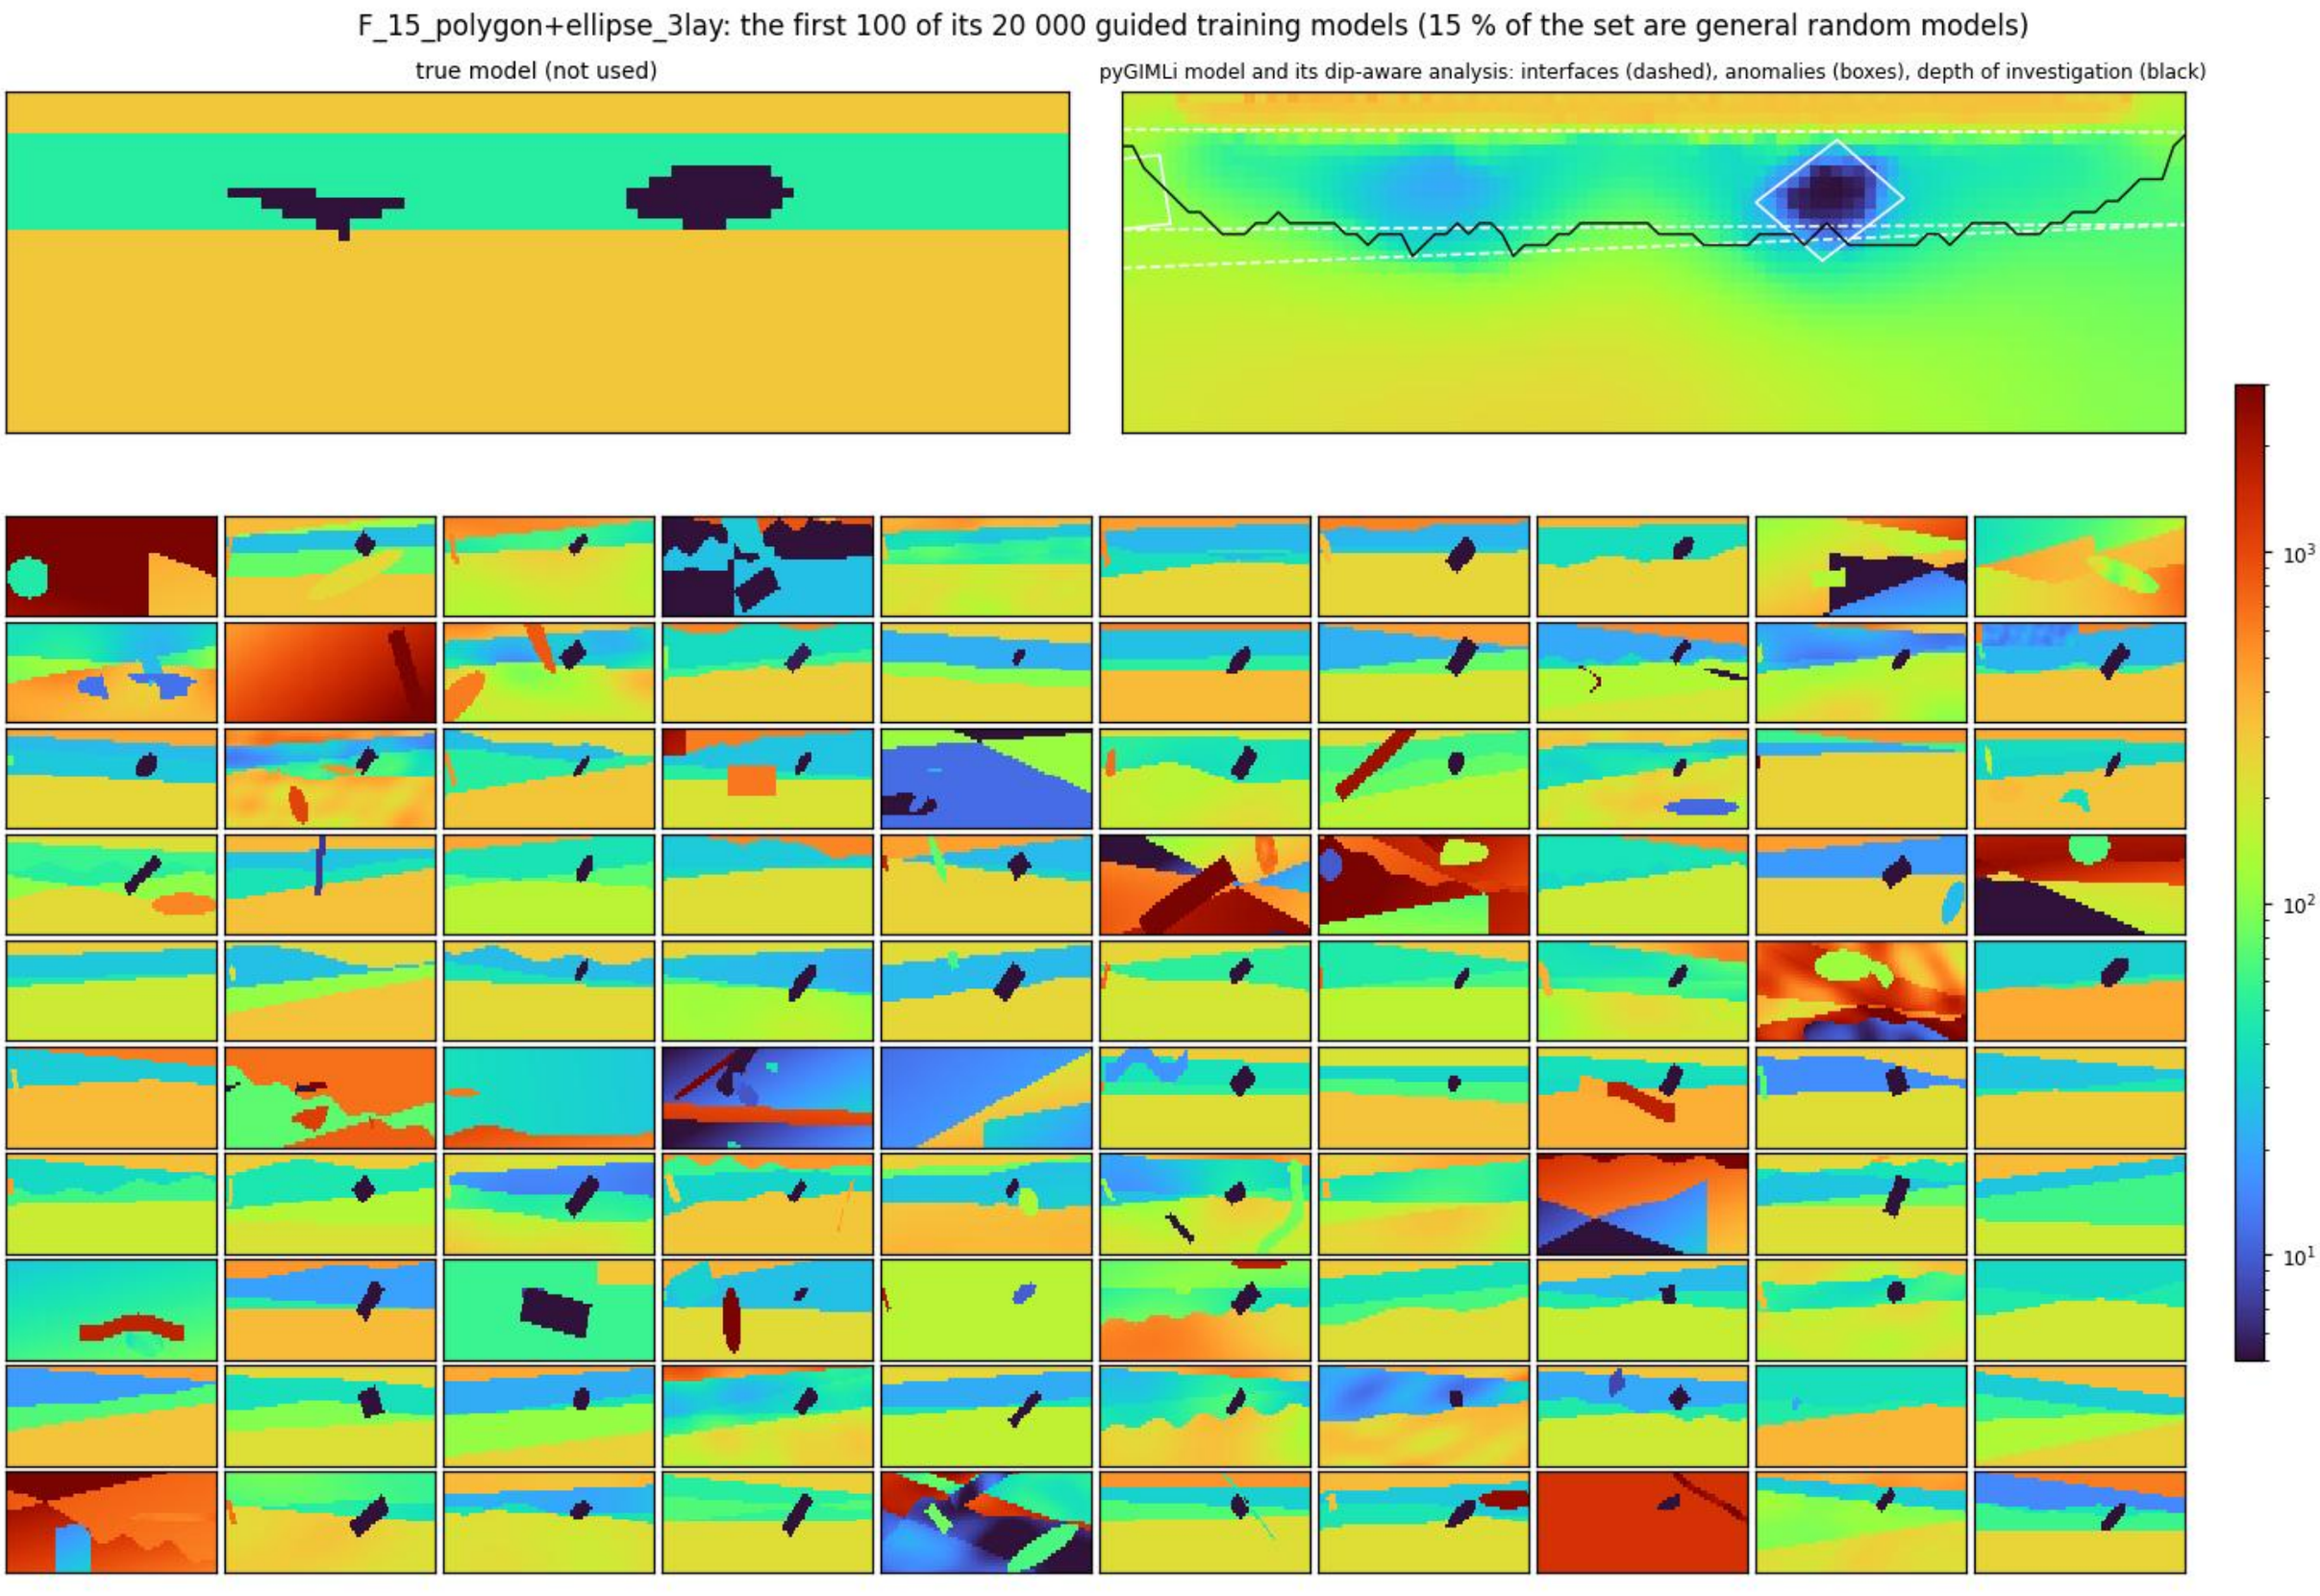
F_15_polygon+ellipse_3lay: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S92

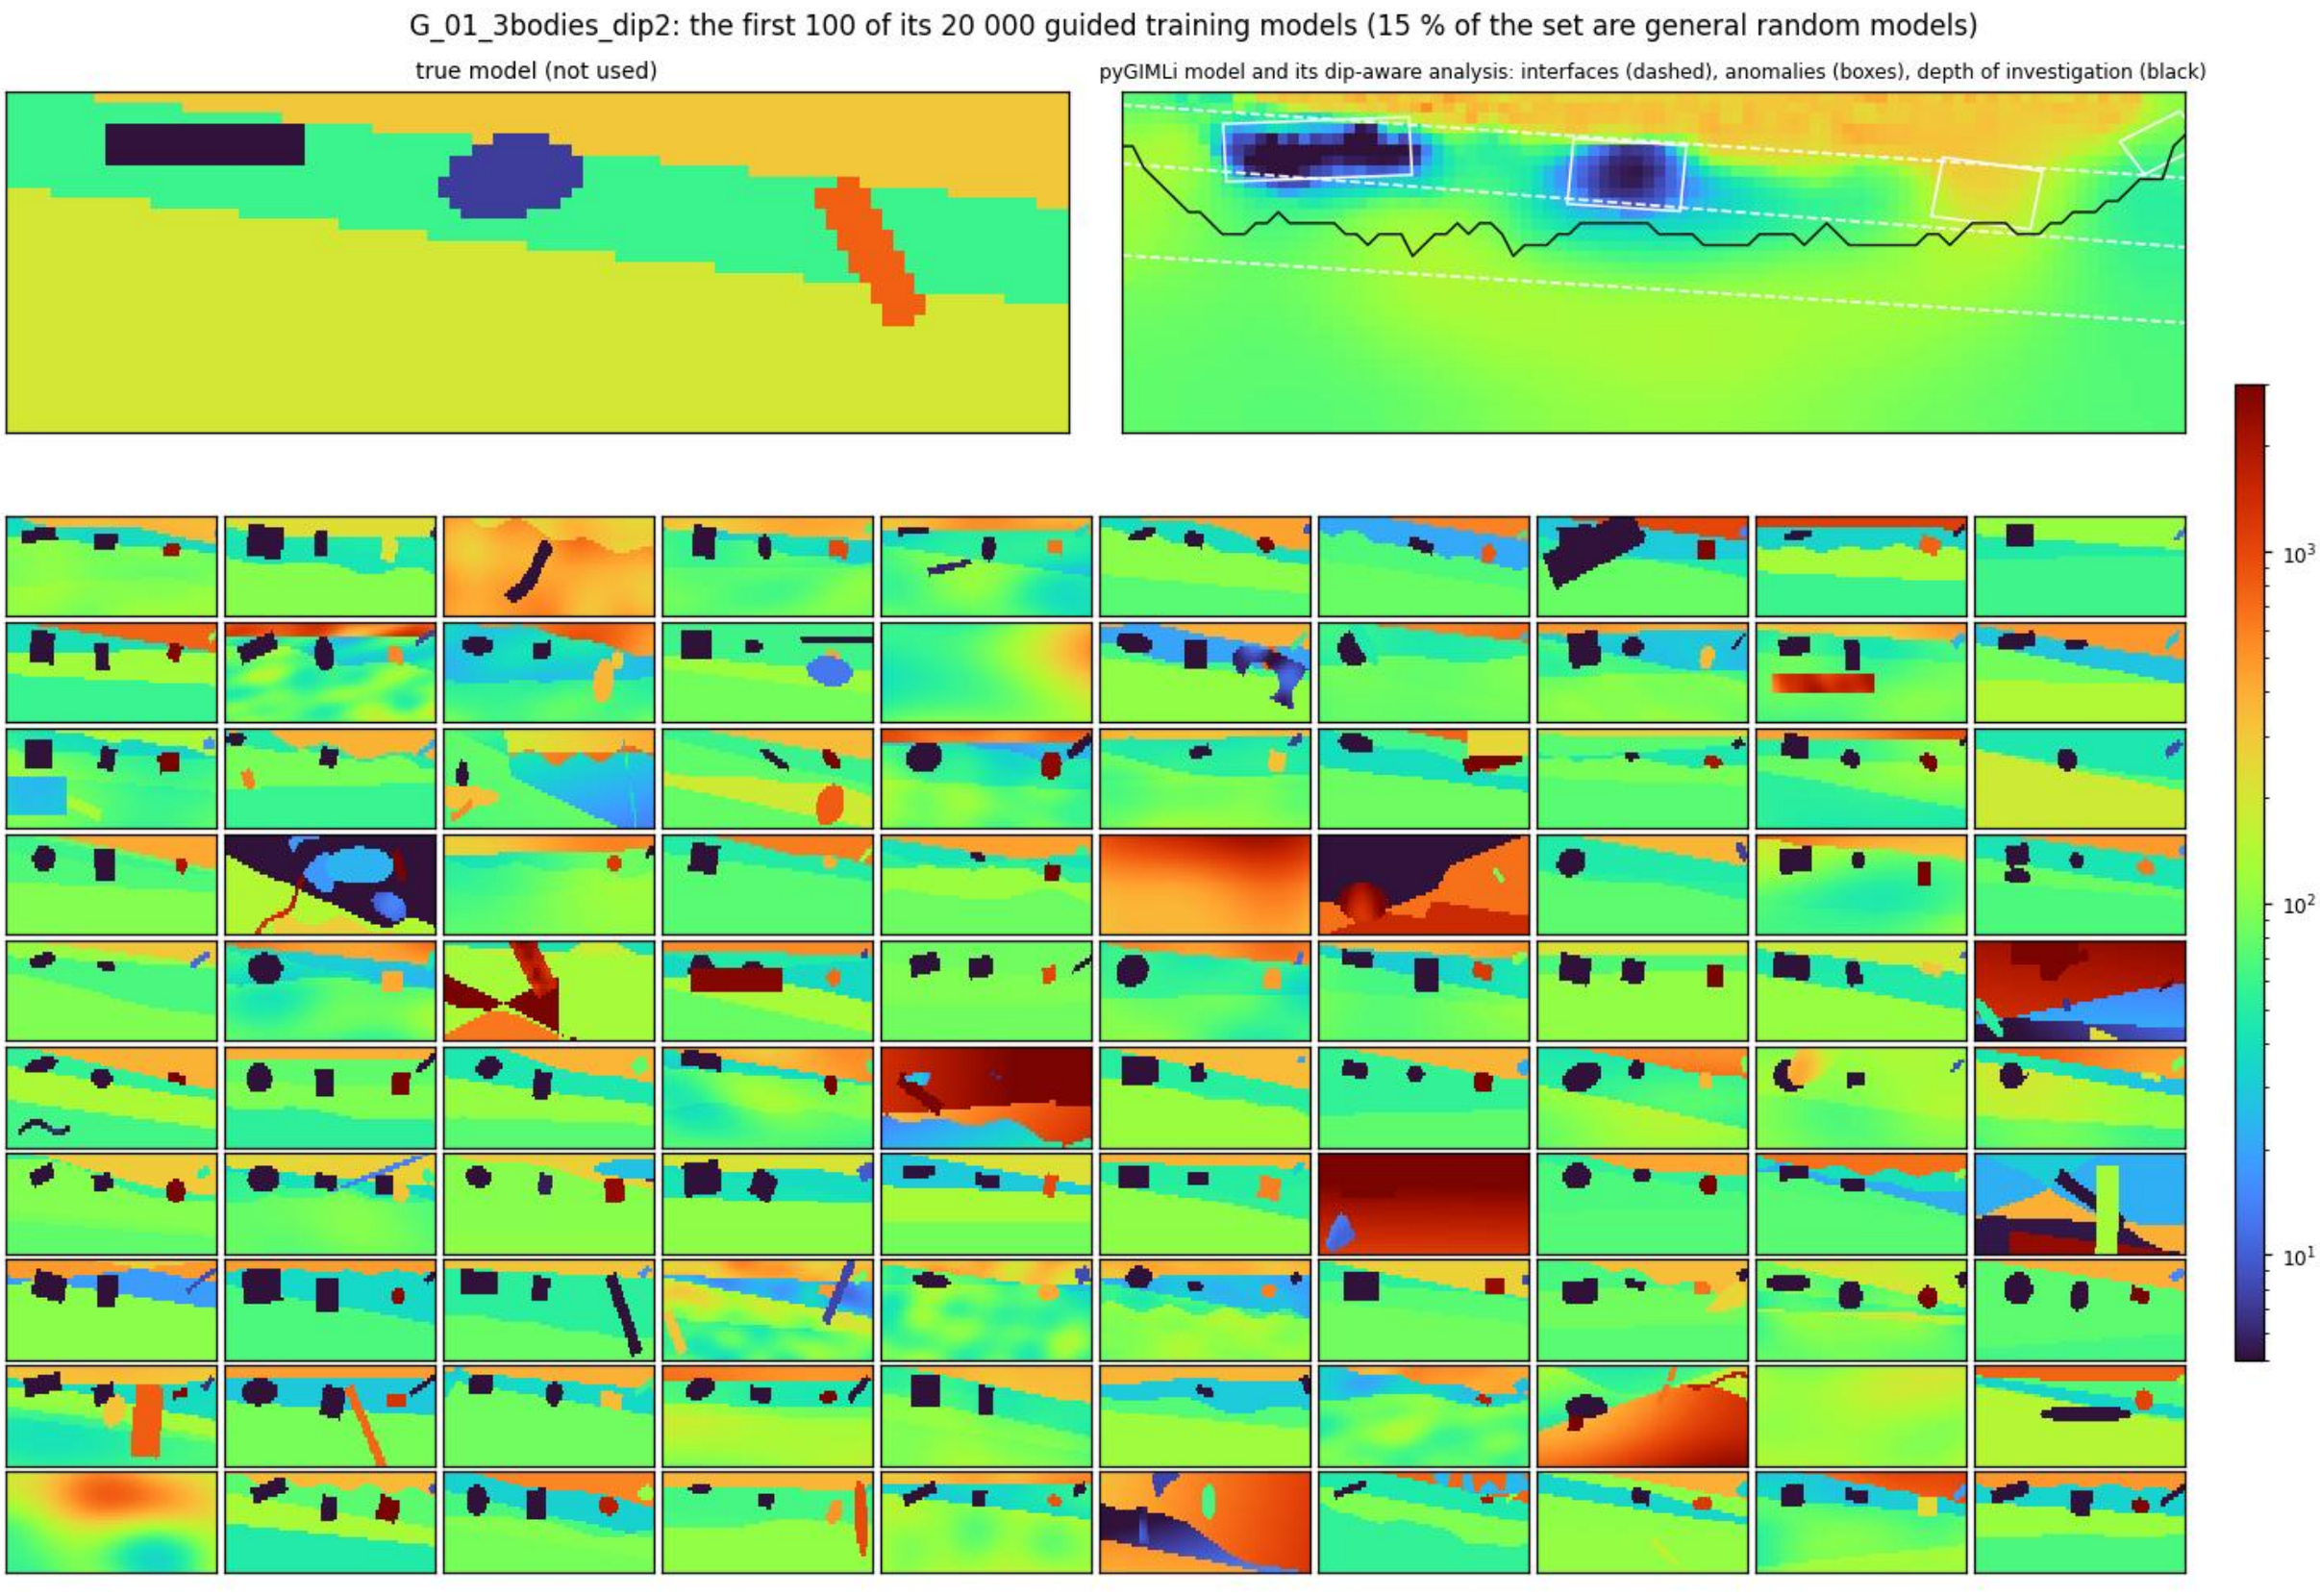
G_01_3bodies_dip2: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S93

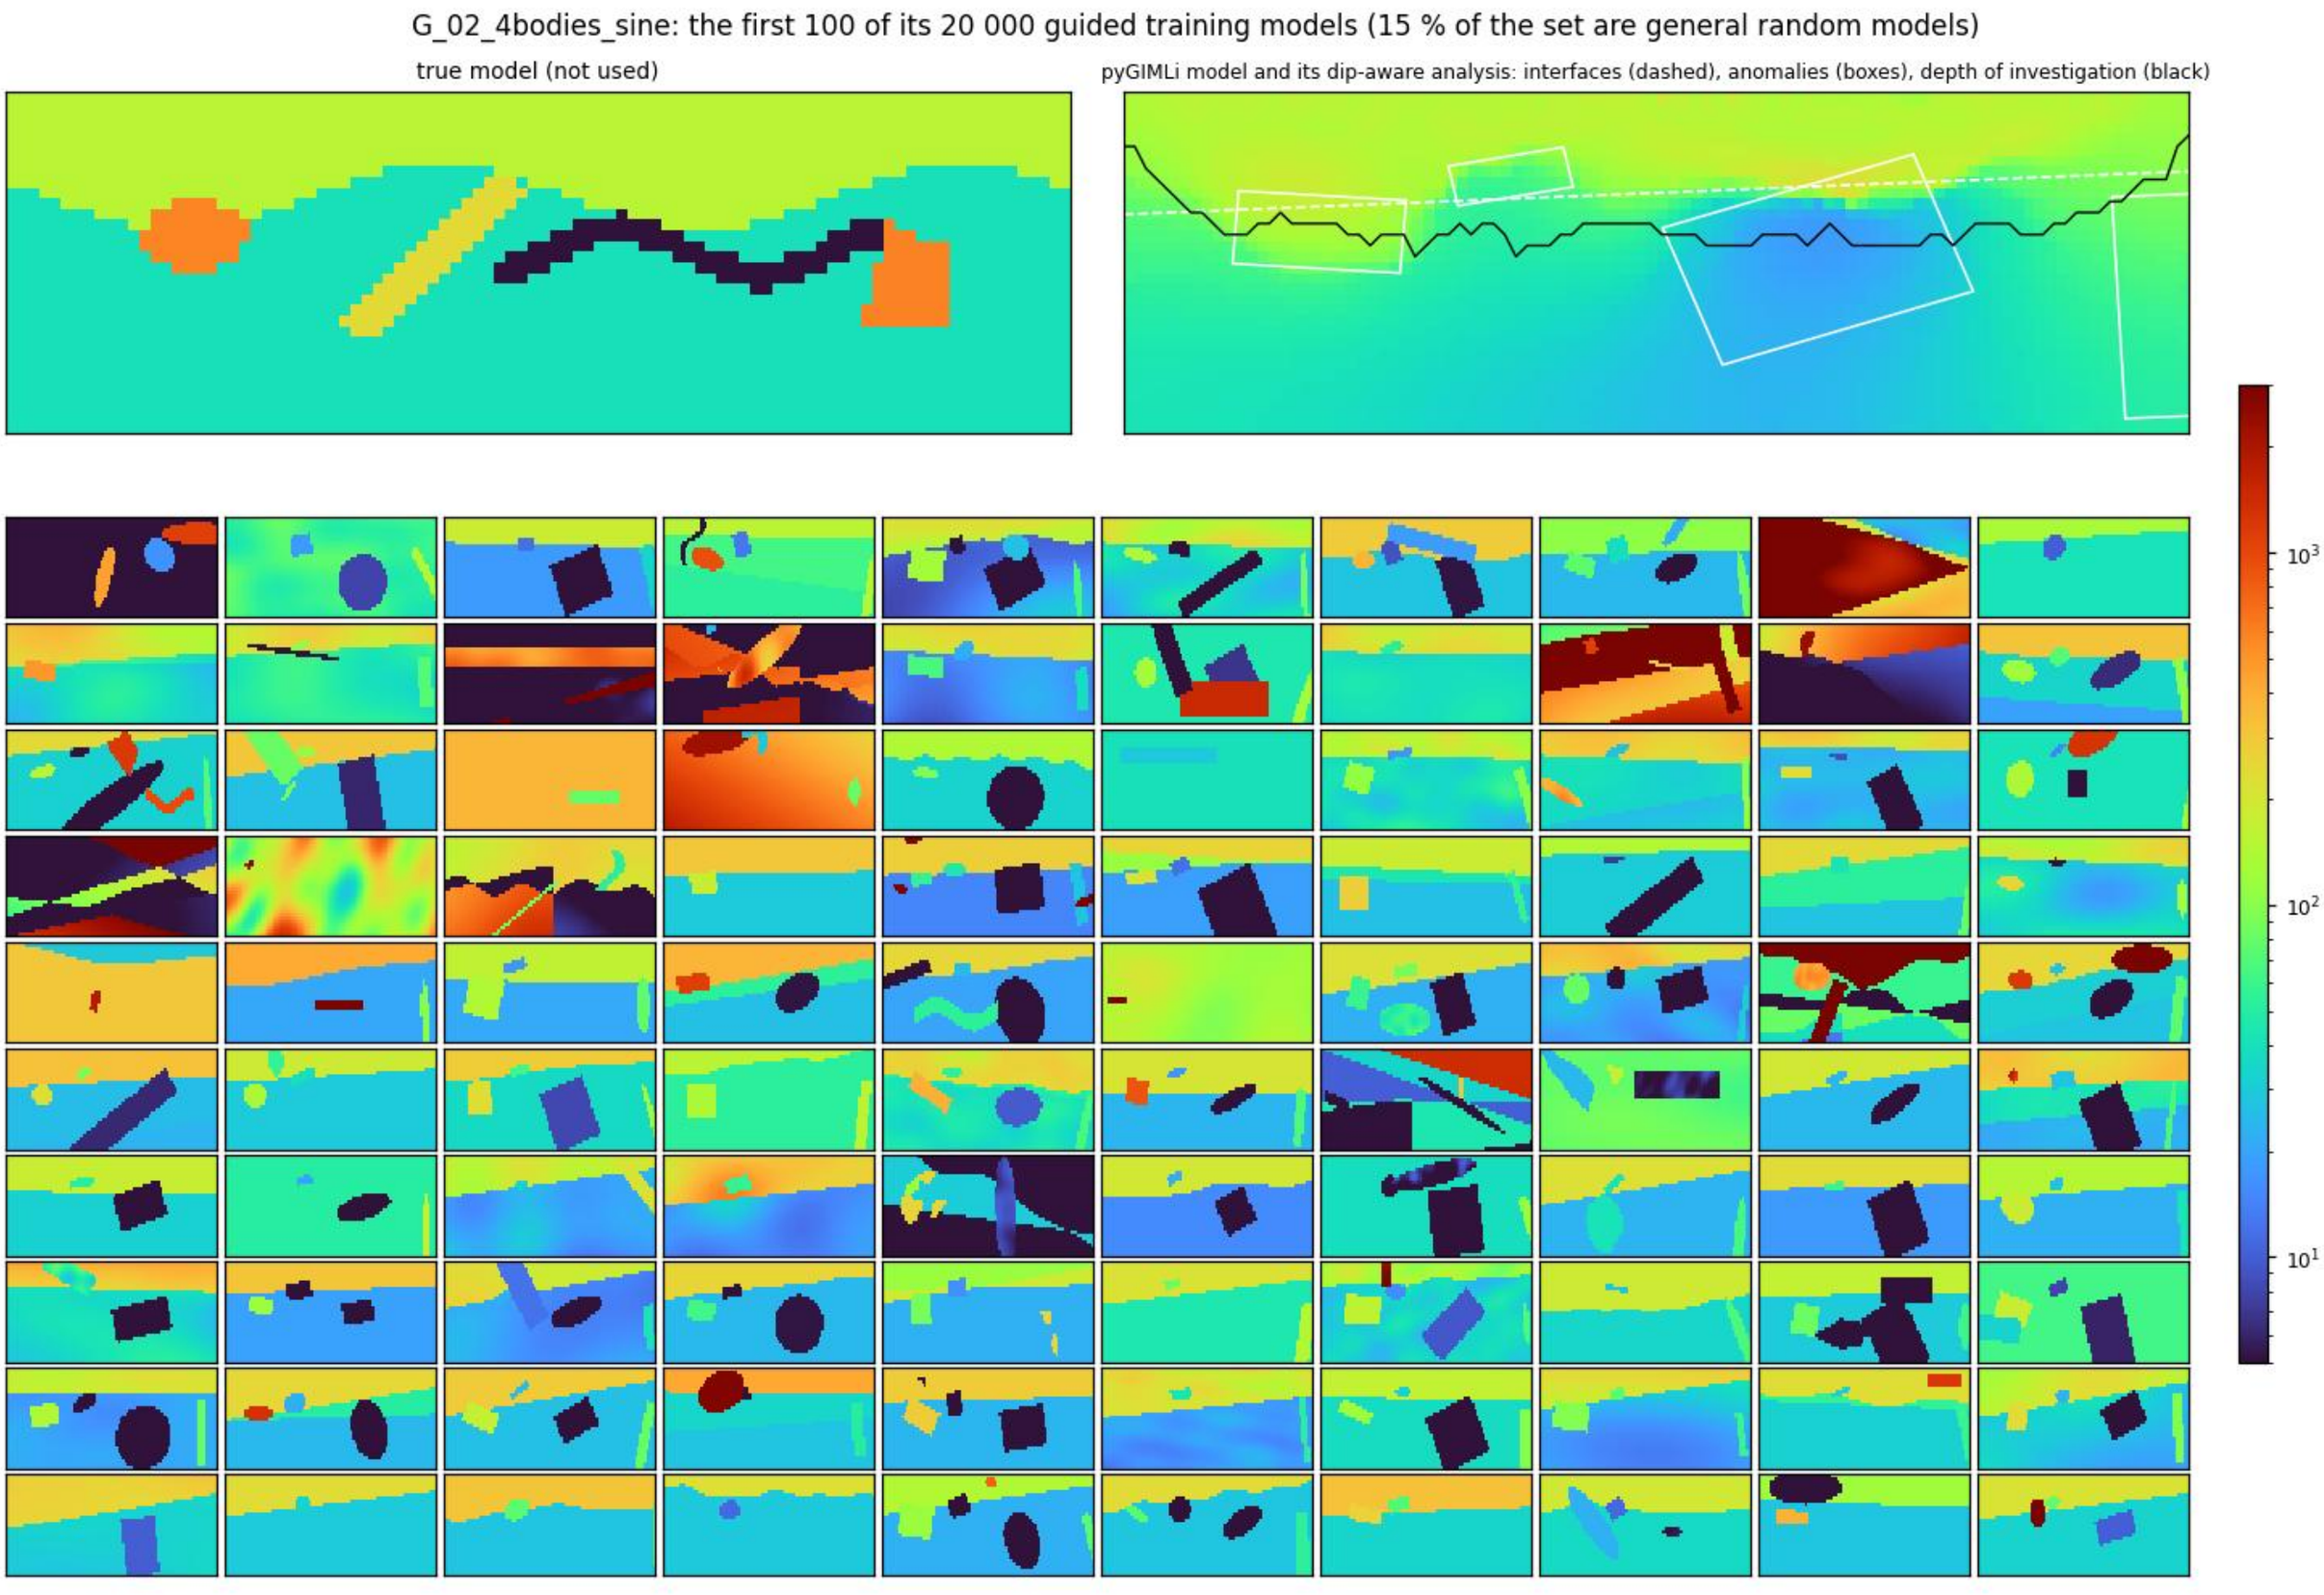
G_02_4bodies_sine: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S94

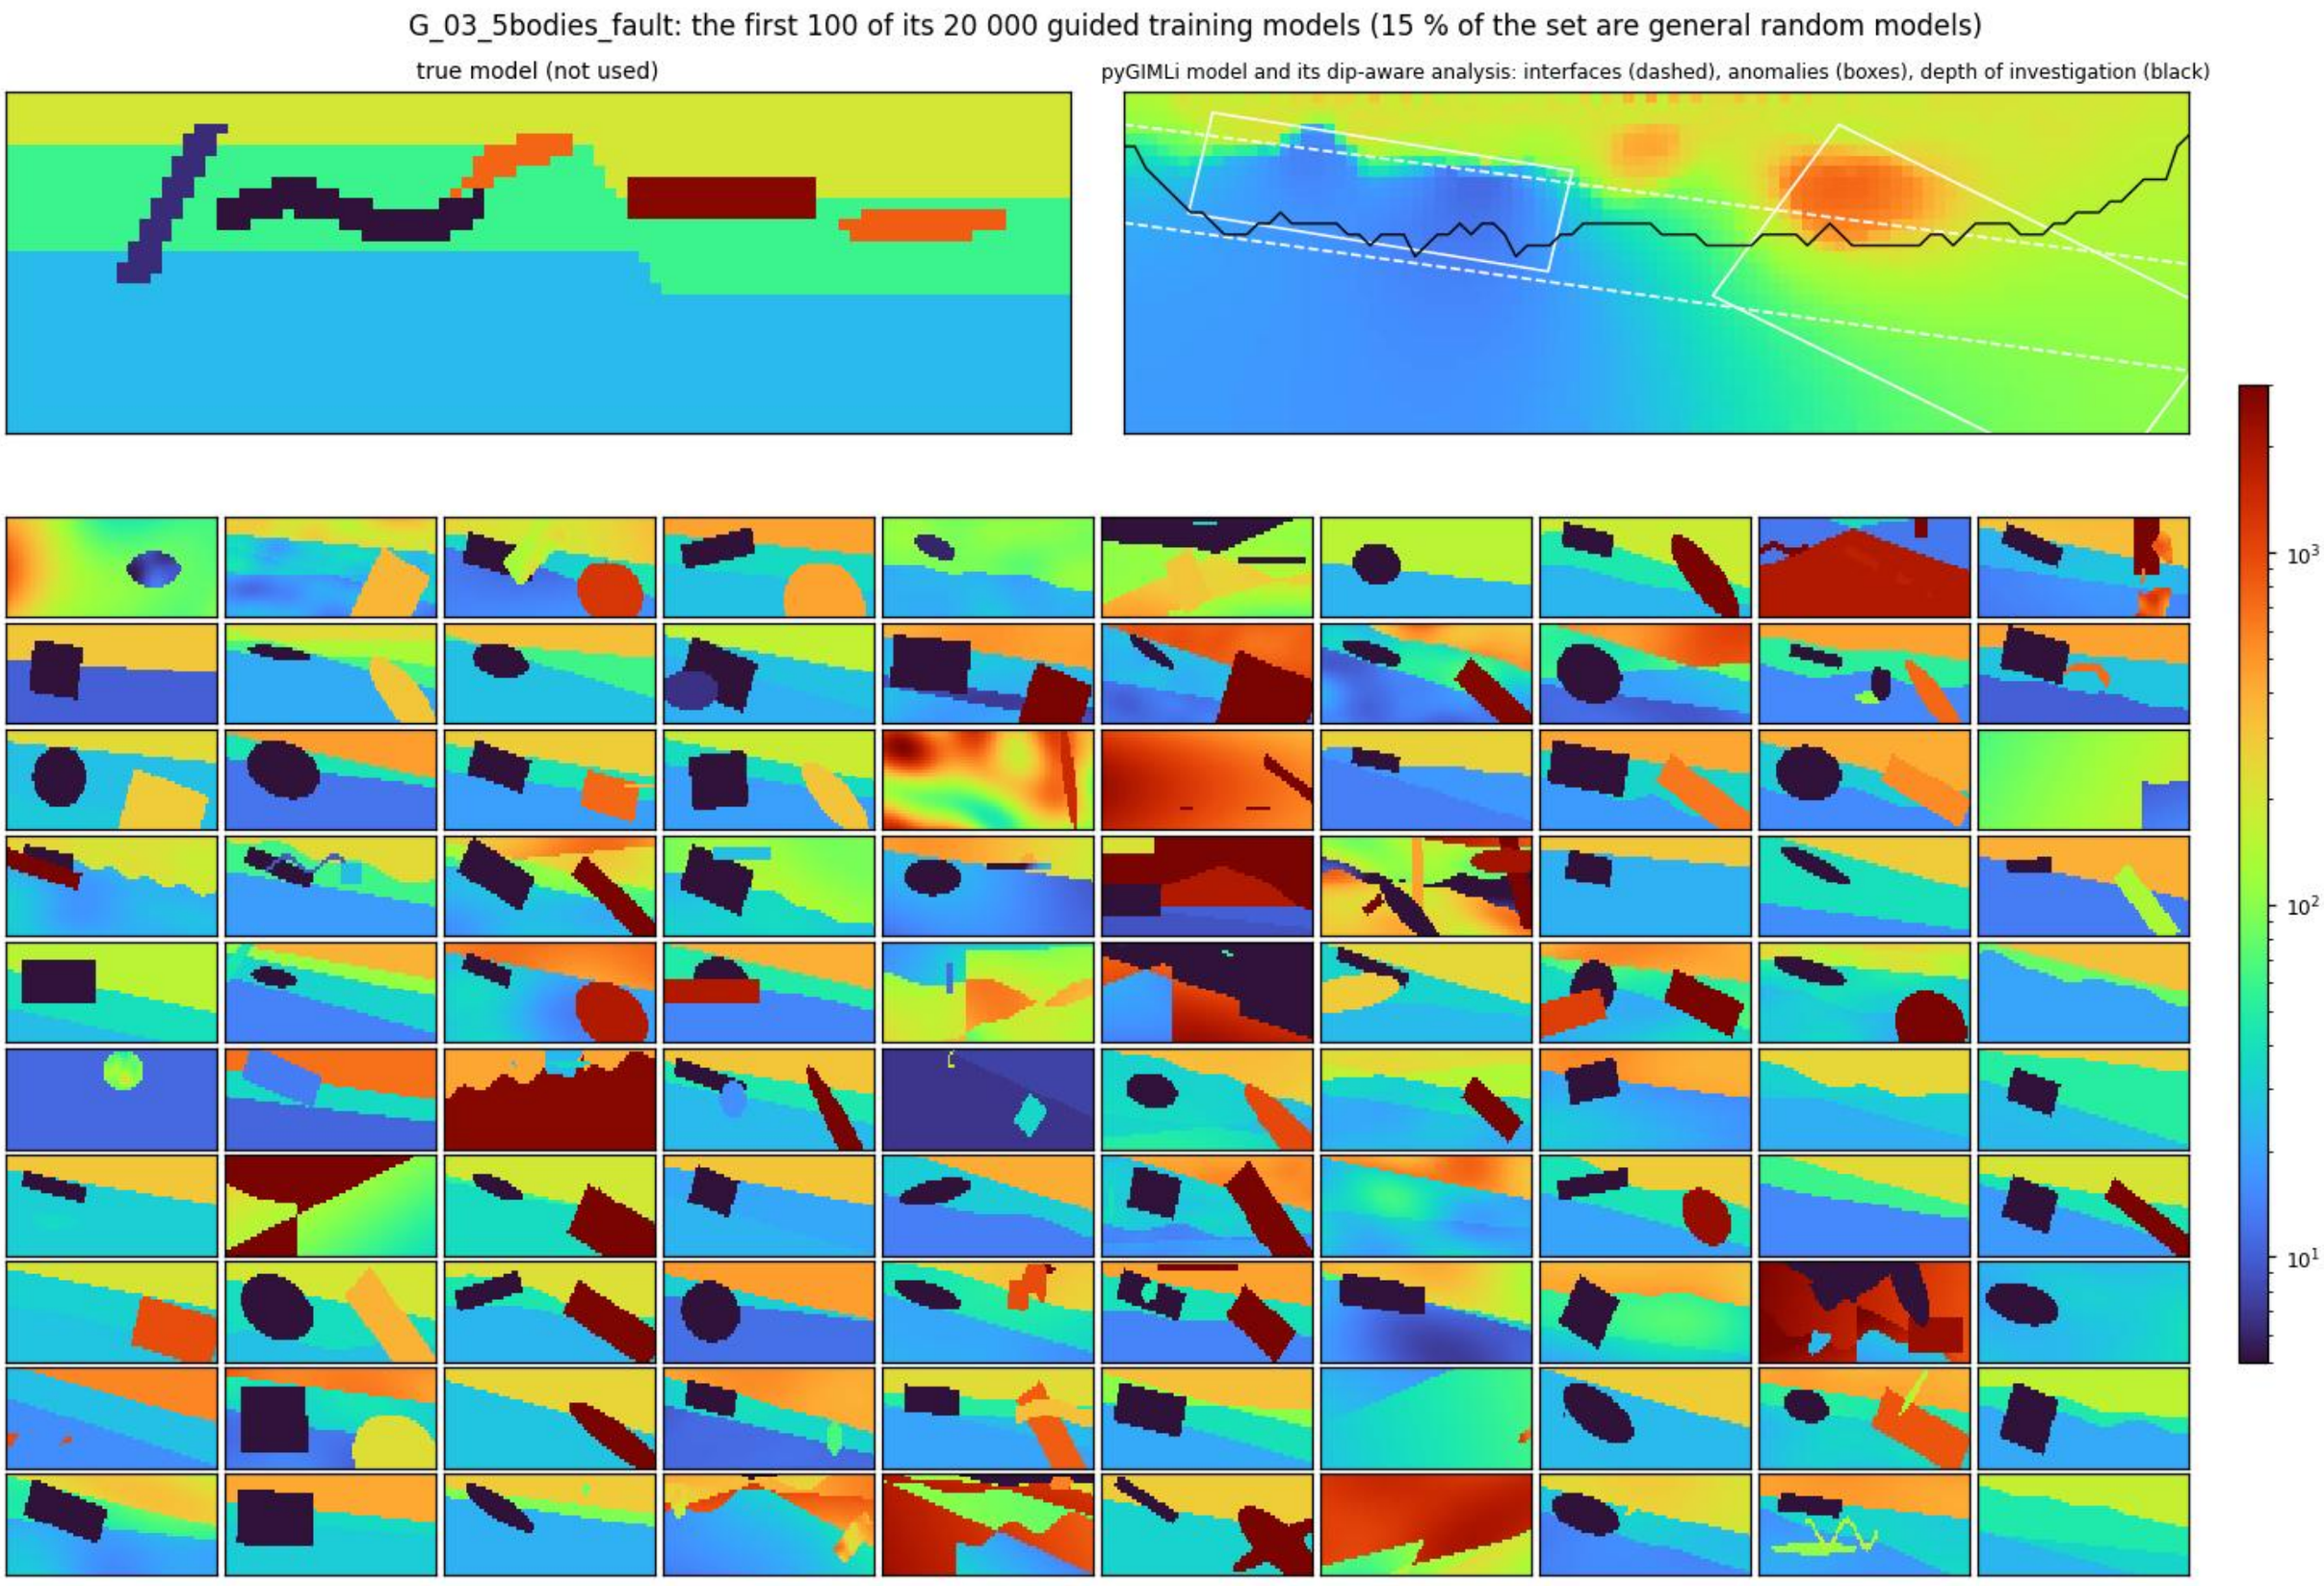
G_03_5bodies_fault: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S95

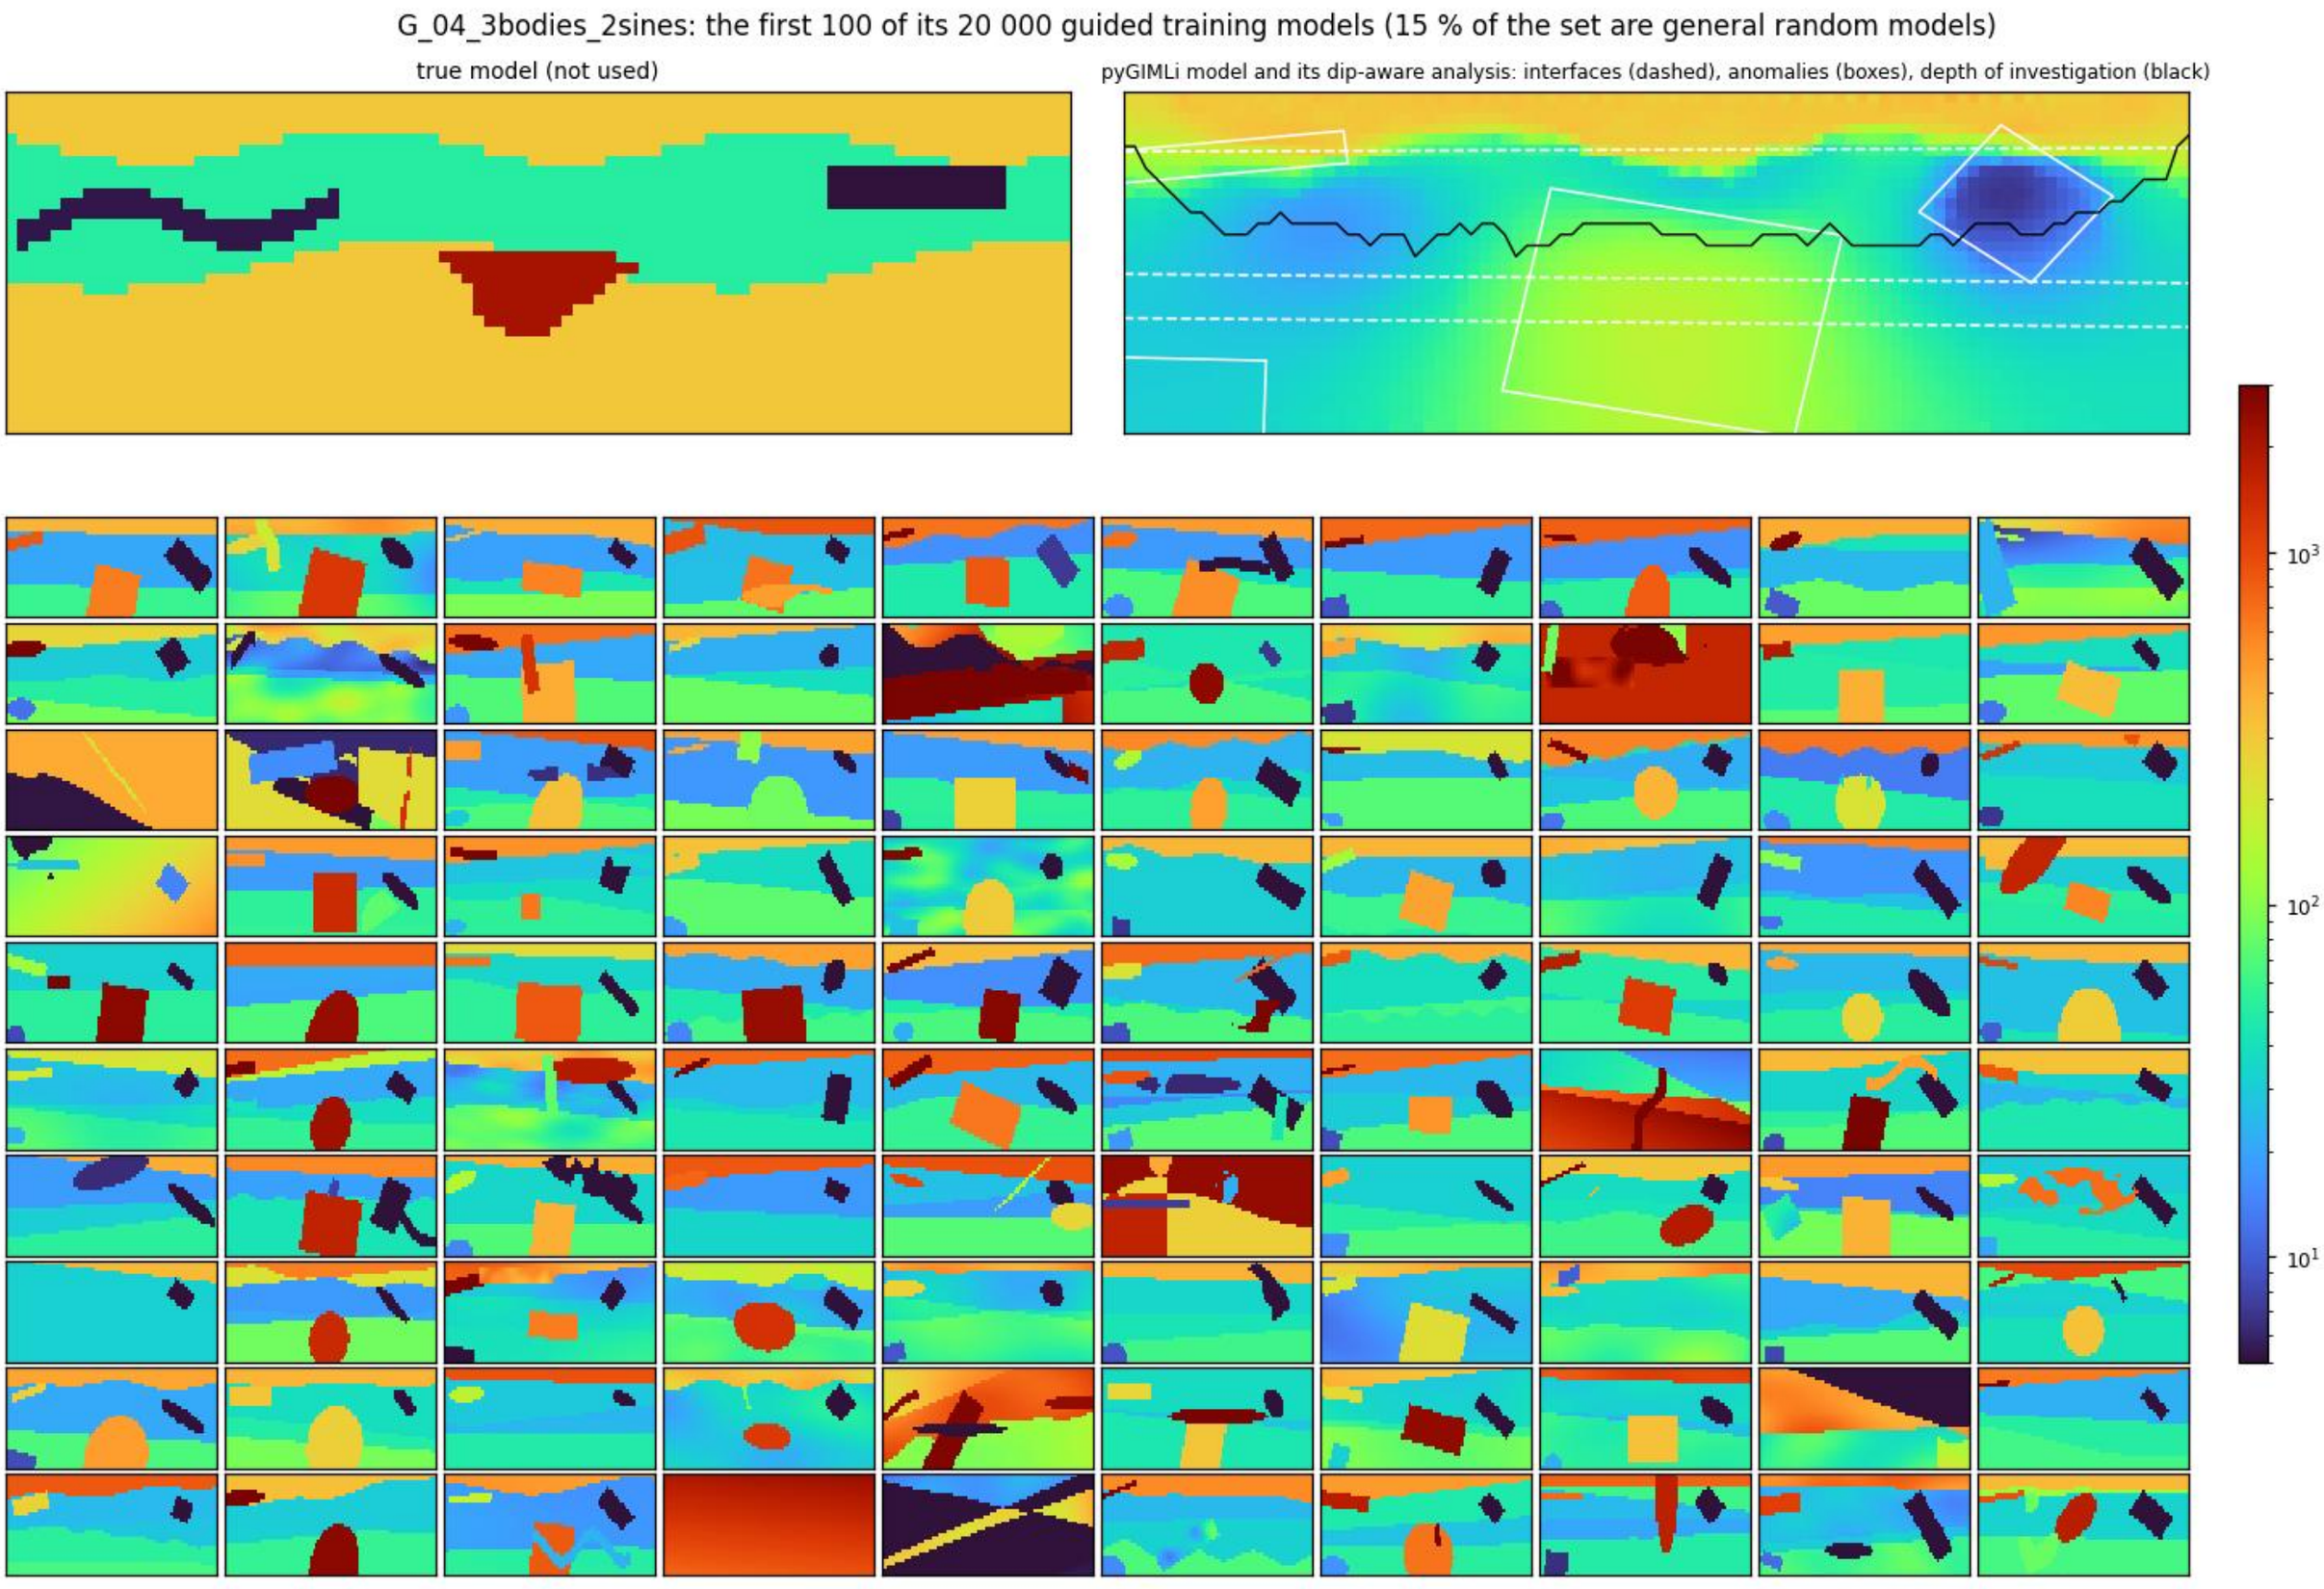
G_04_3bodies_2sines: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S96

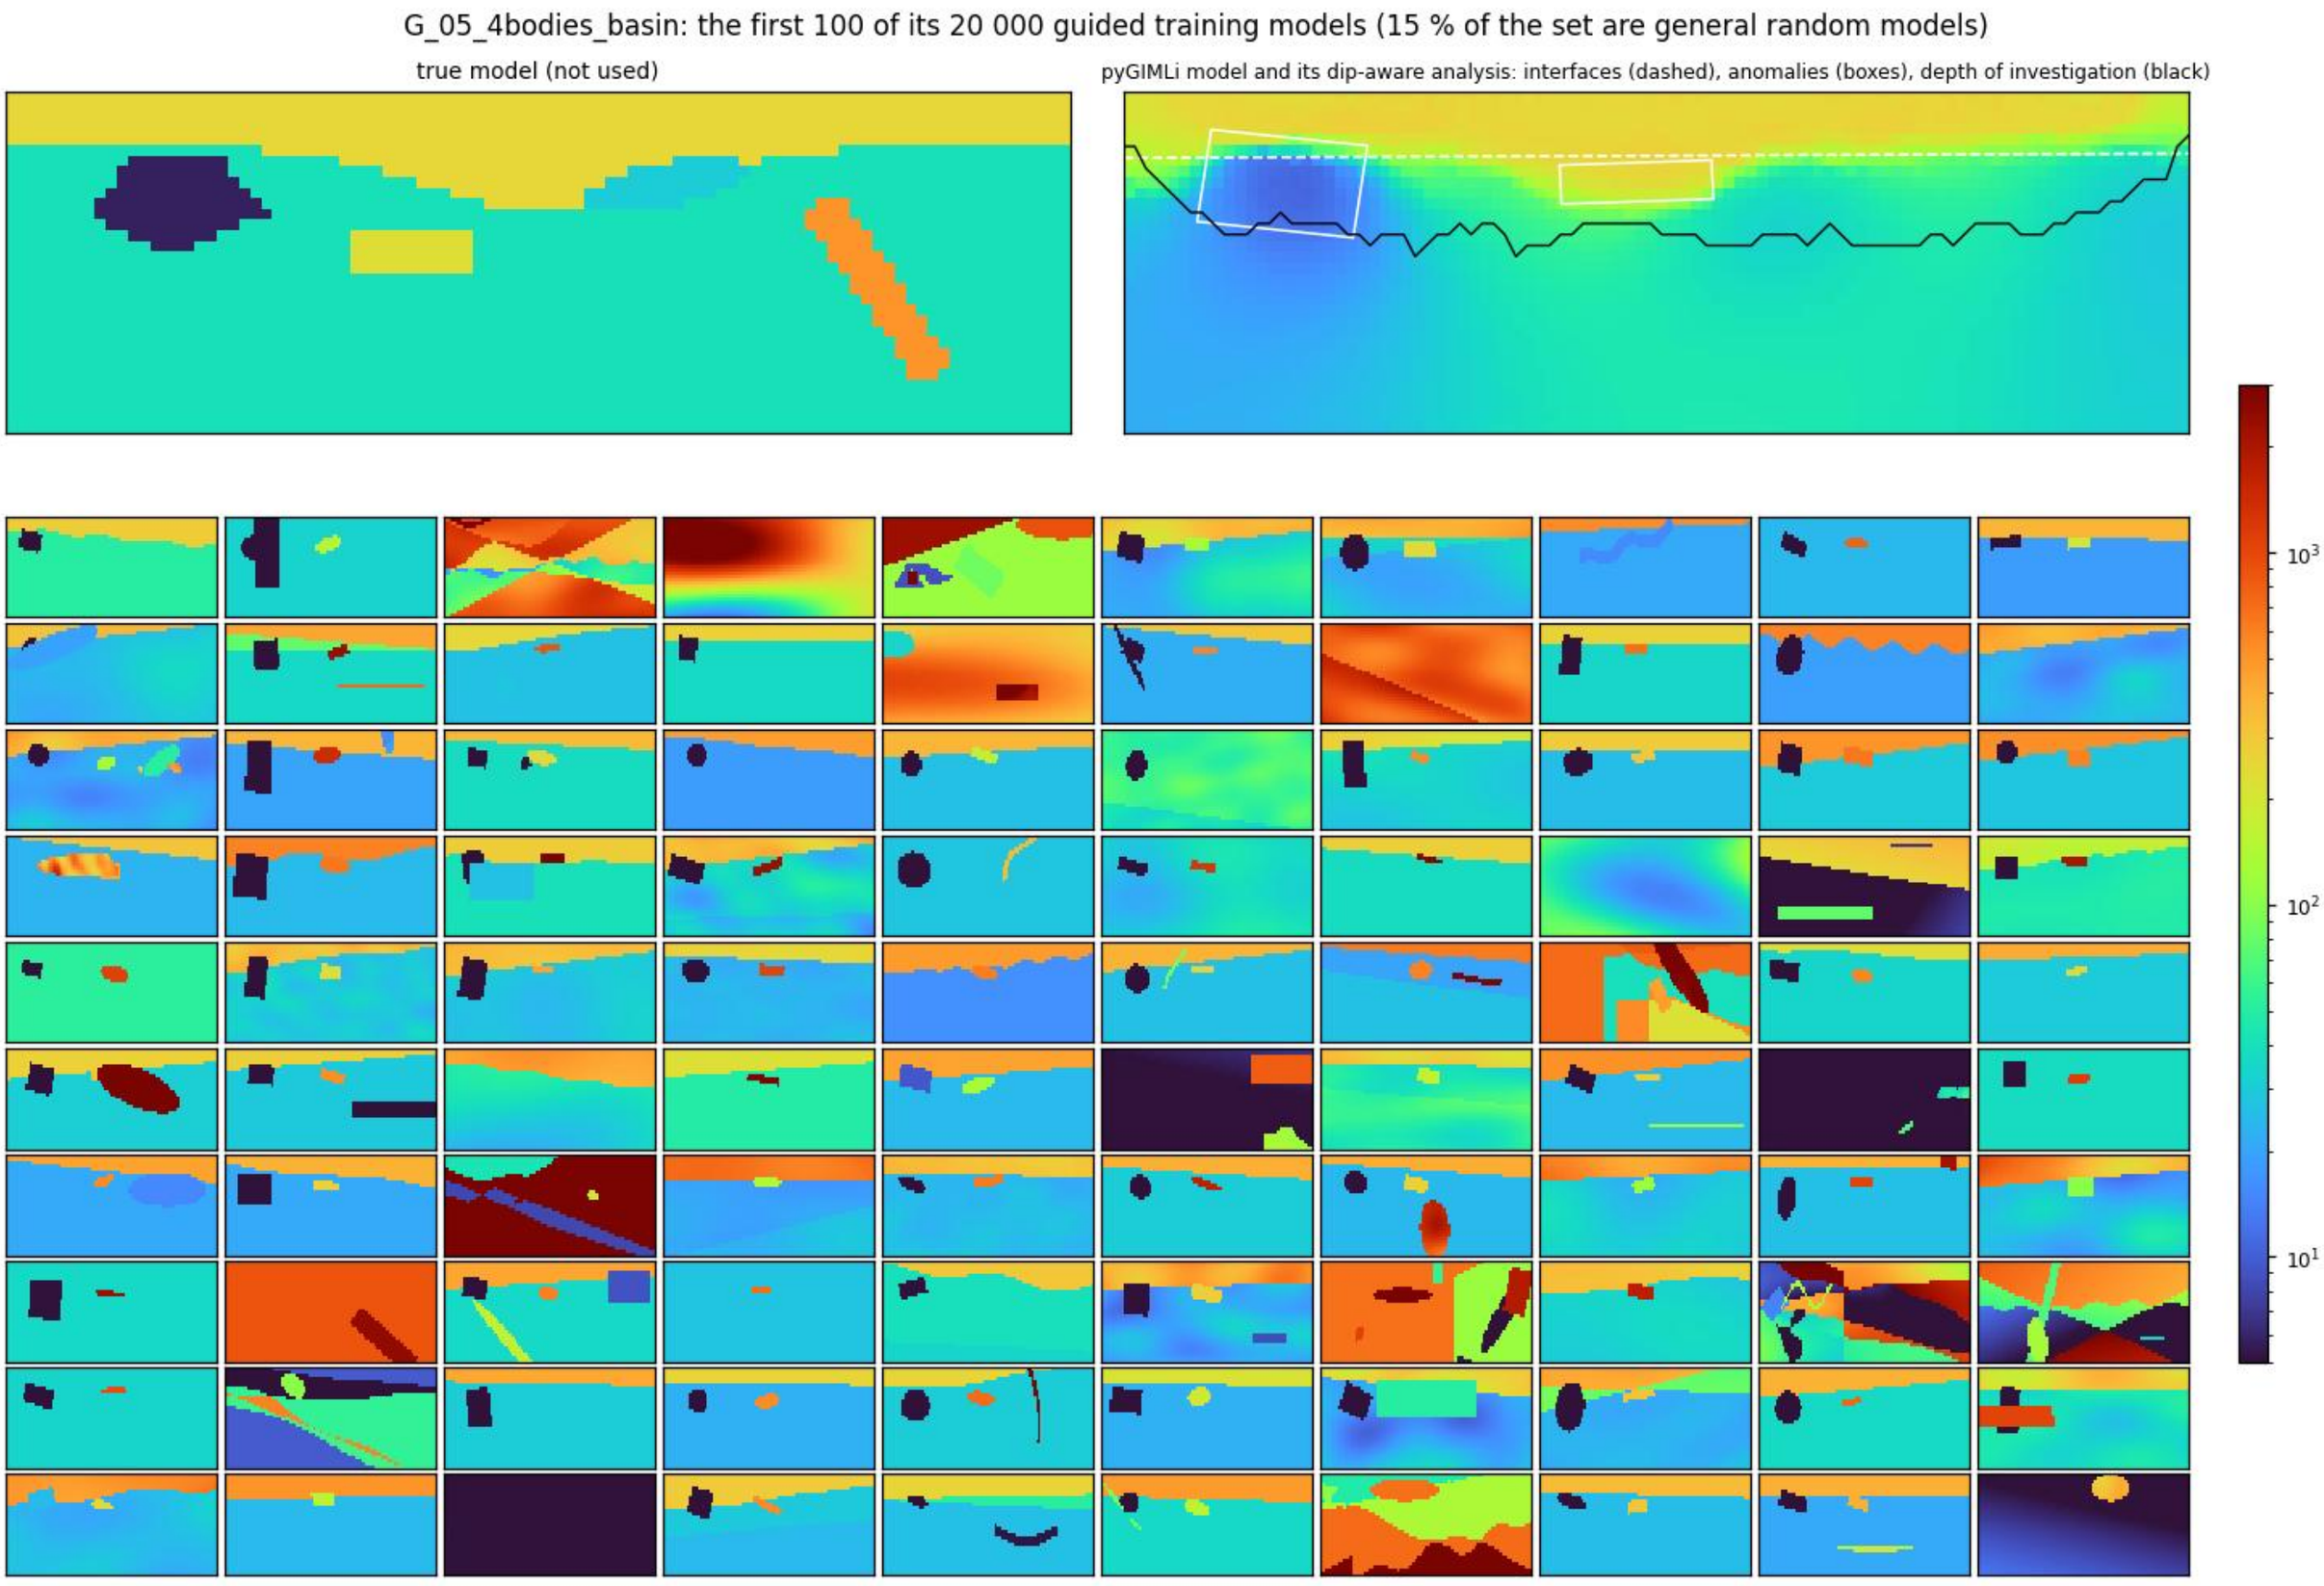
G_05_4bodies_basin: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S97

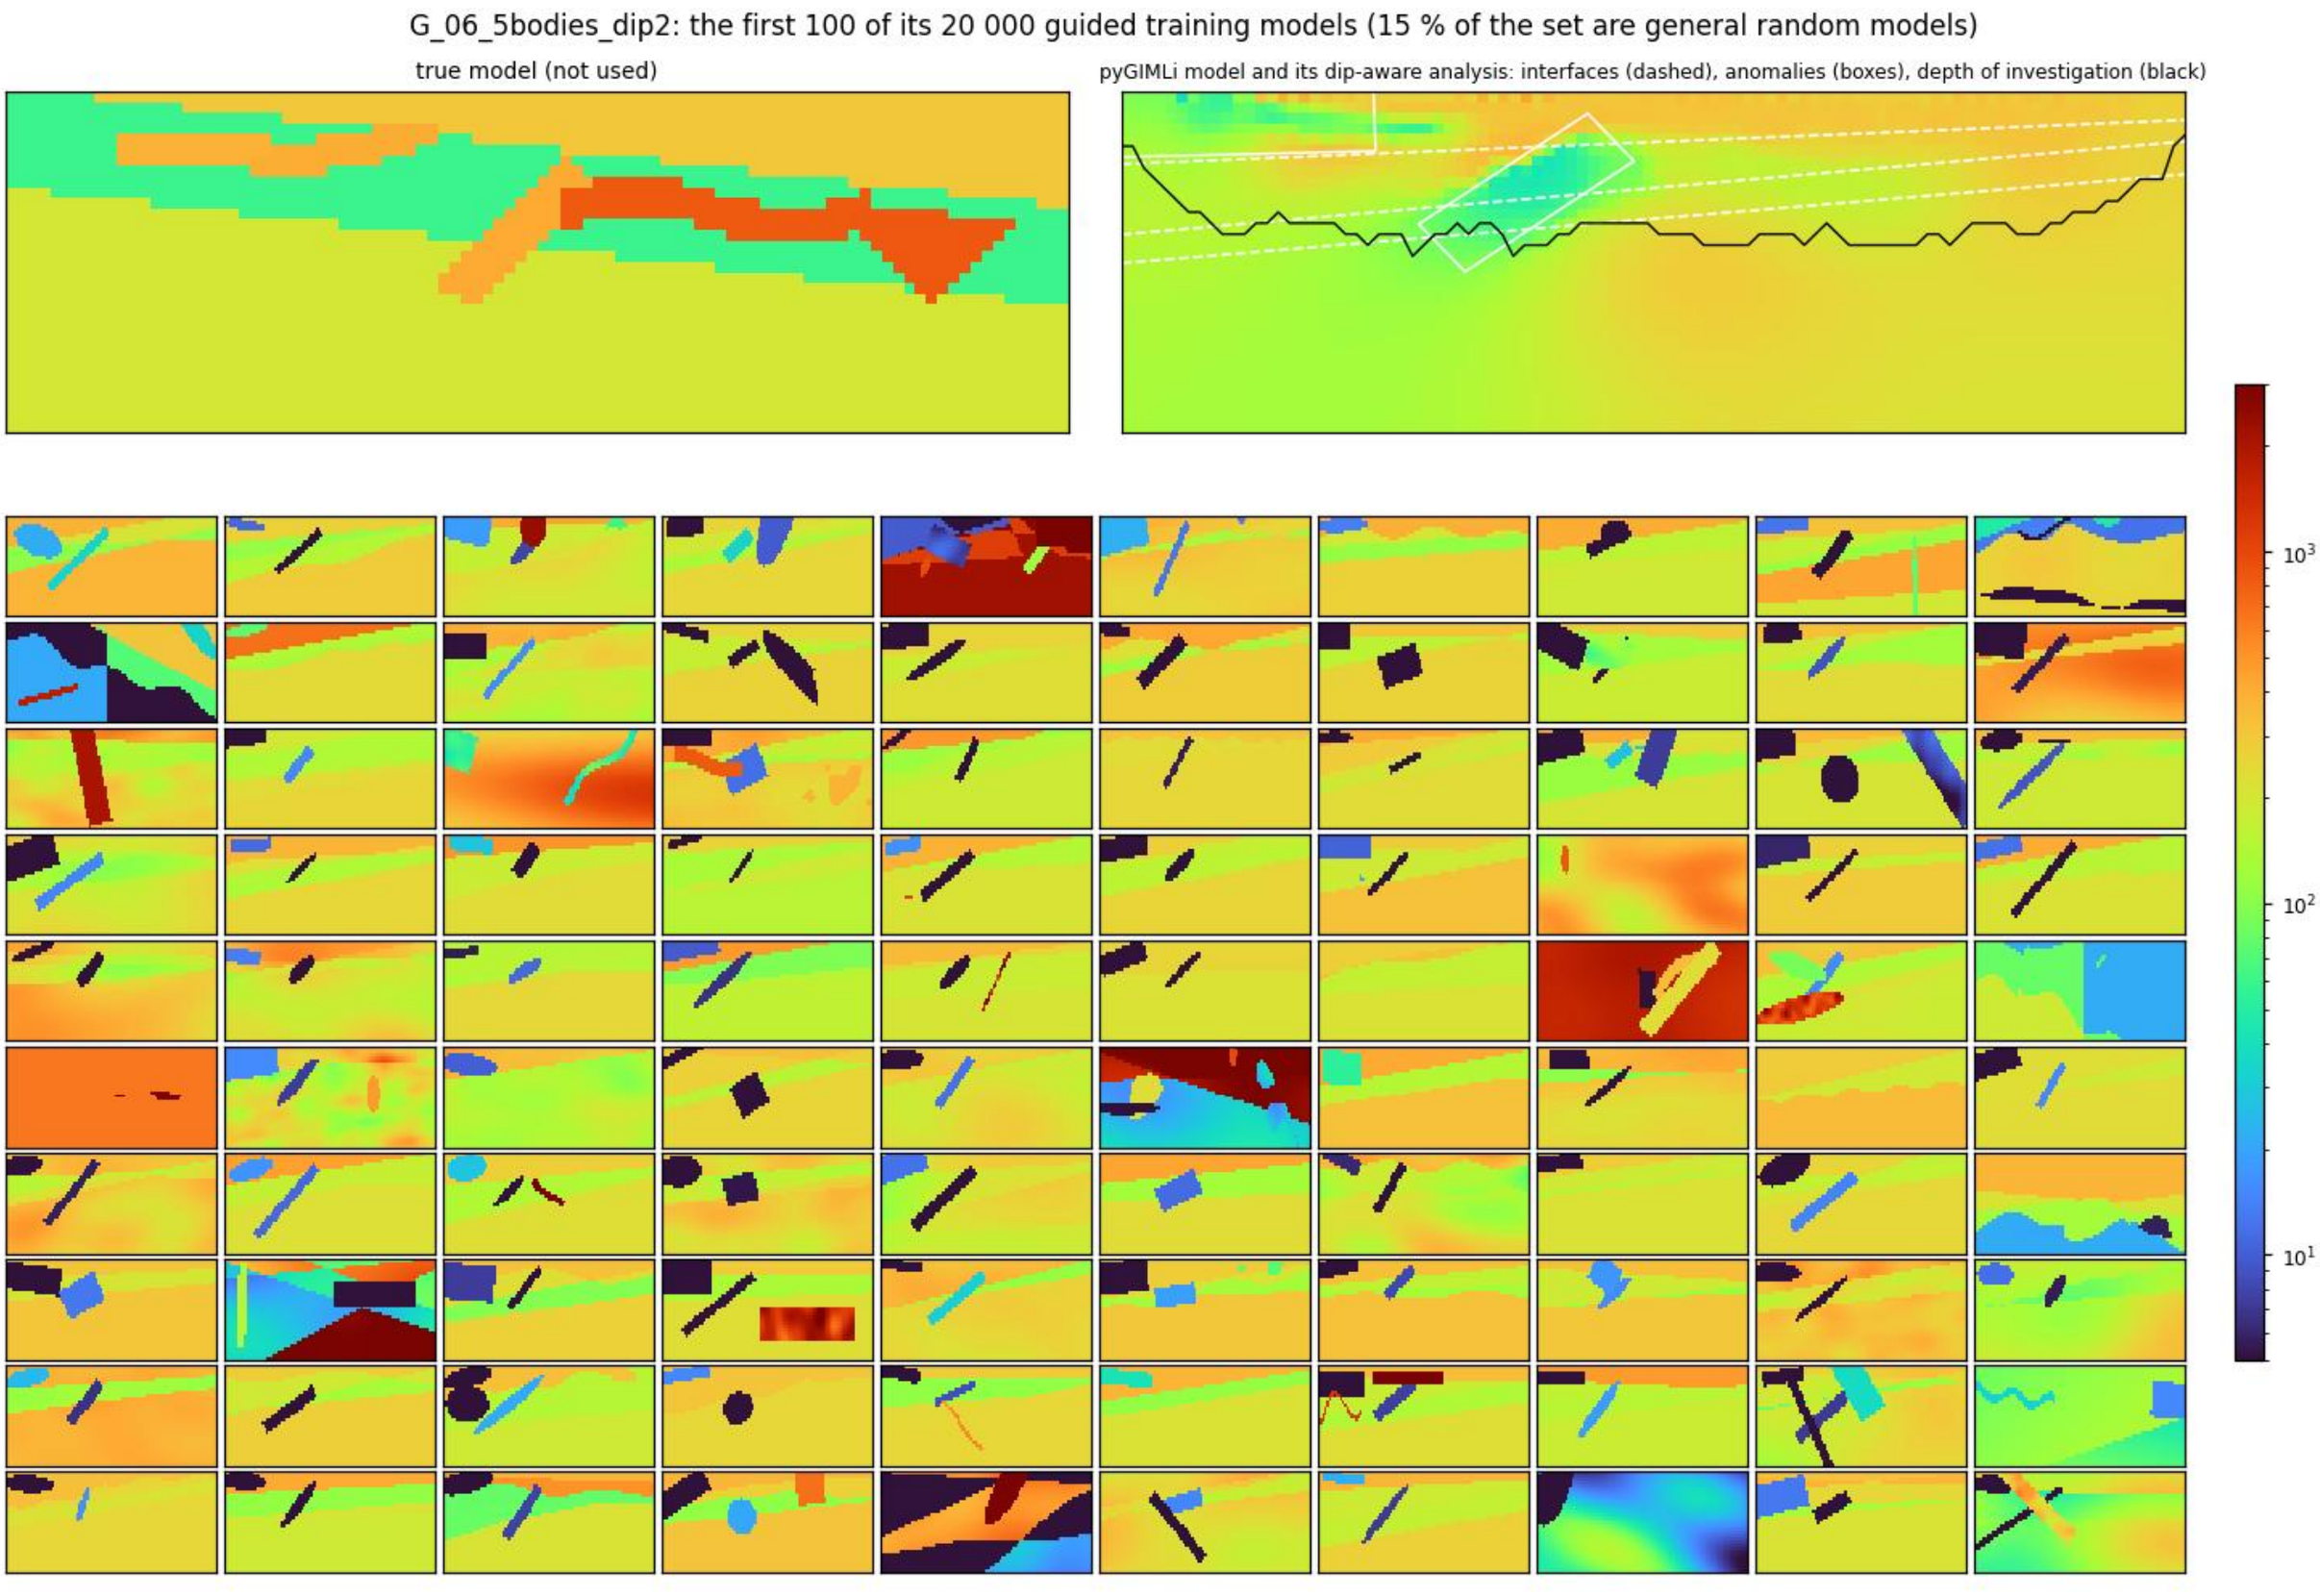
G_06_5bodies_dip2: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S98

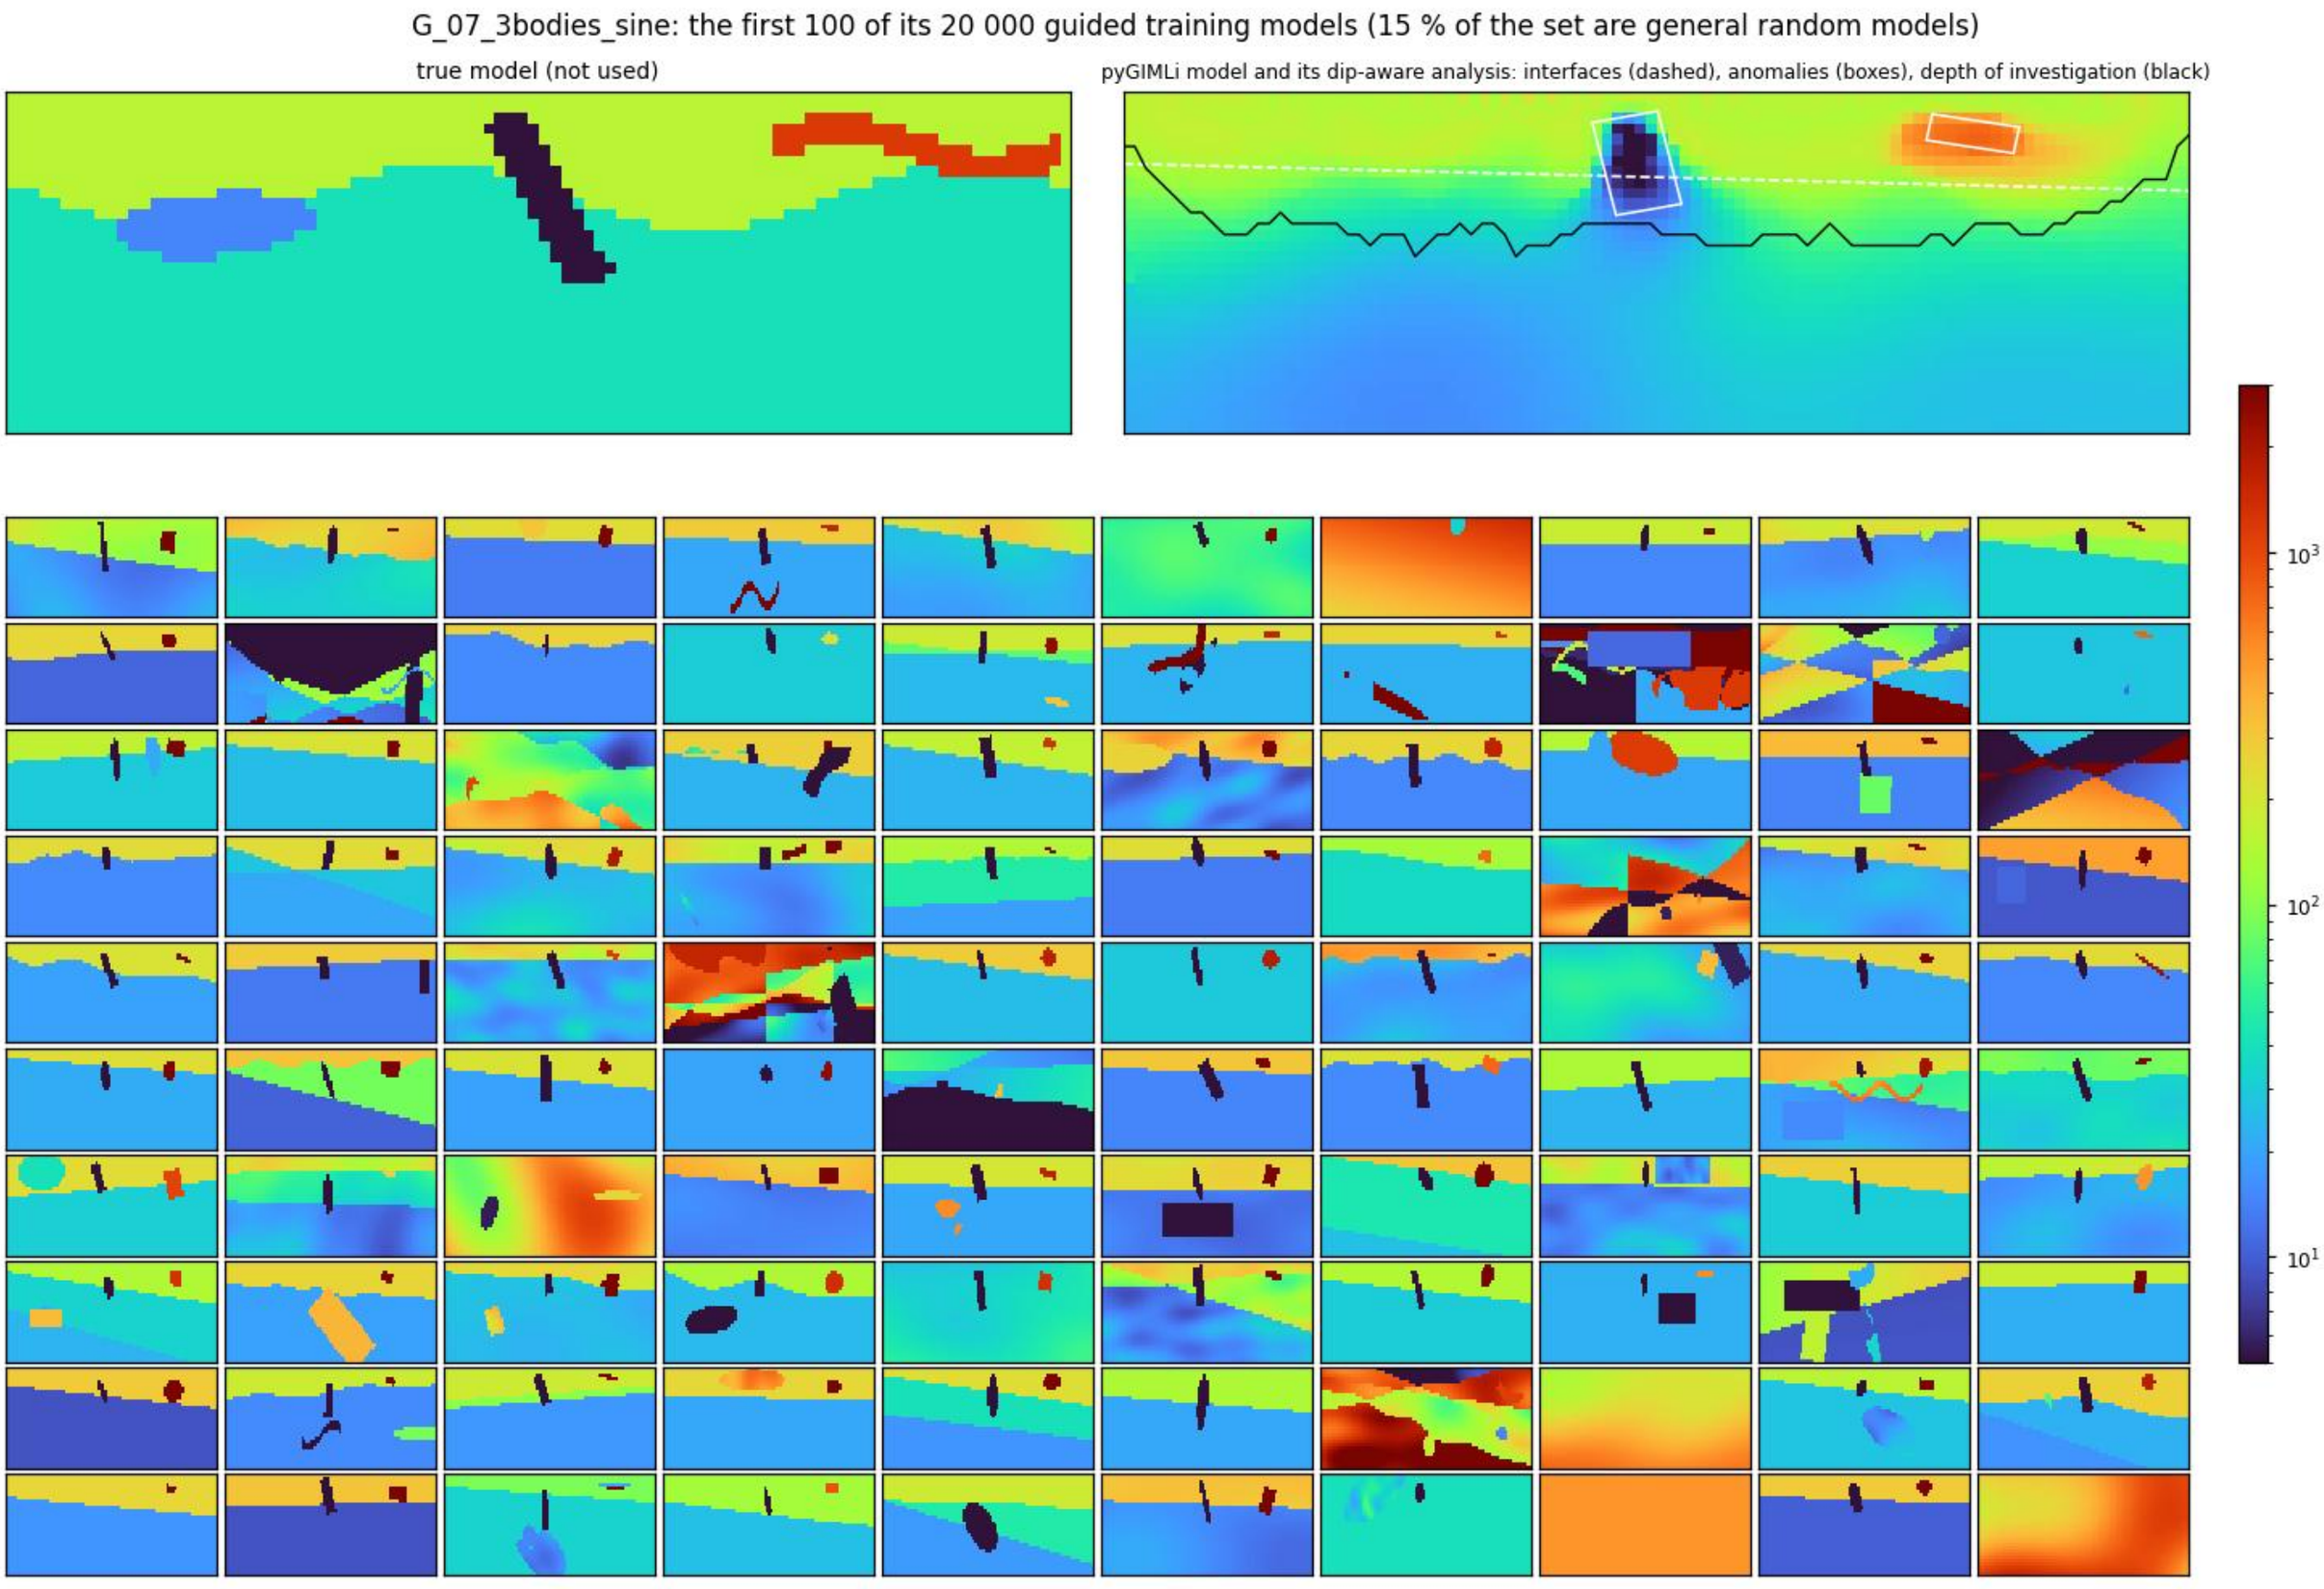
G_07_3bodies_sine: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S99

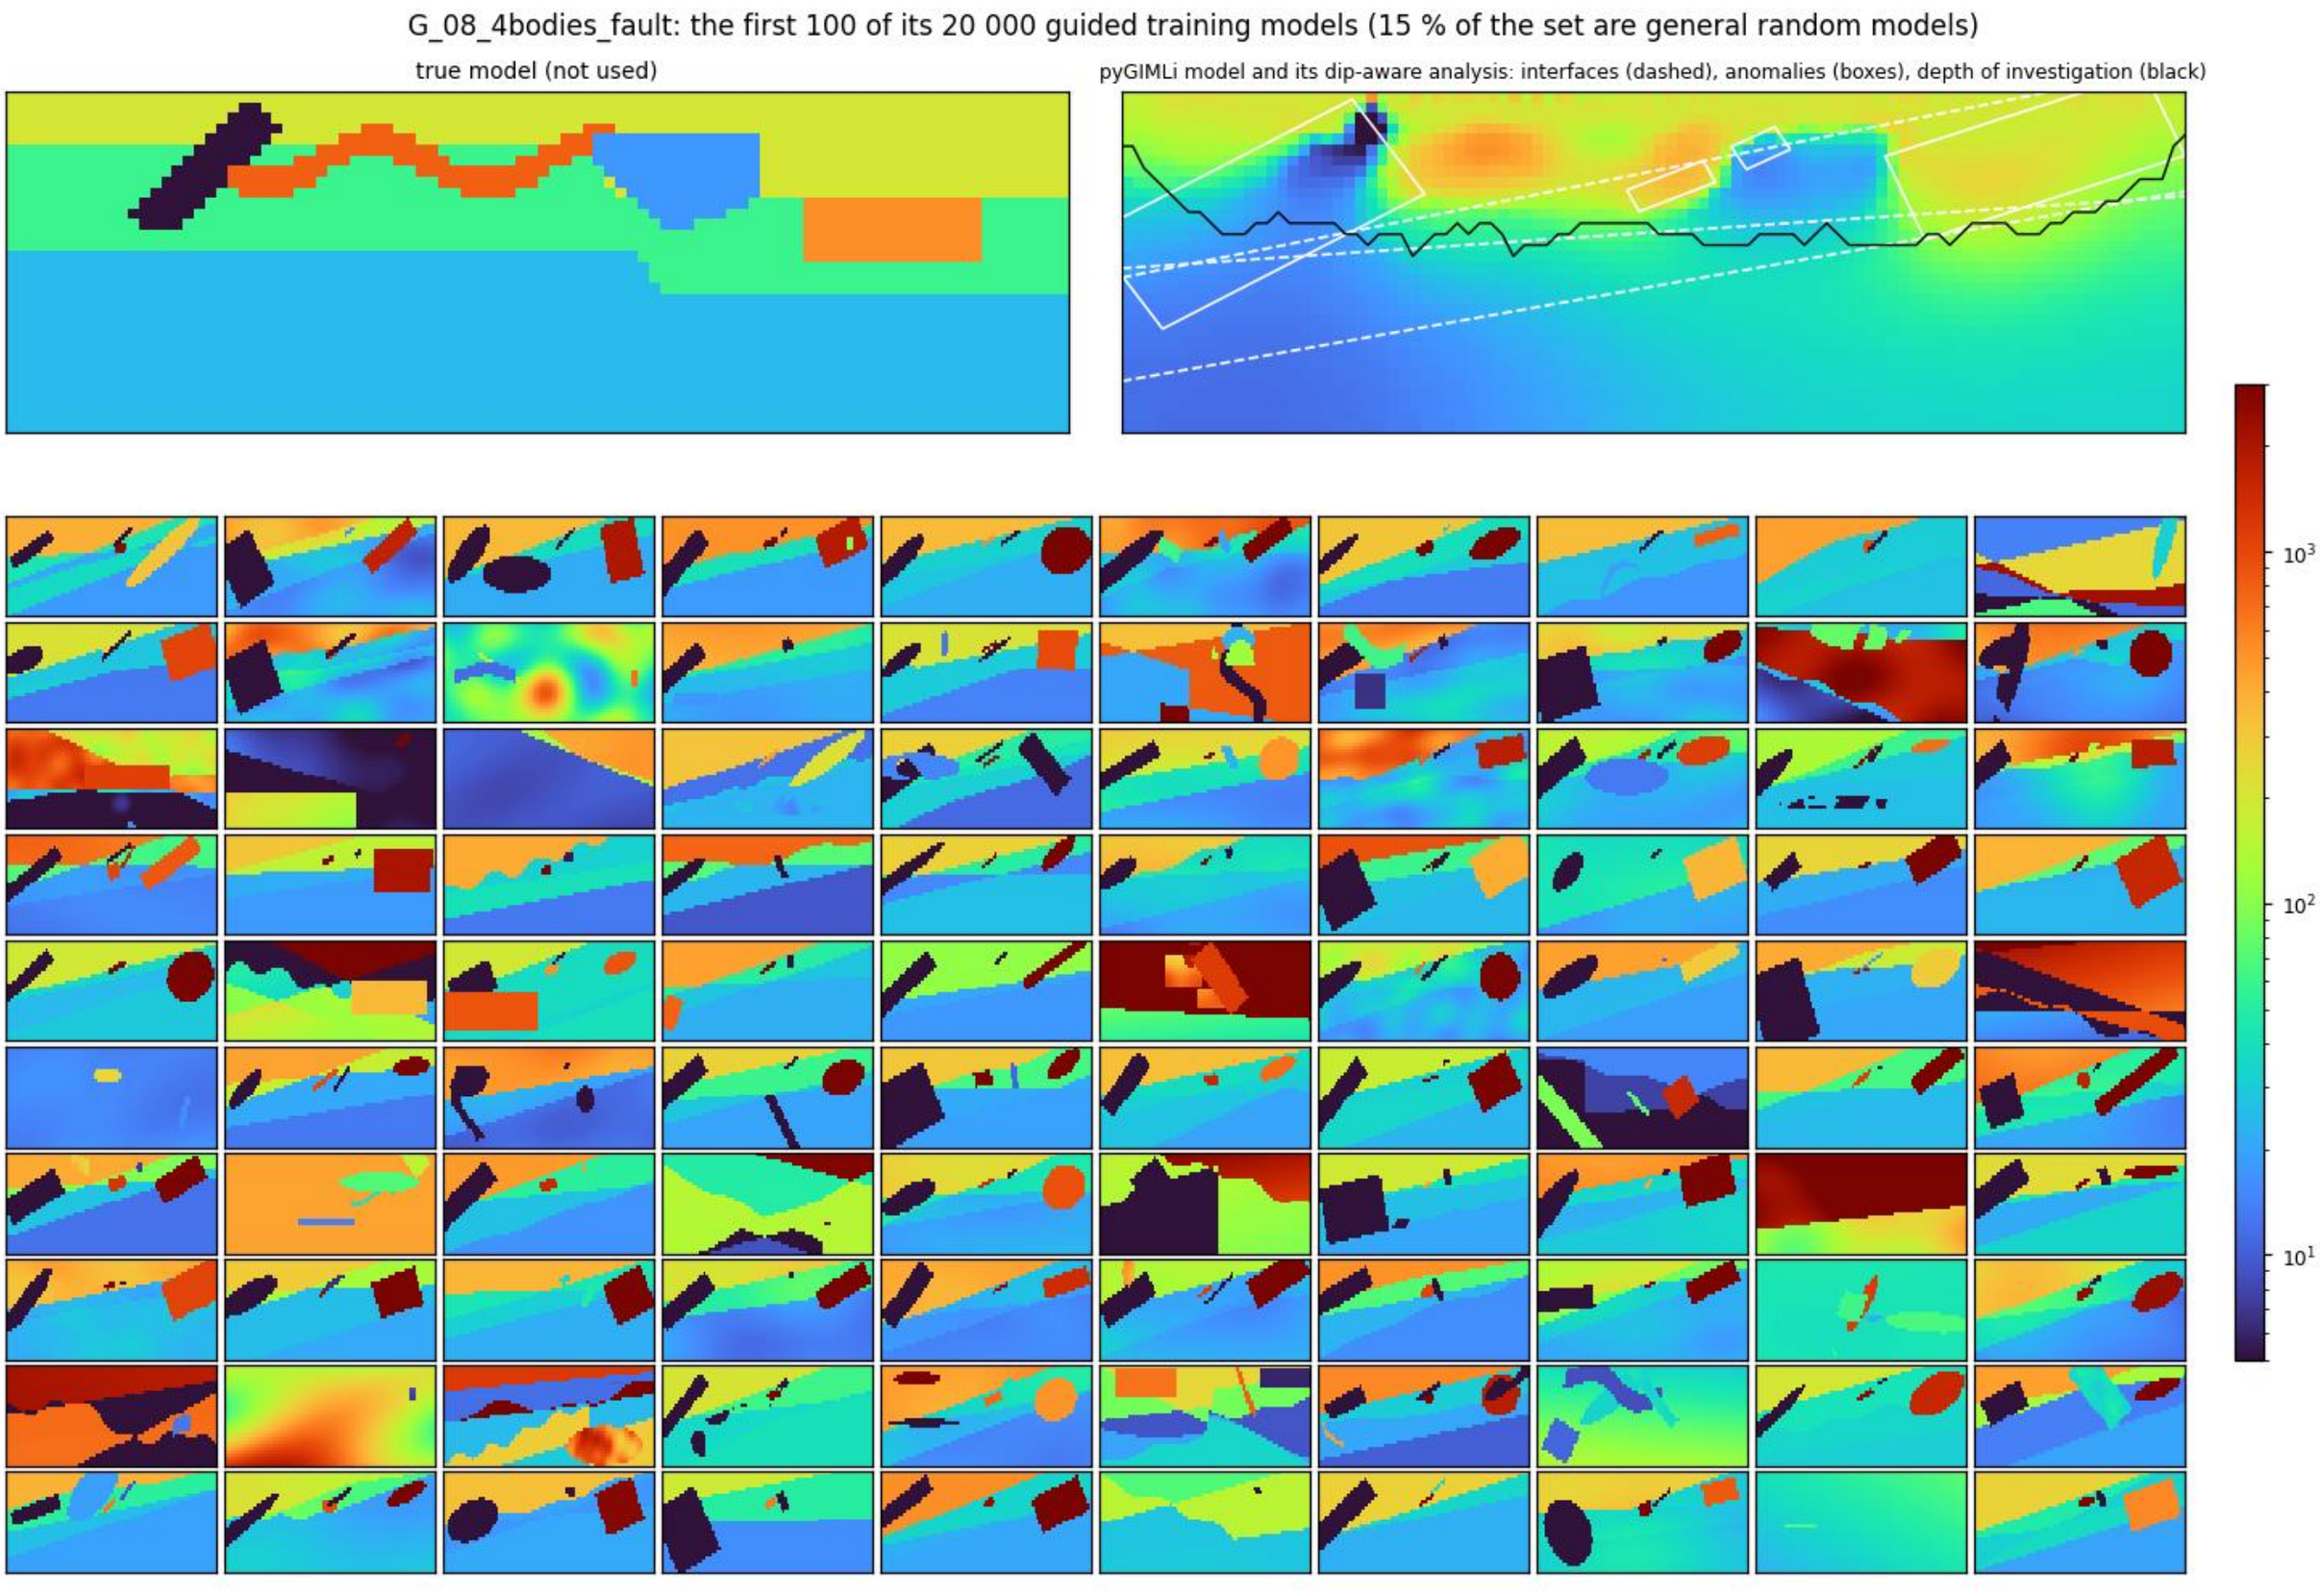
G_08_4bodies_fault: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S100

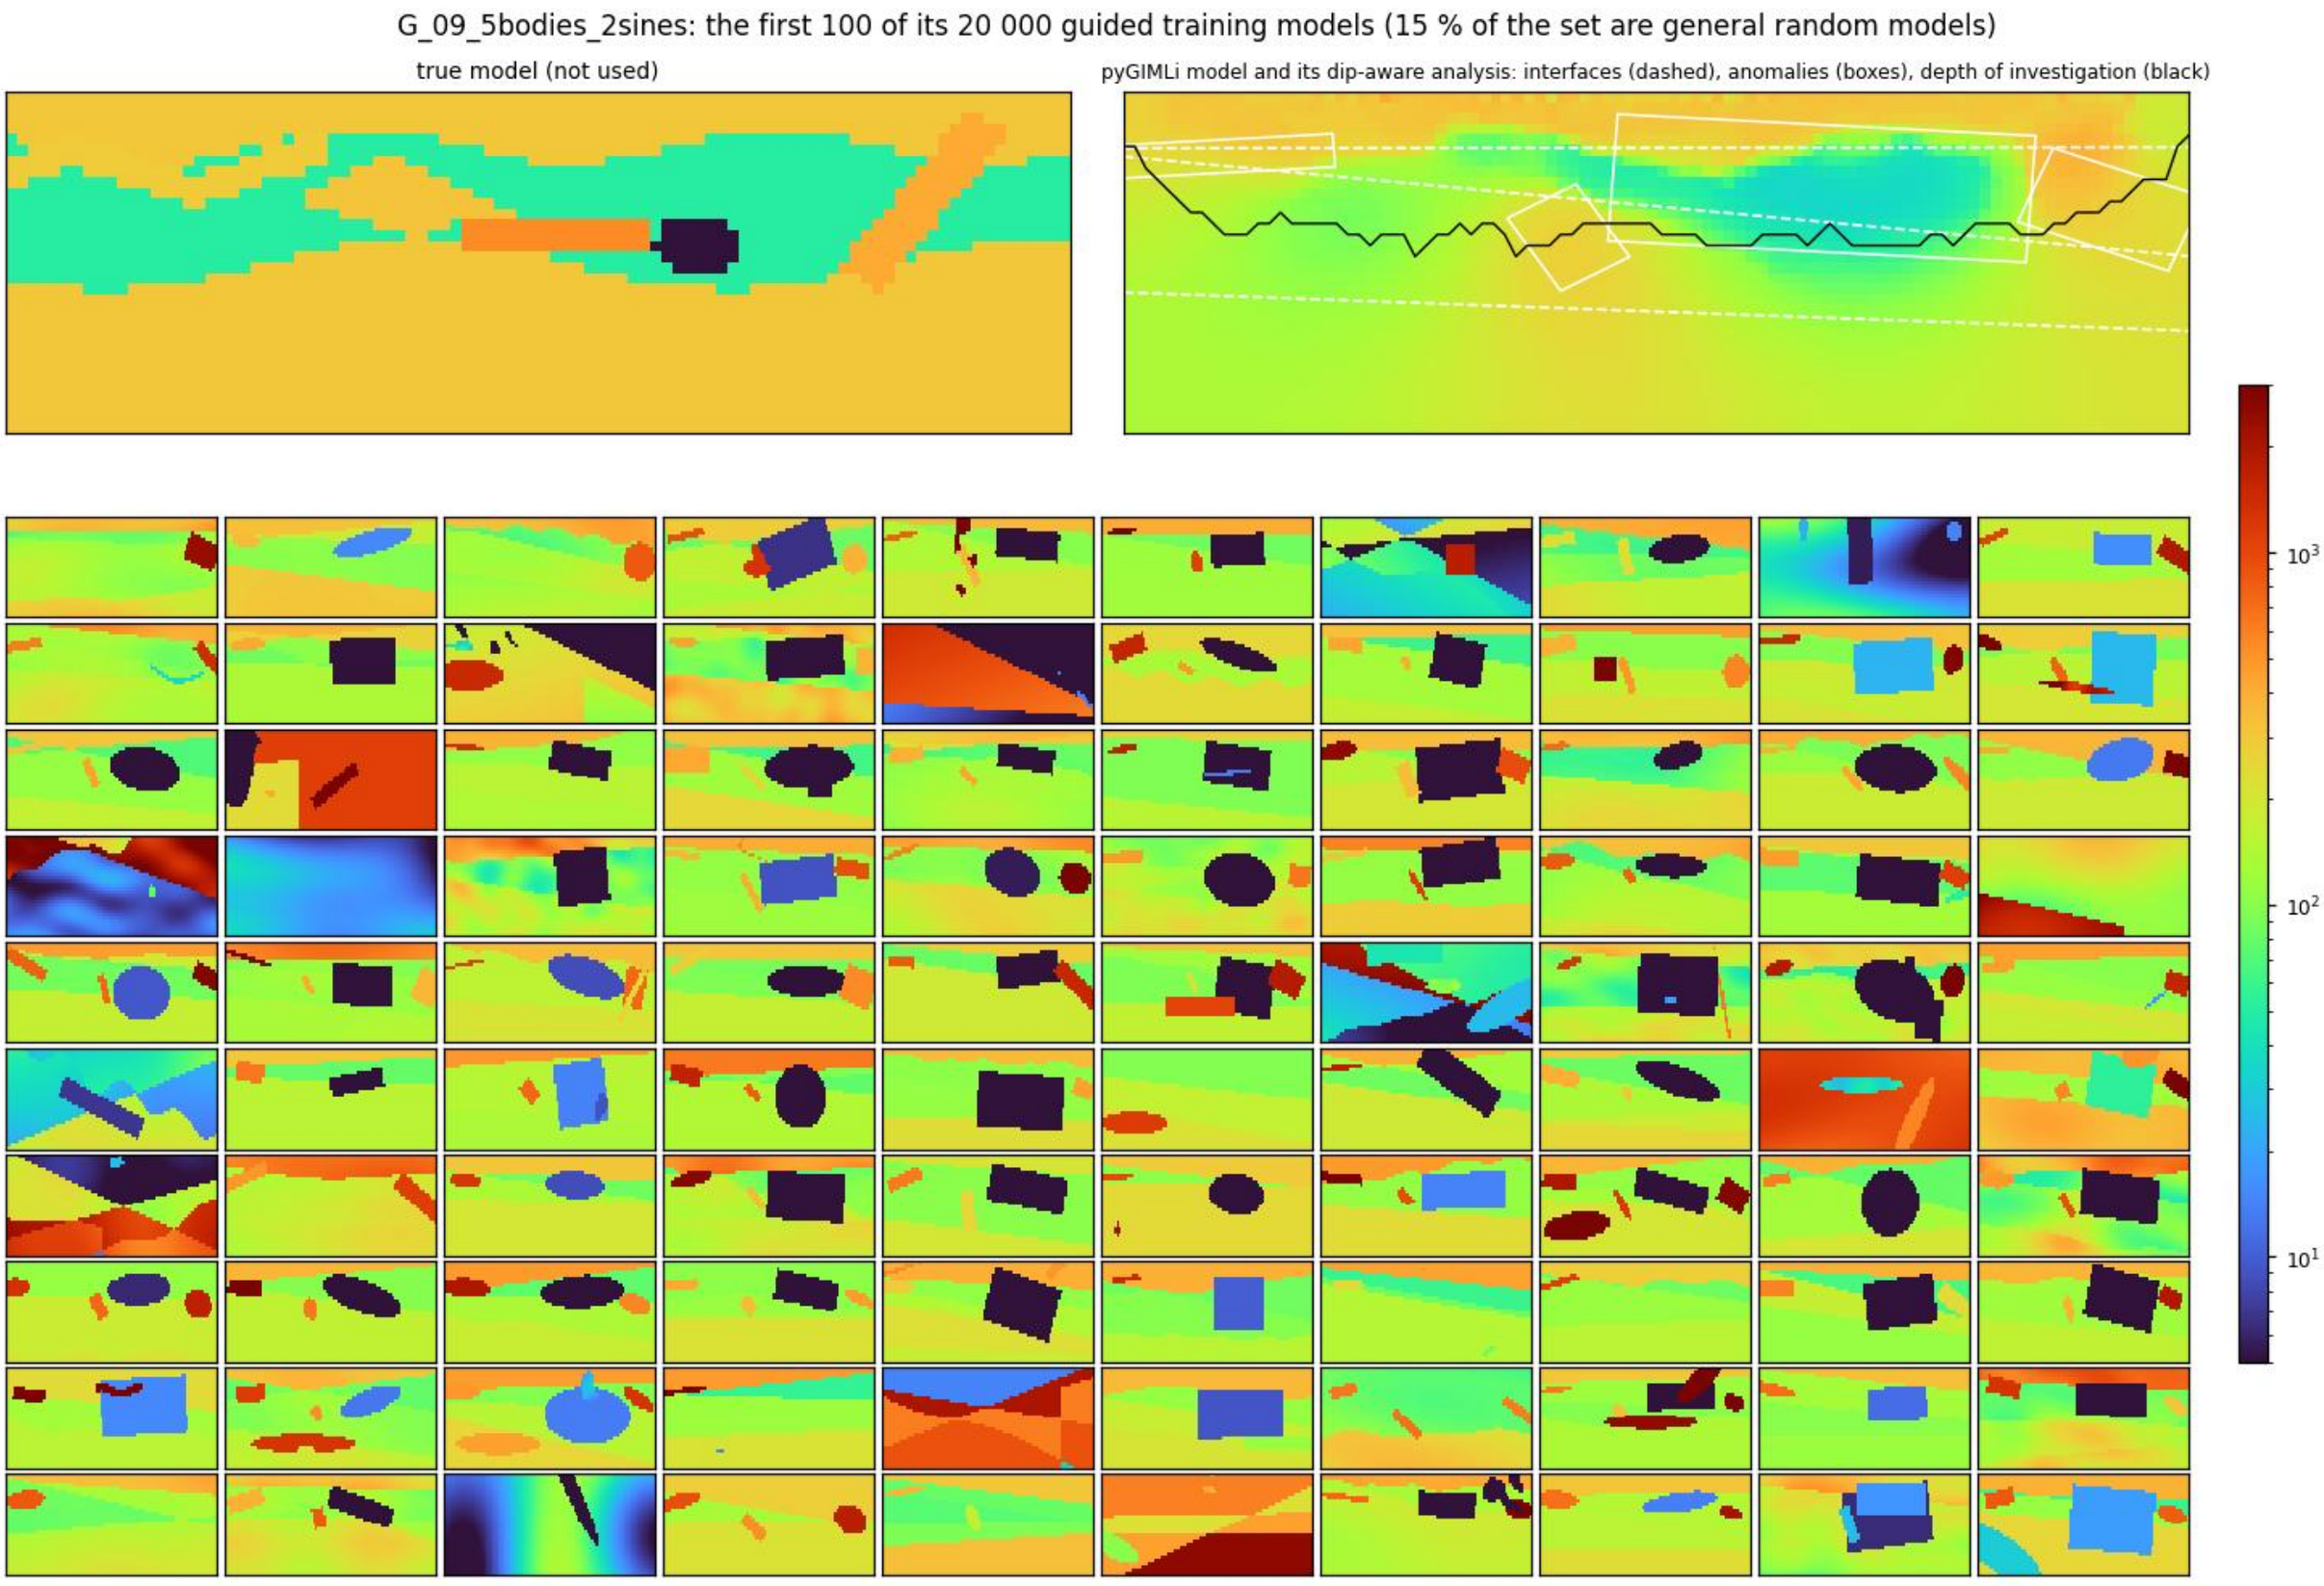
G_09_5bodies_2sines: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)

Figure S101

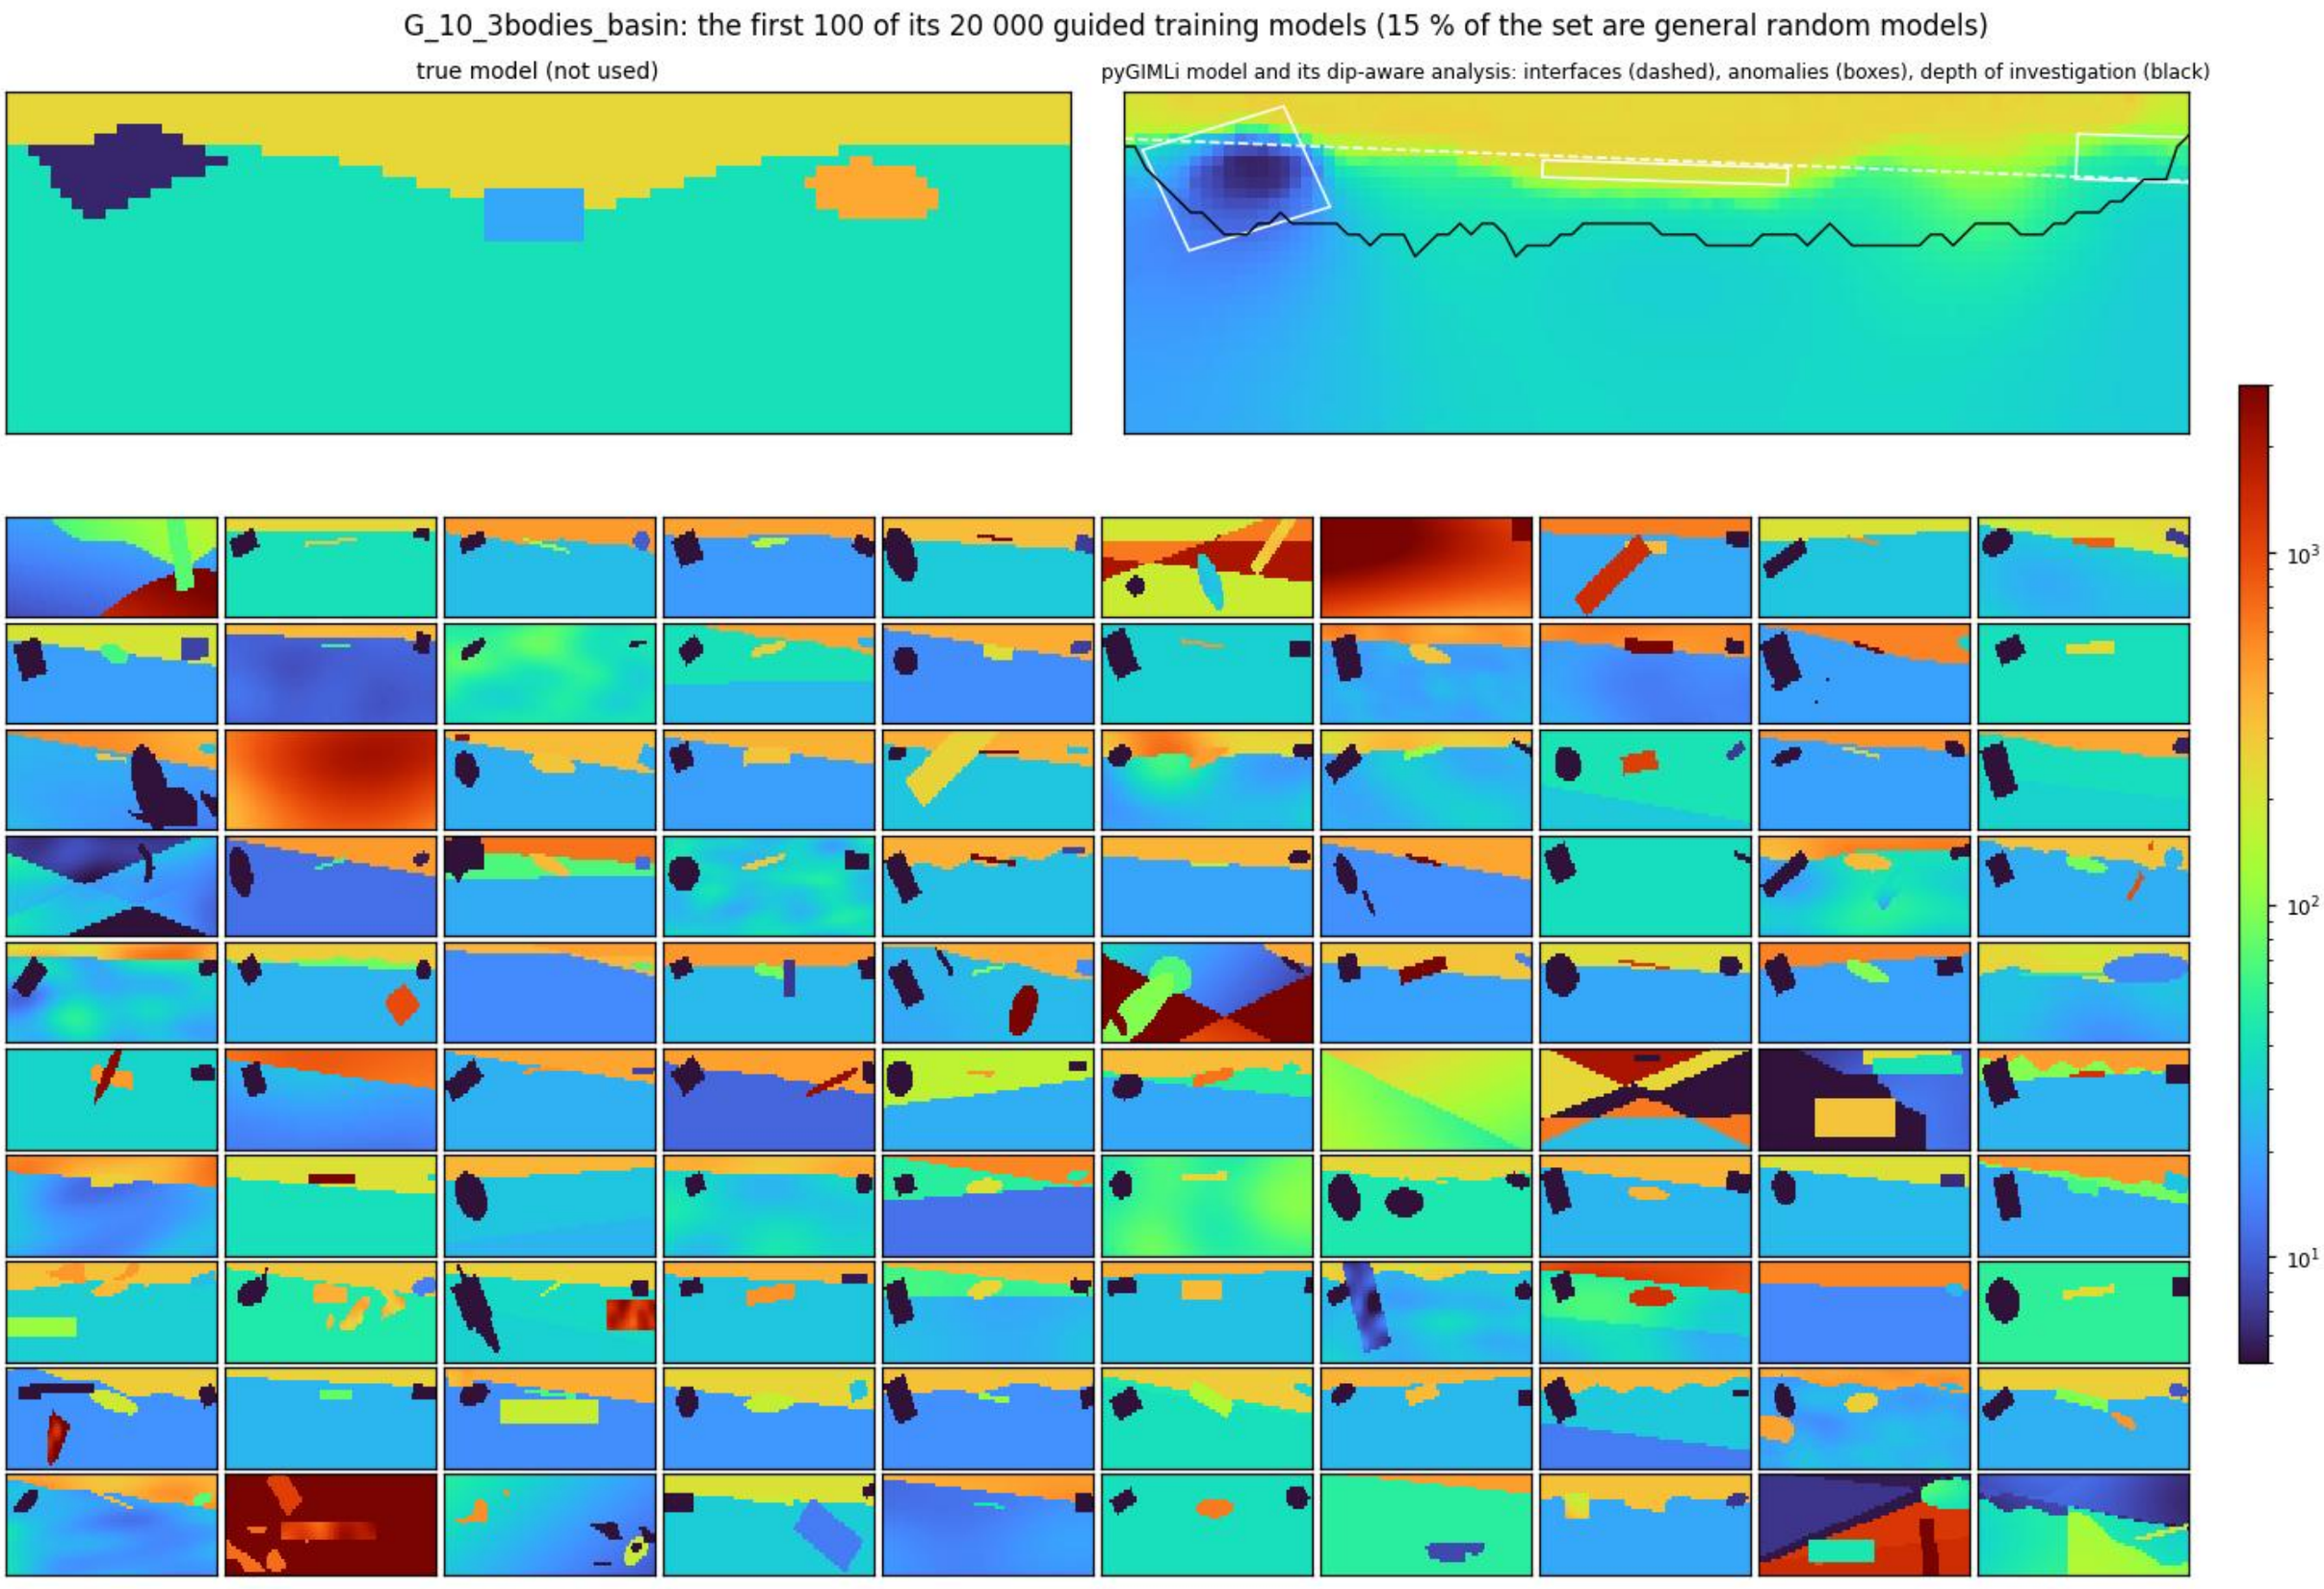
G_10_3bodies_basin: the first 100 of its 20 000 guided training models (15 % of the set are general random models)
true model (not used)
pyGIMLi model and its dip-aware analysis: interfaces (dashed), anomalies (boxes), depth of investigation (black)
$10^3$
$10^2$
$10^1$
resistivity (Ω·m)