

¹ Supplementary materials: Modeling the influence of language input statistics on children's
² speech production

Abstract

Keywords: statistical learning, language learning, abstraction, developmental trajectory,
age-invariance, CHILDES, children

Table 1

Full model output for the analysis of uncorrected reconstruction accuracy using local speech input.

effect	group	term	estimate	std.error	statistic	p.value
fixed	NA	(Intercept)	2.59	0.50	5.19	0.00
fixed	NA	age	-0.81	0.18	-4.44	0.00
ran_pars	child	sd__(Intercept)	1.36	NA	NA	NA
ran_pars	child	sd__age	0.49	NA	NA	NA
ran_pars	child	cor__(Intercept).age	-0.97	NA	NA	NA

Supplementary materials: Modeling the influence of language input statistics on children's
speech production

Full model output of main text analyses

Below readers will find the full statistical model output for each of the six models reported in the main text (that is, one for local input and one for cumulative input for each of the three analyses: uncorrected likelihood of accurate reconstruction, corrected reconstruction accuracy, and likelihood of unseen words).

Table 2

Full model output for the analysis of uncorrected reconstruction accuracy using cumulative speech input.

effect	group	term	estimate	std.error	statistic	p.value
fixed	NA	(Intercept)	2.40	0.39	6.09	0.00
fixed	NA	age	-0.82	0.14	-5.83	0.00
ran_pars	child	sd__(Intercept)	1.18	NA	NA	NA
ran_pars	child	sd__age	0.41	NA	NA	NA
ran_pars	child	cor__(Intercept).age	-0.96	NA	NA	NA

Table 3

Full model output for the analysis of corrected reconstruction accuracy using local speech input.

effect	group	term	estimate	std.error	statistic	p.value
fixed	NA	(Intercept)	0.11	0.02	5.06	NA
fixed	NA	recentered_age	0.03	0.02	1.68	NA
ran_pars	child	sd__(Intercept)	0.05	NA	NA	NA
ran_pars	child	sd__recentered_age	0.04	NA	NA	NA
ran_pars	child	cor__(Intercept).recentered_age	0.63	NA	NA	NA
ran_pars	Residual	sd__Observation	0.63	NA	NA	NA

Table 4

Full model output for the analysis of corrected reconstruction accuracy using cumulative speech input.

effect	group	term	estimate	std.error	statistic	p.value
fixed	NA	(Intercept)	0.06	0.01	6.24	NA
fixed	NA	recentered_age	0.02	0.01	1.59	NA
ran_pars	child	sd__(Intercept)	0.02	NA	NA	NA
ran_pars	child	sd__recentered_age	0.03	NA	NA	NA
ran_pars	child	cor__(Intercept).recentered_age	-0.71	NA	NA	NA
ran_pars	Residual	sd__Observation	0.59	NA	NA	NA

Table 5

Full model output for the analysis of number of utterances with previously unheard words using local speech input.

effect	group	term	estimate	std.error	statistic	p.value
fixed	NA	(Intercept)	-2.11	0.24	-8.82	0.00
fixed	NA	age	0.36	0.09	3.86	0.00
fixed	NA	numwords	0.17	0.01	31.94	0.00
ran_pars	child	sd__(Intercept)	0.58	NA	NA	NA
ran_pars	child	sd__age	0.23	NA	NA	NA
ran_pars	child	cor__(Intercept).age	-0.96	NA	NA	NA

Table 6

Full model output for the analysis of number of utterances with previously unheard words using cumulative speech input.

effect	group	term	estimate	std.error	statistic	p.value
fixed	NA	(Intercept)	-1.72	0.20	-8.60	0.00
fixed	NA	age	-0.14	0.07	-2.05	0.04
fixed	NA	numwords	0.10	0.01	17.59	0.00
ran_pars	child	sd__(Intercept)	0.46	NA	NA	NA
ran_pars	child	sd__age	0.15	NA	NA	NA
ran_pars	child	cor__(Intercept).age	-0.89	NA	NA	NA

Results using original *McCauley and Christiansen (2011)* reconstruction method

While our implementation of the CBL learner is identical to McCauley and Christiansen’s, our implementation of the *reconstruction task* diverges slightly from theirs: we discard utterances with unknown words and instead provide a second analysis focused on the number of these “un-reconstructable” utterances across age. Our reasoning for discarding utterances with unknown words was that there is no obvious way to give them a valid default transition matrix with other existing chunks. In contrast, McCauley and Christiansen (2011) built a new chunk for each unknown word when reconstructing utterances. This chunk with the unknown word was then assigned a BTP equal to zero with respect to any other chunk in the utterance it originated from. In what follows, we present results using McCauley and Christiansen’s original (McCauley & Christiansen, 2011) reconstruction task method. Because their reconstruction task attempts all utterances, we do not also provide analyses of the number of utterances

containing unknown words.

We analyzed the effect of child age on the model’s reconstruction abilities for the child utterances with a mixed-effects model, including age as a fixed effect and a by-child random intercept with random slopes of age.

First, we used the binary (1: reconstructed correctly, 0: not reconstructed correctly) measure from McCauley and Christiansen (2011) and McCauley and Christiansen (2014)]. The model’s average percentage of correctly reconstructed utterances across children and age points was similar for the locally and cumulatively sampled speech (local: mean = 61.3 %, range across children = 51.6%–69.6%; cumulative: mean = 59.4%, range across children = 50.8%–68.4%). The number of correctly reconstructed utterances decreased with age, regardless of the sampling methods (local: $b = -0.939$, $SE = 0.174$, $p < 0.001$; cumulative: $b = -0.848$, $SE = 0.138$, $p < 0.001$; see Figure 1).

Second, we used our corrected, length-and-repetition-controlled reconstruction score. The model’s average reconstruction score across children and age points was similar for the locally and cumulatively sampled speech (local: mean = 0.12, $SE = 0.01$; cumulative: mean = 0.08, $SE = 0.01$). As in the main text, we centered age in the model so that we could investigate whether reconstruction was greater than chance level at the average age in our sample (2;6 years). Using both sampling methods, we found a significant intercept (local sampling: $b = 0.130$, $SE = 0.016$, $t = 7.911$; cumulative sampling: $b = 0.0789$, $SE = 0.012$, $t = 6.426$), and the model’s reconstruction score did not change significantly over age (local sampling: $b = 0.029$, $SE = 0.016$, $t = 1.854$; cumulative sampling: $b = 0.031$, $SE = 0.013$, $t = 2.333$); see Figure 2). These results show that the model performed at above-chance levels, and indicates age-invariance with the corrected reconstruction score.

Importantly, these results are highly similar to those from our implementation of the

55 CBL model in the main text, which does not attempt to reconstruct utterances with
 56 previously unseen words. These findings suggest that the CBL is not significantly impacted
 57 in its ability to reconstruct children’s utterances in the first four years, regardless of the
 58 minor algorithmic differences in how new words are treated between the original and current
 59 CBL models.

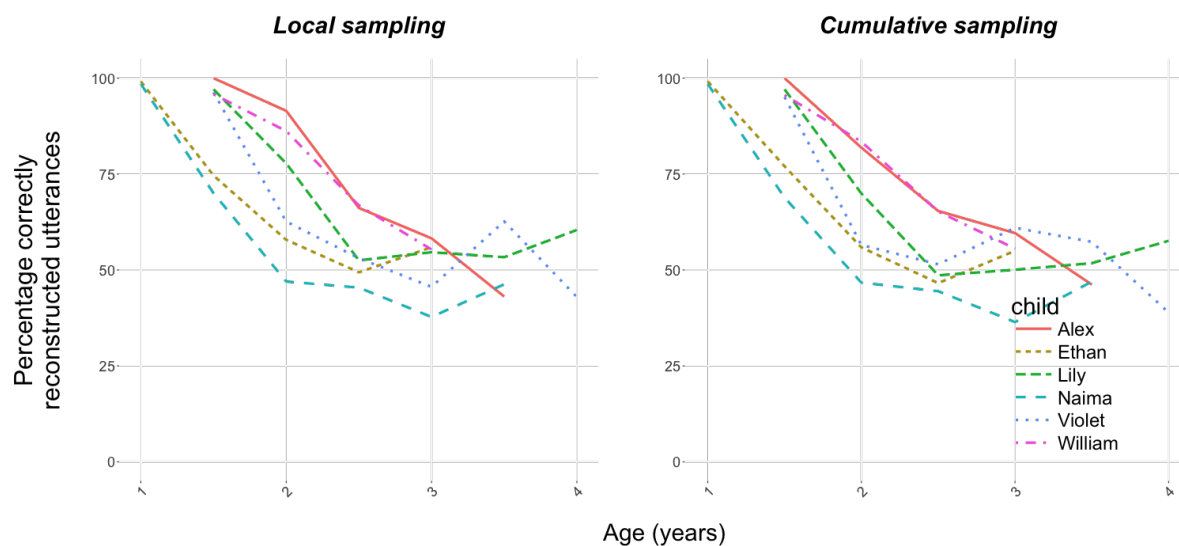


Figure 1. Uncorrected reconstruction scores across the analyzed age range for local (left) and cumulative (right) sampling while using McCauley and Christiansen’s method for handling new words.

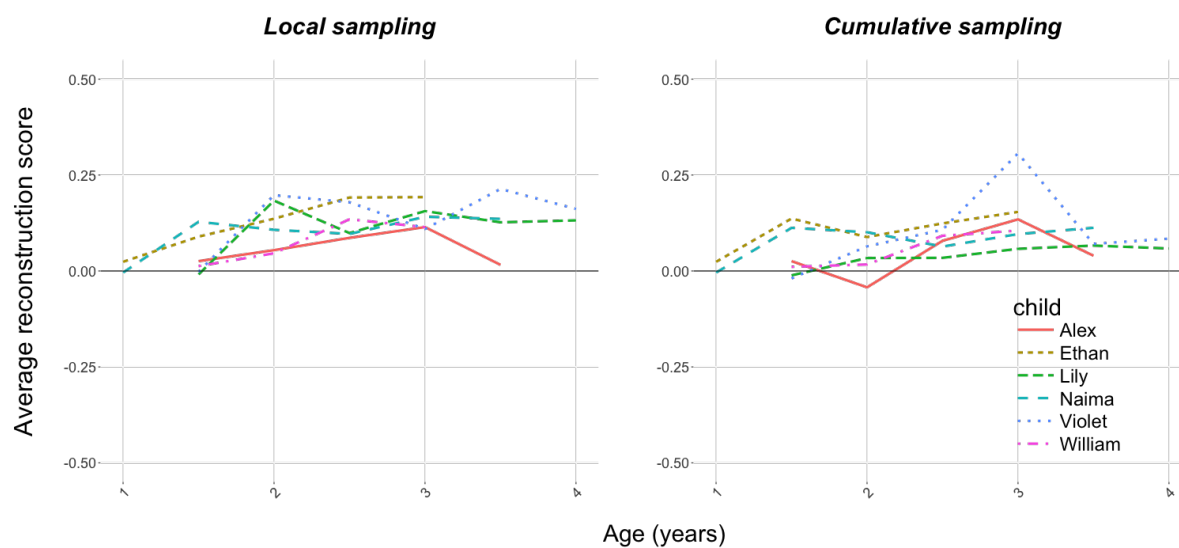


Figure 2. Corrected reconstruction scores across the analyzed age range for local (left) and cumulative (right) sampling while using McCauley and Christiansen’s method for handling new words.

References

60

- 61 McCauley, S. M., & Christiansen, M. H. (2011). Learning simple statistics for language
 62 comprehension and production: The CAPPUCCINO model. *Proceedings of the 33rd*
 63 *Annual Meeting of the Cognitive Science Society*, 1619–1624.
- 64 McCauley, S. M., & Christiansen, M. H. (2014). Acquiring formulaic language: A
 65 computational model. *The Mental Lexicon*, 9(3), 419–436.