


hands-on

https://github.com/spring-fundamentals/hands-on

Spring Boot / Hands-On 2

- Introduce a new interface "Pizza Inventory Client" with two implementations Local- and Remote Pizza Inventory Client. Find a mechanism to load them conditionally.
- The pizza inventory client has one method boolean is Available (String pizzaName)
- The local implementation always returns true
- The remote implementation should return randomly true or false.

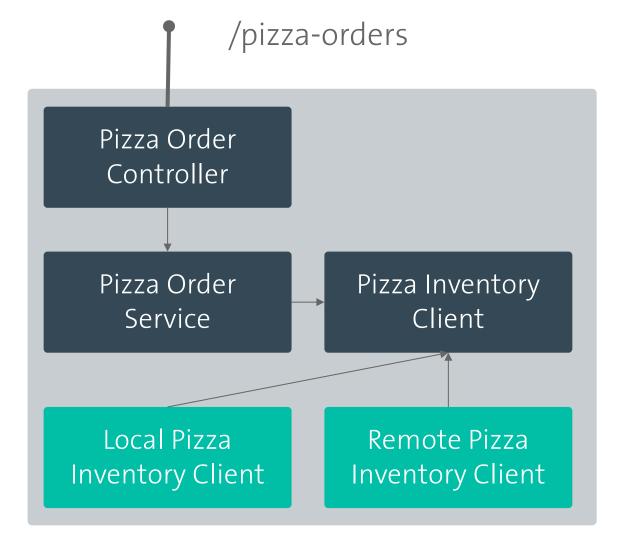

Spring Boot / Hands-On 2

 The pizza order service should inject the new pizza inventory client and in case of a new pizza order it should call the isAvailable method for each ordered pizza.

