Cucumber Report

Start : Apr 18, 12:35:18.719 PM	End : Apr 18, 12:35:34.858 PM	Duration : 16.139 s
Features	Scenarios	Steps
PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 4 FAILED - 0 SKIPPED - 0

#	Feature Name	T	P	F	S	Duration
1	Petco	1	0	1	0	16.139 s
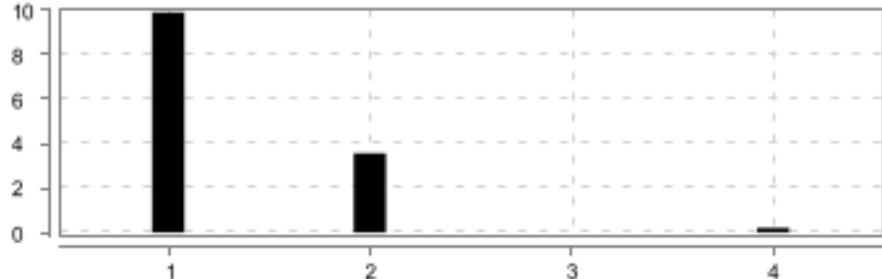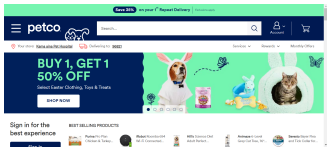
#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Petco	Petco scenario	4	4	0	0	16.131 s

(F)- Petco

FAILED	**DURATION - 16.139 s**	Scenarios Total - 1 Pass - 0 Fail - 1 Skip - 0	1	Steps Total - 4 Pass - 4 Fail - 0 Skip - 0	4
/ 12:35:18.719 PM // 12:35:34.858 PM /					

(S)- Petco scenario

FAILED	**DURATION - 16.131 s**		Steps Total - 4 Pass - 4 Fail - 0 Skip - 0	4
/ 12:35:18.727 PM // 12:35:34.858 PM /				
Petco				
@petco				

#	Step / Hook Details	Status	Duration
1	Given launch the petco	PASSED	9.898 s
	AFTER_STEP - Stepdefinitions.MyStepdefs.as(io.cucumber.java.Scenario)	PASSED	0.801 s
	+		
2	Then Click menu icon	PASSED	3.563 s
	AFTER_STEP - Stepdefinitions.MyStepdefs.as(io.cucumber.java.Scenario)	PASSED	0.807 s
	+		
3	Then Print Second item	PASSED	0.000 s
	AFTER_STEP - Stepdefinitions.MyStepdefs.as(io.cucumber.java.Scenario)	PASSED	0.692 s

#	Step / Hook Details	Status	Duration
	+		
4	Then Close the browser	PASSED	0.200 s
	AFTER_STEP - Stepdefinitions.MyStepdefs.as(io.cucumber.java.Scenario)	FAILED	0.143 s

	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.1.1', revision: 'e8fcc2cecf' System info: host: 'LAPTOP-780R4IRU', ip: '192.168.43.216', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.13' Driver info: org.openqa. selenium.chrome.ChromeDriver Command: [b4e45c20450de8f65a8c73006c2dd76c, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 100.0.4896.88, chrome: {chromedriverVersion: 99.0.4844.51 (d537ec02474b5..., userDataDir: C:\Users\MARIVEL\AppData\Lo...}, goog:chromeOptions: {debuggerAddress: localhost:2280}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:2280/devtool..., se:cdpVersion: 100.0.4896.88, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: b4e45c20450de8f65a8c73006c2dd76c
	  at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	  at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62)
	  at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	  at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	  at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184)
	  at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167)
	  at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142)
	  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543)
	  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:598)
	  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602)
	  at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:333)
	  at Stepdefinitions.MyStepdefs.getByteScreenshot(MyStepdefs.java:18)
	  at Stepdefinitions.MyStepdefs.as(MyStepdefs.java:24)		

(Step) AFTER_STEP - Stepdefinitions. MyStepdefs.as(io.cucumber.java. Scenario)

(S) Petco scenario

(F) Petco

(Step) AFTER_STEP - Stepdefinitions. MyStepdefs.as(io.cucumber.java. Scenario)

(S) Petco scenario

(F) Petco

(Step) AFTER_STEP - Stepdefinitions. MyStepdefs.as(io.cucumber.java. Scenario)

(S) Petco scenario

(F) Petco