



Avid[®] Interplay[®] Web Services API Overview Guide

November 2015

	Symbols and Conventions	ii
	If You Need Help	iii
	Avid Training Services	iii
1	Introduction	1
2	Features	2
3	Use Cases	2
4	Architecture	3
5	System and Software Requirements	4
6	Package and API	5
7	Development Infrastructure	5
	Development Pathways	6
	Developing and Testing on a Single Machine.....	6
	Useful Tools	6
8	Development vs Deployment	7
9	Licensing	7
10	Important Log Files	8
11	Before You Begin Developing a Client Application	8
12	Installation Instructions.....	10
	Compatibility.....	10
	Interplay Web Services Installation Check List	10
	Network Considerations	11
	Copying the Interplay Installers to a Server	11
	Installing the Interplay Web Services SDK	12
	Verifying the Success of the Installation	13
	Configuring and Testing the Interplay Web Services Instance	13
13	Suggestions for Further Reading	16

Symbols and Conventions

Avid documentation uses the following symbols and conventions:

Symbol or Convention	Meaning or Action
	A note provides important related information, reminders, recommendations, and strong suggestions.
	A caution means that a specific action you take causes you to lose data.
<code>Courier</code>	Courier on gray background indicates code examples.
<code>Courier blue font</code>	Courier blue font on gray background emphasizes code in examples.
	The arrow indicates that line breaks in code examples are not allowed when using or writing comparable code.
<i>Italic font</i>	Italic font is used to emphasize certain words.
Courier bold font	Courier bold font identifies text that you type.
>	This symbol indicates menu commands (and subcommands) in the order you select them. For example, File > Import means open the File menu and then select the Import command.
<placeholder, variable>	Angle brackets indicate placeholders or variables.
UPPER CASE	Indicates names of processes, process classes, data model attributes, legal lists, legal list values, states of tasks, and templates

If You Need Help

If you are having trouble using your Avid product:

1. Check the latest information that might have become available after the documentation was published:
You should always check online for the most up-to-date documentation because the online version is updated whenever new information becomes available. To view the online versions, visit the Knowledge Base at www.avid.com/support.
2. Check the documentation that came with your Avid application or your hardware for maintenance or hardware-related issues.
3. Visit the online Knowledge Base at www.avid.com/support. Online services are available 24 hours a day, 7 days a week. Search this online Knowledge Base to find answers, view error messages, to access troubleshooting tips, download updates, and read or join online message-board discussions.

Avid Training Services

Avid makes lifelong learning, career advancement, and personal development easy and convenient. Avid understands that the knowledge you need to differentiate yourself is always changing, and Avid continually updates course content and offers new training delivery methods that accommodate your pressured and competitive work environment. For information on courses/schedules, training centers, certifications, courseware, and books, please visit www.avid.com/support and follow the Training links, or call Avid Sales at 800-949-AVID (800-949-2843)

1 Introduction

Welcome to the **Interplay Web Services Application Programming Interface (API)**. Avid Interplay | Production is an asset management solution for managing media in shared storage environments. The Interplay Web Services API allows third-party software developers to access media file location, resolution, approximate file size, metadata, and selected services managed by Interplay Production, and to trigger features. For example, you could use the Interplay Web Services API to add additional metadata to assets coming from an external digital asset management system. Similarly, you could use the Interplay Web Services API to schedule Interplay Production Services Engine archive/restore jobs.

Speaking in general terms, a web service is a software system in support of interoperability, permitting machine-to-machine communication over HTTP. In this case, the Interplay web services facilitate communication between the client application you develop, and Interplay | Production. Using the terminology of web services architecture, the Interplay Web Services API defines access to the Avid-supplied service provider (also sometimes called a *provider agent*). In Interplay Web Services, provider agents expose selected functionality of the Interplay Engine, Interplay Transfer Engine, and Interplay Production Services Engine.

For those familiar with Interplay Access, it can be helpful to think of Interplay Web Services as exposing functionality similar to that available via Interplay Access. The Interplay Web Services API supplies the operations you need to invoke Access-like functionality from your application or service. Importantly, and similarly to Access, your application gains access to Interplay Production services using the HTTP protocol. For example, the web services expose the functionality allowing you to view, modify and add metadata to the Avid Interplay Engine (the component of Interplay Production housing the asset database).

Like other web services, the Interplay Web Services API uses Simple Object Access Protocol (SOAP) messages transmitted and received via HTTP in an XML serialization. The interfaces are defined in a series of Web Services Description Language (WSDL) documents that are supplied as part of the API. The WSDL documents are machine-readable — and human-readable, with effort — XML documents that describe both the services and permitted operations. XML Schema Definition (XSD) documents are also supplied, in which the corresponding data types are described. By loading these documents into your SOAP-ready development environment — such as IntelliJ IDEA — you can easily observe the services, methods and data types that have been exposed, and quickly develop web applications compatible with Interplay Web Services and Interplay Production.

Note: Interplay Production (via the Interplay Engine) maintains a database of metadata assets pertaining to media under management in Interplay. It does not store any media. Similarly, Interplay Web Services provides access to assets which reference media, but does not provide direct access to media. Thus Interplay Web Services API cannot be used to transfer Avid media in or out of storage, for example. It is used to transfer metadata in and out of Interplay. To transfer media in and out of storage use the Interplay | Transfer API or another transfer service such as Avid Media | Director.

2 Features

This section highlights selected features of the Interplay Web Services API. For a detailed list of features and functionality, refer to the ***Avid Interplay Web Services White Paper***.

- **Asset Management:** Check-in/out AAFs to/from Interplay Production; create master clips for tape sources (for batch capture), create sub-clips/shotlists; name/rename assets and folders; search for assets by category, resolution, usage; obtain asset details (name, track, status, path, format, size, etc.); move/copy/delete assets in Interplay Production; list the direct children of any folder (Avid assets, file assets, folders).
- **Workspace Management:** List indexed Avid ISIS and Avid Unity MediaNetwork workspaces.
- **Workflow Automation:** Perform workgroup-to-workgroup transfer of assets; send to playback; trigger and manage numerous Avid Media Services jobs. These include invoking archive, restore, transcode, and mixdown jobs. Interplay Web Services automatically leverages the Avid Interplay Production Services job brokering infrastructure and technology.
- **User and Group Management:** Get/create/modify Interplay users and user groups; modify user group permissions; add/remove users from groups.
- **Infrastructure Services:** In addition to the user, group and workspace management functionality: obtain details of transfer engines and associated devices; obtain configuration and version information for the Interplay Engines and Archive Engines for configured workgroups, and Interplay Web Services itself.
- **Exclusions:** You cannot use Interplay Web Services to directly operate on media. For example, it cannot be used to perform edits, nor to add media to storage. Note, however, that the Interplay Web Services API exposes all available Distributed Media Services (DMS) functionality (including archive and move functionality), and some Send to Playback functionality. For advanced use-cases you can develop your own service using the **Avid Media Toolkit** (C++ programming required).

3 Use Cases


The following represent typical uses for the Interplay Web Services API.

- **Assign Custom Attributes:** Use Interplay Web Services to add custom metadata to assets in coordination with an external system. For example, for tracking purpose you could add a tracking number to asset metadata. Or, you could use Interplay Web Services to add a custom tag to the contents of particular folders, for example.
- **Automated Report Generation:** Use Interplay Web Services to generate custom usage reports by scanning Interplay | Production for new additions based on the date. Determine who created the new additions, and what folder they are in. Or, use Interplay Web Services to generate storage-use reports, by determining how much storage remains on the ISIS, what are the largest files, who owns them, etc.
- **Organize Assets:** Use Interplay Web Services to automatically sort media into folders based on permissions or other attributes.

- **Manage Jobs:** Sites with Interplay Transfer or Interplay Production Services can use Interplay Web Services to automate job submissions for Send to Playback, transcoding, etc.

4 Architecture

Interplay Web Services consists of three Avid Interplay clients running on the server where you install Interplay Web Services, and an Avid-supplied server enabled with the web services. Your Interplay Web Services client application sends SOAP requests to the Interplay Web Services server via the API. The server invokes the request on the appropriate Interplay client, which communicates directly with its corresponding Interplay engine where the request is carried out. Similarly, SOAP responses are returned from the Interplay Web Services server to your application. This is shown in the following illustration:

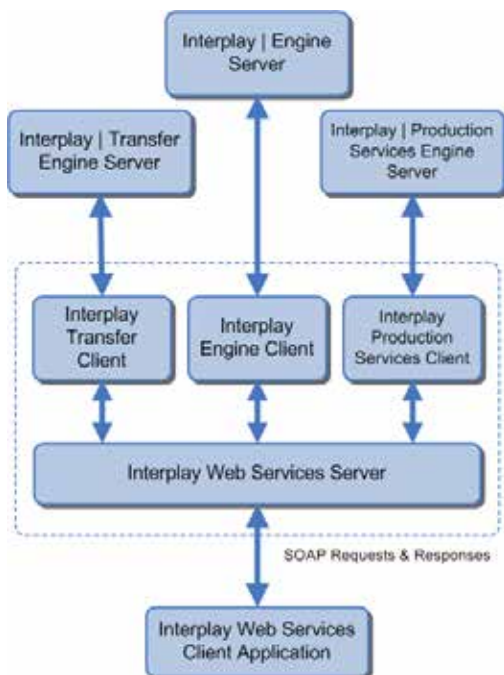

For example, suppose you create a custom application to move Avid assets between workgroups. Your application will send the appropriate SOAP requests (as defined and invoked via the API) to the configured Interplay Web Services server. Since your goal is to transfer assets, you invoke Interplay Web Services *send-to-workgroup* transfer service operations. This includes the *SendToWG* operation to perform the actual transfer. The Interplay Web Services server responds with the job ID, which you can then use to manage and monitor the job as it is carried out by the Interplay Transfer Engine.

Each of the three Avid Interplay clients serves a distinct purpose:

- **Interplay Engine Client:** This client is used to create, read, update and delete assets, users, groups and permissions. Additionally, it can send a command to the Interplay Engine to delete media. No other actions can be performed using Web Services through the Interplay Engine client.

- **Interplay Transfer Client:** This client lets you tell the Interplay Transfer Engine which asset you want to send to another workgroup or to Send to Playback (STP). For STP, only sequences, masterclips, and subclips are permitted. These must be ready for playback, since the Interplay Transfer Client and Interplay Transfer Engine are not capable of mixdowns, transcodes or effect renders.
- **Interplay Production Services Client:** This client lets you tell the Interplay Production Services Engine which asset you want to send to which Avid Interplay Production Services provider. You can register new jobs via profiles or specific parameters, get job status, cancel jobs, etc.

To summarize, the Interplay Web Services server receives all SOAP requests from your custom application, translating them into actions understood by the Interplay clients. Responses from the Interplay clients are wrapped and provided back to your custom application as SOAP responses. SOAP requests and responses are formatted as XML and are human readable with some effort. It may be helpful to think of the Interplay Web Services server as a post office, with requests and responses sent as appropriately encoded e-mail.

5 System and Software Requirements

Before installing the Interplay Web Services API, please review the system and software requirements:

- **Windows Server:** Interplay Web Services requires a Windows-based machine (typically configured as a server). The load on the Interplay Web Services machine depends on the use-case, which should be analyzed by the third-party developer prior to deployment. For example, a use-case with significant *create* and/or *update* requests applies a load to the Interplay Web Services machine. A use-case that leverages search functionality applies a load to the back-end.

In addition, all servers required by your workflow (i.e. configured in Interplay Web Services) must be reachable from the Interplay Web Services server. If the ISIS client is installed on the Interplay Web Services machine, then the ISIS server has to be accessible through at least a Zone 4 network and the ISIS client correctly configured. Note that Zone 4 provides an unknown (but not necessarily insufficient) QoS. If the Avid Media Toolkit (AMT) is used for ISIS read/write then a Zone 3 connection is recommended.

For more information see the Avid KB article “[Network Requirements for ISIS and Interplay](#)”.

- **Interplay | Production:** The Interplay Web Services API is included in the Interplay Production Server installation package zip file, and is installable through the Interplay Production installer user interface. The Interplay Web Services can run stand-alone, but configuration with an Interplay Production system is essential, for meaningful activity.
- **Avid Service Framework (Interplay Web Services 3.1 and earlier):** For IPWS versions 3.1 and earlier, the Avid Service Framework (ASF) client is needed to configure Workgroup (WG) settings. ASF is installed via a separate installer.

ASF is a common service distribution framework that enables the configuration and monitoring of the Avid services and applications in an Avid workgroup. It comes in both client and server form, and is installable through the Interplay Production installer user interface.

Most Interplay Web Services client applications can operate without installation of the Avid Service Framework. However, the Avid Service Framework provides convenient access to some of the logs produced by Interplay Web Services and other Interplay services of interest.

- **Avid Health Monitor (optional):** An application that enables you to view the health of an Avid system at a glance, displaying a variety of information provided by each registered Avid component on your network, with warning notifications. Installed as part of the Avid Service Framework.
- **Interplay | Access (optional):** Amongst its many features, Interplay Access lets you explore the Interplay Production asset database via a lightweight client application. It is helpful for viewing the asset database during development of your Interplay Web Services application. It is included in the Interplay Production Client installation package and is installable through the installer user interface.
- **ISIS Client (optional):** Since Interplay Web Services interact with the Interplay Production asset database (rather than stored media), Avid ISIS shared storage is not absolutely essential to the development or operation of your Interplay Web Services client application. However, some Interplay Web Services requests require the presence of an ISIS client. Similarly to the presence of Interplay Production, the presence of an ISIS client is essential for specific activities such as transfer “check” operations — *CheckSequenceIsReadyForXfer()* and *CheckSequenceIsReadyForMixDown()*— which will return *media offline* errors otherwise.

6 Package and API

The Interplay Web Services API is delivered as a single installer, and is part of the Interplay Production Server installation package zip file. It is installable through the Interplay Production installer user interface, or directly by way of its own installer.

7 Development Infrastructure

While the Interplay Web Services server can run in a stand-alone environment, this is not enough for the development of a working client application. In a stand-alone environment, most Interplay Web Services operations invoked by your application cannot be carried out and will return an error. As noted, the presence of a licensed Avid Interplay Production system configured with Avid ISIS shared storage is needed, for meaningful development. (Advanced workflows without an Avid ISIS are possible, but are beyond the scope of this document.) In addition, the Interplay Web Services server must be configured with appropriate workgroup name(s) and server mappings.

Note the following:

- **Development:** For development and testing, it is recommended that you install Interplay Web Services on a dedicated host. (The exception to this rule is discussed below. See “[Developing and Testing on a Single Machine](#)” on page 6.) It is not recommended that you install and run Interplay Web Services on the same server as Interplay Production.
- **Deployment:** For deployment, the Interplay Web Services must be run on a dedicated Windows host.
- **Dedicated Host:** For deployment is recommended that you install Interplay Web Services on a client machine together with your third-party client application. Should your use-case warrant it, install your third-party client application on a dedicated host.
- **ISIS:** Workflows without an ISIS are possible, but beyond the scope of this document. Please consult your Avid representative.
- **Port 80:** Interplay Web Services requires the exclusive use of port 80.

Development Pathways

The following development pathways are possible:

- **Certification and Sandbox** (preferred): Registering for certification gives you access to an Interplay Web Services development sandbox. Contact your Avid representative for details.
- **Developer License:** Obtain a developer license to install Interplay Production and other needed software. Contact your Avid representative for details. Note that there may be costs associated with developer licenses and associated software and infrastructure.
- **Test/Lab Environment:** Install (or make use of) Interplay Web Services in a test or lab environment.
- **Customer Installation** (not recommended): Install (or make use of) Interplay Web Services within a customer facility.
- **Leased environment:** Please contact your Avid representative for details.

Developing and Testing on a Single Machine

In some circumstances you might have no choice except to run Interplay Web Services and Interplay Production on a single machine, during development and testing. Single-machine development and testing is possible. However, since Interplay Web Services requires exclusive use of port 80, this setup requires changing the port used by Interplay Web Services.

For guidelines on changing the port used by Interplay Web Services, see “*Configuring the Avid Interplay WS Port*” in the ***Interplay Web Services Release Notes***.

Useful Tools

The following table lists tools that will be helpful to validate your workflow and speed development of your Interplay Web Services client application:


Application	Description
Interplay Access	Provides the broadest access to Interplay Production. Use it to view and navigate folders, etc., and to perform workgroup-to-workgroup transfers. Installing Interplay Access also installs Interplay Administrator.
Interplay Administrator	Use it to configure a working Interplay environment and view/add/delete users/groups.
Media Composer	Use it to ingest media, and validate send-to-playback (STP) infrastructure.

8 Development vs Deployment

At all stages of development, testing and deployment, Interplay Web Services must be hosted on a dedicated server. This is shown in the following illustration.

For the exception, see “[Developing and Testing on a Single Machine](#)” on page 6.

Dedicated Server for Development, Testing, and Deployment

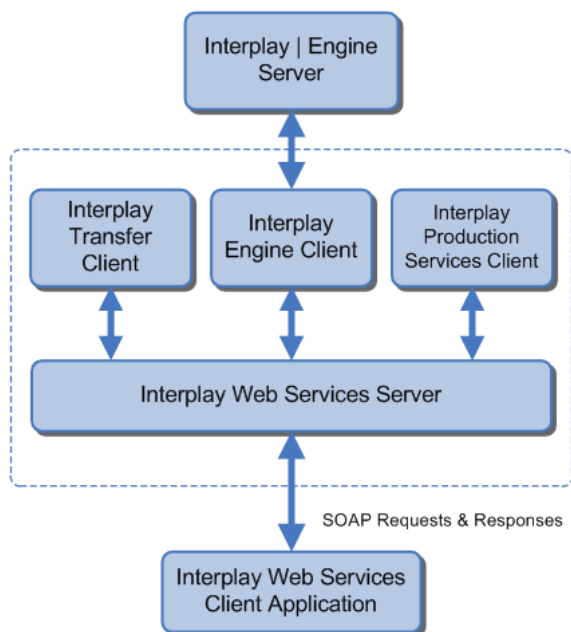

9 Licensing

Please note the following with respect to licensing:

- **License:** Interplay Web Services runs without a license but needs a licensed Interplay Production to operate.

- **Credentials:** You must supply Interplay Production log-in credentials in the header of each SOAP request.
- **Tip:** Consider creating a dedicated Interplay Web Services user in the Interplay Production user database. For instructions, see the *Interplay | Production Best Practices Guide*.

10 Important Log Files

Monitoring the log files of the following applications and services will be helpful for development, debugging and deployment of your Interplay Web Services client application.

Application / Service	Log Files
Interplay Web Services	Generates log files on the server where it is installed. Logs are accessible via the Service Framework Diagnostics tool, installed with the Avid Service Framework. For information, see the <i>Avid Service Framework User's Guide</i>. Some logs are not available through the application, and must be located manually in the logs folder of the Interplay Web Services destination server.
Interplay Production	Generates logs for numerous services; accessible via the Service Framework Diagnostics tool.
Interplay Engine	Interplay Engine logs media and metadata deletion operations, media move operations, plus logs information, warning and error messages generated by the Interplay Engine Server. Stored in C:\Program Files\Avid\Avid Interplay Engine\Logs\Machines\[COMPUTER NAME]*.log
Interplay Transfer Engine	Usually produces more than one log, in the <i>ProgramData</i> folder. Please consult the Interplay Transfer Engine documentation.
Interplay Production Services	Logs are specific to each service provider and are stored under the <i>ProgramData</i> folder. Please consult the Interplay Production Services documentation.

11 Before You Begin Developing a Client Application

Before you begin developing an Interplay Web Services client application, make sure your skill-set, Interplay Production infrastructure, and development environment match the requirements listed in this section.

Please note the following prerequisite skills:

- **SOAP Development:** Since the Interplay Web Services API is a SOAP/XML-based messaging protocol, experience developing SOAP applications, while not essential, will prove helpful.

- **Prototyping and Debugging:** Experience with a SOAP functional testing solution (such as SoapUI) will be helpful for prototyping and debugging.
- **Interactive Development Environment:** Proficiency in a SOAP-ready Interactive Development Environment (IDE) such as IntelliJ IDEA will speed development.
- **Interplay Production Workflow:** A clear understanding of the Interplay Production workflow you client application will integrate with and/or enhance is essential. Familiarity with the infrastructure required, and log files produced is recommended.

Ensure the correct Interplay Production infrastructure is in place to meet the needs of your Interplay Web Services client application:

- **Interplay Engine:** Manages the Interplay Production online database of users and assets. Needed by all Interplay Web Service applications.

For more information, see the *Interplay Production Software Installation and Configuration Guide*.

- **Interplay Archive Engine:** Manages the Interplay Production offline database of users and assets. Runs on its own server. Needed by some Interplay Web Services applications, to archive.

For more information, see the *Interplay Production Services Setup and User's Guide*.

- **Interplay Transfer Engine:** Needed to move Avid assets (media and metadata) and manage the transfer of assets to and from workgroups in an Interplay | Production environment. You can also use Interplay Transfer in a standalone environment to move assets between workstations. Interplay Transfer also transfers assets to and from supported third-party applications, devices and archive integration systems.

For more information, see the *Interplay | Transfer Setup and User's Guide*.

- **Interplay Production Services:** The Interplay Production Services and Production Services Provider servers are needed to archive, copy, publish, restore, STP Encode, and transcode.

For more information, see the *Interplay Production Services Setup and User's Guide*.

- **Send to Playback:** In the context of Interplay Web Services, send to playback (STP) is the transfer of an Avid asset to an external video server, playback device, FTP server, or other Interplay Transfer Engine enabled device.

For more information, see the *Interplay | Transfer Setup and User's Guide*.

Ensure you have the optimal development infrastructure in place:

- **Interplay Web Services:** This should generally reside on a dedicated server for development, testing and deployment. For the exception, see “[Developing and Testing on a Single Machine](#)” on page 6.

- **IntelliJ IDEA:** Use this, or another IDE equipped to handle SOAP development, to develop your Interplay Web Services client application. That is, you must use an IDE that can load WSDL and XSD files to present the functionality exposed by Interplay Web Services API.
- **Avid Service Framework:** Provides logging, monitoring and management features. Includes the Avid Diagnostics tool for viewing log information streaming in real time, retrieving logs for selected workgroup services, and overriding the logging levels of remote services, including the Interplay Web Services. Also includes the Avid Health Monitor application to view the health of your Avid system at a glance, including alerts.
- **Interplay Access:** Use to browse, search and work with assets in the Avid Interplay database.
- **Media Composer:** Convenient to ingest media, and verify STP functionality.

12 Installation Instructions

Installing Interplay Web Services is a straightforward process that should take only a few minutes. This section provides typical Interplay Web Services installation steps.

In general, a single Interplay Web Services instance should be enough to manage one or more Interplay Production workgroups. However, in some cases it may make sense to run a separate Interplay Web Services instance per application/workflow. This distributes the load and can spread failure impact for different applications.

Compatibility

- Whenever possible, use the latest Interplay Production engines (including patches) and most up-to-date Interplay Web Services.
- Even if you have an older version of Interplay Production, as a general rule you should use the latest Interplay Web Services. This allows your client application to take advantage of the latest features and fixes.
- If you are unsure about the compatibility of your workflow for a particular pairing of Interplay and Interplay Web Services, please consult your Avid Connectivity Partner Program representative.

Interplay Web Services Installation Check List

This section contains a checklist related to setting up the server for Interplay Web Services:

- .. Disable memory- and CPU-intensive applications and services on the server
- .. Disable Windows desktop effects
- .. Remove/disable non-Avid-qualified AV software
- .. Remove/disable non-Avid-qualified firewalls
- .. Install the Avid System Diagnostic Tool (Avid Collect Tool) so you have access to logs

Network Considerations

This section contains a checklist related to setting up the network environment for Interplay Web Services.

- “ Ensure the server is connected to a network with access to Interplay Production servers to which you will send requests using the Interplay Web Services API. This can include the following servers: Online, Archive, Transfer, Production/Media Services Engines. In some cases it can include an ISIS server.
- “ Ensure no other service on the box occupies the http (80) and https (443) ports
- “ Ensure the Interplay Web Services package matches the Interplay Production version

To check for open ports:

1. Display all active connections to ports 80 and 443 ports in numerical form using the *netstat* command:

```
netstat -an | find "80"  
netstat -an | find "443"
```

2. If the output indicates ports 80 or 443 are in use (i.e. includes a line containing “:80” or “:443”), determine the executable involved in using the port (administrator permissions required):

```
netstat -anb
```

Copying the Interplay Installers to a Server

For convenience, copy the Interplay Installers to the server where you wish to install the Interplay Web Services SDK so that you have easy access to installer files. In this topic, the folder that contains the software installation files is referred to as the software kit.

To copy the Interplay Installers to a server:

1. Log in as Administrator.
2. Make a folder for the software kit on the root directory (C:\) For example:

```
C:\Installers\Interplay_v3.3.0_Servers
```

3. Open the folder containing the installer.
4. Copy the software kit into the new folder you created. For example, use CTRL-A to select all the files and folders in the software kit and copy and paste to the new folder you created.


Installing the Interplay Web Services SDK

In this step you install the Interplay Web Services SDK using the Interplay Production installer. Alternately, you could “drill down” to the folder containing the Interplay Web Services SDK installer and launch it directly.

To install the Interplay Web Services SDK:

1. Log in as Administrator.
2. Navigate to the software kit folder (e.g. C:\Installers\Interplay_v3.3.0_Servers) and double-click the Autorun.exe file.

The Interplay Installer splash screen opens.

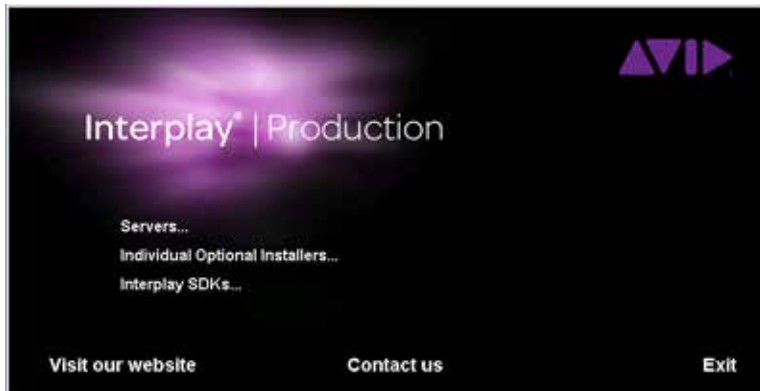

3. Click on the **Interplay SDKs** then the **Web Services** item to start the installation.

After a moment, the Avid Interplay Web Services installation wizard appears.




4. Accept the license and follow the instructions in the installation wizard to install the SDK.
5. Click **Finish** to exit the Web Services installer and click **Exit** to close the Interplay Production installer.

Verifying the Success of the Installation

In this step you verify the success of the installation.

To verify the success of the installation:

1. On the server where you installed Interplay Web Services, launch the Windows *Services* administrative tool (the application used to start, stop and configure Windows services).
2. Locate the Avid Interplay WS service and make sure its running. If not, start it.

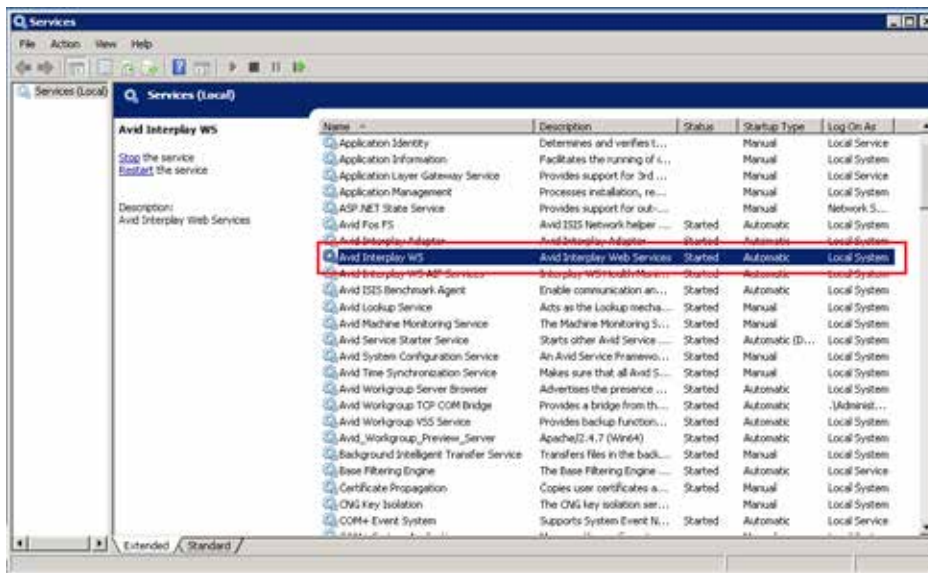

Configuring and Testing the Interplay Web Services Instance

In this step you configure the Interplay Web Services server via a web page.

Be sure to have the following information on hand:

- Interplay Production server hostnames, including:
 - o Interplay Production Engine (aka “Interplay Engine” or “online engine”)
 - o Interplay Archive Engine
 - o Interplay Production Services Engine (formerly Media Services Engine)

The above servers should be configured, running and accessible from the Interplay Web Services host.

- An Interplay Production username and password to run a test connection.


Note the following:

- The Interplay Web Services configuration web page described in this section is the only mechanism supported for configuring an Interplay Web Services instance.
- Since each Interplay Web Services instance is fully standalone, you can run multiple instances on separate hosts. This is similar to running multiple Interplay Access clients simultaneously.
- Organizing redundancy/failover/distributed systems on top of Interplay Web Services is possible, but is beyond the scope of this document.

To configure and test Interplay Web Services:

1. Launch a web browser and enter the URL of the Interplay Web Services server in the address bar (e.g. `http://<hostname>`).

The Interplay Web Services root page appears.

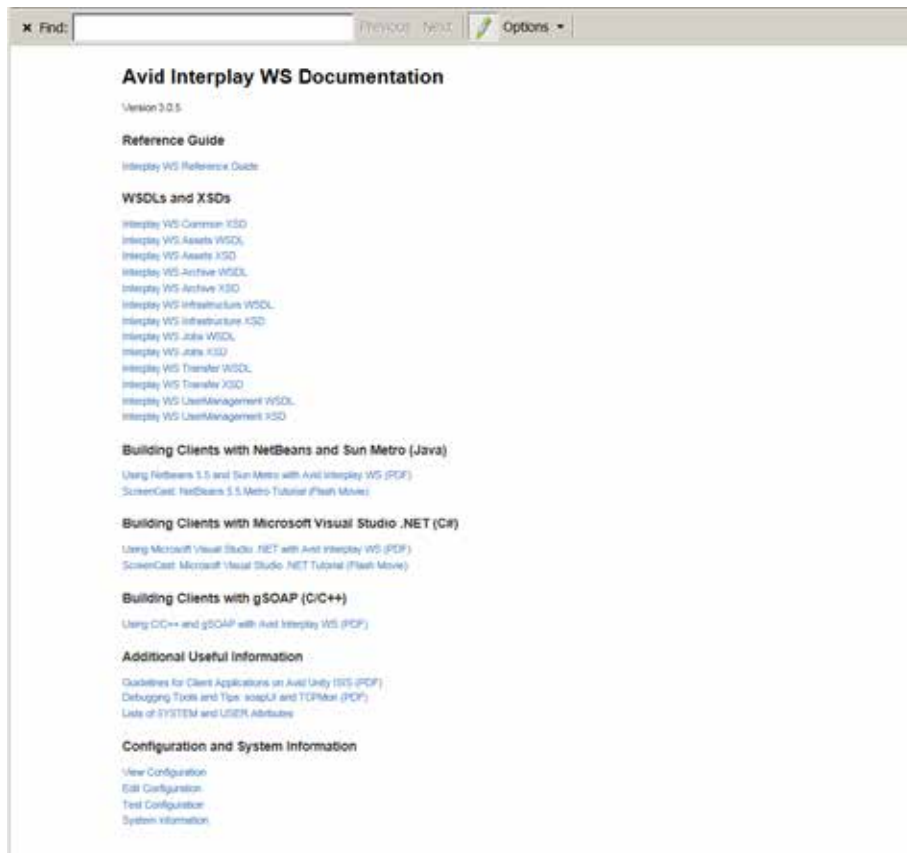

2. Click on the **Edit Configuration** link.

The Interplay WS Configuration page appears.

Interplay WS Configuration

Workgroup to Server Mappings

[ADD](#)

WebServices Workgroup Name	Primary Engine Hostname	Archive Engine Hostname	Media Service Engine Hostname	Operation
ARCH				remove
WG52				remove
WG5				remove
WG4				remove
APIWG				remove
IETWG				remove
MIGTEST				remove

[Submit](#) [Home](#)

- Fill in the table with the information for your Interplay Production topology:

Column Heading	Description
WebServices Workgroup Name	The virtual URL qualifier that identifies a set of Interplay engines. You can use the workgroup name (e.g. AvidWorkgroup) for convenience.
Primary Engine Hostname	The primary engine hostname is the Interplay Production Engine hostname for requests to the online engine and the Interplay Archive Engine hostname for requests to the archive engine (e.g. api-eng).
Archive Engine Hostname	The Interplay Archive Engine hostname for the primary engine (e.g. api-arch).
Media Service Engine Hostname	The Interplay Production Services engine hostname for the primary engine (e.g. api-mse).

Note: At least one Primary Engine hostname is required for a meaningful Interplay Web Services setup. Without a server, it is not possible to execute a successful Interplay Web Services request. If you do not have an Interplay Archive Engine and/or an Interplay Production Services Engine, leave those fields blank.

Use the **ADD** link to add more engine sets for this Interplay Web Services instance.

- When satisfied, click the **Submit** button, then the **Home** button.
- To test the configuration, click the **Test Configuration** link.

The test form appears in the browser.

Interplay WS Test

WebServices Workgroup Name: ARCH

User Name:

Password:

[Test](#)

- Select an engine set for testing from the drop-down list, and enter a valid set of Interplay Production credentials into the fields. Click the **Test** button to verify that the Interplay Web Services instance can reach the engines in that set.

Note: If your primary engine is an Interplay Archive Engine the test will likely fail. This is normal, since an Interplay Archive Engine does not usually have assets in its database.

13 Suggestions for Further Reading

With the basic architecture of Interplay Web Services now understood, and the SDK installed and configured, here is where to look for more information:

Document	Description
Avid Interplay Web Services White Paper	A non-technical overview of the functionality provided by the Interplay Web Services API.
Interplay Web Services Reference Guide	A detailed technical description of the services, data types, operations, etc., provided by the Interplay Web Services API. Includes code samples. In HTML format.
3rd Party Guidelines for Avid Platform Certification	A guide to creating third-party solutions that integrate well with the Avid ecosystem, and comply with Avid certification requirements.