HOMEWORK 0
MARK BLANKSON-HEMANS

```
The default interactive shell is now zsh.
To update your account to use zsh, please run `chsh -s /bin/zsh`.
For more details, please visit https://support.apple.com/kb/HT208050.
[148-100-146-121:~ mark$ pwd
/Users/mark
[148-100-146-121:~ mark$ java -version
java version "12" 2019-03-19
Java(TM) SE Runtime Environment (build 12+33)
Java HotSpot(TM) 64-Bit Server VM (build 12+33, mixed mode, sharing)
148-100-146-121:~ mark$ ▌
```

```
The default interactive shell is now zsh.
To update your account to use zsh, please run `chsh -s /bin/zsh`.
For more details, please visit https://support.apple.com/kb/HT208050.
[148-100-146-121:~ mark$ pwd
/Users/mark
[148-100-146-121:~ mark$ java -version
java version "12" 2019-03-19
Java(TM) SE Runtime Environment (build 12+33)
Java HotSpot(TM) 64-Bit Server VM (build 12+33, mixed mode, sharing)
[148-100-146-121:~ mark$ javac -version
javac 12
148-100-146-121:~ mark$ ▌
```
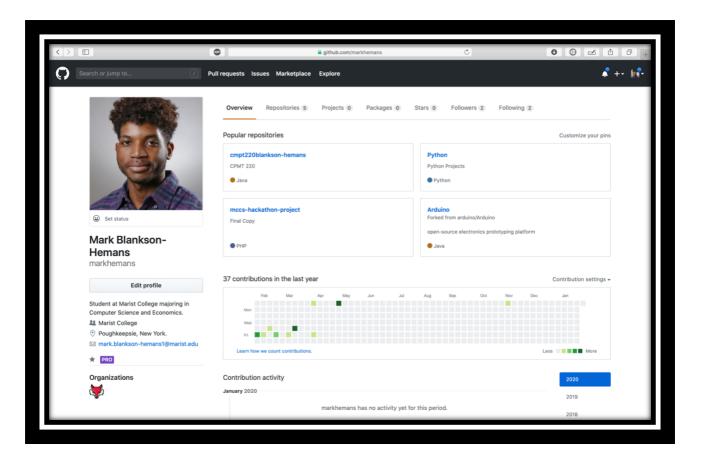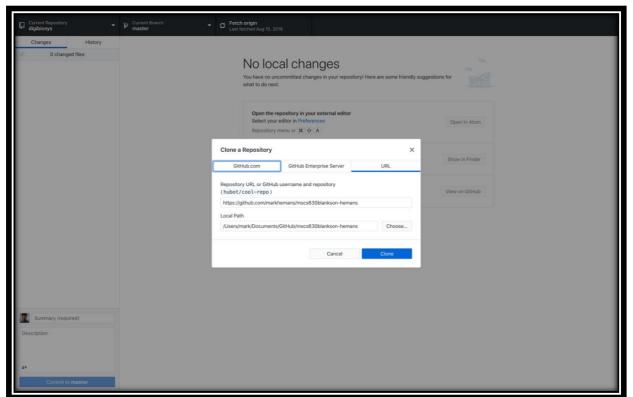
https://github.com/markhemans/mscs630blankson-hemans.git

Search or jump to...   Pull requests Issues Marketplace Explore

markhemans / **mscs630blankson-hemans** Private

⊙ Unwatch ▾ 1   ★ Star 0   ⑂ Fork 0

<> Code   ⓘ Issues **0**   ⑂ Pull requests **0**   ⊙ Actions   ⊞ Projects **0**   ▦ Wiki   ⛨ Security   ⊿ Insights   ⚙ Settings

Quick setup — if you've done this kind of thing before

⊞ Set up in Desktop   or   HTTPS   SSH   https://github.com/markhemans/mscs630blankson-hemans.git   ⎘

Get started by creating a new file or uploading an existing file. We recommend every repository include a README, LICENSE, and .gitignore.

...or create a new repository on the command line

```
echo "# mscs630blankson-hemans" >> README.md
git init
git add README.md
git commit -m "first commit"
git remote add origin https://github.com/markhemans/mscs630blankson-hemans.git
git push -u origin master
```

...or push an existing repository from the command line

```
git remote add origin https://github.com/markhemans/mscs630blankson-hemans.git
git push -u origin master
```

...or import code from another repository

You can initialize this repository with code from a Subversion, Mercurial, or TFS project.

Import code