

Mappel

Generated by Doxygen 1.8.11

Contents

1	MAPPEL	2
2	Install	5
3	OMPExcceptionCatcher	8
4	Namespace Index	9
4.1	Namespace List	9
5	Hierarchical Index	10
5.1	Class Hierarchy	10
6	Class Index	13
6.1	Class List	13
7	File Index	16
7.1	File List	16
8	Namespace Documentation	20
8.1	mappel Namespace Reference	20
8.1.1	Detailed Description	26
8.1.2	Typedef Documentation	26
8.1.3	Function Documentation	29
8.1.4	Variable Documentation	45
8.2	mappel::estimator Namespace Reference	47
8.2.1	Class Documentation	48
8.2.2	Enumeration Type Documentation	50
8.2.3	Function Documentation	50
8.3	mappel::estimator::subroutine Namespace Reference	51
8.3.1	Detailed Description	51

8.3.2	Function Documentation	51
8.4	mappel::mcmc Namespace Reference	54
8.4.1	Function Documentation	54
8.5	mappel::methods Namespace Reference	55
8.5.1	Detailed Description	58
8.5.2	Function Documentation	59
8.6	mappel::methods::debug Namespace Reference	67
8.6.1	Function Documentation	67
8.7	mappel::methods::likelihood Namespace Reference	68
8.7.1	Function Documentation	69
8.8	mappel::methods::likelihood::debug Namespace Reference	71
8.8.1	Function Documentation	71
8.9	mappel::methods::objective Namespace Reference	72
8.9.1	Function Documentation	74
8.10	mappel::methods::objective::debug Namespace Reference	78
8.10.1	Function Documentation	78
8.11	mappel::methods::objective::openmp Namespace Reference	80
8.11.1	Function Documentation	81
8.12	mappel::methods::openmp Namespace Reference	84
8.12.1	Function Documentation	85
8.13	omp_exception_catcher Namespace Reference	90
8.13.1	Typedef Documentation	90
8.13.2	Enumeration Type Documentation	91
8.14	omp_exception_catcher::impl_ Namespace Reference	91

9	Class Documentation	91
9.1	mappel::ArrayShapeError Struct Reference	91
9.1.1	Detailed Description	91
9.1.2	Constructor & Destructor Documentation	92
9.2	mappel::ArraySizeError Struct Reference	92
9.2.1	Detailed Description	92
9.2.2	Constructor & Destructor Documentation	92
9.3	mappel::estimator::CGaussHeuristicEstimator< Model > Class Template Reference	93
9.3.1	Detailed Description	94
9.3.2	Constructor & Destructor Documentation	94
9.3.3	Member Function Documentation	94
9.3.4	Member Data Documentation	103
9.4	mappel::estimator::CGaussMLE< Model > Class Template Reference	105
9.4.1	Detailed Description	106
9.4.2	Constructor & Destructor Documentation	106
9.4.3	Member Function Documentation	107
9.4.4	Member Data Documentation	115
9.5	mappel::estimator::Estimator< Model > Class Template Reference	117
9.5.1	Detailed Description	119
9.5.2	Constructor & Destructor Documentation	119
9.5.3	Member Function Documentation	119
9.5.4	Friends And Related Function Documentation	127
9.5.5	Member Data Documentation	127
9.6	mappel::Gauss1DMP Class Reference	128
9.6.1	Detailed Description	132
9.6.2	Member Typedef Documentation	133
9.6.3	Constructor & Destructor Documentation	135
9.6.4	Member Function Documentation	135

9.6.5	Member Data Documentation	150
9.7	mappel::Gauss1DMLE Class Reference	156
9.7.1	Detailed Description	160
9.7.2	Member Typedef Documentation	161
9.7.3	Constructor & Destructor Documentation	163
9.7.4	Member Function Documentation	163
9.7.5	Member Data Documentation	178
9.8	mappel::Gauss1DModel Class Reference	184
9.8.1	Detailed Description	188
9.8.2	Member Typedef Documentation	188
9.8.3	Constructor & Destructor Documentation	190
9.8.4	Member Function Documentation	190
9.8.5	Member Data Documentation	205
9.9	mappel::Gauss1DsMAP Class Reference	211
9.9.1	Detailed Description	215
9.9.2	Member Typedef Documentation	215
9.9.3	Constructor & Destructor Documentation	217
9.9.4	Member Function Documentation	218
9.9.5	Member Data Documentation	233
9.10	mappel::Gauss1DsMLE Class Reference	239
9.10.1	Detailed Description	243
9.10.2	Member Typedef Documentation	244
9.10.3	Constructor & Destructor Documentation	246
9.10.4	Member Function Documentation	246
9.10.5	Member Data Documentation	262
9.11	mappel::Gauss1DsModel Class Reference	268
9.11.1	Detailed Description	272
9.11.2	Member Typedef Documentation	272

9.11.3	Constructor & Destructor Documentation	274
9.11.4	Member Function Documentation	274
9.11.5	Member Data Documentation	290
9.12	mappel::Gauss2DMAP Class Reference	295
9.12.1	Detailed Description	300
9.12.2	Member Typedef Documentation	300
9.12.3	Constructor & Destructor Documentation	302
9.12.4	Member Function Documentation	303
9.12.5	Member Data Documentation	318
9.13	mappel::Gauss2DMLE Class Reference	325
9.13.1	Detailed Description	330
9.13.2	Member Typedef Documentation	330
9.13.3	Constructor & Destructor Documentation	332
9.13.4	Member Function Documentation	333
9.13.5	Member Data Documentation	348
9.14	mappel::Gauss2DModel Class Reference	355
9.14.1	Detailed Description	360
9.14.2	Member Typedef Documentation	360
9.14.3	Constructor & Destructor Documentation	362
9.14.4	Member Function Documentation	362
9.14.5	Member Data Documentation	378
9.15	mappel::Gauss2DsMAP Class Reference	384
9.15.1	Detailed Description	389
9.15.2	Member Typedef Documentation	389
9.15.3	Constructor & Destructor Documentation	391
9.15.4	Member Function Documentation	392
9.15.5	Member Data Documentation	410
9.16	mappel::Gauss2DsMLE Class Reference	417

9.16.1	Detailed Description	421
9.16.2	Member Typedef Documentation	421
9.16.3	Constructor & Destructor Documentation	424
9.16.4	Member Function Documentation	424
9.16.5	Member Data Documentation	442
9.17	mappel::Gauss2DsModel Class Reference	449
9.17.1	Detailed Description	454
9.17.2	Member Typedef Documentation	454
9.17.3	Constructor & Destructor Documentation	456
9.17.4	Member Function Documentation	456
9.17.5	Member Data Documentation	473
9.18	mappel::Gauss2DsxyMAP Class Reference	480
9.18.1	Detailed Description	484
9.18.2	Member Typedef Documentation	484
9.18.3	Constructor & Destructor Documentation	486
9.18.4	Member Function Documentation	486
9.18.5	Member Data Documentation	501
9.19	mappel::Gauss2DsxyModel Class Reference	507
9.19.1	Detailed Description	511
9.19.2	Member Typedef Documentation	511
9.19.3	Constructor & Destructor Documentation	513
9.19.4	Member Function Documentation	513
9.19.5	Member Data Documentation	525
9.20	mappel::estimator::HeuristicEstimator< Model > Class Template Reference	530
9.20.1	Detailed Description	532
9.20.2	Constructor & Destructor Documentation	532
9.20.3	Member Function Documentation	532
9.20.4	Member Data Documentation	541

9.21	mappel::ImageFormat1DBase Class Reference	543
9.21.1	Detailed Description	544
9.21.2	Member Typedef Documentation	545
9.21.3	Constructor & Destructor Documentation	546
9.21.4	Member Function Documentation	546
9.21.5	Member Data Documentation	548
9.22	mappel::ImageFormat2DBase Class Reference	549
9.22.1	Detailed Description	551
9.22.2	Member Typedef Documentation	551
9.22.3	Constructor & Destructor Documentation	552
9.22.4	Member Function Documentation	553
9.22.5	Member Data Documentation	555
9.23	mappel::estimator::IterativeMaximizer< Model > Class Template Reference	556
9.23.1	Detailed Description	559
9.23.2	Constructor & Destructor Documentation	559
9.23.3	Member Function Documentation	559
9.23.4	Member Data Documentation	572
9.24	mappel::LogicalError Struct Reference	577
9.24.1	Detailed Description	577
9.24.2	Constructor & Destructor Documentation	577
9.25	mappel::MAPEstimator Class Reference	577
9.25.1	Detailed Description	580
9.25.2	Member Typedef Documentation	580
9.25.3	Constructor & Destructor Documentation	580
9.25.4	Member Function Documentation	580
9.25.5	Member Data Documentation	589
9.26	mappel::estimator::IterativeMaximizer< Model >::MaximizerData Class Reference	592
9.26.1	Detailed Description	593

9.26.2	Constructor & Destructor Documentation	594
9.26.3	Member Function Documentation	594
9.26.4	Member Data Documentation	598
9.27	mappel::MCMCAdaptor1D Class Reference	601
9.27.1	Detailed Description	604
9.27.2	Member Typedef Documentation	604
9.27.3	Constructor & Destructor Documentation	604
9.27.4	Member Function Documentation	605
9.27.5	Member Data Documentation	615
9.28	mappel::MCMCAdaptor1Ds Class Reference	619
9.28.1	Detailed Description	622
9.28.2	Member Typedef Documentation	622
9.28.3	Constructor & Destructor Documentation	622
9.28.4	Member Function Documentation	623
9.28.5	Member Data Documentation	633
9.29	mappel::MCMCAdaptor2D Class Reference	637
9.29.1	Detailed Description	640
9.29.2	Member Typedef Documentation	640
9.29.3	Constructor & Destructor Documentation	640
9.29.4	Member Function Documentation	641
9.29.5	Member Data Documentation	651
9.30	mappel::MCMCAdaptor2Ds Class Reference	655
9.30.1	Detailed Description	658
9.30.2	Member Typedef Documentation	658
9.30.3	Constructor & Destructor Documentation	659
9.30.4	Member Function Documentation	659
9.30.5	Member Data Documentation	669
9.31	mappel::MCMCAdaptorBase Class Reference	674

9.31.1	Detailed Description	675
9.31.2	Constructor & Destructor Documentation	675
9.31.3	Member Function Documentation	675
9.31.4	Member Data Documentation	676
9.32	mappel::mcmc::MCMCData Struct Reference	677
9.32.1	Detailed Description	678
9.32.2	Member Function Documentation	678
9.32.3	Member Data Documentation	678
9.33	mappel::mcmc::MCMCDataStack Struct Reference	679
9.33.1	Detailed Description	680
9.33.2	Member Function Documentation	680
9.33.3	Member Data Documentation	680
9.34	mappel::mcmc::MCMCDebugData Struct Reference	682
9.34.1	Detailed Description	682
9.34.2	Member Function Documentation	682
9.34.3	Member Data Documentation	682
9.35	mappel::MLEstimator Class Reference	683
9.35.1	Detailed Description	686
9.35.2	Member Typedef Documentation	686
9.35.3	Constructor & Destructor Documentation	686
9.35.4	Member Function Documentation	686
9.35.5	Member Data Documentation	695
9.36	mappel::ModelBoundsError Struct Reference	698
9.36.1	Detailed Description	698
9.36.2	Constructor & Destructor Documentation	698
9.37	mappel::estimator::NewtonDiagonalMaximizer< Model > Class Template Reference	699
9.37.1	Detailed Description	701
9.37.2	Member Typedef Documentation	701

9.37.3	Constructor & Destructor Documentation	702
9.37.4	Member Function Documentation	702
9.37.5	Member Data Documentation	716
9.38	mappel::estimator::NewtonMaximizer< Model > Class Template Reference	720
9.38.1	Detailed Description	723
9.38.2	Member Typedef Documentation	723
9.38.3	Constructor & Destructor Documentation	723
9.38.4	Member Function Documentation	724
9.38.5	Member Data Documentation	737
9.39	mappel::NotImplementedError Struct Reference	741
9.39.1	Detailed Description	741
9.39.2	Constructor & Destructor Documentation	742
9.40	mappel::NumericalError Struct Reference	742
9.40.1	Detailed Description	742
9.40.2	Constructor & Destructor Documentation	742
9.41	omp_exception_catcher::impl_::OMPExcptionCatcher< _dummy > Class Template Reference	743
9.41.1	Detailed Description	743
9.41.2	Constructor & Destructor Documentation	743
9.41.3	Member Function Documentation	744
9.42	mappel::ParameterValueError Struct Reference	745
9.42.1	Detailed Description	745
9.42.2	Constructor & Destructor Documentation	745
9.43	mappel::PointEmitterModel Class Reference	746
9.43.1	Detailed Description	748
9.43.2	Member Typedef Documentation	749
9.43.3	Constructor & Destructor Documentation	749
9.43.4	Member Function Documentation	749
9.43.5	Member Data Documentation	758

9.44	PoissonGaussianNoise2DObjective< ModelBase > Class Template Reference	. 760
9.44.1	Detailed Description	. 761
9.44.2	Member Typedef Documentation	. 761
9.44.3	Constructor & Destructor Documentation	. 762
9.44.4	Member Data Documentation	. 762
9.45	mappell::PoissonNoise1DObjective Class Reference	. 763
9.45.1	Detailed Description	. 764
9.45.2	Member Typedef Documentation	. 764
9.45.3	Constructor & Destructor Documentation	. 766
9.45.4	Member Function Documentation	. 766
9.45.5	Member Data Documentation	. 769
9.46	mappell::PoissonNoise2DObjective Class Reference	. 770
9.46.1	Detailed Description	. 771
9.46.2	Member Typedef Documentation	. 771
9.46.3	Constructor & Destructor Documentation	. 773
9.46.4	Member Function Documentation	. 773
9.46.5	Member Data Documentation	. 776
9.47	mappell::estimator::ProfileBoundsData Struct Reference	. 777
9.47.1	Detailed Description	. 778
9.47.2	Member Function Documentation	. 778
9.47.3	Member Data Documentation	. 778
9.48	mappell::estimator::ProfileBoundsDataStack Struct Reference	. 780
9.48.1	Detailed Description	. 781
9.48.2	Member Function Documentation	. 781
9.48.3	Member Data Documentation	. 782
9.49	mappell::estimator::QuasiNewtonMaximizer< Model > Class Template Reference	. 784
9.49.1	Detailed Description	. 786
9.49.2	Member Typedef Documentation	. 786

9.49.3	Constructor & Destructor Documentation	787
9.49.4	Member Function Documentation	787
9.49.5	Member Data Documentation	801
9.50	mappel::estimator::SimulatedAnnealingMaximizer< Model > Class Template Reference	805
9.50.1	Detailed Description	807
9.50.2	Constructor & Destructor Documentation	807
9.50.3	Member Function Documentation	807
9.50.4	Member Data Documentation	815
9.51	mappel::Gauss2DsxyModel::Stencil Class Reference	817
9.51.1	Detailed Description	818
9.51.2	Member Typedef Documentation	818
9.51.3	Constructor & Destructor Documentation	819
9.51.4	Member Function Documentation	819
9.51.5	Friends And Related Function Documentation	820
9.51.6	Member Data Documentation	820
9.52	mappel::Gauss1DsModel::Stencil Class Reference	822
9.52.1	Detailed Description	823
9.52.2	Member Typedef Documentation	823
9.52.3	Constructor & Destructor Documentation	823
9.52.4	Member Function Documentation	824
9.52.5	Friends And Related Function Documentation	825
9.52.6	Member Data Documentation	825
9.53	mappel::Gauss2DModel::Stencil Class Reference	826
9.53.1	Detailed Description	827
9.53.2	Member Typedef Documentation	827
9.53.3	Constructor & Destructor Documentation	827
9.53.4	Member Function Documentation	828
9.53.5	Friends And Related Function Documentation	829

9.53.6	Member Data Documentation	829
9.54	mappel::Gauss2DsModel::Stencil Class Reference	831
9.54.1	Detailed Description	832
9.54.2	Member Typedef Documentation	832
9.54.3	Constructor & Destructor Documentation	832
9.54.4	Member Function Documentation	832
9.54.5	Friends And Related Function Documentation	834
9.54.6	Member Data Documentation	834
9.55	mappel::Gauss1DModel::Stencil Class Reference	836
9.55.1	Detailed Description	837
9.55.2	Member Typedef Documentation	837
9.55.3	Constructor & Destructor Documentation	838
9.55.4	Member Function Documentation	838
9.55.5	Friends And Related Function Documentation	839
9.55.6	Member Data Documentation	839
9.56	mappel::estimator::ThreadedEstimator< Model > Class Template Reference	840
9.56.1	Detailed Description	842
9.56.2	Constructor & Destructor Documentation	842
9.56.3	Member Function Documentation	842
9.56.4	Member Data Documentation	851
9.57	mappel::estimator::TrustRegionMaximizer< Model > Class Template Reference	853
9.57.1	Detailed Description	856
9.57.2	Member Typedef Documentation	856
9.57.3	Constructor & Destructor Documentation	857
9.57.4	Member Function Documentation	857
9.57.5	Member Data Documentation	871

10 File Documentation	876
10.1 display.cpp File Reference	876
10.1.1 Detailed Description	877
10.2 display.h File Reference	877
10.2.1 Detailed Description	878
10.3 estimator.cpp File Reference	878
10.3.1 Detailed Description	879
10.4 estimator.h File Reference	879
10.4.1 Detailed Description	880
10.4.2 Class Documentation	880
10.4.3 Typedef Documentation	882
10.5 estimator_helpers.h File Reference	882
10.5.1 Detailed Description	883
10.6 estimator_impl.h File Reference	883
10.6.1 Detailed Description	884
10.7 estimator_statics.cpp File Reference	884
10.7.1 Detailed Description	884
10.8 Gauss1DMAP.cpp File Reference	884
10.8.1 Detailed Description	885
10.9 Gauss1DMAP.h File Reference	885
10.9.1 Detailed Description	885
10.10Gauss1DMLE.cpp File Reference	886
10.10.1 Detailed Description	886
10.11Gauss1DMLE.h File Reference	886
10.11.1 Detailed Description	887
10.12Gauss1DModel.cpp File Reference	887
10.12.1 Detailed Description	887
10.13Gauss1DModel.h File Reference	887

10.13.1 Detailed Description	888
10.14Gauss1DsMAP.cpp File Reference	888
10.14.1 Detailed Description	888
10.15Gauss1DsMAP.h File Reference	889
10.15.1 Detailed Description	889
10.16Gauss1DsMLE.cpp File Reference	889
10.16.1 Detailed Description	890
10.17Gauss1DsMLE.h File Reference	890
10.17.1 Detailed Description	890
10.18Gauss1DsModel.cpp File Reference	891
10.18.1 Detailed Description	891
10.19Gauss1DsModel.h File Reference	891
10.19.1 Detailed Description	892
10.20Gauss2DMAP.cpp File Reference	892
10.20.1 Detailed Description	892
10.21Gauss2DMAP.h File Reference	892
10.21.1 Detailed Description	893
10.22Gauss2DMLE.cpp File Reference	893
10.22.1 Detailed Description	893
10.23Gauss2DMLE.h File Reference	894
10.23.1 Detailed Description	894
10.24Gauss2DModel.cpp File Reference	894
10.24.1 Detailed Description	895
10.25Gauss2DModel.h File Reference	895
10.25.1 Detailed Description	896
10.26Gauss2DsMAP.cpp File Reference	896
10.26.1 Detailed Description	896
10.27Gauss2DsMAP.h File Reference	896

10.27.1 Detailed Description	897
10.28Gauss2DsMLE.cpp File Reference	897
10.28.1 Detailed Description	897
10.29Gauss2DsMLE.h File Reference	898
10.29.1 Detailed Description	898
10.30Gauss2DsModel.cpp File Reference	898
10.30.1 Detailed Description	899
10.31Gauss2DsModel.h File Reference	899
10.31.1 Detailed Description	900
10.32Gauss2DsxyMAP.h File Reference	900
10.32.1 Detailed Description	901
10.33Gauss2DsxyModel.h File Reference	901
10.33.1 Detailed Description	902
10.34ImageFormat1DBase.cpp File Reference	902
10.34.1 Detailed Description	902
10.35ImageFormat1DBase.h File Reference	902
10.35.1 Detailed Description	903
10.36ImageFormat2DBase.cpp File Reference	903
10.36.1 Detailed Description	904
10.37ImageFormat2DBase.h File Reference	904
10.37.1 Detailed Description	904
10.38Install.md File Reference	905
10.39MAPEstimator.h File Reference	905
10.39.1 Detailed Description	906
10.40mcmc.cpp File Reference	906
10.40.1 Detailed Description	906
10.41mcmc.h File Reference	907
10.41.1 Detailed Description	907

10.42mcmc_data.h File Reference	908
10.42.1 Detailed Description	908
10.43MCMCAdaptor1D.cpp File Reference	908
10.43.1 Detailed Description	909
10.44MCMCAdaptor1D.h File Reference	909
10.44.1 Detailed Description	909
10.45MCMCAdaptor1Ds.cpp File Reference	909
10.45.1 Detailed Description	910
10.46MCMCAdaptor1Ds.h File Reference	910
10.46.1 Detailed Description	910
10.47MCMCAdaptor2D.cpp File Reference	911
10.47.1 Detailed Description	911
10.48MCMCAdaptor2D.h File Reference	911
10.48.1 Detailed Description	911
10.49MCMCAdaptor2Ds.cpp File Reference	912
10.49.1 Detailed Description	912
10.50MCMCAdaptor2Ds.h File Reference	912
10.50.1 Detailed Description	912
10.51MCMCAdaptorBase.cpp File Reference	913
10.51.1 Detailed Description	913
10.52MCMCAdaptorBase.h File Reference	913
10.52.1 Detailed Description	913
10.53MLEstimator.h File Reference	914
10.53.1 Detailed Description	915
10.54model_methods.h File Reference	915
10.55model_methods_impl.h File Reference	918
10.56numerical.cpp File Reference	921
10.56.1 Detailed Description	922

10.57numerical.h File Reference	922
10.57.1 Detailed Description	923
10.58OMPExcptionCatcher.h File Reference	923
10.58.1 Detailed Description	924
10.59openmp_methods.h File Reference	925
10.59.1 Detailed Description	927
10.60PointEmitterModel.cpp File Reference	927
10.60.1 Detailed Description	928
10.61PointEmitterModel.h File Reference	928
10.61.1 Detailed Description	929
10.62PoissonGaussianNoise2DObjective.cpp File Reference	929
10.63PoissonGaussianNoise2DObjective.h File Reference	929
10.63.1 Detailed Description	930
10.63.2 Function Documentation	931
10.64PoissonNoise1DObjective.cpp File Reference	932
10.64.1 Detailed Description	933
10.65PoissonNoise1DObjective.h File Reference	933
10.65.1 Detailed Description	934
10.66PoissonNoise2DObjective.cpp File Reference	935
10.66.1 Detailed Description	935
10.67PoissonNoise2DObjective.h File Reference	935
10.67.1 Detailed Description	937
10.68README.md File Reference	937
10.69README.md File Reference	937
10.70rng.cpp File Reference	937
10.70.1 Detailed Description	937
10.71rng.h File Reference	938
10.71.1 Detailed Description	938
10.72stencil.cpp File Reference	939
10.72.1 Detailed Description	939
10.73stencil.h File Reference	940
10.73.1 Detailed Description	941
10.74util.cpp File Reference	941
10.75util.h File Reference	942
10.75.1 Detailed Description	944

1 MAPPEL

Mappel is an object-oriented image processing library for high-performance [super-resolution localization](#) of Gaussian point emitters in [fluorescence microscopy](#) applications.

- Mappel uses CMake and builds cross-platform for Linux and Windows 64-bit.
- Mappel provides object-oriented interfaces for C++, Python, and Matlab.
- Mappel uses OpenMP to parallelize operations over vectors of images or parameters
- Mappel is free-as-in-beer and free-as-in-speech! ([GPL-v3](LICENSE))

Documentation

The Mappel Doxygen documentation can be build with the `OPT_DOC` CMake option and is also available on online:

- [Mappel HTML Manual](#)
- [Mappel PDF Manual](#)
- [Mappel github repository](#)

Background

Point emitter localization is a process of precisely estimating the sub-pixel location of a single point source emitters (molecules/proteins) at effective resolutions 10-50 times smaller than the fundamental diffraction limit for optical microscopes. Operationally, this is the process of going from blurry, noisy, pixelated images to a sub-pixel estimate of true emitter position as well as the uncertainty in that estimate. Figure 1 shows the point emitter localization process with realistic physical values for a typical super-resolution fluorescence microscope configuration.

Figure 1: Effective fitting resolution in typical applications

Applications

- Stochastic super-resolution reconstruction with [PALM](#) and [dSTORM](#) florescence microscopy techniques.
- [Single particle tracking \(SPT\)](#)
 - The [Robust Particle Tracking \(RPT\)](#) library uses Mappel for the localization phase of tracking.
- [Nano-structure optical measurements](#) and alignment.
- Accurate estimation of fluorophore emitter intensity over time.

Performance

Emitter localization applications, especially SPT and super-resolution imaging, can require millions of emitter estimations per dataset. This demand is only increasing with the drive towards larger EMCCD and SCMOS sensors and longer experiments at higher frame-rates. Speed becomes even more crucial for these applications when batch processing dozens of large data files.

- Mappel runs all image oriented computations in parallel using OpenMP making full use the system hardware concurrency.
- Mappel is fast. It can easily localize 10^4 emitters/sec/core on modern consumer hardware
- Small and medium-sized datasets using Mappel can work well on laptops allowing interactive Matlab applications like [RPT](#) to be used from nearly any machine.

Installation

Mappel uses the [CMake](#) build system, and is designed to be cross-compiled from linux to other platforms, primarily Win64, although future OSX support is planned.

Dependencies

Several standard numerical packages are required to build Mappel. Most distributions should have development versions of these packages which provide the include files and other necessary development files for the packages.

- [Armadillo](#) - A high-performance array library for C++.
- [Boost](#)
- BLAS
 - Requires support for 64-bit integers.
 - [Netlib BLAS Reference](#)
- LAPACK
 - Requires support for 64-bit integers.
 - [Netlib LAPACK Reference](#)

Note the `OPT_BLAS_INT64` CMake option controls whether Armadillo uses BLAS and LAPACK libraries that use 64-bit integer indexing. Matlab uses 64-bit by default, so linking Mappel to Matlab MEX libraries requires this option enabled. Many linux systems only provide 32-bit integer versions of BLAS and Lapack, and the option can be disabled if Matlab support is not a concern and 64-bit support is difficult to provide.

External Projects

These packages are specialized CMake projects. If they are not currently installed on the development machines we use the `AddExternalDependency.cmake` which will automatically download, configure, build and install to the `CMAKE_INSTALL_PREFIX`, enabling their use through the normal CMake `find_package()` system.

- `BacktraceException` - A library to provide debugging output on exception calls. Important for Matlab debugging.
- `ParallelRngManager` - A simple manager for easily deploying a set of RNG parallelized over a set number of threads, using the TRNG parallel RNG library.
- `PriorHessian` - The PriorHessian library allows fast computation of log-likelihood and derivatives for composite priors.

Model classes

Mappel provides model objects that correspond to different fitting-modes (psf-models). Mappel's core is a C++ library `libmappel.so` that uses OpenMP to automatically parallelize localizations over multiple images. Mappel also provides detailed object-oriented interfaces for Python and Matlab, using the same concept of a Model class to represent each class of psf fitting models.

Computations available

- `llh` - log-likelihood (log of pdf)
- `rllh` - relative log-likelihood (log of pdf without constant terms)
- `grad` - derivative of log-likelihood (or equivalently of relative-llh)
- `grad2` - 2nd-derivative of log-likelihood
- `hessian` - hessian of log-likelihood

Design Notes

Static Polymorphism

The Mappel library is designed using static polymorphism (templates), and as such avoids virtual functions for small-grained tasks, and instead uses templates, which allow many small functions to be inlined. This aggressive inlining by the compiler produces log-likelihood, gradient, and hessian functions that are nearly as fast as hand-coded functions.

License

LICENSE

- Copyright: 2013-2019
- Author: Mark J. Olah
- Email: (`mjo@cs.unm.edu`)
- LICENSE: GPL-v3 See `LICENSE` file.

2 Install

Currently building has only been tested on linux hosts.

Mappel has been tested with modern GCC-7.2.0 as well as earlier GCC's to 4.9.4 (which is still required for Matlab integration). In order to maintain compatibility with gcc-4.9.4 and still use modern C++14 features we use the `-std=c++1y` GCC standard when compiling.

Dependencies

Several standard numerical packages are required to build Mappel. Most distributions should have development versions of these packages which provide the include files and other necessary development files for the packages.

- [Armadillo](#)
- [Boost](#)
- [TRNG](#)
- BLAS
 - Requires support for 64-bit integers.
 - [Netlib BLAS Reference](#)
- LAPACK
 - Requires support for 64-bit integers.
 - [Netlib LAPACK Reference](#)

Gentoo

Add to your `package.keywords`

```
1 sci-libs/lapack-reference int64
2 sci-libs/blas-reference int64
```

```
1 emerge -av armadillo boost lapack-reference blas-reference
```

For TRNG there is not a gentoo ebuild in the tree, we provide one at the [OlahGentooScienceOverlay](#).

```
1 layman -o https://github.com/markjolah/OlahScienceGentooOverlay/blob/master/layman.xml -f -a olah-science
2 emerge -av trng
```

External Projects

Mappel also depends on several small Github projects which for now are maintained in separate repositories.

- `BacktraceException` - A library to provide debugging output on exception calls. Important for Matlab debugging.
- `ParallelRngManager` - A simple manager for easily deploying a set of RNG parallelized over a set number of threads, using the TRNG parallel RNG library.
- `PriorHessian` - The PriorHessian library allows fast computation of log-likelihood and derivatives for composite priors.

If these libraries do not exist on the build system or at `CMAKE_INSTALL_PREFIX`, they are automatically downloaded, configured and installed as external dependencies during the CMake configure phase.

Normally the Github current versions of the external dependencies are used. To use the HEAD revision of a local git repository, the following Environment variables can be set:

- `BacktraceExceptionURL` - Local directory or git URL for the BacktraceException library [optional] Default to use the HEAD version from Github
- `ParallelRngManagerURL` - Local directory or git URL for the ParallelRngManager library
- `PriorHessianURL` - Local directory or git URL for the PriorHessian library

Build process

Linux

```
1 git clone https://github.com/markjolah/Mappel.git
2 cd Mappel
3 ./build.sh
```

On successful build the Mappel libraries, binaries, includes, and CMake modules are all installed to the `_install` dir.

Debugging

CMake variable `CMAKE_BUILD_TYPE=Debug` will configure the debug build and all libraries and executables will have a `.debug` suffix.

A convenience script exists to only build the debug versions of the libraries in the local `_build` and `_install` directories

```
1 ./build.debug.sh
```

Tips:

- Try running `VERBOSE=1 make` inside the `_build/Debug` directory to debug the build/link command lines generated by CMAKE.

Python support

Matlab support is enabled by setting the CMake option `-DOPT_PYTHON=1`. At the moment only python 3 is supported.

Several CMake variable can control for which python version modules are built.

- `MAPPEL_PYTHON_VERSIONS` - List of python X.Y versions seperated by ";" to build modules for (e.g., "3.4;3.5;3.6")
- `MAPPEL_PYTHON_EXECUTABLE` - Name or full path to python executable on the system for which to build (e.g., `python3`).

Mappel uses `pybind11` to compile modules for each Mappel Model class.

Python development workflow

The Mappel python package environment is created in the build tree at `build_dir/python`, as part of the CMake build process. There is a standard `setuptools` `setup.py` that can be used to build binary distributions and also to install to the local system.

The CMake install process will automatically install the python `.egg` using `setup.py` under the `CMAKE_INSTALL_PREFIX` directory.

In order to be able to develop the code at the root `mappel/python/` git repository while running and testing the mappel package without having to make `install` on every small change to python code, we use the `developer mode` install option provided by `setuptools`. In fact, we have made it even easier to use, by making an alias `localdevelop`

```
1 $ cd _build/Debug/python
2 $ python setup.py localdevelop
3 $ python -m mappel
```

Matlab support

Matlab support is enabled by setting the CMake option `MATLAB=on`. This brings in an additional external dependency,

- `MexIFace` - A cross-platform Matlab/C++ class-based interface wrapper for generating `.mex` files.

The following environment variables control the Matlab build process

- `MexIFaceURL`: Local directory or git URL for the Mexiface library (Matlab Support). [optional] Default to use the HEAD version from Github
- `MATLAB_LIBS_ROOT`: [Optional] Local path to find Matlab core shared libraries to link against (overrides default search paths). Must contain subdirectory structure (`$MATLAB_ARCH`) `// {bin, extern}`. `MATLAB_ARCH` is `[glnxa64, maci64, win64]`.
- `MATLAB_ROOT_GLNXA64`: Necessary for Matlab. Location of the Matlab `glnxa64` version to link against.

Cross-building to Win64

The following Environment variables control the Win64 cross-build environment necessary to compile win64 binaries

- `MXE_ROOT` Local directory root of the MXE Win64 cross environment. Necessary For Win64 cross-compiling only.
- `MATLAB_ROOT_WIN64` Necessary for Matlab on Win64 cross build. Location of the Matlab win64 version to link against.

Cross-building to OSX

- `OSXCROSS_ROOT`: Local directory root of the OSXCross OSX 64-bit cross environment. Necessary for OSX cross-compiling only.
- `MATLAB_ROOT_MACI64`: Necessary for Matlab on OSX cross build. Location of the Matlab maci64 version to link against.

3 OMPEXceptionCatcher

A lightweight class for managing C++ exception handling strategies in OpenMP code.

Motivation

OpenMP code must catch any exceptions that may have been thrown before exiting the OpenMP block. This class acts as lightweight wrapper that allows an arbitrary function or lambda expression to be run safely and efficiently in OMP even if it might throw exceptions. We employ one of 4 possible strategies as determined By the `OMPEXceptionCatcher::Strategies` enum.

Exception Catching Strategy's

- `OMPEXceptionCatcher::Strategies::DoNotTry` – Don't even try, this is a null op to completely disable this class's effect.
- `OMPEXceptionCatcher::Strategies::Continue` – Catch exceptions and keep going
- `OMPEXceptionCatcher::Strategies::Abort` – Catch exceptions and abort
- `OMPEXceptionCatcher::Strategies::RethrowFirst` – Re-throws first exception thrown by any thread

Including OMPEXceptionCatcher in your OpenMP project

Since OMPEXceptionCatcher is header-only, the easiest way to use it is via the [git subrepo](#) plugin. Unlike the traditional `git submodule` command, `git subrepo` is transparent to other users of your repository, and solves many of the irksome issues prevalent with the submodule approach. Follow the [git subrepo install guide](#) to install on your development machine.

Then to add OMPEXceptionCatcher,

```
1 > cd $MY_REPOS
2 > git subrepo pull https://github.com/markjolah/OMPEXceptionCatcher include/where/ever/OMPEXceptionCatcher
```

Example useage:

```
#include <OMPEXceptionCatcher/OMPEXceptionCatcher.h>
OMPEXceptionCatcher catcher(OMPEXceptionCatcher<>::Strategies::Continue);
#pragma omp parallel for
for(int n=0; n < N; n++)
    catcher.run([&]{ my_output(n)=do_my_calculations(args(n)); })
catcher.rethrow(); //Required only if you ever might use RethrowFirst strategy
```

License

- Author: Mark J. Olah
- Email: (mjo@cs.unm.edu DOT edu)
- Copyright: 2019
- LICENSE: Apache 2.0. See [LICENSE](#) file.

4 Namespace Index

4.1 Namespace List

Here is a list of all namespaces with brief descriptions:

mappel	20
mappel::estimator	47
mappel::estimator::subroutine	51
mappel::mcmc	54
mappel::methods	
Templated functions for operating on a PointEmitterModel	55
mappel::methods::debug	67
mappel::methods::likelihood	68

mappel::methods::likelihood::debug	71
mappel::methods::objective	72
mappel::methods::objective::debug	78
mappel::methods::objective::openmp	80
mappel::methods::openmp	84
omp_exception_catcher	90
omp_exception_catcher::impl_	91

5 Hierarchical Index

5.1 Class Hierarchy

This inheritance list is sorted roughly, but not completely, alphabetically:

mappel::estimator::Estimator< Model >	117
mappel::estimator::ThreadedEstimator< Model >	840
mappel::estimator::CGaussHeuristicEstimator< Model >	93
mappel::estimator::CGaussMLE< Model >	105
mappel::estimator::HeuristicEstimator< Model >	530
mappel::estimator::IterativeMaximizer< Model >	556
mappel::estimator::NewtonDiagonalMaximizer< Model >	699
mappel::estimator::NewtonMaximizer< Model >	720
mappel::estimator::QuasiNewtonMaximizer< Model >	784
mappel::estimator::TrustRegionMaximizer< Model >	853
mappel::estimator::SimulatedAnnealingMaximizer< Model >	805
mappel::ImageFormat1DBase	543
mappel::Gauss1DModel	184
mappel::Gauss1DMAP	128
mappel::Gauss1DMLE	156
mappel::Gauss2DsxyMAP	480
mappel::Gauss1DsModel	268
mappel::Gauss1DsMAP	211

mappel::Gauss1DsMLE	239
mappel::PoissonNoise1DObjective	763
mappel::Gauss1DMAP	128
mappel::Gauss1DMLE	156
mappel::Gauss1DsMAP	211
mappel::Gauss1DsMLE	239
mappel::Gauss2DsxyMAP	480
ImageFormat1DBase	
PoissonGaussianNoise2DObjective< ModelBase >	760
mappel::ImageFormat2DBase	549
mappel::Gauss2DModel	355
mappel::Gauss2DMAP	295
mappel::Gauss2DMLE	325
mappel::Gauss2DsModel	449
mappel::Gauss2DsMAP	384
mappel::Gauss2DsMLE	417
mappel::Gauss2DsxyModel	507
mappel::PoissonNoise2DObjective	770
mappel::Gauss2DMAP	295
mappel::Gauss2DMLE	325
mappel::Gauss2DsMAP	384
mappel::Gauss2DsMLE	417
MappelError	
mappel::ArrayShapeError	91
mappel::ArraySizeError	92
mappel::LogicalError	577
mappel::ModelBoundsError	698
mappel::NotImplementedError	741
mappel::NumericalError	742
mappel::ParameterValueError	745

mappel::estimator::IterativeMaximizer< Model >::MaximizerData	592
mappel::MCMCAdaptorBase	674
mappel::MCMCAdaptor1D	601
mappel::Gauss1DModel	184
mappel::MCMCAdaptor1Ds	619
mappel::Gauss1DsModel	268
mappel::MCMCAdaptor2D	637
mappel::Gauss2DModel	355
mappel::MCMCAdaptor2Ds	655
mappel::Gauss2DsModel	449
mappel::mcmc::MCMCData	677
mappel::mcmc::MCMCDataStack	679
mappel::mcmc::MCMCDebugData	682
mappel::estimator::MLEData	47
mappel::estimator::MLEDataStack	47
mappel::estimator::MLEDebugData	47
omp_exception_catcher::impl_::OMPExcceptionCatcher< _dummy >	743
mappel::PointEmitterModel	746
mappel::Gauss1DModel	184
mappel::Gauss1DsModel	268
mappel::Gauss2DModel	355
mappel::Gauss2DsModel	449
mappel::Gauss2DsxyModel	507
mappel::MAPEstimator	577
mappel::Gauss1DMAP	128
mappel::Gauss1DsMAP	211
mappel::Gauss2DMAP	295
mappel::Gauss2DsMAP	384
mappel::Gauss2DsxyMAP	480
mappel::MCMCAdaptor1D	601

mappel::MLEstimator	683
mappel::Gauss1DMLE	156
mappel::Gauss1DsMLE	239
mappel::Gauss2DMLE	325
mappel::Gauss2DsMLE	417
mappel::estimator::ProfileBoundsData	777
mappel::estimator::ProfileBoundsDataStack	780
mappel::estimator::ProfileBoundsDebugData	47
mappel::estimator::ProfileLikelihoodData	47
mappel::Gauss2DsxyModel::Stencil	817
mappel::Gauss1DsModel::Stencil	822
mappel::Gauss2DModel::Stencil	826
mappel::Gauss2DsModel::Stencil	831
mappel::Gauss1DModel::Stencil	836

6 Class Index

6.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

mappel::ArrayShapeError Array is not of the right dimensionality	91
mappel::ArraySizeError Array is not of the right size	92
mappel::estimator::CGaussHeuristicEstimator< Model >	93
mappel::estimator::CGaussMLE< Model >	105
mappel::estimator::Estimator< Model >	117
mappel::Gauss1DMAP A 1D Gaussian with fixed PSF under an Poisson Read Noise assumption and MAP Objective	128
mappel::Gauss1DMLE A 1D Gaussian with fixed PSF under an Poisson noise assumption and maximum-likelihood objective	156
mappel::Gauss1DModel A base class for 1D Gaussian PSF with a fixed sigma (standard dev.)	184

<code>mappel::Gauss1DsMAP</code>	
A 1D Gaussian with variable PSF sigma under an Poisson read noise assumption and MAP Objective	211
<code>mappel::Gauss1DsMLE</code>	
A 1D Gaussian with variable PSF under an Poisson noise assumption and maximum-likelihood estimator	239
<code>mappel::Gauss1DsModel</code>	
Base class for 1D Gaussian PSF with variable Gaussian sigma (standard deviation) measured in units of pixels	268
<code>mappel::Gauss2DMAP</code>	
A 2D Gaussian with fixed PSF under an Poisson Read Noise assumption and MAP Objective	295
<code>mappel::Gauss2DMLE</code>	
A 2D Gaussian with fixed PSF under an Poisson noise assumption and maximum-likelihood objective	325
<code>mappel::Gauss2DModel</code>	
A base class for 2D Gaussian PSF with fixed but possibly asymmetric sigma	355
<code>mappel::Gauss2DsMAP</code>	
A 2D Gaussian with a variable scalar PSF sigma under a Poisson noise assumption using a maximum a-posteriori objective	384
<code>mappel::Gauss2DsMLE</code>	
A 2D Gaussian with a variable scalar PSF sigma under a Poisson noise assumption using a maximum-likelihood objective	417
<code>mappel::Gauss2DsModel</code>	
A base class for 2D Gaussian PSF where the gaussian sigma is controlled by a single scalar parameter which is called <code>sigma_ratio</code> . The size of the gaussian psf is <code>sigma_ratio*psf_sigma</code> , where <code>psf_sigma</code> is considered as a vector [<code>psf_sigmaX</code> , <code>psf_sigmaY</code>]	449
<code>mappel::Gauss2DsxyMAP</code>	
A 1D Gaussian with fixed PSF under an Poisson Read Noise assumption and MAP Objective	480
<code>mappel::Gauss2DsxyModel</code>	
A base class for 2D Gaussian PSF with axis-aligned gaussian with free parameters for both <code>sigma_x</code> and <code>sigma_y</code> . Gaussian sigma parameters <code>sigma_x</code> and <code>sigma_y</code> are measured in units of pixels. The model has 6 parameters, [<code>x</code> , <code>y</code> , <code>l</code> , <code>bg</code> , <code>sigma_x</code> , <code>sigma_y</code>]	507
<code>mappel::estimator::HeuristicEstimator< Model ></code>	530
<code>mappel::ImageFormat1DBase</code>	
A virtual base class for 2D image localization objectives	543
<code>mappel::ImageFormat2DBase</code>	
A virtual base class for 2D image localization objectives	549
<code>mappel::estimator::IterativeMaximizer< Model ></code>	556
<code>mappel::LogicalError</code>	
Failure of code or algorithm logic	577

mappel::MAPEstimator	
A Mixin class to configure a for MLE estimation (null prior)	577
mappel::estimator::IterativeMaximizer< Model >::MaximizerData	592
mappel::MCMCAdaptor1D	601
mappel::MCMCAdaptor1Ds	619
mappel::MCMCAdaptor2D	637
mappel::MCMCAdaptor2Ds	655
mappel::MCMCAdaptorBase	674
mappel::mcmc::MCMCData	677
mappel::mcmc::MCMCDataStack	679
mappel::mcmc::MCMCDebugData	682
mappel::MLEstimator	
A Mixin class to configure a for MLE estimation (null prior)	683
mappel::ModelBoundsError	
Access outside the model bounds is attempted	698
mappel::estimator::NewtonDiagonalMaximizer< Model >	699
mappel::estimator::NewtonMaximizer< Model >	720
mappel::NotImplementedError	
Feature not yet implemented	741
mappel::NumericalError	
Expected numerical condition does not hold	742
omp_exception_catcher::impl_::OMPExcptionCatcher< _dummy >	743
mappel::ParameterValueError	
Parameter value is not valid	745
mappel::PointEmitterModel	
A virtual Base type for point emitter localization models	746
PoissonGaussianNoise2DObjective< ModelBase >	
A Base type for point emitter localization models that use 2d images	760
mappel::PoissonNoise1DObjective	
A base class for 1D objectives with Poisson read noise. This objective function and its subclasses are for models where the only source of noise is the "shot" or "counting" or Poisson noise inherent to a discrete capture of photons given a certain mean rate of incidence on each pixel	763
mappel::PoissonNoise2DObjective	
A base class for 2D objectives with Poisson read noise. This objective function and its subclasses are for models where the only source of noise is the "shot" or "counting" or Poisson noise inherent to a discrete capture of photons given a certain mean rate of incidence on each pixel	770

mappel::estimator::ProfileBoundsData	777
mappel::estimator::ProfileBoundsDataStack	780
mappel::estimator::QuasiNewtonMaximizer< Model >	784
mappel::estimator::SimulatedAnnealingMaximizer< Model >	805
mappel::Gauss2DsxyModel::Stencil Stencil for 2D free-sigma (astigmatic) models	817
mappel::Gauss1DsModel::Stencil Stencil for 1D variable-sigma models	822
mappel::Gauss2DModel::Stencil Stencil for 2D fixed-sigma models	826
mappel::Gauss2DsModel::Stencil Stencil for 2D scalar-sigma models	831
mappel::Gauss1DModel::Stencil Stencil for 1D fixed-sigma models	836
mappel::estimator::ThreadedEstimator< Model >	840
mappel::estimator::TrustRegionMaximizer< Model >	853

7 File Index

7.1 File List

Here is a list of all files with brief descriptions:

display.cpp	876
display.h Textual image display with colors	877
estimator.cpp Non-templated estimator helper routines and static constants	878
estimator.h The class declaration and inline and templated functions for the Estimator class hierarchy	879
estimator_helpers.h Estimator helper subroutines	882
estimator_impl.h	883
estimator_statics.cpp	884
Gauss1DMAP.cpp The class definition and template Specializations for Gauss1DMAP	884

Gauss1DMAP.h	885
The class declaration and inline and templated functions for Gauss1DMAP	
Gauss1DMLE.cpp	886
The class definition and template Specializations for Gauss1DMLE	
Gauss1DMLE.h	886
The class declaration and inline and templated functions for Gauss1DMLE	
Gauss1DModel.cpp	887
The class definition and template Specializations for Gauss1DModel	
Gauss1DModel.h	887
The class declaration and inline and templated functions for Gauss1DModel	
Gauss1DsMAP.cpp	888
The class definition and template Specializations for Gauss1DsMAP	
Gauss1DsMAP.h	889
The class declaration and inline and templated functions for Gauss1DsMAP	
Gauss1DsMLE.cpp	889
The class definition and template Specializations for Gauss1DsMLE	
Gauss1DsMLE.h	890
The class declaration and inline and templated functions for Gauss1DsMLE	
Gauss1DsModel.cpp	891
The class definition and template Specializations for Gauss1DsModel	
Gauss1DsModel.h	891
The class declaration and inline and templated functions for Gauss1DsModel	
Gauss2DMAP.cpp	892
The class definition and template Specializations for Gauss2DMAP	
Gauss2DMAP.h	892
The class declaration and inline and templated functions for Gauss2DMAP	
Gauss2DMLE.cpp	893
The class definition and template Specializations for Gauss2DMLE	
Gauss2DMLE.h	894
The class declaration and inline and templated functions for Gauss2DMLE	
Gauss2DModel.cpp	894
The class definition and template Specializations for Gauss2DModel	
Gauss2DModel.h	895
The class declaration and inline and templated functions for Gauss2DModel	
Gauss2DsMAP.cpp	896
The class definition and template Specializations for Gauss2DsMAP	
Gauss2DsMAP.h	896
The class declaration and inline and templated functions for Gauss2DsMAP	

Gauss2DsMLE.cpp	
The class definition and template Specializations for Gauss2DsMLE	897
Gauss2DsMLE.h	
The class declaration and inline and templated functions for Gauss2DsMLE	898
Gauss2DsModel.cpp	
The class definition and template Specializations for Gauss2DsModel	898
Gauss2DsModel.h	
The class declaration and inline and templated functions for Gauss2DsModel	899
Gauss2DsxyMAP.h	
The class declaration and inline and templated functions for Gauss2DsxyMAP	900
Gauss2DsxyModel.h	
The class declaration and inline and templated functions for Gauss2DsxyModel	901
ImageFormat1DBase.cpp	
The class definition and template Specializations for ImageFormat1DBase	902
ImageFormat1DBase.h	
The class declaration and inline and templated functions for ImageFormat1DBase	902
ImageFormat2DBase.cpp	
The class definition and template Specializations for ImageFormat2DBase	903
ImageFormat2DBase.h	
The class declaration and inline and templated functions for ImageFormat2DBase	904
MAPEstimator.h	
Class declaration and inline and templated functions for MAPEstimator	905
mcmc.cpp	
MCMC helper functions	906
mcmc.h	
Templated MCMC methods for posterior estimation	907
mcmc_data.h	
MCMC data storage types	908
MCMCAdaptor1D.cpp	
The class definition and template Specializations for MCMCAdaptor1D	908
MCMCAdaptor1D.h	
The class declaration and inline and templated functions for MCMCAdaptor1D	909
MCMCAdaptor1Ds.cpp	
The class definition and template Specializations for MCMCAdaptor1Ds	909
MCMCAdaptor1Ds.h	
The class declaration and inline and templated functions for MCMCAdaptor1Ds	910
MCMCAdaptor2D.cpp	
The class definition and template Specializations for MCMCAdaptor2D	911

MCMCAdaptor2D.h	
The class declaration and inline and templated functions for MCMCAdaptor2D	911
MCMCAdaptor2Ds.cpp	
The class definition and template Specializations for MCMCAdaptor2Ds	912
MCMCAdaptor2Ds.h	
The class declaration and inline and templated functions for MCMCAdaptor2Ds	912
MCMCAdaptorBase.cpp	
The class definition and template Specializations for MCMCAdaptorBase	913
MCMCAdaptorBase.h	
The class declaration and inline and templated functions for MCMCAdaptorBase	913
MLEstimator.h	
Class declaration and inline and templated functions for MLEstimator	914
model_methods.h	915
model_methods_impl.h	918
numerical.cpp	
Numerical matrix operations	921
numerical.h	
Numerical matrix operations	922
OMPExceptionCatcher.h	
A lightweight class for managing C++ exception handling strategies for OpenMP methods	923
openmp_methods.h	
Namespaces for OpenMP parallelized versions of the mappel::model namespace functions (external methods)	925
PointEmitterModel.cpp	
The class definition and template Specializations for PointEmitterModel	927
PointEmitterModel.h	
The class declaration and inline and templated functions for PointEmitterModel	928
PoissonGaussianNoise2DObjective.cpp	929
PoissonGaussianNoise2DObjective.h	
The class declaration and inline and templated functions for PoissonGaussianNoise2DObjective	929
PoissonNoise1DObjective.cpp	
The class definition and template Specializations for PoissonNoise1DObjective	932
PoissonNoise1DObjective.h	
The class declaration and inline and templated functions for PoissonNoise1DObjective	933
PoissonNoise2DObjective.cpp	
The class definition and template Specializations for PoissonNoise2DObjective	935
PoissonNoise2DObjective.h	
The class declaration and inline and templated functions for PoissonNoise2DObjective	935

rng.cpp	
Global random number generator	937
rng.h	
Random number generation using sfmt	938
stencil.cpp	
The stencils for pixel based computations	939
stencil.h	
The stencils for pixel based computations	940
util.cpp	941
util.h	
Common utilities and errors	942

8 Namespace Documentation

8.1 mappel Namespace Reference

Namespaces

- [estimator](#)
- [mcmc](#)
- [methods](#)

Templated functions for operating on a [PointEmitterModel](#).

Classes

- struct [ArrayShapeError](#)
Array is not of the right dimensionality.
- struct [ArraySizeError](#)
Array is not of the right size.
- class [Gauss1DMAP](#)
A 1D Gaussian with fixed PSF under an Poisson Read Noise assumption and MAP Objective.
- class [Gauss1DMLE](#)
A 1D Gaussian with fixed PSF under an Poisson noise assumption and maximum-likelihood objective.
- class [Gauss1DModel](#)
A base class for 1D Gaussian PSF with a fixed sigma (standard dev.)
- class [Gauss1DsMAP](#)
A 1D Gaussian with variable PSF sigma under an Poisson read noise assumption and MAP Objective.
- class [Gauss1DsMLE](#)
A 1D Gaussian with variable PSF under an Poisson noise assumption and maximum-likelihood estimator.
- class [Gauss1DsModel](#)
Base class for 1D Gaussian PSF with variable Gaussian sigma (standard deviation) measured in units of pixels.
- class [Gauss2DMAP](#)

- A 2D Gaussian with fixed PSF under an Poisson Read Noise assumption and MAP Objective.*

 - class [Gauss2DMLE](#)
- A 2D Gaussian with fixed PSF under an Poisson noise assumption and maximum-likelihood objective.*

 - class [Gauss2DModel](#)
- A base class for 2D Gaussian PSF with fixed but possibly asymmetric sigma.*

 - class [Gauss2DsMAP](#)
- A 2D Gaussian with a variable scalar PSF sigma under a Poisson noise assumption using a maximum a-posteriori objective.*

 - class [Gauss2DsMLE](#)
- A 2D Gaussian with a variable scalar PSF sigma under a Poisson noise assumption using a maximum-likelihood objective.*

 - class [Gauss2DsModel](#)
- A base class for 2D Gaussian PSF where the gaussian sigma is controlled by a single scalar parameter which is called sigma_ratio. The size of the gaussian psf is sigma_ratio*psf_sigma, where psf_sigma is considered as a vector [psf_x, psf_y].*

 - class [Gauss2DsxyMAP](#)
- A 1D Gaussian with fixed PSF under an Poisson Read Noise assumption and MAP Objective.*

 - class [Gauss2DsxyModel](#)
- A base class for 2D Gaussian PSF with axis-aligned gaussian with free parameters for both sigma_x and sigma_y. Gaussian sigma parameters sigma_x and sigma_y are measured in units of pixels. The model has 6 parameters, [x,y,l,bg,sigma_x,sigma_y].*

 - class [ImageFormat1DBase](#)
- A virtual base class for 2D image localization objectives.*

 - class [ImageFormat2DBase](#)
- A virtual base class for 2D image localization objectives.*

 - struct [LogicalError](#)
- Failure of code or algorithm logic.*

 - class [MAPEstimator](#)
- A Mixin class to configure a for MLE estimation (null prior).*

 - class [MCMCAdaptor1D](#)
 - class [MCMCAdaptor1Ds](#)
 - class [MCMCAdaptor2D](#)
 - class [MCMCAdaptor2Ds](#)
 - class [MCMCAdaptorBase](#)
 - class [MLEstimator](#)
- A Mixin class to configure a for MLE estimation (null prior).*

 - struct [ModelBoundsError](#)
- Access outside the model bounds is attempted.*

 - struct [NotImplementedError](#)
- Feature not yet implemented.*

 - struct [NumericalError](#)
- Expected numerical condition does not hold.*

 - struct [ParameterValueError](#)
- Parameter value is not valid.*

 - class [PointEmitterModel](#)
- A virtual Base type for point emitter localization models.*

 - class [PoissonNoise1DObjective](#)
- A base class for 1D objectives with Poisson read noise. This objective function and its subclasses are for models where the only source of noise is the "shot" or "counting" or Poisson noise inherent to a discrete capture of photons given a certain mean rate of incidence on each pixel.*

- class [PoissonNoise2DObjective](#)

A base class for 2D objectives with Poisson read noise. This objective function and its subclasses are for models where the only source of noise is the "shot" or "counting" or Poisson noise inherent to a discrete capture of photons given a certain mean rate of incidence on each pixel.

Typedefs

- using [ParallelRngGeneratorT](#) = `trng::lcg64_shift`
- using [ParallelRngManagerT](#) = `parallel_rng::ParallelRngManager< ParallelRngGeneratorT >`
- using [RngSeedT](#) = `parallel_rng::SeedT`
- using [UniformDistT](#) = `std::uniform_real_distribution< double >`
- using [BoolT](#) = `uint16_t`
- using [BoolVecT](#) = `arma::Col< uint16_t >`
- using [IdxT](#) = `arma::uword`
- using [IdxVecT](#) = `arma::Col< IdxT >`
- using [IdxMatT](#) = `arma::Mat< IdxT >`
- using [VecT](#) = `arma::vec`
- using [MatT](#) = `arma::mat`
- using [CubeT](#) = `arma::cube`
- using [VecFieldT](#) = `arma::field< VecT >`
- using [StatsT](#) = `std::map< std::string, double >`
- using [StringVecT](#) = `std::vector< std::string >`
- template<class ModelT, class ModelBaseT >
using [EnableIfSubclassT](#) = `typename std::enable_if< std::is_base_of< ModelBaseT, ModelT >::value, void >::type`
- template<class ReturnT, class ModelT, class ModelBaseT >
using [ReturnIfSubclassT](#) = `typename std::enable_if< std::is_base_of< ModelBaseT, ModelT >::value, ReturnT >::type`
- template<class Model >
using [ImageCoordT](#) = `typename Model::ImageCoordT`
- template<class Model >
using [ImagePixelT](#) = `typename Model::ImagePixelT`
- template<class Model >
using [ParamT](#) = `typename Model::ParamT`
- template<class Model >
using [ParamVecT](#) = `typename Model::ParamVecT`
- template<class Model >
using [ImageT](#) = `typename Model::ImageT`
- template<class Model >
using [ModelDataT](#) = `typename Model::ModelDataT`
- template<class Model >
using [StencilT](#) = `typename Model::Stencil`
- template<class Model >
using [ImageStackT](#) = `typename Model::ImageStackT`
- template<class Model >
using [ModelDataStackT](#) = `typename Model::ModelDataStackT`
- template<class Model >
using [StencilVecT](#) = `typename Model::StencilVecT`
- using [MappelError](#) = `backtrace_exception::BacktraceException`

Functions

- `const char * lambda_term_color` (int size, int Lidx)
- `ostream & print_centered_title` (ostream &out, char fill, int width, const char *title=nullptr)
- `ostream & print_labeled_image` (ostream &out, const arma::mat &im, const char *title, const char *color)
- `template<>`
`std::ostream & print_image` (std::ostream &out, const arma::vec &im)
- `template<>`
`std::ostream & print_image` (std::ostream &out, const arma::mat &im)
- `template<>`
`std::ostream & print_text_image` (std::ostream &out, const arma::vec &im)
- `template<>`
`std::ostream & print_text_image` (std::ostream &out, const arma::mat &im)
- `template<>`
`std::ostream & print_image` (std::ostream &out, const arma::cube &im)
- `std::ostream & operator<<` (std::ostream &out, const Gauss1DModel::Stencil &s)
- `std::ostream & operator<<` (std::ostream &out, const Gauss1DsModel::Stencil &s)
- `std::ostream & operator<<` (std::ostream &out, const Gauss2DModel::Stencil &s)
- `std::ostream & operator<<` (std::ostream &out, const Gauss2DsModel::Stencil &s)
- `void copy_Usym_mat` (arma::mat &usym)
- `void copy_Usym_mat_stack` (arma::cube &usym_stack)
- `void copy_Lsym_mat` (arma::mat &lsym)
- `void cholesky_make_negative_definite` (arma::mat &m)
- `void cholesky_make_positive_definite` (arma::mat &m)
- `bool is_negative_definite` (const arma::mat &usym)
- `bool is_positive_definite` (const arma::mat &usym)
- `bool is_symmetric` (const arma::mat &A)
- `void cholesky_convert_lower_triangular` (arma::mat &chol)
- `void cholesky_convert_full_matrix` (arma::mat &chol)
- `bool cholesky` (arma::mat &A)
- `bool modified_cholesky` (arma::mat &A)
- `arma::vec cholesky_solve` (const arma::mat &C, const arma::vec &b)
- `double norm_sq` (const VecT &v)
- `double normal_quantile_twosided` (double confidence)
- `double normal_quantile_onesided` (double confidence)
- `double chisq_quantile` (double confidence, int dof)
- `double chisq_quantile` (double confidence)
- `void fill_gaussian_stencil` (int size, double stencil[], double sigma)
- `double gaussian_convolution` (int x, int y, const MatT &data, const VecT &Xstencil, const VecT &Ystencil)
- `void estimate_gaussian_2Dmax` (const MatT &data, const VecT &Xstencil, const VecT &Ystencil, int max_pos[], double &min_val)
- `void refine_gaussian_2Dmax` (const MatT &data, const VecT &Xstencil, const VecT &Ystencil, int max_pos[])
- `double gaussian_3D_convolution` (int x, int y, int z, const CubeT &data, const VecFieldT &stencils)
- `void estimate_gaussian_3Dmax` (const CubeT &data, const VecFieldT &stencils, int max_pos[], double &min_val)
- `void refine_gaussian_3Dmax` (const CubeT &data, const VecFieldT &stencils, int max_pos[])
- `double estimate_background` (const MatT &im, const MatT &unit_model_im, double min_bg)
- `double estimate_intensity` (const MatT &im, const MatT &unit_model_im, double bg)
- `double estimate_background` (const CubeT &im, const CubeT &unit_model_im)
- `double estimate_intensity` (const CubeT &im, const CubeT &unit_model_im, double bg)
- `void enable_all_cpus` ()
- `bool istarts_with` (const char *s, const char *pattern)

- bool [istarts_with](#) (const std::string &str, const char *pattern)
- const char * [icontains](#) (const char *s, const char *pattern)
- int [maxidx](#) (const [VecT](#) &v)
- std::ostream & [operator<<](#) (std::ostream &out, const [StatsT](#) &stats)
- template<class ImageT >
std::ostream & [print_image](#) (std::ostream &out, const [ImageT](#) &im)
- template<class ImageT >
std::ostream & [print_text_image](#) (std::ostream &out, const [ImageT](#) &im)
- template<class Vec >
std::ostream & [print_vec_row](#) (std::ostream &out, const Vec &vec, const char *header, int header_width, const char *color=nullptr)
- template<class Model >
std::enable_if< std::is_base_of< [Gauss2DModel](#), Model >::value, [ParamT](#)< Model > >::type [cgauss_↵](#)
[heuristic_compute_estimate](#) (const Model &model, const [ModelDataT](#)< Model > &im, const [ParamT](#)< Model >
> &theta_init)
- template<class Model >
std::enable_if< std::is_base_of< [Gauss2DModel](#), Model >::value, [ParamT](#)< Model > >::type [cgauss_↵](#)
[compute_estimate](#) (Model &model, const [ModelDataT](#)< Model > &im, const [ParamT](#)< Model > &theta_init,
int max_iterations)
- template<class Model >
std::enable_if< std::is_base_of< [Gauss2DModel](#), Model >::value, [ParamT](#)< Model > >::type [cgauss_↵](#)
[compute_estimate_debug](#) (const Model &model, const [ModelDataT](#)< Model > &im, const [ParamT](#)< Model >
&theta_init, int max_iterations, [ParamVecT](#)< Model > &sequence)
- template<class Model >
std::enable_if< std::is_base_of< [Gauss2DsModel](#), Model >::value, [ParamT](#)< Model > >::type [cgauss_↵](#)
[heuristic_compute_estimate](#) (const Model &model, const [ModelDataT](#)< Model > &im, const [ParamT](#)< Model >
> &theta_init)
- template<class Model >
std::enable_if< std::is_base_of< [Gauss2DsModel](#), Model >::value, [ParamT](#)< Model > >::type [cgauss_↵](#)
[compute_estimate](#) (Model &model, const [ModelDataT](#)< Model > &im, const [ParamT](#)< Model > &theta_init,
int max_iterations)
- template<class Model >
std::enable_if< std::is_base_of< [Gauss2DsModel](#), Model >::value, [ParamT](#)< Model > >::type [cgauss_↵](#)
[compute_estimate_debug](#) (const Model &model, const [ModelDataT](#)< Model > &im, const [ParamT](#)< Model >
&theta_init, int max_iterations, [ParamVecT](#)< Model > &sequence)
- template<class Model >
std::enable_if< std::is_base_of< [Gauss2DsxyModel](#), Model >::value, [ParamT](#)< Model > >::type [cgauss_↵](#)
[heuristic_compute_estimate](#) (const Model &model, const [ModelDataT](#)< Model > &im, const [ParamT](#)< Model >
&theta_init)
- template<class Model >
std::enable_if< std::is_base_of< [Gauss2DsxyModel](#), Model >::value, [ParamT](#)< Model > >::type [cgauss_↵](#)
[compute_estimate](#) (Model &model, const [ModelDataT](#)< Model > &im, const [ParamT](#)< Model > &theta_init, int
max_iterations)
- template<class Model >
std::enable_if< std::is_base_of< [Gauss2DsxyModel](#), Model >::value, [ParamT](#)< Model > >::type [cgauss_↵](#)
[compute_estimate_debug](#) (const Model &model, const [ModelDataT](#)< Model > &im, const [ParamT](#)< Model >
&theta_init, int max_iterations, [ParamVecT](#)< Model > &sequence)
- template<class FloatT >
FloatT [clamp](#) (FloatT val, FloatT min_val, FloatT max_val)
- template<class Model, typename = EnableIfSubclassT<Model,PointEmitterModel>>
std::ostream & [operator<<](#) (std::ostream &out, const Model &model)
- template<class RngT >
[IdxT](#) [generate_poisson_small](#) (RngT &rng, double mu)

Generates a single Poisson distributed int from distribution with mean mu.

- `template<class RngT >`
`IdxT generate_poisson_large` (RngT &rng, double mu)
- `template<class RngT >`
`double generate_poisson` (RngT &rng, double mu)
- `double gauss_norm` (double sigma)
- `void fill_d_stencil` (int size, double stencil[], double theta_x)
- `void fill_G_stencil` (int size, double stencil[], const double dx[], double theta_sigma)
- `void fill_X_stencil` (int size, double stencil[], const double dx[], double theta_sigma)
- `void fill_DX_stencil` (int size, double stencil[], const double Gx[], double theta_sigma)
- `void fill_DXS_stencil` (int size, double stencil[], const double dx[], const double Gx[], double theta_sigma)
- `void fill_DXS2_stencil` (int size, double stencil[], const double dx[], const double Gx[], const double DXS[], double theta_sigma)
- `void fill_DXSX_stencil` (int size, double stencil[], const double dx[], const double Gx[], const double DX[], double theta_sigma)
- `VecT make_d_stencil` (int size, double theta_x)
- `VecT make_G_stencil` (int size, const VecT &dx, double theta_sigma)
- `VecT make_X_stencil` (int size, const VecT &dx, double theta_sigma)
- `VecT make_DX_stencil` (int size, const VecT &Gx, double theta_sigma)
- `VecT make_DXS_stencil` (int size, const VecT &dx, const VecT &Gx, double theta_sigma)
- `VecT make_DXS2_stencil` (int size, const VecT &dx, const VecT &Gx, const VecT &DXS, double theta_sigma)
- `VecT make_DXSX_stencil` (int size, const VecT &dx, const VecT &Gx, const VecT &DX, double theta_sigma)
- `VecT make_gaussian_stencil` (int size, double sigma)
- `double poisson_log_likelihood` (double model_val, double data_val)
- `double relative_poisson_log_likelihood` (double model_val, double data_val)
- `double check_lower_bound_hyperparameter` (const char *name, double value, double lower_bound)
- `double check_positive_hyperparameter` (const char *name, double value, double hyperprior_epsilon=1E-6)
- `double check_unit_hyperparameter` (const char *name, double value, double hyperprior_epsilon=1E-6)
- `double log_prior_beta_const` (double beta)
- `double log_prior_beta2_const` (double beta0, double beta1)
- `double log_prior_gamma_const` (double kappa, double mean)
- `double log_prior_pareto_const` (double alpha, double min)
- `double log_prior_normal_const` (double sigma)
- `double rllh_beta_prior` (double beta, double v, double max=1., double min=0.)
- `double rllh_beta2_prior` (double beta0, double beta1, double v, double max=1., double min=0.)
- `double rllh_gamma_prior` (double kappa, double mean, double v)
- `double rllh_pareto_prior` (double alpha, double v)
- `double rllh_normal_prior` (double mu, double sigma)
- `double beta_prior_grad` (double beta, double v, double max=1., double min=0.)
- `double beta2_prior_grad` (double beta0, double beta1, double v, double max=1., double min=0.)
- `double gamma_prior_grad` (double kappa, double mean, double v)
- `double pareto_prior_grad` (double alpha, double v)
- `double normal_prior_grad` (double mu, double sigma)
- `double beta_prior_grad2` (double beta, double v, double max=1., double min=0.)
- `double beta2_prior_grad2` (double beta0, double beta1, double v, double max=1., double min=0.)
- `double gamma_prior_grad2` (double kappa, double v)
- `double pareto_prior_grad2` (double alpha, double v)
- `double normal_prior_grad` (double sigma)
- `double rllh_normal_prior` (double mu, double sigma, double v)
- `double normal_prior_grad` (double mu, double sigma, double v)
- `double normal_prior_grad2` (double sigma)

- `template<typename T >`
`int sgn (T val)`
sign (signum) function: -1/0/1
- `template<typename T >`
`T square (T x)`
- `double restrict_value_range (double val, double minval, double maxval)`
- `template<typename T , typename... Args>`
`std::unique_ptr< T > make_unique (Args &&...args)`

Variables

- `const char * TERM_BLACK ="1;30"`
- `const char * TERM_RED ="1;31"`
- `const char * TERM_GREEN ="1;32"`
- `const char * TERM_YELLOW ="1;33"`
- `const char * TERM_BLUE ="1;34"`
- `const char * TERM_MAGENTA ="1;35"`
- `const char * TERM_CYAN ="1;36"`
- `const char * TERM_WHITE ="1;37"`
- `const char * TERM_DIM_BLACK ="0;30"`
- `const char * TERM_DIM_RED ="0;31"`
- `const char * TERM_DIM_GREEN ="0;32"`
- `const char * TERM_DIM_YELLOW ="0;33"`
- `const char * TERM_DIM_BLUE ="0;34"`
- `const char * TERM_DIM_MAGENTA ="0;35"`
- `const char * TERM_DIM_CYAN ="0;36"`
- `const char * TERM_DIM_WHITE ="0;37"`
- `ParallelRngManagerT rng_manager`

8.1.1 Detailed Description

All models will call for maximization through this virtual function. All non-GPU based maximizers will use this version which spawns threads using a non-virtual entry point member function `Maximizer::thread_entry`. GPU-based maximizers will want to do something custom, so they will declare their own virtual `maximize_stack`.

It is also because of the GPU-based maximizers that we are putting initialization, and CRLB/LLH calculations in here even though the Model knows how to do them.

We expect that those methods will need to also be parallelized and the GPU will need custom code, and the threaded CPU versions will want to also compute those in parallel, so in order to have a consistent call interface to the `Maximizer` classes, we put the CRLB/LLH and initialization work within the `maximize_stack` method.

8.1.2 Typedef Documentation

8.1.2.1 using `mappel::BoolT = typedef uint16_t`

Definition at line 23 of file `util.h`.

8.1.2.2 `using mappel::BoolVecT = typedef arma::Col<uint16_t>`

Definition at line 24 of file util.h.

8.1.2.3 `using mappel::CubeT = typedef arma::cube`

A type to represent floating-point data cubes

Definition at line 30 of file util.h.

8.1.2.4 `template<class ModelT , class ModelBaseT > using mappel::EnableIfSubclassT = typedef typename std::enable_if<std::is_base_of<ModelBaseT,ModelT>::value,void>::type`

Definition at line 37 of file util.h.

8.1.2.5 `using mappel::IdxMatT = typedef arma::Mat<IdxT>`

A type to represent integer data arrays

Definition at line 27 of file util.h.

8.1.2.6 `using mappel::IdxT = typedef arma::uword`

Definition at line 25 of file util.h.

8.1.2.7 `using mappel::IdxVecT = typedef arma::Col<IdxT>`

A type to represent integer data arrays

Definition at line 26 of file util.h.

8.1.2.8 `template<class Model > using mappel::ImageCoordT = typedef typename Model::ImageCoordT`

Definition at line 42 of file util.h.

8.1.2.9 `template<class Model > using mappel::ImagePixelT = typedef typename Model::ImagePixelT`

Definition at line 43 of file util.h.

8.1.2.10 `template<class Model > using mappel::ImageStackT = typedef typename Model::ImageStackT`

Definition at line 51 of file util.h.

8.1.2.11 `template<class Model > using mappel::ImageT = typedef typename Model::ImageT`

Definition at line 47 of file util.h.

8.1.2.12 `using mappel::MappelError = typedef backtrace_exception::BacktraceException`

Definition at line 64 of file util.h.

8.1.2.13 `using mappel::MatT = typedef arma::mat`

A type to represent floating-point data matrices

Definition at line 29 of file util.h.

8.1.2.14 `template<class Model> using mappel::ModelDataStackT = typedef typename Model::ModelDataStackT`

Definition at line 52 of file util.h.

8.1.2.15 `template<class Model> using mappel::ModelDataT = typedef typename Model::ModelDataT`

Definition at line 48 of file util.h.

8.1.2.16 `using mappel::ParallelRngGeneratorT = typedef trng::lcg64_shift`

Definition at line 21 of file rng.h.

8.1.2.17 `using mappel::ParallelRngManagerT = typedef parallel_rng::ParallelRngManager<ParallelRngGeneratorT>`

Definition at line 22 of file rng.h.

8.1.2.18 `template<class Model> using mappel::ParamT = typedef typename Model::ParamT`

Definition at line 45 of file util.h.

8.1.2.19 `template<class Model> using mappel::ParamVecT = typedef typename Model::ParamVecT`

Definition at line 46 of file util.h.

8.1.2.20 `template<class ReturnT, class ModelT, class ModelBaseT> using mappel::ReturnIfSubclassT = typedef typename std::enable_if<std::is_base_of<ModelBaseT, ModelT>::value, ReturnT>::type`

Definition at line 40 of file util.h.

8.1.2.21 `using mappel::RngSeedT = typedef parallel_rng::SeedT`

Definition at line 23 of file rng.h.

8.1.2.22 `using mappel::StatsT = typedef std::map<std::string, double>`

A convenient form for reporting dictionaries of named FP data to Matlab

Definition at line 32 of file util.h.

8.1.2.23 `template<class Model > using mappel::StencilT = typedef typename Model::Stencil`

Definition at line 49 of file util.h.

8.1.2.24 `template<class Model > using mappel::StencilVecT = typedef typename Model::StencilVecT`

Definition at line 53 of file util.h.

8.1.2.25 `using mappel::StringVecT = typedef std::vector<std::string>`

Definition at line 33 of file util.h.

8.1.2.26 `using mappel::UniformDistT = typedef std::uniform_real_distribution<double>`

Definition at line 24 of file rng.h.

8.1.2.27 `using mappel::VecFieldT = typedef arma::field<VecT>`

Definition at line 31 of file util.h.

8.1.2.28 `using mappel::VecT = typedef arma::vec`

A type to represent floating-point data arrays

Definition at line 28 of file util.h.

8.1.3 Function Documentation

8.1.3.1 `double mappel::beta2_prior_grad (double beta0, double beta1, double v, double max = 1 . , double min = 0 .)`
[inline]

Definition at line 316 of file stencil.h.

8.1.3.2 `double mappel::beta2_prior_grad2 (double beta0, double beta1, double v, double max = 1 . , double min = 0 .)`
[inline]

Definition at line 349 of file stencil.h.

8.1.3.3 `double mappel::beta_prior_grad (double beta, double v, double max = 1 . , double min = 0 .)` [inline]

Definition at line 309 of file stencil.h.

8.1.3.4 `double mappel::beta_prior_grad2 (double beta, double v, double max = 1 . , double min = 0 .)` [inline]

Definition at line 341 of file stencil.h.

8.1.3.5 `template<class Model > std::enable_if<std::is_base_of<Gauss2DModel,Model>::value, ParamT<Model> >::type mappel::cgauss_compute_estimate (Model & model, const ModelDataT< Model > & im, const ParamT< Model > & theta_init, int max_iterations)`

Definition at line 223 of file Gauss2DModel.h.

References mappel::Gauss2DModel::psf_sigma, and mappel::ImageFormat2DBase::size.

Referenced by mappel::estimator::CGaussMLE< Model >::get_debug_stats().

8.1.3.6 `template<class Model > std::enable_if<std::is_base_of<Gauss2DsxyModel,Model>::value, ParamT<Model> >::type mappel::cgauss_compute_estimate (Model & model, const ModelDataT< Model > & im, const ParamT< Model > & theta_init, int max_iterations)`

Definition at line 251 of file Gauss2DsxyModel.h.

References mappel::ImageFormat2DBase::size.

8.1.3.7 `template<class Model > std::enable_if<std::is_base_of<Gauss2DsModel,Model>::value, ParamT<Model> >::type mappel::cgauss_compute_estimate (Model & model, const ModelDataT< Model > & im, const ParamT< Model > & theta_init, int max_iterations)`

Definition at line 253 of file Gauss2DsModel.h.

References mappel::ImageFormat2DBase::size.

8.1.3.8 `template<class Model > std::enable_if<std::is_base_of<Gauss2DModel,Model>::value, ParamT<Model> >::type mappel::cgauss_compute_estimate_debug (const Model & model, const ModelDataT< Model > & im, const ParamT< Model > & theta_init, int max_iterations, ParamVecT< Model > & sequence)`

Definition at line 238 of file Gauss2DModel.h.

References mappel::Gauss2DModel::psf_sigma, and mappel::ImageFormat2DBase::size.

Referenced by mappel::estimator::CGaussMLE< Model >::get_debug_stats().

8.1.3.9 `template<class Model > std::enable_if<std::is_base_of<Gauss2DsxyModel,Model>::value, ParamT<Model> >::type mappel::cgauss_compute_estimate_debug (const Model & model, const ModelDataT< Model > & im, const ParamT< Model > & theta_init, int max_iterations, ParamVecT< Model > & sequence)`

Definition at line 266 of file Gauss2DsxyModel.h.

References mappel::ImageFormat2DBase::size.

8.1.3.10 `template<class Model > std::enable_if<std::is_base_of<Gauss2DsModel,Model>::value, ParamT<Model> >::type mappel::cgauss_compute_estimate_debug (const Model & model, const ModelDataT< Model > & im, const ParamT< Model > & theta_init, int max_iterations, ParamVecT< Model > & sequence)`

Definition at line 268 of file Gauss2DsModel.h.

References mappel::ImageFormat2DBase::size.

8.1.3.11 `template<class Model> std::enable_if<std::is_base_of<Gauss2DModel,Model>::value,ParamT<Model>>::type
mappel::cgauss_heuristic_compute_estimate (const Model & model, const ModelDataT<Model> & im, const
ParamT<Model> & theta_init)`

Definition at line 209 of file Gauss2DModel.h.

References `mappel::Gauss2DModel::psf_sigma`, and `mappel::ImageFormat2DBase::size`.

Referenced by `mappel::estimator::HeuristicEstimator<Model>::get_debug_stats()`, and `mappel::estimator::CGaussMLE<Model>::get_debug_stats()`.

8.1.3.12 `template<class Model> std::enable_if<std::is_base_of<Gauss2DsxyModel,Model>::value,ParamT<Model>>::type
mappel::cgauss_heuristic_compute_estimate (const Model & model, const ModelDataT<Model> & im, const
ParamT<Model> & theta_init)`

Definition at line 237 of file Gauss2DsxyModel.h.

References `mappel::ImageFormat2DBase::size`.

8.1.3.13 `template<class Model> std::enable_if<std::is_base_of<Gauss2DsModel,Model>::value,ParamT<Model>>::type
mappel::cgauss_heuristic_compute_estimate (const Model & model, const ModelDataT<Model> & im, const
ParamT<Model> & theta_init)`

Definition at line 239 of file Gauss2DsModel.h.

References `mappel::ImageFormat2DBase::size`.

8.1.3.14 `double mappel::check_lower_bound_hyperparameter (const char * name, double value, double lower_bound)`

8.1.3.15 `double mappel::check_positive_hyperparameter (const char * name, double value, double hyperprior_epsilon = 1E-6)`

8.1.3.16 `double mappel::check_unit_hyperparameter (const char * name, double value, double hyperprior_epsilon = 1E-6)`

8.1.3.17 `double mappel::chisq_quantile (double confidence, int dof)`

Definition at line 43 of file stencil.cpp.

Referenced by `mappel::methods::error_bounds_profile_likelihood()`, `mappel::methods::openmp::error_bounds_profile_likelihood_parallel()`, and `mappel::methods::openmp::error_bounds_profile_likelihood_stack()`.

8.1.3.18 `double mappel::chisq_quantile (double confidence)`

Definition at line 50 of file stencil.cpp.

8.1.3.19 `bool mappel::cholesky (arma::mat & A)`

Convert full or upper-triangular symmetric matrix to lower-triangular Cholesky decomposition in-place

No error checking is performed

Parameters

in, out		
---------	--	--

Definition at line 102 of file numerical.cpp.

Referenced by `is_positive_definite()`, `mappel::estimator::subroutine::solve_restricted_step_length_newton()`, and `mappel::estimator::subroutine::solve_TR_subproblem()`.

8.1.3.20 `void mappel::cholesky_convert_full_matrix (arma::mat & chol)`

Convert matrix in internal Cholesky format into a full matrix $M = L * L'$

Definition at line 82 of file numerical.cpp.

References `copy_Usym_mat()`.

Referenced by `cholesky_make_negative_definite()`, and `cholesky_make_positive_definite()`.

8.1.3.21 `void mappel::cholesky_convert_lower_triangular (arma::mat & chol)`

Convert matrix in internal Cholesky format into a lower triangular matrix L where $M = L * L'$

Definition at line 71 of file numerical.cpp.

Referenced by `mappel::estimator::subroutine::solve_restricted_step_length_newton()`.

8.1.3.22 `void mappel::cholesky_make_negative_definite (arma::mat & m)`

Modify m in-place using modified Cholesky decomposition to ensure m is negative definite

Definition at line 38 of file numerical.cpp.

References `cholesky_convert_full_matrix()`, and `modified_cholesky()`.

Referenced by `mappel::methods::objective::negative_definite_hessian()`.

8.1.3.23 `void mappel::cholesky_make_positive_definite (arma::mat & m)`

Modify m in-place using modified Cholesky decomposition to ensure m is positive definite

Definition at line 46 of file numerical.cpp.

References `cholesky_convert_full_matrix()`, and `modified_cholesky()`.

8.1.3.24 `arma::vec mappel::cholesky_solve (const arma::mat & C, const arma::vec & b)`

Given a matrix in modified Cholesky format and a vector solve the linear system $Cx = b$.

Parameters

<i>C</i>	A matrix in lower modified Cholesky format
<i>b</i>	A vector representing the right hand side of the linear system.

Returns

x - the solution to the linear system

Definition at line 186 of file numerical.cpp.

Referenced by `mappel::estimator::subroutine::solve_restricted_step_length_newton()`, and `mappel::estimator::subroutine::solve_TR_subproblem()`.

8.1.3.25 `template<class FloatT > FloatT mappel::clamp (FloatT val, FloatT min_val, FloatT max_val)`

Definition at line 103 of file numerical.h.

References `norm_sq()`.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::backtrack()`, `mappel::estimator::subroutine::compute_D_scale()`, `mappel::estimator::subroutine::compute_initial_trust_radius()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, `mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack()`, and `mappel::estimator::subroutine::solve_restricted_step_length_newton()`.

8.1.3.26 `void mappel::copy_Lsym_mat (arma::mat & lsym)`

Convert symmetric matrix stored as lower triangular to full Matrix Assuming *lsym* is the main diagonal and lower triangle of a symmetric matrix, fill in the upper triangle by copying the lower triangle. This operation modifies the matrix.

Definition at line 30 of file numerical.cpp.

8.1.3.27 `void mappel::copy_Usym_mat (arma::mat & usym)`

Convert symmetric matrix stored as upper triangular to full Matrix Assuming *usym* is the main diagonal and upper triangle of a symmetric matrix, fill in the lower triangle by copying the upper triangle. This operation modifies the matrix.

Definition at line 13 of file numerical.cpp.

Referenced by `cholesky_convert_full_matrix()`.

8.1.3.28 `void mappel::copy_Usym_mat_stack (arma::cube & usym_stack)`

Definition at line 20 of file numerical.cpp.

8.1.3.29 `void mappel::enable_all_cpus ()`

Definition at line 16 of file util.cpp.

8.1.3.30 `double mappel::estimate_background (const MatT & im, const MatT & unit_model_im, double min_bg)`

Definition at line 280 of file stencil.cpp.

8.1.3.31 `double mappel::estimate_background (const CubeT & im, const CubeT & unit_model_im)`

Definition at line 299 of file stencil.cpp.

8.1.3.32 `void mappel::estimate_gaussian_2Dmax (const MatT & data, const VecT & Xstencil, const VecT & Ystencil, int max_pos[], double & min_val)`

Definition at line 158 of file stencil.cpp.

References `gaussian_convolution()`.

8.1.3.33 `void mappel::estimate_gaussian_3Dmax (const CubeT & data, const VecFieldT & stencils, int max_pos[], double & min_val)`

Definition at line 222 of file stencil.cpp.

References `gaussian_3D_convolution()`.

8.1.3.34 `double mappel::estimate_intensity (const MatT & im, const MatT & unit_model_im, double bg)`

Definition at line 294 of file stencil.cpp.

8.1.3.35 `double mappel::estimate_intensity (const CubeT & im, const CubeT & unit_model_im, double bg)`

Definition at line 309 of file stencil.cpp.

8.1.3.36 `void mappel::fill_d_stencil (int size, double stencil[], double theta_x) [inline]`

Definition at line 153 of file stencil.h.

Referenced by `make_d_stencil()`.

8.1.3.37 `void mappel::fill_DX_stencil (int size, double stencil[], const double Gx[], double theta_sigma) [inline]`

Definition at line 178 of file stencil.h.

Referenced by `make_DX_stencil()`.

8.1.3.38 `void mappel::fill_DXS2_stencil (int size, double stencil[], const double dx[], const double Gx[], const double DXS[], double theta_sigma) [inline]`

Definition at line 192 of file stencil.h.

Referenced by `make_DXS2_stencil()`.

8.1.3.39 `void mappel::fill_DXS_stencil (int size, double stencil[], const double dx[], const double Gx[], double theta_sigma) [inline]`

Definition at line 185 of file stencil.h.

References square().

Referenced by make_DXS_stencil().

8.1.3.40 `void mappel::fill_DXSX_stencil (int size, double stencil[], const double dx[], const double Gx[], const double DX[], double theta_sigma) [inline]`

Definition at line 205 of file stencil.h.

Referenced by make_DXSX_stencil().

8.1.3.41 `void mappel::fill_G_stencil (int size, double stencil[], const double dx[], double theta_sigma) [inline]`

Definition at line 159 of file stencil.h.

References square().

Referenced by make_G_stencil().

8.1.3.42 `void mappel::fill_gaussian_stencil (int size, double stencil[], double sigma)`

Definition at line 57 of file stencil.cpp.

References gauss_norm().

Referenced by make_gaussian_stencil().

8.1.3.43 `void mappel::fill_X_stencil (int size, double stencil[], const double dx[], double theta_sigma) [inline]`

Definition at line 166 of file stencil.h.

Referenced by make_X_stencil().

8.1.3.44 `double mappel::gamma_prior_grad (double kappa, double mean, double v) [inline]`

Definition at line 322 of file stencil.h.

8.1.3.45 `double mappel::gamma_prior_grad2 (double kappa, double v) [inline]`

Definition at line 358 of file stencil.h.

8.1.3.46 `double mappel::gauss_norm (double sigma) [inline]`

Definition at line 94 of file stencil.h.

Referenced by fill_gaussian_stencil().

8.1.3.47 `double mappel::gaussian_3D_convolution (int x, int y, int z, const CubeT & data, const VecFieldT & stencils)`

Definition at line 201 of file stencil.cpp.

Referenced by `estimate_gaussian_3Dmax()`, and `refine_gaussian_3Dmax()`.

8.1.3.48 `double mappel::gaussian_convolution (int x, int y, const MatT & data, const VecT & Xstencil, const VecT & Ystencil)`

Definition at line 144 of file stencil.cpp.

Referenced by `estimate_gaussian_2Dmax()`, and `refine_gaussian_2Dmax()`.

8.1.3.49 `template<class RngT > double mappel::generate_poisson (RngT & rng, double mu)`

Definition at line 81 of file rng.h.

References `generate_poisson_large()`, and `generate_poisson_small()`.

Referenced by `mappel::methods::simulate_image()`, `simulate_image()`, and `mappel::methods::simulate_image_from←_model()`.

8.1.3.50 `template<class RngT > IdxT mappel::generate_poisson_large (RngT & rng, double mu)`

Definition at line 57 of file rng.h.

Referenced by `generate_poisson()`.

8.1.3.51 `template<class RngT > IdxT mappel::generate_poisson_small (RngT & rng, double mu)`

Generates a single Poisson distributed int from distribution with mean mu.

Parameters

<i>mu</i>	- mean of Poisson distribution
<i>sfmt</i>	- A pointer to the SFMT rng state.

Knuth method circa 1969. Transformed to work in log space. This is linear in mu. Works ok for small counts.

Definition at line 43 of file rng.h.

Referenced by `generate_poisson()`.

8.1.3.52 `const char * mappel::icontains (const char * s, const char * pattern)`

Definition at line 45 of file util.cpp.

8.1.3.53 `bool mappel::is_negative_definite (const arma::mat & usym)`

Determine if C is negative definite (i.e., -C is positive definite)

Parameters

<i>usym</i>	A symmetric matrix in upper triangular format.
-------------	--

Returns

True if C is negative definite

Definition at line 52 of file numerical.cpp.

References `is_positive_definite()`.

8.1.3.54 `bool mappel::is_positive_definite (const arma::mat & usym)`

Determine if C is positive definite

Parameters

<i>usym</i>	A symmetric matrix in upper triangular format.
-------------	--

Returns

True if C is positive definite

Definition at line 57 of file numerical.cpp.

References `cholesky()`.

Referenced by `is_negative_definite()`, and `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

8.1.3.55 `bool mappel::is_symmetric (const arma::mat & A)`

Check that full 2D matrix A is symmetric and can thus be treated as either upper or lower triangular symmetric representation. This will obviously not work with matrices that are already implicitly stored as symmetric triangular format since those matrices won't have the other triangle of elements filled in correctly.

Definition at line 63 of file numerical.cpp.

8.1.3.56 `bool mappel::istarts_with (const char * s, const char * pattern)`

Definition at line 27 of file util.cpp.

Referenced by `mappel::Gauss1DsModel::make_default_prior()`, `mappel::Gauss2DModel::make_default_prior()`, `mappel::Gauss1DModel::make_default_prior()`, `mappel::Gauss2DsModel::make_default_prior()`, `mappel::methods::make_estimator()`, and `make_estimator()`.

8.1.3.57 `bool mappel::istarts_with (const std::string & str, const char * pattern)`

Definition at line 35 of file `util.cpp`.

8.1.3.58 `const char* mappel::lambda_term_color (int size, int Lidx)`

Definition at line 33 of file `display.cpp`.

References `TERM_BLUE`, `TERM_CYAN`, `TERM_DIM_BLUE`, `TERM_DIM_CYAN`, `TERM_DIM_GREEN`, `TERM_DIM_MAGENTA`, `TERM_DIM_RED`, `TERM_DIM_WHITE`, `TERM_DIM_YELLOW`, `TERM_GREEN`, `TERM_MAGENTA`, `TERM_RED`, `TERM_WHITE`, and `TERM_YELLOW`.

Referenced by `print_image()`.

8.1.3.59 `double mappel::log_prior_beta2_const (double beta0, double beta1)` `[inline]`

Definition at line 250 of file `stencil.h`.

8.1.3.60 `double mappel::log_prior_beta_const (double beta)` `[inline]`

Definition at line 244 of file `stencil.h`.

8.1.3.61 `double mappel::log_prior_gamma_const (double kappa, double mean)` `[inline]`

Definition at line 257 of file `stencil.h`.

8.1.3.62 `double mappel::log_prior_normal_const (double sigma)` `[inline]`

Definition at line 269 of file `stencil.h`.

8.1.3.63 `double mappel::log_prior_pareto_const (double alpha, double min)` `[inline]`

Definition at line 263 of file `stencil.h`.

8.1.3.64 `VecT mappel::make_d_stencil (int size, double theta_x)` `[inline]`

Definition at line 99 of file `stencil.h`.

References `fill_d_stencil()`.

Referenced by `mappel::Gauss1DsModel::Stencil::Stencil()`, `mappel::Gauss2DModel::Stencil::Stencil()`, `mappel::Gauss1DModel::Stencil::Stencil()`, and `mappel::Gauss2DsModel::Stencil::Stencil()`.

8.1.3.65 `VecT mappel::make_DX_stencil (int size, const VecT & Gx, double theta_sigma)` `[inline]`

Definition at line 120 of file `stencil.h`.

References `fill_DX_stencil()`.

Referenced by `mappel::Gauss1DsModel::Stencil::compute_derivatives()`, `mappel::Gauss2DModel::Stencil::compute_derivatives()`, `mappel::Gauss1DModel::Stencil::compute_derivatives()`, and `mappel::Gauss2DsModel::Stencil::compute_derivatives()`.

8.1.3.66 `VecT mappel::make_DXS2_stencil (int size, const VecT & dx, const VecT & Gx, const VecT & DXS, double theta_sigma) [inline]`

Definition at line 135 of file stencil.h.

References `fill_DXS2_stencil()`.

Referenced by `mappel::Gauss1DsModel::Stencil::compute_derivatives()`, and `mappel::Gauss2DsModel::Stencil::compute_derivatives()`.

8.1.3.67 `VecT mappel::make_DXS_stencil (int size, const VecT & dx, const VecT & Gx, double theta_sigma) [inline]`

Definition at line 127 of file stencil.h.

References `fill_DXS_stencil()`.

Referenced by `mappel::Gauss1DsModel::Stencil::compute_derivatives()`, `mappel::Gauss2DModel::Stencil::compute_derivatives()`, `mappel::Gauss1DModel::Stencil::compute_derivatives()`, and `mappel::Gauss2DsModel::Stencil::compute_derivatives()`.

8.1.3.68 `VecT mappel::make_DXSX_stencil (int size, const VecT & dx, const VecT & Gx, const VecT & DX, double theta_sigma) [inline]`

Definition at line 143 of file stencil.h.

References `fill_DXSX_stencil()`.

Referenced by `mappel::Gauss1DsModel::Stencil::compute_derivatives()`, and `mappel::Gauss2DsModel::Stencil::compute_derivatives()`.

8.1.3.69 `VecT mappel::make_G_stencil (int size, const VecT & dx, double theta_sigma) [inline]`

Definition at line 106 of file stencil.h.

References `fill_G_stencil()`.

Referenced by `mappel::Gauss1DsModel::Stencil::compute_derivatives()`, `mappel::Gauss2DModel::Stencil::compute_derivatives()`, `mappel::Gauss1DModel::Stencil::compute_derivatives()`, and `mappel::Gauss2DsModel::Stencil::compute_derivatives()`.

8.1.3.70 `VecT mappel::make_gaussian_stencil (int size, double sigma) [inline]`

Definition at line 218 of file stencil.h.

References `fill_gaussian_stencil()`.

8.1.3.71 `template<typename T, typename... Args> std::unique_ptr<T> mappel::make_unique (Args &&... args)`

Definition at line 134 of file util.h.

References `operator<<()`.

8.1.3.72 `VecT mappel::make_X_stencil (int size, const VecT & dx, double theta_sigma) [inline]`

Definition at line 113 of file stencil.h.

References `fill_X_stencil()`.

Referenced by `mappel::Gauss1DsModel::Stencil::Stencil()`, `mappel::Gauss2DModel::Stencil::Stencil()`, `mappel::Gauss1DModel::Stencil::Stencil()`, and `mappel::Gauss2DsModel::Stencil::Stencil()`.

8.1.3.73 `int mappel::maxidx (const VecT & v)`

Definition at line 61 of file util.cpp.

8.1.3.74 `bool mappel::modified_cholesky (arma::mat & usym)`

Parameters

<i>usym</i>	An upper triangular symmetric matrix stored in a full matrix format. This matrix will be overwritten with the upper triangle and diagonal elements of the modified Cholesky decomposition.
-------------	--

Returns

true if *usym* was positive semi-definite (no Cholesky modification required). If false we made a modification

Definition at line 128 of file numerical.cpp.

Referenced by `cholesky_make_negative_definite()`, and `cholesky_make_positive_definite()`.

8.1.3.75 `double mappel::norm_sq (const VecT & v)`

Definition at line 210 of file numerical.cpp.

References `square()`.

Referenced by `clamp()`, `mappel::estimator::IterativeMaximizer< Model >::convergence_test_grad_ratio()`, `mappel::estimator::IterativeMaximizer< Model >::convergence_test_step_size()`, and `mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack()`.

8.1.3.76 `double mappel::normal_prior_grad (double mu, double sigma)`

8.1.3.77 `double mappel::normal_prior_grad (double sigma)`

8.1.3.78 `double mappel::normal_prior_grad (double mu, double sigma, double v) [inline]`

Definition at line 334 of file stencil.h.

8.1.3.79 `double mappel::normal_prior_grad2 (double sigma) [inline]`

Definition at line 370 of file stencil.h.

8.1.3.80 `double mappel::normal_quantile_onesided (double confidence)`

Definition at line 33 of file stencil.cpp.

8.1.3.81 `double mappel::normal_quantile_twosided (double confidence)`

Definition at line 22 of file stencil.cpp.

Referenced by `mappel::methods::error_bounds_expected()`, `mappel::methods::openmp::error_bounds_expected_↵
stack()`, `mappel::methods::error_bounds_observed()`, and `mappel::methods::openmp::error_bounds_observed_stack()`.

8.1.3.82 `std::ostream & mappel::operator<< (std::ostream & out, const StatsT & stats)`

Definition at line 74 of file util.cpp.

8.1.3.83 `template<class Model , typename = EnableIfSubclassT<Model,PointEmitterModel>> std::ostream & mappel::operator<< (std::ostream & out, const Model & model)`

Definition at line 276 of file PointEmitterModel.h.

8.1.3.84 `std::ostream& mappel::operator<< (std::ostream & out, const Gauss1DModel::Stencil & s)`

Definition at line 164 of file Gauss1DModel.cpp.

References `mappel::Gauss1DModel::Stencil::derivatives_computed`, `mappel::Gauss1DModel::Stencil::dx`, `mappel::↵
Gauss1DModel::Stencil::DX`, `mappel::Gauss1DModel::Stencil::DXS`, `mappel::Gauss1DModel::Stencil::Gx`, `print_vec↵
_row()`, `TERM_BLUE`, `TERM_CYAN`, `TERM_WHITE`, `mappel::Gauss1DModel::Stencil::theta`, and `mappel::Gauss1D↵
Model::Stencil::X`.

Referenced by `make_unique()`.

8.1.3.85 `std::ostream& mappel::operator<< (std::ostream & out, const Gauss1DsModel::Stencil & s)`

Definition at line 182 of file Gauss1DsModel.cpp.

References `mappel::Gauss1DsModel::Stencil::derivatives_computed`, `mappel::Gauss1DsModel::Stencil::dx`, `mappel↵
::Gauss1DsModel::Stencil::DX`, `mappel::Gauss1DsModel::Stencil::DXS`, `mappel::Gauss1DsModel::Stencil::DXS2`,
`mappel::Gauss1DsModel::Stencil::DXSX`, `mappel::Gauss1DsModel::Stencil::Gx`, `print_vec_row()`, `TERM_BLUE`, `TE↵
RM_CYAN`, `TERM_WHITE`, `mappel::Gauss1DsModel::Stencil::theta`, and `mappel::Gauss1DsModel::Stencil::X`.

8.1.3.86 `std::ostream& mappel::operator<< (std::ostream & out, const Gauss2DModel::Stencil & s)`

Definition at line 249 of file Gauss2DModel.cpp.

References `mappel::Gauss2DModel::Stencil::derivatives_computed`, `mappel::Gauss2DModel::Stencil::dx`, `mappel↵
Gauss2DModel::Stencil::DX`, `mappel::Gauss2DModel::Stencil::DXS`, `mappel::Gauss2DModel::Stencil::dy`, `mappel↵
Gauss2DModel::Stencil::DY`, `mappel::Gauss2DModel::Stencil::DYS`, `mappel::Gauss2DModel::Stencil::Gx`, `mappel↵
Gauss2DModel::Stencil::Gy`, `print_vec_row()`, `TERM_BLUE`, `TERM_CYAN`, `TERM_WHITE`, `mappel::Gauss2DModel↵
::Stencil::theta`, `mappel::Gauss2DModel::Stencil::X`, and `mappel::Gauss2DModel::Stencil::Y`.

8.1.3.87 `std::ostream& mappel::operator<< (std::ostream & out, const Gauss2DsModel::Stencil & s)`

Definition at line 314 of file Gauss2DsModel.cpp.

References `mappel::Gauss2DsModel::Stencil::derivatives_computed`, `mappel::Gauss2DsModel::Stencil::dx`, `mappel::Gauss2DsModel::Stencil::DX`, `mappel::Gauss2DsModel::Stencil::DXS`, `mappel::Gauss2DsModel::Stencil::DXS2`, `mappel::Gauss2DsModel::Stencil::DXSX`, `mappel::Gauss2DsModel::Stencil::dy`, `mappel::Gauss2DsModel::Stencil::DY`, `mappel::Gauss2DsModel::Stencil::DYS`, `mappel::Gauss2DsModel::Stencil::DYS2`, `mappel::Gauss2DsModel::Stencil::DYSY`, `mappel::Gauss2DsModel::Stencil::Gx`, `mappel::Gauss2DsModel::Stencil::Gy`, `print_vec_row()`, `TERM_BLUE`, `TERM_CYAN`, `TERM_WHITE`, `mappel::Gauss2DsModel::Stencil::theta`, `mappel::Gauss2DsModel::Stencil::X`, and `mappel::Gauss2DsModel::Stencil::Y`.

8.1.3.88 `double mappel::pareto_prior_grad (double alpha, double v) [inline]`

Definition at line 328 of file stencil.h.

8.1.3.89 `double mappel::pareto_prior_grad2 (double alpha, double v) [inline]`

Definition at line 364 of file stencil.h.

8.1.3.90 `double mappel::poisson_log_likelihood (double model_val, double data_val) [inline]`

Definition at line 226 of file stencil.h.

Referenced by `mappel::methods::likelihood::llh()`, `mappel::methods::likelihood::debug::llh_components()`, and `log_likelihood()`.

8.1.3.91 `ostream& mappel::print_centered_title (ostream & out, char fill, int width, const char * title = nullptr)`

Definition at line 83 of file display.cpp.

Referenced by `print_image()`, and `print_labeled_image()`.

8.1.3.92 `template<class ImageT > std::ostream& mappel::print_image (std::ostream & out, const ImageT & im)`

8.1.3.93 `template<> std::ostream& mappel::print_image (std::ostream & out, const arma::vec & im)`

Definition at line 139 of file display.cpp.

References `print_labeled_image()`.

8.1.3.94 `template<> std::ostream& mappel::print_image (std::ostream & out, const arma::mat & im)`

Definition at line 147 of file display.cpp.

References `print_labeled_image()`.

8.1.3.95 `template<> std::ostream& mappel::print_image (std::ostream & out, const arma::cube & im)`

Definition at line 167 of file display.cpp.

References `lambda_term_color()`, `print_centered_title()`, and `print_labeled_image()`.

8.1.3.96 `ostream& mappel::print_labeled_image (ostream & out, const arma::mat & im, const char * title, const char * color)`

Definition at line 95 of file display.cpp.

References `print_centered_title()`.

Referenced by `print_image()`, and `print_text_image()`.

8.1.3.97 `template<class ImageT > std::ostream& mappel::print_text_image (std::ostream & out, const ImageT & im)`

8.1.3.98 `template<> std::ostream& mappel::print_text_image (std::ostream & out, const arma::vec & im)`

Definition at line 153 of file display.cpp.

References `print_labeled_image()`.

Referenced by `mappel::estimator::Estimator< Model >::estimate_max()`, `mappel::estimator::Estimator< Model >::estimate_max_debug()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_max_stack()`, `mappel::estimator::Estimator< Model >::estimate_profile_bounds()`, `mappel::estimator::Estimator< Model >::estimate_profile_bounds_debug()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack()`, `mappel::estimator::Estimator< Model >::estimate_profile_max()`, and `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_max()`.

8.1.3.99 `template<> std::ostream& mappel::print_text_image (std::ostream & out, const arma::mat & im)`

Definition at line 160 of file display.cpp.

References `print_labeled_image()`.

8.1.3.100 `template<class Vec > std::ostream& mappel::print_vec_row (std::ostream & out, const Vec & vec, const char * header, int header_width, const char * color = nullptr)`

Definition at line 42 of file display.h.

Referenced by `operator<<()`.

8.1.3.101 `void mappel::refine_gaussian_2Dmax (const MatT & data, const VecT & Xstencil, const VecT & Ystencil, int max_pos[])`

Definition at line 174 of file stencil.cpp.

References `gaussian_convolution()`.

8.1.3.102 `void mappel::refine_gaussian_3Dmax (const CubeT & data, const VecFieldT & stencils, int max_pos[])`

Definition at line 242 of file stencil.cpp.

References gaussian_3D_convolution().

8.1.3.103 `double mappel::relative_poisson_log_likelihood (double model_val, double data_val) [inline]`

Definition at line 235 of file stencil.h.

Referenced by relative_log_likelihood(), mappel::methods::likelihood::rllh(), and mappel::methods::likelihood::debug←
::rllh_components().

8.1.3.104 `double mappel::restrict_value_range (double val, double minval, double maxval) [inline]`

Definition at line 127 of file util.h.

8.1.3.105 `double mappel::rllh_beta2_prior (double beta0, double beta1, double v, double max = 1., double min = 0.) [inline]`

Definition at line 282 of file stencil.h.

8.1.3.106 `double mappel::rllh_beta_prior (double beta, double v, double max = 1., double min = 0.) [inline]`

Definition at line 275 of file stencil.h.

8.1.3.107 `double mappel::rllh_gamma_prior (double kappa, double mean, double v) [inline]`

Definition at line 289 of file stencil.h.

8.1.3.108 `double mappel::rllh_normal_prior (double mu, double sigma)`

8.1.3.109 `double mappel::rllh_normal_prior (double mu, double sigma, double v) [inline]`

Definition at line 301 of file stencil.h.

8.1.3.110 `double mappel::rllh_pareto_prior (double alpha, double v) [inline]`

Definition at line 295 of file stencil.h.

8.1.3.111 `template<typename T> int mappel::sgn (T val)`

sign (signum) function: -1/0/1

Definition at line 120 of file util.h.

Referenced by mappel::estimator::subroutine::compute_bound_scaling_vec().

8.1.3.112 `template<typename T > T mappel::square (T x)`

Definition at line 125 of file util.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::convergence_test_grad_ratio()`, `fill_DXS_stencil()`, `fill_G_stencil()`, `norm_sq()`, and `mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack()`.

8.1.4 Variable Documentation

8.1.4.1 `ParallelRngManagerT mappel::rng_manager`

Definition at line 11 of file rng.cpp.

Referenced by `mappel::PointEmitterModel::get_rng_generator()`, `mappel::PointEmitterModel::get_rng_manager()`, `mappel::PointEmitterModel::get_stats()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`, `mappel::PointEmitterModel::sample_prior()`, and `mappel::PointEmitterModel::set_rng_seed()`.

8.1.4.2 `const char * mappel::TERM_BLACK = "1;30"`

Definition at line 13 of file display.cpp.

8.1.4.3 `const char * mappel::TERM_BLUE = "1;34"`

Definition at line 17 of file display.cpp.

Referenced by `lambda_term_color()`, and `operator<<()`.

8.1.4.4 `const char * mappel::TERM_CYAN = "1;36"`

Definition at line 19 of file display.cpp.

Referenced by `lambda_term_color()`, and `operator<<()`.

8.1.4.5 `const char * mappel::TERM_DIM_BLACK = "0;30"`

Definition at line 21 of file display.cpp.

8.1.4.6 `const char * mappel::TERM_DIM_BLUE = "0;34"`

Definition at line 25 of file display.cpp.

Referenced by `lambda_term_color()`.

8.1.4.7 const char * mappel::TERM_DIM_CYAN ="0;36"

Definition at line 27 of file display.cpp.

Referenced by lambda_term_color().

8.1.4.8 const char * mappel::TERM_DIM_GREEN ="0;32"

Definition at line 23 of file display.cpp.

Referenced by lambda_term_color().

8.1.4.9 const char * mappel::TERM_DIM_MAGENTA ="0;35"

Definition at line 26 of file display.cpp.

Referenced by lambda_term_color().

8.1.4.10 const char * mappel::TERM_DIM_RED ="0;31"

Definition at line 22 of file display.cpp.

Referenced by lambda_term_color().

8.1.4.11 const char * mappel::TERM_DIM_WHITE ="0;37"

Definition at line 28 of file display.cpp.

Referenced by lambda_term_color().

8.1.4.12 const char * mappel::TERM_DIM_YELLOW ="0;33"

Definition at line 24 of file display.cpp.

Referenced by lambda_term_color().

8.1.4.13 const char * mappel::TERM_GREEN ="1;32"

Definition at line 15 of file display.cpp.

Referenced by lambda_term_color().

8.1.4.14 const char * mappel::TERM_MAGENTA ="1;35"

Definition at line 18 of file display.cpp.

Referenced by lambda_term_color().

8.1.4.15 `const char * mappel::TERM_RED = "1;31"`

Definition at line 14 of file display.cpp.

Referenced by `lambda_term_color()`.

8.1.4.16 `const char * mappel::TERM_WHITE = "1;37"`

Definition at line 20 of file display.cpp.

Referenced by `lambda_term_color()`, and `operator<<()`.

8.1.4.17 `const char * mappel::TERM_YELLOW = "1;33"`

Definition at line 16 of file display.cpp.

Referenced by `lambda_term_color()`.

8.2 mappel::estimator Namespace Reference

Namespaces

- [subroutine](#)

Classes

- class [CGaussHeuristicEstimator](#)
- class [CGaussMLE](#)
- class [Estimator](#)
- class [HeuristicEstimator](#)
- class [IterativeMaximizer](#)
- struct [MLEData](#)
- struct [MLEDataStack](#)
- struct [MLEDebugData](#)
- class [NewtonDiagonalMaximizer](#)
- class [NewtonMaximizer](#)
- struct [ProfileBoundsData](#)
- struct [ProfileBoundsDataStack](#)
- struct [ProfileBoundsDebugData](#)
- struct [ProfileLikelihoodData](#)
- class [QuasiNewtonMaximizer](#)
- class [SimulatedAnnealingMaximizer](#)
- class [ThreadedEstimator](#)
- class [TrustRegionMaximizer](#)

Functions

- `template<class Model >`
`std::ostream & operator<< (std::ostream &out, Estimator< Model > &estimator)`
- `enum ExitCode : IdxT {`
`ExitCode::TrustRegionRadius = 9, ExitCode::ModelImprovement = 8, ExitCode::GradRatio = 7, ExitCode::↔`
`FunctionValue = 6,`
`ExitCode::StepSize = 5, ExitCode::Success = 4, ExitCode::MaxBacktracks = 3, ExitCode::MaxIter = 2,`
`ExitCode::Unassigned = 1, ExitCode::Error = 0 }`

8.2.1 Class Documentation

8.2.1.1 struct mappel::estimator::MLEData

Data reporting structures A maximum-likelihood estimate for a single image. A container to group the necessary information at an MLEstimate

Definition at line 40 of file estimator.h.

Class Members

MatT	obsI	Observed Fisher information matrix at theta.
double	rllh	RLLH at theta.
VecT	theta	Theta estimate.

8.2.1.2 struct mappel::estimator::MLEDataStack

A stack of maximum-likelihood estimates for a stack of images A container to group the necessary information at an MLEstimate

Definition at line 63 of file estimator.h.

Class Members

IdxT	Ndata	Number of data estimates.
CubeT	obsI	Observed Fisher information matrix stack. size:[Nparams,Nparams,Ndata].
VecT	rllh	RLLH stack. size:[Ndata].
MatT	theta	Theta estimate stack. size:[Nparams,Ndata].

8.2.1.3 struct mappel::estimator::MLEDebugData

A maximum-likelihood estimate for a single image with debugging information. A container to group the necessary information at an MLEstimate

Definition at line 50 of file estimator.h.

Class Members

IdxT	Nseq	Number of points evaluated including theta_init and theta_mle.
MatT	obsI	Observed Fisher information matrix at theta.
double	rllh	RLLH at theta.
MatT	sequence	Sequence of evaluated points including theta_init and theta_mle.
VecT	sequence_rllh	RLLH at each point in sequence.
VecT	theta	Theta estimate.

8.2.1.4 struct mappel::estimator::ProfileBoundsDebugData

Data for debugging of estimation of profile bounds for a single parameter of a single image Includes both controlling (input) parameters as well as reporting (ouptut) parameters to give output parameters context.

Definition at line 113 of file estimator.h.

Class Members

IdxT	estimated_idx	Index of single parameter to estimate for.
MLEData	mle	Theta maximum-likelihood estimate, rllh, and ObsI.
IdxT	Nseq_lb	Number of points in sequence_lb.
IdxT	Nseq_ub	Number of points in sequence_ub.
double	profile_lb	size:[Nparams_est] Lower bound estimated for estimated_idx.
double	profile_ub	size:[Nparams_est] Upper bound estimated for estimated_idx.
MatT	sequence_lb	size:[NumParams,Nseq_lb] Sequence of evaluated points for lb estimate (including theta mle as initial point)
VecT	sequence_lb_rllh	size:[Nseq_lb] RLLH at each of the sequence_lb points
MatT	sequence_ub	size:[NumParams,Nseq_ub] Sequence of evaluated points for ub estimate (including theta mle as initial point)
VecT	sequence_ub_rllh	size:[Nseq_ub] RLLH at each of the sequence_ub points
double	target_rllh_delta	Targeted rllh change in value from MLE ($-\chi^2_{\text{inv}}(\text{confidence},1)/2$)

8.2.1.5 struct mappel::estimator::ProfileLikelihoodData

Container for profile liklihood estimator data Includes both controlling (input) parameters as well as reporting (ouptut) parameters to give output parameters context.

Definition at line 74 of file estimator.h.

Class Members

IdxVecT	fixed_idx	Indexes of fixed parameters.
MatT	fixed_values	Vector values for each fixed parameter size:[Nfixed,Nvalues];.
IdxT	Nfixed	Number of fixed parameters.
IdxT	Nvalues	Number of values of fixed parameters evaluated.
VecT	profile_likelihood	profile likelihood for each column of fixed parameter values
MatT	profile_parameters	Points at which the profile likelihood maximum was obtained.

8.2.2 Enumeration Type Documentation

8.2.2.1 `enum mappel::estimator::ExitCode : IdxT` [strong]

Enumerated exit codes for estimation methods

- Error: A Numerical Error was caught. Did not converge.
- Unassigned: Logical error if this is still set
- MaxIter: Max iterations exceeded. Did not converge.
- MaxBacktracks: Backtracking failed. Did not converge successfully.
- Success: Successful completion
- StepSize: Relative Step size was less than epsilon. Converged successfully.
- FunctionValue: Function value change was less than epsilon. Converged successfully.
- GradRatio: Grad ratio was less than epsilon. Converged successfully.
- ModellImprovement: Model predicted improvement is less than epsilon. Converged Successfully
- TrustRegionRadius: Trust region size was less than epsilon. Converged successfully.

Enumerator

TrustRegionRadius

ModellImprovement

GradRatio

FunctionValue

StepSize

Success

MaxBacktracks

MaxIter

Unassigned

Error

Definition at line 172 of file estimator.h.

8.2.3 Function Documentation

8.2.3.1 `template<class Model> std::ostream& mappel::estimator::operator<< (std::ostream & out, Estimator< Model> & estimator)`

Definition at line 351 of file estimator_impl.h.

8.3 mappel::estimator::subroutine Namespace Reference

Functions

- [VecT solve_profile_initial_step](#) (const [MatT](#) &obsI, [IdxT](#) fixed_idx, double llh_delta)
- [VecT bound_step](#) (const [VecT](#) &step, const [VecT](#) &theta, const [VecT](#) &lbound, const [VecT](#) &ubound)
- void [compute_bound_scaling_vec](#) (const [VecT](#) &theta, const [VecT](#) &g, const [VecT](#) &lbound, const [VecT](#) &ubound, [VecT](#) &v, [VecT](#) &Jv)
- [VecT compute_D_scale](#) (const [VecT](#) &oldDscale, const [VecT](#) &grad2)
- void [compute_scaled_problem](#) (const [MatT](#) &H, const [VecT](#) &g, const [VecT](#) &Dinv, const [VecT](#) &Jv, [MatT](#) &Hhat, [VecT](#) &ghat)
- double [compute_initial_trust_radius](#) (const [VecT](#) &ghat)
- [VecT compute_cauchy_point](#) (const [VecT](#) &g, const [MatT](#) &H, double delta)
- double [compute_quadratic_model_value](#) (const [VecT](#) &s, const [VecT](#) &g, const [MatT](#) &H)
- *Quadratic model value at given step Compute a quadratic model.*
- [VecT solve_TR_subproblem](#) (const [VecT](#) &g, const [MatT](#) &H, double delta)
- *Exact solver the TR sub-problem even for non-positive definite H.*
- [VecT solve_restricted_step_length_newton](#) (const [VecT](#) &g, const [MatT](#) &H, double delta, double lambda_lb, double lambda_ub)

8.3.1 Detailed Description

Estimation subroutines common to several estimators and independent of the Model

Common subroutines shared between estimators.

These methods are model agnostic.

8.3.2 Function Documentation

8.3.2.1 [VecT mappel::estimator::subroutine::bound_step](#) (const [VecT](#) & *step*, const [VecT](#) & *theta*, const [VecT](#) & *lbound*, const [VecT](#) & *ubound*)

Return a new step that is guaranteed to keep theta in the interior of the feasible region. Uses a relative backtracking technique to step away from the boundary into the interior.

Parameters

<i>step</i>	proposed step
<i>theta</i>	current theta
<i>lbound</i>	lower bounds
<i>ubound</i>	upper bounds

Returns

bounded step

Definition at line 82 of file estimator.cpp.

Referenced by mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize().

8.3.2.2 void mappel::estimator::subroutine::compute_bound_scaling_vec (const VecT & *theta*, const VecT & *g*, const VecT & *lbound*, const VecT & *ubound*, VecT & *v*, VecT & *Jv*)

Bounds scaling vector for affine scaling of bounds constrained optimization problems. This *v* is from Coleman&Li (1996). It represents a scaling factor for bound constrained problems. For unconstrained problems $v = \text{sgn}(\text{grad})$;

Parameters

in	<i>theta</i>	current theta
in	<i>g</i>	gradient
in	<i>lbound</i>	lower bound
in	<i>ubound</i>	upper bound
out	<i>v</i>	Scaling vector
out	<i>Jv</i>	Jacobian

Definition at line 132 of file estimator.cpp.

References mappel::sgn().

Referenced by mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize().

8.3.2.3 VecT mappel::estimator::subroutine::compute_cauchy_point (const VecT & *g*, const MatT & *H*, double *delta*)

Definition at line 175 of file estimator.cpp.

Referenced by mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize().

8.3.2.4 VecT mappel::estimator::subroutine::compute_D_scale (const VecT & *oldDscale*, const VecT & *grad2*)

Compute an affine scaling diagonal matrix to scale problem away from boundaries. This works for either minimization or maximization. $\text{sign}(\text{grad2})$ is not important

Parameters

<i>oldDscale</i>	Last D scaling matrix
<i>grad2</i>	Diagonal of hessian matrix

Returns

Diagonal scaling matrix as a vector.

Definition at line 159 of file estimator.cpp.

References mappel::clamp().

8.3.2.5 double mappel::estimator::subroutine::compute_initial_trust_radius (const VecT & *ghat*)

Definition at line 170 of file estimator.cpp.

References mappel::clamp().

Referenced by mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize().

8.3.2.6 double mappel::estimator::subroutine::compute_quadratic_model_value (const VecT & *s*, const VecT & *g*, const MatT & *H*)

Quadratic model value at given step Compute a quadratic model.

Definition at line 183 of file estimator.cpp.

Referenced by mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize().

8.3.2.7 void mappel::estimator::subroutine::compute_scaled_problem (const MatT & *H*, const VecT & *g*, const VecT & *Dinv*, const VecT & *Jv*, MatT & *Hhat*, VecT & *ghat*)

Definition at line 164 of file estimator.cpp.

Referenced by mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize().

8.3.2.8 VecT mappel::estimator::subroutine::solve_profile_initial_step (const MatT & *obsI*, IdxT *fixed_idx*, double *llh_delta*)

Find initial step lengths in profile bounds estimation VM algorithm

Definition at line 52 of file estimator.cpp.

Referenced by mappel::estimator::IterativeMaximizer< Model >::compute_profile_bound_debug(), mappel::estimator::Estimator< Model >::estimate_profile_bounds(), mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel(), and mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack().

8.3.2.9 VecT mappel::estimator::subroutine::solve_restricted_step_length_newton (const VecT & *g*, const MatT & *H*, double *delta*, double *lambda_lb*, double *lambda_ub*)

Definition at line 256 of file estimator.cpp.

References mappel::cholesky(), mappel::cholesky_convert_lower_triangular(), mappel::cholesky_solve(), and mappel::clamp().

Referenced by solve_TR_subproblem().

8.3.2.10 VecT mappel::estimator::subroutine::solve_TR_subproblem (const VecT & g, const MatT & H, double delta)

Exact solver the TR sub-problem even for non-positive definite H.

This method is a hybrid technique mixing ideas from Geyer (2013) and the "trust" R-package Nocedal and Wright (2000) More and Sorensen (1981)

Definition at line 189 of file estimator.cpp.

References mappel::cholesky(), mappel::cholesky_solve(), and solve_restricted_step_length_newton().

Referenced by mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize().

8.4 mappel::mcmc Namespace Reference

Classes

- struct [MCMCData](#)
- struct [MCMCDataStack](#)
- struct [MCMCDebugData](#)

Functions

- [IdxT num_oversample](#) (IdxT Nsample, IdxT Nburnin, IdxT thin)
- [MatT thin_sample](#) (MatT &sample, IdxT Nburnin, IdxT thin)
- void [thin_sample](#) (const MatT &sample, const VecT &sample_rllh, IdxT Nburnin, IdxT thin, MatT &subsample, VecT &subsample_rllh)
- void [estimate_sample_posterior](#) (const MatT &sample, VecT &theta_posterior_mean, MatT &theta_posterior_cov)
- template<class Mat, class Vec>
void [compute_posterior_credible](#) (const Mat &sample, double confidence, Vec &lb, Vec &ub)
- template<class Model>
void [sample_posterior](#) (const Model &model, const ModelDataT< Model > &im, const StencilT< Model > &theta_init, MatT &sample, VecT &sample_rllh)
- template<class Model>
void [sample_posterior_debug](#) (const Model &model, const ModelDataT< Model > &im, const StencilT< Model > &theta_init, MatT &sample, VecT &sample_rllh, MatT &candidate, VecT &candidate_rllh)

8.4.1 Function Documentation

8.4.1.1 template<class Mat, class Vec> void mappel::mcmc::compute_posterior_credible (const Mat & sample, double confidence, Vec & lb, Vec & ub)

Definition at line 32 of file mcmc.h.

Referenced by mappel::methods::error_bounds_posterior_credible(), and mappel::methods::estimate_posterior().

8.4.1.2 `void mappel::mcmc::estimate_sample_posterior (const MatT & sample, VecT & theta_posterior_mean, MatT & theta_posterior_cov) [inline]`

Definition at line 25 of file mcmc.h.

Referenced by `mappel::methods::estimate_posterior()`.

8.4.1.3 `IdxT mappel::mcmc::num_oversample (IdxT Nsample, IdxT Nburnin, IdxT thin)`

Definition at line 40 of file mcmc.cpp.

Referenced by `mappel::methods::estimate_posterior()`, and `mappel::methods::openmp::estimate_posterior_stack()`.

8.4.1.4 `template<class Model > void mappel::mcmc::sample_posterior (const Model & model, const ModelDataT< Model > & im, const StencilT< Model > & theta_init, MatT & sample, VecT & sample_rllh)`

Definition at line 41 of file mcmc.h.

References `mappel::methods::objective::rllh()`.

Referenced by `mappel::methods::estimate_posterior()`.

8.4.1.5 `template<class Model > void mappel::mcmc::sample_posterior_debug (const Model & model, const ModelDataT< Model > & im, const StencilT< Model > & theta_init, MatT & sample, VecT & sample_rllh, MatT & candidate, VecT & candidate_rllh)`

Definition at line 73 of file mcmc.h.

References `mappel::methods::objective::rllh()`.

Referenced by `mappel::methods::debug::estimate_posterior_debug()`.

8.4.1.6 `MatT mappel::mcmc::thin_sample (MatT & sample, IdxT Nburnin, IdxT thin)`

Definition at line 46 of file mcmc.cpp.

References `mappel::mcmc::MCMCData::thin`.

Referenced by `mappel::methods::estimate_posterior()`.

8.4.1.7 `void mappel::mcmc::thin_sample (const MatT & sample, const VecT & sample_rllh, IdxT Nburnin, IdxT thin, MatT & subsample, VecT & subsample_rllh)`

Definition at line 57 of file mcmc.cpp.

References `mappel::mcmc::MCMCData::sample_rllh`, and `mappel::mcmc::MCMCData::thin`.

8.5 mappel::methods Namespace Reference

Templated functions for operating on a [PointEmitterModel](#).

Namespaces

- [debug](#)
- [likelihood](#)
- [objective](#)
- [openmp](#)

Functions

- `template<class Model >`
[ReturnIfSubclassT](#)< [ImageT](#)< Model >, Model, [ImageFormat1DBase](#) > [model_image](#) (const Model &model, const [StencilT](#)< Model > &s)
- `template<class Model >`
[ReturnIfSubclassT](#)< [ImageT](#)< Model >, Model, [ImageFormat2DBase](#) > [model_image](#) (const Model &model, const typename Model::Stencil &s)
- `template<class Model >`
[ImageT](#)< Model > [model_image](#) (const Model &model, const [ParamT](#)< Model > &theta)
- `template<class Model, class rng_t >`
[ModelDataT](#)< Model > [simulate_image](#) (const Model &model, const [ParamT](#)< Model > &theta)
- `template<class Model, class rng_t >`
[ModelDataT](#)< Model > [simulate_image](#) (const Model &model, const [ParamT](#)< Model > &theta, rng_t &rng)
- `template<class Model >`
[ModelDataT](#)< Model > [simulate_image](#) (const Model &model, const [StencilT](#)< Model > &s)
- `template<class Model >`
[ModelDataT](#)< Model > [simulate_image_from_model](#) (const Model &model, const [ImageT](#)< Model > &model←_im)
- `template<class Model >`
void [aposteriori_objective](#) (const Model &model, const [ModelDataT](#)< Model > &data_im, const [StencilT](#)< Model > &s, double &rllh, [ParamT](#)< Model > &grad, [MatT](#) &hess)
- `template<class Model >`
void [aposteriori_objective](#) (const Model &model, const [ModelDataT](#)< Model > &data_im, const [ParamT](#)< Model > &theta, double &rllh, [ParamT](#)< Model > &grad, [MatT](#) &hess)
- `template<class Model >`
void [prior_objective](#) (const Model &model, const [ParamT](#)< Model > &theta, double &rllh, [ParamT](#)< Model > &grad, [MatT](#) &hess)
- `template<class Model >`
void [likelihood_objective](#) (const Model &model, const [ModelDataT](#)< Model > &data_im, const [StencilT](#)< Model > &s, double &rllh, [ParamT](#)< Model > &grad, [MatT](#) &hess)
- `template<class Model >`
void [likelihood_objective](#) (const Model &model, const [ModelDataT](#)< Model > &data_im, const [ParamT](#)< Model > &theta, double &rllh, [ParamT](#)< Model > &grad, [MatT](#) &hess)
- `template<class Model >`
[ParamT](#)< Model > [cr_lower_bound](#) (const Model &model, const typename Model::Stencil &s)
Calculate the Cramer-Rao lower bound at the given parameters.
- `template<class Model >`
[ParamT](#)< Model > [cr_lower_bound](#) (const Model &model, const [ParamT](#)< Model > &theta)
- `template<class Model >`
[MatT](#) [expected_information](#) (const Model &model, const [ParamT](#)< Model > &theta)
- `template<class Model >`
[MatT](#) [observed_information](#) (const Model &model, const [ModelDataT](#)< Model > &data, const [ParamT](#)< Model > &theta_mle)

- template<class Model >
MatT [observed_information](#) (const Model &model, const [ModelDataT](#)< Model > &data, const [StencilT](#)< Model > &theta_mle)
- template<class Model >
void [estimate_max](#) (const Model &model, const [ModelDataT](#)< Model > &data, const std::string &method, [estimator::MLEData](#) &mle)
- template<class Model >
void [estimate_max](#) (const Model &model, const [ModelDataT](#)< Model > &data, const std::string &method, const [ParamT](#)< Model > &theta_init, [estimator::MLEData](#) &mle)
- template<class Model >
void [estimate_max](#) (const Model &model, const [ModelDataT](#)< Model > &data, const std::string &method, [estimator::MLEData](#) &mle, [StatsT](#) &stats)
- template<class Model >
void [estimate_max](#) (const Model &model, const [ModelDataT](#)< Model > &data, const std::string &method, const [ParamT](#)< Model > &theta_init, [estimator::MLEData](#) &mle, [StatsT](#) &stats)
- template<class Model >
double [estimate_profile_likelihood](#) (const Model &model, const [ModelDataT](#)< Model > &data, const std::string &method, const [IdxVecT](#) &fixed_idx, const [ParamT](#)< Model > &fixed_theta_init)
- template<class Model >
double [estimate_profile_likelihood](#) (const Model &model, const [ModelDataT](#)< Model > &data, const std::string &method, const [IdxVecT](#) &fixed_idx, const [ParamT](#)< Model > &fixed_theta_init, [StencilT](#)< Model > &profile←_max)
- template<class Model >
double [estimate_profile_likelihood](#) (const Model &model, const [ModelDataT](#)< Model > &data, const std::string &method, const [IdxVecT](#) &fixed_idx, const [ParamT](#)< Model > &fixed_theta_init, [StencilT](#)< Model > &profile←_max, [StatsT](#) &stats)
- template<class Model >
void [estimate_profile_likelihood](#) (const Model &model, const [ModelDataT](#)< Model > &data, const std::string &method, const [ParamT](#)< Model > &theta_init, [estimator::ProfileLikelihoodData](#) &profile_data)
- template<class Model >
void [estimate_posterior](#) (const Model &model, const [ModelDataT](#)< Model > &data, [mcmc::MCMCData](#) &mcmc←_est)
- template<class Model >
void [estimate_posterior](#) (const Model &model, const [ModelDataT](#)< Model > &data, const [ParamT](#)< Model > &theta_init, [mcmc::MCMCData](#) &mcmc_est)
- template<class Model >
void [error_bounds_expected](#) (const Model &model, const [ParamT](#)< Model > &theta_est, double confidence, [ParamT](#)< Model > &theta_lb, [ParamT](#)< Model > &theta_ub)
- template<class Model >
void [error_bounds_observed](#) (const Model &model, const [estimator::MLEData](#) &mle, double confidence, [ParamT](#)< Model > &theta_lb, [ParamT](#)< Model > &theta_ub)
- template<class Model >
void [error_bounds_profile_likelihood](#) (const Model &model, const [ModelDataT](#)< Model > &data, [estimator::←ProfileBoundsData](#) &bounds)
- template<class Model >
void [error_bounds_profile_likelihood](#) (const Model &model, const [ModelDataT](#)< Model > &data, [estimator::←ProfileBoundsData](#) &bounds, [StatsT](#) &stats)
- template<class Model >
void [error_bounds_posterior_credible](#) (const Model &model, const MatT &sample, double confidence, [ParamT](#)< Model > &theta_lb, [ParamT](#)< Model > &theta_ub)
- template<class Model >
Model::ImageT [model_image](#) (const Model &model, const [ParamT](#)< Model > &theta)

- `template<class Model >`
`ModelDataT< Model > simulate_image (const Model &model, const ParamT< Model > &theta)`
- `template<class Model , class RngT >`
`ModelDataT< Model > simulate_image (const Model &model, const ParamT< Model > &theta, RngT &rng)`
- `template<class Model , class rng_t >`
`ReturnIfSubclassT< ModelDataT< Model >, Model, PoissonNoise1DObjective > simulate_image (const Model &model, const StencilT< Model > &s, rng_t &rng)`
Simulate an image at a given theta stencil, by generating Poisson noise Enabled for [PoissonNoise1DObjective](#).
- `template<class Model , class rng_t >`
`ReturnIfSubclassT< ModelDataT< Model >, Model, PoissonNoise1DObjective > simulate_image_from_model (const Model &model, const ImageT< Model > &model_im, rng_t &rng)`
Simulate an image at a given theta stencil, by generating Poisson noise Enabled for [PoissonNoise1DObjective](#).
- `template<class Model >`
`ReturnIfSubclassT< MatT, Model, PoissonNoise1DObjective > expected_information (const Model &model, const StencilT< Model > &s)`
Compute the expected information (Fisher information at theta). Note: Expected information is an average quantity and is independent of the data. Enabled for [PoissonNoise1DObjective](#).
- `template<class Model >`
`ReturnIfSubclassT< std::unique_ptr< estimator::Estimator< Model > >, Model, PoissonNoise1DObjective > make_estimator (Model &model, std::string ename)`
- `template<class Model , class rng_t >`
`ReturnIfSubclassT< ImageT< Model >, Model, PoissonNoise2DObjective > simulate_image (const Model &model, const StencilT< Model > &s, rng_t &rng)`
Simulate an image at a given theta stencil, by generating Poisson noise Enabled for [PoissonNoise2DObjective](#).
- `template<class Model , class rng_t >`
`ReturnIfSubclassT< ImageT< Model >, Model, PoissonNoise2DObjective > simulate_image_from_model (const Model &model, const ImageT< Model > &model_im, rng_t &rng)`
Simulate an image at a given theta stencil, by generating Poisson noise Enabled for [PoissonNoise2DObjective](#).
- `template<class Model >`
`ReturnIfSubclassT< MatT, Model, PoissonNoise2DObjective > expected_information (const Model &model, const StencilT< Model > &s)`
Compute the expected information (Fisher information at theta). Note: Expected information is an average quantity and is independent of the data. Enabled for [PoissonNoise2DObjective](#).
- `template<class Model >`
`ReturnIfSubclassT< std::unique_ptr< estimator::Estimator< Model > >, Model, PoissonNoise2DObjective > make_estimator (Model &model, std::string ename)`

8.5.1 Detailed Description

Templated functions for operating on a [PointEmitterModel](#).

Most methods are overloaded to take a `ParamT` or a `StencilT`. The precomputed stencil for a `theta` value contains the common computational values needed by all methods that compute the likelihood function or its derivatives. Note that methods in `model::prior::` namespace do not take a stencil (or data) as they are independent of the data and the likelihood function.

Methods with `xxx_components` return a sequence of values representing the results from each pixel in turn. The sum of these components is the overall model value. (e.g. `sum(llh_components(...))=llh(...)`). These methods are usefully for detailed inspection of the contributions of each pixel or prior component to the overall result. External template based methods for [PointEmitterModel](#)'s. These are general or convenience functions that are included in this file. Those methods specific to other sub-types of Models should be included within that sub-type's .h file, using the `enable_if` mechanism to restrict their instantiation to the correct sub-types.

8.5.2 Function Documentation

8.5.2.1 `template<class Model > void mappel::methods::aposteriori_objective (const Model & model, const ModelDataT< Model > & data_im, const StencilT< Model > & s, double & rlh, ParamT< Model > & grad, MatT & hess)`

Definition at line 218 of file `model_methods_impl.h`.

References `mappel::methods::likelihood::hessian()`, and `mappel::methods::likelihood::rlh()`.

Referenced by `aposteriori_objective()`.

8.5.2.2 `template<class Model > void mappel::methods::aposteriori_objective (const Model & model, const ModelDataT< Model > & data_im, const ParamT< Model > & theta, double & rlh, ParamT< Model > & grad, MatT & hess)`

Definition at line 256 of file `model_methods_impl.h`.

References `aposteriori_objective()`, `mappel::methods::objective::grad()`, and `mappel::methods::objective::rlh()`.

8.5.2.3 `template<class Model > ParamT< Model > mappel::methods::cr_lower_bound (const Model & model, const typename Model::Stencil & s)`

Calculate the Cramer-Rao lower bound at the given parameters.

Parameters

in	<i>theta</i>	The parameters to evaluate the CRLB at
out	<i>crlb</i>	The calculated parameters

Definition at line 283 of file `model_methods_impl.h`.

References `expected_information()`.

Referenced by `cr_lower_bound()`, and `error_bounds_expected()`.

8.5.2.4 `template<class Model > ParamT< Model > mappel::methods::cr_lower_bound (const Model & model, const ParamT< Model > & theta)`

Definition at line 295 of file `model_methods_impl.h`.

References `cr_lower_bound()`.

8.5.2.5 `template<class Model > void mappel::methods::error_bounds_expected (const Model & model, const ParamT< Model > & theta_est, double confidence, ParamT< Model > & theta_lb, ParamT< Model > & theta_ub)`

Definition at line 405 of file `model_methods_impl.h`.

References `cr_lower_bound()`, and `mappel::normal_quantile_twosided()`.

8.5.2.6 `template<class Model > void mappel::methods::error_bounds_observed (const Model & model, const estimator::MLEData & mle, double confidence, ParamT< Model > & theta_lb, ParamT< Model > & theta_ub)`

Definition at line 416 of file `model_methods_impl.h`.

References `mappel::normal_quantile_twosided()`, `mappel::estimator::MLEData::obsI`, and `mappel::estimator::MLEData::theta`.

8.5.2.7 `template<class Model > void mappel::methods::error_bounds_posterior_credible (const Model & model, const MatT & sample, double confidence, ParamT< Model > & theta_lb, ParamT< Model > & theta_ub)`

Definition at line 444 of file `model_methods_impl.h`.

References `mappel::mcmc::compute_posterior_credible()`.

8.5.2.8 `template<class Model > void mappel::methods::error_bounds_profile_likelihood (const Model & model, const ModelDataT< Model > & data, estimator::ProfileBoundsData & bounds)`

Definition at line 426 of file `model_methods_impl.h`.

References `mappel::chisq_quantile()`, `mappel::estimator::ProfileBoundsData::confidence`, `mappel::estimator::Estimator< Model >::estimate_profile_bounds()`, `mappel::estimator::ProfileBoundsData::estimated_idx`s, and `mappel::estimator::ProfileBoundsData::target_rllh_delta`.

8.5.2.9 `template<class Model > void mappel::methods::error_bounds_profile_likelihood (const Model & model, const ModelDataT< Model > & data, estimator::ProfileBoundsData & bounds, StatsT & stats)`

Definition at line 435 of file `model_methods_impl.h`.

References `mappel::chisq_quantile()`, `mappel::estimator::ProfileBoundsData::confidence`, `mappel::estimator::ProfileBoundsData::estimated_idx`s, `mappel::estimator::iterativeMaximizer< Model >::get_stats()`, and `mappel::estimator::ProfileBoundsData::target_rllh_delta`.

8.5.2.10 `template<class Model > void mappel::methods::estimate_max (const Model & model, const ModelDataT< Model > & data, const std::string & method, estimator::MLEData & mle)`

Definition at line 322 of file `model_methods_impl.h`.

References `make_estimator()`.

Referenced by `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsModel::initial_theta_estimate()`, and `mappel::estimator::Estimator< Model >::~Estimator()`.

8.5.2.11 `template<class Model > void mappel::methods::estimate_max (const Model & model, const ModelDataT< Model > & data, const std::string & method, const ParamT< Model > & theta_init, estimator::MLEData & mle)`

Definition at line 331 of file `model_methods_impl.h`.

References `make_estimator()`.

8.5.2.12 `template<class Model > void mappel::methods::estimate_max (const Model & model, const ModelDataT< Model > & data, const std::string & method, estimator::MLEData & mle, StatsT & stats)`

Definition at line 338 of file `model_methods_impl.h`.

References `make_estimator()`.

8.5.2.13 `template<class Model > void mappel::methods::estimate_max (const Model & model, const ModelDataT< Model > & data, const std::string & method, const ParamT< Model > & theta_init, estimator::MLEData & mle, StatsT & stats)`

Definition at line 348 of file `model_methods_impl.h`.

References `make_estimator()`.

8.5.2.14 `template<class Model > void mappel::methods::estimate_posterior (const Model & model, const ModelDataT< Model > & data, mcmc::MCMCData & mcmc_est)`

Definition at line 383 of file `model_methods_impl.h`.

8.5.2.15 `template<class Model > void mappel::methods::estimate_posterior (const Model & model, const ModelDataT< Model > & data, const ParamT< Model > & theta_init, mcmc::MCMCData & mcmc_est)`

Definition at line 391 of file `model_methods_impl.h`.

References `mappel::mcmc::compute_posterior_credible()`, `mappel::mcmc::MCMCData::confidence`, `mappel::mcmc::MCMCData::credible_lb`, `mappel::mcmc::MCMCData::credible_ub`, `mappel::mcmc::estimate_sample_posterior()`, `mappel::mcmc::MCMCData::Nburnin`, `mappel::mcmc::MCMCData::Nsample`, `mappel::mcmc::num_oversample()`, `mappel::mcmc::MCMCData::sample`, `mappel::mcmc::MCMCData::sample_cov`, `mappel::mcmc::MCMCData::sample_mean`, `mappel::mcmc::sample_posterior()`, `mappel::mcmc::MCMCData::sample_rllh`, `mappel::mcmc::MCMCData::thin`, and `mappel::mcmc::thin_sample()`.

8.5.2.16 `template<class Model > double mappel::methods::estimate_profile_likelihood (const Model & model, const ModelDataT< Model > & data, const std::string & method, const IdxVecT & fixed_idxs, const ParamT< Model > & fixed_theta_init)`

Definition at line 357 of file `model_methods_impl.h`.

References `make_estimator()`.

8.5.2.17 `template<class Model > double mappel::methods::estimate_profile_likelihood (const Model & model, const ModelDataT< Model > & data, const std::string & method, const IdxVecT & fixed_idxs, const ParamT< Model > & fixed_theta_init, StencilT< Model > & profile_max)`

Definition at line 365 of file `model_methods_impl.h`.

References `make_estimator()`.

8.5.2.18 `template<class Model > double mappel::methods::estimate_profile_likelihood (const Model & model, const ModelDataT< Model > & data, const std::string & method, const IdxVecT & fixed_idxs, const ParamT< Model > & fixed_theta_init, StencilT< Model > & profile_max, StatsT & stats)`

Definition at line 373 of file `model_methods_impl.h`.

References `make_estimator()`.

8.5.2.19 `template<class Model > void mappel::methods::estimate_profile_likelihood (const Model & model, const ModelDataT< Model > & data, const std::string & method, const ParamT< Model > & theta_init, estimator::ProfileLikelihoodData & profile_data)`

8.5.2.20 `template<class Model > ReturnIfSubclassT<MatT, Model, PoissonNoise1DObjective>
mappel::methods::expected_information (const Model & model, const StencilT< Model > & s)`

Compute the expected information (Fisher information at theta). Note: Expected information is an average quantity and is independent of the data. Enabled for [PoissonNoise1DObjective](#).

Parameters

<i>model</i>	PointEmitterModel
<i>s</i>	Stencil at desired theta

Returns

The fisher information matrix as an symmetric matrix in upper-triangular format

Definition at line 77 of file `PoissonNoise1DObjective.h`.

8.5.2.21 `template<class Model > ReturnIfSubclassT<MatT, Model, PoissonNoise2DObjective>
mappel::methods::expected_information (const Model & model, const StencilT< Model > & s)`

Compute the expected information (Fisher information at theta). Note: Expected information is an average quantity and is independent of the data. Enabled for [PoissonNoise2DObjective](#).

Parameters

<i>model</i>	PolImageCoordTEmitterModel
<i>s</i>	Stencil at desired theta

Returns

The fisher information matrix as an symmetric matrix in upper-triangular format

Definition at line 83 of file `PoissonNoise2DObjective.h`.

References `mappel::ImageFormat2DBase::size`.

8.5.2.22 `template<class Model> MatT mappel::methods::expected_information (const Model & model, const ParamT< Model> & theta)`

Definition at line 301 of file `model_methods_impl.h`.

Referenced by `cr_lower_bound()`.

8.5.2.23 `template<class Model> void mappel::methods::likelihood_objective (const Model & model, const ModelDataT< Model> & data_im, const StencilT< Model> & s, double & rllh, ParamT< Model> & grad, MatT & hess)`

Definition at line 247 of file `model_methods_impl.h`.

References `mappel::methods::likelihood::hessian()`, and `mappel::methods::likelihood::rllh()`.

Referenced by `likelihood_objective()`.

8.5.2.24 `template<class Model> void mappel::methods::likelihood_objective (const Model & model, const ModelDataT< Model> & data_im, const ParamT< Model> & theta, double & rllh, ParamT< Model> & grad, MatT & hess)`

Definition at line 270 of file `model_methods_impl.h`.

References `mappel::methods::objective::grad()`, `likelihood_objective()`, and `mappel::methods::objective::rllh()`.

8.5.2.25 `template<class Model> ReturnIfSubclassT<std::unique_ptr<estimator::Estimator<Model>>, Model, PoissonNoise1DObjective> mappel::methods::make_estimator (Model & model, std::string ename)`

Definition at line 95 of file `PoissonNoise1DObjective.h`.

References `mappel::istarts_with()`.

Referenced by `estimate_max()`, `mappel::methods::debug::estimate_max_debug()`, `mappel::methods::openmp::estimate_max_stack()`, `estimate_profile_likelihood()`, and `mappel::methods::openmp::estimate_profile_likelihood_stack()`.

8.5.2.26 `template<class Model> ReturnIfSubclassT<std::unique_ptr<estimator::Estimator<Model>>, Model, PoissonNoise2DObjective> mappel::methods::make_estimator (Model & model, std::string ename)`

Definition at line 100 of file `PoissonNoise2DObjective.h`.

References `mappel::istarts_with()`.

8.5.2.27 `template<class Model> Model::ImageT mappel::methods::model_image (const Model & model, const ParamT< Model> & theta)`

Expected number of photons at each pixel in image given the emitter model

Definition at line 16 of file `model_methods_impl.h`.

References `model_image()`.

8.5.2.28 `template<class Model > ImageT<Model> mappel::methods::model_image (const Model & model, const ParamT<Model > & theta)`

Expected number of photons at each pixel in image given the emitter model

Definition at line 16 of file `model_methods_impl.h`.

References `model_image()`.

8.5.2.29 `template<class Model > ReturnIfSubclassT<ImageT<Model>, Model, ImageFormat2DBase> mappel::methods::model_image (const Model & model, const typename Model::Stencil & s)`

Definition at line 122 of file `ImageFormat2DBase.h`.

References `mappel::ImageFormat2DBase::size`.

8.5.2.30 `template<class Model > ReturnIfSubclassT<ImageT<Model>, Model, ImageFormat1DBase> mappel::methods::model_image (const Model & model, const StencilT<Model > & s)`

Definition at line 125 of file `ImageFormat1DBase.h`.

Referenced by `model_image()`, and `mappel::methods::openmp::simulate_image_stack()`.

8.5.2.31 `template<class Model > MatT mappel::methods::observed_information (const Model & model, const ModelDataT<Model > & data, const ParamT<Model > & theta_mle)`

Definition at line 315 of file `model_methods_impl.h`.

Referenced by `mappel::estimator::IterativeMaximizer<Model >::compute_estimate()`, `mappel::estimator::IterativeMaximizer<Model >::compute_estimate_debug()`, `mappel::estimator::HeuristicEstimator<Model >::get_debug_stats()`, `mappel::estimator::CGaussMLE<Model >::get_debug_stats()`, `mappel::estimator::IterativeMaximizer<Model >::local_maximize()`, `mappel::estimator::IterativeMaximizer<Model >::local_profile_maximize()`, and `mappel::estimator::ThreadedEstimator<Model >::record_exit_code()`.

8.5.2.32 `template<class Model > MatT mappel::methods::observed_information (const Model & model, const ModelDataT<Model > & data, const StencilT<Model > & theta_mle)`

Definition at line 307 of file `model_methods_impl.h`.

References `mappel::methods::objective::hessian()`.

8.5.2.33 `template<class Model > void mappel::methods::prior_objective (const Model & model, const ParamT<Model > & theta, double & rlh, ParamT<Model > & grad, MatT & hess)`

Definition at line 229 of file `model_methods_impl.h`.

8.5.2.34 `template<class Model > ModelDataT<Model> mappel::methods::simulate_image (const Model & model, const ParamT< Model > & theta)`

Definition at line 22 of file `model_methods_impl.h`.

References `simulate_image()`.

Referenced by `simulate_image()`, and `mappel::methods::openmp::simulate_image_stack()`.

8.5.2.35 `template<class Model , class RngT > ModelDataT<Model> mappel::methods::simulate_image (const Model & model, const ParamT< Model > & theta, RngT & rng)`

Definition at line 29 of file `model_methods_impl.h`.

References `simulate_image()`.

8.5.2.36 `template<class Model , class rng_t > ModelDataT<Model> mappel::methods::simulate_image (const Model & model, const ParamT< Model > & theta)`

Definition at line 22 of file `model_methods_impl.h`.

References `simulate_image()`.

Referenced by `simulate_image()`, and `mappel::methods::openmp::simulate_image_stack()`.

8.5.2.37 `template<class Model , class rng_t > ReturnIfSubclassT<ModelDataT<Model>, Model, PoissonNoise1DObjective> mappel::methods::simulate_image (const Model & model, const StencilT< Model > & s, rng_t & rng)`

Simulate an image at a given theta stencil, by generating Poisson noise Enabled for [PoissonNoise1DObjective](#).

Parameters

in	<i>model</i>	Model object
in	<i>s</i>	The stencil computed at theta.
in, out	<i>rng</i>	A random number generator

Returns

A simulated image at theta under the noise model.

Definition at line 45 of file `PoissonNoise1DObjective.h`.

References `mappel::generate_poisson()`.

8.5.2.38 `template<class Model , class rng_t > ReturnIfSubclassT<ImageT<Model>, Model, PoissonNoise2DObjective> mappel::methods::simulate_image (const Model & model, const StencilT< Model > & s, rng_t & rng)`

Simulate an image at a given theta stencil, by generating Poisson noise Enabled for [PoissonNoise2DObjective](#).

Parameters

in	<i>model</i>	Model object
in	<i>s</i>	The stencil computed at theta.
in, out	<i>rng</i>	A random number generator

Returns

A simulated image at theta under the noise model.

Definition at line 45 of file PoissonNoise2DObjective.h.

References mappel::generate_poisson(), and mappel::ImageFormat2DBase::size.

8.5.2.39 `template<class Model , class rng_t > ModelDataT<Model> mappel::methods::simulate_image (const Model & model, const ParamT< Model > & theta, rng_t & rng)`

8.5.2.40 `template<class Model > ModelDataT< Model > mappel::methods::simulate_image (const Model & model, const StencilT< Model > & s)`

Definition at line 35 of file model_methods_impl.h.

References simulate_image().

8.5.2.41 `template<class Model > ModelDataT< Model > mappel::methods::simulate_image_from_model (const Model & model, const ImageT< Model > & model_im)`

Definition at line 41 of file model_methods_impl.h.

8.5.2.42 `template<class Model , class rng_t > ReturnIfSubclassT<ModelDataT<Model>, Model, PoissonNoise1DObjective> mappel::methods::simulate_image_from_model (const Model & model, const ImageT< Model > & model_im, rng_t & rng)`

Simulate an image at a given theta stencil, by generating Poisson noise Enabled for [PoissonNoise1DObjective](#).

Parameters

in	<i>model</i>	Model object
in	<i>model_im</i>	An image representing the expected (mean) at each pixel under the PSF model.
in, out	<i>rng</i>	A random number generator

Returns

A simulated image corresponding to model_im under the noise model.

Definition at line 61 of file PoissonNoise1DObjective.h.

References mappel::generate_poisson().

8.5.2.43 `template<class Model , class rng_t > ReturnIfSubclassT<ImageT<Model>, Model, PoissonNoise2DObjective> mappel::methods::simulate_image_from_model (const Model & model, const ImageT< Model > & model_im, rng_t & rng)`

Simulate an image at a given theta stencil, by generating Poisson noise Enabled for [PoissonNoise2DObjective](#).

Parameters

in	<i>model</i>	Model object
in	<i>model_im</i>	An image representing the expected (mean) at each pixel under the PSF model.
in, out	<i>rng</i>	A random number generator

Returns

A simulated image corresponding to *model_im* under the noise model.

Definition at line 64 of file `PoissonNoise2DObjective.h`.

References `mappel::generate_poisson()`, and `mappel::ImageFormat2DBase::size`.

8.6 mappel::methods::debug Namespace Reference

Functions

- `template<class Model > void estimate_max_debug (const Model &model, const ModelDataT< Model > &data, const std::string &method, const ParamT< Model > &theta_init, estimator::MLEDebugData &mle, StatsT &stats)`
- `template<class Model > void error_bounds_profile_likelihood_debug (const Model &model, const ModelDataT< Model > &data, estimator::ProfileBoundsDebugData &bounds, StatsT &stats)`
- `template<class Model > void estimate_posterior_debug (const Model &model, const ModelDataT< Model > &data, const ParamT< Model > &theta_init, mcmc::MCMCDebugData &mcmc_debug_sample)`

8.6.1 Function Documentation

8.6.1.1 `template<class Model > void mappel::methods::debug::error_bounds_profile_likelihood_debug (const Model & model, const ModelDataT< Model > & data, estimator::ProfileBoundsDebugData & bounds, StatsT & stats)`

Definition at line 461 of file `model_methods_impl.h`.

References `mappel::estimator::Estimator< Model >::estimate_profile_bounds_debug()`, and `mappel::estimator::IterativeMaximizer< Model >::get_stats()`.

8.6.1.2 `template<class Model > void mappel::methods::debug::estimate_max_debug (const Model & model, const ModelDataT< Model > & data, const std::string & method, const ParamT< Model > & theta_init, estimator::MLEDebugData & mle, StatsT & stats)`

Definition at line 452 of file `model_methods_impl.h`.

References `mappel::methods::make_estimator()`.

Referenced by `mappel::estimator::Estimator< Model >::~~Estimator()`.

8.6.1.3 `template<class Model > void mappel::methods::debug::estimate_posterior_debug (const Model & model, const ModelDataT< Model > & data, const ParamT< Model > & theta_init, mcmc::MCMCDebugData & mcmc_debug_sample)`

Definition at line 470 of file `model_methods_impl.h`.

References `mappel::mcmc::MCMCDebugData::candidate`, `mappel::mcmc::MCMCDebugData::candidate_rllh`, `mappel::mcmc::MCMCDebugData::initialize_arrays()`, `mappel::mcmc::MCMCDebugData::Nsample`, `mappel::mcmc::MCMCDebugData::sample`, `mappel::mcmc::sample_posterior_debug()`, and `mappel::mcmc::MCMCDebugData::sample_rllh`.

8.7 mappel::methods::likelihood Namespace Reference

Namespaces

- [debug](#)

Functions

- `template<class Model > ReturnIfSubclassT< double, Model, PoissonNoise1DObjective > llh (const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s)`
- `template<class Model > ReturnIfSubclassT< double, Model, PoissonNoise1DObjective > rllh (const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s)`
- `template<class Model > ReturnIfSubclassT< ParamT< Model >, Model, PoissonNoise1DObjective > grad (const Model &model, const ModelDataT< Model > &im, const StencilT< Model > &s)`
- `template<class Model > ReturnIfSubclassT< void, Model, PoissonNoise1DObjective > grad2 (const Model &model, const ModelDataT< Model > &im, const StencilT< Model > &s, ParamT< Model > &grad_val, ParamT< Model > &grad2_val)`
- `template<class Model > ReturnIfSubclassT< void, Model, PoissonNoise1DObjective > hessian (const Model &model, const ModelDataT< Model > &im, const StencilT< Model > &s, ParamT< Model > &grad_val, MatT &hess_val)`
- `template<class Model > ReturnIfSubclassT< double, Model, PoissonNoise2DObjective > llh (const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s)`
- `template<class Model > ReturnIfSubclassT< double, Model, PoissonNoise2DObjective > rllh (const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s)`

- `template<class Model >`
`ReturnIfSubclassT< ParamT< Model >, Model, PoissonNoise2DObjective > grad (const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s)`
- `template<class Model >`
`ReturnIfSubclassT< void, Model, PoissonNoise2DObjective > grad2 (const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s, ParamT< Model > &grad_val, ParamT< Model > &grad2_val)`
- `template<class Model >`
`ReturnIfSubclassT< void, Model, PoissonNoise2DObjective > hessian (const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s, ParamT< Model > &grad_val, MatT &hess_val)`

8.7.1 Function Documentation

8.7.1.1 `template<class Model > ReturnIfSubclassT<ParamT<Model>,Model,PoissonNoise1DObjective>`
`mappel::methods::likelihood::grad (const Model & model, const ModelDataT< Model > & im, const StencilT< Model > & s)`

Definition at line 146 of file PoissonNoise1DObjective.h.

8.7.1.2 `template<class Model > ReturnIfSubclassT<ParamT<Model>,Model,PoissonNoise2DObjective>`
`mappel::methods::likelihood::grad (const Model & model, const ModelDataT< Model > & data_im, const StencilT< Model > & s)`

Definition at line 159 of file PoissonNoise2DObjective.h.

References `mappel::ImageFormat2DBase::size`.

8.7.1.3 `template<class Model > ReturnIfSubclassT<void,Model,PoissonNoise1DObjective>`
`mappel::methods::likelihood::grad2 (const Model & model, const ModelDataT< Model > & im, const StencilT< Model > & s, ParamT< Model > & grad_val, ParamT< Model > & grad2_val)`

Definition at line 163 of file PoissonNoise1DObjective.h.

8.7.1.4 `template<class Model > ReturnIfSubclassT<void,Model,PoissonNoise2DObjective>`
`mappel::methods::likelihood::grad2 (const Model & model, const ModelDataT< Model > & data_im, const StencilT< Model > & s, ParamT< Model > & grad_val, ParamT< Model > & grad2_val)`

Definition at line 177 of file PoissonNoise2DObjective.h.

References `mappel::ImageFormat2DBase::size`.

8.7.1.5 `template<class Model > ReturnIfSubclassT<void,Model,PoissonNoise1DObjective>`
`mappel::methods::likelihood::hessian (const Model & model, const ModelDataT< Model > & im, const StencilT< Model > & s, ParamT< Model > & grad_val, MatT & hess_val)`

Definition at line 186 of file PoissonNoise1DObjective.h.

Referenced by `mappel::methods::aposteriori_objective()`, and `mappel::methods::likelihood_objective()`.

8.7.1.6 `template<class Model > ReturnIfSubclassT<void,Model,PoissonNoise2DObjective>
 mappel::methods::likelihood::hessian (const Model & model, const ModelDataT< Model > & data_im, const
 StencilT< Model > & s, ParamT< Model > & grad_val, MatT & hess_val)`

Definition at line 202 of file PoissonNoise2DObjective.h.

References mappel::ImageFormat2DBase::size.

8.7.1.7 `template<class Model > ReturnIfSubclassT<double,Model,PoissonNoise1DObjective>
 mappel::methods::likelihood::llh (const Model & model, const ModelDataT< Model > & data_im, const StencilT<
 Model > & s)`

Definition at line 122 of file PoissonNoise1DObjective.h.

References mappel::poisson_log_likelihood().

8.7.1.8 `template<class Model > ReturnIfSubclassT<double,Model,PoissonNoise2DObjective>
 mappel::methods::likelihood::llh (const Model & model, const ModelDataT< Model > & data_im, const StencilT<
 Model > & s)`

Definition at line 131 of file PoissonNoise2DObjective.h.

References mappel::poisson_log_likelihood(), and mappel::ImageFormat2DBase::size.

8.7.1.9 `template<class Model > ReturnIfSubclassT<double,Model,PoissonNoise1DObjective>
 mappel::methods::likelihood::rllh (const Model & model, const ModelDataT< Model > & data_im, const StencilT<
 Model > & s)`

Definition at line 134 of file PoissonNoise1DObjective.h.

References mappel::relative_poisson_log_likelihood().

Referenced by mappel::methods::aposteriori_objective(), and mappel::methods::likelihood_objective().

8.7.1.10 `template<class Model > ReturnIfSubclassT<double,Model,PoissonNoise2DObjective>
 mappel::methods::likelihood::rllh (const Model & model, const ModelDataT< Model > & data_im, const StencilT<
 Model > & s)`

Definition at line 145 of file PoissonNoise2DObjective.h.

References mappel::relative_poisson_log_likelihood(), and mappel::ImageFormat2DBase::size.

8.8 mappel::methods::likelihood::debug Namespace Reference

Functions

- `template<class Model >`
`ReturnIfSubclassT< VecT, Model, PoissonNoise1DObjective > llh_components` (const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s)
- `template<class Model >`
`ReturnIfSubclassT< VecT, Model, PoissonNoise1DObjective > rllh_components` (const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s)
- `template<class Model >`
`ReturnIfSubclassT< MatT, Model, PoissonNoise1DObjective > grad_components` (const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s)
- `template<class Model >`
`ReturnIfSubclassT< CubeT, Model, PoissonNoise1DObjective > hessian_components` (const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s)
- `template<class Model >`
`ReturnIfSubclassT< VecT, Model, PoissonNoise2DObjective > llh_components` (const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s)
- `template<class Model >`
`ReturnIfSubclassT< VecT, Model, PoissonNoise2DObjective > rllh_components` (const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s)
- `template<class Model >`
`ReturnIfSubclassT< MatT, Model, PoissonNoise2DObjective > grad_components` (const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s)
- `template<class Model >`
`ReturnIfSubclassT< CubeT, Model, PoissonNoise2DObjective > hessian_components` (const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s)

8.8.1 Function Documentation

8.8.1.1 `template<class Model > ReturnIfSubclassT<MatT,Model,PoissonNoise1DObjective>`
`mappel::methods::likelihood::debug::grad_components` (const Model & *model*, const ModelDataT< Model > & *data_im*, const StencilT< Model > & *s*)

Definition at line 230 of file PoissonNoise1DObjective.h.

8.8.1.2 `template<class Model > ReturnIfSubclassT<MatT,Model,PoissonNoise2DObjective>`
`mappel::methods::likelihood::debug::grad_components` (const Model & *model*, const ModelDataT< Model > & *data_im*, const StencilT< Model > & *s*)

Definition at line 255 of file PoissonNoise2DObjective.h.

References `mappel::ImageFormat2DBase::size`.

8.8.1.3 `template<class Model > ReturnIfSubclassT<CubeT,Model,PoissonNoise1DObjective>`
`mappel::methods::likelihood::debug::hessian_components` (const Model & *model*, const ModelDataT< Model > & *data_im*, const StencilT< Model > & *s*)

Definition at line 246 of file PoissonNoise1DObjective.h.

```
8.8.1.4  template<class Model > ReturnIfSubclassT<CubeT,Model,PoissonNoise2DObjective>
        mappel::methods::likelihood::debug::hessian_components ( const Model & model, const ModelDataT< Model > &
        data_im, const StencilT< Model > & s )
```

Definition at line 274 of file PoissonNoise2DObjective.h.

References mappel::ImageFormat2DBase::size.

```
8.8.1.5  template<class Model > ReturnIfSubclassT<VecT,Model,PoissonNoise1DObjective>
        mappel::methods::likelihood::debug::llh_components ( const Model & model, const ModelDataT< Model > & data_im,
        const StencilT< Model > & s )
```

Definition at line 206 of file PoissonNoise1DObjective.h.

References mappel::poisson_log_likelihood().

```
8.8.1.6  template<class Model > ReturnIfSubclassT<VecT,Model,PoissonNoise2DObjective>
        mappel::methods::likelihood::debug::llh_components ( const Model & model, const ModelDataT< Model > & data_im,
        const StencilT< Model > & s )
```

Definition at line 225 of file PoissonNoise2DObjective.h.

References mappel::poisson_log_likelihood(), and mappel::ImageFormat2DBase::size.

```
8.8.1.7  template<class Model > ReturnIfSubclassT<VecT,Model,PoissonNoise1DObjective>
        mappel::methods::likelihood::debug::rllh_components ( const Model & model, const ModelDataT< Model > & data_im,
        const StencilT< Model > & s )
```

Definition at line 218 of file PoissonNoise1DObjective.h.

References mappel::relative_poisson_log_likelihood().

```
8.8.1.8  template<class Model > ReturnIfSubclassT<VecT,Model,PoissonNoise2DObjective>
        mappel::methods::likelihood::debug::rllh_components ( const Model & model, const ModelDataT< Model > & data_im,
        const StencilT< Model > & s )
```

Definition at line 240 of file PoissonNoise2DObjective.h.

References mappel::relative_poisson_log_likelihood(), and mappel::ImageFormat2DBase::size.

8.9 mappel::methods::objective Namespace Reference

Namespaces

- [debug](#)
- [openmp](#)

Functions

- `template<class Model >`
`ReturnIfSubclassT< double, Model, MAPEstimator > llh` (const Model &model, const `ModelDataT< Model >` &data_im, const `StencilT< Model >` &s)
- `template<class Model >`
`ReturnIfSubclassT< double, Model, MAPEstimator > rllh` (const Model &model, const `ModelDataT< Model >` &data_im, const `StencilT< Model >` &s)
- `template<class Model >`
`ReturnIfSubclassT< ParamT< Model >, Model, MAPEstimator > grad` (const Model &model, const `ModelDataT< Model >` &data_im, const `StencilT< Model >` &s)
- `template<class Model >`
`ReturnIfSubclassT< void, Model, MAPEstimator > grad2` (const Model &model, const `ModelDataT< Model >` &data_im, const `StencilT< Model >` &s, `ParamT< Model >` &grad, `ParamT< Model >` &grad2)
- `template<class Model >`
`ReturnIfSubclassT< void, Model, MAPEstimator > hessian` (const Model &model, const `ModelDataT< Model >` &data_im, const `StencilT< Model >` &s, `ParamT< Model >` &grad, `MatT` &hess)
- `template<class Model >`
`ReturnIfSubclassT< double, Model, MLEstimator > llh` (const Model &model, const `ModelDataT< Model >` &data_im, const `StencilT< Model >` &s)
- `template<class Model >`
`ReturnIfSubclassT< double, Model, MLEstimator > rllh` (const Model &model, const `ModelDataT< Model >` &data_im, const `StencilT< Model >` &s)
- `template<class Model >`
`ReturnIfSubclassT< ParamT< Model >, Model, MLEstimator > grad` (const Model &model, const `ModelDataT< Model >` &data_im, const `StencilT< Model >` &s)
- `template<class Model >`
`ReturnIfSubclassT< void, Model, MLEstimator > grad2` (const Model &model, const `ModelDataT< Model >` &data_im, const `StencilT< Model >` &s, `ParamT< Model >` &grad, `ParamT< Model >` &grad2)
- `template<class Model >`
`ReturnIfSubclassT< void, Model, MLEstimator > hessian` (const Model &model, const `ModelDataT< Model >` &data_im, const `StencilT< Model >` &s, `ParamT< Model >` &grad, `MatT` &hess)
- `template<class Model >`
`double llh` (const Model &model, const `ModelDataT< Model >` &data_im, const `ParamT< Model >` &theta)
- `template<class Model >`
`double rllh` (const Model &model, const `ModelDataT< Model >` &data_im, const `ParamT< Model >` &theta)
- `template<class Model >`
`ParamT< Model > grad` (const Model &model, const `ModelDataT< Model >` &data_im, const `ParamT< Model >` &theta)
- `template<class Model >`
`ParamT< Model > grad2` (const Model &model, const `ModelDataT< Model >` &data_im, const `ParamT< Model >` &theta)
- `template<class Model >`
`void grad2` (const Model &model, const `ModelDataT< Model >` &data_im, const `ParamT< Model >` &theta, `ParamT< Model >` &grad_val, `ParamT< Model >` &grad2_val)
- `template<class Model >`
`MatT hessian` (const Model &model, const `ModelDataT< Model >` &data_im, const `ParamT< Model >` &theta)
- `template<class Model >`
`MatT hessian` (const Model &model, const `ModelDataT< Model >` &data_im, const `StencilT< Model >` &s)
- `template<class Model >`
`void hessian` (const Model &model, const `ModelDataT< Model >` &data_im, const `ParamT< Model >` &theta, `ParamT< Model >` &grad, `MatT` &hess)

- `template<class Model >`
`void hessian (const Model &model, const ModelDataT< Model > &data_im, const ParamT< Model > &theta, MatT &hess)`
- `template<class Model >`
`MatT negative_definite_hessian (const Model &model, const ModelDataT< Model > &data_im, const ParamT< Model > &theta)`
- `template<class Model >`
`MatT negative_definite_hessian (const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s)`
- `template<class Model >`
`void negative_definite_hessian (const Model &model, const ModelDataT< Model > &data_im, const ParamT< Model > &theta, ParamT< Model > &grad, MatT &hess)`
- `template<class Model >`
`void negative_definite_hessian (const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s, ParamT< Model > &grad, MatT &hess)`

8.9.1 Function Documentation

8.9.1.1 `template<class Model > ReturnIfSubclassT<ParamT<Model>, Model,MLEstimator>`
`mappel::methods::objective::grad (const Model & model, const ModelDataT< Model > & data_im, const StencilT< Model > & s)`

Definition at line 51 of file MLEstimator.h.

8.9.1.2 `template<class Model > ReturnIfSubclassT<ParamT<Model>,Model,MAPEstimator>`
`mappel::methods::objective::grad (const Model & model, const ModelDataT< Model > & data_im, const StencilT< Model > & s)`

Definition at line 55 of file MAPEstimator.h.

Referenced by `mappel::methods::aposteriori_objective()`, `grad()`, `mappel::methods::objective::openmp::grad_stack()`, `hessian()`, `mappel::methods::likelihood_objective()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile←_maximize()`, `negative_definite_hessian()`, and `mappel::estimator::IterativeMaximizer< Model >::profile_bound←backtrack()`.

8.9.1.3 `template<class Model > ParamT< Model > mappel::methods::objective::grad (const Model & model, const ModelDataT< Model > & data_im, const ParamT< Model > & theta)`

Definition at line 65 of file model_methods_impl.h.

References `grad()`.

8.9.1.4 `template<class Model > ReturnIfSubclassT<void,Model,MLEstimator> mappel::methods::objective::grad2 (const Model & model, const ModelDataT< Model > & data_im, const StencilT< Model > & s, ParamT< Model > & grad, ParamT< Model > & grad2)`

Definition at line 58 of file MLEstimator.h.

8.9.1.5 `template<class Model > ReturnIfSubclassT<void,Model,MAPEstimator> mappel::methods::objective::grad2 (const Model & model, const ModelDataT< Model > & data_im, const StencilT< Model > & s, ParamT< Model > & grad, ParamT< Model > & grad2)`

Definition at line 64 of file MAPEstimator.h.

Referenced by `grad2()`, and `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

8.9.1.6 `template<class Model > ParamT< Model > mappel::methods::objective::grad2 (const Model & model, const ModelDataT< Model > & data_im, const ParamT< Model > & theta)`

Definition at line 77 of file model_methods_impl.h.

References `grad2()`.

8.9.1.7 `template<class Model > void mappel::methods::objective::grad2 (const Model & model, const ModelDataT< Model > & data_im, const ParamT< Model > & theta, ParamT< Model > & grad_val, ParamT< Model > & grad2_val)`

Definition at line 92 of file model_methods_impl.h.

References `grad2()`.

8.9.1.8 `template<class Model > ReturnIfSubclassT<void,Model,MLEstimator> mappel::methods::objective::hessian (const Model & model, const ModelDataT< Model > & data_im, const StencilT< Model > & s, ParamT< Model > & grad, MatT & hess)`

Definition at line 65 of file MLEstimator.h.

8.9.1.9 `template<class Model > MatT mappel::methods::objective::hessian (const Model & model, const ModelDataT< Model > & data_im, const ParamT< Model > & theta)`

Definition at line 100 of file model_methods_impl.h.

References `hessian()`.

8.9.1.10 `template<class Model > ReturnIfSubclassT<void,Model,MAPEstimator> mappel::methods::objective::hessian (const Model & model, const ModelDataT< Model > & data_im, const StencilT< Model > & s, ParamT< Model > & grad, MatT & hess)`

Definition at line 72 of file MAPEstimator.h.

Referenced by `hessian()`, `mappel::methods::objective::openmp::hessian_stack()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, `negative_definite_hessian()`, and `mappel::methods::observed_information()`.

8.9.1.11 `template<class Model > MatT mappel::methods::objective::hessian (const Model & model, const ModelDataT< Model > & data_im, const StencilT< Model > & s)`

Definition at line 112 of file model_methods_impl.h.

References `grad()`, and `hessian()`.

8.9.1.12 `template<class Model > void mappel::methods::objective::hessian (const Model & model, const ModelDataT< Model > & data_im, const ParamT< Model > & theta, ParamT< Model > & grad, MatT & hess)`

Definition at line 122 of file `model_methods_impl.h`.

References `grad()`, and `hessian()`.

8.9.1.13 `template<class Model > void mappel::methods::objective::hessian (const Model & model, const ModelDataT< Model > & data_im, const ParamT< Model > & theta, MatT & hess)`

Definition at line 134 of file `model_methods_impl.h`.

References `grad()`, and `hessian()`.

8.9.1.14 `template<class Model > ReturnIfSubclassT<double,Model,MAPEstimator> mappel::methods::objective::llh (const Model & model, const ModelDataT< Model > & data_im, const StencilT< Model > & s)`

Definition at line 36 of file `MAPEstimator.h`.

Referenced by `llh()`, `mappel::methods::objective::openmp::llh_stack()`, and `log_likelihood()`.

8.9.1.15 `template<class Model > ReturnIfSubclassT<double,Model,MLEstimator> mappel::methods::objective::llh (const Model & model, const ModelDataT< Model > & data_im, const StencilT< Model > & s)`

Definition at line 37 of file `MLEstimator.h`.

8.9.1.16 `template<class Model > double mappel::methods::objective::llh (const Model & model, const ModelDataT< Model > & data_im, const ParamT< Model > & theta)`

Definition at line 49 of file `model_methods_impl.h`.

References `llh()`.

8.9.1.17 `template<class Model > MatT mappel::methods::objective::negative_definite_hessian (const Model & model, const ModelDataT< Model > & data_im, const ParamT< Model > & theta)`

Definition at line 142 of file `model_methods_impl.h`.

Referenced by `negative_definite_hessian()`, and `mappel::methods::objective::openmp::negative_definite_hessian_stack()`.

8.9.1.18 `template<class Model > MatT mappel::methods::objective::negative_definite_hessian (const Model & model, const ModelDataT< Model > & data_im, const StencilT< Model > & s)`

Definition at line 154 of file `model_methods_impl.h`.

References `grad()`, and `negative_definite_hessian()`.

8.9.1.19 `template<class Model > void mappel::methods::objective::negative_definite_hessian (const Model & model, const ModelDataT< Model > & data_im, const ParamT< Model > & theta, ParamT< Model > & grad, MatT & hess)`

Definition at line 164 of file `model_methods_impl.h`.

References `grad()`, and `negative_definite_hessian()`.

8.9.1.20 `template<class Model > void mappel::methods::objective::negative_definite_hessian (const Model & model, const ModelDataT< Model > & data_im, const StencilT< Model > & s, ParamT< Model > & grad, MatT & hess)`

Definition at line 177 of file `model_methods_impl.h`.

References `mappel::cholesky_make_negative_definite()`, and `hessian()`.

8.9.1.21 `template<class Model > ReturnIfSubclassT<double,Model,MLEstimator> mappel::methods::objective::rllh (const Model & model, const ModelDataT< Model > & data_im, const StencilT< Model > & s)`

Definition at line 44 of file `MLEstimator.h`.

8.9.1.22 `template<class Model > ReturnIfSubclassT<double,Model,MAPEstimator> mappel::methods::objective::rllh (const Model & model, const ModelDataT< Model > & data_im, const StencilT< Model > & s)`

Definition at line 48 of file `MAPEstimator.h`.

Referenced by `mappel::methods::aposteriori_objective()`, `mappel::estimator::IterativeMaximizer< Model >::backtrack()`, `mappel::estimator::Estimator< Model >::estimate_profile_max()`, `mappel::estimator::HeuristicEstimator< Model >::get_debug_stats()`, `mappel::estimator::CGaussMLE< Model >::get_debug_stats()`, `mappel::methods::likelihood_objective()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::MaximizerData()`, `mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack()`, `mappel::estimator::ThreadedEstimator< Model >::record_exit_code()`, `relative_log_likelihood()`, `rllh()`, `mappel::methods::objective::openmp::rllh_stack()`, `mappel::mcmc::sample_posterior()`, and `mappel::mcmc::sample_posterior_debug()`.

8.9.1.23 `template<class Model > double mappel::methods::objective::rllh (const Model & model, const ModelDataT< Model > & data_im, const ParamT< Model > & theta)`

Definition at line 57 of file `model_methods_impl.h`.

References `rllh()`.

8.10 mappel::methods::objective::debug Namespace Reference

Functions

- `template<class Model >`
`ReturnIfSubclassT< VecT, Model, MAPEstimator > llh_components` (const Model &model, const `ModelDataT< Model >` &data_im, const `StencilT< Model >` &s)
- `template<class Model >`
`ReturnIfSubclassT< VecT, Model, MAPEstimator > rllh_components` (const Model &model, const `ModelDataT< Model >` &data_im, const `StencilT< Model >` &s)
- `template<class Model >`
`ReturnIfSubclassT< MatT, Model, MAPEstimator > grad_components` (const Model &model, const `ModelDataT< Model >` &data_im, const `StencilT< Model >` &s)
- `template<class Model >`
`ReturnIfSubclassT< CubeT, Model, MAPEstimator > hessian_components` (const Model &model, const `ModelDataT< Model >` &data_im, const `StencilT< Model >` &s)
- `template<class Model >`
`ReturnIfSubclassT< VecT, Model, MLEstimator > llh_components` (const Model &model, const `ModelDataT< Model >` &data_im, const `StencilT< Model >` &s)
- `template<class Model >`
`ReturnIfSubclassT< VecT, Model, MLEstimator > rllh_components` (const Model &model, const `ModelDataT< Model >` &data_im, const `StencilT< Model >` &s)
- `template<class Model >`
`ReturnIfSubclassT< MatT, Model, MLEstimator > grad_components` (const Model &model, const `ModelDataT< Model >` &data_im, const `StencilT< Model >` &s)
- `template<class Model >`
`ReturnIfSubclassT< CubeT, Model, MLEstimator > hessian_components` (const Model &model, const `ModelDataT< Model >` &data_im, const `StencilT< Model >` &s)
- `template<class Model >`
`VecT llh_components` (const Model &model, const `ModelDataT< Model >` &data_im, const `ParamT< Model >` &theta)
- `template<class Model >`
`VecT rllh_components` (const Model &model, const `ModelDataT< Model >` &data_im, const `ParamT< Model >` &theta)
- `template<class Model >`
`MatT grad_components` (const Model &model, const `ModelDataT< Model >` &data_im, const `ParamT< Model >` &theta)
- `template<class Model >`
`CubeT hessian_components` (const Model &model, const `ModelDataT< Model >` &data_im, const `ParamT< Model >` &theta)

8.10.1 Function Documentation

- 8.10.1.1 `template<class Model > ReturnIfSubclassT<MatT,Model,MLEstimator> mappel::methods::objective::debug::grad_components (const Model & model, const ModelDataT< Model > & data_im, const StencilT< Model > & s)`

Definition at line 88 of file MLEstimator.h.

8.10.1.2 `template<class Model> ReturnIfSubclassT<MatT,Model,MAPEstimator> mappel::methods::objective::debug::grad_components (const Model & model, const ModelDataT< Model> & data_im, const StencilT< Model> & s)`

Definition at line 96 of file MAPEstimator.h.

Referenced by `grad_components()`.

8.10.1.3 `template<class Model> MatT mappel::methods::objective::debug::grad_components (const Model & model, const ModelDataT< Model> & data_im, const ParamT< Model> & theta)`

Definition at line 201 of file model_methods_impl.h.

References `grad_components()`.

8.10.1.4 `template<class Model> ReturnIfSubclassT<CubeT,Model,MLEstimator> mappel::methods::objective::debug::hessian_components (const Model & model, const ModelDataT< Model> & data_im, const StencilT< Model> & s)`

Definition at line 95 of file MLEstimator.h.

8.10.1.5 `template<class Model> ReturnIfSubclassT<CubeT,Model,MAPEstimator> mappel::methods::objective::debug::hessian_components (const Model & model, const ModelDataT< Model> & data_im, const StencilT< Model> & s)`

Definition at line 103 of file MAPEstimator.h.

Referenced by `hessian_components()`.

8.10.1.6 `template<class Model> CubeT mappel::methods::objective::debug::hessian_components (const Model & model, const ModelDataT< Model> & data_im, const ParamT< Model> & theta)`

Definition at line 208 of file model_methods_impl.h.

References `hessian_components()`.

8.10.1.7 `template<class Model> ReturnIfSubclassT<VecT,Model,MLEstimator> mappel::methods::objective::debug::llh_components (const Model & model, const ModelDataT< Model> & data_im, const StencilT< Model> & s)`

Definition at line 74 of file MLEstimator.h.

8.10.1.8 `template<class Model> ReturnIfSubclassT<VecT,Model,MAPEstimator> mappel::methods::objective::debug::llh_components (const Model & model, const ModelDataT< Model> & data_im, const StencilT< Model> & s)`

Definition at line 82 of file MAPEstimator.h.

Referenced by `llh_components()`.

8.10.1.9 `template<class Model > VecT mappel::methods::objective::debug::llh_components (const Model & model, const ModelDataT< Model > & data_im, const ParamT< Model > & theta)`

Definition at line 187 of file `model_methods_impl.h`.

References `llh_components()`.

8.10.1.10 `template<class Model > ReturnIfSubclassT<VecT,Model,MLEstimator> mappel::methods::objective::debug::rllh_components (const Model & model, const ModelDataT< Model > & data_im, const StencilT< Model > & s)`

Definition at line 81 of file `MLEstimator.h`.

8.10.1.11 `template<class Model > ReturnIfSubclassT<VecT,Model,MAPEstimator> mappel::methods::objective::debug::rllh_components (const Model & model, const ModelDataT< Model > & data_im, const StencilT< Model > & s)`

Definition at line 89 of file `MAPEstimator.h`.

Referenced by `rllh_components()`.

8.10.1.12 `template<class Model > VecT mappel::methods::objective::debug::rllh_components (const Model & model, const ModelDataT< Model > & data_im, const ParamT< Model > & theta)`

Definition at line 194 of file `model_methods_impl.h`.

References `rllh_components()`.

8.11 mappel::methods::objective::openmp Namespace Reference

Functions

- `template<class Model > void llh_stack (const Model &model, const ImageT< Model > &image, const ParamVecT< Model > &theta_stack, VecT &llh_stack)`
Parallel log_likelihood calculations for a single image.
- `template<class Model > void llh_stack (const Model &model, const ImageStackT< Model > &image_stack, const ParamVecT< Model > &theta_stack, VecT &llh_stack)`
Parallel log_likelihood calculations for a stack of images.
- `template<class Model > void rllh_stack (const Model &model, const ImageStackT< Model > &image_stack, const ParamVecT< Model > &theta_stack, VecT &rllh_stack)`
Parallel relative log_likelihood calculations for a stack of images.
- `template<class Model > void rllh_stack (const Model &model, const ImageT< Model > &image, const ParamVecT< Model > &theta_stack, VecT &rllh_stack)`

- `template<class Model >`
`void grad_stack (const Model &model, const ImageStackT< Model > &image_stack, const ParamVecT< Model > &theta_stack, ParamVecT< Model > &grad_stack)`
Parallel model gradient calculations for a stack of images.
- `template<class Model >`
`void hessian_stack (const Model &model, const ImageStackT< Model > &image_stack, const ParamVecT< Model > &theta_stack, CubeT &hessian_stack)`
Parallel model Hessian calculations for a stack of images.
- `template<class Model >`
`void negative_definite_hessian_stack (const Model &model, const ImageStackT< Model > &image_stack, const ParamVecT< Model > &theta_stack, CubeT &hessian_stack)`
Parallel model negative_definite Hessian approximation calculations for a stack of images.

8.11.1 Function Documentation

8.11.1.1 `template<class Model > void mappel::methods::objective::openmp::grad_stack (const Model & model, const ImageStackT< Model > & image_stack, const ParamVecT< Model > & theta_stack, ParamVecT< Model > & grad_stack)`

Parallel model gradient calculations for a stack of images.

Compute gradient of log-likelihood for multiple image, theta pairs.

Use: `model.make_param_stack()` to make a parameter stack of appropriate dimensions for the model gradients.

Template Parameters

<i>Model</i>	A concrete subclass of PointEmitterModel
--------------	--

Parameters

in	<i>model</i>	A PointEmitterModel object.
in	<i>image_stack</i>	Sequence of images.
in	<i>theta_stack</i>	Sequence of thetas.
out	<i>grad_stack</i>	Sequence of grad vectors values computed. Size: [model.num_params, n]

Definition at line 504 of file `openmp_methods.h`.

References `mappel::methods::objective::grad()`, `omp_exception_catcher::impl_::OMPExcceptionCatcher<_dummy>::rethrow()`, and `omp_exception_catcher::impl_::OMPExcceptionCatcher<_dummy>::run()`.

8.11.1.2 `template<class Model > void mappel::methods::objective::openmp::hessian_stack (const Model & model, const ImageStackT< Model > & image_stack, const ParamVecT< Model > & theta_stack, CubeT & hessian_stack)`

Parallel model Hessian calculations for a stack of images.

Compute Hessian of log-likelihood for multiple image, theta pairs.

Use: `model.make_param_mat_stack()` to make a parameter matrix stack of appropriate dimensions for the model Hessian.

Template Parameters

<i>Model</i>	A concrete subclass of PointEmitterModel
--------------	--

Parameters

in	<i>model</i>	A PointEmitterModel object.
in	<i>image_stack</i>	Sequence of images.
in	<i>theta_stack</i>	Sequence of thetas. Size: [model.num_params, nThetas]
out	<i>hess_stack</i>	Sequence of Hessian matrices computed. Size: [model.num_params, model.num_params, n]

Definition at line 552 of file `openmp_methods.h`.

References `mappel::methods::objective::hessian()`, `omp_exception_catcher::impl::OMPExcceptionCatcher<_dummy>::rethrow()`, and `omp_exception_catcher::impl::OMPExcceptionCatcher<_dummy>::run()`.

8.11.1.3 `template<class Model > void mappel::methods::objective::openmp::llh_stack (const Model & model, const ImageT<Model > & image, const ParamVecT<Model > & theta_stack, VecT & llh_stack)`

Parallel `log_likelihood` calculations for a single image.

Compute log-likelihood for multiple thetas using the same image

Use: `model.make_param_stack()` to make a parameter stack of appropriate dimensions for the model

Template Parameters

<i>Model</i>	A concrete subclass of PointEmitterModel
--------------	--

Parameters

in	<i>model</i>	A PointEmitterModel object.
in	<i>image</i>	An image.
in	<i>theta_stack</i>	Sequence of thetas. Size: [model.num_params, nThetas]
out	<i>llh_stack</i>	Sequence of llh values computed.

Definition at line 368 of file `openmp_methods.h`.

References `omp_exception_catcher::impl::OMPExcceptionCatcher<_dummy>::rethrow()`, and `omp_exception_catcher::impl::OMPExcceptionCatcher<_dummy>::run()`.

8.11.1.4 `template<class Model > void mappel::methods::objective::openmp::llh_stack (const Model & model, const ImageStackT<Model > & image_stack, const ParamVecT<Model > & theta_stack, VecT & llh_stack)`

Parallel `log_likelihood` calculations for a stack of images.

Compute log-likelihood for multiple image, theta pairs.

Use: `model.make_param_stack()` to make a parameter stack of appropriate dimensions for the model

Template Parameters

<i>Model</i>	A concrete subclass of PointEmitterModel
--------------	--

Parameters

in	<i>model</i>	A PointEmitterModel object.
in	<i>image_stack</i>	Sequence of images.
in	<i>theta_stack</i>	Sequence of thetas. Size: [model.num_params, nThetas]
out	<i>llh_stack</i>	Sequence of llh values computed. Size: [n]

Definition at line 393 of file openmp_methods.h.

References [mappel::methods::objective::llh\(\)](#), [omp_exception_catcher::impl::OMPExcceptionCatcher<_dummy>::rethrow\(\)](#), and [omp_exception_catcher::impl::OMPExcceptionCatcher<_dummy>::run\(\)](#).

8.11.1.5 `template<class Model> void mappel::methods::objective::openmp::negative_definite_hessian_stack (const Model & model, const ImageStackT< Model > & image_stack, const ParamVecT< Model > & theta_stack, CubeT & hessian_stack)`

Parallel model negative_definite Hessian approximation calculations for a stack of images.

Compute Hessian a negative_definite Hessian using a modified Cholesky decompositions. Computes for multiple image, theta pairs.

Use: [model.make_param_mat_stack\(\)](#) to make a parameter matrix stack of appropriate dimensions for the model Hessian.

Template Parameters

<i>Model</i>	A concrete subclass of PointEmitterModel
--------------	--

Parameters

in	<i>model</i>	A PointEmitterModel object.
in	<i>image_stack</i>	Sequence of images.
in	<i>theta_stack</i>	Sequence of thetas. Size: [model.num_params, nThetas]
out	<i>hess_stack</i>	Sequence of approximate Hessian negative definite matrices computed. Size: [model.num_params, model.num_params, n]

Definition at line 601 of file openmp_methods.h.

References [mappel::methods::objective::negative_definite_hessian\(\)](#), [omp_exception_catcher::impl::OMPExcceptionCatcher<_dummy>::rethrow\(\)](#), and [omp_exception_catcher::impl::OMPExcceptionCatcher<_dummy>::run\(\)](#).

8.11.1.6 `template<class Model> void mappel::methods::objective::openmp::rllh_stack (const Model & model, const ImageStackT< Model > & image_stack, const ParamVecT< Model > & theta_stack, VecT & rllh_stack)`

Parallel relative log_likelihood calculations for a stack of images.

Compute relative log-likelihood for multiple image, theta pairs.

Use: `model.make_param_stack()` to make a parameter stack of appropriate dimensions for the model

Template Parameters

<i>Model</i>	A concrete subclass of PointEmitterModel
--------------	--

Parameters

in	<i>model</i>	A PointEmitterModel object.
in	<i>image_stack</i>	Sequence of images.
in	<i>theta_stack</i>	Sequence of thetas. Size: [model.num_params, nThetas]
out	<i>rllh_stack</i>	Sequence of rllh values computed. Size: [n]

Definition at line 440 of file `openmp_methods.h`.

References `omp_exception_catcher::impl_::OMPEXceptionCatcher<_dummy>::rethrow()`, `mappel::methods::objective::rllh()`, `rllh_stack()`, and `omp_exception_catcher::impl_::OMPEXceptionCatcher<_dummy>::run()`.

Referenced by `mappel::estimator::CGaussMLE<Model>::get_debug_stats()`.

8.11.1.7 `template<class Model> void mappel::methods::objective::openmp::rllh_stack (const Model & model, const ImageT<Model> & image, const ParamVecT<Model> & theta_stack, VecT & rllh_stack)`

Definition at line 476 of file `openmp_methods.h`.

References `omp_exception_catcher::impl_::OMPEXceptionCatcher<_dummy>::rethrow()`, and `omp_exception_catcher::impl_::OMPEXceptionCatcher<_dummy>::run()`.

Referenced by `rllh_stack()`.

8.12 mappel::methods::openmp Namespace Reference

Functions

- `template<class Model>`
void [sample_prior_stack](#) (const Model &model, [ParamVecT](#)<Model> &theta_stack)
Parallel sampling of the model prior.
- `template<class Model>`
void [model_image_stack](#) (const Model &model, const [ParamVecT](#)<Model> &theta_stack, [ImageStackT](#)<Model> &image_stack)
Parallel computation of the model image.
- `template<class Model>`
void [simulate_image_stack](#) (const Model &model, const [ParamVecT](#)<Model> &theta_stack, [ImageStackT](#)<Model> &image_stack)
Parallel simulation of images from one or more theta.

- `template<class Model >`
`void cr_lower_bound_stack (const Model &model, const ParamVecT< Model > &theta_stack, ParamVecT< Model > &crlb_stack)`
- `template<class Model >`
`void expected_information_stack (const Model &model, const ParamVecT< Model > &theta_stack, CubeT &fisherl_stack)`
- `template<class Model >`
`void estimate_max_stack (const Model &model, const ModelDataStackT< Model > &data_stack, const std::string &method, estimator::MLEDataStack &mle_data_stack)`
- `template<class Model >`
`void estimate_max_stack (const Model &model, const ModelDataStackT< Model > &data_stack, const std::string &method, ParamVecT< Model > &theta_init_stack, estimator::MLEDataStack &mle_data_stack)`
- `template<class Model >`
`void estimate_max_stack (const Model &model, const ModelDataStackT< Model > &data_stack, const std::string &method, ParamVecT< Model > &theta_init_stack, estimator::MLEDataStack &mle_data_stack, StatsT &stats)`
- `template<class Model >`
`void estimate_profile_likelihood_stack (const Model &model, const ModelDataT< Model > &data, const std::string &method, const ParamVecT< Model > &fixed_theta_init, estimator::ProfileLikelihoodData &est)`
- `template<class Model >`
`void estimate_profile_likelihood_stack (const Model &model, const ModelDataT< Model > &data, const std::string &method, const ParamVecT< Model > &fixed_theta_init, estimator::ProfileLikelihoodData &est, StatsT &stats)`
- `template<class Model >`
`void estimate_posterior_stack (const Model &model, const ModelDataStackT< Model > &data_stack, const ParamVecT< Model > &theta_init_stack, mcmc::MCMCDataStack &est)`
- `template<class Model >`
`void estimate_posterior_stack (const Model &model, const ModelDataStackT< Model > &data_stack, mcmc::MCMCDataStack &est)`
- `template<class Model >`
`void error_bounds_expected_stack (const Model &model, const MatT &theta_est_stack, double confidence, MatT &theta_lb_stack, MatT &theta_ub_stack)`
- `template<class Model >`
`void error_bounds_observed_stack (const Model &model, const MatT &theta_est_stack, CubeT &obsl_stack, double confidence, MatT &theta_lb_stack, MatT &theta_ub_stack)`
- `template<class Model >`
`void error_bounds_profile_likelihood_parallel (const Model &model, const ModelDataStackT< Model > &image, estimator::ProfileBoundsData &est, StatsT &stats)`
- `template<class Model >`
`void error_bounds_profile_likelihood_parallel (const Model &model, const ModelDataT< Model > &image, estimator::ProfileBoundsData &est)`
- `template<class Model >`
`void error_bounds_profile_likelihood_stack (const Model &model, const ModelDataStackT< Model > &image, estimator::ProfileBoundsDataStack &est, StatsT &stats)`
- `template<class Model >`
`void error_bounds_profile_likelihood_stack (const Model &model, const ModelDataStackT< Model > &image, estimator::ProfileBoundsDataStack &est)`

8.12.1 Function Documentation

8.12.1.1 `template<class Model> void mappel::methods::openmp::cr_lower_bound_stack (const Model & model, const ParamVecT< Model> & theta_stack, ParamVecT< Model> & crlb_stack)`

Definition at line 138 of file `openmp_methods.h`.

References `omp_exception_catcher::impl::OMPEXceptionCatcher< _dummy>::rethrow()`, and `omp_exception_catcher::impl::OMPEXceptionCatcher< _dummy>::run()`.

8.12.1.2 `template<class Model> void mappel::methods::openmp::error_bounds_expected_stack (const Model & model, const MatT & theta_est_stack, double confidence, MatT & theta_lb_stack, MatT & theta_ub_stack)`

Definition at line 262 of file `openmp_methods.h`.

References `mappel::normal_quantile_twosided()`, `omp_exception_catcher::impl::OMPEXceptionCatcher< _dummy>::rethrow()`, and `omp_exception_catcher::impl::OMPEXceptionCatcher< _dummy>::run()`.

8.12.1.3 `template<class Model> void mappel::methods::openmp::error_bounds_observed_stack (const Model & model, const MatT & theta_est_stack, CubeT & obsl_stack, double confidence, MatT & theta_lb_stack, MatT & theta_ub_stack)`

Definition at line 283 of file `openmp_methods.h`.

References `mappel::normal_quantile_twosided()`, and `omp_exception_catcher::impl::OMPEXceptionCatcher< _dummy>::run()`.

8.12.1.4 `template<class Model> void mappel::methods::openmp::error_bounds_profile_likelihood_parallel (const Model & model, const ModelDataStackT< Model> & image, estimator::ProfileBoundsData & est, StatsT & stats)`

Profile likelihood bounds. Uses the Venzon and Moolgavkar (VM) algorithm for computing each of the bounds of the profile likelihood.

Definition at line 312 of file `openmp_methods.h`.

References `mappel::chisq_quantile()`, `mappel::estimator::ProfileBoundsData::confidence`, `mappel::estimator::ThreadedEstimator< Model>::estimate_profile_bounds_parallel()`, `mappel::estimator::ProfileBoundsData::estimated_idx`s, `mappel::estimator::IterativeMaximizer< Model>::get_stats()`, and `mappel::estimator::ProfileBoundsData::target_rllh_delta`.

8.12.1.5 `template<class Model> void mappel::methods::openmp::error_bounds_profile_likelihood_parallel (const Model & model, const ModelDataT< Model> & image, estimator::ProfileBoundsData & est)`

Definition at line 322 of file `openmp_methods.h`.

References `mappel::chisq_quantile()`, `mappel::estimator::ProfileBoundsData::confidence`, `mappel::estimator::ThreadedEstimator< Model>::estimate_profile_bounds_parallel()`, `mappel::estimator::ProfileBoundsData::estimated_idx`s, and `mappel::estimator::ProfileBoundsData::target_rllh_delta`.

8.12.1.6 `template<class Model > void mappel::methods::openmp::error_bounds_profile_likelihood_stack (const Model & model, const ModelDataStackT< Model > & image, estimator::ProfileBoundsDataStack & est, StatsT & stats)`

Definition at line 331 of file `openmp_methods.h`.

References `mappel::chisq_quantile()`, `mappel::estimator::ProfileBoundsDataStack::confidence`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack()`, `mappel::estimator::ProfileBoundsDataStack::estimated_idx`s, `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, and `mappel::estimator::ProfileBoundsDataStack::target_rllh_delta`.

8.12.1.7 `template<class Model > void mappel::methods::openmp::error_bounds_profile_likelihood_stack (const Model & model, const ModelDataStackT< Model > & image, estimator::ProfileBoundsDataStack & est)`

Definition at line 341 of file `openmp_methods.h`.

References `mappel::chisq_quantile()`, `mappel::estimator::ProfileBoundsDataStack::confidence`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack()`, `mappel::estimator::ProfileBoundsDataStack::estimated_idx`s, and `mappel::estimator::ProfileBoundsDataStack::target_rllh_delta`.

8.12.1.8 `template<class Model > void mappel::methods::openmp::estimate_max_stack (const Model & model, const ModelDataStackT< Model > & data_stack, const std::string & method, estimator::MLEDataStack & mle_data_stack)`

Definition at line 168 of file `openmp_methods.h`.

References `mappel::methods::make_estimator()`.

Referenced by `mappel::estimator::Estimator< Model >::~~Estimator()`.

8.12.1.9 `template<class Model > void mappel::methods::openmp::estimate_max_stack (const Model & model, const ModelDataStackT< Model > & data_stack, const std::string & method, ParamVecT< Model > & theta_init_stack, estimator::MLEDataStack & mle_data_stack)`

Definition at line 178 of file `openmp_methods.h`.

References `mappel::methods::make_estimator()`.

8.12.1.10 `template<class Model > void mappel::methods::openmp::estimate_max_stack (const Model & model, const ModelDataStackT< Model > & data_stack, const std::string & method, ParamVecT< Model > & theta_init_stack, estimator::MLEDataStack & mle_data_stack, StatsT & stats)`

Definition at line 187 of file `openmp_methods.h`.

References `mappel::methods::make_estimator()`.

8.12.1.11 `template<class Model > void mappel::methods::openmp::estimate_posterior_stack (const Model & model, const ModelDataStackT< Model > & data_stack, const ParamVecT< Model > & theta_init_stack, mcmc::MCMCDataStack & est)`

Definition at line 216 of file openmp_methods.h.

References `mappel::mcmc::MCMCDataStack::initialize_arrays()`, `mappel::mcmc::MCMCDataStack::Nburnin`, `mappel::mcmc::MCMCDataStack::Ndata`, `mappel::mcmc::MCMCDataStack::Nsample`, `mappel::mcmc::num_oversample()`, `omp_exception_catcher::impl::OMPEXceptionCatcher< _dummy >::rethrow()`, `omp_exception_catcher::impl::OMPEXceptionCatcher< _dummy >::run()`, and `mappel::mcmc::MCMCDataStack::thin`.

Referenced by `estimate_posterior_stack()`.

8.12.1.12 `template<class Model > void mappel::methods::openmp::estimate_posterior_stack (const Model & model, const ModelDataStackT< Model > & data_stack, mcmc::MCMCDataStack & est)`

Definition at line 254 of file openmp_methods.h.

References `estimate_posterior_stack()`.

8.12.1.13 `template<class Model > void mappel::methods::openmp::estimate_profile_likelihood_stack (const Model & model, const ModelDataT< Model > & data, const std::string & method, const ParamVecT< Model > & fixed_theta_init, estimator::ProfileLikelihoodData & est)`

Definition at line 197 of file openmp_methods.h.

References `mappel::methods::make_estimator()`.

8.12.1.14 `template<class Model > void mappel::methods::openmp::estimate_profile_likelihood_stack (const Model & model, const ModelDataT< Model > & data, const std::string & method, const ParamVecT< Model > & fixed_theta_init, estimator::ProfileLikelihoodData & est, StatsT & stats)`

Definition at line 206 of file openmp_methods.h.

References `mappel::methods::make_estimator()`.

8.12.1.15 `template<class Model > void mappel::methods::openmp::expected_information_stack (const Model & model, const ParamVecT< Model > & theta_stack, CubeT & fisherl_stack)`

Definition at line 153 of file openmp_methods.h.

References `omp_exception_catcher::impl::OMPEXceptionCatcher< _dummy >::rethrow()`, and `omp_exception_catcher::impl::OMPEXceptionCatcher< _dummy >::run()`.

8.12.1.16 `template<class Model > void mappel::methods::openmp::model_image_stack (const Model & model, const ParamVecT< Model > & theta_stack, ImageStackT< Model > & image_stack)`

Parallel computation of the model image.

The model image is the expected photon count at each pixel under parameter theta.

Use: `model.make_param_stack()` to make a parameter stack of appropriate dimensions for the model Use: `model.make_image_stack()` to make an image stack of appropriate dimensions for the model

Template Parameters

<i>Model</i>	A concrete subclass of PointEmitterModel
--------------	--

Parameters

in	<i>model</i>	A PointEmitterModel object.
in	<i>theta_stack</i>	Sequence of thetas for which to generate images. Size: [model.num_params, nThetas]
out	<i>image_stack</i>	Sequence of model images generated.

Definition at line 73 of file openmp_methods.h.

References `omp_exception_catcher::impl_::OMPExcceptionCatcher<_dummy>::rethrow()`, and `omp_exception_catcher::impl_::OMPExcceptionCatcher<_dummy>::run()`.

8.12.1.17 `template<class Model> void mappel::methods::openmp::sample_prior_stack (const Model & model, ParamVecT<Model> & theta_stack)`

Parallel sampling of the model prior.

Use: `model.make_param_stack()` to make a parameter stack of appropriate dimensions for the model

Template Parameters

<i>Model</i>	A concrete subclass of PointEmitterModel
--------------	--

Parameters

in	<i>model,A</i>	PointEmitterModel object.
out	<i>theta_stack,A</i>	sequence of sampled thetas. Size: [model.num_params, nSamples]

Definition at line 45 of file openmp_methods.h.

References `omp_exception_catcher::Continue`, `omp_exception_catcher::impl_::OMPExcceptionCatcher<_dummy>::rethrow()`, and `omp_exception_catcher::impl_::OMPExcceptionCatcher<_dummy>::run()`.

8.12.1.18 `template<class Model> void mappel::methods::openmp::simulate_image_stack (const Model & model, const ParamVecT<Model> & theta_stack, ImageStackT<Model> & image_stack)`

Parallel simulation of images from one or more theta.

This accepts either a single theta and a stack of images, or a stack of thetas and a stack of images.

Use: `model.make_param_stack()` to make a parameter stack of appropriate dimensions for the model Use: `model.make_image_stack()` to make an image stack of appropriate dimensions for the model

Template Parameters

<i>Model</i>	A concrete subclass of PointEmitterModel
--------------	--

Parameters

in	<i>model</i>	A PointEmitterModel object.
in	<i>theta_stack</i>	Single theta or a sequence of thetas. Size: [model.num_params, nThetas]
out	<i>image_stack</i>	Sequence of model images generated.

Definition at line 100 of file `openmp_methods.h`.

References `mappel::methods::model_image()`, `omp_exception_catcher::impl_::OMPEExceptionCatcher<_dummy>::rethrow()`, `omp_exception_catcher::impl_::OMPEExceptionCatcher<_dummy>::run()`, and `mappel::methods::simulate_image()`.

8.13 omp_exception_catcher Namespace Reference

Namespaces

- [impl_](#)

Typedefs

- using [OMPEExceptionCatcher](#) = [impl_::OMPEExceptionCatcher<>](#)

Enumerations

- enum [Strategy](#) { [Strategy::DoNotTry](#), [Strategy::Continue](#), [Strategy::Abort](#), [Strategy::RethrowFirst](#) }

8.13.1 Typedef Documentation

8.13.1.1 using `omp_exception_catcher::OMPEExceptionCatcher` = `typedef impl_::OMPEExceptionCatcher<>`

A class to run and catch exceptions in parallel code allowing various exception management strategies

Definition at line 114 of file `OMPEExceptionCatcher.h`.

8.13.2 Enumeration Type Documentation

8.13.2.1 enum omp_exception_catcher::Strategy [strong]

Enumerator

DoNotTry
Continue
Abort
RethrowFirst

Definition at line 38 of file OMPExcceptionCatcher.h.

8.14 omp_exception_catcher::impl_ Namespace Reference

Classes

- class [OMPExcceptionCatcher](#)


9 Class Documentation

9.1 mappel::ArrayShapeError Struct Reference

Array is not of the right dimensionality.

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/util.h>
```

Inheritance diagram for mappel::ArrayShapeError:

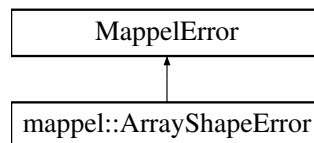

Public Member Functions

- [ArrayShapeError](#) (std::string message)

9.1.1 Detailed Description

Array is not of the right dimensionality.

Definition at line 76 of file util.h.

9.1.2 Constructor & Destructor Documentation

9.1.2.1 mappel::ArrayShapeError::ArrayShapeError (std::string *message*) [inline]

Definition at line 78 of file util.h.

The documentation for this struct was generated from the following file:


- [util.h](#)

9.2 mappel::ArraySizeError Struct Reference

Array is not of the right size.

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/util.h>
```

Inheritance diagram for mappel::ArraySizeError:

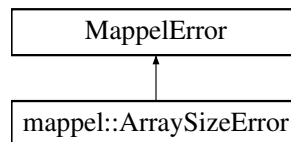

Public Member Functions

- [ArraySizeError](#) (std::string message)

9.2.1 Detailed Description

Array is not of the right size.

Definition at line 83 of file util.h.

9.2.2 Constructor & Destructor Documentation

9.2.2.1 mappel::ArraySizeError::ArraySizeError (std::string *message*) [inline]

Definition at line 85 of file util.h.


The documentation for this struct was generated from the following file:

- [util.h](#)

9.3 mappel::estimator::CGaussHeuristicEstimator< Model > Class Template Reference

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/estimator.h>
```

Inheritance diagram for mappel::estimator::CGaussHeuristicEstimator< Model >:

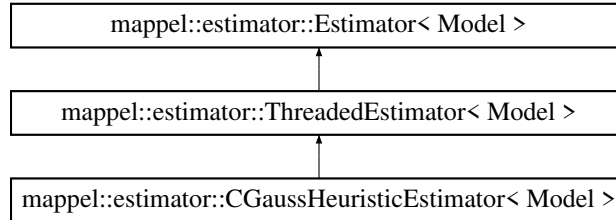

Public Member Functions

- [CGaussHeuristicEstimator](#) (const Model &model)
- [StatsT get_stats](#) ()
- [StatsT get_debug_stats](#) ()
- [std::string name](#) () const
- void [estimate_max_stack](#) (const [ModelDataStackT](#)< Model > &data, const [ParamVecT](#)< Model > &theta_init, [_stack](#), [MLEDataStack](#) &mle_data_stack) override
- void [estimate_profile_max](#) (const [ModelDataT](#)< Model > &data, const [ParamVecT](#)< Model > &theta_init, [ProfileLikelihoodData](#) &profile) override
- void [estimate_profile_bounds_parallel](#) (const [ModelDataT](#)< Model > &data, [ProfileBoundsData](#) &bounds_est) override
- void [estimate_profile_bounds_stack](#) (const [ModelDataStackT](#)< Model > &data, [ProfileBoundsDataStack](#) &bounds_est_stack) override
- void [clear_stats](#) ()
- const Model & [get_model](#) ()
- void [estimate_max_stack](#) (const [ModelDataStackT](#)< Model > &data_stack, [MLEDataStack](#) &mle_data_stack)
- void [estimate_max](#) (const [ModelDataT](#)< Model > &data, const [ParamT](#)< Model > &theta_init, [MLEData](#) &mle_data, [StencilT](#)< Model > &mle_stencil)
- void [estimate_max](#) (const [ModelDataT](#)< Model > &data, const [ParamT](#)< Model > &theta_init, [MLEData](#) &mle_data)
- void [estimate_max](#) (const [ModelDataT](#)< Model > &data, [MLEData](#) &mle_data)
- void [estimate_max_debug](#) (const [ModelDataT](#)< Model > &data, const [ParamT](#)< Model > &theta_init, [MLEData](#) &mle_data, [StencilT](#)< Model > &mle_stencil)
- void [estimate_max_debug](#) (const [ModelDataT](#)< Model > &data, const [ParamT](#)< Model > &theta_init, [MLEData](#) &mle_data)
- double [estimate_profile_max](#) (const [ModelDataT](#)< Model > &data, const [IdxVecT](#) &fixed_idxs, const [ParamT](#)< Model > &fixed_theta_init, [StencilT](#)< Model > &theta_max)
- void [estimate_profile_bounds](#) (const [ModelDataT](#)< Model > &data, [ProfileBoundsData](#) &bounds_est)
- void [estimate_profile_bounds_debug](#) (const [ModelDataT](#)< Model > &data, [ProfileBoundsDebugData](#) &bounds_est)
- [IdxVecT get_exit_counts](#) () const

Protected Member Functions

- void [record_exit_code](#) (ExitCode code) override
- virtual void [compute_estimate_debug](#) (const [ModelDataT](#)< Model > &data, const [ParamT](#)< Model > &theta_init, [MLEDebugData](#) &mle_data, [StencilT](#)< Model > &mle_stencil)
- virtual double [compute_profile_estimate](#) (const [ModelDataT](#)< Model > &data, const [ParamT](#)< Model > &theta_init, const [IdxVecT](#) &fixed_idx, [StencilT](#)< Model > &max_stencil)
- virtual void [compute_profile_bound](#) (const [ModelDataT](#)< Model > &data, [ProfileBoundsData](#) &est, const [VecT](#) &init_step, [IdxT](#) param_idx, [IdxT](#) which_bound)
- virtual void [compute_profile_bound_debug](#) (const [ModelDataT](#)< Model > &data, [ProfileBoundsDebugData](#) &est)
- void [record_walltime](#) (ClockT::time_point start_walltime, int num_estimations)

Protected Attributes

- int [max_threads](#)
- int [num_threads](#)
- std::mutex [mtx](#)
- const Model & [model](#)
- int [num_estimations](#) = 0
- double [total_walltime](#) = 0.
- [IdxVecT](#) [exit_counts](#)

9.3.1 Detailed Description

```
template<class Model>
class mappel::estimator::CGaussHeuristicEstimator< Model >
```

Definition at line 346 of file estimator.h.

9.3.2 Constructor & Destructor Documentation

```
9.3.2.1 template<class Model > mappel::estimator::CGaussHeuristicEstimator< Model
>::CGaussHeuristicEstimator ( const Model & model ) [inline]
```

Definition at line 349 of file estimator.h.

9.3.3 Member Function Documentation

```
9.3.3.1 template<class Model > void mappel::estimator::ThreadedEstimator< Model >::clear_stats ( ) [virtual],
[inherited]
```

Run statistics.

Reimplemented from [mappel::estimator::Estimator< Model >](#).

Reimplemented in [mappel::estimator::IterativeMaximizer< Model >](#).

Definition at line 570 of file estimator_impl.h.

References [mappel::estimator::Estimator< Model >::clear_stats\(\)](#), [mappel::estimator::ThreadedEstimator< Model >::mtx](#), and [mappel::estimator::ThreadedEstimator< Model >::num_threads](#).

Referenced by [mappel::estimator::IterativeMaximizer< Model >::clear_stats\(\)](#).

9.3.3.2 `template<class Model > void mappel::estimator::Estimator< Model >::compute_estimate_debug (const ModelDataT< Model > & im, const ParamT< Model > & theta_init, MLEDebugData & mle_debug, StencilT< Model > & mle_stencil)` [protected], [virtual], [inherited]

Virtual estimate_debug interface

Estimators that produce a sequence of results (e.g. IterativeEstimators) can override this dummy debug implementation.

Reimplemented in [mappel::estimator::IterativeMaximizer< Model >](#).

Definition at line 285 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model >::compute_estimate()`, `mappel::estimator::Estimator< Model >::model`, `mappel::estimator::MLEData::obsI`, `mappel::estimator::MLEDebugData::obsI`, `mappel::estimator::MLEData::rllh`, `mappel::estimator::MLEDebugData::rllh`, `mappel::estimator::MLEDebugData::sequence`, `mappel::estimator::MLEDebugData::sequence_rllh`, `mappel::estimator::MLEData::theta`, and `mappel::estimator::MLEDebugData::theta`.

Referenced by `mappel::estimator::Estimator< Model >::estimate_max_debug()`.

9.3.3.3 `template<class Model > void mappel::estimator::Estimator< Model >::compute_profile_bound (const ModelDataT< Model > & data, ProfileBoundsData & est, const VecT & init_step, IdxT param_idx, IdxT which_bound)` [protected], [virtual], [inherited]

Reimplemented in [mappel::estimator::IterativeMaximizer< Model >](#).

Definition at line 309 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model >::model`.

Referenced by `mappel::estimator::Estimator< Model >::estimate_profile_bounds()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel()`, and `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack()`.

9.3.3.4 `template<class Model > void mappel::estimator::Estimator< Model >::compute_profile_bound_debug (const ModelDataT< Model > & data, ProfileBoundsDebugData & est)` [protected], [virtual], [inherited]

Reimplemented in [mappel::estimator::IterativeMaximizer< Model >](#).

Definition at line 318 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model >::model`.

Referenced by `mappel::estimator::Estimator< Model >::estimate_profile_bounds_debug()`.

9.3.3.5 `template<class Model > double mappel::estimator::Estimator< Model >::compute_profile_estimate (const ModelDataT< Model > & data, const ParamT< Model > & theta_init, const IdxVecT & fixed_idxs, StencilT< Model > & max_stencil)` [protected], [virtual], [inherited]

Reimplemented in [mappel::estimator::IterativeMaximizer< Model >](#).

Definition at line 300 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model >::model`.

Referenced by `mappel::estimator::Estimator< Model >::estimate_profile_max()`, and `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_max()`.

9.3.3.6 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max (const ModelDataT< Model > & data, const ParamT< Model > & theta_init, MLEData & mle_data, StencilT< Model > & mle_stencil) [inherited]`

Maximum likelihood point estimators Estimate for a single data starting at theta_init, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with theta_init, theta_init is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of theta_init will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 128 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model >::compute_estimate()`, `mappel::estimator::Error`, `mappel::estimator::MLEData::obsI`, `mappel::print_text_image()`, `mappel::estimator::Estimator< Model >::record_exit_code()`, `mappel::estimator::Estimator< Model >::record_walltime()`, `mappel::estimator::MLEData::rllh`, and `mappel::estimator::MLEData::theta`.

Referenced by `mappel::estimator::Estimator< Model >::estimate_max()`.

9.3.3.7 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max (const ModelDataT< Model > & data, const ParamT< Model > & theta_init, MLEData & mle_data) [inherited]`

Maximum likelihood point estimators Estimate for a single data starting at theta_init, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with theta_init, theta_init is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of theta_init will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 121 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model >::estimate_max()`.

9.3.3.8 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max (const ModelDataT< Model > & data, MLEData & mle_data) [inherited]`

Maximum likelihood point estimators Estimate for a single data starting at `theta_init`, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with `theta_init`, `theta_init` is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of `theta_init` will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 112 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::estimate_max()`, and `mappel::estimator::Estimator< Model >::model`.

9.3.3.9 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max_debug (const ModelDataT< Model > & data, const ParamT< Model > & theta_init, MLEDebugData & mle_data, StencilT< Model > & mle_stencil) [inherited]`

Debug estimation for a single data starting at `theta_init`, fill in the [MLEDebugData](#) struct with data including the sequence of evaluated points. Estimation is initialized with `theta_init`, `theta_init` is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of `theta_init` will not be modified in the initialization process.

The sequence and `sequence_rllh` parameters of the [MLEDebugData](#) struct record the entire sequence of evaluated points including `theta_init` and `theta_mle`, which should be first and last respectively.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	Initial theta value.
out	<i>mle_data</i>	MLEDebugData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

9.3.3.10 `template<class Model> void mappel::estimator::Estimator< Model>::estimate_max_debug (const ModelDataT< Model> & data, const ParamT< Model> & theta_init, MLEDebugData & mle_data)`
`[inherited]`

Maximum likelihood point estimators Estimate for a single data starting at `theta_init`, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with `theta_init`, `theta_init` is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of `theta_init` will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 157 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model>::compute_estimate_debug()`, `mappel::estimator::Error`, `mappel::estimator::MLEDebugData::obsI`, `mappel::print_text_image()`, `mappel::estimator::Estimator< Model>::record_exit_code()`, `mappel::estimator::Estimator< Model>::record_walltime()`, `mappel::estimator::MLEDebugData::rllh`, and `mappel::estimator::MLEDebugData::theta`.

9.3.3.11 `template<class Model> void mappel::estimator::Estimator< Model>::estimate_max_stack (const ModelDataStackT< Model> & data_stack, MLEDataStack & mle_data_stack)` `[inherited]`

Maximum likelihood point estimators Estimate for a single data starting at `theta_init`, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with `theta_init`, `theta_init` is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of `theta_init` will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 183 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model>::estimate_max_stack()`, and `mappel::estimator::Estimator< Model>::model`.

9.3.3.12 `template<class Model> void mappel::estimator::ThreadedEstimator< Model >::estimate_max_stack (const ModelDataStackT< Model > & data_stack, const ParamVecT< Model > & theta_init_stack, MLEDataStack & mle_data_stack) [override], [virtual], [inherited]`

Estimate for a stack of data and fill in the [MLEDataStack](#) struct with the estimated parameter, RLLH, and observed information for each data in parallel. Estimation is initialized with `theta_init`, `theta_init` is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of `theta_init` will not be modified in the initialization process.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[optional] Initial theta value for each image.
out	<i>mle</i>	MLEStackData records the maximum likelihood estimate, RLLH, and Observed information for each data

Implements [mappel::estimator::Estimator< Model >](#).

Definition at line 377 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::compute_estimate()`, `mappel::estimator::Error`, `mappel::estimator::Estimator< Model >::model`, `mappel::estimator::MLEDataStack::Ndata`, `mappel::estimator::ThreadedEstimator< Model >::num_threads`, `mappel::estimator::MLEData::obsI`, `mappel::estimator::MLEDataStack::obsI`, `mappel::print_text_image()`, `mappel::estimator::ThreadedEstimator< Model >::record_exit_code()`, `mappel::estimator::Estimator< Model >::record_walltime()`, `mappel::estimator::MLEData::rllh`, `mappel::estimator::MLEDataStack::rllh`, `mappel::estimator::MLEData::theta`, and `mappel::estimator::MLEDataStack::theta`.

9.3.3.13 `template<class Model> void mappel::estimator::Estimator< Model >::estimate_profile_bounds (const ModelDataT< Model > & data, ProfileBoundsData & bounds_est) [inherited]`

Profile likelihood bounds computations with VM algorithm

Definition at line 220 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::compute_profile_bound()`, `mappel::estimator::Error`, `mappel::estimator::ProfileBoundsData::estimated_idx`, `mappel::estimator::ProfileBoundsData::initialize_arrays()`, `mappel::estimator::ProfileBoundsData::mle`, `mappel::estimator::Estimator< Model >::model`, `mappel::estimator::ProfileBoundsData::Nparams_est`, `mappel::estimator::MLEData::obsI`, `mappel::print_text_image()`, `mappel::estimator::ProfileBoundsData::profile_lb`, `mappel::estimator::ProfileBoundsData::profile_points_lb`, `mappel::estimator::ProfileBoundsData::profile_points_lb_rllh`, `mappel::estimator::ProfileBoundsData::profile_points_ub`, `mappel::estimator::ProfileBoundsData::profile_ub`, `mappel::estimator::Estimator< Model >::record_exit_code()`, `mappel::estimator::Estimator< Model >::record_walltime()`, `mappel::estimator::subroutine::solve_profile_initial_step()`, `mappel::estimator::ProfileBoundsData::target_rllh_delta`, and `mappel::estimator::MLEData::theta`.

Referenced by `mappel::methods::error_bounds_profile_likelihood()`.

9.3.3.14 `template<class Model> void mappel::estimator::Estimator< Model>::estimate_profile_bounds_debug (const ModelDataT< Model> & data, ProfileBoundsDebugData & bounds_est) [inherited]`

Profile likelihood bounds computations with VM algorithm

Definition at line 258 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model>::compute_profile_bound_debug()`, `mappel::estimator::Error`, `mappel::estimator::ProfileBoundsDebugData::estimated_idx`, `mappel::estimator::ProfileBoundsDebugData::mle`, `mappel::print_text_image()`, `mappel::estimator::Estimator< Model>::record_exit_code()`, `mappel::estimator::Estimator< Model>::record_walltime()`, `mappel::estimator::ProfileBoundsDebugData::target_rllh_delta`, and `mappel::estimator::MLEData::theta`.

Referenced by `mappel::methods::debug::error_bounds_profile_likelihood_debug()`.

9.3.3.15 `template<class Model> void mappel::estimator::ThreadedEstimator< Model>::estimate_profile_bounds_parallel (const ModelDataT< Model> & data, ProfileBoundsData & bounds_est) [override], [virtual], [inherited]`

Profile likelihood bounds computations with VM algorithm

Implements [mappel::estimator::Estimator< Model>](#).

Definition at line 464 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model>::compute_profile_bound()`, `mappel::estimator::Error`, `mappel::estimator::ProfileBoundsData::estimated_idx`s, `mappel::estimator::ProfileBoundsData::initialize_arrays()`, `mappel::estimator::ProfileBoundsData::mle`, `mappel::estimator::Estimator< Model>::model`, `mappel::estimator::ProfileBoundsData::Nparams_est`, `mappel::estimator::ThreadedEstimator< Model>::num_threads`, `mappel::estimator::MLEData::obs`, `mappel::print_text_image()`, `mappel::estimator::ThreadedEstimator< Model>::record_exit_code()`, `mappel::estimator::Estimator< Model>::record_walltime()`, `mappel::estimator::subroutine::solve_profile_initial_step()`, `mappel::estimator::ProfileBoundsData::target_rllh_delta`, and `mappel::estimator::MLEData::theta`.

Referenced by `mappel::methods::openmp::error_bounds_profile_likelihood_parallel()`.

9.3.3.16 `template<class Model> void mappel::estimator::ThreadedEstimator< Model>::estimate_profile_bounds_stack (const ModelDataStackT< Model> & data_stack, ProfileBoundsDataStack & bounds_est) [override], [virtual], [inherited]`

Profile likelihood bounds computations with VM algorithm

Implements [mappel::estimator::Estimator< Model>](#).

Definition at line 500 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model>::compute_profile_bound()`, `mappel::estimator::Error`, `mappel::estimator::ProfileBoundsData::estimated_idx`s, `mappel::estimator::ProfileBoundsDataStack::estimated_idx`s, `mappel::estimator::ProfileBoundsData::initialize_arrays()`, and `mappel::estimator::ProfileBoundsDataStack::initialize_arrays()`.

mappel::estimator::ProfileBoundsData::mle, mappel::estimator::ProfileBoundsDataStack::mle, mappel::estimator::Estimator< Model >::model, mappel::estimator::ProfileBoundsDataStack::Ndata, mappel::estimator::ProfileBoundsDataStack::Nparams_est, mappel::estimator::ThreadedEstimator< Model >::num_threads, mappel::estimator::MLEData::obsI, mappel::estimator::MLEDataStack::obsI, mappel::print_text_image(), mappel::estimator::ProfileBoundsData::profile_lb, mappel::estimator::ProfileBoundsDataStack::profile_lb, mappel::estimator::ProfileBoundsData::profile_points_lb, mappel::estimator::ProfileBoundsDataStack::profile_points_lb, mappel::estimator::ProfileBoundsData::profile_points_lb_rllh, mappel::estimator::ProfileBoundsDataStack::profile_points_lb_rllh, mappel::estimator::ProfileBoundsData::profile_points_ub, mappel::estimator::ProfileBoundsDataStack::profile_points_ub, mappel::estimator::ProfileBoundsData::profile_points_ub_rllh, mappel::estimator::ProfileBoundsDataStack::profile_points_ub_rllh, mappel::estimator::ProfileBoundsData::profile_ub, mappel::estimator::ProfileBoundsDataStack::profile_ub, mappel::estimator::ThreadedEstimator< Model >::record_exit_code(), mappel::estimator::Estimator< Model >::record_walltime(), mappel::estimator::MLEData::rllh, mappel::estimator::MLEDataStack::rllh, mappel::estimator::subroutine::solve_profile_initial_step(), mappel::estimator::ProfileBoundsData::target_rllh_delta, mappel::estimator::ProfileBoundsDataStack::target_rllh_delta, mappel::estimator::MLEData::theta, and mappel::estimator::MLEDataStack::theta.

Referenced by mappel::methods::openmp::error_bounds_profile_likelihood_stack().

9.3.3.17 `template<class Model> double mappel::estimator::Estimator< Model >::estimate_profile_max (const ModelDataT< Model > & data, const IdxVecT & fixed_idx, const ParamT< Model > & fixed_theta_init, StencilT< Model > & theta_max) [inherited]`

Profile likelihood estimation methods

Definition at line 190 of file estimator_impl.h.

References mappel::estimator::Estimator< Model >::compute_profile_estimate(), mappel::estimator::Error, mappel::print_text_image(), mappel::estimator::Estimator< Model >::record_exit_code(), mappel::estimator::Estimator< Model >::record_walltime(), and mappel::methods::objective::rllh().

9.3.3.18 `template<class Model> void mappel::estimator::ThreadedEstimator< Model >::estimate_profile_max (const ModelDataT< Model > & data, const ParamVecT< Model > & fixed_theta_init, ProfileLikelihoodData & profile) [override], [virtual], [inherited]`

Profile likelihood estimation methods

Implements [mappel::estimator::Estimator< Model >](#).

Definition at line 418 of file estimator_impl.h.

References mappel::estimator::Estimator< Model >::compute_profile_estimate(), mappel::estimator::Error, mappel::estimator::ProfileLikelihoodData::fixed_idx, mappel::estimator::ProfileLikelihoodData::fixed_values, mappel::estimator::Estimator< Model >::model, mappel::estimator::ProfileLikelihoodData::Nfixed, mappel::estimator::ThreadedEstimator< Model >::num_threads, mappel::estimator::ProfileLikelihoodData::Nvalues, mappel::print_text_image(), mappel::estimator::ProfileLikelihoodData::profile_likelihood, mappel::estimator::ProfileLikelihoodData::profile_parameters, mappel::estimator::ThreadedEstimator< Model >::record_exit_code(), and mappel::estimator::Estimator< Model >::record_walltime().

9.3.3.19 `template<class Model> StatsT mappel::estimator::CGaussHeuristicEstimator< Model >::get_debug_stats () [virtual]`

Run statistics.

Reimplemented from [mappel::estimator::ThreadedEstimator< Model >](#).

Definition at line 650 of file estimator_impl.h.

References mappel::estimator::ThreadedEstimator< Model >::get_stats().

9.3.3.20 `template<class Model> IdxVecT mappel::estimator::Estimator< Model>::get_exit_counts () const`
`[inline], [inherited]`

Run statistics.

Definition at line 274 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model>::local_profile_maximize()`.

9.3.3.21 `template<class Model> const Model & mappel::estimator::Estimator< Model>::get_model ()`
`[inherited]`

Definition at line 108 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model>::model`.

9.3.3.22 `template<class Model> StatsT mappel::estimator::CGaussHeuristicEstimator< Model>::get_stats ()`
`[virtual]`

Run statistics.

Reimplemented from `mappel::estimator::ThreadedEstimator< Model>`.

Definition at line 635 of file estimator_impl.h.

References `mappel::estimator::ThreadedEstimator< Model>::get_stats()`, `mappel::estimator::ThreadedEstimator< Model>::mtx`, and `mappel::estimator::Estimator< Model>::num_estimations`.

9.3.3.23 `template<class Model> std::string mappel::estimator::CGaussHeuristicEstimator< Model>::name () const`
`[inline], [virtual]`

Implements `mappel::estimator::Estimator< Model>`.

Definition at line 353 of file estimator.h.

9.3.3.24 `template<class Model> void mappel::estimator::ThreadedEstimator< Model>::record_exit_code (ExitCode`
`code) [override], [protected], [virtual], [inherited]`

Implements `mappel::estimator::Estimator< Model>`.

Definition at line 578 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model>::exit_counts`, `mappel::estimator::Estimator< Model>::model`, `mappel::estimator::ThreadedEstimator< Model>::mtx`, `mappel::methods::observed_information()`, `mappel::estimator::MLEData::obsI`, `mappel::estimator::MLEData::rllh`, `mappel::methods::objective::rllh()`, `mappel::estimator::MLEData::theta`, and `mappel::estimator::MLEData::theta`.

Referenced by `mappel::estimator::IterativeMaximizer< Model>::backtrack()`, `mappel::estimator::IterativeMaximizer< Model>::convergence_test_grad_ratio()`, `mappel::estimator::IterativeMaximizer< Model>::convergence_test_step_size()`, `mappel::estimator::ThreadedEstimator< Model>::estimate_max_stack()`, `mappel::estimator::ThreadedEstimator< Model>::estimate_profile_bounds_parallel()`, `mappel::estimator::ThreadedEstimator< Model>::estimate_profile_bounds_stack()`, `mappel::estimator::ThreadedEstimator< Model>::estimate_profile_max()`, `mappel::estimator::HeuristicEstimator< Model>::get_debug_stats()`, `mappel::estimator::CGaussMLE< Model>::get_debug_stats()`, `mappel::estimator::IterativeMaximizer< Model>::local_profile_maximize()`, and `mappel::estimator::IterativeMaximizer< Model>::profile_bound_backtrack()`.

9.3.3.25 `template<class Model> void mappel::estimator::Estimator< Model >::record_walltime (ClockT::time_point start_walltime, int num_estimations)` [protected], [inherited]

Definition at line 360 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model >::num_estimations`, and `mappel::estimator::Estimator< Model >::total_walltime`.

Referenced by `mappel::estimator::Estimator< Model >::estimate_max()`, `mappel::estimator::Estimator< Model >::estimate_max_debug()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_max_stack()`, `mappel::estimator::Estimator< Model >::estimate_profile_bounds()`, `mappel::estimator::Estimator< Model >::estimate_profile_bounds_debug()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack()`, `mappel::estimator::Estimator< Model >::estimate_profile_max()`, and `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_max()`.

9.3.4 Member Data Documentation

9.3.4.1 `template<class Model> IdxVecT mappel::estimator::Estimator< Model >::exit_counts` [protected], [inherited]

Definition at line 299 of file estimator.h.

Referenced by `mappel::estimator::Estimator< Model >::clear_stats()`, `mappel::estimator::Estimator< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, and `mappel::estimator::ThreadedEstimator< Model >::record_exit_code()`.

9.3.4.2 `template<class Model> int mappel::estimator::ThreadedEstimator< Model >::max_threads` [protected], [inherited]

Definition at line 324 of file estimator.h.

9.3.4.3 `template<class Model> const Model& mappel::estimator::Estimator< Model >::model` [protected], [inherited]

Definition at line 294 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::backtrack()`, `mappel::estimator::IterativeMaximizer< Model >::compute_estimate()`, `mappel::estimator::Estimator< Model >::compute_estimate_debug()`, `mappel::estimator::IterativeMaximizer< Model >::compute_estimate_debug()`, `mappel::estimator::Estimator< Model >::compute_profile_bound()`, `mappel::estimator::IterativeMaximizer< Model >::compute_profile_bound()`, `mappel::estimator::Estimator< Model >::compute_profile_bound_debug()`, `mappel::estimator::IterativeMaximizer< Model >::compute_profile_bound_debug()`, `mappel::estimator::Estimator< Model >::compute_profile_estimate()`, `mappel::estimator::IterativeMaximizer< Model >::compute_profile_estimate()`, `mappel::estimator::Estimator< Model >::estimate_max()`, `mappel::estimator::Estimator< Model >::estimate_max_stack()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_max_stack()`, `mappel::estimator::Estimator< Model >::estimate_profile_bounds()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_max()`, `mappel::estimator::HeuristicEstimator< Model >::get_debug_stats()`, `mappel::estimator::CGaussMLE< Model >::get_debug_stats()`, `mappel::estimator::Estimator< Model >::get_model()`, `mappel::estimator::IterativeMaximizer< Model >::local_maximize()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, `mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack()`, and `mappel::estimator::ThreadedEstimator< Model >::record_exit_code()`.

9.3.4.4 `template<class Model > std::mutex mappel::estimator::ThreadedEstimator< Model >::mtx` [protected],
[inherited]

Definition at line 326 of file estimator.h.

Referenced by `mappel::estimator::ThreadedEstimator< Model >::clear_stats()`, `mappel::estimator::IterativeMaximizer< Model >::clear_stats()`, `mappel::estimator::ThreadedEstimator< Model >::get_stats()`, `mappel::estimator::HeuristicEstimator< Model >::get_stats()`, `mappel::estimator::CGaussHeuristicEstimator< Model >::get_stats()`, `mappel::estimator::CGaussMLE< Model >::get_stats()`, `mappel::estimator::SimulatedAnnealingMaximizer< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, `mappel::estimator::ThreadedEstimator< Model >::record_exit_code()`, and `mappel::estimator::IterativeMaximizer< Model >::record_run_statistics()`.

9.3.4.5 `template<class Model > int mappel::estimator::Estimator< Model >::num_estimations = 0` [protected],
[inherited]

Definition at line 297 of file estimator.h.

Referenced by `mappel::estimator::Estimator< Model >::clear_stats()`, `mappel::estimator::Estimator< Model >::get_stats()`, `mappel::estimator::ThreadedEstimator< Model >::get_stats()`, `mappel::estimator::HeuristicEstimator< Model >::get_stats()`, `mappel::estimator::CGaussHeuristicEstimator< Model >::get_stats()`, `mappel::estimator::CGaussMLE< Model >::get_stats()`, `mappel::estimator::SimulatedAnnealingMaximizer< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, and `mappel::estimator::Estimator< Model >::record_walltime()`.

9.3.4.6 `template<class Model > int mappel::estimator::ThreadedEstimator< Model >::num_threads` [protected],
[inherited]

Definition at line 325 of file estimator.h.

Referenced by `mappel::estimator::ThreadedEstimator< Model >::clear_stats()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_max_stack()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_max()`, and `mappel::estimator::ThreadedEstimator< Model >::get_stats()`.

9.3.4.7 `template<class Model > double mappel::estimator::Estimator< Model >::total_walltime = 0.` [protected],
[inherited]

Definition at line 298 of file estimator.h.

Referenced by `mappel::estimator::Estimator< Model >::clear_stats()`, `mappel::estimator::Estimator< Model >::get_stats()`, `mappel::estimator::ThreadedEstimator< Model >::get_stats()`, and `mappel::estimator::Estimator< Model >::record_walltime()`.


The documentation for this class was generated from the following files:

- [estimator.h](#)
- [estimator_impl.h](#)

9.4 mappel::estimator::CGaussMLE< Model > Class Template Reference

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/estimator.h>
```

Inheritance diagram for mappel::estimator::CGaussMLE< Model >:

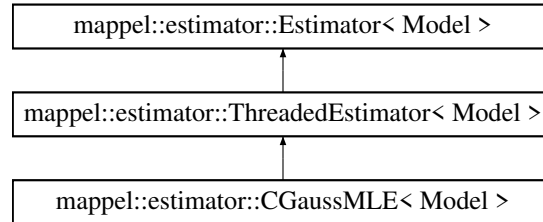

Public Member Functions

- [CGaussMLE](#) (const Model &model, int num_iterations=[DefaultIterations](#))
- [StatsT get_stats](#) ()
- [StatsT get_debug_stats](#) ()
- [std::string name](#) () const
- void [estimate_max_stack](#) (const [ModelDataStackT](#)< Model > &data, const [ParamVecT](#)< Model > &theta_init, [_stack](#), [MLEDataStack](#) &mle_data_stack) override
- void [estimate_profile_max](#) (const [ModelDataT](#)< Model > &data, const [ParamVecT](#)< Model > &theta_init, [ProfileLikelihoodData](#) &profile) override
- void [estimate_profile_bounds_parallel](#) (const [ModelDataT](#)< Model > &data, [ProfileBoundsData](#) &bounds_est) override
- void [estimate_profile_bounds_stack](#) (const [ModelDataStackT](#)< Model > &data, [ProfileBoundsDataStack](#) &bounds_est_stack) override
- void [clear_stats](#) ()
- const Model & [get_model](#) ()

- void [estimate_max_stack](#) (const [ModelDataStackT](#)< Model > &data_stack, [MLEDataStack](#) &mle_data_stack)
- void [estimate_max](#) (const [ModelDataT](#)< Model > &data, const [ParamT](#)< Model > &theta_init, [MLEData](#) &mle_data, [StencilT](#)< Model > &mle_stencil)
- void [estimate_max](#) (const [ModelDataT](#)< Model > &data, const [ParamT](#)< Model > &theta_init, [MLEData](#) &mle_data)
- void [estimate_max](#) (const [ModelDataT](#)< Model > &data, [MLEData](#) &mle_data)
- void [estimate_max_debug](#) (const [ModelDataT](#)< Model > &data, const [ParamT](#)< Model > &theta_init, [MLEData](#) &mle_data, [StencilT](#)< Model > &mle_stencil)
- void [estimate_max_debug](#) (const [ModelDataT](#)< Model > &data, const [ParamT](#)< Model > &theta_init, [MLEData](#) &mle_data)

- double [estimate_profile_max](#) (const [ModelDataT](#)< Model > &data, const [IdxVecT](#) &fixed_idxs, const [ParamT](#)< Model > &fixed_theta_init, [StencilT](#)< Model > &theta_max)

- void [estimate_profile_bounds](#) (const [ModelDataT](#)< Model > &data, [ProfileBoundsData](#) &bounds_est)
- void [estimate_profile_bounds_debug](#) (const [ModelDataT](#)< Model > &data, [ProfileBoundsDebugData](#) &bounds_est)

- [IdxVecT get_exit_counts](#) () const

Static Public Attributes

- static const int [DefaultIterations](#) =50

Protected Member Functions

- void [record_exit_code](#) (ExitCode code) override
- virtual double [compute_profile_estimate](#) (const [ModelDataT](#)< Model > &data, const [ParamT](#)< Model > &theta, ←
_init, const [IdxVecT](#) &fixed_idx, [StencilT](#)< Model > &max_stencil)
- virtual void [compute_profile_bound](#) (const [ModelDataT](#)< Model > &data, [ProfileBoundsData](#) &est, const [VecT](#)
&init_step, [IdxT](#) param_idx, [IdxT](#) which_bound)
- virtual void [compute_profile_bound_debug](#) (const [ModelDataT](#)< Model > &data, [ProfileBoundsDebugData](#) &est)
- void [record_walltime](#) (ClockT::time_point start_walltime, int [num_estimations](#))

Protected Attributes

- int [max_threads](#)
- int [num_threads](#)
- std::mutex [mtx](#)
- const Model & [model](#)
- int [num_estimations](#) = 0
- double [total_walltime](#) = 0.
- [IdxVecT](#) [exit_counts](#)

9.4.1 Detailed Description

```
template<class Model>
class mappel::estimator::CGaussMLE< Model >
```

Definition at line 361 of file estimator.h.

9.4.2 Constructor & Destructor Documentation

9.4.2.1 `template<class Model > mappel::estimator::CGaussMLE< Model >::CGaussMLE (const Model & model, int num_iterations = DefaultIterations) [inline]`

Definition at line 366 of file estimator.h.

9.4.3 Member Function Documentation

9.4.3.1 `template<class Model> void mappel::estimator::ThreadedEstimator< Model >::clear_stats () [virtual], [inherited]`

Run statistics.

Reimplemented from [mappel::estimator::Estimator< Model >](#).

Reimplemented in [mappel::estimator::IterativeMaximizer< Model >](#).

Definition at line 570 of file `estimator_impl.h`.

References [mappel::estimator::Estimator< Model >::clear_stats\(\)](#), [mappel::estimator::ThreadedEstimator< Model >::mtx](#), and [mappel::estimator::ThreadedEstimator< Model >::num_threads](#).

Referenced by [mappel::estimator::IterativeMaximizer< Model >::clear_stats\(\)](#).

9.4.3.2 `template<class Model> void mappel::estimator::Estimator< Model >::compute_profile_bound (const ModelDataT< Model > & data, ProfileBoundsData & est, const VecT & init_step, IdxT param_idx, IdxT which_bound) [protected], [virtual], [inherited]`

Reimplemented in [mappel::estimator::IterativeMaximizer< Model >](#).

Definition at line 309 of file `estimator_impl.h`.

References [mappel::estimator::Estimator< Model >::model](#).

Referenced by [mappel::estimator::Estimator< Model >::estimate_profile_bounds\(\)](#), [mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel\(\)](#), and [mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack\(\)](#).

9.4.3.3 `template<class Model> void mappel::estimator::Estimator< Model >::compute_profile_bound_debug (const ModelDataT< Model > & data, ProfileBoundsDebugData & est) [protected], [virtual], [inherited]`

Reimplemented in [mappel::estimator::IterativeMaximizer< Model >](#).

Definition at line 318 of file `estimator_impl.h`.

References [mappel::estimator::Estimator< Model >::model](#).

Referenced by [mappel::estimator::Estimator< Model >::estimate_profile_bounds_debug\(\)](#).

9.4.3.4 `template<class Model> double mappel::estimator::Estimator< Model >::compute_profile_estimate (const ModelDataT< Model > & data, const ParamT< Model > & theta_init, const IdxVecT & fixed_idxs, StencilT< Model > & max_stencil) [protected], [virtual], [inherited]`

Reimplemented in [mappel::estimator::IterativeMaximizer< Model >](#).

Definition at line 300 of file `estimator_impl.h`.

References [mappel::estimator::Estimator< Model >::model](#).

Referenced by [mappel::estimator::Estimator< Model >::estimate_profile_max\(\)](#), and [mappel::estimator::ThreadedEstimator< Model >::estimate_profile_max\(\)](#).

9.4.3.5 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max (const ModelDataT< Model > & data, const ParamT< Model > & theta_init, MLEData & mle_data, StencilT< Model > & mle_stencil) [inherited]`

Maximum likelihood point estimators Estimate for a single data starting at theta_init, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with theta_init, theta_init is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of theta_init will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 128 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model >::compute_estimate()`, `mappel::estimator::Error`, `mappel::estimator::MLEData::obsI`, `mappel::print_text_image()`, `mappel::estimator::Estimator< Model >::record_exit_code()`, `mappel::estimator::Estimator< Model >::record_walltime()`, `mappel::estimator::MLEData::rllh`, and `mappel::estimator::MLEData::theta`.

Referenced by `mappel::estimator::Estimator< Model >::estimate_max()`.

9.4.3.6 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max (const ModelDataT< Model > & data, const ParamT< Model > & theta_init, MLEData & mle_data) [inherited]`

Maximum likelihood point estimators Estimate for a single data starting at theta_init, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with theta_init, theta_init is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of theta_init will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 121 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model >::estimate_max()`.

9.4.3.7 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max (const ModelDataT< Model > & data, MLEData & mle_data) [inherited]`

Maximum likelihood point estimators Estimate for a single data starting at `theta_init`, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with `theta_init`, `theta_init` is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of `theta_init` will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 112 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::estimate_max()`, and `mappel::estimator::Estimator< Model >::model`.

9.4.3.8 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max_debug (const ModelDataT< Model > & data, const ParamT< Model > & theta_init, MLEDebugData & mle_data, StencilT< Model > & mle_stencil) [inherited]`

Debug estimation for a single data starting at `theta_init`, fill in the [MLEDebugData](#) struct with data including the sequence of evaluated points. Estimation is initialized with `theta_init`, `theta_init` is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of `theta_init` will not be modified in the initialization process.

The sequence and `sequence_rllh` parameters of the [MLEDebugData](#) struct record the entire sequence of evaluated points including `theta_init` and `theta_mle`, which should be first and last respectively.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	Initial theta value.
out	<i>mle_data</i>	MLEDebugData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

9.4.3.9 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max_debug (const ModelDataT< Model > & data, const ParamT< Model > & theta_init, MLEDebugData & mle_data)`
`[inherited]`

Maximum likelihood point estimators Estimate for a single data starting at theta_init, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with theta_init, theta_init is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of theta_init will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 157 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model >::compute_estimate_debug()`, `mappel::estimator::Error`, `mappel::estimator::MLEDebugData::obsI`, `mappel::print_text_image()`, `mappel::estimator::Estimator< Model >::record_exit_code()`, `mappel::estimator::Estimator< Model >::record_walltime()`, `mappel::estimator::MLEDebugData::rllh`, and `mappel::estimator::MLEDebugData::theta`.

9.4.3.10 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max_stack (const ModelDataStackT< Model > & data_stack, MLEDataStack & mle_data_stack)` `[inherited]`

Maximum likelihood point estimators Estimate for a single data starting at theta_init, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with theta_init, theta_init is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of theta_init will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 183 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model >::estimate_max_stack()`, and `mappel::estimator::Estimator< Model >::model`.

9.4.3.11 `template<class Model> void mappel::estimator::ThreadedEstimator< Model >::estimate_max_stack (const ModelDataStackT< Model > & data_stack, const ParamVecT< Model > & theta_init_stack, MLEDataStack & mle_data_stack) [override], [virtual], [inherited]`

Estimate for a stack of data and fill in the [MLEDataStack](#) struct with the estimated parameter, RLLH, and observed information for each data in parallel. Estimation is initialized with `theta_init`, `theta_init` is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of `theta_init` will not be modified in the initialization process.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[optional] Initial theta value for each image.
out	<i>mle</i>	MLEStackData records the maximum likelihood estimate, RLLH, and Observed information for each data

Implements [mappel::estimator::Estimator< Model >](#).

Definition at line 377 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::compute_estimate()`, `mappel::estimator::Error`, `mappel::estimator::Estimator< Model >::model`, `mappel::estimator::MLEDataStack::Ndata`, `mappel::estimator::ThreadedEstimator< Model >::num_threads`, `mappel::estimator::MLEData::obsI`, `mappel::estimator::MLEDataStack::obsI`, `mappel::print_text_image()`, `mappel::estimator::ThreadedEstimator< Model >::record_exit_code()`, `mappel::estimator::Estimator< Model >::record_walltime()`, `mappel::estimator::MLEData::rllh`, `mappel::estimator::MLEDataStack::rllh`, `mappel::estimator::MLEData::theta`, and `mappel::estimator::MLEDataStack::theta`.

9.4.3.12 `template<class Model> void mappel::estimator::Estimator< Model >::estimate_profile_bounds (const ModelDataT< Model > & data, ProfileBoundsData & bounds_est) [inherited]`

Profile likelihood bounds computations with VM algorithm

Definition at line 220 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::compute_profile_bound()`, `mappel::estimator::Error`, `mappel::estimator::ProfileBoundsData::estimated_idx`s, `mappel::estimator::ProfileBoundsData::initialize_arrays()`, `mappel::estimator::ProfileBoundsData::mle`, `mappel::estimator::Estimator< Model >::model`, `mappel::estimator::ProfileBoundsData::Nparams_est`, `mappel::estimator::MLEData::obsI`, `mappel::print_text_image()`, `mappel::estimator::ProfileBoundsData::profile_lb`, `mappel::estimator::ProfileBoundsData::profile_points_lb`, `mappel::estimator::ProfileBoundsData::profile_points_lb_rllh`, `mappel::estimator::ProfileBoundsData::profile_points_ub`, `mappel::estimator::ProfileBoundsData::profile_ub`, `mappel::estimator::Estimator< Model >::record_exit_code()`, `mappel::estimator::Estimator< Model >::record_walltime()`, `mappel::estimator::subroutine::solve_profile_initial_step()`, `mappel::estimator::ProfileBoundsData::target_rllh_delta`, and `mappel::estimator::MLEData::theta`.

Referenced by `mappel::methods::error_bounds_profile_likelihood()`.

9.4.3.13 `template<class Model> void mappel::estimator::Estimator< Model>::estimate_profile_bounds_debug (const ModelDataT< Model> & data, ProfileBoundsDebugData & bounds_est) [inherited]`

Profile likelihood bounds computations with VM algorithm

Definition at line 258 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model>::compute_profile_bound_debug()`, `mappel::estimator::Error`, `mappel::estimator::ProfileBoundsDebugData::estimated_idx`, `mappel::estimator::ProfileBoundsDebugData::mle`, `mappel::print_text_image()`, `mappel::estimator::Estimator< Model>::record_exit_code()`, `mappel::estimator::Estimator< Model>::record_walltime()`, `mappel::estimator::ProfileBoundsDebugData::target_rllh_delta`, and `mappel::estimator::MLEData::theta`.

Referenced by `mappel::methods::debug::error_bounds_profile_likelihood_debug()`.

9.4.3.14 `template<class Model> void mappel::estimator::ThreadedEstimator< Model>::estimate_profile_bounds_parallel (const ModelDataT< Model> & data, ProfileBoundsData & bounds_est) [override], [virtual], [inherited]`

Profile likelihood bounds computations with VM algorithm

Implements [mappel::estimator::Estimator< Model>](#).

Definition at line 464 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model>::compute_profile_bound()`, `mappel::estimator::Error`, `mappel::estimator::ProfileBoundsData::estimated_idx`, `mappel::estimator::ProfileBoundsData::initialize_arrays()`, `mappel::estimator::ProfileBoundsData::mle`, `mappel::estimator::Estimator< Model>::model`, `mappel::estimator::ProfileBoundsData::Nparams_est`, `mappel::estimator::ThreadedEstimator< Model>::num_threads`, `mappel::estimator::MLEData::obs`, `mappel::print_text_image()`, `mappel::estimator::ThreadedEstimator< Model>::record_exit_code()`, `mappel::estimator::Estimator< Model>::record_walltime()`, `mappel::estimator::subroutine::solve_profile_initial_step()`, `mappel::estimator::ProfileBoundsData::target_rllh_delta`, and `mappel::estimator::MLEData::theta`.

Referenced by `mappel::methods::openmp::error_bounds_profile_likelihood_parallel()`.

9.4.3.15 `template<class Model> void mappel::estimator::ThreadedEstimator< Model>::estimate_profile_bounds_stack (const ModelDataStackT< Model> & data_stack, ProfileBoundsDataStack & bounds_est) [override], [virtual], [inherited]`

Profile likelihood bounds computations with VM algorithm

Implements [mappel::estimator::Estimator< Model>](#).

Definition at line 500 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model>::compute_profile_bound()`, `mappel::estimator::Error`, `mappel::estimator::ProfileBoundsData::estimated_idx`, `mappel::estimator::ProfileBoundsDataStack::estimated_idx`, `mappel::estimator::ProfileBoundsData::initialize_arrays()`, and `mappel::estimator::ProfileBoundsDataStack::initialize_arrays()`.

mappel::estimator::ProfileBoundsData::mle, mappel::estimator::ProfileBoundsDataStack::mle, mappel::estimator::Estimator< Model >::model, mappel::estimator::ProfileBoundsDataStack::Ndata, mappel::estimator::ProfileBoundsDataStack::Nparams_est, mappel::estimator::ThreadedEstimator< Model >::num_threads, mappel::estimator::MLEData::obsI, mappel::estimator::MLEDataStack::obsI, mappel::print_text_image(), mappel::estimator::ProfileBoundsData::profile_lb, mappel::estimator::ProfileBoundsDataStack::profile_lb, mappel::estimator::ProfileBoundsData::profile_points_lb, mappel::estimator::ProfileBoundsDataStack::profile_points_lb, mappel::estimator::ProfileBoundsData::profile_points_lb_rllh, mappel::estimator::ProfileBoundsDataStack::profile_points_lb_rllh, mappel::estimator::ProfileBoundsData::profile_points_ub, mappel::estimator::ProfileBoundsDataStack::profile_points_ub, mappel::estimator::ProfileBoundsData::profile_points_ub_rllh, mappel::estimator::ProfileBoundsDataStack::profile_points_ub_rllh, mappel::estimator::ProfileBoundsData::profile_ub, mappel::estimator::ProfileBoundsDataStack::profile_ub, mappel::estimator::ThreadedEstimator< Model >::record_exit_code(), mappel::estimator::Estimator< Model >::record_walltime(), mappel::estimator::MLEData::rllh, mappel::estimator::MLEDataStack::rllh, mappel::estimator::subroutine::solve_profile_initial_step(), mappel::estimator::ProfileBoundsData::target_rllh_delta, mappel::estimator::ProfileBoundsDataStack::target_rllh_delta, mappel::estimator::MLEData::theta, and mappel::estimator::MLEDataStack::theta.

Referenced by mappel::methods::openmp::error_bounds_profile_likelihood_stack().

9.4.3.16 `template<class Model> double mappel::estimator::Estimator< Model >::estimate_profile_max (const ModelDataT< Model > & data, const IdxVecT & fixed_idx, const ParamT< Model > & fixed_theta_init, StencilT< Model > & theta_max) [inherited]`

Profile likelihood estimation methods

Definition at line 190 of file estimator_impl.h.

References mappel::estimator::Estimator< Model >::compute_profile_estimate(), mappel::estimator::Error, mappel::print_text_image(), mappel::estimator::Estimator< Model >::record_exit_code(), mappel::estimator::Estimator< Model >::record_walltime(), and mappel::methods::objective::rllh().

9.4.3.17 `template<class Model> void mappel::estimator::ThreadedEstimator< Model >::estimate_profile_max (const ModelDataT< Model > & data, const ParamVecT< Model > & fixed_theta_init, ProfileLikelihoodData & profile) [override], [virtual], [inherited]`

Profile likelihood estimation methods

Implements [mappel::estimator::Estimator< Model >](#).

Definition at line 418 of file estimator_impl.h.

References mappel::estimator::Estimator< Model >::compute_profile_estimate(), mappel::estimator::Error, mappel::estimator::ProfileLikelihoodData::fixed_idx, mappel::estimator::ProfileLikelihoodData::fixed_values, mappel::estimator::Estimator< Model >::model, mappel::estimator::ProfileLikelihoodData::Nfixed, mappel::estimator::ThreadedEstimator< Model >::num_threads, mappel::estimator::ProfileLikelihoodData::Nvalues, mappel::print_text_image(), mappel::estimator::ProfileLikelihoodData::profile_likelihood, mappel::estimator::ProfileLikelihoodData::profile_parameters, mappel::estimator::ThreadedEstimator< Model >::record_exit_code(), and mappel::estimator::Estimator< Model >::record_walltime().

9.4.3.18 `template<class Model> StatsT mappel::estimator::CGaussMLE< Model>::get_debug_stats ()`
`[virtual]`

Run statistics.

Reimplemented from [mappel::estimator::ThreadedEstimator< Model>](#).

Definition at line 675 of file `estimator_impl.h`.

References `mappel::cgauss_compute_estimate()`, `mappel::cgauss_compute_estimate_debug()`, `mappel::cgauss_heuristic_compute_estimate()`, `mappel::estimator::Error`, `mappel::estimator::ThreadedEstimator< Model>::get_stats()`, `mappel::estimator::Estimator< Model>::model`, `mappel::methods::observed_information()`, `mappel::estimator::MLEData::obsI`, `mappel::estimator::MLEDebugData::obsI`, `mappel::estimator::ThreadedEstimator< Model>::record_exit_code()`, `mappel::estimator::MLEData::rllh`, `mappel::methods::objective::rllh()`, `mappel::estimator::MLEDebugData::rllh`, `mappel::methods::objective::openmp::rllh_stack()`, `mappel::estimator::MLEDebugData::sequence`, `mappel::estimator::MLEDebugData::sequence_rllh`, `mappel::estimator::Success`, `mappel::estimator::MLEData::theta`, and `mappel::estimator::MLEDebugData::theta`.

9.4.3.19 `template<class Model> IdxVecT mappel::estimator::Estimator< Model>::get_exit_counts () const`
`[inline], [inherited]`

Run statistics.

Definition at line 274 of file `estimator.h`.

Referenced by `mappel::estimator::IterativeMaximizer< Model>::local_profile_maximize()`.

9.4.3.20 `template<class Model> const Model & mappel::estimator::Estimator< Model>::get_model ()`
`[inherited]`

Definition at line 108 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model>::model`.

9.4.3.21 `template<class Model> StatsT mappel::estimator::CGaussMLE< Model>::get_stats ()` `[virtual]`

Run statistics.

Reimplemented from [mappel::estimator::ThreadedEstimator< Model>](#).

Definition at line 660 of file `estimator_impl.h`.

References `mappel::estimator::ThreadedEstimator< Model>::get_stats()`, `mappel::estimator::ThreadedEstimator< Model>::mtx`, and `mappel::estimator::Estimator< Model>::num_estimations`.

9.4.3.22 `template<class Model> std::string mappel::estimator::CGaussMLE< Model>::name () const` `[inline], [virtual]`

Implements [mappel::estimator::Estimator< Model>](#).

Definition at line 371 of file `estimator.h`.

9.4.3.23 `template<class Model> void mappel::estimator::ThreadedEstimator< Model >::record_exit_code (ExitCode code)` `[override]`, `[protected]`, `[virtual]`, `[inherited]`

Implements [mappel::estimator::Estimator< Model >](#).

Definition at line 578 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::exit_counts`, `mappel::estimator::Estimator< Model >::model`, `mappel::estimator::ThreadedEstimator< Model >::mtx`, `mappel::methods::observed_information()`, `mappel::estimator::MLEData::obsI`, `mappel::estimator::MLEData::rllh`, `mappel::methods::objective::rllh()`, `mappel::estimator::Success`, and `mappel::estimator::MLEData::theta`.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::backtrack()`, `mappel::estimator::IterativeMaximizer< Model >::convergence_test_grad_ratio()`, `mappel::estimator::IterativeMaximizer< Model >::convergence_test_step_size()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_max_stack()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_max()`, `mappel::estimator::HeuristicEstimator< Model >::get_debug_stats()`, `mappel::estimator::CGaussMLE< Model >::get_debug_stats()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, and `mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack()`.

9.4.3.24 `template<class Model> void mappel::estimator::Estimator< Model >::record_walltime (ClockT::time_point start_walltime, int num_estimations)` `[protected]`, `[inherited]`

Definition at line 360 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::num_estimations`, and `mappel::estimator::Estimator< Model >::total_walltime`.

Referenced by `mappel::estimator::Estimator< Model >::estimate_max()`, `mappel::estimator::Estimator< Model >::estimate_max_debug()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_max_stack()`, `mappel::estimator::Estimator< Model >::estimate_profile_bounds()`, `mappel::estimator::Estimator< Model >::estimate_profile_bounds_debug()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack()`, `mappel::estimator::Estimator< Model >::estimate_profile_max()`, and `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_max()`.

9.4.4 Member Data Documentation

9.4.4.1 `template<class Model> const int mappel::estimator::CGaussMLE< Model >::DefaultIterations = 50` `[static]`

Definition at line 364 of file `estimator.h`.

9.4.4.2 `template<class Model> IdxVecT mappel::estimator::Estimator< Model >::exit_counts` `[protected]`, `[inherited]`

Definition at line 299 of file `estimator.h`.

Referenced by `mappel::estimator::Estimator< Model >::clear_stats()`, `mappel::estimator::Estimator< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, and `mappel::estimator::ThreadedEstimator< Model >::record_exit_code()`.

9.4.4.3 `template<class Model > int mappel::estimator::ThreadedEstimator< Model >::max_threads` [protected],
[inherited]

Definition at line 324 of file estimator.h.

9.4.4.4 `template<class Model > const Model& mappel::estimator::Estimator< Model >::model` [protected],
[inherited]

Definition at line 294 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::backtrack()`, `mappel::estimator::IterativeMaximizer< Model >::compute_estimate()`, `mappel::estimator::Estimator< Model >::compute_estimate_debug()`, `mappel::estimator::IterativeMaximizer< Model >::compute_estimate_debug()`, `mappel::estimator::Estimator< Model >::compute_profile_bound()`, `mappel::estimator::IterativeMaximizer< Model >::compute_profile_bound()`, `mappel::estimator::Estimator< Model >::compute_profile_bound_debug()`, `mappel::estimator::IterativeMaximizer< Model >::compute_profile_bound_debug()`, `mappel::estimator::Estimator< Model >::compute_profile_estimate()`, `mappel::estimator::IterativeMaximizer< Model >::compute_profile_estimate()`, `mappel::estimator::Estimator< Model >::estimate_max()`, `mappel::estimator::Estimator< Model >::estimate_max_stack()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_max_stack()`, `mappel::estimator::Estimator< Model >::estimate_profile_bounds()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_max()`, `mappel::estimator::HeuristicEstimator< Model >::get_debug_stats()`, `mappel::estimator::CGaussMLE< Model >::get_debug_stats()`, `mappel::estimator::Estimator< Model >::get_model()`, `mappel::estimator::IterativeMaximizer< Model >::local_maximize()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, `mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack()`, and `mappel::estimator::ThreadedEstimator< Model >::record_exit_code()`.

9.4.4.5 `template<class Model > std::mutex mappel::estimator::ThreadedEstimator< Model >::mtx` [protected],
[inherited]

Definition at line 326 of file estimator.h.

Referenced by `mappel::estimator::ThreadedEstimator< Model >::clear_stats()`, `mappel::estimator::IterativeMaximizer< Model >::clear_stats()`, `mappel::estimator::ThreadedEstimator< Model >::get_stats()`, `mappel::estimator::HeuristicEstimator< Model >::get_stats()`, `mappel::estimator::CGaussHeuristicEstimator< Model >::get_stats()`, `mappel::estimator::CGaussMLE< Model >::get_stats()`, `mappel::estimator::SimulatedAnnealingMaximizer< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, `mappel::estimator::ThreadedEstimator< Model >::record_exit_code()`, and `mappel::estimator::IterativeMaximizer< Model >::record_run_statistics()`.

9.4.4.6 `template<class Model > int mappel::estimator::Estimator< Model >::num_estimations = 0` [protected],
[inherited]

Definition at line 297 of file estimator.h.

Referenced by `mappel::estimator::Estimator< Model >::clear_stats()`, `mappel::estimator::Estimator< Model >::get_stats()`, `mappel::estimator::ThreadedEstimator< Model >::get_stats()`, `mappel::estimator::HeuristicEstimator< Model >::get_stats()`, `mappel::estimator::CGaussHeuristicEstimator< Model >::get_stats()`, `mappel::estimator::CGaussMLE< Model >::get_stats()`, `mappel::estimator::SimulatedAnnealingMaximizer< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, and `mappel::estimator::Estimator< Model >::record_walltime()`.

9.4.4.7 `template<class Model > int mappel::estimator::ThreadedEstimator< Model >::num_threads` [protected], [inherited]

Definition at line 325 of file estimator.h.

Referenced by `mappel::estimator::ThreadedEstimator< Model >::clear_stats()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_max_stack()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_max()`, and `mappel::estimator::ThreadedEstimator< Model >::get_stats()`.

9.4.4.8 `template<class Model > double mappel::estimator::Estimator< Model >::total_walltime = 0.` [protected], [inherited]

Definition at line 298 of file estimator.h.

Referenced by `mappel::estimator::Estimator< Model >::clear_stats()`, `mappel::estimator::Estimator< Model >::get_stats()`, `mappel::estimator::ThreadedEstimator< Model >::get_stats()`, and `mappel::estimator::Estimator< Model >::record_walltime()`.


The documentation for this class was generated from the following files:

- [estimator.h](#)
- [estimator_impl.h](#)

9.5 mappel::estimator::Estimator< Model > Class Template Reference

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/estimator.h>
```

Inheritance diagram for `mappel::estimator::Estimator< Model >`:



Public Member Functions

- [Estimator](#) (const Model &_model)
- virtual [~Estimator](#) ()
- virtual std::string [name](#) () const =0
- const Model & [get_model](#) ()
- void [estimate_max](#) (const [ModelDataT](#)< Model > &data, const [ParamT](#)< Model > &theta_init, [MLEData](#) &mle_data, [StencilT](#)< Model > &mle_stencil)
- void [estimate_max](#) (const [ModelDataT](#)< Model > &data, const [ParamT](#)< Model > &theta_init, [MLEData](#) &mle_data)
- void [estimate_max](#) (const [ModelDataT](#)< Model > &data, [MLEData](#) &mle_data)

- void `estimate_max_debug` (const `ModelDataT`< `Model` > &data, const `ParamT`< `Model` > &theta_init, `MLEDebugData` &mle_data, `StencilT`< `Model` > &mle_stencil)
- void `estimate_max_debug` (const `ModelDataT`< `Model` > &data, const `ParamT`< `Model` > &theta_init, `MLEDebugData` &mle_data)
- virtual void `estimate_max_stack` (const `ModelDataStackT`< `Model` > &data_stack, const `ParamVecT`< `Model` > &theta_init_stack, `MLEDataStack` &mle_data_stack)=0
- void `estimate_max_stack` (const `ModelDataStackT`< `Model` > &data_stack, `MLEDataStack` &mle_data_stack)
- double `estimate_profile_max` (const `ModelDataT`< `Model` > &data, const `IdxVecT` &fixed_idx, const `ParamT`< `Model` > &fixed_theta_init, `StencilT`< `Model` > &theta_max)
- virtual void `estimate_profile_max` (const `ModelDataT`< `Model` > &data, const `ParamVecT`< `Model` > &fixed_theta_init, `ProfileLikelihoodData` &profile)=0
- void `estimate_profile_bounds` (const `ModelDataT`< `Model` > &data, `ProfileBoundsData` &bounds_est)
- virtual void `estimate_profile_bounds_parallel` (const `ModelDataT`< `Model` > &data, `ProfileBoundsData` &bounds_est)=0
- void `estimate_profile_bounds_debug` (const `ModelDataT`< `Model` > &data, `ProfileBoundsDebugData` &bounds_est)
- virtual void `estimate_profile_bounds_stack` (const `ModelDataStackT`< `Model` > &data_stack, `ProfileBoundsDataStack` &bounds_est)=0
- virtual `StatsT` `get_stats` ()
- virtual `StatsT` `get_debug_stats` ()=0
- virtual void `clear_stats` ()
- `IdxVecT` `get_exit_counts` () const

Protected Member Functions

- virtual void `compute_estimate` (const `ModelDataT`< `Model` > &data, const `ParamT`< `Model` > &theta_init, `MLEData` &mle_data, `StencilT`< `Model` > &mle_stencil)=0
- virtual void `compute_estimate_debug` (const `ModelDataT`< `Model` > &data, const `ParamT`< `Model` > &theta_init, `MLEDebugData` &mle_data, `StencilT`< `Model` > &mle_stencil)
- virtual double `compute_profile_estimate` (const `ModelDataT`< `Model` > &data, const `ParamT`< `Model` > &theta_init, const `IdxVecT` &fixed_idx, `StencilT`< `Model` > &max_stencil)
- virtual void `compute_profile_bound` (const `ModelDataT`< `Model` > &data, `ProfileBoundsData` &est, const `VecT` &init_step, `IdxT` param_idx, `IdxT` which_bound)
- virtual void `compute_profile_bound_debug` (const `ModelDataT`< `Model` > &data, `ProfileBoundsDebugData` &est)
- void `record_walltime` (ClockT::time_point start_walltime, int num_estimations)
- virtual void `record_exit_code` (ExitCode code)=0

Protected Attributes

- const `Model` & `model`
- int `num_estimations` = 0
- double `total_walltime` = 0.
- `IdxVecT` `exit_counts`

Friends

- `template<class T >`
`std::ostream & operator<< (std::ostream &out, Estimator< T > &estimator)`

9.5.1 Detailed Description

`template<class Model>`
`class mappel::estimator::Estimator< Model >`

[Estimator](#) base class defines the interface for estimator interactions designed to unify the [ThreadedEstimator](#) with future GPUestimator types under a single API.

Design notes: Templated on the model type to allow for direct function call for models through the [mappel::methods](#) namespace templated model methods.

Definition at line 194 of file estimator.h.

9.5.2 Constructor & Destructor Documentation

9.5.2.1 `template<class Model > mappel::estimator::Estimator< Model >::Estimator (const Model &_model)`

Definition at line 102 of file estimator_impl.h.

9.5.2.2 `template<class Model > virtual mappel::estimator::Estimator< Model >::~Estimator () [inline],`
`[virtual]`

Definition at line 197 of file estimator.h.

References [mappel::methods::estimate_max\(\)](#), [mappel::methods::debug::estimate_max_debug\(\)](#), and [mappel::methods::openmp::estimate_max_stack\(\)](#).

9.5.3 Member Function Documentation

9.5.3.1 `template<class Model > void mappel::estimator::Estimator< Model >::clear_stats () [virtual]`

Run statistics.

Reimplemented in [mappel::estimator::IterativeMaximizer< Model >](#), and [mappel::estimator::ThreadedEstimator< Model >](#).

Definition at line 343 of file estimator_impl.h.

References [mappel::estimator::Estimator< Model >::exit_counts](#), [mappel::estimator::Estimator< Model >::num_estimations](#), and [mappel::estimator::Estimator< Model >::total_walltime](#).

Referenced by [mappel::estimator::ThreadedEstimator< Model >::clear_stats\(\)](#).

9.5.3.2 `template<class Model > virtual void mappel::estimator::Estimator< Model >::compute_estimate (const ModelDataT< Model > & data, const ParamT< Model > & theta_init, MLEData & mle_data, StencilT< Model > & mle_stencil) [protected], [pure virtual]`

Implemented in [mappel::estimator::IterativeMaximizer< Model >](#).

Referenced by `mappel::estimator::Estimator< Model >::compute_estimate_debug()`, `mappel::estimator::Estimator< Model >::estimate_max()`, and `mappel::estimator::ThreadedEstimator< Model >::estimate_max_stack()`.

9.5.3.3 `template<class Model > void mappel::estimator::Estimator< Model >::compute_estimate_debug (const ModelDataT< Model > & im, const ParamT< Model > & theta_init, MLEDebugData & mle_debug, StencilT< Model > & mle_stencil) [protected], [virtual]`

Virtual `estimate_debug` interface

Estimators that produce a sequence of results (e.g. `IterativeEstimators`) can override this dummy debug implementation.

Reimplemented in [mappel::estimator::IterativeMaximizer< Model >](#).

Definition at line 285 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::compute_estimate()`, `mappel::estimator::Estimator< Model >::model`, `mappel::estimator::MLEData::obsI`, `mappel::estimator::MLEDebugData::obsI`, `mappel::estimator::MLEData::rllh`, `mappel::estimator::MLEDebugData::rllh`, `mappel::estimator::MLEDebugData::sequence`, `mappel::estimator::MLEDebugData::sequence_rllh`, `mappel::estimator::MLEData::theta`, and `mappel::estimator::MLEDebugData::theta`.

Referenced by `mappel::estimator::Estimator< Model >::estimate_max_debug()`.

9.5.3.4 `template<class Model > void mappel::estimator::Estimator< Model >::compute_profile_bound (const ModelDataT< Model > & data, ProfileBoundsData & est, const VecT & init_step, IdxT param_idx, IdxT which_bound) [protected], [virtual]`

Reimplemented in [mappel::estimator::IterativeMaximizer< Model >](#).

Definition at line 309 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::model`.

Referenced by `mappel::estimator::Estimator< Model >::estimate_profile_bounds()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel()`, and `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack()`.

9.5.3.5 `template<class Model > void mappel::estimator::Estimator< Model >::compute_profile_bound_debug (const ModelDataT< Model > & data, ProfileBoundsDebugData & est) [protected], [virtual]`

Reimplemented in [mappel::estimator::IterativeMaximizer< Model >](#).

Definition at line 318 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::model`.

Referenced by `mappel::estimator::Estimator< Model >::estimate_profile_bounds_debug()`.

9.5.3.6 `template<class Model > double mappel::estimator::Estimator< Model >::compute_profile_estimate (const ModelDataT< Model > & data, const ParamT< Model > & theta_init, const IdxVecT & fixed_idxes, StencilT< Model > & max_stencil) [protected], [virtual]`

Reimplemented in [mappel::estimator::IterativeMaximizer< Model >](#).

Definition at line 300 of file `estimator_impl.h`.

References [mappel::estimator::Estimator< Model >::model](#).

Referenced by [mappel::estimator::Estimator< Model >::estimate_profile_max\(\)](#), and [mappel::estimator::ThreadedEstimator< Model >::estimate_profile_max\(\)](#).

9.5.3.7 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max (const ModelDataT< Model > & data, const ParamT< Model > & theta_init, MLEData & mle_data, StencilT< Model > & mle_stencil)`

Maximum likelihood point estimators Estimate for a single data starting at `theta_init`, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with `theta_init`, `theta_init` is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of `theta_init` will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 128 of file `estimator_impl.h`.

References [mappel::estimator::Estimator< Model >::compute_estimate\(\)](#), [mappel::estimator::Error](#), [mappel::estimator::MLEData::obsI](#), [mappel::print_text_image\(\)](#), [mappel::estimator::Estimator< Model >::record_exit_code\(\)](#), [mappel::estimator::Estimator< Model >::record_walltime\(\)](#), [mappel::estimator::MLEData::rllh](#), and [mappel::estimator::MLEData::theta](#).

Referenced by [mappel::estimator::Estimator< Model >::estimate_max\(\)](#).

9.5.3.8 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max (const ModelDataT< Model > & data, const ParamT< Model > & theta_init, MLEData & mle_data)`

Maximum likelihood point estimators Estimate for a single data starting at `theta_init`, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with `theta_init`, `theta_init` is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of `theta_init` will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 121 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model >::estimate_max()`.

9.5.3.9 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max (const ModelDataT< Model > & data, MLEData & mle_data)`

Maximum likelihood point estimators Estimate for a single data starting at `theta_init`, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with `theta_init`, `theta_init` is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of `theta_init` will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 112 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model >::estimate_max()`, and `mappel::estimator::Estimator< Model >::model`.

9.5.3.10 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max_debug (const ModelDataT< Model > & data, const ParamT< Model > & theta_init, MLEDebugData & mle_data, StencilT< Model > & mle_stencil)`

Debug estimation for a single data starting at `theta_init`, fill in the [MLEDebugData](#) struct with data including the sequence of evaluated points. Estimation is initialized with `theta_init`, `theta_init` is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of `theta_init` will not be modified in the initialization process.

The sequence and `sequence_rllh` parameters of the [MLEDebugData](#) struct record the entire sequence of evaluated points including `theta_init` and `theta_mle`, which should be first and last respectively.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	Initial theta value.
out	<i>mle_data</i>	MLEDebugData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

9.5.3.11 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max_debug (const ModelDataT< Model > & data, const ParamT< Model > & theta_init, MLEDebugData & mle_data)`

Maximum likelihood point estimators Estimate for a single data starting at *theta_init*, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with *theta_init*, *theta_init* is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of *theta_init* will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 157 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::compute_estimate_debug()`, `mappel::estimator::Error`, `mappel::estimator::MLEDebugData::obsI`, `mappel::print_text_image()`, `mappel::estimator::Estimator< Model >::record_exit_code()`, `mappel::estimator::Estimator< Model >::record_walltime()`, `mappel::estimator::MLEDebugData::rllh`, and `mappel::estimator::MLEDebugData::theta`.

9.5.3.12 `template<class Model > virtual void mappel::estimator::Estimator< Model >::estimate_max_stack (const ModelDataStackT< Model > & data_stack, const ParamVecT< Model > & theta_init_stack, MLEDataStack & mle_data_stack) [pure virtual]`

Estimate for a stack of data and fill in the [MLEDataStack](#) struct with the estimated parameter, RLLH, and observed information for each data in parallel. Estimation is initialized with *theta_init*, *theta_init* is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of *theta_init* will not be modified in the initialization process.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[optional] Initial theta value for each image.
out	<i>mle</i>	MLEStackData records the maximum likelihood estimate, RLLH, and Observed information for each data

Implemented in [mappel::estimator::ThreadedEstimator< Model >](#).

Referenced by [mappel::estimator::Estimator< Model >::estimate_max_stack\(\)](#).

9.5.3.13 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max_stack (const ModelDataStackT< Model > & data_stack, MLEDataStack & mle_data_stack)`

Maximum likelihood point estimators Estimate for a single data starting at `theta_init`, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with `theta_init`, `theta_init` is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of `theta_init` will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 183 of file `estimator_impl.h`.

References [mappel::estimator::Estimator< Model >::estimate_max_stack\(\)](#), and [mappel::estimator::Estimator< Model >::model](#).

9.5.3.14 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_profile_bounds (const ModelDataT< Model > & data, ProfileBoundsData & bounds_est)`

Profile likelihood bounds computations with VM algorithm

Definition at line 220 of file `estimator_impl.h`.

References [mappel::estimator::Estimator< Model >::compute_profile_bound\(\)](#), [mappel::estimator::Error](#), [mappel::estimator::ProfileBoundsData::estimated_idx](#)s, [mappel::estimator::ProfileBoundsData::initialize_arrays\(\)](#), [mappel::estimator::ProfileBoundsData::mle](#), [mappel::estimator::Estimator< Model >::model](#), [mappel::estimator::ProfileBoundsData::Nparams_est](#), [mappel::estimator::MLEData::obs](#), [mappel::print_text_image\(\)](#), [mappel::estimator::ProfileBoundsData::profile_lb](#), [mappel::estimator::ProfileBoundsData::profile_points_lb](#), [mappel::estimator::ProfileBoundsData::profile_points_lb_rllh](#), [mappel::estimator::ProfileBoundsData::profile_points_ub](#), [mappel::estimator::ProfileBoundsData::profile_ub](#), [mappel::estimator::Estimator< Model >::record_exit_code\(\)](#), [mappel::estimator::Estimator< Model >::record_walltime\(\)](#), [mappel::estimator::subroutine::solve_profile_initial_step\(\)](#), [mappel::estimator::ProfileBoundsData::target_rllh_delta](#), and [mappel::estimator::MLEData::theta](#).

Referenced by [mappel::methods::error_bounds_profile_likelihood\(\)](#).

9.5.3.15 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_profile_bounds_debug (const ModelDataT< Model > & data, ProfileBoundsDebugData & bounds_est)`

Profile likelihood bounds computations with VM algorithm

Definition at line 258 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model >::compute_profile_bound_debug()`, `mappel::estimator::Error`, `mappel::estimator::ProfileBoundsDebugData::estimated_idx`, `mappel::estimator::ProfileBoundsDebugData::mle`, `mappel::print_text_image()`, `mappel::estimator::Estimator< Model >::record_exit_code()`, `mappel::estimator::Estimator< Model >::record_walltime()`, `mappel::estimator::ProfileBoundsDebugData::target_rllh_delta`, and `mappel::estimator::MLEData::theta`.

Referenced by `mappel::methods::debug::error_bounds_profile_likelihood_debug()`.

9.5.3.16 `template<class Model > virtual void mappel::estimator::Estimator< Model >::estimate_profile_bounds_parallel (const ModelDataT< Model > & data, ProfileBoundsData & bounds_est) [pure virtual]`

Profile likelihood bounds computations with VM algorithm

Implemented in `mappel::estimator::ThreadedEstimator< Model >`.

9.5.3.17 `template<class Model > virtual void mappel::estimator::Estimator< Model >::estimate_profile_bounds_stack (const ModelDataStackT< Model > & data_stack, ProfileBoundsDataStack & bounds_est) [pure virtual]`

Profile likelihood bounds computations with VM algorithm

Implemented in `mappel::estimator::ThreadedEstimator< Model >`.

9.5.3.18 `template<class Model > double mappel::estimator::Estimator< Model >::estimate_profile_max (const ModelDataT< Model > & data, const IdxVecT & fixed_idx, const ParamT< Model > & fixed_theta_init, StencilT< Model > & theta_max)`

Profile likelihood estimation methods

Definition at line 190 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model >::compute_profile_estimate()`, `mappel::estimator::Error`, `mappel::print_text_image()`, `mappel::estimator::Estimator< Model >::record_exit_code()`, `mappel::estimator::Estimator< Model >::record_walltime()`, and `mappel::methods::objective::rllh()`.

9.5.3.19 `template<class Model > virtual void mappel::estimator::Estimator< Model >::estimate_profile_max (const ModelDataT< Model > & data, const ParamVecT< Model > & fixed_theta_init, ProfileLikelihoodData & profile) [pure virtual]`

Profile likelihood estimation methods

Implemented in `mappel::estimator::ThreadedEstimator< Model >`.

9.5.3.20 `template<class Model > virtual StatsT mappel::estimator::Estimator< Model >::get_debug_stats () [pure virtual]`

Run statistics.

Implemented in [mappel::estimator::IterativeMaximizer< Model >](#), [mappel::estimator::SimulatedAnnealingMaximizer< Model >](#), [mappel::estimator::CGaussMLE< Model >](#), [mappel::estimator::CGaussHeuristicEstimator< Model >](#), [mappel::estimator::HeuristicEstimator< Model >](#), and [mappel::estimator::ThreadedEstimator< Model >](#).

9.5.3.21 `template<class Model > IdxVecT mappel::estimator::Estimator< Model >::get_exit_counts () const [inline]`

Run statistics.

Definition at line 274 of file estimator.h.

Referenced by [mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize\(\)](#).

9.5.3.22 `template<class Model > const Model & mappel::estimator::Estimator< Model >::get_model ()`

Definition at line 108 of file estimator_impl.h.

References [mappel::estimator::Estimator< Model >::model](#).

9.5.3.23 `template<class Model > StatsT mappel::estimator::Estimator< Model >::get_stats () [virtual]`

Run statistics.

Reimplemented in [mappel::estimator::IterativeMaximizer< Model >](#), [mappel::estimator::SimulatedAnnealingMaximizer< Model >](#), [mappel::estimator::CGaussMLE< Model >](#), [mappel::estimator::CGaussHeuristicEstimator< Model >](#), [mappel::estimator::HeuristicEstimator< Model >](#), and [mappel::estimator::ThreadedEstimator< Model >](#).

Definition at line 326 of file estimator_impl.h.

References [mappel::estimator::Error](#), [mappel::estimator::Estimator< Model >::exit_counts](#), [mappel::estimator::GradRatio](#), [mappel::estimator::MaxBacktracks](#), [mappel::estimator::MaxIter](#), [mappel::estimator::Estimator< Model >::num_estimations](#), [mappel::estimator::StepSize](#), [mappel::estimator::Success](#), [mappel::estimator::Estimator< Model >::total_walltime](#), and [mappel::estimator::TrustRegionRadius](#).

Referenced by [mappel::estimator::ThreadedEstimator< Model >::get_stats\(\)](#).

9.5.3.24 `template<class Model > virtual std::string mappel::estimator::Estimator< Model >::name () const [pure virtual]`

Implemented in [mappel::estimator::TrustRegionMaximizer< Model >](#), [mappel::estimator::QuasiNewtonMaximizer< Model >](#), [mappel::estimator::NewtonMaximizer< Model >](#), [mappel::estimator::NewtonDiagonalMaximizer< Model >](#), [mappel::estimator::SimulatedAnnealingMaximizer< Model >](#), [mappel::estimator::CGaussMLE< Model >](#), [mappel::estimator::CGaussHeuristicEstimator< Model >](#), and [mappel::estimator::HeuristicEstimator< Model >](#).

Referenced by [mappel::estimator::IterativeMaximizer< Model >::solve_profile_bound\(\)](#).

9.5.3.25 `template<class Model > virtual void mappel::estimator::Estimator< Model >::record_exit_code (ExitCode code) [protected],[pure virtual]`

Implemented in [mappel::estimator::ThreadedEstimator< Model >](#).

Referenced by `mappel::estimator::Estimator< Model >::estimate_max()`, `mappel::estimator::Estimator< Model >::estimate_max_debug()`, `mappel::estimator::Estimator< Model >::estimate_profile_bounds()`, `mappel::estimator::Estimator< Model >::estimate_profile_bounds_debug()`, and `mappel::estimator::Estimator< Model >::estimate_profile_max()`.

9.5.3.26 `template<class Model > void mappel::estimator::Estimator< Model >::record_walltime (ClockT::time_point start_walltime, int num_estimations) [protected]`

Definition at line 360 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::num_estimations`, and `mappel::estimator::Estimator< Model >::total_walltime`.

Referenced by `mappel::estimator::Estimator< Model >::estimate_max()`, `mappel::estimator::Estimator< Model >::estimate_max_debug()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_max_stack()`, `mappel::estimator::Estimator< Model >::estimate_profile_bounds()`, `mappel::estimator::Estimator< Model >::estimate_profile_bounds_debug()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack()`, `mappel::estimator::Estimator< Model >::estimate_profile_max()`, and `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_max()`.

9.5.4 Friends And Related Function Documentation

9.5.4.1 `template<class Model > template<class T > std::ostream& operator<< (std::ostream & out, Estimator< T > & estimator) [friend]`

9.5.5 Member Data Documentation

9.5.5.1 `template<class Model > IdxVecT mappel::estimator::Estimator< Model >::exit_counts [protected]`

Definition at line 299 of file `estimator.h`.

Referenced by `mappel::estimator::Estimator< Model >::clear_stats()`, `mappel::estimator::Estimator< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, and `mappel::estimator::ThreadedEstimator< Model >::record_exit_code()`.

9.5.5.2 `template<class Model > const Model& mappel::estimator::Estimator< Model >::model` [protected]

Definition at line 294 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::backtrack()`, `mappel::estimator::IterativeMaximizer< Model >::compute_estimate()`, `mappel::estimator::Estimator< Model >::compute_estimate_debug()`, `mappel::estimator::IterativeMaximizer< Model >::compute_estimate_debug()`, `mappel::estimator::Estimator< Model >::compute_profile_bound()`, `mappel::estimator::IterativeMaximizer< Model >::compute_profile_bound()`, `mappel::estimator::Estimator< Model >::compute_profile_bound_debug()`, `mappel::estimator::IterativeMaximizer< Model >::compute_profile_bound_debug()`, `mappel::estimator::Estimator< Model >::compute_profile_estimate()`, `mappel::estimator::IterativeMaximizer< Model >::compute_profile_estimate()`, `mappel::estimator::Estimator< Model >::estimate_max()`, `mappel::estimator::Estimator< Model >::estimate_max_stack()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_max_stack()`, `mappel::estimator::Estimator< Model >::estimate_profile_bounds()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_max()`, `mappel::estimator::HeuristicEstimator< Model >::get_debug_stats()`, `mappel::estimator::CGaussMLE< Model >::get_debug_stats()`, `mappel::estimator::Estimator< Model >::get_model()`, `mappel::estimator::IterativeMaximizer< Model >::local_maximize()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, `mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack()`, and `mappel::estimator::ThreadedEstimator< Model >::record_exit_code()`.

9.5.5.3 `template<class Model > int mappel::estimator::Estimator< Model >::num_estimations = 0` [protected]

Definition at line 297 of file estimator.h.

Referenced by `mappel::estimator::Estimator< Model >::clear_stats()`, `mappel::estimator::Estimator< Model >::get_stats()`, `mappel::estimator::ThreadedEstimator< Model >::get_stats()`, `mappel::estimator::HeuristicEstimator< Model >::get_stats()`, `mappel::estimator::CGaussHeuristicEstimator< Model >::get_stats()`, `mappel::estimator::CGaussMLE< Model >::get_stats()`, `mappel::estimator::SimulatedAnnealingMaximizer< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, and `mappel::estimator::Estimator< Model >::record_walltime()`.

9.5.5.4 `template<class Model > double mappel::estimator::Estimator< Model >::total_walltime = 0.` [protected]

Definition at line 298 of file estimator.h.

Referenced by `mappel::estimator::Estimator< Model >::clear_stats()`, `mappel::estimator::Estimator< Model >::get_stats()`, `mappel::estimator::ThreadedEstimator< Model >::get_stats()`, and `mappel::estimator::Estimator< Model >::record_walltime()`.

The documentation for this class was generated from the following files:


- [estimator.h](#)
- [estimator_impl.h](#)

9.6 mappel::Gauss1DMAP Class Reference

A 1D Gaussian with fixed PSF under an Poisson Read Noise assumption and MAP Objective.

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/Gauss1DMAP.h>
```

Inheritance diagram for `mappel::Gauss1DMAP`:

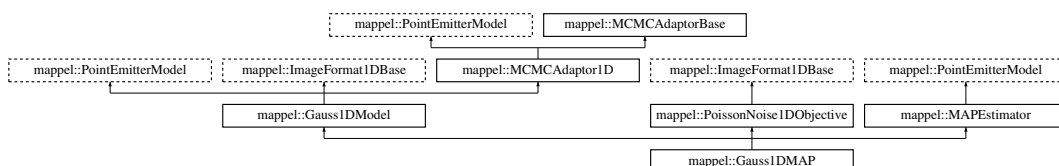

Public Types

- using `StencilVecT` = `std::vector< Stencil >`
- using `ParamT` = `arma::vec`
- using `ParamVecT` = `arma::mat`
- using `ImageCoordT` = `uint32_t`
- using `ImagePixelT` = `double`
- template<class `CoordT` >
using `ImageSizeShapeT` = `CoordT`
- template<class `CoordT` >
using `ImageSizeVecShapeT` = `arma::Col< CoordT >`
- using `ImageSizeT` = `ImageSizeShapeT< ImageCoordT >`
- using `ImageSizeVecT` = `ImageSizeVecShapeT< ImageCoordT >`
- template<class `PixelT` >
using `ImageShapeT` = `arma::Col< PixelT >`
- template<class `PixelT` >
using `ImageStackShapeT` = `arma::Mat< PixelT >`
- using `ImageT` = `ImageShapeT< ImagePixelT >`
- using `ImageStackT` = `ImageStackShapeT< ImagePixelT >`
- using `ModelDataT` = `ImageT`
- using `ModelDataStackT` = `ImageStackT`

Public Member Functions

- `Gauss1DMAP` (`arma::Col< ImageCoordT > size`, `VecT psf_sigma`, `const std::string &prior_type=DefaultPriorType`)
- `Gauss1DMAP` (`ImageSizeT size`, `double psf_sigma`, `const std::string &prior_type=DefaultPriorType`)
- `Gauss1DMAP` (`ImageSizeT size`, `double psf_sigma`, `CompositeDist &&prior`)
- `Gauss1DMAP` (`ImageSizeT size`, `double psf_sigma`, `const CompositeDist &prior`)
- `Gauss1DMAP` (`const Gauss1DMAP &o`)
- `Gauss1DMAP & operator=` (`const Gauss1DMAP &o`)
- `Gauss1DMAP` (`Gauss1DMAP &&o`)
- `Gauss1DMAP & operator=` (`Gauss1DMAP &&o`)
- `double get_psf_sigma` () `const`
- `double get_psf_sigma` (`IdxT idx`) `const`
- `void set_psf_sigma` (`double new_psf_sigma`)
- `void set_psf_sigma` (`const VecT &new_psf_sigma`)
- `StatsT get_stats` () `const`
- `Stencil make_stencil` (`const ParamT &theta`, `bool compute_derivatives=true`) `const`
Make a new Model::Stencil object at theta.
- `double pixel_model_value` (`IdxT i`, `const Stencil &s`) `const`
- `void pixel_grad` (`IdxT i`, `const Stencil &s`, `ParamT &pgrad`) `const`
- `void pixel_grad2` (`IdxT i`, `const Stencil &s`, `ParamT &pgrad2`) `const`
- `void pixel_hess` (`IdxT i`, `const Stencil &s`, `MatT &hess`) `const`
- `void pixel_hess_update` (`IdxT i`, `const Stencil &s`, `double dm_ratio_m1`, `double dmm_ratio`, `ParamT &grad`, `MatT &hess`) `const`
pixel derivative inner loop calculations.
- `Stencil initial_theta_estimate` (`const ImageT &im`) `const`
Fast, heuristic estimate of initial theta.
- `Stencil initial_theta_estimate` (`const ImageT &im`, `const ParamT &theta_init`) `const`

- `IdxT get_num_params () const`
- `void check_param_shape (const ParamT &theta) const`
- `void check_param_shape (const ParamVecT &theta) const`
- `void check_psf_sigma (double psf_sigma) const`
- `void check_psf_sigma (const VecT &psf_sigma) const`
- `ParamT make_param () const`
- `template<class FillT >`
`ParamT make_param (FillT fill) const`
- `ParamVecT make_param_stack (IdxT n) const`
- `template<class FillT >`
`ParamVecT make_param_stack (IdxT n, FillT fill) const`
- `MatT make_param_mat () const`
- `template<class FillT >`
`MatT make_param_mat (FillT fill) const`
- `CubeT make_param_mat_stack (IdxT n) const`
- `template<class FillT >`
`CubeT make_param_mat_stack (IdxT n, FillT fill) const`
- `CompositeDist & get_prior ()`
- `const CompositeDist & get_prior () const`
- `void set_prior (CompositeDist &&prior_)`
- `void set_prior (const CompositeDist &prior_)`
- `IdxT get_num_hyperparams () const`
- `void set_hyperparams (const VecT &hyperparams)`
- `VecT get_hyperparams () const`
- `bool has_hyperparam (const std::string &name) const`
- `double get_hyperparam_value (const std::string &name) const`
- `int get_hyperparam_index (const std::string &name) const`
- `void set_hyperparam_value (const std::string &name, double value)`
- `void rename_hyperparam (const std::string &old_name, const std::string &new_name)`
- `StringVecT get_param_names () const`
- `void set_param_names (const StringVecT &desc)`
- `StringVecT get_hyperparam_names () const`
- `void set_hyperparam_names (const StringVecT &desc)`
- `template<class RngT >`
`ParamT sample_prior (RngT &rng) const`
- `ParamT sample_prior () const`
- `void set_bounds (const ParamT &lbound, const ParamT &ubound)`
- `void set_lbound (const ParamT &lbound)`
- `void set_ubound (const ParamT &ubound)`
- `const ParamT & get_lbound () const`
- `const ParamT & get_ubound () const`
- `bool theta_in_bounds (const ParamT &theta) const`
- `void bound_theta (ParamT &theta, double epsilon=bounds_epsilon) const`
- `ParamT bounded_theta (const ParamT &theta, double epsilon=bounds_epsilon) const`
- `ParamT reflected_theta (const ParamT &theta) const`
- `BoolVecT theta_stack_in_bounds (const ParamVecT &theta) const`
- `ParamVecT bounded_theta_stack (const ParamVecT &theta, double epsilon=bounds_epsilon) const`
- `ParamVecT reflected_theta_stack (const ParamVecT &theta) const`
- `ImageT make_image () const`
- `ImageStackT make_image_stack (ImageCoordT n) const`
- `ImageCoordT get_size_image_stack (const ImageStackT &stack) const`

- [ImageT get_image_from_stack](#) (const [ImageStackT](#) &stack, [ImageCoordT](#) n) const
- `template<class ImT >`
void [set_image_in_stack](#) ([ImageStackT](#) &stack, [ImageCoordT](#) n, const [ImT](#) &im) const
- [ImageSizeT get_size](#) () const
- [ImageCoordT get_size](#) ([IdxT](#) idx) const
- [ImageCoordT get_num_pixels](#) () const
- void [set_size](#) (const [ImageSizeT](#) &size_)
- void [set_size](#) (const [arma::Col](#)< [ImageCoordT](#) > &sz)
- void [check_image_shape](#) (const [ImageT](#) &im) const
Check the shape of a single images is correct for model size.
- void [check_image_shape](#) (const [ImageStackT](#) &ims) const
Check the shape of a stack of images is correct for model size.
- void [sample_mcmc_candidate](#) ([IdxT](#) sample_index, [ParamT](#) &candidate, double step_scale=1.0) const
- void [sample_mcmc_candidate](#) ([IdxT](#) sample_index, [ParamT](#) &candidate, const [IdxVecT](#) &fixed_parameters_↵ mask, double step_scale=1.0) const
- void [set_intensity_mcmc_sampling](#) (double eta_l=-1)
- void [set_background_mcmc_sampling](#) (double eta_bg=-1)
- void [set_mcmc_sigma_scale](#) (double scale)
- double [get_mcmc_sigma_scale](#) () const
- [IdxT get_mcmc_num_phases](#) () const

Static Public Member Functions

- static [CompositeDist make_default_prior](#) ([IdxT](#) size, const std::string &prior_type)
- static [CompositeDist make_default_prior_beta_position](#) ([IdxT](#) size)
- static [CompositeDist make_default_prior_normal_position](#) ([IdxT](#) size)
- static [CompositeDist make_prior_beta_position](#) ([IdxT](#) size, double beta_xpos, double mean_l, double kappa_l, double mean_bg, double kappa_bg)
- static [CompositeDist make_prior_normal_position](#) ([IdxT](#) size, double sigma_xpos, double mean_l, double kappa_l, double mean_bg, double kappa_bg)
- static [prior_hessian::TruncatedNormalDist make_prior_component_position_normal](#) ([IdxT](#) size, double pos_↵ sigma=default_sigma_pos)
- static [prior_hessian::ScaledSymmetricBetaDist make_prior_component_position_beta](#) ([IdxT](#) size, double pos_↵ beta=default_beta_pos)
- static [prior_hessian::TruncatedGammaDist make_prior_component_intensity](#) (double mean=default_mean_↵ l, double kappa=default_intensity_kappa)
- static [prior_hessian::TruncatedParetoDist make_prior_component_sigma](#) (double min_sigma, double max_↵ sigma, double alpha=default_alpha_sigma)
- static void [set_rng_seed](#) ([RngSeedT](#) seed)
- static [ParallelRngManagerT](#) & [get_rng_manager](#) ()
- static [ParallelRngGeneratorT](#) & [get_rng_generator](#) ()
- static void [check_size](#) (const [ImageSizeT](#) &size_)

Check the size argument for the model.

Static Public Attributes

- static const std::string [name](#)
- static const [StringVecT](#) [prior_types](#)
- static const std::string [DefaultPriorType](#) = "Normal"
- static const std::string [DefaultSeperableInitEstimator](#) = "TrustRegion"
- static const double [bounds_epsilon](#) = 1.0E-6
- static const double [global_min_psf_sigma](#) = 1E-1
- static const double [global_max_psf_sigma](#) = 1E2
- static const double [default_beta_pos](#) = 3
- static const double [default_sigma_pos](#) = 1
- static const double [default_mean_l](#) = 300
- static const double [default_max_l](#) = INFINITY
- static const double [default_intensity_kappa](#) = 2
- static const double [default_pixel_mean_bg](#) = 4
- static const double [default_alpha_sigma](#) = 2
- static const [ImageCoordT](#) [num_dim](#) = 1
- static const [ImageCoordT](#) [global_min_size](#) = 3
- static const [ImageCoordT](#) [global_max_size](#) = 512
- static const double [global_default_mcmc_sigma_scale](#) = 0.05
- static const double [global_max_mcmc_sigma_scale](#) = 0.5
- static const std::vector< std::string > [estimator_names](#)

Protected Member Functions

- void [set_mcmc_num_phases](#) ([IdxT](#) [num_phases](#))

Protected Attributes

- double [psf_sigma](#)
- CompositeDist [prior](#)
- [IdxT](#) [num_params](#)
- [IdxT](#) [num_hyperparams](#)
- [ParamT](#) [lbound](#)
- [ParamT](#) [ubound](#)
- [ImageSizeT](#) [size](#)
- double [eta_x](#) =0
- double [eta_l](#) =0
- double [eta_bg](#) =0
- [IdxT](#) [num_phases](#)
- double [sigma_scale](#)

9.6.1 Detailed Description

A 1D Gaussian with fixed PSF under an Poisson Read Noise assumption and MAP Objective.

Model: [Gauss1DModel](#) - 1D Gaussian PSF with fixed PSF sigma Objective: [PoissonNoise1DObjective](#) - Poisson noise model for 1D Estimator: MAPstimator - Maximum a-posteriori estimator

Definition at line 23 of file Gauss1DMAP.h.

9.6.2 Member Typedef Documentation

9.6.2.1 using mappel::ImageFormat1DBase::ImageCoordT = uint32_t [inherited]

Image size coordinate storage type

Definition at line 25 of file ImageFormat1DBase.h.

9.6.2.2 using mappel::ImageFormat1DBase::ImagePixelT = double [inherited]

Image pixel storage type

Definition at line 26 of file ImageFormat1DBase.h.

9.6.2.3 template<class PixelT > using mappel::ImageFormat1DBase::ImageShapeT = arma::Col<PixelT> [inherited]

Shape of the data type for a single image

Definition at line 33 of file ImageFormat1DBase.h.

9.6.2.4 template<class CoordT > using mappel::ImageFormat1DBase::ImageSizeShapeT = CoordT [inherited]

Shape of the data type to store 1-image's coordinates

Definition at line 28 of file ImageFormat1DBase.h.

9.6.2.5 using mappel::ImageFormat1DBase::ImageSizeT = ImageSizeShapeT<ImageCoordT> [inherited]

Data type for a single image size

Definition at line 30 of file ImageFormat1DBase.h.

9.6.2.6 template<class CoordT > using mappel::ImageFormat1DBase::ImageSizeVecShapeT = arma::Col<CoordT> [inherited]

Shape of the data type to store a vector of image's coordinates

Definition at line 29 of file ImageFormat1DBase.h.

9.6.2.7 using mappel::ImageFormat1DBase::ImageSizeVecT = ImageSizeVecShapeT<ImageCoordT> [inherited]

Data type for a sequence of image sizes

Definition at line 31 of file ImageFormat1DBase.h.

9.6.2.8 `template<class PixelT > using mappel::ImageFormat1DBase::ImageStackShapeT = arma::Mat<PixelT>`
`[inherited]`

Shape of the data type for a sequence of images

Definition at line 34 of file ImageFormat1DBase.h.

9.6.2.9 `using mappel::ImageFormat1DBase::ImageStackT = ImageStackShapeT<ImagePixelT>`
`[inherited]`

Data type to represent a sequence of images

Definition at line 36 of file ImageFormat1DBase.h.

9.6.2.10 `using mappel::ImageFormat1DBase::ImageT = ImageShapeT<ImagePixelT>` `[inherited]`

Data type to represent single image

Definition at line 35 of file ImageFormat1DBase.h.

9.6.2.11 `using mappel::PoissonNoise1DObjective::ModelDataStackT = ImageStackT` `[inherited]`

Objective function data stack type: 1D double precision image stack, of images gain-corrected to approximate photons counts

Definition at line 26 of file PoissonNoise1DObjective.h.

9.6.2.12 `using mappel::PoissonNoise1DObjective::ModelDataT = ImageT` `[inherited]`

Objective function data type: 1D double precision image, gain-corrected to approximate photons counts

Definition at line 25 of file PoissonNoise1DObjective.h.

9.6.2.13 `using mappel::PointEmitterModel::ParamT = arma::vec` `[inherited]`

Parameter vector

Definition at line 47 of file PointEmitterModel.h.

9.6.2.14 `using mappel::PointEmitterModel::ParamVecT = arma::mat` `[inherited]`

Vector of parameter vectors

Definition at line 48 of file PointEmitterModel.h.

9.6.2.15 `using mappel::Gauss1DModel::StencilVecT = std::vector<Stencil>` `[inherited]`

Definition at line 49 of file Gauss1DModel.h.

9.6.3 Constructor & Destructor Documentation

9.6.3.1 `mappel::Gauss1DMAP::Gauss1DMAP (arma::Col< ImageCoordT > size, VecT psf_sigma, const std::string & prior_type = DefaultPriorType)`

Definition at line 11 of file Gauss1DMAP.cpp.

9.6.3.2 `mappel::Gauss1DMAP::Gauss1DMAP (ImageSizeT size, double psf_sigma, const std::string & prior_type = DefaultPriorType)`

Definition at line 15 of file Gauss1DMAP.cpp.

9.6.3.3 `mappel::Gauss1DMAP::Gauss1DMAP (ImageSizeT size, double psf_sigma, CompositeDist && prior)`

Definition at line 19 of file Gauss1DMAP.cpp.

9.6.3.4 `mappel::Gauss1DMAP::Gauss1DMAP (ImageSizeT size, double psf_sigma, const CompositeDist & prior)`

Definition at line 27 of file Gauss1DMAP.cpp.

9.6.3.5 `mappel::Gauss1DMAP::Gauss1DMAP (const Gauss1DMAP & o)`

Definition at line 35 of file Gauss1DMAP.cpp.

9.6.3.6 `mappel::Gauss1DMAP::Gauss1DMAP (Gauss1DMAP && o)`

Definition at line 43 of file Gauss1DMAP.cpp.

9.6.4 Member Function Documentation

9.6.4.1 `void mappel::PointEmitterModel::bound_theta (ParamT & theta, double epsilon = bounds_epsilon) const`
[*inherited*]

Definition at line 248 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

9.6.4.2 `PointEmitterModel::ParamT mappel::PointEmitterModel::bounded_theta (const ParamT & theta, double epsilon = bounds_epsilon) const` [*inherited*]

Definition at line 265 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::PointEmitterModel::bounded_theta_stack()`.

9.6.4.3 `PointEmitterModel::ParamVecT mappel::PointEmitterModel::bounded_theta_stack (const ParamVecT & theta, double epsilon = bounds_epsilon) const` [inherited]

Definition at line 306 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::bounded_theta()`, `mappel::PointEmitterModel::check_param_shape()`, and `mappel::PointEmitterModel::make_param_stack()`.

9.6.4.4 `void ImageFormat1DBase::check_image_shape (const ImageT & im) const` [inherited]

Check the shape of a single images is correct for model size.

Definition at line 59 of file ImageFormat1DBase.cpp.

References `mappel::ImageFormat1DBase::size`.

9.6.4.5 `void ImageFormat1DBase::check_image_shape (const ImageStackT & ims) const` [inherited]

Check the shape of a stack of images is correct for model size.

Definition at line 71 of file ImageFormat1DBase.cpp.

References `mappel::ImageFormat1DBase::size`.

9.6.4.6 `void mappel::PointEmitterModel::check_param_shape (const ParamT & theta) const` [inherited]

Definition at line 167 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::num_params`.

Referenced by `mappel::PointEmitterModel::bound_theta()`, `mappel::PointEmitterModel::bounded_theta()`, `mappel::PointEmitterModel::bounded_theta_stack()`, `mappel::PointEmitterModel::reflected_theta()`, `mappel::PointEmitterModel::reflected_theta_stack()`, `mappel::PointEmitterModel::theta_in_bounds()`, and `mappel::PointEmitterModel::theta_stack_in_bounds()`.

9.6.4.7 `void mappel::PointEmitterModel::check_param_shape (const ParamVecT & theta) const` [inherited]

Definition at line 176 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::num_params`.

9.6.4.8 `void mappel::PointEmitterModel::check_psf_sigma (double psf_sigma) const` [inherited]

Definition at line 185 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::global_max_psf_sigma`, and `mappel::PointEmitterModel::global_min_psf_sigma`.

Referenced by `mappel::Gauss1DModel::Gauss1DModel()`, `mappel::Gauss2DModel::Gauss2DModel()`, `mappel::Gauss2DsModel::Gauss2DsModel()`, `mappel::Gauss1DsModel::set_max_sigma()`, `mappel::Gauss2DsModel::set_max_sigma()`, `mappel::Gauss1DsModel::set_min_sigma()`, `mappel::Gauss2DsModel::set_min_sigma()`, `mappel::Gauss1DModel::set_psf_sigma()`, and `mappel::Gauss2DModel::set_psf_sigma()`.

9.6.4.9 `void mappel::PointEmitterModel::check_psf_sigma (const VecT & psf_sigma) const` [inherited]

Definition at line 197 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::global_max_psf_sigma`, and `mappel::PointEmitterModel::global_min_psf_sigma`.

9.6.4.10 `void ImageFormat1DBase::check_size (const ImageSizeT & size_)` [static],[inherited]

Check the size argument for the model.

Definition at line 39 of file ImageFormat1DBase.cpp.

References `mappel::ImageFormat1DBase::global_max_size`, and `mappel::ImageFormat1DBase::global_min_size`.

Referenced by `mappel::ImageFormat1DBase::ImageFormat1DBase()`, and `mappel::ImageFormat1DBase::set_size()`.

9.6.4.11 `int mappel::PointEmitterModel::get_hyperparam_index (const std::string & name) const` [inline],[inherited]

Definition at line 236 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.6.4.12 `StringVecT mappel::PointEmitterModel::get_hyperparam_names () const` [inline],[inherited]

Definition at line 256 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.6.4.13 `double mappel::PointEmitterModel::get_hyperparam_value (const std::string & name) const` [inline],[inherited]

Definition at line 232 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

Referenced by `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`, and `mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling()`.

9.6.4.14 `PointEmitterModel::ParamT mappel::PointEmitterModel::get_hyperparams () const` [inline],[inherited]

Definition at line 224 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.6.4.15 `ImageFormat1DBase::ImageT ImageFormat1DBase::get_image_from_stack (const ImageStackT & stack, ImageCoordT n) const` [inline],[inherited]

Definition at line 108 of file ImageFormat1DBase.h.

9.6.4.16 `const PointEmitterModel::ParamT & mappel::PointEmitterModel::get_lbound () const` [inline],
[inherited]

Definition at line 212 of file PointEmitterModel.h.

References mappel::PointEmitterModel::lbound.

Referenced by mappel::MCMCAdaptor1D::MCMCAdaptor1D(), mappel::MCMCAdaptor2D::MCMCAdaptor2D(), and mappel::MCMCAdaptor1D::set_background_mcmc_sampling().

9.6.4.17 `IdxT mappel::MCMCAdaptorBase::get_mcmc_num_phases () const` [inherited]

Definition at line 56 of file MCMCAdaptorBase.cpp.

References mappel::MCMCAdaptorBase::num_phases.

9.6.4.18 `double mappel::MCMCAdaptorBase::get_mcmc_sigma_scale () const` [inherited]

Definition at line 53 of file MCMCAdaptorBase.cpp.

References mappel::MCMCAdaptorBase::sigma_scale.

9.6.4.19 `IdxT mappel::PointEmitterModel::get_num_hyperparams () const` [inline],[inherited]

Definition at line 208 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_hyperparams.

9.6.4.20 `IdxT mappel::PointEmitterModel::get_num_params () const` [inline],[inherited]

Definition at line 160 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.6.4.21 `ImageFormat1DBase::ImageCoordT ImageFormat1DBase::get_num_pixels () const` [inline],
[inherited]

Definition at line 82 of file ImageFormat1DBase.h.

References mappel::ImageFormat1DBase::size.

Referenced by mappel::ImageFormat1DBase::get_stats().

9.6.4.22 `StringVecT mappel::PointEmitterModel::get_param_names () const` [inline],[inherited]

Definition at line 248 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.6.4.23 CompositeDist & mappel::PointEmitterModel::get_prior () [inline],[inherited]

Definition at line 200 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

Referenced by mappel::Gauss2DModel::update_internal_1Dsum_estimators(), and mappel::Gauss2DsModel::update_internal_1Dsum_estimators().

9.6.4.24 const CompositeDist & mappel::PointEmitterModel::get_prior () const [inline],[inherited]

Definition at line 204 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.6.4.25 double mappel::Gauss1DModel::get_psf_sigma () const [inline],[inherited]

Definition at line 127 of file Gauss1DModel.h.

References mappel::Gauss1DModel::psf_sigma.

Referenced by mappel::Gauss1DModel::get_stats().

9.6.4.26 double mappel::Gauss1DModel::get_psf_sigma (IdxT idx) const [inherited]

Definition at line 131 of file Gauss1DModel.cpp.

References mappel::Gauss1DModel::psf_sigma.

9.6.4.27 ParallelRngGeneratorT & mappel::PointEmitterModel::get_rng_generator () [static],[inherited]

Definition at line 120 of file PointEmitterModel.cpp.

References mappel::rng_manager.

9.6.4.28 ParallelRngManagerT & mappel::PointEmitterModel::get_rng_manager () [static],[inherited]

Definition at line 115 of file PointEmitterModel.cpp.

References mappel::rng_manager.

9.6.4.29 ImageFormat1DBase::ImageSizeT ImageFormat1DBase::get_size () const [inline],[inherited]

Definition at line 71 of file ImageFormat1DBase.h.

References mappel::ImageFormat1DBase::size.

Referenced by mappel::ImageFormat1DBase::get_stats().

9.6.4.30 `ImageFormat1DBase::ImageCoordT ImageFormat1DBase::get_size (IdxT idx) const` `[inherited]`

Definition at line 20 of file ImageFormat1DBase.cpp.

References `mappel::ImageFormat1DBase::size`.

9.6.4.31 `ImageFormat1DBase::ImageCoordT ImageFormat1DBase::get_size_image_stack (const ImageStackT & stack) const` `[inline], [inherited]`

Definition at line 101 of file ImageFormat1DBase.h.

9.6.4.32 `StatsT mappel::Gauss1DModel::get_stats () const` `[inherited]`

Definition at line 178 of file Gauss1DModel.cpp.

References `mappel::Gauss1DModel::get_psf_sigma()`, `mappel::MCMCAdaptor1D::get_stats()`, `mappel::ImageFormat1DBase::get_stats()`, and `mappel::PointEmitterModel::get_stats()`.

9.6.4.33 `const PointEmitterModel::ParamT & mappel::PointEmitterModel::get_ubound () const` `[inline], [inherited]`

Definition at line 216 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::Gauss2DsxyModel::get_max_sigma_ratio()`, `mappel::Gauss2DsModel::get_max_sigma_ratio()`, `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor2D::MCMCAdaptor2D()`, `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`, and `mappel::Gauss2DsModel::set_max_sigma_ratio()`.

9.6.4.34 `bool mappel::PointEmitterModel::has_hyperparam (const std::string & name) const` `[inline], [inherited]`

Definition at line 228 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.6.4.35 `Gauss1DModel::Stencil mappel::Gauss1DModel::initial_theta_estimate (const ImageT & im) const` `[inline], [inherited]`

Fast, heuristic estimate of initial theta.

Definition at line 169 of file Gauss1DModel.h.

References `mappel::PointEmitterModel::make_param()`, and `mappel::Gauss1DModel::Stencil::theta`.

9.6.4.36 `Gauss1DModel::Stencil mappel::Gauss1DModel::initial_theta_estimate (const ImageT & im, const ParamT & theta_init) const` `[inherited]`

Definition at line 207 of file Gauss1DModel.cpp.

References `mappel::Gauss1DModel::Stencil::bg()`, `mappel::Gauss1DModel::Stencil::l()`, `mappel::Gauss1DModel::make_stencil()`, `mappel::PointEmitterModel::num_params`, and `mappel::ImageFormat1DBase::size`.

9.6.4.37 CompositeDist mappel::Gauss1DModel::make_default_prior (*IdxT size*, const std::string & *prior_type*) [static],
[inherited]

Definition at line 59 of file Gauss1DModel.cpp.

References mappel::istarts_with(), mappel::Gauss1DModel::make_default_prior_beta_position(), and mappel::Gauss1DModel::make_default_prior_normal_position().

9.6.4.38 CompositeDist mappel::Gauss1DModel::make_default_prior_beta_position (*IdxT size*) [static],
[inherited]

Definition at line 80 of file Gauss1DModel.cpp.

References mappel::PointEmitterModel::default_pixel_mean_bg, mappel::PointEmitterModel::make_prior_component_intensity(), and mappel::PointEmitterModel::make_prior_component_position_beta().

Referenced by mappel::Gauss1DModel::make_default_prior().

9.6.4.39 CompositeDist mappel::Gauss1DModel::make_default_prior_normal_position (*IdxT size*) [static],
[inherited]

Definition at line 90 of file Gauss1DModel.cpp.

References mappel::PointEmitterModel::default_pixel_mean_bg, mappel::PointEmitterModel::make_prior_component_intensity(), and mappel::PointEmitterModel::make_prior_component_position_normal().

Referenced by mappel::Gauss1DModel::make_default_prior().

9.6.4.40 ImageFormat1DBase::ImageT ImageFormat1DBase::make_image () const [inline], [inherited]

Definition at line 87 of file ImageFormat1DBase.h.

References mappel::ImageFormat1DBase::size.

9.6.4.41 ImageFormat1DBase::ImageStackT ImageFormat1DBase::make_image_stack (*ImageCoordT n*) const
[inline], [inherited]

Definition at line 94 of file ImageFormat1DBase.h.

References mappel::ImageFormat1DBase::size.

9.6.4.42 PointEmitterModel::ParamT mappel::PointEmitterModel::make_param () const [inline], [inherited]

Definition at line 164 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

Referenced by mappel::Gauss1DModel::initial_theta_estimate(), mappel::Gauss1DsModel::initial_theta_estimate(), mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsxyModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::Gauss1DModel::pixel_hess_update(), mappel::Gauss1DsModel::pixel_hess_update(), mappel::Gauss2DModel::pixel_hess_update(), and mappel::Gauss2DsModel::pixel_hess_update().

9.6.4.43 `template<class FillT > PointEmitterModel::ParamT mappel::PointEmitterModel::make_param (FillT fill) const`
`[inherited]`

Definition at line 181 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.6.4.44 `MatT mappel::PointEmitterModel::make_param_mat () const` `[inline],[inherited]`

Definition at line 172 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.6.4.45 `template<class FillT > MatT mappel::PointEmitterModel::make_param_mat (FillT fill) const` `[inherited]`

Definition at line 191 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.6.4.46 `CubeT mappel::PointEmitterModel::make_param_mat_stack (IdxT n) const` `[inline],[inherited]`

Definition at line 176 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.6.4.47 `template<class FillT > CubeT mappel::PointEmitterModel::make_param_mat_stack (IdxT n, FillT fill) const`
`[inherited]`

Definition at line 196 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.6.4.48 `PointEmitterModel::ParamVecT mappel::PointEmitterModel::make_param_stack (IdxT n) const` `[inline],[inherited]`

Definition at line 168 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

Referenced by mappel::PointEmitterModel::bounded_theta_stack(), and mappel::PointEmitterModel::reflected_theta_stack().

9.6.4.49 `template<class FillT > PointEmitterModel::ParamVecT mappel::PointEmitterModel::make_param_stack (IdxT n, FillT fill) const` `[inherited]`

Definition at line 186 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.6.4.50 **CompositeDist** mappel::Gauss1DModel::make_prior_beta_position (*IdxT size*, double *beta_xpos*, double *mean_l*, double *kappa_l*, double *mean_bg*, double *kappa_bg*) [static],[inherited]

Definition at line 101 of file Gauss1DModel.cpp.

References mappel::PointEmitterModel::make_prior_component_intensity(), and mappel::PointEmitterModel::make_prior_component_position_beta().

Referenced by mappel::Gauss2DModel::make_internal_1Dsum_estimator().

9.6.4.51 **prior_hessian::TruncatedGammaDist** mappel::PointEmitterModel::make_prior_component_intensity (double *mean = default_mean_l*, double *kappa = default_intensity_kappa*) [static],[inherited]

Definition at line 98 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::default_max_l.

Referenced by mappel::Gauss1DsModel::make_default_prior_beta_position(), mappel::Gauss2DModel::make_default_prior_beta_position(), mappel::Gauss1DModel::make_default_prior_beta_position(), mappel::Gauss2DsModel::make_default_prior_beta_position(), mappel::Gauss2DModel::make_default_prior_normal_position(), mappel::Gauss1DsModel::make_default_prior_normal_position(), mappel::Gauss1DModel::make_default_prior_normal_position(), mappel::Gauss2DsModel::make_default_prior_normal_position(), mappel::Gauss2DModel::make_prior_beta_position(), mappel::Gauss1DsModel::make_prior_beta_position(), mappel::Gauss1DModel::make_prior_beta_position(), mappel::Gauss2DsModel::make_prior_beta_position(), mappel::Gauss2DModel::make_prior_normal_position(), mappel::Gauss1DsModel::make_prior_normal_position(), mappel::Gauss1DModel::make_prior_normal_position(), and mappel::Gauss2DsModel::make_prior_normal_position().

9.6.4.52 **prior_hessian::ScaledSymmetricBetaDist** mappel::PointEmitterModel::make_prior_component_position_beta (*IdxT size*, double *pos_beta = default_beta_pos*) [static],[inherited]

Definition at line 92 of file PointEmitterModel.cpp.

Referenced by mappel::Gauss1DsModel::make_default_prior_beta_position(), mappel::Gauss2DModel::make_default_prior_beta_position(), mappel::Gauss1DModel::make_default_prior_beta_position(), mappel::Gauss2DsModel::make_default_prior_beta_position(), mappel::Gauss1DsModel::make_prior_beta_position(), mappel::Gauss2DModel::make_prior_beta_position(), mappel::Gauss1DModel::make_prior_beta_position(), and mappel::Gauss2DsModel::make_prior_beta_position().

9.6.4.53 **prior_hessian::TruncatedNormalDist** mappel::PointEmitterModel::make_prior_component_position_normal (*IdxT size*, double *pos_sigma = default_sigma_pos*) [static],[inherited]

Definition at line 85 of file PointEmitterModel.cpp.

Referenced by mappel::Gauss1DsModel::make_default_prior_normal_position(), mappel::Gauss2DModel::make_default_prior_normal_position(), mappel::Gauss1DModel::make_default_prior_normal_position(), mappel::Gauss2DsModel::make_default_prior_normal_position(), mappel::Gauss2DModel::make_prior_normal_position(), mappel::Gauss1DsModel::make_prior_normal_position(), mappel::Gauss1DModel::make_prior_normal_position(), and mappel::Gauss2DsModel::make_prior_normal_position().

9.6.4.54 **prior_hessian::TruncatedParetoDist** `mappel::PointEmitterModel::make_prior_component_sigma (double min_sigma, double max_sigma, double alpha = default_alpha_sigma)` [static],[inherited]

Definition at line 104 of file `PointEmitterModel.cpp`.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, `mappel::Gauss1DsModel::make_prior_beta_position()`, `mappel::Gauss2DsModel::make_prior_beta_position()`, `mappel::Gauss1DsModel::make_prior_normal_position()`, and `mappel::Gauss2DsModel::make_prior_normal_position()`.

9.6.4.55 **CompositeDist** `mappel::Gauss1DModel::make_prior_normal_position (IdxT size, double sigma_xpos, double mean_l, double kappa_l, double mean_bg, double kappa_bg)` [static],[inherited]

Definition at line 114 of file `Gauss1DModel.cpp`.

References `mappel::PointEmitterModel::make_prior_component_intensity()`, and `mappel::PointEmitterModel::make_prior_component_position_normal()`.

Referenced by `mappel::Gauss2DModel::make_internal_1Dsum_estimator()`.

9.6.4.56 **Gauss1DModel::Stencil** `mappel::Gauss1DModel::make_stencil (const ParamT & theta, bool compute_derivatives = true) const` [inline],[inherited]

Make a new `Model::Stencil` object at `theta`.

Stencils store all of the important calculations necessary for evaluating the log-likelihood and its derivatives at a particular `theta` (parameter) value.

This allows re-use of the most expensive computations. Stencils can be easily passed around by reference, and most functions in the [mappel::methods](#) namespace accept a const [Stencil](#) reference in place of the model parameter.

Throws [mappel::ModelBoundsError](#) if not `model.theta_in_bounds(theta)`.

If derivatives will not be computed with this stencil set `compute_derivatives=false`

Parameters

<i>theta</i>	Parameter to evaluate at
<i>compute_derivatives</i>	True to also prepare for derivative computations

Returns

A new [Stencil](#) object ready to compute with

Definition at line 116 of file `Gauss1DModel.h`.

References `mappel::Gauss1DModel::Stencil::Stencil()`, and `mappel::PointEmitterModel::theta_in_bounds()`.

Referenced by `mappel::Gauss1DModel::initial_theta_estimate()`.

9.6.4.57 Gauss1DMAP & mappel::Gauss1DMAP::operator= (const Gauss1DMAP & o)

Definition at line 51 of file Gauss1DMAP.cpp.

References mappel::MAPEstimator::operator=(), mappel::PoissonNoise1DObjective::operator=(), mappel::Gauss1DModel::operator=(), and mappel::PointEmitterModel::operator=().

9.6.4.58 Gauss1DMAP & mappel::Gauss1DMAP::operator= (Gauss1DMAP && o)

Definition at line 62 of file Gauss1DMAP.cpp.

References mappel::MAPEstimator::operator=(), mappel::PoissonNoise1DObjective::operator=(), mappel::Gauss1DModel::operator=(), and mappel::PointEmitterModel::operator=().

9.6.4.59 void mappel::Gauss1DModel::pixel_grad (IdxT i, const Stencil & s, ParamT & pgrad) const [inline], [inherited]

Definition at line 141 of file Gauss1DModel.h.

References mappel::Gauss1DModel::Stencil::DX, mappel::Gauss1DModel::Stencil::l(), and mappel::Gauss1DModel::Stencil::X.

Referenced by mappel::Gauss1DModel::pixel_hess_update().

9.6.4.60 void mappel::Gauss1DModel::pixel_grad2 (IdxT i, const Stencil & s, ParamT & pgrad2) const [inline], [inherited]

Definition at line 150 of file Gauss1DModel.h.

References mappel::Gauss1DModel::Stencil::DXS, mappel::Gauss1DModel::Stencil::l(), and mappel::Gauss1DModel::psf_sigma.

9.6.4.61 void mappel::Gauss1DModel::pixel_hess (IdxT i, const Stencil & s, MatT & hess) const [inline], [inherited]

Definition at line 159 of file Gauss1DModel.h.

References mappel::Gauss1DModel::Stencil::DX, mappel::Gauss1DModel::Stencil::DXS, mappel::Gauss1DModel::Stencil::l(), and mappel::Gauss1DModel::psf_sigma.

9.6.4.62 void mappel::Gauss1DModel::pixel_hess_update (IdxT i, const Stencil & s, double dm_ratio_m1, double dmm_ratio, ParamT & grad, MatT & hess) const [inherited]

pixel derivative inner loop calculations.

Definition at line 191 of file Gauss1DModel.cpp.

References mappel::Gauss1DModel::Stencil::DXS, mappel::Gauss1DModel::Stencil::l(), mappel::PointEmitterModel::make_param(), mappel::Gauss1DModel::pixel_grad(), and mappel::Gauss1DModel::psf_sigma.

9.6.4.63 `double mappel::Gauss1DModel::pixel_model_value (IdxT i, const Stencil & s) const` `[inline], [inherited]`

Definition at line 135 of file Gauss1DModel.h.

References `mappel::Gauss1DModel::Stencil::bg()`, `mappel::Gauss1DModel::Stencil::l()`, and `mappel::Gauss1DModel::Stencil::X`.

9.6.4.64 `PointEmitterModel::ParamT mappel::PointEmitterModel::reflected_theta (const ParamT & theta) const`
`[inherited]`

Definition at line 276 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::PointEmitterModel::reflected_theta_stack()`.

9.6.4.65 `PointEmitterModel::ParamVecT mappel::PointEmitterModel::reflected_theta_stack (const ParamVecT & theta) const` `[inherited]`

Definition at line 316 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::make_param_stack()`, and `mappel::PointEmitterModel::reflected_theta()`.

9.6.4.66 `void mappel::PointEmitterModel::rename_hyperparam (const std::string & old_name, const std::string & new_name)`
`[inline], [inherited]`

Definition at line 244 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.6.4.67 `void mappel::MCMCAdaptor1D::sample_mcmc_candidate (IdxT sample_index, ParamT & candidate, double step_scale = 1.0) const` `[inherited]`

Definition at line 108 of file MCMCAdaptor1D.cpp.

References `mappel::MCMCAdaptor1D::eta_bg`, `mappel::MCMCAdaptor1D::eta_l`, `mappel::MCMCAdaptor1D::eta_x`, `mappel::MCMCAdaptorBase::num_phases`, and `mappel::rng_manager`.

9.6.4.68 `void mappel::MCMCAdaptor1D::sample_mcmc_candidate (IdxT sample_index, ParamT & candidate, const IdxVecT & fixed_parameters_mask, double step_scale = 1.0) const` `[inherited]`

Definition at line 122 of file MCMCAdaptor1D.cpp.

References `mappel::MCMCAdaptor1D::eta_bg`, `mappel::MCMCAdaptor1D::eta_l`, `mappel::MCMCAdaptor1D::eta_x`, `mappel::MCMCAdaptorBase::num_phases`, and `mappel::rng_manager`.

9.6.4.69 `template<class RngT > PointEmitterModel::ParamT mappel::PointEmitterModel::sample_prior (RngT & rng) const`
`[inherited]`

Definition at line 264 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

9.6.4.70 `PointEmitterModel::ParamT mappel::PointEmitterModel::sample_prior () const` `[inline]`, `[inherited]`

Definition at line 268 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`, and `mappel::rng_manager`.

9.6.4.71 `void mappel::MCMCAdaptor1D::set_background_mcmc_sampling (double eta_bg = -1)` `[inherited]`

Definition at line 81 of file `MCMCAdaptor1D.cpp`.

References `mappel::PointEmitterModel::default_pixel_mean_bg`, `mappel::MCMCAdaptor1D::eta_bg`, `mappel::PointEmitterModel::get_hyperparam_value()`, `mappel::PointEmitterModel::get_lbound()`, `mappel::PointEmitterModel::get_ubound()`, and `mappel::MCMCAdaptorBase::sigma_scale`.

Referenced by `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`.

9.6.4.72 `void mappel::PointEmitterModel::set_bounds (const ParamT & lbound_, const ParamT & ubound_)`
`[inherited]`

Box-type parameter bounds

Modifies the prior bounds to prevent sampling outside the valid box-constraints.

Definition at line 213 of file `PointEmitterModel.cpp`.

References `mappel::PointEmitterModel::bounds_epsilon`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

9.6.4.73 `void mappel::PointEmitterModel::set_hyperparam_names (const StringVecT & desc)` `[inline]`,
`[inherited]`

Definition at line 260 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

9.6.4.74 `void mappel::PointEmitterModel::set_hyperparam_value (const std::string & name, double value)` `[inline]`,
`[inherited]`

Definition at line 240 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

9.6.4.75 `void mappel::PointEmitterModel::set_hyperparams (const VecT & hyperparams) [inline],[inherited]`

Definition at line 220 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

Referenced by mappel::Gauss2DModel::set_hyperparams(), and mappel::Gauss2DsModel::set_hyperparams().

9.6.4.76 `template<class ImT > void ImageFormat1DBase::set_image_in_stack (ImageStackT & stack, ImageCoordT n, const ImT & im) const [inherited]`

Definition at line 115 of file ImageFormat1DBase.h.

9.6.4.77 `void mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling (double eta_I = -1) [inherited]`

Definition at line 65 of file MCMCAdaptor1D.cpp.

References mappel::PointEmitterModel::default_mean_I, mappel::MCMCAdaptor1D::eta_I, mappel::PointEmitterModel::get_hyperparam_value(), and mappel::MCMCAdaptorBase::sigma_scale.

Referenced by mappel::MCMCAdaptor1D::MCMCAdaptor1D().

9.6.4.78 `void mappel::PointEmitterModel::set_lbound (const ParamT & lbound) [inherited]`

Definition at line 226 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::bounds_epsilon, mappel::PointEmitterModel::lbound, mappel::PointEmitterModel::num_params, mappel::PointEmitterModel::prior, and mappel::PointEmitterModel::ubound.

Referenced by mappel::Gauss1DsModel::set_min_sigma().

9.6.4.79 `void mappel::MCMCAdaptorBase::set_mcmc_num_phases (IdxT num_phases) [protected],[inherited]`

Definition at line 59 of file MCMCAdaptorBase.cpp.

References mappel::MCMCAdaptorBase::num_phases.

Referenced by mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds(), and mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds().

9.6.4.80 `void mappel::MCMCAdaptorBase::set_mcmc_sigma_scale (double scale) [inherited]`

Definition at line 39 of file MCMCAdaptorBase.cpp.

References mappel::MCMCAdaptorBase::global_max_mcmc_sigma_scale, and mappel::MCMCAdaptorBase::sigma_scale.

9.6.4.81 `void mappel::PointEmitterModel::set_param_names (const StringVecT & desc) [inline], [inherited]`

Definition at line 252 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.6.4.82 `void mappel::PointEmitterModel::set_prior (CompositeDist && prior_) [inherited]`

Definition at line 158 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::lbound, mappel::PointEmitterModel::num_hyperparams, mappel::PointEmitterModel::num_params, mappel::PointEmitterModel::prior, and mappel::PointEmitterModel::ubound.

Referenced by mappel::Gauss2DModel::set_prior(), and mappel::Gauss2DsModel::set_prior().

9.6.4.83 `void mappel::PointEmitterModel::set_prior (const CompositeDist & prior_) [inherited]`

Definition at line 149 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::lbound, mappel::PointEmitterModel::num_hyperparams, mappel::PointEmitterModel::num_params, mappel::PointEmitterModel::prior, and mappel::PointEmitterModel::ubound.

9.6.4.84 `void mappel::Gauss1DModel::set_psf_sigma (double new_psf_sigma) [inherited]`

Definition at line 125 of file Gauss1DModel.cpp.

References mappel::PointEmitterModel::check_psf_sigma(), and mappel::Gauss1DModel::psf_sigma.

Referenced by mappel::Gauss1DModel::set_psf_sigma(), and mappel::Gauss2DModel::set_psf_sigma().

9.6.4.85 `void mappel::Gauss1DModel::set_psf_sigma (const VecT & new_psf_sigma) [inline], [inherited]`

Definition at line 131 of file Gauss1DModel.h.

References mappel::Gauss1DModel::set_psf_sigma().

9.6.4.86 `void mappel::PointEmitterModel::set_rng_seed (RngSeedT seed) [static], [inherited]`

Definition at line 110 of file PointEmitterModel.cpp.

References mappel::rng_manager.

9.6.4.87 `void ImageFormat1DBase::set_size (const ImageSizeT & size_) [inherited]`

Definition at line 30 of file ImageFormat1DBase.cpp.

References mappel::ImageFormat1DBase::check_size(), and mappel::ImageFormat1DBase::size.

Referenced by mappel::ImageFormat1DBase::set_size(), mappel::Gauss2DModel::set_size(), and mappel::Gauss2DsModel::set_size().

9.6.4.88 `void ImageFormat1DBase::set_size (const arma::Col< ImageCoordT > & sz) [inline], [inherited]`

Definition at line 75 of file ImageFormat1DBase.h.

References `mappel::ImageFormat1DBase::set_size()`.

9.6.4.89 `void mappel::PointEmitterModel::set_ubound (const ParamT & ubound) [inherited]`

Definition at line 237 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::bounds_epsilon`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::Gauss1DsModel::set_max_sigma()`, and `mappel::Gauss2DsModel::set_max_sigma_ratio()`.

9.6.4.90 `bool mappel::PointEmitterModel::theta_in_bounds (const ParamT & theta) const [inherited]`

Definition at line 257 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsModel::initial_theta_estimate()`, `mappel::Gauss1DModel::make_stencil()`, `mappel::Gauss1DsModel::make_stencil()`, `mappel::Gauss2DModel::make_stencil()`, `mappel::Gauss2DsxModel::make_stencil()`, `mappel::Gauss2DsModel::make_stencil()`, and `mappel::PointEmitterModel::theta_stack_in_bounds()`.

9.6.4.91 `BoolVecT mappel::PointEmitterModel::theta_stack_in_bounds (const ParamVecT & theta) const [inherited]`

Definition at line 296 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, and `mappel::PointEmitterModel::theta_in_bounds()`.

9.6.5 Member Data Documentation

9.6.5.1 `const double mappel::PointEmitterModel::bounds_epsilon = 1.0E-6 [static], [inherited]`

Distance from the boundary to constrain in `bound_theta` and `bounded_theta` methods

Definition at line 52 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::Gauss2DsModel::set_max_sigma_ratio()`, and `mappel::PointEmitterModel::set_ubound()`.

9.6.5.2 `const double mappel::PointEmitterModel::default_alpha_sigma = 2 [static], [inherited]`

Default per-pixel background gamma distribution shape

Definition at line 62 of file PointEmitterModel.h.

9.6.5.3 `const double mappel::PointEmitterModel::default_beta_pos = 3` `[static], [inherited]`

Default position parameter in symmetric beta-distributions

Definition at line 56 of file PointEmitterModel.h.

9.6.5.4 `const double mappel::PointEmitterModel::default_intensity_kappa = 2` `[static], [inherited]`

Default shape for intensity gamma distributions

Definition at line 60 of file PointEmitterModel.h.

9.6.5.5 `const double mappel::PointEmitterModel::default_max_I = INFINITY` `[static], [inherited]`

Default maximum emitter intensity

Definition at line 59 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::make_prior_component_intensity()`.

9.6.5.6 `const double mappel::PointEmitterModel::default_mean_I = 300` `[static], [inherited]`

Default emitter intensity mean

Definition at line 58 of file PointEmitterModel.h.

Referenced by `mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling()`.

9.6.5.7 `const double mappel::PointEmitterModel::default_pixel_mean_bg = 4` `[static], [inherited]`

Default per-pixel mean background counts

Definition at line 61 of file PointEmitterModel.h.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_beta_position()`, `mappel::Gauss1DModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_default_prior_normal_position()`, `mappel::Gauss1DModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, and `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`.

9.6.5.8 `const double mappel::PointEmitterModel::default_sigma_pos = 1` `[static], [inherited]`

Default position parameter in symmetric beta-distributions

Definition at line 57 of file PointEmitterModel.h.

9.6.5.9 `const std::string mappel::Gauss1DModel::DefaultPriorType = "Normal" [static],[inherited]`

Definition at line 53 of file Gauss1DModel.h.

Referenced by `mappel::Gauss1DModel::operator=()`.

9.6.5.10 `const std::string mappel::PointEmitterModel::DefaultSeperableInitEstimator = "TrustRegion" [static],[inherited]`

Estimator name to use in 1D separable initializations

Definition at line 49 of file PointEmitterModel.h.

Referenced by `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsxyModel::initial_theta_estimate()`, and `mappel::Gauss2DsModel::initial_theta_estimate()`.

9.6.5.11 `const std::vector< std::string > mappel::PoissonNoise1DObjective::estimator_names [static],[inherited]`

Definition at line 24 of file PoissonNoise1DObjective.h.

9.6.5.12 `double mappel::MCMCAdaptor1D::eta_bg =0 [protected],[inherited]`

The standard deviation for the normally distributed perturbation to `theta_bg` in the random walk MCMC sampling

Definition at line 33 of file MCMCAdaptor1D.h.

Referenced by `mappel::MCMCAdaptor1D::get_stats()`, `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor1D::operator=()`, `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`, and `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`.

9.6.5.13 `double mappel::MCMCAdaptor1D::eta_l =0 [protected],[inherited]`

The standard deviation for the normally distributed perturbation to `theta_l` in the random walk MCMC sampling

Definition at line 32 of file MCMCAdaptor1D.h.

Referenced by `mappel::MCMCAdaptor1D::get_stats()`, `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor1D::operator=()`, `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`, and `mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling()`.

9.6.5.14 `double mappel::MCMCAdaptor1D::eta_x =0 [protected],[inherited]`

The standard deviation for the normally distributed perturbation to `theta_x` in the random walk MCMC sampling

Definition at line 31 of file MCMCAdaptor1D.h.

Referenced by `mappel::MCMCAdaptor1D::get_stats()`, `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor1D::operator=()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, and `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`.

9.6.5.15 `const double mappel::MCMCAdaptorBase::global_default_mcmc_sigma_scale = 0.05` `[static], [inherited]`

Definition at line 16 of file MCMCAdaptorBase.h.

Referenced by `mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds()`, `mappel::MCMCAdaptor2D::MCMCAdaptor2D()`, and `mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds()`.

9.6.5.16 `const double mappel::MCMCAdaptorBase::global_max_mcmc_sigma_scale = 0.5` `[static], [inherited]`

Definition at line 17 of file MCMCAdaptorBase.h.

Referenced by `mappel::MCMCAdaptorBase::MCMCAdaptorBase()`, and `mappel::MCMCAdaptorBase::set_mcmc_sigma_scale()`.

9.6.5.17 `const double mappel::PointEmitterModel::global_max_psf_sigma = 1E2` `[static], [inherited]`

Global maximum for any `psf_sigma`. Sizes above this value are invalid, and nowhere near useful for practical point emitter localization

Definition at line 54 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::check_psf_sigma()`.

9.6.5.18 `const ImageFormat1DBase::ImageCoordT ImageFormat1DBase::global_max_size = 512` `[static], [inherited]`

Maximum size along any dimension of the image. This is insanely big to catch obvious errors

Definition at line 40 of file ImageFormat1DBase.h.

Referenced by `mappel::ImageFormat1DBase::check_size()`.

9.6.5.19 `const double mappel::PointEmitterModel::global_min_psf_sigma = 1E-1` `[static], [inherited]`

Global minimum for any `psf_sigma`. Sizes below this value are invalid, and nowhere near useful for practical point emitter localization

Definition at line 53 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::check_psf_sigma()`.

9.6.5.20 `const ImageFormat1DBase::ImageCoordT ImageFormat1DBase::global_min_size = 3` `[static], [inherited]`

Minimum size along any dimension of the image.

Definition at line 39 of file ImageFormat1DBase.h.

Referenced by `mappel::ImageFormat1DBase::check_size()`.

9.6.5.21 **ParamT** mappel::PointEmitterModel::lbound [protected],[inherited]

Definition at line 148 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::bound_theta(), mappel::PointEmitterModel::bounded_theta(), mappel::PointEmitterModel::get_lbound(), mappel::PointEmitterModel::get_stats(), mappel::Gauss1DsModel::initial_theta_estimate(), mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::PointEmitterModel::operator=(), mappel::PointEmitterModel::reflected_theta(), mappel::PointEmitterModel::set_bounds(), mappel::PointEmitterModel::set_lbound(), mappel::PointEmitterModel::set_prior(), mappel::PointEmitterModel::set_ubound(), and mappel::PointEmitterModel::theta_in_bounds().

9.6.5.22 **const std::string** mappel::Gauss1DMP::name [static]

Definition at line 34 of file Gauss1DMP.h.

9.6.5.23 **const ImageFormat1DBase::ImageCoordT** ImageFormat1DBase::num_dim = 1 [static],[inherited]

Number of image dimensions.

Definition at line 38 of file ImageFormat1DBase.h.

Referenced by mappel::ImageFormat1DBase::get_stats().

9.6.5.24 **IdxT** mappel::PointEmitterModel::num_hyperparams [protected],[inherited]

Definition at line 147 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::get_num_hyperparams(), mappel::PointEmitterModel::get_stats(), mappel::PointEmitterModel::operator=(), and mappel::PointEmitterModel::set_prior().

9.6.5.25 **IdxT** mappel::PointEmitterModel::num_params [protected],[inherited]

Definition at line 146 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::bound_theta(), mappel::PointEmitterModel::bounded_theta(), mappel::PointEmitterModel::check_param_shape(), mappel::PointEmitterModel::get_num_params(), mappel::PointEmitterModel::get_stats(), mappel::Gauss1DModel::initial_theta_estimate(), mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::PointEmitterModel::make_param(), mappel::PointEmitterModel::make_param_mat(), mappel::PointEmitterModel::make_param_mat_stack(), mappel::PointEmitterModel::make_param_stack(), mappel::PointEmitterModel::operator=(), mappel::PointEmitterModel::reflected_theta(), mappel::PointEmitterModel::set_bounds(), mappel::PointEmitterModel::set_lbound(), mappel::PointEmitterModel::set_prior(), mappel::PointEmitterModel::set_ubound(), and mappel::PointEmitterModel::theta_in_bounds().

9.6.5.26 **IdxT** mappel::MCMCAdaptorBase::num_phases [protected],[inherited]

The number of different sampling phases for candidate selection MCMC. Each phase changes a different subset of variables.

Definition at line 29 of file MCMCAdaptorBase.h.

Referenced by mappel::MCMCAdaptorBase::get_mcmc_num_phases(), mappel::MCMCAdaptorBase::get_stats(), mappel::MCMCAdaptor1Ds::sample_mcmc_candidate(), mappel::MCMCAdaptor2Ds::sample_mcmc_candidate(), mappel::MCMCAdaptor2D::sample_mcmc_candidate(), mappel::MCMCAdaptor1D::sample_mcmc_candidate(), and mappel::MCMCAdaptorBase::set_mcmc_num_phases().

9.6.5.27 CompositeDist mappel::PointEmitterModel::prior [protected],[inherited]

Definition at line 145 of file PointEmitterModel.h.

Referenced by mappel::Gauss2DModel::debug_internal_sum_model_y(), mappel::Gauss2DsModel::debug_internal_sum_model_y(), mappel::Gauss2DModel::Gauss2DModel(), mappel::Gauss2DsModel::Gauss2DsModel(), mappel::PointEmitterModel::get_hyperparam_index(), mappel::PointEmitterModel::get_hyperparam_names(), mappel::PointEmitterModel::get_hyperparam_value(), mappel::PointEmitterModel::get_hyperparams(), mappel::Gauss1DsModel::get_max_sigma(), mappel::Gauss1DsModel::get_min_sigma(), mappel::PointEmitterModel::get_param_names(), mappel::PointEmitterModel::get_prior(), mappel::PointEmitterModel::get_stats(), mappel::PointEmitterModel::has_hyperparam(), mappel::PointEmitterModel::operator=(), mappel::PointEmitterModel::PointEmitterModel(), mappel::PointEmitterModel::rename_hyperparam(), mappel::PointEmitterModel::sample_prior(), mappel::PointEmitterModel::set_bounds(), mappel::PointEmitterModel::set_hyperparam_names(), mappel::PointEmitterModel::set_hyperparam_value(), mappel::PointEmitterModel::set_hyperparams(), mappel::PointEmitterModel::set_lbound(), mappel::Gauss1DsModel::set_max_sigma(), mappel::Gauss1DsModel::set_min_sigma(), mappel::PointEmitterModel::set_param_names(), mappel::PointEmitterModel::set_prior(), and mappel::PointEmitterModel::set_ubound().

9.6.5.28 const StringVecT mappel::Gauss1DModel::prior_types [static],[inherited]

Initial value:

```
= { "Beta",  
                                     "Normal"  
}
```

Definition at line 52 of file Gauss1DModel.h.

Referenced by mappel::Gauss1DModel::operator=().

9.6.5.29 double mappel::Gauss1DModel::psf_sigma [protected],[inherited]

Standard deviation of the fixed-sigma 1D Gaussian PSF in pixels

Definition at line 90 of file Gauss1DModel.h.

Referenced by mappel::Gauss1DModel::Stencil::compute_derivatives(), mappel::Gauss1DModel::get_psf_sigma(), mappel::Gauss1DModel::operator=(), mappel::Gauss1DModel::pixel_grad2(), mappel::Gauss1DModel::pixel_hess(), mappel::Gauss1DModel::pixel_hess_update(), mappel::Gauss1DModel::set_psf_sigma(), and mappel::Gauss1DModel::Stencil::Stencil().

9.6.5.30 double mappel::MCMCAdaptorBase::sigma_scale [protected],[inherited]

A scaling factor for step sizes as a fraction of the size of the domain dimension we are walking in. (0.05 default)

Definition at line 30 of file MCMCAdaptorBase.h.

Referenced by mappel::MCMCAdaptorBase::get_mcmc_sigma_scale(), mappel::MCMCAdaptorBase::get_stats(), mappel::MCMCAdaptor1D::MCMCAdaptor1D(), mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds(), mappel::MCMCAdaptor2D::MCMCAdaptor2D(), mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds(), mappel::MCMCAdaptor1D::set_background_mcmc_sampling(), mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling(), and mappel::MCMCAdaptorBase::set_mcmc_sigma_scale().

9.6.5.31 `ImageSizeT mappel::ImageFormat1DBase::size` [protected],[inherited]

Number of pixels in X dimension for 1D image

Definition at line 65 of file `ImageFormat1DBase.h`.

Referenced by `mappel::ImageFormat1DBase::check_image_shape()`, `mappel::Gauss1DsModel::Stencil::compute_derivatives()`, `mappel::Gauss1DModel::Stencil::compute_derivatives()`, `mappel::ImageFormat1DBase::get_num_pixels()`, `mappel::ImageFormat1DBase::get_size()`, `mappel::Gauss1DModel::initial_theta_estimate()`, `mappel::Gauss1DsModel::initial_theta_estimate()`, `mappel::ImageFormat1DBase::make_image()`, `mappel::ImageFormat1DBase::make_image_stack()`, `mappel::ImageFormat1DBase::set_size()`, `mappel::Gauss1DsModel::Stencil::Stencil()`, and `mappel::Gauss1DModel::Stencil::Stencil()`.

9.6.5.32 `ParamT mappel::PointEmitterModel::ubound` [protected],[inherited]

Definition at line 148 of file `PointEmitterModel.h`.

Referenced by `mappel::PointEmitterModel::bound_theta()`, `mappel::PointEmitterModel::bounded_theta()`, `mappel::PointEmitterModel::get_stats()`, `mappel::PointEmitterModel::get_ubound()`, `mappel::Gauss1DsModel::initial_theta_estimate()`, `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsModel::initial_theta_estimate()`, `mappel::PointEmitterModel::operator=()`, `mappel::PointEmitterModel::reflected_theta()`, `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::PointEmitterModel::set_prior()`, `mappel::PointEmitterModel::set_ubound()`, and `mappel::PointEmitterModel::theta_in_bounds()`.

The documentation for this class was generated from the following files:


- [Gauss1DMAP.h](#)
- [Gauss1DMAP.cpp](#)

9.7 `mappel::Gauss1DMLE` Class Reference

A 1D Gaussian with fixed PSF under an Poisson noise assumption and maximum-likelihood objective.

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/Gauss1DMLE.h>
```

Inheritance diagram for `mappel::Gauss1DMLE`:

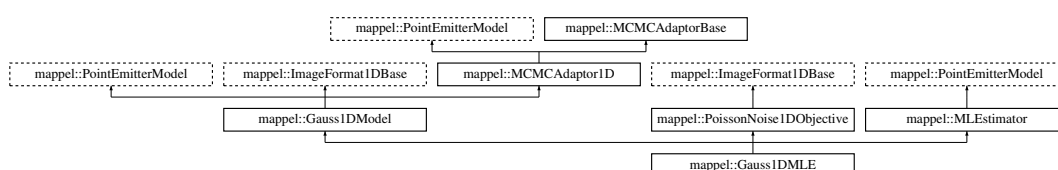

Public Types

- using `StencilVecT` = `std::vector< Stencil >`
- using `ParamT` = `arma::vec`
- using `ParamVecT` = `arma::mat`
- using `ImageCoordT` = `uint32_t`
- using `ImagePixelT` = `double`
- template<class `CoordT` >
using `ImageSizeShapeT` = `CoordT`
- template<class `CoordT` >
using `ImageSizeVecShapeT` = `arma::Col< CoordT >`
- using `ImageSizeT` = `ImageSizeShapeT< ImageCoordT >`
- using `ImageSizeVecT` = `ImageSizeVecShapeT< ImageCoordT >`
- template<class `PixelT` >
using `ImageShapeT` = `arma::Col< PixelT >`
- template<class `PixelT` >
using `ImageStackShapeT` = `arma::Mat< PixelT >`
- using `ImageT` = `ImageShapeT< ImagePixelT >`
- using `ImageStackT` = `ImageStackShapeT< ImagePixelT >`
- using `ModelDataT` = `ImageT`
- using `ModelDataStackT` = `ImageStackT`

Public Member Functions

- `Gauss1DMLE` (`arma::Col< ImageCoordT > size`, `VecT psf_sigma`, `const std::string &prior_type=DefaultPriorType`)
- `Gauss1DMLE` (`ImageSizeT size`, `double psf_sigma`, `const std::string &prior_type=DefaultPriorType`)
- `Gauss1DMLE` (`ImageSizeT size`, `double psf_sigma`, `CompositeDist &&prior`)
- `Gauss1DMLE` (`ImageSizeT size`, `double psf_sigma`, `const CompositeDist &prior`)
- `Gauss1DMLE` (`const Gauss1DMLE &o`)
- `Gauss1DMLE & operator=` (`const Gauss1DMLE &o`)
- `Gauss1DMLE` (`Gauss1DMLE &&o`)
- `Gauss1DMLE & operator=` (`Gauss1DMLE &&o`)
- `double get_psf_sigma` () `const`
- `double get_psf_sigma` (`IdxT idx`) `const`
- `void set_psf_sigma` (`double new_psf_sigma`)
- `void set_psf_sigma` (`const VecT &new_psf_sigma`)
- `StatsT get_stats` () `const`
- `Stencil make_stencil` (`const ParamT &theta`, `bool compute_derivatives=true`) `const`
Make a new Model::Stencil object at theta.
- `double pixel_model_value` (`IdxT i`, `const Stencil &s`) `const`
- `void pixel_grad` (`IdxT i`, `const Stencil &s`, `ParamT &pgrad`) `const`
- `void pixel_grad2` (`IdxT i`, `const Stencil &s`, `ParamT &pgrad2`) `const`
- `void pixel_hess` (`IdxT i`, `const Stencil &s`, `MatT &hess`) `const`
- `void pixel_hess_update` (`IdxT i`, `const Stencil &s`, `double dm_ratio_m1`, `double dmm_ratio`, `ParamT &grad`, `MatT &hess`) `const`
pixel derivative inner loop calculations.
- `Stencil initial_theta_estimate` (`const ImageT &im`) `const`
Fast, heuristic estimate of initial theta.
- `Stencil initial_theta_estimate` (`const ImageT &im`, `const ParamT &theta_init`) `const`

- `IdxT get_num_params () const`
- `void check_param_shape (const ParamT &theta) const`
- `void check_param_shape (const ParamVecT &theta) const`
- `void check_psf_sigma (double psf_sigma) const`
- `void check_psf_sigma (const VecT &psf_sigma) const`
- `ParamT make_param () const`
- `template<class FillT >`
`ParamT make_param (FillT fill) const`
- `ParamVecT make_param_stack (IdxT n) const`
- `template<class FillT >`
`ParamVecT make_param_stack (IdxT n, FillT fill) const`
- `MatT make_param_mat () const`
- `template<class FillT >`
`MatT make_param_mat (FillT fill) const`
- `CubeT make_param_mat_stack (IdxT n) const`
- `template<class FillT >`
`CubeT make_param_mat_stack (IdxT n, FillT fill) const`
- `CompositeDist & get_prior ()`
- `const CompositeDist & get_prior () const`
- `void set_prior (CompositeDist &&prior_)`
- `void set_prior (const CompositeDist &prior_)`
- `IdxT get_num_hyperparams () const`
- `void set_hyperparams (const VecT &hyperparams)`
- `VecT get_hyperparams () const`
- `bool has_hyperparam (const std::string &name) const`
- `double get_hyperparam_value (const std::string &name) const`
- `int get_hyperparam_index (const std::string &name) const`
- `void set_hyperparam_value (const std::string &name, double value)`
- `void rename_hyperparam (const std::string &old_name, const std::string &new_name)`
- `StringVecT get_param_names () const`
- `void set_param_names (const StringVecT &desc)`
- `StringVecT get_hyperparam_names () const`
- `void set_hyperparam_names (const StringVecT &desc)`
- `template<class RngT >`
`ParamT sample_prior (RngT &rng) const`
- `ParamT sample_prior () const`
- `void set_bounds (const ParamT &lbound, const ParamT &ubound)`
- `void set_lbound (const ParamT &lbound)`
- `void set_ubound (const ParamT &ubound)`
- `const ParamT & get_lbound () const`
- `const ParamT & get_ubound () const`
- `bool theta_in_bounds (const ParamT &theta) const`
- `void bound_theta (ParamT &theta, double epsilon=bounds_epsilon) const`
- `ParamT bounded_theta (const ParamT &theta, double epsilon=bounds_epsilon) const`
- `ParamT reflected_theta (const ParamT &theta) const`
- `BoolVecT theta_stack_in_bounds (const ParamVecT &theta) const`
- `ParamVecT bounded_theta_stack (const ParamVecT &theta, double epsilon=bounds_epsilon) const`
- `ParamVecT reflected_theta_stack (const ParamVecT &theta) const`
- `ImageT make_image () const`
- `ImageStackT make_image_stack (ImageCoordT n) const`
- `ImageCoordT get_size_image_stack (const ImageStackT &stack) const`

- `ImageT get_image_from_stack` (const `ImageStackT` &stack, `ImageCoordT` n) const
- `template<class ImT >`
`void set_image_in_stack` (`ImageStackT` &stack, `ImageCoordT` n, const `ImT` &im) const
- `ImageSizeT get_size` () const
- `ImageCoordT get_size` (`IdxT` idx) const
- `ImageCoordT get_num_pixels` () const
- `void set_size` (const `ImageSizeT` &size_)
- `void set_size` (const `arma::Col`< `ImageCoordT` > &sz)
- `void check_image_shape` (const `ImageT` &im) const
Check the shape of a single images is correct for model size.
- `void check_image_shape` (const `ImageStackT` &ims) const
Check the shape of a stack of images is correct for model size.
- `void sample_mcmc_candidate` (`IdxT` sample_index, `ParamT` &candidate, double step_scale=1.0) const
- `void sample_mcmc_candidate` (`IdxT` sample_index, `ParamT` &candidate, const `IdxVecT` &fixed_parameters_↔ mask, double step_scale=1.0) const
- `void set_intensity_mcmc_sampling` (double eta_l=-1)
- `void set_background_mcmc_sampling` (double eta_bg=-1)
- `void set_mcmc_sigma_scale` (double scale)
- `double get_mcmc_sigma_scale` () const
- `IdxT get_mcmc_num_phases` () const

Static Public Member Functions

- static `CompositeDist make_default_prior` (`IdxT` size, const `std::string` &prior_type)
- static `CompositeDist make_default_prior_beta_position` (`IdxT` size)
- static `CompositeDist make_default_prior_normal_position` (`IdxT` size)
- static `CompositeDist make_prior_beta_position` (`IdxT` size, double beta_xpos, double mean_l, double kappa_l, double mean_bg, double kappa_bg)
- static `CompositeDist make_prior_normal_position` (`IdxT` size, double sigma_xpos, double mean_l, double kappa_l, double mean_bg, double kappa_bg)
- static `prior_hessian::TruncatedNormalDist make_prior_component_position_normal` (`IdxT` size, double pos_↔ sigma=default_sigma_pos)
- static `prior_hessian::ScaledSymmetricBetaDist make_prior_component_position_beta` (`IdxT` size, double pos_↔ beta=default_beta_pos)
- static `prior_hessian::TruncatedGammaDist make_prior_component_intensity` (double mean=default_mean_↔ l, double kappa=default_intensity_kappa)
- static `prior_hessian::TruncatedParetoDist make_prior_component_sigma` (double min_sigma, double max_↔ sigma, double alpha=default_alpha_sigma)
- static `void set_rng_seed` (`RngSeedT` seed)
- static `ParallelRngManagerT & get_rng_manager` ()
- static `ParallelRngGeneratorT & get_rng_generator` ()
- static `void check_size` (const `ImageSizeT` &size_)

Check the size argument for the model.

Static Public Attributes

- static const std::string [name](#)
- static const [StringVecT](#) [prior_types](#)
- static const std::string [DefaultPriorType](#) = "Normal"
- static const std::string [DefaultSeperableInitEstimator](#) = "TrustRegion"
- static const double [bounds_epsilon](#) = 1.0E-6
- static const double [global_min_psf_sigma](#) = 1E-1
- static const double [global_max_psf_sigma](#) = 1E2
- static const double [default_beta_pos](#) = 3
- static const double [default_sigma_pos](#) = 1
- static const double [default_mean_l](#) = 300
- static const double [default_max_l](#) = INFINITY
- static const double [default_intensity_kappa](#) = 2
- static const double [default_pixel_mean_bg](#) = 4
- static const double [default_alpha_sigma](#) = 2
- static const [ImageCoordT](#) [num_dim](#) = 1
- static const [ImageCoordT](#) [global_min_size](#) = 3
- static const [ImageCoordT](#) [global_max_size](#) = 512
- static const double [global_default_mcmc_sigma_scale](#) = 0.05
- static const double [global_max_mcmc_sigma_scale](#) = 0.5
- static const std::vector< std::string > [estimator_names](#)

Protected Member Functions

- void [set_mcmc_num_phases](#) ([IdxT](#) [num_phases](#))

Protected Attributes

- double [psf_sigma](#)
- CompositeDist [prior](#)
- [IdxT](#) [num_params](#)
- [IdxT](#) [num_hyperparams](#)
- [ParamT](#) [lbound](#)
- [ParamT](#) [ubound](#)
- [ImageSizeT](#) [size](#)
- double [eta_x](#) =0
- double [eta_l](#) =0
- double [eta_bg](#) =0
- [IdxT](#) [num_phases](#)
- double [sigma_scale](#)

9.7.1 Detailed Description

A 1D Gaussian with fixed PSF under an Poisson noise assumption and maximum-likelihood objective.

Model: [Gauss1DModel](#) - 1D Gaussian PSF with fixed PSF sigma Objective: [PoissonNoise1DObjective](#) - Poisson noise model for 1D Estimator: [MLEstimator](#) - Pure-likelihood estimator

Definition at line 23 of file [Gauss1DMLE.h](#).

9.7.2 Member Typedef Documentation

9.7.2.1 using mappel::ImageFormat1DBase::ImageCoordT = uint32_t [inherited]

Image size coordinate storage type

Definition at line 25 of file ImageFormat1DBase.h.

9.7.2.2 using mappel::ImageFormat1DBase::ImagePixelT = double [inherited]

Image pixel storage type

Definition at line 26 of file ImageFormat1DBase.h.

9.7.2.3 template<class PixelT > using mappel::ImageFormat1DBase::ImageShapeT = arma::Col<PixelT> [inherited]

Shape of the data type for a single image

Definition at line 33 of file ImageFormat1DBase.h.

9.7.2.4 template<class CoordT > using mappel::ImageFormat1DBase::ImageSizeShapeT = CoordT [inherited]

Shape of the data type to store 1-image's coordinates

Definition at line 28 of file ImageFormat1DBase.h.

9.7.2.5 using mappel::ImageFormat1DBase::ImageSizeT = ImageSizeShapeT<ImageCoordT> [inherited]

Data type for a single image size

Definition at line 30 of file ImageFormat1DBase.h.

9.7.2.6 template<class CoordT > using mappel::ImageFormat1DBase::ImageSizeVecShapeT = arma::Col<CoordT> [inherited]

Shape of the data type to store a vector of image's coordinates

Definition at line 29 of file ImageFormat1DBase.h.

9.7.2.7 using mappel::ImageFormat1DBase::ImageSizeVecT = ImageSizeVecShapeT<ImageCoordT> [inherited]

Data type for a sequence of image sizes

Definition at line 31 of file ImageFormat1DBase.h.

9.7.2.8 `template<class PixelT > using mappel::ImageFormat1DBase::ImageStackShapeT = arma::Mat<PixelT>`
`[inherited]`

Shape of the data type for a sequence of images

Definition at line 34 of file ImageFormat1DBase.h.

9.7.2.9 `using mappel::ImageFormat1DBase::ImageStackT = ImageStackShapeT<ImagePixelT>`
`[inherited]`

Data type to represent a sequence of images

Definition at line 36 of file ImageFormat1DBase.h.

9.7.2.10 `using mappel::ImageFormat1DBase::ImageT = ImageShapeT<ImagePixelT>` `[inherited]`

Data type to represent single image

Definition at line 35 of file ImageFormat1DBase.h.

9.7.2.11 `using mappel::PoissonNoise1DObjective::ModelDataStackT = ImageStackT` `[inherited]`

Objective function data stack type: 1D double precision image stack, of images gain-corrected to approximate photons counts

Definition at line 26 of file PoissonNoise1DObjective.h.

9.7.2.12 `using mappel::PoissonNoise1DObjective::ModelDataT = ImageT` `[inherited]`

Objective function data type: 1D double precision image, gain-corrected to approximate photons counts

Definition at line 25 of file PoissonNoise1DObjective.h.

9.7.2.13 `using mappel::PointEmitterModel::ParamT = arma::vec` `[inherited]`

Parameter vector

Definition at line 47 of file PointEmitterModel.h.

9.7.2.14 `using mappel::PointEmitterModel::ParamVecT = arma::mat` `[inherited]`

Vector of parameter vectors

Definition at line 48 of file PointEmitterModel.h.

9.7.2.15 `using mappel::Gauss1DModel::StencilVecT = std::vector<Stencil>` `[inherited]`

Definition at line 49 of file Gauss1DModel.h.

9.7.3 Constructor & Destructor Documentation

9.7.3.1 `mappel::Gauss1DMLE::Gauss1DMLE (arma::Col< ImageCoordT > size, VecT psf_sigma, const std::string & prior_type = DefaultPriorType)`

Definition at line 11 of file Gauss1DMLE.cpp.

9.7.3.2 `mappel::Gauss1DMLE::Gauss1DMLE (ImageSizeT size, double psf_sigma, const std::string & prior_type = DefaultPriorType)`

Definition at line 15 of file Gauss1DMLE.cpp.

9.7.3.3 `mappel::Gauss1DMLE::Gauss1DMLE (ImageSizeT size, double psf_sigma, CompositeDist && prior)`

Definition at line 19 of file Gauss1DMLE.cpp.

9.7.3.4 `mappel::Gauss1DMLE::Gauss1DMLE (ImageSizeT size, double psf_sigma, const CompositeDist & prior)`

Definition at line 27 of file Gauss1DMLE.cpp.

9.7.3.5 `mappel::Gauss1DMLE::Gauss1DMLE (const Gauss1DMLE & o)`

Definition at line 35 of file Gauss1DMLE.cpp.

9.7.3.6 `mappel::Gauss1DMLE::Gauss1DMLE (Gauss1DMLE && o)`

Definition at line 43 of file Gauss1DMLE.cpp.

9.7.4 Member Function Documentation

9.7.4.1 `void mappel::PointEmitterModel::bound_theta (ParamT & theta, double epsilon = bounds_epsilon) const`
[*inherited*]

Definition at line 248 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

9.7.4.2 `PointEmitterModel::ParamT mappel::PointEmitterModel::bounded_theta (const ParamT & theta, double epsilon = bounds_epsilon) const` [*inherited*]

Definition at line 265 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::PointEmitterModel::bounded_theta_stack()`.

9.7.4.3 `PointEmitterModel::ParamVecT mappel::PointEmitterModel::bounded_theta_stack (const ParamVecT & theta, double epsilon = bounds_epsilon) const` `[inherited]`

Definition at line 306 of file `PointEmitterModel.cpp`.

References `mappel::PointEmitterModel::bounded_theta()`, `mappel::PointEmitterModel::check_param_shape()`, and `mappel::PointEmitterModel::make_param_stack()`.

9.7.4.4 `void ImageFormat1DBase::check_image_shape (const ImageT & im) const` `[inherited]`

Check the shape of a single images is correct for model size.

Definition at line 59 of file `ImageFormat1DBase.cpp`.

References `mappel::ImageFormat1DBase::size`.

9.7.4.5 `void ImageFormat1DBase::check_image_shape (const ImageStackT & ims) const` `[inherited]`

Check the shape of a stack of images is correct for model size.

Definition at line 71 of file `ImageFormat1DBase.cpp`.

References `mappel::ImageFormat1DBase::size`.

9.7.4.6 `void mappel::PointEmitterModel::check_param_shape (const ParamT & theta) const` `[inherited]`

Definition at line 167 of file `PointEmitterModel.cpp`.

References `mappel::PointEmitterModel::num_params`.

Referenced by `mappel::PointEmitterModel::bound_theta()`, `mappel::PointEmitterModel::bounded_theta()`, `mappel::PointEmitterModel::bounded_theta_stack()`, `mappel::PointEmitterModel::reflected_theta()`, `mappel::PointEmitterModel::reflected_theta_stack()`, `mappel::PointEmitterModel::theta_in_bounds()`, and `mappel::PointEmitterModel::theta_stack_in_bounds()`.

9.7.4.7 `void mappel::PointEmitterModel::check_param_shape (const ParamVecT & theta) const` `[inherited]`

Definition at line 176 of file `PointEmitterModel.cpp`.

References `mappel::PointEmitterModel::num_params`.

9.7.4.8 `void mappel::PointEmitterModel::check_psf_sigma (double psf_sigma) const` `[inherited]`

Definition at line 185 of file `PointEmitterModel.cpp`.

References `mappel::PointEmitterModel::global_max_psf_sigma`, and `mappel::PointEmitterModel::global_min_psf_sigma`.

Referenced by `mappel::Gauss1DModel::Gauss1DModel()`, `mappel::Gauss2DModel::Gauss2DModel()`, `mappel::Gauss2DsModel::Gauss2DsModel()`, `mappel::Gauss1DsModel::set_max_sigma()`, `mappel::Gauss2DsModel::set_max_sigma()`, `mappel::Gauss1DsModel::set_min_sigma()`, `mappel::Gauss2DsModel::set_min_sigma()`, `mappel::Gauss1DModel::set_psf_sigma()`, and `mappel::Gauss2DModel::set_psf_sigma()`.

9.7.4.9 `void mappel::PointEmitterModel::check_psf_sigma (const VecT & psf_sigma) const` [inherited]

Definition at line 197 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::global_max_psf_sigma`, and `mappel::PointEmitterModel::global_min_psf_sigma`.

9.7.4.10 `void ImageFormat1DBase::check_size (const ImageSizeT & size_)` [static],[inherited]

Check the size argument for the model.

Definition at line 39 of file ImageFormat1DBase.cpp.

References `mappel::ImageFormat1DBase::global_max_size`, and `mappel::ImageFormat1DBase::global_min_size`.

Referenced by `mappel::ImageFormat1DBase::ImageFormat1DBase()`, and `mappel::ImageFormat1DBase::set_size()`.

9.7.4.11 `int mappel::PointEmitterModel::get_hyperparam_index (const std::string & name) const` [inline],[inherited]

Definition at line 236 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.7.4.12 `StringVecT mappel::PointEmitterModel::get_hyperparam_names () const` [inline],[inherited]

Definition at line 256 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.7.4.13 `double mappel::PointEmitterModel::get_hyperparam_value (const std::string & name) const` [inline],[inherited]

Definition at line 232 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

Referenced by `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`, and `mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling()`.

9.7.4.14 `PointEmitterModel::ParamT mappel::PointEmitterModel::get_hyperparams () const` [inline],[inherited]

Definition at line 224 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.7.4.15 `ImageFormat1DBase::ImageT ImageFormat1DBase::get_image_from_stack (const ImageStackT & stack, ImageCoordT n) const` [inline],[inherited]

Definition at line 108 of file ImageFormat1DBase.h.

9.7.4.16 `const PointEmitterModel::ParamT & mappel::PointEmitterModel::get_lbound () const` [inline],
[inherited]

Definition at line 212 of file PointEmitterModel.h.

References mappel::PointEmitterModel::lbound.

Referenced by mappel::MCMCAdaptor1D::MCMCAdaptor1D(), mappel::MCMCAdaptor2D::MCMCAdaptor2D(), and mappel::MCMCAdaptor1D::set_background_mcmc_sampling().

9.7.4.17 `IdxT mappel::MCMCAdaptorBase::get_mcmc_num_phases () const` [inherited]

Definition at line 56 of file MCMCAdaptorBase.cpp.

References mappel::MCMCAdaptorBase::num_phases.

9.7.4.18 `double mappel::MCMCAdaptorBase::get_mcmc_sigma_scale () const` [inherited]

Definition at line 53 of file MCMCAdaptorBase.cpp.

References mappel::MCMCAdaptorBase::sigma_scale.

9.7.4.19 `IdxT mappel::PointEmitterModel::get_num_hyperparams () const` [inline],[inherited]

Definition at line 208 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_hyperparams.

9.7.4.20 `IdxT mappel::PointEmitterModel::get_num_params () const` [inline],[inherited]

Definition at line 160 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.7.4.21 `ImageFormat1DBase::ImageCoordT ImageFormat1DBase::get_num_pixels () const` [inline],
[inherited]

Definition at line 82 of file ImageFormat1DBase.h.

References mappel::ImageFormat1DBase::size.

Referenced by mappel::ImageFormat1DBase::get_stats().

9.7.4.22 `StringVecT mappel::PointEmitterModel::get_param_names () const` [inline],[inherited]

Definition at line 248 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.7.4.23 CompositeDist & mappel::PointEmitterModel::get_prior () [inline],[inherited]

Definition at line 200 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

Referenced by mappel::Gauss2DModel::update_internal_1Dsum_estimators(), and mappel::Gauss2DsModel::update_internal_1Dsum_estimators().

9.7.4.24 const CompositeDist & mappel::PointEmitterModel::get_prior () const [inline],[inherited]

Definition at line 204 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.7.4.25 double mappel::Gauss1DModel::get_psf_sigma () const [inline],[inherited]

Definition at line 127 of file Gauss1DModel.h.

References mappel::Gauss1DModel::psf_sigma.

Referenced by mappel::Gauss1DModel::get_stats().

9.7.4.26 double mappel::Gauss1DModel::get_psf_sigma (IdxT idx) const [inherited]

Definition at line 131 of file Gauss1DModel.cpp.

References mappel::Gauss1DModel::psf_sigma.

9.7.4.27 ParallelRngGeneratorT & mappel::PointEmitterModel::get_rng_generator () [static],[inherited]

Definition at line 120 of file PointEmitterModel.cpp.

References mappel::rng_manager.

9.7.4.28 ParallelRngManagerT & mappel::PointEmitterModel::get_rng_manager () [static],[inherited]

Definition at line 115 of file PointEmitterModel.cpp.

References mappel::rng_manager.

9.7.4.29 ImageFormat1DBase::ImageSizeT ImageFormat1DBase::get_size () const [inline],[inherited]

Definition at line 71 of file ImageFormat1DBase.h.

References mappel::ImageFormat1DBase::size.

Referenced by mappel::ImageFormat1DBase::get_stats().

9.7.4.30 `ImageFormat1DBase::ImageCoordT ImageFormat1DBase::get_size (IdxT idx) const` `[inherited]`

Definition at line 20 of file ImageFormat1DBase.cpp.

References `mappel::ImageFormat1DBase::size`.

9.7.4.31 `ImageFormat1DBase::ImageCoordT ImageFormat1DBase::get_size_image_stack (const ImageStackT & stack) const` `[inline],[inherited]`

Definition at line 101 of file ImageFormat1DBase.h.

9.7.4.32 `StatsT mappel::Gauss1DModel::get_stats () const` `[inherited]`

Definition at line 178 of file Gauss1DModel.cpp.

References `mappel::Gauss1DModel::get_psf_sigma()`, `mappel::MCMCAdaptor1D::get_stats()`, `mappel::ImageFormat1DBase::get_stats()`, and `mappel::PointEmitterModel::get_stats()`.

9.7.4.33 `const PointEmitterModel::ParamT & mappel::PointEmitterModel::get_ubound () const` `[inline],[inherited]`

Definition at line 216 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::Gauss2DsxyModel::get_max_sigma_ratio()`, `mappel::Gauss2DsModel::get_max_sigma_ratio()`, `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor2D::MCMCAdaptor2D()`, `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`, and `mappel::Gauss2DsModel::set_max_sigma_ratio()`.

9.7.4.34 `bool mappel::PointEmitterModel::has_hyperparam (const std::string & name) const` `[inline],[inherited]`

Definition at line 228 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.7.4.35 `Gauss1DModel::Stencil mappel::Gauss1DModel::initial_theta_estimate (const ImageT & im) const` `[inline],[inherited]`

Fast, heuristic estimate of initial theta.

Definition at line 169 of file Gauss1DModel.h.

References `mappel::PointEmitterModel::make_param()`, and `mappel::Gauss1DModel::Stencil::theta`.

9.7.4.36 `Gauss1DModel::Stencil mappel::Gauss1DModel::initial_theta_estimate (const ImageT & im, const ParamT & theta_init) const` `[inherited]`

Definition at line 207 of file Gauss1DModel.cpp.

References `mappel::Gauss1DModel::Stencil::bg()`, `mappel::Gauss1DModel::Stencil::l()`, `mappel::Gauss1DModel::make_stencil()`, `mappel::PointEmitterModel::num_params`, and `mappel::ImageFormat1DBase::size`.

9.7.4.37 CompositeDist mappel::Gauss1DModel::make_default_prior (*IdxT size*, const std::string & *prior_type*) [static],
[inherited]

Definition at line 59 of file Gauss1DModel.cpp.

References mappel::istarts_with(), mappel::Gauss1DModel::make_default_prior_beta_position(), and mappel::Gauss1DModel::make_default_prior_normal_position().

9.7.4.38 CompositeDist mappel::Gauss1DModel::make_default_prior_beta_position (*IdxT size*) [static],
[inherited]

Definition at line 80 of file Gauss1DModel.cpp.

References mappel::PointEmitterModel::default_pixel_mean_bg, mappel::PointEmitterModel::make_prior_component←_intensity(), and mappel::PointEmitterModel::make_prior_component_position_beta().

Referenced by mappel::Gauss1DModel::make_default_prior().

9.7.4.39 CompositeDist mappel::Gauss1DModel::make_default_prior_normal_position (*IdxT size*) [static],
[inherited]

Definition at line 90 of file Gauss1DModel.cpp.

References mappel::PointEmitterModel::default_pixel_mean_bg, mappel::PointEmitterModel::make_prior_component←_intensity(), and mappel::PointEmitterModel::make_prior_component_position_normal().

Referenced by mappel::Gauss1DModel::make_default_prior().

9.7.4.40 ImageFormat1DBase::ImageT ImageFormat1DBase::make_image () const [inline], [inherited]

Definition at line 87 of file ImageFormat1DBase.h.

References mappel::ImageFormat1DBase::size.

9.7.4.41 ImageFormat1DBase::ImageStackT ImageFormat1DBase::make_image_stack (*ImageCoordT n*) const
[inline], [inherited]

Definition at line 94 of file ImageFormat1DBase.h.

References mappel::ImageFormat1DBase::size.

9.7.4.42 PointEmitterModel::ParamT mappel::PointEmitterModel::make_param () const [inline], [inherited]

Definition at line 164 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

Referenced by mappel::Gauss1DModel::initial_theta_estimate(), mappel::Gauss1DsModel::initial_theta_estimate(), mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsxyModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::Gauss1DModel::pixel_hess_update(), mappel::Gauss1DsModel::pixel_hess_update(), mappel::Gauss2DModel::pixel_hess_update(), and mappel::Gauss2DsModel::pixel_hess←update().

9.7.4.43 `template<class FillT > PointEmitterModel::ParamT mappel::PointEmitterModel::make_param (FillT fill) const`
`[inherited]`

Definition at line 181 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.7.4.44 `MatT mappel::PointEmitterModel::make_param_mat () const` `[inline],[inherited]`

Definition at line 172 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.7.4.45 `template<class FillT > MatT mappel::PointEmitterModel::make_param_mat (FillT fill) const` `[inherited]`

Definition at line 191 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.7.4.46 `CubeT mappel::PointEmitterModel::make_param_mat_stack (IdxT n) const` `[inline],[inherited]`

Definition at line 176 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.7.4.47 `template<class FillT > CubeT mappel::PointEmitterModel::make_param_mat_stack (IdxT n, FillT fill) const`
`[inherited]`

Definition at line 196 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.7.4.48 `PointEmitterModel::ParamVecT mappel::PointEmitterModel::make_param_stack (IdxT n) const` `[inline],[inherited]`

Definition at line 168 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

Referenced by mappel::PointEmitterModel::bounded_theta_stack(), and mappel::PointEmitterModel::reflected_theta_stack().

9.7.4.49 `template<class FillT > PointEmitterModel::ParamVecT mappel::PointEmitterModel::make_param_stack (IdxT n, FillT fill) const` `[inherited]`

Definition at line 186 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.7.4.50 **CompositeDist** mappel::Gauss1DModel::make_prior_beta_position (*IdxT size*, double *beta_xpos*, double *mean_l*, double *kappa_l*, double *mean_bg*, double *kappa_bg*) [static],[inherited]

Definition at line 101 of file Gauss1DModel.cpp.

References mappel::PointEmitterModel::make_prior_component_intensity(), and mappel::PointEmitterModel::make_prior_component_position_beta().

Referenced by mappel::Gauss2DModel::make_internal_1Dsum_estimator().

9.7.4.51 **prior_hessian::TruncatedGammaDist** mappel::PointEmitterModel::make_prior_component_intensity (double *mean = default_mean_l*, double *kappa = default_intensity_kappa*) [static],[inherited]

Definition at line 98 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::default_max_l.

Referenced by mappel::Gauss1DsModel::make_default_prior_beta_position(), mappel::Gauss2DModel::make_default_prior_beta_position(), mappel::Gauss1DModel::make_default_prior_beta_position(), mappel::Gauss2DsModel::make_default_prior_beta_position(), mappel::Gauss2DModel::make_default_prior_normal_position(), mappel::Gauss1DsModel::make_default_prior_normal_position(), mappel::Gauss1DModel::make_default_prior_normal_position(), mappel::Gauss2DsModel::make_default_prior_normal_position(), mappel::Gauss2DModel::make_prior_beta_position(), mappel::Gauss1DsModel::make_prior_beta_position(), mappel::Gauss1DModel::make_prior_beta_position(), mappel::Gauss2DsModel::make_prior_beta_position(), mappel::Gauss2DModel::make_prior_normal_position(), mappel::Gauss1DsModel::make_prior_normal_position(), mappel::Gauss1DModel::make_prior_normal_position(), and mappel::Gauss2DsModel::make_prior_normal_position().

9.7.4.52 **prior_hessian::ScaledSymmetricBetaDist** mappel::PointEmitterModel::make_prior_component_position_beta (*IdxT size*, double *pos_beta = default_beta_pos*) [static],[inherited]

Definition at line 92 of file PointEmitterModel.cpp.

Referenced by mappel::Gauss1DsModel::make_default_prior_beta_position(), mappel::Gauss2DModel::make_default_prior_beta_position(), mappel::Gauss1DModel::make_default_prior_beta_position(), mappel::Gauss2DsModel::make_default_prior_beta_position(), mappel::Gauss1DsModel::make_prior_beta_position(), mappel::Gauss2DModel::make_prior_beta_position(), and mappel::Gauss2DsModel::make_prior_beta_position().

9.7.4.53 **prior_hessian::TruncatedNormalDist** mappel::PointEmitterModel::make_prior_component_position_normal (*IdxT size*, double *pos_sigma = default_sigma_pos*) [static],[inherited]

Definition at line 85 of file PointEmitterModel.cpp.

Referenced by mappel::Gauss1DsModel::make_default_prior_normal_position(), mappel::Gauss2DModel::make_default_prior_normal_position(), mappel::Gauss1DModel::make_default_prior_normal_position(), mappel::Gauss2DsModel::make_default_prior_normal_position(), mappel::Gauss2DModel::make_prior_normal_position(), mappel::Gauss1DsModel::make_prior_normal_position(), mappel::Gauss1DModel::make_prior_normal_position(), and mappel::Gauss2DsModel::make_prior_normal_position().

9.7.4.54 **prior_hessian::TruncatedParetoDist** `mappel::PointEmitterModel::make_prior_component_sigma (double min_sigma, double max_sigma, double alpha = default_alpha_sigma)` [static],[inherited]

Definition at line 104 of file `PointEmitterModel.cpp`.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, `mappel::Gauss1DsModel::make_prior_beta_position()`, `mappel::Gauss2DsModel::make_prior_beta_position()`, `mappel::Gauss1DsModel::make_prior_normal_position()`, and `mappel::Gauss2DsModel::make_prior_normal_position()`.

9.7.4.55 **CompositeDist** `mappel::Gauss1DModel::make_prior_normal_position (IdxT size, double sigma_xpos, double mean_l, double kappa_l, double mean_bg, double kappa_bg)` [static],[inherited]

Definition at line 114 of file `Gauss1DModel.cpp`.

References `mappel::PointEmitterModel::make_prior_component_intensity()`, and `mappel::PointEmitterModel::make_prior_component_position_normal()`.

Referenced by `mappel::Gauss2DModel::make_internal_1Dsum_estimator()`.

9.7.4.56 **Gauss1DModel::Stencil** `mappel::Gauss1DModel::make_stencil (const ParamT & theta, bool compute_derivatives = true) const` [inline],[inherited]

Make a new `Model::Stencil` object at `theta`.

Stencils store all of the important calculations necessary for evaluating the log-likelihood and its derivatives at a particular `theta` (parameter) value.

This allows re-use of the most expensive computations. Stencils can be easily passed around by reference, and most functions in the [mappel::methods](#) namespace accept a const [Stencil](#) reference in place of the model parameter.

Throws [mappel::ModelBoundsError](#) if not `model.theta_in_bounds(theta)`.

If derivatives will not be computed with this stencil set `compute_derivatives=false`

Parameters

<i>theta</i>	Parameter to evaluate at
<i>compute_derivatives</i>	True to also prepare for derivative computations

Returns

A new [Stencil](#) object ready to compute with

Definition at line 116 of file `Gauss1DModel.h`.

References `mappel::Gauss1DModel::Stencil::Stencil()`, and `mappel::PointEmitterModel::theta_in_bounds()`.

Referenced by `mappel::Gauss1DModel::initial_theta_estimate()`.

9.7.4.57 Gauss1DMLE & mappel::Gauss1DMLE::operator= (const Gauss1DMLE & o)

Definition at line 51 of file Gauss1DMLE.cpp.

References mappel::MLEstimator::operator=(), mappel::PoissonNoise1DObjective::operator=(), mappel::Gauss1DModel::operator=(), and mappel::PointEmitterModel::operator=().

9.7.4.58 Gauss1DMLE & mappel::Gauss1DMLE::operator= (Gauss1DMLE && o)

Definition at line 62 of file Gauss1DMLE.cpp.

References mappel::MLEstimator::operator=(), mappel::PoissonNoise1DObjective::operator=(), mappel::Gauss1DModel::operator=(), and mappel::PointEmitterModel::operator=().

9.7.4.59 void mappel::Gauss1DModel::pixel_grad (IdxT i, const Stencil & s, ParamT & pgrad) const [inline], [inherited]

Definition at line 141 of file Gauss1DModel.h.

References mappel::Gauss1DModel::Stencil::DX, mappel::Gauss1DModel::Stencil::l(), and mappel::Gauss1DModel::Stencil::X.

Referenced by mappel::Gauss1DModel::pixel_hess_update().

9.7.4.60 void mappel::Gauss1DModel::pixel_grad2 (IdxT i, const Stencil & s, ParamT & pgrad2) const [inline], [inherited]

Definition at line 150 of file Gauss1DModel.h.

References mappel::Gauss1DModel::Stencil::DXS, mappel::Gauss1DModel::Stencil::l(), and mappel::Gauss1DModel::psf_sigma.

9.7.4.61 void mappel::Gauss1DModel::pixel_hess (IdxT i, const Stencil & s, MatT & hess) const [inline], [inherited]

Definition at line 159 of file Gauss1DModel.h.

References mappel::Gauss1DModel::Stencil::DX, mappel::Gauss1DModel::Stencil::DXS, mappel::Gauss1DModel::Stencil::l(), and mappel::Gauss1DModel::psf_sigma.

9.7.4.62 void mappel::Gauss1DModel::pixel_hess_update (IdxT i, const Stencil & s, double dm_ratio_m1, double dmm_ratio, ParamT & grad, MatT & hess) const [inherited]

pixel derivative inner loop calculations.

Definition at line 191 of file Gauss1DModel.cpp.

References mappel::Gauss1DModel::Stencil::DXS, mappel::Gauss1DModel::Stencil::l(), mappel::PointEmitterModel::make_param(), mappel::Gauss1DModel::pixel_grad(), and mappel::Gauss1DModel::psf_sigma.

9.7.4.63 `double mappel::Gauss1DModel::pixel_model_value (IdxT i, const Stencil & s) const` `[inline], [inherited]`

Definition at line 135 of file Gauss1DModel.h.

References `mappel::Gauss1DModel::Stencil::bg()`, `mappel::Gauss1DModel::Stencil::l()`, and `mappel::Gauss1DModel::Stencil::X`.

9.7.4.64 `PointEmitterModel::ParamT mappel::PointEmitterModel::reflected_theta (const ParamT & theta) const`
`[inherited]`

Definition at line 276 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::PointEmitterModel::reflected_theta_stack()`.

9.7.4.65 `PointEmitterModel::ParamVecT mappel::PointEmitterModel::reflected_theta_stack (const ParamVecT & theta) const` `[inherited]`

Definition at line 316 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::make_param_stack()`, and `mappel::PointEmitterModel::reflected_theta()`.

9.7.4.66 `void mappel::PointEmitterModel::rename_hyperparam (const std::string & old_name, const std::string & new_name)`
`[inline], [inherited]`

Definition at line 244 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.7.4.67 `void mappel::MCMCAdaptor1D::sample_mcmc_candidate (IdxT sample_index, ParamT & candidate, double step_scale = 1.0) const` `[inherited]`

Definition at line 108 of file MCMCAdaptor1D.cpp.

References `mappel::MCMCAdaptor1D::eta_bg`, `mappel::MCMCAdaptor1D::eta_l`, `mappel::MCMCAdaptor1D::eta_x`, `mappel::MCMCAdaptorBase::num_phases`, and `mappel::rng_manager`.

9.7.4.68 `void mappel::MCMCAdaptor1D::sample_mcmc_candidate (IdxT sample_index, ParamT & candidate, const IdxVecT & fixed_parameters_mask, double step_scale = 1.0) const` `[inherited]`

Definition at line 122 of file MCMCAdaptor1D.cpp.

References `mappel::MCMCAdaptor1D::eta_bg`, `mappel::MCMCAdaptor1D::eta_l`, `mappel::MCMCAdaptor1D::eta_x`, `mappel::MCMCAdaptorBase::num_phases`, and `mappel::rng_manager`.

9.7.4.69 `template<class RngT > PointEmitterModel::ParamT mappel::PointEmitterModel::sample_prior (RngT & rng) const`
`[inherited]`

Definition at line 264 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

9.7.4.70 `PointEmitterModel::ParamT mappel::PointEmitterModel::sample_prior () const` `[inline]`, `[inherited]`

Definition at line 268 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`, and `mappel::rng_manager`.

9.7.4.71 `void mappel::MCMCAdaptor1D::set_background_mcmc_sampling (double eta_bg = -1)` `[inherited]`

Definition at line 81 of file `MCMCAdaptor1D.cpp`.

References `mappel::PointEmitterModel::default_pixel_mean_bg`, `mappel::MCMCAdaptor1D::eta_bg`, `mappel::PointEmitterModel::get_hyperparam_value()`, `mappel::PointEmitterModel::get_lbound()`, `mappel::PointEmitterModel::get_ubound()`, and `mappel::MCMCAdaptorBase::sigma_scale`.

Referenced by `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`.

9.7.4.72 `void mappel::PointEmitterModel::set_bounds (const ParamT & lbound_, const ParamT & ubound_)`
`[inherited]`

Box-type parameter bounds

Modifies the prior bounds to prevent sampling outside the valid box-constraints.

Definition at line 213 of file `PointEmitterModel.cpp`.

References `mappel::PointEmitterModel::bounds_epsilon`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

9.7.4.73 `void mappel::PointEmitterModel::set_hyperparam_names (const StringVecT & desc)` `[inline]`,
`[inherited]`

Definition at line 260 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

9.7.4.74 `void mappel::PointEmitterModel::set_hyperparam_value (const std::string & name, double value)` `[inline]`,
`[inherited]`

Definition at line 240 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

9.7.4.75 `void mappel::PointEmitterModel::set_hyperparams (const VecT & hyperparams) [inline],[inherited]`

Definition at line 220 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

Referenced by mappel::Gauss2DModel::set_hyperparams(), and mappel::Gauss2DsModel::set_hyperparams().

9.7.4.76 `template<class ImT > void ImageFormat1DBase::set_image_in_stack (ImageStackT & stack, ImageCoordT n, const ImT & im) const [inherited]`

Definition at line 115 of file ImageFormat1DBase.h.

9.7.4.77 `void mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling (double eta_I = -1) [inherited]`

Definition at line 65 of file MCMCAdaptor1D.cpp.

References mappel::PointEmitterModel::default_mean_I, mappel::MCMCAdaptor1D::eta_I, mappel::PointEmitterModel::get_hyperparam_value(), and mappel::MCMCAdaptorBase::sigma_scale.

Referenced by mappel::MCMCAdaptor1D::MCMCAdaptor1D().

9.7.4.78 `void mappel::PointEmitterModel::set_lbound (const ParamT & lbound) [inherited]`

Definition at line 226 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::bounds_epsilon, mappel::PointEmitterModel::lbound, mappel::PointEmitterModel::num_params, mappel::PointEmitterModel::prior, and mappel::PointEmitterModel::ubound.

Referenced by mappel::Gauss1DsModel::set_min_sigma().

9.7.4.79 `void mappel::MCMCAdaptorBase::set_mcmc_num_phases (IdxT num_phases) [protected],[inherited]`

Definition at line 59 of file MCMCAdaptorBase.cpp.

References mappel::MCMCAdaptorBase::num_phases.

Referenced by mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds(), and mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds().

9.7.4.80 `void mappel::MCMCAdaptorBase::set_mcmc_sigma_scale (double scale) [inherited]`

Definition at line 39 of file MCMCAdaptorBase.cpp.

References mappel::MCMCAdaptorBase::global_max_mcmc_sigma_scale, and mappel::MCMCAdaptorBase::sigma_scale.

9.7.4.81 `void mappel::PointEmitterModel::set_param_names (const StringVecT & desc) [inline], [inherited]`

Definition at line 252 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.7.4.82 `void mappel::PointEmitterModel::set_prior (CompositeDist && prior_) [inherited]`

Definition at line 158 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::lbound, mappel::PointEmitterModel::num_hyperparams, mappel::PointEmitterModel::num_params, mappel::PointEmitterModel::prior, and mappel::PointEmitterModel::ubound.

Referenced by mappel::Gauss2DModel::set_prior(), and mappel::Gauss2DsModel::set_prior().

9.7.4.83 `void mappel::PointEmitterModel::set_prior (const CompositeDist & prior_) [inherited]`

Definition at line 149 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::lbound, mappel::PointEmitterModel::num_hyperparams, mappel::PointEmitterModel::num_params, mappel::PointEmitterModel::prior, and mappel::PointEmitterModel::ubound.

9.7.4.84 `void mappel::Gauss1DModel::set_psf_sigma (double new_psf_sigma) [inherited]`

Definition at line 125 of file Gauss1DModel.cpp.

References mappel::PointEmitterModel::check_psf_sigma(), and mappel::Gauss1DModel::psf_sigma.

Referenced by mappel::Gauss1DModel::set_psf_sigma(), and mappel::Gauss2DModel::set_psf_sigma().

9.7.4.85 `void mappel::Gauss1DModel::set_psf_sigma (const VecT & new_psf_sigma) [inline], [inherited]`

Definition at line 131 of file Gauss1DModel.h.

References mappel::Gauss1DModel::set_psf_sigma().

9.7.4.86 `void mappel::PointEmitterModel::set_rng_seed (RngSeedT seed) [static], [inherited]`

Definition at line 110 of file PointEmitterModel.cpp.

References mappel::rng_manager.

9.7.4.87 `void ImageFormat1DBase::set_size (const ImageSizeT & size_) [inherited]`

Definition at line 30 of file ImageFormat1DBase.cpp.

References mappel::ImageFormat1DBase::check_size(), and mappel::ImageFormat1DBase::size.

Referenced by mappel::ImageFormat1DBase::set_size(), mappel::Gauss2DModel::set_size(), and mappel::Gauss2DsModel::set_size().

9.7.4.88 `void ImageFormat1DBase::set_size (const arma::Col< ImageCoordT > & sz) [inline],[inherited]`

Definition at line 75 of file ImageFormat1DBase.h.

References `mappel::ImageFormat1DBase::set_size()`.

9.7.4.89 `void mappel::PointEmitterModel::set_ubound (const ParamT & ubound) [inherited]`

Definition at line 237 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::bounds_epsilon`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::Gauss1DsModel::set_max_sigma()`, and `mappel::Gauss2DsModel::set_max_sigma_ratio()`.

9.7.4.90 `bool mappel::PointEmitterModel::theta_in_bounds (const ParamT & theta) const [inherited]`

Definition at line 257 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsModel::initial_theta_estimate()`, `mappel::Gauss1DModel::make_stencil()`, `mappel::Gauss1DsModel::make_stencil()`, `mappel::Gauss2DModel::make_stencil()`, `mappel::Gauss2DsxModel::make_stencil()`, `mappel::Gauss2DsModel::make_stencil()`, and `mappel::PointEmitterModel::theta_stack_in_bounds()`.

9.7.4.91 `BoolVecT mappel::PointEmitterModel::theta_stack_in_bounds (const ParamVecT & theta) const [inherited]`

Definition at line 296 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, and `mappel::PointEmitterModel::theta_in_bounds()`.

9.7.5 Member Data Documentation

9.7.5.1 `const double mappel::PointEmitterModel::bounds_epsilon = 1.0E-6 [static],[inherited]`

Distance from the boundary to constrain in `bound_theta` and `bounded_theta` methods

Definition at line 52 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::Gauss2DsModel::set_max_sigma_ratio()`, and `mappel::PointEmitterModel::set_ubound()`.

9.7.5.2 `const double mappel::PointEmitterModel::default_alpha_sigma = 2 [static],[inherited]`

Default per-pixel background gamma distribution shape

Definition at line 62 of file PointEmitterModel.h.

9.7.5.3 `const double mappel::PointEmitterModel::default_beta_pos = 3` `[static], [inherited]`

Default position parameter in symmetric beta-distributions

Definition at line 56 of file PointEmitterModel.h.

9.7.5.4 `const double mappel::PointEmitterModel::default_intensity_kappa = 2` `[static], [inherited]`

Default shape for intensity gamma distributions

Definition at line 60 of file PointEmitterModel.h.

9.7.5.5 `const double mappel::PointEmitterModel::default_max_I = INFINITY` `[static], [inherited]`

Default maximum emitter intensity

Definition at line 59 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::make_prior_component_intensity()`.

9.7.5.6 `const double mappel::PointEmitterModel::default_mean_I = 300` `[static], [inherited]`

Default emitter intensity mean

Definition at line 58 of file PointEmitterModel.h.

Referenced by `mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling()`.

9.7.5.7 `const double mappel::PointEmitterModel::default_pixel_mean_bg = 4` `[static], [inherited]`

Default per-pixel mean background counts

Definition at line 61 of file PointEmitterModel.h.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_beta_position()`, `mappel::Gauss1DModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_default_prior_normal_position()`, `mappel::Gauss1DModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, and `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`.

9.7.5.8 `const double mappel::PointEmitterModel::default_sigma_pos = 1` `[static], [inherited]`

Default position parameter in symmetric beta-distributions

Definition at line 57 of file PointEmitterModel.h.

9.7.5.9 `const std::string mappel::Gauss1DModel::DefaultPriorType = "Normal" [static],[inherited]`

Definition at line 53 of file Gauss1DModel.h.

Referenced by `mappel::Gauss1DModel::operator=()`.

9.7.5.10 `const std::string mappel::PointEmitterModel::DefaultSeperableInitEstimator = "TrustRegion" [static],[inherited]`

Estimator name to use in 1D separable initializations

Definition at line 49 of file PointEmitterModel.h.

Referenced by `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsxyModel::initial_theta_estimate()`, and `mappel::Gauss2DsModel::initial_theta_estimate()`.

9.7.5.11 `const std::vector< std::string > mappel::PoissonNoise1DObjective::estimator_names [static],[inherited]`

Definition at line 24 of file PoissonNoise1DObjective.h.

9.7.5.12 `double mappel::MCMCAdaptor1D::eta_bg =0 [protected],[inherited]`

The standard deviation for the normally distributed perturbation to `theta_bg` in the random walk MCMC sampling

Definition at line 33 of file MCMCAdaptor1D.h.

Referenced by `mappel::MCMCAdaptor1D::get_stats()`, `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor1D::operator=()`, `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`, and `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`.

9.7.5.13 `double mappel::MCMCAdaptor1D::eta_l =0 [protected],[inherited]`

The standard deviation for the normally distributed perturbation to `theta_l` in the random walk MCMC sampling

Definition at line 32 of file MCMCAdaptor1D.h.

Referenced by `mappel::MCMCAdaptor1D::get_stats()`, `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor1D::operator=()`, `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`, and `mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling()`.

9.7.5.14 `double mappel::MCMCAdaptor1D::eta_x =0 [protected],[inherited]`

The standard deviation for the normally distributed perturbation to `theta_x` in the random walk MCMC sampling

Definition at line 31 of file MCMCAdaptor1D.h.

Referenced by `mappel::MCMCAdaptor1D::get_stats()`, `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor1D::operator=()`, `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, and `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`.

9.7.5.15 `const double mappel::MCMCAdaptorBase::global_default_mcmc_sigma_scale = 0.05` `[static], [inherited]`

Definition at line 16 of file MCMCAdaptorBase.h.

Referenced by `mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds()`, `mappel::MCMCAdaptor2D::MCMCAdaptor2D()`, and `mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds()`.

9.7.5.16 `const double mappel::MCMCAdaptorBase::global_max_mcmc_sigma_scale = 0.5` `[static], [inherited]`

Definition at line 17 of file MCMCAdaptorBase.h.

Referenced by `mappel::MCMCAdaptorBase::MCMCAdaptorBase()`, and `mappel::MCMCAdaptorBase::set_mcmc_sigma_scale()`.

9.7.5.17 `const double mappel::PointEmitterModel::global_max_psf_sigma = 1E2` `[static], [inherited]`

Global maximum for any `psf_sigma`. Sizes above this value are invalid, and nowhere near useful for practical point emitter localization

Definition at line 54 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::check_psf_sigma()`.

9.7.5.18 `const ImageFormat1DBase::ImageCoordT ImageFormat1DBase::global_max_size = 512` `[static], [inherited]`

Maximum size along any dimension of the image. This is insanely big to catch obvious errors

Definition at line 40 of file ImageFormat1DBase.h.

Referenced by `mappel::ImageFormat1DBase::check_size()`.

9.7.5.19 `const double mappel::PointEmitterModel::global_min_psf_sigma = 1E-1` `[static], [inherited]`

Global minimum for any `psf_sigma`. Sizes below this value are invalid, and nowhere near useful for practical point emitter localization

Definition at line 53 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::check_psf_sigma()`.

9.7.5.20 `const ImageFormat1DBase::ImageCoordT ImageFormat1DBase::global_min_size = 3` `[static], [inherited]`

Minimum size along any dimension of the image.

Definition at line 39 of file ImageFormat1DBase.h.

Referenced by `mappel::ImageFormat1DBase::check_size()`.

9.7.5.21 **ParamT** mappel::PointEmitterModel::lbound [protected],[inherited]

Definition at line 148 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::bound_theta(), mappel::PointEmitterModel::bounded_theta(), mappel::PointEmitterModel::get_lbound(), mappel::PointEmitterModel::get_stats(), mappel::Gauss1DsModel::initial_theta_estimate(), mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::PointEmitterModel::operator=(), mappel::PointEmitterModel::reflected_theta(), mappel::PointEmitterModel::set_bounds(), mappel::PointEmitterModel::set_lbound(), mappel::PointEmitterModel::set_prior(), mappel::PointEmitterModel::set_ubound(), and mappel::PointEmitterModel::theta_in_bounds().

9.7.5.22 **const std::string** mappel::Gauss1DMLE::name [static]

Definition at line 34 of file Gauss1DMLE.h.

9.7.5.23 **const ImageFormat1DBase::ImageCoordT** ImageFormat1DBase::num_dim = 1 [static],[inherited]

Number of image dimensions.

Definition at line 38 of file ImageFormat1DBase.h.

Referenced by mappel::ImageFormat1DBase::get_stats().

9.7.5.24 **IdxT** mappel::PointEmitterModel::num_hyperparams [protected],[inherited]

Definition at line 147 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::get_num_hyperparams(), mappel::PointEmitterModel::get_stats(), mappel::PointEmitterModel::operator=(), and mappel::PointEmitterModel::set_prior().

9.7.5.25 **IdxT** mappel::PointEmitterModel::num_params [protected],[inherited]

Definition at line 146 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::bound_theta(), mappel::PointEmitterModel::bounded_theta(), mappel::PointEmitterModel::check_param_shape(), mappel::PointEmitterModel::get_num_params(), mappel::PointEmitterModel::get_stats(), mappel::Gauss1DModel::initial_theta_estimate(), mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::PointEmitterModel::make_param(), mappel::PointEmitterModel::make_param_mat(), mappel::PointEmitterModel::make_param_mat_stack(), mappel::PointEmitterModel::make_param_stack(), mappel::PointEmitterModel::operator=(), mappel::PointEmitterModel::reflected_theta(), mappel::PointEmitterModel::set_bounds(), mappel::PointEmitterModel::set_lbound(), mappel::PointEmitterModel::set_prior(), mappel::PointEmitterModel::set_ubound(), and mappel::PointEmitterModel::theta_in_bounds().

9.7.5.26 **IdxT** mappel::MCMCAdaptorBase::num_phases [protected],[inherited]

The number of different sampling phases for candidate selection MCMC. Each phase changes a different subset of variables.

Definition at line 29 of file MCMCAdaptorBase.h.

Referenced by mappel::MCMCAdaptorBase::get_mcmc_num_phases(), mappel::MCMCAdaptorBase::get_stats(), mappel::MCMCAdaptor2Ds::sample_mcmc_candidate(), mappel::MCMCAdaptor2D::sample_mcmc_candidate(), mappel::MCMCAdaptor1Ds::sample_mcmc_candidate(), mappel::MCMCAdaptor1D::sample_mcmc_candidate(), and mappel::MCMCAdaptorBase::set_mcmc_num_phases().

9.7.5.27 CompositeDist mappel::PointEmitterModel::prior [protected],[inherited]

Definition at line 145 of file PointEmitterModel.h.

Referenced by mappel::Gauss2DModel::debug_internal_sum_model_y(), mappel::Gauss2DsModel::debug_internal_sum_model_y(), mappel::Gauss2DModel::Gauss2DModel(), mappel::Gauss2DsModel::Gauss2DsModel(), mappel::PointEmitterModel::get_hyperparam_index(), mappel::PointEmitterModel::get_hyperparam_names(), mappel::PointEmitterModel::get_hyperparam_value(), mappel::PointEmitterModel::get_hyperparams(), mappel::Gauss1DsModel::get_max_sigma(), mappel::Gauss1DsModel::get_min_sigma(), mappel::PointEmitterModel::get_param_names(), mappel::PointEmitterModel::get_prior(), mappel::PointEmitterModel::get_stats(), mappel::PointEmitterModel::has_hyperparam(), mappel::PointEmitterModel::operator=(), mappel::PointEmitterModel::PointEmitterModel(), mappel::PointEmitterModel::rename_hyperparam(), mappel::PointEmitterModel::sample_prior(), mappel::PointEmitterModel::set_bounds(), mappel::PointEmitterModel::set_hyperparam_names(), mappel::PointEmitterModel::set_hyperparam_value(), mappel::PointEmitterModel::set_hyperparams(), mappel::PointEmitterModel::set_lbound(), mappel::Gauss1DsModel::set_max_sigma(), mappel::Gauss1DsModel::set_min_sigma(), mappel::PointEmitterModel::set_param_names(), mappel::PointEmitterModel::set_prior(), and mappel::PointEmitterModel::set_ubound().

9.7.5.28 const StringVecT mappel::Gauss1DModel::prior_types [static],[inherited]

Initial value:

```
= { "Beta",
    "Normal"
}
```

Definition at line 52 of file Gauss1DModel.h.

Referenced by mappel::Gauss1DModel::operator=().

9.7.5.29 double mappel::Gauss1DModel::psf_sigma [protected],[inherited]

Standard deviation of the fixed-sigma 1D Gaussian PSF in pixels

Definition at line 90 of file Gauss1DModel.h.

Referenced by mappel::Gauss1DModel::Stencil::compute_derivatives(), mappel::Gauss1DModel::get_psf_sigma(), mappel::Gauss1DModel::operator=(), mappel::Gauss1DModel::pixel_grad2(), mappel::Gauss1DModel::pixel_hess(), mappel::Gauss1DModel::pixel_hess_update(), mappel::Gauss1DModel::set_psf_sigma(), and mappel::Gauss1DModel::Stencil::Stencil().

9.7.5.30 double mappel::MCMCAdaptorBase::sigma_scale [protected],[inherited]

A scaling factor for step sizes as a fraction of the size of the domain dimension we are walking in. (0.05 default)

Definition at line 30 of file MCMCAdaptorBase.h.

Referenced by mappel::MCMCAdaptorBase::get_mcmc_sigma_scale(), mappel::MCMCAdaptorBase::get_stats(), mappel::MCMCAdaptor1D::MCMCAdaptor1D(), mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds(), mappel::MCMCAdaptor2D::MCMCAdaptor2D(), mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds(), mappel::MCMCAdaptor1D::set_background_mcmc_sampling(), mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling(), and mappel::MCMCAdaptorBase::set_mcmc_sigma_scale().

9.7.5.31 `ImageSizeT mappel::ImageFormat1DBase::size` [protected],[inherited]

Number of pixels in X dimension for 1D image

Definition at line 65 of file `ImageFormat1DBase.h`.

Referenced by `mappel::ImageFormat1DBase::check_image_shape()`, `mappel::Gauss1DsModel::Stencil::compute_derivatives()`, `mappel::Gauss1DModel::Stencil::compute_derivatives()`, `mappel::ImageFormat1DBase::get_num_pixels()`, `mappel::ImageFormat1DBase::get_size()`, `mappel::Gauss1DModel::initial_theta_estimate()`, `mappel::Gauss1DsModel::initial_theta_estimate()`, `mappel::ImageFormat1DBase::make_image()`, `mappel::ImageFormat1DBase::make_image_stack()`, `mappel::ImageFormat1DBase::set_size()`, `mappel::Gauss1DsModel::Stencil::Stencil()`, and `mappel::Gauss1DModel::Stencil::Stencil()`.

9.7.5.32 `ParamT mappel::PointEmitterModel::ubound` [protected],[inherited]

Definition at line 148 of file `PointEmitterModel.h`.

Referenced by `mappel::PointEmitterModel::bound_theta()`, `mappel::PointEmitterModel::bounded_theta()`, `mappel::PointEmitterModel::get_stats()`, `mappel::PointEmitterModel::get_ubound()`, `mappel::Gauss1DsModel::initial_theta_estimate()`, `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsModel::initial_theta_estimate()`, `mappel::PointEmitterModel::operator=()`, `mappel::PointEmitterModel::reflected_theta()`, `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::PointEmitterModel::set_prior()`, `mappel::PointEmitterModel::set_ubound()`, and `mappel::PointEmitterModel::theta_in_bounds()`.

The documentation for this class was generated from the following files:


- [Gauss1DMLE.h](#)
- [Gauss1DMLE.cpp](#)

9.8 `mappel::Gauss1DModel` Class Reference

A base class for 1D Gaussian PSF with a fixed sigma (standard dev.)

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/Gauss1DModel.h>
```

Inheritance diagram for `mappel::Gauss1DModel`:

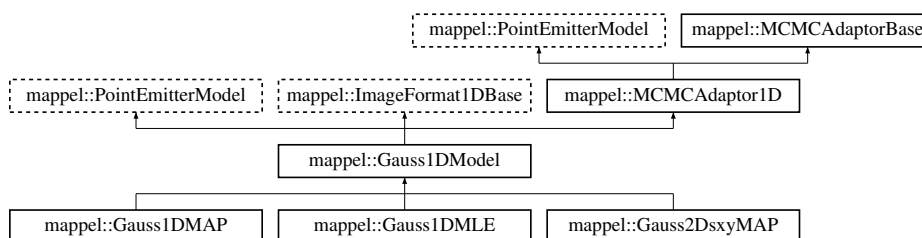

Classes

- class [Stencil](#)
Stencil for 1D fixed-sigma models.

Public Types

- using `StencilVecT` = `std::vector< Stencil >`
- using `ParamT` = `arma::vec`
- using `ParamVecT` = `arma::mat`
- using `ImageCoordT` = `uint32_t`
- using `ImagePixelT` = `double`
- template<class CoordT >
using `ImageSizeShapeT` = `CoordT`
- template<class CoordT >
using `ImageSizeVecShapeT` = `arma::Col< CoordT >`
- using `ImageSizeT` = `ImageSizeShapeT< ImageCoordT >`
- using `ImageSizeVecT` = `ImageSizeVecShapeT< ImageCoordT >`
- template<class PixelT >
using `ImageShapeT` = `arma::Col< PixelT >`
- template<class PixelT >
using `ImageStackShapeT` = `arma::Mat< PixelT >`
- using `ImageT` = `ImageShapeT< ImagePixelT >`
- using `ImageStackT` = `ImageStackShapeT< ImagePixelT >`

Public Member Functions

- double `get_psf_sigma` () const
- double `get_psf_sigma` (IdxT idx) const
- void `set_psf_sigma` (double new_psf_sigma)
- void `set_psf_sigma` (const VecT &new_psf_sigma)
- StatsT `get_stats` () const
- Stencil `make_stencil` (const ParamT &theta, bool compute_derivatives=true) const
Make a new Model::Stencil object at theta.
- double `pixel_model_value` (IdxT i, const Stencil &s) const
- void `pixel_grad` (IdxT i, const Stencil &s, ParamT &pgrad) const
- void `pixel_grad2` (IdxT i, const Stencil &s, ParamT &pgrad2) const
- void `pixel_hess` (IdxT i, const Stencil &s, MatT &hess) const
- void `pixel_hess_update` (IdxT i, const Stencil &s, double dm_ratio_m1, double dmm_ratio, ParamT &grad, MatT &hess) const
pixel derivative inner loop calculations.
- Stencil `initial_theta_estimate` (const ImageT &im) const
Fast, heuristic estimate of initial theta.
- Stencil `initial_theta_estimate` (const ImageT &im, const ParamT &theta_init) const
- IdxT `get_num_params` () const
- void `check_param_shape` (const ParamT &theta) const
- void `check_param_shape` (const ParamVecT &theta) const
- void `check_psf_sigma` (double psf_sigma) const
- void `check_psf_sigma` (const VecT &psf_sigma) const
- ParamT `make_param` () const
- template<class FillT >
`ParamT make_param` (FillT fill) const
- ParamVecT `make_param_stack` (IdxT n) const
- template<class FillT >
`ParamVecT make_param_stack` (IdxT n, FillT fill) const

- [MatT make_param_mat \(\)](#) const
- [template<class FillT >](#)
[MatT make_param_mat \(FillT fill\)](#) const
- [CubeT make_param_mat_stack \(IdxT n\)](#) const
- [template<class FillT >](#)
[CubeT make_param_mat_stack \(IdxT n, FillT fill\)](#) const
- [CompositeDist & get_prior \(\)](#)
- [const CompositeDist & get_prior \(\)](#) const
- [void set_prior \(CompositeDist &&prior_\)](#)
- [void set_prior \(const CompositeDist &prior_\)](#)
- [IdxT get_num_hyperparams \(\)](#) const
- [void set_hyperparams \(const Vect &hyperparams\)](#)
- [Vect get_hyperparams \(\)](#) const
- [bool has_hyperparam \(const std::string &name\)](#) const
- [double get_hyperparam_value \(const std::string &name\)](#) const
- [int get_hyperparam_index \(const std::string &name\)](#) const
- [void set_hyperparam_value \(const std::string &name, double value\)](#)
- [void rename_hyperparam \(const std::string &old_name, const std::string &new_name\)](#)
- [StringVecT get_param_names \(\)](#) const
- [void set_param_names \(const StringVecT &desc\)](#)
- [StringVecT get_hyperparam_names \(\)](#) const
- [void set_hyperparam_names \(const StringVecT &desc\)](#)
- [template<class RngT >](#)
[ParamT sample_prior \(RngT &rng\)](#) const
- [ParamT sample_prior \(\)](#) const
- [void set_bounds \(const ParamT &lbound, const ParamT &ubound\)](#)
- [void set_lbound \(const ParamT &lbound\)](#)
- [void set_ubound \(const ParamT &ubound\)](#)
- [const ParamT & get_lbound \(\)](#) const
- [const ParamT & get_ubound \(\)](#) const
- [bool theta_in_bounds \(const ParamT &theta\)](#) const
- [void bound_theta \(ParamT &theta, double epsilon=bounds_epsilon\)](#) const
- [ParamT bounded_theta \(const ParamT &theta, double epsilon=bounds_epsilon\)](#) const
- [ParamT reflected_theta \(const ParamT &theta\)](#) const
- [BoolVecT theta_stack_in_bounds \(const ParamVecT &theta\)](#) const
- [ParamVecT bounded_theta_stack \(const ParamVecT &theta, double epsilon=bounds_epsilon\)](#) const
- [ParamVecT reflected_theta_stack \(const ParamVecT &theta\)](#) const
- [ImageT make_image \(\)](#) const
- [ImageStackT make_image_stack \(ImageCoordT n\)](#) const
- [ImageCoordT get_size_image_stack \(const ImageStackT &stack\)](#) const
- [ImageT get_image_from_stack \(const ImageStackT &stack, ImageCoordT n\)](#) const
- [template<class ImT >](#)
[void set_image_in_stack \(ImageStackT &stack, ImageCoordT n, const ImT &im\)](#) const
- [ImageSizeT get_size \(\)](#) const
- [ImageCoordT get_size \(IdxT idx\)](#) const
- [ImageCoordT get_num_pixels \(\)](#) const
- [void set_size \(const ImageSizeT &size_\)](#)
- [void set_size \(const arma::Col< ImageCoordT > &sz\)](#)
- [void check_image_shape \(const ImageT &im\)](#) const
Check the shape of a single images is correct for model size.
- [void check_image_shape \(const ImageStackT &ims\)](#) const

Check the shape of a stack of images is correct for model size.

- void [sample_mcmc_candidate](#) (IdxT sample_index, ParamT &candidate, double step_scale=1.0) const
- void [sample_mcmc_candidate](#) (IdxT sample_index, ParamT &candidate, const IdxVecT &fixed_parameters_↵ mask, double step_scale=1.0) const
- void [set_intensity_mcmc_sampling](#) (double eta_l=-1)
- void [set_background_mcmc_sampling](#) (double eta_bg=-1)
- void [set_mcmc_sigma_scale](#) (double scale)
- double [get_mcmc_sigma_scale](#) () const
- IdxT [get_mcmc_num_phases](#) () const

Static Public Member Functions

- static CompositeDist [make_default_prior](#) (IdxT size, const std::string &prior_type)
- static CompositeDist [make_default_prior_beta_position](#) (IdxT size)
- static CompositeDist [make_default_prior_normal_position](#) (IdxT size)
- static CompositeDist [make_prior_beta_position](#) (IdxT size, double beta_xpos, double mean_l, double kappa_l, double mean_bg, double kappa_bg)
- static CompositeDist [make_prior_normal_position](#) (IdxT size, double sigma_xpos, double mean_l, double kappa_l, double mean_bg, double kappa_bg)
- static prior_hessian::TruncatedNormalDist [make_prior_component_position_normal](#) (IdxT size, double pos_↵ sigma=default_sigma_pos)
- static prior_hessian::ScaledSymmetricBetaDist [make_prior_component_position_beta](#) (IdxT size, double pos_↵ beta=default_beta_pos)
- static prior_hessian::TruncatedGammaDist [make_prior_component_intensity](#) (double mean=default_mean_↵ l, double kappa=default_intensity_kappa)
- static prior_hessian::TruncatedParetoDist [make_prior_component_sigma](#) (double min_sigma, double max_↵ sigma, double alpha=default_alpha_sigma)
- static void [set_rng_seed](#) (RngSeedT seed)
- static ParallelRngManagerT & [get_rng_manager](#) ()
- static ParallelRngGeneratorT & [get_rng_generator](#) ()
- static void [check_size](#) (const ImageSizeT &size_)

Check the size argument for the model.

Static Public Attributes

- static const StringVecT [prior_types](#)
- static const std::string [DefaultPriorType](#) = "Normal"
- static const std::string [DefaultSeperableInitEstimator](#) = "TrustRegion"
- static const double [bounds_epsilon](#) = 1.0E-6
- static const double [global_min_psf_sigma](#) = 1E-1
- static const double [global_max_psf_sigma](#) = 1E2
- static const double [default_beta_pos](#) = 3
- static const double [default_sigma_pos](#) = 1
- static const double [default_mean_l](#) = 300
- static const double [default_max_l](#) = INFINITY
- static const double [default_intensity_kappa](#) = 2
- static const double [default_pixel_mean_bg](#) = 4
- static const double [default_alpha_sigma](#) = 2
- static const ImageCoordT [num_dim](#) = 1
- static const ImageCoordT [global_min_size](#) = 3
- static const ImageCoordT [global_max_size](#) = 512
- static const double [global_default_mcmc_sigma_scale](#) = 0.05
- static const double [global_max_mcmc_sigma_scale](#) = 0.5

Protected Member Functions

- [Gauss1DModel](#) ([IdxT](#) size, double [psf_sigma](#))
- [Gauss1DModel](#) (const [Gauss1DModel](#) &o)
- [Gauss1DModel](#) ([Gauss1DModel](#) &&o)
- [Gauss1DModel](#) & operator= (const [Gauss1DModel](#) &o)
- [Gauss1DModel](#) & operator= ([Gauss1DModel](#) &&o)
- void [set_mcmc_num_phases](#) ([IdxT](#) num_phases)

Protected Attributes

- double [psf_sigma](#)
- CompositeDist [prior](#)
- [IdxT](#) num_params
- [IdxT](#) num_hyperparams
- [ParamT](#) lbound
- [ParamT](#) ubound
- [ImageSizeT](#) size
- double [eta_x](#) =0
- double [eta_l](#) =0
- double [eta_bg](#) =0
- [IdxT](#) num_phases
- double [sigma_scale](#)

9.8.1 Detailed Description

A base class for 1D Gaussian PSF with a fixed sigma (standard dev.)

This base class defines the [Stencil](#) type for 1D Gaussian PSF as well as the prior shape and parameters.

Initialized by an integer, size, and double, [psf_sigma](#).

Definition at line 24 of file [Gauss1DModel.h](#).

9.8.2 Member Typedef Documentation**9.8.2.1 using [mappel::ImageFormat1DBase::ImageCoordT](#) = [uint32_t](#) [inherited]**

Image size coordinate storage type

Definition at line 25 of file [ImageFormat1DBase.h](#).

9.8.2.2 using [mappel::ImageFormat1DBase::ImagePixelT](#) = [double](#) [inherited]

Image pixel storage type

Definition at line 26 of file [ImageFormat1DBase.h](#).

9.8.2.3 `template<class PixelT > using mappel::ImageFormat1DBase::ImageShapeT = arma::Col<PixelT>`
[*inherited*]

Shape of the data type for a single image

Definition at line 33 of file ImageFormat1DBase.h.

9.8.2.4 `template<class CoordT > using mappel::ImageFormat1DBase::ImageSizeShapeT = CoordT` [*inherited*]

Shape of the data type to store 1-image's coordinates

Definition at line 28 of file ImageFormat1DBase.h.

9.8.2.5 `using mappel::ImageFormat1DBase::ImageSizeT = ImageSizeShapeT<ImageCoordT>` [*inherited*]

Data type for a single image size

Definition at line 30 of file ImageFormat1DBase.h.

9.8.2.6 `template<class CoordT > using mappel::ImageFormat1DBase::ImageSizeVecShapeT = arma::Col<CoordT>`
[*inherited*]

Shape of the data type to store a vector of image's coordinates

Definition at line 29 of file ImageFormat1DBase.h.

9.8.2.7 `using mappel::ImageFormat1DBase::ImageSizeVecT = ImageSizeVecShapeT<ImageCoordT>`
[*inherited*]

Data type for a sequence of image sizes

Definition at line 31 of file ImageFormat1DBase.h.

9.8.2.8 `template<class PixelT > using mappel::ImageFormat1DBase::ImageStackShapeT = arma::Mat<PixelT>`
[*inherited*]

Shape of the data type for a sequence of images

Definition at line 34 of file ImageFormat1DBase.h.

9.8.2.9 `using mappel::ImageFormat1DBase::ImageStackT = ImageStackShapeT<ImagePixelT>`
[*inherited*]

Data type to represent a sequence of images

Definition at line 36 of file ImageFormat1DBase.h.

9.8.2.10 `using mappel::ImageFormat1DBase::ImageT = ImageShapeT<ImagePixelT>` [inherited]

Data type to represent single image

Definition at line 35 of file ImageFormat1DBase.h.

9.8.2.11 `using mappel::PointEmitterModel::ParamT = arma::vec` [inherited]

Parameter vector

Definition at line 47 of file PointEmitterModel.h.

9.8.2.12 `using mappel::PointEmitterModel::ParamVecT = arma::mat` [inherited]

Vector of parameter vectors

Definition at line 48 of file PointEmitterModel.h.

9.8.2.13 `using mappel::Gauss1DModel::StencilVecT = std::vector<Stencil>`

Definition at line 49 of file Gauss1DModel.h.

9.8.3 Constructor & Destructor Documentation

9.8.3.1 `mappel::Gauss1DModel::Gauss1DModel (IdxT size, double psf_sigma)` [protected]

Definition at line 12 of file Gauss1DModel.cpp.

References `mappel::PointEmitterModel::check_psf_sigma()`.

9.8.3.2 `mappel::Gauss1DModel::Gauss1DModel (const Gauss1DModel & o)` [protected]

Definition at line 20 of file Gauss1DModel.cpp.

9.8.3.3 `mappel::Gauss1DModel::Gauss1DModel (Gauss1DModel && o)` [protected]

Definition at line 26 of file Gauss1DModel.cpp.

9.8.4 Member Function Documentation

9.8.4.1 `void mappel::PointEmitterModel::bound_theta (ParamT & theta, double epsilon = bounds_epsilon) const`
[inherited]

Definition at line 248 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

9.8.4.2 `PointEmitterModel::ParamT mappel::PointEmitterModel::bounded_theta (const ParamT & theta, double epsilon = bounds_epsilon) const` `[inherited]`

Definition at line 265 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::PointEmitterModel::bounded_theta_stack()`.

9.8.4.3 `PointEmitterModel::ParamVecT mappel::PointEmitterModel::bounded_theta_stack (const ParamVecT & theta, double epsilon = bounds_epsilon) const` `[inherited]`

Definition at line 306 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::bounded_theta()`, `mappel::PointEmitterModel::check_param_shape()`, and `mappel::PointEmitterModel::make_param_stack()`.

9.8.4.4 `void ImageFormat1DBase::check_image_shape (const ImageT & im) const` `[inherited]`

Check the shape of a single images is correct for model size.

Definition at line 59 of file ImageFormat1DBase.cpp.

References `mappel::ImageFormat1DBase::size`.

9.8.4.5 `void ImageFormat1DBase::check_image_shape (const ImageStackT & ims) const` `[inherited]`

Check the shape of a stack of images is correct for model size.

Definition at line 71 of file ImageFormat1DBase.cpp.

References `mappel::ImageFormat1DBase::size`.

9.8.4.6 `void mappel::PointEmitterModel::check_param_shape (const ParamT & theta) const` `[inherited]`

Definition at line 167 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::num_params`.

Referenced by `mappel::PointEmitterModel::bound_theta()`, `mappel::PointEmitterModel::bounded_theta()`, `mappel::PointEmitterModel::bounded_theta_stack()`, `mappel::PointEmitterModel::reflected_theta()`, `mappel::PointEmitterModel::reflected_theta_stack()`, `mappel::PointEmitterModel::theta_in_bounds()`, and `mappel::PointEmitterModel::theta_stack_in_bounds()`.

9.8.4.7 `void mappel::PointEmitterModel::check_param_shape (const ParamVecT & theta) const` `[inherited]`

Definition at line 176 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::num_params`.

9.8.4.8 `void mappel::PointEmitterModel::check_psf_sigma (double psf_sigma) const` `[inherited]`

Definition at line 185 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::global_max_psf_sigma`, and `mappel::PointEmitterModel::global_min_psf_sigma`.

Referenced by `Gauss1DModel()`, `mappel::Gauss2DModel::Gauss2DModel()`, `mappel::Gauss2DsModel::Gauss2DsModel()`, `mappel::Gauss1DsModel::set_max_sigma()`, `mappel::Gauss2DsModel::set_max_sigma()`, `mappel::Gauss1DsModel::set_min_sigma()`, `mappel::Gauss2DsModel::set_min_sigma()`, `set_psf_sigma()`, and `mappel::Gauss2DModel::set_psf_sigma()`.

9.8.4.9 `void mappel::PointEmitterModel::check_psf_sigma (const VecT & psf_sigma) const` `[inherited]`

Definition at line 197 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::global_max_psf_sigma`, and `mappel::PointEmitterModel::global_min_psf_sigma`.

9.8.4.10 `void ImageFormat1DBase::check_size (const ImageSizeT & size_)` `[static],[inherited]`

Check the size argument for the model.

Definition at line 39 of file ImageFormat1DBase.cpp.

References `mappel::ImageFormat1DBase::global_max_size`, and `mappel::ImageFormat1DBase::global_min_size`.

Referenced by `mappel::ImageFormat1DBase::ImageFormat1DBase()`, and `mappel::ImageFormat1DBase::set_size()`.

9.8.4.11 `int mappel::PointEmitterModel::get_hyperparam_index (const std::string & name) const` `[inline],[inherited]`

Definition at line 236 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.8.4.12 `StringVecT mappel::PointEmitterModel::get_hyperparam_names () const` `[inline],[inherited]`

Definition at line 256 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.8.4.13 `double mappel::PointEmitterModel::get_hyperparam_value (const std::string & name) const` `[inline],[inherited]`

Definition at line 232 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

Referenced by `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`, and `mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling()`.

9.8.4.14 `PointEmitterModel::ParamT mappel::PointEmitterModel::get_hyperparams () const` `[inline]`,
`[inherited]`

Definition at line 224 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

9.8.4.15 `ImageFormat1DBase::ImageT ImageFormat1DBase::get_image_from_stack (const ImageStackT & stack, ImageCoordT n) const` `[inline]`,
`[inherited]`

Definition at line 108 of file `ImageFormat1DBase.h`.

9.8.4.16 `const PointEmitterModel::ParamT & mappel::PointEmitterModel::get_lbound () const` `[inline]`,
`[inherited]`

Definition at line 212 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::lbound`.

Referenced by `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor2D::MCMCAdaptor2D()`, and `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`.

9.8.4.17 `IdxT mappel::MCMCAdaptorBase::get_mcmc_num_phases () const` `[inherited]`

Definition at line 56 of file `MCMCAdaptorBase.cpp`.

References `mappel::MCMCAdaptorBase::num_phases`.

9.8.4.18 `double mappel::MCMCAdaptorBase::get_mcmc_sigma_scale () const` `[inherited]`

Definition at line 53 of file `MCMCAdaptorBase.cpp`.

References `mappel::MCMCAdaptorBase::sigma_scale`.

9.8.4.19 `IdxT mappel::PointEmitterModel::get_num_hyperparams () const` `[inline]`,
`[inherited]`

Definition at line 208 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::num_hyperparams`.

9.8.4.20 `IdxT mappel::PointEmitterModel::get_num_params () const` `[inline]`,
`[inherited]`

Definition at line 160 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::num_params`.

9.8.4.21 ImageFormat1DBase::ImageCoordT ImageFormat1DBase::get_num_pixels () const [inline], [inherited]

Definition at line 82 of file ImageFormat1DBase.h.

References mappel::ImageFormat1DBase::size.

Referenced by mappel::ImageFormat1DBase::get_stats().

9.8.4.22 StringVecT mappel::PointEmitterModel::get_param_names () const [inline], [inherited]

Definition at line 248 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.8.4.23 CompositeDist & mappel::PointEmitterModel::get_prior () [inline], [inherited]

Definition at line 200 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

Referenced by mappel::Gauss2DModel::update_internal_1Dsum_estimators(), and mappel::Gauss2DsModel::update_internal_1Dsum_estimators().

9.8.4.24 const CompositeDist & mappel::PointEmitterModel::get_prior () const [inline], [inherited]

Definition at line 204 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.8.4.25 double mappel::Gauss1DModel::get_psf_sigma () const [inline]

Definition at line 127 of file Gauss1DModel.h.

References psf_sigma.

Referenced by get_stats().

9.8.4.26 double mappel::Gauss1DModel::get_psf_sigma (IdxT idx) const

Definition at line 131 of file Gauss1DModel.cpp.

References psf_sigma.

9.8.4.27 ParallelRngGeneratorT & mappel::PointEmitterModel::get_rng_generator () [static], [inherited]

Definition at line 120 of file PointEmitterModel.cpp.

References mappel::rng_manager.

9.8.4.28 ParallelRngManagerT & mappel::PointEmitterModel::get_rng_manager () `[static], [inherited]`

Definition at line 115 of file PointEmitterModel.cpp.

References mappel::rng_manager.

9.8.4.29 ImageFormat1DBase::ImageSizeT ImageFormat1DBase::get_size () `const [inline], [inherited]`

Definition at line 71 of file ImageFormat1DBase.h.

References mappel::ImageFormat1DBase::size.

Referenced by mappel::ImageFormat1DBase::get_stats().

9.8.4.30 ImageFormat1DBase::ImageCoordT ImageFormat1DBase::get_size (IdxT idx) `const [inherited]`

Definition at line 20 of file ImageFormat1DBase.cpp.

References mappel::ImageFormat1DBase::size.

9.8.4.31 ImageFormat1DBase::ImageCoordT ImageFormat1DBase::get_size_image_stack (const ImageStackT & stack) `const [inline], [inherited]`

Definition at line 101 of file ImageFormat1DBase.h.

9.8.4.32 StatsT mappel::Gauss1DModel::get_stats () `const`

Definition at line 178 of file Gauss1DModel.cpp.

References get_psf_sigma(), mappel::MCMCAdaptor1D::get_stats(), mappel::ImageFormat1DBase::get_stats(), and mappel::PointEmitterModel::get_stats().

9.8.4.33 const PointEmitterModel::ParamT & mappel::PointEmitterModel::get_ubound () `const [inline], [inherited]`

Definition at line 216 of file PointEmitterModel.h.

References mappel::PointEmitterModel::ubound.

Referenced by mappel::Gauss2DsxyModel::get_max_sigma_ratio(), mappel::Gauss2DsModel::get_max_sigma_ratio(), mappel::MCMCAdaptor1D::MCMCAdaptor1D(), mappel::MCMCAdaptor2D::MCMCAdaptor2D(), mappel::MCMCAdaptor1D::set_background_mcmc_sampling(), and mappel::Gauss2DsModel::set_max_sigma_ratio().

9.8.4.34 bool mappel::PointEmitterModel::has_hyperparam (const std::string & name) `const [inline], [inherited]`

Definition at line 228 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.8.4.35 `Gauss1DModel::Stencil mappel::Gauss1DModel::initial_theta_estimate (const ImageT & im) const` `[inline]`

Fast, heuristic estimate of initial theta.

Definition at line 169 of file Gauss1DModel.h.

References `mappel::PointEmitterModel::make_param()`, and `mappel::Gauss1DModel::Stencil::theta`.

9.8.4.36 `Gauss1DModel::Stencil mappel::Gauss1DModel::initial_theta_estimate (const ImageT & im, const ParamT & theta_init) const`

Definition at line 207 of file Gauss1DModel.cpp.

References `mappel::Gauss1DModel::Stencil::bg()`, `mappel::Gauss1DModel::Stencil::l()`, `make_stencil()`, `mappel::PointEmitterModel::num_params`, and `mappel::ImageFormat1DBase::size`.

9.8.4.37 `CompositeDist mappel::Gauss1DModel::make_default_prior (IdxT size, const std::string & prior_type)` `[static]`

Definition at line 59 of file Gauss1DModel.cpp.

References `mappel::istarts_with()`, `make_default_prior_beta_position()`, and `make_default_prior_normal_position()`.

9.8.4.38 `CompositeDist mappel::Gauss1DModel::make_default_prior_beta_position (IdxT size)` `[static]`

Definition at line 80 of file Gauss1DModel.cpp.

References `mappel::PointEmitterModel::default_pixel_mean_bg`, `mappel::PointEmitterModel::make_prior_component_intensity()`, and `mappel::PointEmitterModel::make_prior_component_position_beta()`.

Referenced by `make_default_prior()`.

9.8.4.39 `CompositeDist mappel::Gauss1DModel::make_default_prior_normal_position (IdxT size)` `[static]`

Definition at line 90 of file Gauss1DModel.cpp.

References `mappel::PointEmitterModel::default_pixel_mean_bg`, `mappel::PointEmitterModel::make_prior_component_intensity()`, and `mappel::PointEmitterModel::make_prior_component_position_normal()`.

Referenced by `make_default_prior()`.

9.8.4.40 `ImageFormat1DBase::ImageT ImageFormat1DBase::make_image () const` `[inline]`, `[inherited]`

Definition at line 87 of file ImageFormat1DBase.h.

References `mappel::ImageFormat1DBase::size`.

9.8.4.41 `ImageFormat1DBase::ImageStackT ImageFormat1DBase::make_image_stack (ImageCoordT n) const` `[inline]`, `[inherited]`

Definition at line 94 of file ImageFormat1DBase.h.

References `mappel::ImageFormat1DBase::size`.

9.8.4.42 `PointEmitterModel::ParamT mappel::PointEmitterModel::make_param () const` `[inline],[inherited]`

Definition at line 164 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

Referenced by initial_theta_estimate(), mappel::Gauss1DsModel::initial_theta_estimate(), mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsxyModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), pixel_hess_update(), mappel::Gauss1DsModel::pixel_hess_update(), mappel::Gauss2DModel::pixel_hess_update(), and mappel::Gauss2DsModel::pixel_hess_update().

9.8.4.43 `template<class FillT > PointEmitterModel::ParamT mappel::PointEmitterModel::make_param (FillT fill) const` `[inherited]`

Definition at line 181 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.8.4.44 `MatT mappel::PointEmitterModel::make_param_mat () const` `[inline],[inherited]`

Definition at line 172 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.8.4.45 `template<class FillT > MatT mappel::PointEmitterModel::make_param_mat (FillT fill) const` `[inherited]`

Definition at line 191 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.8.4.46 `CubeT mappel::PointEmitterModel::make_param_mat_stack (IdxT n) const` `[inline],[inherited]`

Definition at line 176 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.8.4.47 `template<class FillT > CubeT mappel::PointEmitterModel::make_param_mat_stack (IdxT n, FillT fill) const` `[inherited]`

Definition at line 196 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.8.4.48 `PointEmitterModel::ParamVecT mappel::PointEmitterModel::make_param_stack (IdxT n) const` `[inline],[inherited]`

Definition at line 168 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

Referenced by mappel::PointEmitterModel::bounded_theta_stack(), and mappel::PointEmitterModel::reflected_theta_stack().

9.8.4.49 `template<class FillT > PointEmitterModel::ParamVecT mappel::PointEmitterModel::make_param_stack (IdxT n, FillT fill) const` `[inherited]`

Definition at line 186 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::num_params`.

9.8.4.50 `CompositeDist mappel::Gauss1DModel::make_prior_beta_position (IdxT size, double beta_xpos, double mean_l, double kappa_l, double mean_bg, double kappa_bg)` `[static]`

Definition at line 101 of file Gauss1DModel.cpp.

References `mappel::PointEmitterModel::make_prior_component_intensity()`, and `mappel::PointEmitterModel::make_prior_component_position_beta()`.

Referenced by `mappel::Gauss2DModel::make_internal_1Dsum_estimator()`.

9.8.4.51 `prior_hessian::TruncatedGammaDist mappel::PointEmitterModel::make_prior_component_intensity (double mean = default_mean_l, double kappa = default_intensity_kappa)` `[static],[inherited]`

Definition at line 98 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::default_max_l`.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_beta_position()`, `make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_normal_position()`, `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_prior_beta_position()`, `mappel::Gauss1DsModel::make_prior_beta_position()`, `make_prior_beta_position()`, `mappel::Gauss2DsModel::make_prior_beta_position()`, `mappel::Gauss2DModel::make_prior_normal_position()`, `mappel::Gauss1DsModel::make_prior_normal_position()`, `make_prior_normal_position()`, and `mappel::Gauss2DsModel::make_prior_normal_position()`.

9.8.4.52 `prior_hessian::ScaledSymmetricBetaDist mappel::PointEmitterModel::make_prior_component_position_beta (IdxT size, double pos_beta = default_beta_pos)` `[static],[inherited]`

Definition at line 92 of file PointEmitterModel.cpp.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_beta_position()`, `make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss1DsModel::make_prior_beta_position()`, `mappel::Gauss2DModel::make_prior_beta_position()`, `make_prior_beta_position()`, and `mappel::Gauss2DsModel::make_prior_beta_position()`.

9.8.4.53 `prior_hessian::TruncatedNormalDist mappel::PointEmitterModel::make_prior_component_position_normal (IdxT size, double pos_sigma = default_sigma_pos)` `[static],[inherited]`

Definition at line 85 of file PointEmitterModel.cpp.

Referenced by `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_default_prior_normal_position()`, `make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_prior_normal_position()`, `mappel::Gauss1DsModel::make_prior_normal_position()`, `make_prior_normal_position()`, and `mappel::Gauss2DsModel::make_prior_normal_position()`.

9.8.4.54 `prior_hessian::TruncatedParetoDist mappel::PointEmitterModel::make_prior_component_sigma (double min_sigma, double max_sigma, double alpha = default_alpha_sigma)` [static],[inherited]

Definition at line 104 of file PointEmitterModel.cpp.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, `mappel::Gauss1DsModel::make_prior_beta_position()`, `mappel::Gauss2DsModel::make_prior_beta_position()`, `mappel::Gauss1DsModel::make_prior_normal_position()`, and `mappel::Gauss2DsModel::make_prior_normal_position()`.

9.8.4.55 `CompositeDist mappel::Gauss1DModel::make_prior_normal_position (IdxT size, double sigma_xpos, double mean_l, double kappa_l, double mean_bg, double kappa_bg)` [static]

Definition at line 114 of file Gauss1DModel.cpp.

References `mappel::PointEmitterModel::make_prior_component_intensity()`, and `mappel::PointEmitterModel::make_prior_component_position_normal()`.

Referenced by `mappel::Gauss2DModel::make_internal_1Dsum_estimator()`.

9.8.4.56 `Gauss1DModel::Stencil mappel::Gauss1DModel::make_stencil (const ParamT & theta, bool compute_derivatives = true) const` [inline]

Make a new Model::Stencil object at *theta*.

Stencils store all of the important calculations necessary for evaluating the log-likelihood and its derivatives at a particular *theta* (parameter) value.

This allows re-use of the most expensive computations. Stencils can be easily passed around by reference, and most functions in the [mappel::methods](#) namespace accept a const [Stencil](#) reference in place of the model parameter.

Throws [mappel::ModelBoundsError](#) if not `model.theta_in_bounds(theta)`.

If derivatives will not be computed with this stencil set `compute_derivatives=false`

Parameters

<i>theta</i>	Parameter to evaluate at
<i>compute_derivatives</i>	True to also prepare for derivative computations

Returns

A new [Stencil](#) object ready to compute with

Definition at line 116 of file Gauss1DModel.h.

References `mappel::Gauss1DModel::Stencil::Stencil()`, and `mappel::PointEmitterModel::theta_in_bounds()`.

Referenced by `initial_theta_estimate()`.

9.8.4.57 `Gauss1DModel & mappel::Gauss1DModel::operator= (const Gauss1DModel & o)` `[protected]`

Definition at line 32 of file Gauss1DModel.cpp.

References `mappel::MCMCAdaptor1D::operator=()`, and `psf_sigma`.

Referenced by `mappel::Gauss1DModel::operator=()`, and `mappel::Gauss1DModel::operator=()`.

9.8.4.58 `Gauss1DModel & mappel::Gauss1DModel::operator= (Gauss1DModel && o)` `[protected]`

Definition at line 41 of file Gauss1DModel.cpp.

References `DefaultPriorType`, `mappel::MCMCAdaptor1D::operator=()`, `prior_types`, and `psf_sigma`.

9.8.4.59 `void mappel::Gauss1DModel::pixel_grad (IdxT i, const Stencil & s, ParamT & pgrad) const` `[inline]`

Definition at line 141 of file Gauss1DModel.h.

References `mappel::Gauss1DModel::Stencil::DX`, `mappel::Gauss1DModel::Stencil::l()`, and `mappel::Gauss1DModel::Stencil::X`.

Referenced by `pixel_hess_update()`.

9.8.4.60 `void mappel::Gauss1DModel::pixel_grad2 (IdxT i, const Stencil & s, ParamT & pgrad2) const` `[inline]`

Definition at line 150 of file Gauss1DModel.h.

References `mappel::Gauss1DModel::Stencil::DXS`, `mappel::Gauss1DModel::Stencil::l()`, and `psf_sigma`.

9.8.4.61 `void mappel::Gauss1DModel::pixel_hess (IdxT i, const Stencil & s, MatT & hess) const` `[inline]`

Definition at line 159 of file Gauss1DModel.h.

References `mappel::Gauss1DModel::Stencil::DX`, `mappel::Gauss1DModel::Stencil::DXS`, `mappel::Gauss1DModel::Stencil::l()`, and `psf_sigma`.

9.8.4.62 `void mappel::Gauss1DModel::pixel_hess_update (IdxT i, const Stencil & s, double dm_ratio_m1, double dmm_ratio, ParamT & grad, MatT & hess) const`

pixel derivative inner loop calculations.

Definition at line 191 of file Gauss1DModel.cpp.

References `mappel::Gauss1DModel::Stencil::DXS`, `mappel::Gauss1DModel::Stencil::l()`, `mappel::PointEmitterModel::make_param()`, `pixel_grad()`, and `psf_sigma`.

9.8.4.63 `double mappel::Gauss1DModel::pixel_model_value (IdxT i, const Stencil & s) const` `[inline]`

Definition at line 135 of file Gauss1DModel.h.

References `mappel::Gauss1DModel::Stencil::bg()`, `mappel::Gauss1DModel::Stencil::l()`, and `mappel::Gauss1DModel::Stencil::X`.

9.8.4.64 `PointEmitterModel::ParamT mappel::PointEmitterModel::reflected_theta (const ParamT & theta) const`
`[inherited]`

Definition at line 276 of file `PointEmitterModel.cpp`.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::PointEmitterModel::reflected_theta_stack()`.

9.8.4.65 `PointEmitterModel::ParamVecT mappel::PointEmitterModel::reflected_theta_stack (const ParamVecT & theta) const`
`[inherited]`

Definition at line 316 of file `PointEmitterModel.cpp`.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::make_param_stack()`, and `mappel::PointEmitterModel::reflected_theta()`.

9.8.4.66 `void mappel::PointEmitterModel::rename_hyperparam (const std::string & old_name, const std::string & new_name)`
`[inline], [inherited]`

Definition at line 244 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

9.8.4.67 `void mappel::MCMCAdaptor1D::sample_mcmc_candidate (IdxT sample_index, ParamT & candidate, double step_scale = 1.0) const`
`[inherited]`

Definition at line 108 of file `MCMCAdaptor1D.cpp`.

References `mappel::MCMCAdaptor1D::eta_bg`, `mappel::MCMCAdaptor1D::eta_l`, `mappel::MCMCAdaptor1D::eta_x`, `mappel::MCMCAdaptorBase::num_phases`, and `mappel::rng_manager`.

9.8.4.68 `void mappel::MCMCAdaptor1D::sample_mcmc_candidate (IdxT sample_index, ParamT & candidate, const IdxVecT & fixed_parameters_mask, double step_scale = 1.0) const`
`[inherited]`

Definition at line 122 of file `MCMCAdaptor1D.cpp`.

References `mappel::MCMCAdaptor1D::eta_bg`, `mappel::MCMCAdaptor1D::eta_l`, `mappel::MCMCAdaptor1D::eta_x`, `mappel::MCMCAdaptorBase::num_phases`, and `mappel::rng_manager`.

9.8.4.69 `template<class RngT > PointEmitterModel::ParamT mappel::PointEmitterModel::sample_prior (RngT & rng) const`
`[inherited]`

Definition at line 264 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

9.8.4.70 `PointEmitterModel::ParamT mappel::PointEmitterModel::sample_prior () const` `[inline],[inherited]`

Definition at line 268 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`, and `mappel::rng_manager`.

9.8.4.71 `void mappel::MCMCAdaptor1D::set_background_mcmc_sampling (double eta_bg = -1)` `[inherited]`

Definition at line 81 of file `MCMCAdaptor1D.cpp`.

References `mappel::PointEmitterModel::default_pixel_mean_bg`, `mappel::MCMCAdaptor1D::eta_bg`, `mappel::PointEmitterModel::get_hyperparam_value()`, `mappel::PointEmitterModel::get_lbound()`, `mappel::PointEmitterModel::get_ubound()`, and `mappel::MCMCAdaptorBase::sigma_scale`.

Referenced by `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`.

9.8.4.72 `void mappel::PointEmitterModel::set_bounds (const ParamT & lbound_, const ParamT & ubound_)`
`[inherited]`

Box-type parameter bounds

Modifies the prior bounds to prevent sampling outside the valid box-constraints.

Definition at line 213 of file `PointEmitterModel.cpp`.

References `mappel::PointEmitterModel::bounds_epsilon`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

9.8.4.73 `void mappel::PointEmitterModel::set_hyperparam_names (const StringVecT & desc)` `[inline],[inherited]`

Definition at line 260 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

9.8.4.74 `void mappel::PointEmitterModel::set_hyperparam_value (const std::string & name, double value)` `[inline],[inherited]`

Definition at line 240 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

9.8.4.75 `void mappel::PointEmitterModel::set_hyperparams (const VecT & hyperparams)` `[inline],[inherited]`

Definition at line 220 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

Referenced by `mappel::Gauss2DModel::set_hyperparams()`, and `mappel::Gauss2DsModel::set_hyperparams()`.

9.8.4.76 `template<class ImT > void ImageFormat1DBase::set_image_in_stack (ImageStackT & stack, ImageCoordT n, const ImT & im) const` `[inherited]`

Definition at line 115 of file ImageFormat1DBase.h.

9.8.4.77 `void mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling (double eta_I = -1)` `[inherited]`

Definition at line 65 of file MCMCAdaptor1D.cpp.

References `mappel::PointEmitterModel::default_mean_I`, `mappel::MCMCAdaptor1D::eta_I`, `mappel::PointEmitterModel::get_hyperparam_value()`, and `mappel::MCMCAdaptorBase::sigma_scale`.

Referenced by `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`.

9.8.4.78 `void mappel::PointEmitterModel::set_lbound (const ParamT & lbound)` `[inherited]`

Definition at line 226 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::bounds_epsilon`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::Gauss1DsModel::set_min_sigma()`.

9.8.4.79 `void mappel::MCMCAdaptorBase::set_mcmc_num_phases (IdxT num_phases)` `[protected]`, `[inherited]`

Definition at line 59 of file MCMCAdaptorBase.cpp.

References `mappel::MCMCAdaptorBase::num_phases`.

Referenced by `mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds()`, and `mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds()`.

9.8.4.80 `void mappel::MCMCAdaptorBase::set_mcmc_sigma_scale (double scale)` `[inherited]`

Definition at line 39 of file MCMCAdaptorBase.cpp.

References `mappel::MCMCAdaptorBase::global_max_mcmc_sigma_scale`, and `mappel::MCMCAdaptorBase::sigma_scale`.

9.8.4.81 `void mappel::PointEmitterModel::set_param_names (const StringVecT & desc)` `[inline]`, `[inherited]`

Definition at line 252 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.8.4.82 `void mappel::PointEmitterModel::set_prior (CompositeDist && prior_)` `[inherited]`

Definition at line 158 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_hyperparams`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::Gauss2DModel::set_prior()`, and `mappel::Gauss2DsModel::set_prior()`.

9.8.4.83 `void mappel::PointEmitterModel::set_prior (const CompositeDist & prior_)` `[inherited]`

Definition at line 149 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_hyperparams`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

9.8.4.84 `void mappel::Gauss1DModel::set_psf_sigma (double new_psf_sigma)`

Definition at line 125 of file Gauss1DModel.cpp.

References `mappel::PointEmitterModel::check_psf_sigma()`, and `psf_sigma`.

Referenced by `set_psf_sigma()`, and `mappel::Gauss2DModel::set_psf_sigma()`.

9.8.4.85 `void mappel::Gauss1DModel::set_psf_sigma (const VecT & new_psf_sigma)` `[inline]`

Definition at line 131 of file Gauss1DModel.h.

References `set_psf_sigma()`.

9.8.4.86 `void mappel::PointEmitterModel::set_rng_seed (RngSeedT seed)` `[static]`, `[inherited]`

Definition at line 110 of file PointEmitterModel.cpp.

References `mappel::rng_manager`.

9.8.4.87 `void ImageFormat1DBase::set_size (const ImageSizeT & size_)` `[inherited]`

Definition at line 30 of file ImageFormat1DBase.cpp.

References `mappel::ImageFormat1DBase::check_size()`, and `mappel::ImageFormat1DBase::size`.

Referenced by `mappel::ImageFormat1DBase::set_size()`, `mappel::Gauss2DModel::set_size()`, and `mappel::Gauss2DsModel::set_size()`.

9.8.4.88 `void ImageFormat1DBase::set_size (const arma::Col< ImageCoordT > & sz)` `[inline]`, `[inherited]`

Definition at line 75 of file ImageFormat1DBase.h.

References `mappel::ImageFormat1DBase::set_size()`.

9.8.4.89 `void mappel::PointEmitterModel::set_ubound (const ParamT & ubound)` `[inherited]`

Definition at line 237 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::bounds_epsilon`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::Gauss1DsModel::set_max_sigma()`, and `mappel::Gauss2DsModel::set_max_sigma_ratio()`.

9.8.4.90 `bool mappel::PointEmitterModel::theta_in_bounds (const ParamT & theta) const` `[inherited]`

Definition at line 257 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsModel::initial_theta_estimate()`, `make_stencil()`, `mappel::Gauss1DsModel::make_stencil()`, `mappel::Gauss2DModel::make_stencil()`, `mappel::Gauss2DsxyModel::make_stencil()`, `mappel::Gauss2DsModel::make_stencil()`, and `mappel::PointEmitterModel::theta_stack_in_bounds()`.

9.8.4.91 `BoolVecT mappel::PointEmitterModel::theta_stack_in_bounds (const ParamVecT & theta) const` `[inherited]`

Definition at line 296 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, and `mappel::PointEmitterModel::theta_in_bounds()`.

9.8.5 Member Data Documentation

9.8.5.1 `const double mappel::PointEmitterModel::bounds_epsilon = 1.0E-6` `[static]`, `[inherited]`

Distance from the boundary to constrain in `bound_theta` and `bounded_theta` methods

Definition at line 52 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::Gauss2DsModel::set_max_sigma_ratio()`, and `mappel::PointEmitterModel::set_ubound()`.

9.8.5.2 `const double mappel::PointEmitterModel::default_alpha_sigma = 2` `[static]`, `[inherited]`

Default per-pixel background gamma distribution shape

Definition at line 62 of file PointEmitterModel.h.

9.8.5.3 `const double mappel::PointEmitterModel::default_beta_pos = 3` `[static]`, `[inherited]`

Default position parameter in symmetric beta-distributions

Definition at line 56 of file PointEmitterModel.h.

9.8.5.4 `const double mappel::PointEmitterModel::default_intensity_kappa = 2` `[static]`, `[inherited]`

Default shape for intensity gamma distributions

Definition at line 60 of file PointEmitterModel.h.

9.8.5.5 `const double mappel::PointEmitterModel::default_max_I = INFINITY` `[static], [inherited]`

Default maximum emitter intensity

Definition at line 59 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::make_prior_component_intensity()`.

9.8.5.6 `const double mappel::PointEmitterModel::default_mean_I = 300` `[static], [inherited]`

Default emitter intensity mean

Definition at line 58 of file PointEmitterModel.h.

Referenced by `mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling()`.

9.8.5.7 `const double mappel::PointEmitterModel::default_pixel_mean_bg = 4` `[static], [inherited]`

Default per-pixel mean background counts

Definition at line 61 of file PointEmitterModel.h.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_beta_position()`, `make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_default_prior_normal_position()`, `make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, and `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`.

9.8.5.8 `const double mappel::PointEmitterModel::default_sigma_pos = 1` `[static], [inherited]`

Default position parameter in symmetric beta-distributions

Definition at line 57 of file PointEmitterModel.h.

9.8.5.9 `const std::string mappel::Gauss1DModel::DefaultPriorType = "Normal"` `[static]`

Definition at line 53 of file Gauss1DModel.h.

Referenced by `operator=()`.

9.8.5.10 `const std::string mappel::PointEmitterModel::DefaultSeperableInitEstimator = "TrustRegion"` `[static], [inherited]`

Estimator name to use in 1D separable initializations

Definition at line 49 of file PointEmitterModel.h.

Referenced by `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsxyModel::initial_theta_estimate()`, and `mappel::Gauss2DsModel::initial_theta_estimate()`.

9.8.5.11 `double mappel::MCMCAdaptor1D::eta_bg = 0` `[protected]`, `[inherited]`

The standard deviation for the normally distributed perturbation to `theta_bg` in the random walk MCMC sampling

Definition at line 33 of file `MCMCAdaptor1D.h`.

Referenced by `mappel::MCMCAdaptor1D::get_stats()`, `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor1D::operator=()`, `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`, and `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`.

9.8.5.12 `double mappel::MCMCAdaptor1D::eta_l = 0` `[protected]`, `[inherited]`

The standard deviation for the normally distributed perturbation to `theta_l` in the random walk MCMC sampling

Definition at line 32 of file `MCMCAdaptor1D.h`.

Referenced by `mappel::MCMCAdaptor1D::get_stats()`, `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor1D::operator=()`, `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`, and `mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling()`.

9.8.5.13 `double mappel::MCMCAdaptor1D::eta_x = 0` `[protected]`, `[inherited]`

The standard deviation for the normally distributed perturbation to `theta_x` in the random walk MCMC sampling

Definition at line 31 of file `MCMCAdaptor1D.h`.

Referenced by `mappel::MCMCAdaptor1D::get_stats()`, `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor1D::operator=()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, and `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`.

9.8.5.14 `const double mappel::MCMCAdaptorBase::global_default_mcmc_sigma_scale = 0.05` `[static]`, `[inherited]`

Definition at line 16 of file `MCMCAdaptorBase.h`.

Referenced by `mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds()`, `mappel::MCMCAdaptor2D::MCMCAdaptor2D()`, and `mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds()`.

9.8.5.15 `const double mappel::MCMCAdaptorBase::global_max_mcmc_sigma_scale = 0.5` `[static]`, `[inherited]`

Definition at line 17 of file `MCMCAdaptorBase.h`.

Referenced by `mappel::MCMCAdaptorBase::MCMCAdaptorBase()`, and `mappel::MCMCAdaptorBase::set_mcmc_sigma_scale()`.

9.8.5.16 `const double mappel::PointEmitterModel::global_max_psf_sigma = 1E2` `[static], [inherited]`

Global maximum for any `psf_sigma`. Sizes above this value are invalid, and nowhere near useful for practical point emitter localization

Definition at line 54 of file `PointEmitterModel.h`.

Referenced by `mappel::PointEmitterModel::check_psf_sigma()`.

9.8.5.17 `const ImageFormat1DBase::ImageCoordT ImageFormat1DBase::global_max_size = 512` `[static], [inherited]`

Maximum size along any dimension of the image. This is insanely big to catch obvious errors

Definition at line 40 of file `ImageFormat1DBase.h`.

Referenced by `mappel::ImageFormat1DBase::check_size()`.

9.8.5.18 `const double mappel::PointEmitterModel::global_min_psf_sigma = 1E-1` `[static], [inherited]`

Global minimum for any `psf_sigma`. Sizes below this value are invalid, and nowhere near useful for practical point emitter localization

Definition at line 53 of file `PointEmitterModel.h`.

Referenced by `mappel::PointEmitterModel::check_psf_sigma()`.

9.8.5.19 `const ImageFormat1DBase::ImageCoordT ImageFormat1DBase::global_min_size = 3` `[static], [inherited]`

Minimum size along any dimension of the image.

Definition at line 39 of file `ImageFormat1DBase.h`.

Referenced by `mappel::ImageFormat1DBase::check_size()`.

9.8.5.20 `ParamT mappel::PointEmitterModel::lbound` `[protected], [inherited]`

Definition at line 148 of file `PointEmitterModel.h`.

Referenced by `mappel::PointEmitterModel::bound_theta()`, `mappel::PointEmitterModel::bounded_theta()`, `mappel::PointEmitterModel::get_lbound()`, `mappel::PointEmitterModel::get_stats()`, `mappel::Gauss1DsModel::initial_theta_estimate()`, `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsModel::initial_theta_estimate()`, `mappel::PointEmitterModel::operator=()`, `mappel::PointEmitterModel::reflected_theta()`, `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::PointEmitterModel::set_prior()`, `mappel::PointEmitterModel::set_ubound()`, and `mappel::PointEmitterModel::theta_in_bounds()`.

9.8.5.21 `const ImageFormat1DBase::ImageCoordT ImageFormat1DBase::num_dim = 1` `[static], [inherited]`

Number of image dimensions.

Definition at line 38 of file ImageFormat1DBase.h.

Referenced by `mappel::ImageFormat1DBase::get_stats()`.

9.8.5.22 `IdxT mappel::PointEmitterModel::num_hyperparams` `[protected], [inherited]`

Definition at line 147 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::get_num_hyperparams()`, `mappel::PointEmitterModel::get_stats()`, `mappel::PointEmitterModel::operator=()`, and `mappel::PointEmitterModel::set_prior()`.

9.8.5.23 `IdxT mappel::PointEmitterModel::num_params` `[protected], [inherited]`

Definition at line 146 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::bound_theta()`, `mappel::PointEmitterModel::bounded_theta()`, `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::get_num_params()`, `mappel::PointEmitterModel::get_stats()`, `initial_theta_estimate()`, `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsModel::initial_theta_estimate()`, `mappel::PointEmitterModel::make_param()`, `mappel::PointEmitterModel::make_param_mat()`, `mappel::PointEmitterModel::make_param_mat_stack()`, `mappel::PointEmitterModel::make_param_stack()`, `mappel::PointEmitterModel::operator=()`, `mappel::PointEmitterModel::reflected_theta()`, `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::PointEmitterModel::set_prior()`, `mappel::PointEmitterModel::set_ubound()`, and `mappel::PointEmitterModel::theta_in_bounds()`.

9.8.5.24 `IdxT mappel::MCMCAdaptorBase::num_phases` `[protected], [inherited]`

The number of different sampling phases for candidate selection MCMC. Each phase changes a different subset of variables.

Definition at line 29 of file MCMCAdaptorBase.h.

Referenced by `mappel::MCMCAdaptorBase::get_mcmc_num_phases()`, `mappel::MCMCAdaptorBase::get_stats()`, `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`, and `mappel::MCMCAdaptorBase::set_mcmc_num_phases()`.

9.8.5.25 `CompositeDist mappel::PointEmitterModel::prior` `[protected], [inherited]`

Definition at line 145 of file PointEmitterModel.h.

Referenced by `mappel::Gauss2DModel::debug_internal_sum_model_y()`, `mappel::Gauss2DsModel::debug_internal_sum_model_y()`, `mappel::Gauss2DModel::Gauss2DModel()`, `mappel::Gauss2DsModel::Gauss2DsModel()`, `mappel::PointEmitterModel::get_hyperparam_index()`, `mappel::PointEmitterModel::get_hyperparam_names()`, `mappel::PointEmitterModel::get_hyperparam_value()`, `mappel::PointEmitterModel::get_hyperparams()`, `mappel::Gauss1DsModel::get_max_sigma()`, `mappel::Gauss1DsModel::get_min_sigma()`, `mappel::PointEmitterModel::get_param_names()`, `mappel::PointEmitterModel::get_prior()`, `mappel::PointEmitterModel::get_stats()`, `mappel::PointEmitterModel::has_hyperparam()`, `mappel::PointEmitterModel::operator=()`, `mappel::PointEmitterModel::PointEmitterModel()`, `mappel::PointEmitterModel::rename_hyperparam()`, `mappel::PointEmitterModel::sample_prior()`, `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_hyperparam_names()`, `mappel::PointEmitterModel::set_hyperparam_value()`, `mappel::PointEmitterModel::set_hyperparams()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::Gauss1DsModel::set_max_sigma()`, `mappel::Gauss1DsModel::set_min_sigma()`, `mappel::PointEmitterModel::set_param_names()`, `mappel::PointEmitterModel::set_prior()`, and `mappel::PointEmitterModel::set_ubound()`.

9.8.5.26 `const StringVecT mappel::Gauss1DModel::prior_types` `[static]`

Initial value:

```
= { "Beta",
                                     "Normal"
}
```

Definition at line 52 of file Gauss1DModel.h.

Referenced by operator=().

9.8.5.27 `double mappel::Gauss1DModel::psf_sigma` `[protected]`

Standard deviation of the fixed-sigma 1D Gaussian PSF in pixels

Definition at line 90 of file Gauss1DModel.h.

Referenced by mappel::Gauss1DModel::Stencil::compute_derivatives(), get_psf_sigma(), operator=(), pixel_grad2(), pixel_hess(), pixel_hess_update(), set_psf_sigma(), and mappel::Gauss1DModel::Stencil::Stencil().

9.8.5.28 `double mappel::MCMCAdaptorBase::sigma_scale` `[protected],[inherited]`

A scaling factor for step sizes as a fraction of the size of the domain dimension we are walking in. (0.05 default)

Definition at line 30 of file MCMCAdaptorBase.h.

Referenced by mappel::MCMCAdaptorBase::get_mcmc_sigma_scale(), mappel::MCMCAdaptorBase::get_stats(), mappel::MCMCAdaptor1D::MCMCAdaptor1D(), mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds(), mappel::MCMCAdaptor2D::MCMCAdaptor2D(), mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds(), mappel::MCMCAdaptor1D::set_background_mcmc_sampling(), mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling(), and mappel::MCMCAdaptorBase::set_mcmc_sigma_scale().

9.8.5.29 `ImageSizeT mappel::ImageFormat1DBase::size` `[protected],[inherited]`

Number of pixels in X dimension for 1D image

Definition at line 65 of file ImageFormat1DBase.h.

Referenced by mappel::ImageFormat1DBase::check_image_shape(), mappel::Gauss1DsModel::Stencil::compute_derivatives(), mappel::Gauss1DModel::Stencil::compute_derivatives(), mappel::ImageFormat1DBase::get_num_pixels(), mappel::ImageFormat1DBase::get_size(), initial_theta_estimate(), mappel::Gauss1DsModel::initial_theta_estimate(), mappel::ImageFormat1DBase::make_image(), mappel::ImageFormat1DBase::make_image_stack(), mappel::ImageFormat1DBase::set_size(), mappel::Gauss1DsModel::Stencil::Stencil(), and mappel::Gauss1DModel::Stencil::Stencil().

9.8.5.30 ParamT mappel::PointEmitterModel::ubound [protected], [inherited]

Definition at line 148 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::bound_theta(), mappel::PointEmitterModel::bounded_theta(), mappel::PointEmitterModel::get_stats(), mappel::PointEmitterModel::get_ubound(), mappel::Gauss1DsModel::initial_theta_estimate(), mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::PointEmitterModel::operator=(), mappel::PointEmitterModel::reflected_theta(), mappel::PointEmitterModel::set_bounds(), mappel::PointEmitterModel::set_lbound(), mappel::PointEmitterModel::set_prior(), mappel::PointEmitterModel::set_ubound(), and mappel::PointEmitterModel::theta_in_bounds().

The documentation for this class was generated from the following files:


- [Gauss1DModel.h](#)
- [Gauss1DModel.cpp](#)

9.9 mappel::Gauss1DsMAP Class Reference

A 1D Gaussian with variable PSF sigma under an Poisson read noise assumption and MAP Objective.

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/Gauss1DsMAP.h>
```

Inheritance diagram for mappel::Gauss1DsMAP:

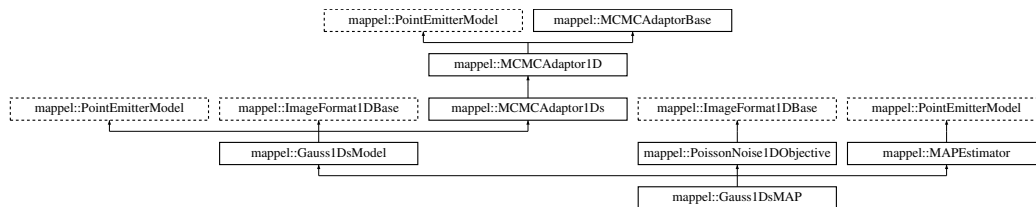

Public Types

- using [StencilVecT](#) = std::vector< [Stencil](#) >
- using [ParamT](#) = arma::vec
- using [ParamVecT](#) = arma::mat
- using [ImageCoordT](#) = uint32_t
- using [ImagePixelT](#) = double
- template<class CoordT >
using [ImageSizeShapeT](#) = CoordT
- template<class CoordT >
using [ImageSizeVecShapeT](#) = arma::Col< CoordT >
- using [ImageSizeT](#) = [ImageSizeShapeT](#)< [ImageCoordT](#) >
- using [ImageSizeVecT](#) = [ImageSizeVecShapeT](#)< [ImageCoordT](#) >
- template<class PixelT >
using [ImageShapeT](#) = arma::Col< PixelT >
- template<class PixelT >
using [ImageStackShapeT](#) = arma::Mat< PixelT >
- using [ImageT](#) = [ImageShapeT](#)< [ImagePixelT](#) >
- using [ImageStackT](#) = [ImageStackShapeT](#)< [ImagePixelT](#) >
- using [ModelDataT](#) = [ImageT](#)
- using [ModelDataStackT](#) = [ImageStackT](#)

Public Member Functions

- [Gauss1DsMAP](#) (arma::Col< [ImageCoordT](#) > [size](#), [VecT](#) [min_sigma](#), [VecT](#) [max_sigma](#), const std::string &[prior](#)↵
_type=[DefaultPriorType](#))
- [Gauss1DsMAP](#) ([ImageSizeT](#) [size](#), double [min_sigma](#), double [max_sigma](#), const std::string &[prior](#),_type=[Default](#)↵
[PriorType](#))
- [Gauss1DsMAP](#) ([ImageSizeT](#) [size](#), [CompositeDist](#) &&[prior](#))
- [Gauss1DsMAP](#) ([ImageSizeT](#) [size](#), const [CompositeDist](#) &[prior](#))
- [Gauss1DsMAP](#) (const [Gauss1DsMAP](#) &o)
- [Gauss1DsMAP](#) & [operator=](#) (const [Gauss1DsMAP](#) &o)
- [Gauss1DsMAP](#) ([Gauss1DsMAP](#) &&o)
- [Gauss1DsMAP](#) & [operator=](#) ([Gauss1DsMAP](#) &&o)
- double [get_min_sigma](#) () const
- double [get_max_sigma](#) () const
- void [set_min_sigma](#) (double [min_sigma](#))
- void [set_min_sigma](#) (const [VecT](#) &[min_sigma](#))
- void [set_max_sigma](#) (double [max_sigma](#))
- void [set_max_sigma](#) (const [VecT](#) &[max_sigma](#))
- [StatsT](#) [get_stats](#) () const
- [Stencil](#) [make_stencil](#) (const [ParamT](#) &[theta](#), bool [compute_derivatives](#)=true) const
Make a new Model::Stencil object at theta.
- double [pixel_model_value](#) ([IdxT](#) i, const [Stencil](#) &s) const
- void [pixel_grad](#) ([IdxT](#) i, const [Stencil](#) &s, [ParamT](#) &pgrad) const
- void [pixel_grad2](#) ([IdxT](#) i, const [Stencil](#) &s, [ParamT](#) &pgrad2) const
- void [pixel_hess](#) ([IdxT](#) i, const [Stencil](#) &s, [MatT](#) &hess) const
- void [pixel_hess_update](#) ([IdxT](#) i, const [Stencil](#) &s, double [dm_ratio_m1](#), double [dmm_ratio](#), [ParamT](#) &[grad](#), [MatT](#) &hess) const
- [Stencil](#) [initial_theta_estimate](#) (const [ImageT](#) &im) const
Fast, heuristic estimate of initial theta.
- [Stencil](#) [initial_theta_estimate](#) (const [ImageT](#) &im, const [ParamT](#) &[theta_init](#)) const
- [IdxT](#) [get_num_params](#) () const
- void [check_param_shape](#) (const [ParamT](#) &[theta](#)) const
- void [check_param_shape](#) (const [ParamVecT](#) &[theta](#)) const
- void [check_psf_sigma](#) (double [psf_sigma](#)) const
- void [check_psf_sigma](#) (const [VecT](#) &[psf_sigma](#)) const
- [ParamT](#) [make_param](#) () const
- template<class [FillT](#) >
 [ParamT](#) [make_param](#) ([FillT](#) fill) const
- [ParamVecT](#) [make_param_stack](#) ([IdxT](#) n) const
- template<class [FillT](#) >
 [ParamVecT](#) [make_param_stack](#) ([IdxT](#) n, [FillT](#) fill) const
- [MatT](#) [make_param_mat](#) () const
- template<class [FillT](#) >
 [MatT](#) [make_param_mat](#) ([FillT](#) fill) const
- [CubeT](#) [make_param_mat_stack](#) ([IdxT](#) n) const
- template<class [FillT](#) >
 [CubeT](#) [make_param_mat_stack](#) ([IdxT](#) n, [FillT](#) fill) const
- [CompositeDist](#) & [get_prior](#) ()
- const [CompositeDist](#) & [get_prior](#) () const
- void [set_prior](#) ([CompositeDist](#) &&[prior](#)_)
- void [set_prior](#) (const [CompositeDist](#) &[prior](#)_)

- `IdxT get_num_hyperparams () const`
- `void set_hyperparams (const VecT &hyperparams)`
- `VecT get_hyperparams () const`
- `bool has_hyperparam (const std::string &name) const`
- `double get_hyperparam_value (const std::string &name) const`
- `int get_hyperparam_index (const std::string &name) const`
- `void set_hyperparam_value (const std::string &name, double value)`
- `void rename_hyperparam (const std::string &old_name, const std::string &new_name)`
- `StringVecT get_param_names () const`
- `void set_param_names (const StringVecT &desc)`
- `StringVecT get_hyperparam_names () const`
- `void set_hyperparam_names (const StringVecT &desc)`
- `template<class RngT >`
`ParamT sample_prior (RngT &rng) const`
- `ParamT sample_prior () const`
- `void set_bounds (const ParamT &lbound, const ParamT &ubound)`
- `void set_lbound (const ParamT &lbound)`
- `void set_ubound (const ParamT &ubound)`
- `const ParamT &get_lbound () const`
- `const ParamT &get_ubound () const`
- `bool theta_in_bounds (const ParamT &theta) const`
- `void bound_theta (ParamT &theta, double epsilon=bounds_epsilon) const`
- `ParamT bounded_theta (const ParamT &theta, double epsilon=bounds_epsilon) const`
- `ParamT reflected_theta (const ParamT &theta) const`
- `BoolVecT theta_stack_in_bounds (const ParamVecT &theta) const`
- `ParamVecT bounded_theta_stack (const ParamVecT &theta, double epsilon=bounds_epsilon) const`
- `ParamVecT reflected_theta_stack (const ParamVecT &theta) const`
- `ImageT make_image () const`
- `ImageStackT make_image_stack (ImageCoordT n) const`
- `ImageCoordT get_size_image_stack (const ImageStackT &stack) const`
- `ImageT get_image_from_stack (const ImageStackT &stack, ImageCoordT n) const`
- `template<class ImT >`
`void set_image_in_stack (ImageStackT &stack, ImageCoordT n, const ImT &im) const`
- `ImageSizeT get_size () const`
- `ImageCoordT get_size (IdxT idx) const`
- `ImageCoordT get_num_pixels () const`
- `void set_size (const ImageSizeT &size_)`
- `void set_size (const arma::Col< ImageCoordT > &sz)`
- `void check_image_shape (const ImageT &im) const`
Check the shape of a single images is correct for model size.
- `void check_image_shape (const ImageStackT &ims) const`
Check the shape of a stack of images is correct for model size.
- `void sample_mcmc_candidate (IdxT sample_index, ParamT &candidate, double step_scale=1.0) const`
- `void sample_mcmc_candidate (IdxT sample_index, ParamT &candidate, const IdxVecT &fixed_parameters_↵
mask, double step_scale=1.0) const`
- `void set_intensity_mcmc_sampling (double eta_l=-1)`
- `void set_background_mcmc_sampling (double eta_bg=-1)`
- `void set_mcmc_sigma_scale (double scale)`
- `double get_mcmc_sigma_scale () const`
- `IdxT get_mcmc_num_phases () const`

Static Public Member Functions

- static CompositeDist [make_default_prior](#) (IdxT size, double min_sigma, double max_sigma, const std::string &prior_type)
- static CompositeDist [make_default_prior_beta_position](#) (IdxT size, double min_sigma, double max_sigma)
- static CompositeDist [make_default_prior_normal_position](#) (IdxT size, double min_sigma, double max_sigma)
- static CompositeDist [make_prior_beta_position](#) (IdxT size, double beta_xpos, double mean_l, double kappa_l, double mean_bg, double kappa_bg, double min_sigma, double max_sigma, double alpha_sigma)
- static CompositeDist [make_prior_normal_position](#) (IdxT size, double sigma_xpos, double mean_l, double kappa_l, double mean_bg, double kappa_bg, double min_sigma, double max_sigma, double alpha_sigma)
- static prior_hessian::TruncatedNormalDist [make_prior_component_position_normal](#) (IdxT size, double pos_←, sigma=default_sigma_pos)
- static prior_hessian::ScaledSymmetricBetaDist [make_prior_component_position_beta](#) (IdxT size, double pos_←, beta=default_beta_pos)
- static prior_hessian::TruncatedGammaDist [make_prior_component_intensity](#) (double mean=default_mean_←, l, double kappa=default_intensity_kappa)
- static prior_hessian::TruncatedParetoDist [make_prior_component_sigma](#) (double min_sigma, double max_←, sigma, double alpha=default_alpha_sigma)
- static void [set_rng_seed](#) (RngSeedT seed)
- static ParallelRngManagerT & [get_rng_manager](#) ()
- static ParallelRngGeneratorT & [get_rng_generator](#) ()
- static void [check_size](#) (const ImageSizeT &size_)

Check the size argument for the model.

Static Public Attributes

- static const std::string [name](#)
- static const [StringVecT](#) [prior_types](#)
- static const std::string [DefaultPriorType](#) = "Normal"
- static const std::string [DefaultSeperableInitEstimator](#) = "TrustRegion"
- static const double [bounds_epsilon](#) = 1.0E-6
- static const double [global_min_psf_sigma](#) = 1E-1
- static const double [global_max_psf_sigma](#) = 1E2
- static const double [default_beta_pos](#) = 3
- static const double [default_sigma_pos](#) = 1
- static const double [default_mean_l](#) = 300
- static const double [default_max_l](#) = INFINITY
- static const double [default_intensity_kappa](#) = 2
- static const double [default_pixel_mean_bg](#) = 4
- static const double [default_alpha_sigma](#) = 2
- static const [ImageCoordT](#) [num_dim](#) = 1
- static const [ImageCoordT](#) [global_min_size](#) = 3
- static const [ImageCoordT](#) [global_max_size](#) = 512
- static const double [global_default_mcmc_sigma_scale](#) = 0.05
- static const double [global_max_mcmc_sigma_scale](#) = 0.5
- static const std::vector< std::string > [estimator_names](#)

Protected Member Functions

- void [set_mcmc_num_phases](#) (IdxT num_phases)

Protected Attributes

- CompositeDist [prior](#)
- [IdxT](#) num_params
- [IdxT](#) num_hyperparams
- [ParamT](#) lbound
- [ParamT](#) ubound
- [ImageSizeT](#) size
- double [eta_sigma](#) =-1
- double [eta_x](#) =0
- double [eta_l](#) =0
- double [eta_bg](#) =0
- [IdxT](#) num_phases
- double [sigma_scale](#)

9.9.1 Detailed Description

A 1D Gaussian with variable PSF sigma under an Poisson read noise assumption and MAP Objective.

Model: [Gauss1DsModel](#) a 1D gaussian PSF with variable psf_sigma Objective: [PoissonNoise1DObjective](#) - Poisson noise model for 1D Estimator: MAPstimator - Maximum a-posteriori estimator

Definition at line 24 of file Gauss1DsMAP.h.

9.9.2 Member Typedef Documentation

9.9.2.1 `using mappel::ImageFormat1DBase::ImageCoordT = uint32_t` [\[inherited\]](#)

Image size coordinate storage type

Definition at line 25 of file ImageFormat1DBase.h.

9.9.2.2 `using mappel::ImageFormat1DBase::ImagePixelT = double` [\[inherited\]](#)

Image pixel storage type

Definition at line 26 of file ImageFormat1DBase.h.

9.9.2.3 `template<class PixelT > using mappel::ImageFormat1DBase::ImageShapeT = arma::Col<PixelT>`
[\[inherited\]](#)

Shape of the data type for a single image

Definition at line 33 of file ImageFormat1DBase.h.

9.9.2.4 `template<class CoordT > using mappel::ImageFormat1DBase::ImageSizeShapeT = CoordT` [inherited]

Shape of the data type to store 1-image's coordinates

Definition at line 28 of file ImageFormat1DBase.h.

9.9.2.5 `using mappel::ImageFormat1DBase::ImageSizeT = ImageSizeShapeT<ImageCoordT>` [inherited]

Data type for a single image size

Definition at line 30 of file ImageFormat1DBase.h.

9.9.2.6 `template<class CoordT > using mappel::ImageFormat1DBase::ImageSizeVecShapeT = arma::Col<CoordT>`
[inherited]

Shape of the data type to store a vector of image's coordinates

Definition at line 29 of file ImageFormat1DBase.h.

9.9.2.7 `using mappel::ImageFormat1DBase::ImageSizeVecT = ImageSizeVecShapeT<ImageCoordT>`
[inherited]

Data type for a sequence of image sizes

Definition at line 31 of file ImageFormat1DBase.h.

9.9.2.8 `template<class PixelT > using mappel::ImageFormat1DBase::ImageStackShapeT = arma::Mat<PixelT>`
[inherited]

Shape of the data type for a sequence of images

Definition at line 34 of file ImageFormat1DBase.h.

9.9.2.9 `using mappel::ImageFormat1DBase::ImageStackT = ImageStackShapeT<ImagePixelT>`
[inherited]

Data type to represent a sequence of images

Definition at line 36 of file ImageFormat1DBase.h.

9.9.2.10 `using mappel::ImageFormat1DBase::ImageT = ImageShapeT<ImagePixelT>` [inherited]

Data type to represent single image

Definition at line 35 of file ImageFormat1DBase.h.

9.9.2.11 `using mappel::PoissonNoise1DObjective::ModelDataStackT = ImageStackT` [inherited]

Objective function data stack type: 1D double precision image stack, of images gain-corrected to approximate photons counts

Definition at line 26 of file PoissonNoise1DObjective.h.

9.9.2.12 `using mappel::PoissonNoise1DObjective::ModelDataT = ImageT` [inherited]

Objective function data type: 1D double precision image, gain-corrected to approximate photons counts

Definition at line 25 of file PoissonNoise1DObjective.h.

9.9.2.13 `using mappel::PointEmitterModel::ParamT = arma::vec` [inherited]

Parameter vector

Definition at line 47 of file PointEmitterModel.h.

9.9.2.14 `using mappel::PointEmitterModel::ParamVecT = arma::mat` [inherited]

Vector of parameter vectors

Definition at line 48 of file PointEmitterModel.h.

9.9.2.15 `using mappel::Gauss1DsModel::StencilVecT = std::vector<Stencil>` [inherited]

Definition at line 47 of file Gauss1DsModel.h.

9.9.3 Constructor & Destructor Documentation

9.9.3.1 `mappel::Gauss1DsMAP::Gauss1DsMAP (arma::Col< ImageCoordT > size, VecT min_sigma, VecT max_sigma, const std::string & prior_type = DefaultPriorType)`

Definition at line 12 of file Gauss1DsMAP.cpp.

9.9.3.2 `mappel::Gauss1DsMAP::Gauss1DsMAP (ImageSizeT size, double min_sigma, double max_sigma, const std::string & prior_type = DefaultPriorType)`

Definition at line 16 of file Gauss1DsMAP.cpp.

9.9.3.3 `mappel::Gauss1DsMAP::Gauss1DsMAP (ImageSizeT size, CompositeDist && prior)`

Definition at line 20 of file Gauss1DsMAP.cpp.

9.9.3.4 mappel::Gauss1DsMAP::Gauss1DsMAP (ImageSizeT *size*, const CompositeDist & *prior*)

Definition at line 28 of file Gauss1DsMAP.cpp.

9.9.3.5 mappel::Gauss1DsMAP::Gauss1DsMAP (const Gauss1DsMAP & *o*)

Definition at line 36 of file Gauss1DsMAP.cpp.

9.9.3.6 mappel::Gauss1DsMAP::Gauss1DsMAP (Gauss1DsMAP && *o*)

Definition at line 44 of file Gauss1DsMAP.cpp.

9.9.4 Member Function Documentation

9.9.4.1 void mappel::PointEmitterModel::bound_theta (ParamT & *theta*, double *epsilon* = bounds_epsilon) const [inherited]

Definition at line 248 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::check_param_shape(), mappel::PointEmitterModel::lbound, mappel::PointEmitterModel::num_params, and mappel::PointEmitterModel::ubound.

9.9.4.2 PointEmitterModel::ParamT mappel::PointEmitterModel::bounded_theta (const ParamT & *theta*, double *epsilon* = bounds_epsilon) const [inherited]

Definition at line 265 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::check_param_shape(), mappel::PointEmitterModel::lbound, mappel::PointEmitterModel::num_params, and mappel::PointEmitterModel::ubound.

Referenced by mappel::PointEmitterModel::bounded_theta_stack().

9.9.4.3 PointEmitterModel::ParamVecT mappel::PointEmitterModel::bounded_theta_stack (const ParamVecT & *theta*, double *epsilon* = bounds_epsilon) const [inherited]

Definition at line 306 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::bounded_theta(), mappel::PointEmitterModel::check_param_shape(), and mappel::PointEmitterModel::make_param_stack().

9.9.4.4 void ImageFormat1DBase::check_image_shape (const ImageT & *im*) const [inherited]

Check the shape of a single images is correct for model size.

Definition at line 59 of file ImageFormat1DBase.cpp.

References mappel::ImageFormat1DBase::size.

9.9.4.5 `void ImageFormat1DBase::check_image_shape (const ImageStackT & ims) const` [inherited]

Check the shape of a stack of images is correct for model size.

Definition at line 71 of file ImageFormat1DBase.cpp.

References mappel::ImageFormat1DBase::size.

9.9.4.6 `void mappel::PointEmitterModel::check_param_shape (const ParamT & theta) const` [inherited]

Definition at line 167 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::num_params.

Referenced by mappel::PointEmitterModel::bound_theta(), mappel::PointEmitterModel::bounded_theta(), mappel::PointEmitterModel::bounded_theta_stack(), mappel::PointEmitterModel::reflected_theta(), mappel::PointEmitterModel::reflected_theta_stack(), mappel::PointEmitterModel::theta_in_bounds(), and mappel::PointEmitterModel::theta_stack_in_bounds().

9.9.4.7 `void mappel::PointEmitterModel::check_param_shape (const ParamVecT & theta) const` [inherited]

Definition at line 176 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::num_params.

9.9.4.8 `void mappel::PointEmitterModel::check_psf_sigma (double psf_sigma) const` [inherited]

Definition at line 185 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::global_max_psf_sigma, and mappel::PointEmitterModel::global_min_psf_sigma.

Referenced by mappel::Gauss1DModel::Gauss1DModel(), mappel::Gauss2DModel::Gauss2DModel(), mappel::Gauss2DsModel::Gauss2DsModel(), mappel::Gauss1DsModel::set_max_sigma(), mappel::Gauss2DsModel::set_max_sigma(), mappel::Gauss1DsModel::set_min_sigma(), mappel::Gauss2DsModel::set_min_sigma(), mappel::Gauss1DModel::set_psf_sigma(), and mappel::Gauss2DModel::set_psf_sigma().

9.9.4.9 `void mappel::PointEmitterModel::check_psf_sigma (const VecT & psf_sigma) const` [inherited]

Definition at line 197 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::global_max_psf_sigma, and mappel::PointEmitterModel::global_min_psf_sigma.

9.9.4.10 `void ImageFormat1DBase::check_size (const ImageSizeT & size)` [static],[inherited]

Check the size argument for the model.

Definition at line 39 of file ImageFormat1DBase.cpp.

References mappel::ImageFormat1DBase::global_max_size, and mappel::ImageFormat1DBase::global_min_size.

Referenced by mappel::ImageFormat1DBase::ImageFormat1DBase(), and mappel::ImageFormat1DBase::set_size().

9.9.4.11 `int mappel::PointEmitterModel::get_hyperparam_index (const std::string & name) const` `[inline]`,
`[inherited]`

Definition at line 236 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.9.4.12 `StringVecT mappel::PointEmitterModel::get_hyperparam_names () const` `[inline]`,`[inherited]`

Definition at line 256 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.9.4.13 `double mappel::PointEmitterModel::get_hyperparam_value (const std::string & name) const` `[inline]`,
`[inherited]`

Definition at line 232 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

Referenced by mappel::MCMCAdaptor1D::set_background_mcmc_sampling(), and mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling().

9.9.4.14 `PointEmitterModel::ParamT mappel::PointEmitterModel::get_hyperparams () const` `[inline]`,
`[inherited]`

Definition at line 224 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.9.4.15 `ImageFormat1DBase::ImageT ImageFormat1DBase::get_image_from_stack (const ImageStackT & stack, ImageCoordT n) const` `[inline]`,`[inherited]`

Definition at line 108 of file ImageFormat1DBase.h.

9.9.4.16 `const PointEmitterModel::ParamT & mappel::PointEmitterModel::get_lbound () const` `[inline]`,
`[inherited]`

Definition at line 212 of file PointEmitterModel.h.

References mappel::PointEmitterModel::lbound.

Referenced by mappel::MCMCAdaptor1D::MCMCAdaptor1D(), mappel::MCMCAdaptor2D::MCMCAdaptor2D(), and mappel::MCMCAdaptor1D::set_background_mcmc_sampling().

9.9.4.17 `double mappel::Gauss1DsModel::get_max_sigma () const` `[inline]`,`[inherited]`

Definition at line 102 of file Gauss1DsModel.h.

References mappel::PointEmitterModel::prior.

Referenced by mappel::Gauss1DsModel::get_stats(), and mappel::Gauss1DsModel::set_min_sigma().

9.9.4.18 `IdxT mappel::MCMCAdaptorBase::get_mcmc_num_phases () const` `[inherited]`

Definition at line 56 of file MCMCAdaptorBase.cpp.

References mappel::MCMCAdaptorBase::num_phases.

9.9.4.19 `double mappel::MCMCAdaptorBase::get_mcmc_sigma_scale () const` `[inherited]`

Definition at line 53 of file MCMCAdaptorBase.cpp.

References mappel::MCMCAdaptorBase::sigma_scale.

9.9.4.20 `double mappel::Gauss1DsModel::get_min_sigma () const` `[inline],[inherited]`

Definition at line 98 of file Gauss1DsModel.h.

References mappel::PointEmitterModel::prior.

Referenced by mappel::Gauss1DsModel::get_stats(), and mappel::Gauss1DsModel::set_max_sigma().

9.9.4.21 `IdxT mappel::PointEmitterModel::get_num_hyperparams () const` `[inline],[inherited]`

Definition at line 208 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_hyperparams.

9.9.4.22 `IdxT mappel::PointEmitterModel::get_num_params () const` `[inline],[inherited]`

Definition at line 160 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.9.4.23 `ImageFormat1DBase::ImageCoordT ImageFormat1DBase::get_num_pixels () const` `[inline],[inherited]`

Definition at line 82 of file ImageFormat1DBase.h.

References mappel::ImageFormat1DBase::size.

Referenced by mappel::ImageFormat1DBase::get_stats().

9.9.4.24 `StringVecT mappel::PointEmitterModel::get_param_names () const` `[inline],[inherited]`

Definition at line 248 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.9.4.25 CompositeDist & mappel::PointEmitterModel::get_prior () [inline],[inherited]

Definition at line 200 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

Referenced by mappel::Gauss2DModel::update_internal_1Dsum_estimators(), and mappel::Gauss2DsModel::update_internal_1Dsum_estimators().

9.9.4.26 const CompositeDist & mappel::PointEmitterModel::get_prior () const [inline],[inherited]

Definition at line 204 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.9.4.27 ParallelRngGeneratorT & mappel::PointEmitterModel::get_rng_generator () [static],[inherited]

Definition at line 120 of file PointEmitterModel.cpp.

References mappel::rng_manager.

9.9.4.28 ParallelRngManagerT & mappel::PointEmitterModel::get_rng_manager () [static],[inherited]

Definition at line 115 of file PointEmitterModel.cpp.

References mappel::rng_manager.

9.9.4.29 ImageFormat1DBase::ImageSizeT ImageFormat1DBase::get_size () const [inline],[inherited]

Definition at line 71 of file ImageFormat1DBase.h.

References mappel::ImageFormat1DBase::size.

Referenced by mappel::ImageFormat1DBase::get_stats().

9.9.4.30 ImageFormat1DBase::ImageCoordT ImageFormat1DBase::get_size (IdxT idx) const [inherited]

Definition at line 20 of file ImageFormat1DBase.cpp.

References mappel::ImageFormat1DBase::size.

9.9.4.31 ImageFormat1DBase::ImageCoordT ImageFormat1DBase::get_size_image_stack (const ImageStackT & stack) const [inline],[inherited]

Definition at line 101 of file ImageFormat1DBase.h.

9.9.4.32 StatsT mappel::Gauss1DsModel::get_stats () const [inherited]

Definition at line 198 of file Gauss1DsModel.cpp.

References mappel::Gauss1DsModel::get_max_sigma(), mappel::Gauss1DsModel::get_min_sigma(), mappel::MCMCAdaptor1Ds::get_stats(), mappel::ImageFormat1DBase::get_stats(), and mappel::PointEmitterModel::get_stats().

9.9.4.33 const PointEmitterModel::ParamT & mappel::PointEmitterModel::get_ubound () const [inline], [inherited]

Definition at line 216 of file PointEmitterModel.h.

References mappel::PointEmitterModel::ubound.

Referenced by mappel::Gauss2DsxyModel::get_max_sigma_ratio(), mappel::Gauss2DsModel::get_max_sigma_ratio(), mappel::MCMCAdaptor1D::MCMCAdaptor1D(), mappel::MCMCAdaptor2D::MCMCAdaptor2D(), mappel::MCMCAdaptor1D::set_background_mcmc_sampling(), and mappel::Gauss2DsModel::set_max_sigma_ratio().

9.9.4.34 bool mappel::PointEmitterModel::has_hyperparam (const std::string & name) const [inline], [inherited]

Definition at line 228 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.9.4.35 Gauss1DsModel::Stencil mappel::Gauss1DsModel::initial_theta_estimate (const ImageT & im) const [inline], [inherited]

Fast, heuristic estimate of initial theta.

Definition at line 173 of file Gauss1DsModel.h.

References mappel::PointEmitterModel::make_param().

9.9.4.36 Gauss1DsModel::Stencil mappel::Gauss1DsModel::initial_theta_estimate (const ImageT & im, const ParamT & theta_init) const [inherited]

Definition at line 231 of file Gauss1DsModel.cpp.

References mappel::Gauss1DsModel::Stencil::bg(), mappel::Gauss1DsModel::Stencil::l(), mappel::PointEmitterModel::lbound, mappel::Gauss1DsModel::make_stencil(), mappel::Gauss1DsModel::Stencil::sigma(), mappel::ImageFormat1DBase::size, and mappel::PointEmitterModel::ubound.

9.9.4.37 CompositeDist mappel::Gauss1DsModel::make_default_prior (IdxT size, double min_sigma, double max_sigma, const std::string & prior_type) [static], [inherited]

Definition at line 50 of file Gauss1DsModel.cpp.

References mappel::istarts_with(), mappel::Gauss1DsModel::make_default_prior_beta_position(), and mappel::Gauss1DsModel::make_default_prior_normal_position().

9.9.4.38 CompositeDist mappel::Gauss1DsModel::make_default_prior_beta_position (IdxT size, double min_sigma, double max_sigma) [static],[inherited]

Definition at line 72 of file Gauss1DsModel.cpp.

References mappel::PointEmitterModel::default_pixel_mean_bg, mappel::PointEmitterModel::make_prior_component←_intensity(), mappel::PointEmitterModel::make_prior_component_position_beta(), and mappel::PointEmitterModel←::make_prior_component_sigma().

Referenced by mappel::Gauss1DsModel::make_default_prior().

9.9.4.39 CompositeDist mappel::Gauss1DsModel::make_default_prior_normal_position (IdxT size, double min_sigma, double max_sigma) [static],[inherited]

Definition at line 83 of file Gauss1DsModel.cpp.

References mappel::PointEmitterModel::default_pixel_mean_bg, mappel::PointEmitterModel::make_prior_component←_intensity(), mappel::PointEmitterModel::make_prior_component_position_normal(), and mappel::PointEmitterModel←::make_prior_component_sigma().

Referenced by mappel::Gauss1DsModel::make_default_prior().

9.9.4.40 ImageFormat1DBase::ImageT ImageFormat1DBase::make_image () const [inline],[inherited]

Definition at line 87 of file ImageFormat1DBase.h.

References mappel::ImageFormat1DBase::size.

9.9.4.41 ImageFormat1DBase::ImageStackT ImageFormat1DBase::make_image_stack (ImageCoordT n) const [inline],[inherited]

Definition at line 94 of file ImageFormat1DBase.h.

References mappel::ImageFormat1DBase::size.

9.9.4.42 PointEmitterModel::ParamT mappel::PointEmitterModel::make_param () const [inline],[inherited]

Definition at line 164 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

Referenced by mappel::Gauss1DModel::initial_theta_estimate(), mappel::Gauss1DsModel::initial_theta_estimate(), mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsxyModel::initial_theta_estimate(), mappel::←Gauss2DsModel::initial_theta_estimate(), mappel::Gauss1DModel::pixel_hess_update(), mappel::Gauss1DsModel←::pixel_hess_update(), mappel::Gauss2DModel::pixel_hess_update(), and mappel::Gauss2DsModel::pixel_hess←update().

9.9.4.43 template<class FillT > PointEmitterModel::ParamT mappel::PointEmitterModel::make_param (FillT fill) const [inherited]

Definition at line 181 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.9.4.44 **MatT** mappel::PointEmitterModel::make_param_mat () const [inline],[inherited]

Definition at line 172 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.9.4.45 **template<class FillT > MatT** mappel::PointEmitterModel::make_param_mat (FillT fill) const [inherited]

Definition at line 191 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.9.4.46 **CubeT** mappel::PointEmitterModel::make_param_mat_stack (IdxT n) const [inline],[inherited]

Definition at line 176 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.9.4.47 **template<class FillT > CubeT** mappel::PointEmitterModel::make_param_mat_stack (IdxT n, FillT fill) const [inherited]

Definition at line 196 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.9.4.48 **PointEmitterModel::ParamVecT** mappel::PointEmitterModel::make_param_stack (IdxT n) const [inline],[inherited]

Definition at line 168 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

Referenced by mappel::PointEmitterModel::bounded_theta_stack(), and mappel::PointEmitterModel::reflected_theta_stack().

9.9.4.49 **template<class FillT > PointEmitterModel::ParamVecT** mappel::PointEmitterModel::make_param_stack (IdxT n, FillT fill) const [inherited]

Definition at line 186 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.9.4.50 **CompositeDist** mappel::Gauss1DsModel::make_prior_beta_position (IdxT size, double beta_xpos, double mean_l, double kappa_l, double mean_bg, double kappa_bg, double min_sigma, double max_sigma, double alpha_sigma) [static],[inherited]

Definition at line 94 of file Gauss1DsModel.cpp.

References mappel::PointEmitterModel::make_prior_component_intensity(), mappel::PointEmitterModel::make_prior_component_position_beta(), and mappel::PointEmitterModel::make_prior_component_sigma().

Referenced by mappel::Gauss2DsModel::make_internal_1Dsum_estimator().

9.9.4.51 `prior_hessian::TruncatedGammaDist mappel::PointEmitterModel::make_prior_component_intensity (double mean = default_mean_l, double kappa = default_intensity_kappa) [static],[inherited]`

Definition at line 98 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::default_max_l`.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_beta_position()`, `mappel::Gauss1DModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_normal_position()`, `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss1DModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_prior_beta_position()`, `mappel::Gauss1DsModel::make_prior_beta_position()`, `mappel::Gauss1DModel::make_prior_beta_position()`, `mappel::Gauss2DsModel::make_prior_beta_position()`, `mappel::Gauss2DModel::make_prior_normal_position()`, `mappel::Gauss1DsModel::make_prior_normal_position()`, `mappel::Gauss1DModel::make_prior_normal_position()`, and `mappel::Gauss2DsModel::make_prior_normal_position()`.

9.9.4.52 `prior_hessian::ScaledSymmetricBetaDist mappel::PointEmitterModel::make_prior_component_position_beta (IdxT size, double pos_beta = default_beta_pos) [static],[inherited]`

Definition at line 92 of file PointEmitterModel.cpp.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_beta_position()`, `mappel::Gauss1DModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss1DsModel::make_prior_beta_position()`, `mappel::Gauss2DModel::make_prior_beta_position()`, `mappel::Gauss1DModel::make_prior_beta_position()`, and `mappel::Gauss2DsModel::make_prior_beta_position()`.

9.9.4.53 `prior_hessian::TruncatedNormalDist mappel::PointEmitterModel::make_prior_component_position_normal (IdxT size, double pos_sigma = default_sigma_pos) [static],[inherited]`

Definition at line 85 of file PointEmitterModel.cpp.

Referenced by `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_default_prior_normal_position()`, `mappel::Gauss1DModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_prior_normal_position()`, `mappel::Gauss1DsModel::make_prior_normal_position()`, `mappel::Gauss1DModel::make_prior_normal_position()`, and `mappel::Gauss2DsModel::make_prior_normal_position()`.

9.9.4.54 `prior_hessian::TruncatedParetoDist mappel::PointEmitterModel::make_prior_component_sigma (double min_sigma, double max_sigma, double alpha = default_alpha_sigma) [static],[inherited]`

Definition at line 104 of file PointEmitterModel.cpp.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, `mappel::Gauss1DsModel::make_prior_beta_position()`, `mappel::Gauss2DsModel::make_prior_beta_position()`, `mappel::Gauss1DsModel::make_prior_normal_position()`, and `mappel::Gauss2DsModel::make_prior_normal_position()`.

9.9.4.55 **CompositeDist** mappel::Gauss1DsModel::make_prior_normal_position (*IdxT size*, double *sigma_xpos*, double *mean_l*, double *kappa_l*, double *mean_bg*, double *kappa_bg*, double *min_sigma*, double *max_sigma*, double *alpha_sigma*)
[static],[inherited]

Definition at line 108 of file Gauss1DsModel.cpp.

References mappel::PointEmitterModel::make_prior_component_intensity(), mappel::PointEmitterModel::make_prior_component_position_normal(), and mappel::PointEmitterModel::make_prior_component_sigma().

Referenced by mappel::Gauss2DsModel::make_internal_1Dsum_estimator().

9.9.4.56 **Gauss1DsModel::Stencil** mappel::Gauss1DsModel::make_stencil (const ParamT & *theta*, bool *compute_derivatives* =true) const [inline],[inherited]

Make a new Model::Stencil object at theta.

Stencils store all of the important calculations necessary for evaluating the log-likelihood and its derivatives at a particular theta (parameter) value.

This allows re-use of the most expensive computations. Stencils can be easily passed around by reference, and most functions in the [mappel::methods](#) namespace accept a const [Stencil](#) reference in place of the model parameter.

Throws [mappel::ModelBoundsError](#) if not model.theta_in_bounds(theta).

If derivatives will not be computed with this stencil set compute_derivatives=false

Parameters

<i>theta</i>	Parameter to evaluate at
<i>compute_derivatives</i>	True to also prepare for derivative computations

Returns

A new [Stencil](#) object ready to compute with

Definition at line 123 of file Gauss1DsModel.h.

References mappel::Gauss1DsModel::Stencil::Stencil(), and mappel::PointEmitterModel::theta_in_bounds().

Referenced by mappel::Gauss1DsModel::initial_theta_estimate().

9.9.4.57 **Gauss1DsMAP & mappel::Gauss1DsMAP::operator=** (const Gauss1DsMAP & *o*)

Definition at line 52 of file Gauss1DsMAP.cpp.

References mappel::MAPEstimator::operator=(), mappel::PoissonNoise1DObjective::operator=(), mappel::Gauss1DsModel::operator=(), and mappel::PointEmitterModel::operator=().

9.9.4.58 Gauss1DsMAP & mappel::Gauss1DsMAP::operator= (Gauss1DsMAP && o)

Definition at line 63 of file Gauss1DsMAP.cpp.

References mappel::MAPEstimator::operator=(), mappel::PoissonNoise1DObjective::operator=(), mappel::Gauss1DsModel::operator=(), and mappel::PointEmitterModel::operator=().

9.9.4.59 void mappel::Gauss1DsModel::pixel_grad (IdxT i, const Stencil & s, ParamT & pgrad) const [inline], [inherited]

Definition at line 140 of file Gauss1DsModel.h.

References mappel::Gauss1DsModel::Stencil::DX, mappel::Gauss1DsModel::Stencil::DXS, mappel::Gauss1DsModel::Stencil::I(), and mappel::Gauss1DsModel::Stencil::X.

Referenced by mappel::Gauss1DsModel::pixel_hess_update().

9.9.4.60 void mappel::Gauss1DsModel::pixel_grad2 (IdxT i, const Stencil & s, ParamT & pgrad2) const [inline], [inherited]

Definition at line 150 of file Gauss1DsModel.h.

References mappel::Gauss1DsModel::Stencil::DXS, mappel::Gauss1DsModel::Stencil::DXS2, mappel::Gauss1DsModel::Stencil::I(), and mappel::Gauss1DsModel::Stencil::sigma().

9.9.4.61 void mappel::Gauss1DsModel::pixel_hess (IdxT i, const Stencil & s, MatT & hess) const [inline], [inherited]

Definition at line 160 of file Gauss1DsModel.h.

References mappel::Gauss1DsModel::Stencil::DX, mappel::Gauss1DsModel::Stencil::DXS, mappel::Gauss1DsModel::Stencil::DXS2, mappel::Gauss1DsModel::Stencil::DXSX, mappel::Gauss1DsModel::Stencil::I(), and mappel::Gauss1DsModel::Stencil::sigma().

9.9.4.62 void mappel::Gauss1DsModel::pixel_hess_update (IdxT i, const Stencil & s, double dm_ratio_m1, double dmm_ratio, ParamT & grad, MatT & hess) const [inherited]

Definition at line 211 of file Gauss1DsModel.cpp.

References mappel::Gauss1DsModel::Stencil::DX, mappel::Gauss1DsModel::Stencil::DXS, mappel::Gauss1DsModel::Stencil::DXS2, mappel::Gauss1DsModel::Stencil::DXSX, mappel::Gauss1DsModel::Stencil::I(), mappel::PointEmitterModel::make_param(), mappel::Gauss1DsModel::pixel_grad(), and mappel::Gauss1DsModel::Stencil::sigma().

9.9.4.63 double mappel::Gauss1DsModel::pixel_model_value (IdxT i, const Stencil & s) const [inline], [inherited]

Definition at line 134 of file Gauss1DsModel.h.

References mappel::Gauss1DsModel::Stencil::bg(), mappel::Gauss1DsModel::Stencil::I(), and mappel::Gauss1DsModel::Stencil::X.

9.9.4.64 **PointEmitterModel::ParamT** mappel::PointEmitterModel::reflected_theta (const ParamT & *theta*) const
[inherited]

Definition at line 276 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::check_param_shape(), mappel::PointEmitterModel::lbound, mappel::PointEmitterModel::num_params, and mappel::PointEmitterModel::ubound.

Referenced by mappel::PointEmitterModel::reflected_theta_stack().

9.9.4.65 **PointEmitterModel::ParamVecT** mappel::PointEmitterModel::reflected_theta_stack (const ParamVecT & *theta*) const [inherited]

Definition at line 316 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::check_param_shape(), mappel::PointEmitterModel::make_param_stack(), and mappel::PointEmitterModel::reflected_theta().

9.9.4.66 void mappel::PointEmitterModel::rename_hyperparam (const std::string & *old_name*, const std::string & *new_name*) [inline], [inherited]

Definition at line 244 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.9.4.67 void mappel::MCMCAdaptor1Ds::sample_mcmc_candidate (IdxT *sample_index*, ParamT & *candidate*, double *step_scale* = 1.0) const [inherited]

Definition at line 59 of file MCMCAdaptor1Ds.cpp.

References mappel::MCMCAdaptor1D::eta_bg, mappel::MCMCAdaptor1D::eta_l, mappel::MCMCAdaptor1Ds::eta_sigma, mappel::MCMCAdaptor1D::eta_x, mappel::MCMCAdaptorBase::num_phases, and mappel::rng_manager.

9.9.4.68 void mappel::MCMCAdaptor1Ds::sample_mcmc_candidate (IdxT *sample_index*, ParamT & *candidate*, const IdxVecT & *fixed_parameters_mask*, double *step_scale* = 1.0) const [inherited]

Definition at line 77 of file MCMCAdaptor1Ds.cpp.

References mappel::MCMCAdaptor1D::eta_bg, mappel::MCMCAdaptor1D::eta_l, mappel::MCMCAdaptor1Ds::eta_sigma, mappel::MCMCAdaptor1D::eta_x, mappel::MCMCAdaptorBase::num_phases, and mappel::rng_manager.

9.9.4.69 template<class RngT > **PointEmitterModel::ParamT** mappel::PointEmitterModel::sample_prior (RngT & *rng*) const [inherited]

Definition at line 264 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.9.4.70 `PointEmitterModel::ParamT mappel::PointEmitterModel::sample_prior () const` `[inline],[inherited]`

Definition at line 268 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`, and `mappel::rng_manager`.

9.9.4.71 `void mappel::MCMCAdaptor1D::set_background_mcmc_sampling (double eta_bg = -1)` `[inherited]`

Definition at line 81 of file `MCMCAdaptor1D.cpp`.

References `mappel::PointEmitterModel::default_pixel_mean_bg`, `mappel::MCMCAdaptor1D::eta_bg`, `mappel::PointEmitterModel::get_hyperparam_value()`, `mappel::PointEmitterModel::get_lbound()`, `mappel::PointEmitterModel::get_ubound()`, and `mappel::MCMCAdaptorBase::sigma_scale`.

Referenced by `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`.

9.9.4.72 `void mappel::PointEmitterModel::set_bounds (const ParamT & lbound_, const ParamT & ubound_)` `[inherited]`

Box-type parameter bounds

Modifies the prior bounds to prevent sampling outside the valid box-constraints.

Definition at line 213 of file `PointEmitterModel.cpp`.

References `mappel::PointEmitterModel::bounds_epsilon`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

9.9.4.73 `void mappel::PointEmitterModel::set_hyperparam_names (const StringVecT & desc)` `[inline],[inherited]`

Definition at line 260 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

9.9.4.74 `void mappel::PointEmitterModel::set_hyperparam_value (const std::string & name, double value)` `[inline],[inherited]`

Definition at line 240 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

9.9.4.75 `void mappel::PointEmitterModel::set_hyperparams (const VecT & hyperparams)` `[inline],[inherited]`

Definition at line 220 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

Referenced by `mappel::Gauss2DModel::set_hyperparams()`, and `mappel::Gauss2DsModel::set_hyperparams()`.

9.9.4.76 `template<class ImT > void ImageFormat1DBase::set_image_in_stack (ImageStackT & stack, ImageCoordT n, const ImT & im) const` [inherited]

Definition at line 115 of file ImageFormat1DBase.h.

9.9.4.77 `void mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling (double eta_I = -1)` [inherited]

Definition at line 65 of file MCMCAdaptor1D.cpp.

References `mappel::PointEmitterModel::default_mean_I`, `mappel::MCMCAdaptor1D::eta_I`, `mappel::PointEmitterModel::get_hyperparam_value()`, and `mappel::MCMCAdaptorBase::sigma_scale`.

Referenced by `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`.

9.9.4.78 `void mappel::PointEmitterModel::set_lbound (const ParamT & lbound)` [inherited]

Definition at line 226 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::bounds_epsilon`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::Gauss1DsModel::set_min_sigma()`.

9.9.4.79 `void mappel::Gauss1DsModel::set_max_sigma (double max_sigma)` [inherited]

Definition at line 135 of file Gauss1DsModel.cpp.

References `mappel::PointEmitterModel::check_psf_sigma()`, `mappel::Gauss1DsModel::get_min_sigma()`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::set_ubound()`.

Referenced by `mappel::Gauss1DsModel::set_max_sigma()`, `mappel::Gauss2DsModel::set_max_sigma_ratio()`, and `mappel::Gauss2DsModel::set_min_sigma()`.

9.9.4.80 `void mappel::Gauss1DsModel::set_max_sigma (const VecT & max_sigma)` [inherited]

Definition at line 153 of file Gauss1DsModel.cpp.

References `mappel::Gauss1DsModel::set_max_sigma()`.

9.9.4.81 `void mappel::MCMCAdaptorBase::set_mcmc_num_phases (IdxT num_phases)` [protected], [inherited]

Definition at line 59 of file MCMCAdaptorBase.cpp.

References `mappel::MCMCAdaptorBase::num_phases`.

Referenced by `mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds()`, and `mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds()`.

9.9.4.82 `void mappel::MCMCAdaptorBase::set_mcmc_sigma_scale (double scale)` `[inherited]`

Definition at line 39 of file MCMCAdaptorBase.cpp.

References `mappel::MCMCAdaptorBase::global_max_mcmc_sigma_scale`, and `mappel::MCMCAdaptorBase::sigma←_scale`.

9.9.4.83 `void mappel::Gauss1DsModel::set_min_sigma (double min_sigma)` `[inherited]`

Definition at line 122 of file Gauss1DsModel.cpp.

References `mappel::PointEmitterModel::check_psf_sigma()`, `mappel::Gauss1DsModel::get_max_sigma()`, `mappel::←PointEmitterModel::prior`, and `mappel::PointEmitterModel::set_lbound()`.

Referenced by `mappel::Gauss1DsModel::set_min_sigma()`, and `mappel::Gauss2DsModel::set_min_sigma()`.

9.9.4.84 `void mappel::Gauss1DsModel::set_min_sigma (const VecT & min_sigma)` `[inherited]`

Definition at line 148 of file Gauss1DsModel.cpp.

References `mappel::Gauss1DsModel::set_min_sigma()`.

9.9.4.85 `void mappel::PointEmitterModel::set_param_names (const StringVecT & desc)` `[inline],[inherited]`

Definition at line 252 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.9.4.86 `void mappel::PointEmitterModel::set_prior (CompositeDist && prior_)` `[inherited]`

Definition at line 158 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_hyperparams`, `mappel::Point←EmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::Gauss2DModel::set_prior()`, and `mappel::Gauss2DsModel::set_prior()`.

9.9.4.87 `void mappel::PointEmitterModel::set_prior (const CompositeDist & prior_)` `[inherited]`

Definition at line 149 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_hyperparams`, `mappel::Point←EmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

9.9.4.88 `void mappel::PointEmitterModel::set_rng_seed (RngSeedT seed)` `[static],[inherited]`

Definition at line 110 of file PointEmitterModel.cpp.

References `mappel::rng_manager`.

9.9.4.89 `void ImageFormat1DBase::set_size (const ImageSizeT & size_) [inherited]`

Definition at line 30 of file ImageFormat1DBase.cpp.

References mappel::ImageFormat1DBase::check_size(), and mappel::ImageFormat1DBase::size.

Referenced by mappel::ImageFormat1DBase::set_size(), mappel::Gauss2DModel::set_size(), and mappel::Gauss2DsModel::set_size().

9.9.4.90 `void ImageFormat1DBase::set_size (const arma::Col< ImageCoordT > & sz) [inline],[inherited]`

Definition at line 75 of file ImageFormat1DBase.h.

References mappel::ImageFormat1DBase::set_size().

9.9.4.91 `void mappel::PointEmitterModel::set_ubound (const ParamT & ubound) [inherited]`

Definition at line 237 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::bounds_epsilon, mappel::PointEmitterModel::lbound, mappel::PointEmitterModel::num_params, mappel::PointEmitterModel::prior, and mappel::PointEmitterModel::ubound.

Referenced by mappel::Gauss1DsModel::set_max_sigma(), and mappel::Gauss2DsModel::set_max_sigma_ratio().

9.9.4.92 `bool mappel::PointEmitterModel::theta_in_bounds (const ParamT & theta) const [inherited]`

Definition at line 257 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::check_param_shape(), mappel::PointEmitterModel::lbound, mappel::PointEmitterModel::num_params, and mappel::PointEmitterModel::ubound.

Referenced by mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::Gauss1DModel::make_stencil(), mappel::Gauss1DsModel::make_stencil(), mappel::Gauss2DModel::make_stencil(), mappel::Gauss2DModel::make_stencil(), mappel::Gauss2DsxyModel::make_stencil(), mappel::Gauss2DsModel::make_stencil(), and mappel::PointEmitterModel::theta_stack_in_bounds().

9.9.4.93 `BoolVecT mappel::PointEmitterModel::theta_stack_in_bounds (const ParamVecT & theta) const [inherited]`

Definition at line 296 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::check_param_shape(), and mappel::PointEmitterModel::theta_in_bounds().

9.9.5 Member Data Documentation

9.9.5.1 `const double mappel::PointEmitterModel::bounds_epsilon = 1.0E-6 [static],[inherited]`

Distance from the boundary to constrain in bound_theta and bounded_theta methods

Definition at line 52 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::set_bounds(), mappel::PointEmitterModel::set_lbound(), mappel::Gauss2DsModel::set_max_sigma_ratio(), and mappel::PointEmitterModel::set_ubound().

9.9.5.2 `const double mappel::PointEmitterModel::default_alpha_sigma = 2` `[static],[inherited]`

Default per-pixel background gamma distribution shape

Definition at line 62 of file PointEmitterModel.h.

9.9.5.3 `const double mappel::PointEmitterModel::default_beta_pos = 3` `[static],[inherited]`

Default position parameter in symmetric beta-distributions

Definition at line 56 of file PointEmitterModel.h.

9.9.5.4 `const double mappel::PointEmitterModel::default_intensity_kappa = 2` `[static],[inherited]`

Default shape for intensity gamma distributions

Definition at line 60 of file PointEmitterModel.h.

9.9.5.5 `const double mappel::PointEmitterModel::default_max_I = INFINITY` `[static],[inherited]`

Default maximum emitter intensity

Definition at line 59 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::make_prior_component_intensity()`.

9.9.5.6 `const double mappel::PointEmitterModel::default_mean_I = 300` `[static],[inherited]`

Default emitter intensity mean

Definition at line 58 of file PointEmitterModel.h.

Referenced by `mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling()`.

9.9.5.7 `const double mappel::PointEmitterModel::default_pixel_mean_bg = 4` `[static],[inherited]`

Default per-pixel mean background counts

Definition at line 61 of file PointEmitterModel.h.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_beta_position()`, `mappel::Gauss1DModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_default_prior_normal_position()`, `mappel::Gauss1DModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, and `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`.

9.9.5.8 `const double mappel::PointEmitterModel::default_sigma_pos = 1` `[static], [inherited]`

Default position parameter in symmetric beta-distributions

Definition at line 57 of file PointEmitterModel.h.

9.9.5.9 `const std::string mappel::Gauss1DsModel::DefaultPriorType = "Normal"` `[static], [inherited]`

Definition at line 51 of file Gauss1DsModel.h.

Referenced by mappel::Gauss1DsModel::operator=().

9.9.5.10 `const std::string mappel::PointEmitterModel::DefaultSeperableInitEstimator = "TrustRegion"` `[static], [inherited]`

Estimator name to use in 1D separable initializations

Definition at line 49 of file PointEmitterModel.h.

Referenced by mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsxyModel::initial_theta_estimate(), and mappel::Gauss2DsModel::initial_theta_estimate().

9.9.5.11 `const std::vector< std::string > mappel::PoissonNoise1DObjective::estimator_names` `[static], [inherited]`

Definition at line 24 of file PoissonNoise1DObjective.h.

9.9.5.12 `double mappel::MCMCAdaptor1D::eta_bg = 0` `[protected], [inherited]`

The standard deviation for the normally distributed perturbation to theta_bg in the random walk MCMC sampling

Definition at line 33 of file MCMCAdaptor1D.h.

Referenced by mappel::MCMCAdaptor1D::get_stats(), mappel::MCMCAdaptor1D::MCMCAdaptor1D(), mappel::MCMCAdaptor1D::operator=(), mappel::MCMCAdaptor2D::sample_mcmc_candidate(), mappel::MCMCAdaptor2Ds::sample_mcmc_candidate(), mappel::MCMCAdaptor1Ds::sample_mcmc_candidate(), mappel::MCMCAdaptor1D::sample_mcmc_candidate(), and mappel::MCMCAdaptor1D::set_background_mcmc_sampling().

9.9.5.13 `double mappel::MCMCAdaptor1D::eta_I = 0` `[protected], [inherited]`

The standard deviation for the normally distributed perturbation to theta_I in the random walk MCMC sampling

Definition at line 32 of file MCMCAdaptor1D.h.

Referenced by mappel::MCMCAdaptor1D::get_stats(), mappel::MCMCAdaptor1D::MCMCAdaptor1D(), mappel::MCMCAdaptor1D::operator=(), mappel::MCMCAdaptor2D::sample_mcmc_candidate(), mappel::MCMCAdaptor2Ds::sample_mcmc_candidate(), mappel::MCMCAdaptor1Ds::sample_mcmc_candidate(), mappel::MCMCAdaptor1D::sample_mcmc_candidate(), and mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling().

9.9.5.14 `double mappel::MCMCAdaptor1Ds::eta_sigma = 1` `[protected], [inherited]`

The standard deviation for the normally distributed perturbation to `theta_bg` in the random walk MCMC sampling

Definition at line 28 of file `MCMCAdaptor1Ds.h`.

Referenced by `mappel::MCMCAdaptor1Ds::get_stats()`, `mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds()`, `mappel::MCMCAdaptor1Ds::operator=()`, and `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`.

9.9.5.15 `double mappel::MCMCAdaptor1D::eta_x = 0` `[protected], [inherited]`

The standard deviation for the normally distributed perturbation to `theta_x` in the random walk MCMC sampling

Definition at line 31 of file `MCMCAdaptor1D.h`.

Referenced by `mappel::MCMCAdaptor1D::get_stats()`, `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor1D::operator=()`, `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, and `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`.

9.9.5.16 `const double mappel::MCMCAdaptorBase::global_default_mcmc_sigma_scale = 0.05` `[static], [inherited]`

Definition at line 16 of file `MCMCAdaptorBase.h`.

Referenced by `mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds()`, `mappel::MCMCAdaptor2D::MCMCAdaptor2D()`, and `mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds()`.

9.9.5.17 `const double mappel::MCMCAdaptorBase::global_max_mcmc_sigma_scale = 0.5` `[static], [inherited]`

Definition at line 17 of file `MCMCAdaptorBase.h`.

Referenced by `mappel::MCMCAdaptorBase::MCMCAdaptorBase()`, and `mappel::MCMCAdaptorBase::set_mcmc_sigma_scale()`.

9.9.5.18 `const double mappel::PointEmitterModel::global_max_psf_sigma = 1E2` `[static], [inherited]`

Global maximum for any `psf_sigma`. Sizes above this value are invalid, and nowhere near useful for practical point emitter localization

Definition at line 54 of file `PointEmitterModel.h`.

Referenced by `mappel::PointEmitterModel::check_psf_sigma()`.

9.9.5.19 `const ImageFormat1DBase::ImageCoordT ImageFormat1DBase::global_max_size = 512` `[static], [inherited]`

Maximum size along any dimension of the image. This is insanely big to catch obvious errors

Definition at line 40 of file `ImageFormat1DBase.h`.

Referenced by `mappel::ImageFormat1DBase::check_size()`.

9.9.5.20 `const double mappel::PointEmitterModel::global_min_psf_sigma = 1E-1` `[static]`, `[inherited]`

Global minimum for any psf_sigma. Sizes below this value are invalid, and nowhere near useful for practical point emitter localization

Definition at line 53 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::check_psf_sigma()`.

9.9.5.21 `const ImageFormat1DBase::ImageCoordT ImageFormat1DBase::global_min_size = 3` `[static]`, `[inherited]`

Minimum size along any dimension of the image.

Definition at line 39 of file ImageFormat1DBase.h.

Referenced by `mappel::ImageFormat1DBase::check_size()`.

9.9.5.22 `ParamT mappel::PointEmitterModel::lbound` `[protected]`, `[inherited]`

Definition at line 148 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::bound_theta()`, `mappel::PointEmitterModel::bounded_theta()`, `mappel::PointEmitterModel::get_lbound()`, `mappel::PointEmitterModel::get_stats()`, `mappel::Gauss1DsModel::initial_theta_estimate()`, `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsModel::initial_theta_estimate()`, `mappel::PointEmitterModel::operator=()`, `mappel::PointEmitterModel::reflected_theta()`, `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::PointEmitterModel::set_prior()`, `mappel::PointEmitterModel::set_ubound()`, and `mappel::PointEmitterModel::theta_in_bounds()`.

9.9.5.23 `const std::string mappel::Gauss1DsMAP::name` `[static]`

Definition at line 35 of file Gauss1DsMAP.h.

9.9.5.24 `const ImageFormat1DBase::ImageCoordT ImageFormat1DBase::num_dim = 1` `[static]`, `[inherited]`

Number of image dimensions.

Definition at line 38 of file ImageFormat1DBase.h.

Referenced by `mappel::ImageFormat1DBase::get_stats()`.

9.9.5.25 `IdxT mappel::PointEmitterModel::num_hyperparams` `[protected]`, `[inherited]`

Definition at line 147 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::get_num_hyperparams()`, `mappel::PointEmitterModel::get_stats()`, `mappel::PointEmitterModel::operator=()`, and `mappel::PointEmitterModel::set_prior()`.

9.9.5.26 `IdxT mappel::PointEmitterModel::num_params` [protected],[inherited]

Definition at line 146 of file `PointEmitterModel.h`.

Referenced by `mappel::PointEmitterModel::bound_theta()`, `mappel::PointEmitterModel::bounded_theta()`, `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::get_num_params()`, `mappel::PointEmitterModel::get_stats()`, `mappel::Gauss1DModel::initial_theta_estimate()`, `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsModel::initial_theta_estimate()`, `mappel::PointEmitterModel::make_param()`, `mappel::PointEmitterModel::make_param_mat()`, `mappel::PointEmitterModel::make_param_mat_stack()`, `mappel::PointEmitterModel::make_param_stack()`, `mappel::PointEmitterModel::operator=()`, `mappel::PointEmitterModel::reflected_theta()`, `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::PointEmitterModel::set_prior()`, `mappel::PointEmitterModel::set_ubound()`, and `mappel::PointEmitterModel::theta_in_bounds()`.

9.9.5.27 `IdxT mappel::MCMCAdaptorBase::num_phases` [protected],[inherited]

The number of different sampling phases for candidate selection MCMC. Each phase changes a different subset of variables.

Definition at line 29 of file `MCMCAdaptorBase.h`.

Referenced by `mappel::MCMCAdaptorBase::get_mcmc_num_phases()`, `mappel::MCMCAdaptorBase::get_stats()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`, and `mappel::MCMCAdaptorBase::set_mcmc_num_phases()`.

9.9.5.28 `CompositeDist mappel::PointEmitterModel::prior` [protected],[inherited]

Definition at line 145 of file `PointEmitterModel.h`.

Referenced by `mappel::Gauss2DModel::debug_internal_sum_model_y()`, `mappel::Gauss2DsModel::debug_internal_sum_model_y()`, `mappel::Gauss2DModel::Gauss2DModel()`, `mappel::Gauss2DsModel::Gauss2DsModel()`, `mappel::PointEmitterModel::get_hyperparam_index()`, `mappel::PointEmitterModel::get_hyperparam_names()`, `mappel::PointEmitterModel::get_hyperparam_value()`, `mappel::PointEmitterModel::get_hyperparams()`, `mappel::Gauss1DsModel::get_max_sigma()`, `mappel::Gauss1DsModel::get_min_sigma()`, `mappel::PointEmitterModel::get_param_names()`, `mappel::PointEmitterModel::get_prior()`, `mappel::PointEmitterModel::get_stats()`, `mappel::PointEmitterModel::has_hyperparam()`, `mappel::PointEmitterModel::operator=()`, `mappel::PointEmitterModel::PointEmitterModel()`, `mappel::PointEmitterModel::rename_hyperparam()`, `mappel::PointEmitterModel::sample_prior()`, `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_hyperparam_names()`, `mappel::PointEmitterModel::set_hyperparam_value()`, `mappel::PointEmitterModel::set_hyperparams()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::Gauss1DsModel::set_max_sigma()`, `mappel::Gauss1DsModel::set_min_sigma()`, `mappel::PointEmitterModel::set_param_names()`, `mappel::PointEmitterModel::set_prior()`, and `mappel::PointEmitterModel::set_ubound()`.

9.9.5.29 `const StringVecT mappel::Gauss1DsModel::prior_types` [static],[inherited]

Initial value:

```
= { "Beta",
    "Normal"
}
```

Definition at line 50 of file `Gauss1DsModel.h`.

Referenced by `mappel::Gauss1DsModel::operator=()`.

9.9.5.30 double mappel::MCMCAdaptorBase::sigma_scale [protected], [inherited]

A scaling factor for step sizes as a fraction of the size of the domain dimension we are walking in. (0.05 default)

Definition at line 30 of file MCMCAdaptorBase.h.

Referenced by mappel::MCMCAdaptorBase::get_mcmc_sigma_scale(), mappel::MCMCAdaptorBase::get_stats(), mappel::MCMCAdaptor1D::MCMCAdaptor1D(), mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds(), mappel::MCMCAdaptor2D::MCMCAdaptor2D(), mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds(), mappel::MCMCAdaptor1D::set_background_mcmc_sampling(), mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling(), and mappel::MCMCAdaptorBase::set_mcmc_sigma_scale().

9.9.5.31 ImageSizeT mappel::ImageFormat1DBase::size [protected], [inherited]

Number of pixels in X dimension for 1D image

Definition at line 65 of file ImageFormat1DBase.h.

Referenced by mappel::ImageFormat1DBase::check_image_shape(), mappel::Gauss1DsModel::Stencil::compute_derivatives(), mappel::Gauss1DModel::Stencil::compute_derivatives(), mappel::ImageFormat1DBase::get_num_pixels(), mappel::ImageFormat1DBase::get_size(), mappel::Gauss1DModel::initial_theta_estimate(), mappel::Gauss1DsModel::initial_theta_estimate(), mappel::ImageFormat1DBase::make_image(), mappel::ImageFormat1DBase::make_image_stack(), mappel::ImageFormat1DBase::set_size(), mappel::Gauss1DsModel::Stencil::Stencil(), and mappel::Gauss1DModel::Stencil::Stencil().

9.9.5.32 ParamT mappel::PointEmitterModel::ubound [protected], [inherited]

Definition at line 148 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::bound_theta(), mappel::PointEmitterModel::bounded_theta(), mappel::PointEmitterModel::get_stats(), mappel::PointEmitterModel::get_ubound(), mappel::Gauss1DsModel::initial_theta_estimate(), mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::PointEmitterModel::operator=(), mappel::PointEmitterModel::reflected_theta(), mappel::PointEmitterModel::set_bounds(), mappel::PointEmitterModel::set_lbound(), mappel::PointEmitterModel::set_prior(), mappel::PointEmitterModel::set_ubound(), and mappel::PointEmitterModel::theta_in_bounds().

The documentation for this class was generated from the following files:


- [Gauss1DsMAP.h](#)
- [Gauss1DsMAP.cpp](#)

9.10 mappel::Gauss1DsMLE Class Reference

A 1D Gaussian with variable PSF under an Poisson noise assumption and maximum-likelihood estimator.

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/Gauss1DsMLE.h>
```

Inheritance diagram for mappel::Gauss1DsMLE:

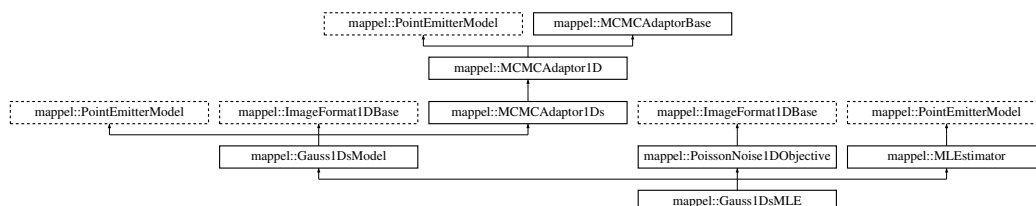

Public Types

- using `StencilVecT` = `std::vector< Stencil >`
- using `ParamT` = `arma::vec`
- using `ParamVecT` = `arma::mat`
- using `ImageCoordT` = `uint32_t`
- using `ImagePixelT` = `double`
- template<class CoordT >
using `ImageSizeShapeT` = `CoordT`
- template<class CoordT >
using `ImageSizeVecShapeT` = `arma::Col< CoordT >`
- using `ImageSizeT` = `ImageSizeShapeT< ImageCoordT >`
- using `ImageSizeVecT` = `ImageSizeVecShapeT< ImageCoordT >`
- template<class PixelT >
using `ImageShapeT` = `arma::Col< PixelT >`
- template<class PixelT >
using `ImageStackShapeT` = `arma::Mat< PixelT >`
- using `ImageT` = `ImageShapeT< ImagePixelT >`
- using `ImageStackT` = `ImageStackShapeT< ImagePixelT >`
- using `ModelDataT` = `ImageT`
- using `ModelDataStackT` = `ImageStackT`

Public Member Functions

- `Gauss1DsMLE` (`arma::Col< ImageCoordT > size`, `VecT min_sigma`, `VecT max_sigma`, `const std::string &prior_type=DefaultPriorType`)
- `Gauss1DsMLE` (`ImageSizeT size`, `double min_sigma`, `double max_sigma`, `const std::string &prior_type=DefaultPriorType`)
- `Gauss1DsMLE` (`ImageSizeT size`, `CompositeDist &&prior`)
- `Gauss1DsMLE` (`ImageSizeT size`, `const CompositeDist &prior`)
- `Gauss1DsMLE` (`const Gauss1DsMLE &o`)
- `Gauss1DsMLE & operator=` (`const Gauss1DsMLE &o`)
- `Gauss1DsMLE` (`Gauss1DsMLE &&o`)
- `Gauss1DsMLE & operator=` (`Gauss1DsMLE &&o`)
- `double get_min_sigma` () `const`
- `double get_max_sigma` () `const`
- `void set_min_sigma` (`double min_sigma`)
- `void set_min_sigma` (`const VecT &min_sigma`)
- `void set_max_sigma` (`double max_sigma`)
- `void set_max_sigma` (`const VecT &max_sigma`)
- `StatsT get_stats` () `const`
- `Stencil make_stencil` (`const ParamT &theta`, `bool compute_derivatives=true`) `const`
Make a new Model::Stencil object at theta.
- `double pixel_model_value` (`IdxT i`, `const Stencil &s`) `const`
- `void pixel_grad` (`IdxT i`, `const Stencil &s`, `ParamT &pgrad`) `const`
- `void pixel_grad2` (`IdxT i`, `const Stencil &s`, `ParamT &pgrad2`) `const`
- `void pixel_hess` (`IdxT i`, `const Stencil &s`, `MatT &hess`) `const`
- `void pixel_hess_update` (`IdxT i`, `const Stencil &s`, `double dm_ratio_m1`, `double dmm_ratio`, `ParamT &grad`, `MatT &hess`) `const`
- `Stencil initial_theta_estimate` (`const ImageT &im`) `const`

Fast, heuristic estimate of initial theta.

- [Stencil initial_theta_estimate](#) (const [ImageT](#) &im, const [ParamT](#) &theta_init) const
- [IdxT get_num_params](#) () const
- void [check_param_shape](#) (const [ParamT](#) &theta) const
- void [check_param_shape](#) (const [ParamVecT](#) &theta) const
- void [check_psf_sigma](#) (double psf_sigma) const
- void [check_psf_sigma](#) (const [VecT](#) &psf_sigma) const
- [ParamT make_param](#) () const
- template<class FillT >
 [ParamT make_param](#) (FillT fill) const
- [ParamVecT make_param_stack](#) ([IdxT](#) n) const
- template<class FillT >
 [ParamVecT make_param_stack](#) ([IdxT](#) n, FillT fill) const
- [MatT make_param_mat](#) () const
- template<class FillT >
 [MatT make_param_mat](#) (FillT fill) const
- [CubeT make_param_mat_stack](#) ([IdxT](#) n) const
- template<class FillT >
 [CubeT make_param_mat_stack](#) ([IdxT](#) n, FillT fill) const
- CompositeDist & [get_prior](#) ()
- const CompositeDist & [get_prior](#) () const
- void [set_prior](#) (CompositeDist &&prior_)
- void [set_prior](#) (const CompositeDist &prior_)
- [IdxT get_num_hyperparams](#) () const
- void [set_hyperparams](#) (const [VecT](#) &hyperparams)
- [VecT get_hyperparams](#) () const
- bool [has_hyperparam](#) (const std::string &name) const
- double [get_hyperparam_value](#) (const std::string &name) const
- int [get_hyperparam_index](#) (const std::string &name) const
- void [set_hyperparam_value](#) (const std::string &name, double value)
- void [rename_hyperparam](#) (const std::string &old_name, const std::string &new_name)
- [StringVecT get_param_names](#) () const
- void [set_param_names](#) (const [StringVecT](#) &desc)
- [StringVecT get_hyperparam_names](#) () const
- void [set_hyperparam_names](#) (const [StringVecT](#) &desc)
- template<class RngT >
 [ParamT sample_prior](#) (RngT &rng) const
- [ParamT sample_prior](#) () const
- void [set_bounds](#) (const [ParamT](#) &lbound, const [ParamT](#) &ubound)
- void [set_lbound](#) (const [ParamT](#) &lbound)
- void [set_ubound](#) (const [ParamT](#) &ubound)
- const [ParamT](#) & [get_lbound](#) () const
- const [ParamT](#) & [get_ubound](#) () const
- bool [theta_in_bounds](#) (const [ParamT](#) &theta) const
- void [bound_theta](#) ([ParamT](#) &theta, double epsilon=[bounds_epsilon](#)) const
- [ParamT bounded_theta](#) (const [ParamT](#) &theta, double epsilon=[bounds_epsilon](#)) const
- [ParamT reflected_theta](#) (const [ParamT](#) &theta) const
- [BoolVecT theta_stack_in_bounds](#) (const [ParamVecT](#) &theta) const
- [ParamVecT bounded_theta_stack](#) (const [ParamVecT](#) &theta, double epsilon=[bounds_epsilon](#)) const
- [ParamVecT reflected_theta_stack](#) (const [ParamVecT](#) &theta) const
- [ImageT make_image](#) () const

- `ImageStackT make_image_stack (ImageCoordT n) const`
- `ImageCoordT get_size_image_stack (const ImageStackT &stack) const`
- `ImageT get_image_from_stack (const ImageStackT &stack, ImageCoordT n) const`
- `template<class ImT >`
`void set_image_in_stack (ImageStackT &stack, ImageCoordT n, const ImT &im) const`
- `ImageSizeT get_size () const`
- `ImageCoordT get_size (IdxT idx) const`
- `ImageCoordT get_num_pixels () const`
- `void set_size (const ImageSizeT &size_)`
- `void set_size (const arma::Col< ImageCoordT > &sz)`
- `void check_image_shape (const ImageT &im) const`
Check the shape of a single images is correct for model size.
- `void check_image_shape (const ImageStackT &ims) const`
Check the shape of a stack of images is correct for model size.
- `void sample_mcmc_candidate (IdxT sample_index, ParamT &candidate, double step_scale=1.0) const`
- `void sample_mcmc_candidate (IdxT sample_index, ParamT &candidate, const IdxVecT &fixed_parameters_↵
mask, double step_scale=1.0) const`
- `void set_intensity_mcmc_sampling (double eta_l=-1)`
- `void set_background_mcmc_sampling (double eta_bg=-1)`
- `void set_mcmc_sigma_scale (double scale)`
- `double get_mcmc_sigma_scale () const`
- `IdxT get_mcmc_num_phases () const`

Static Public Member Functions

- static CompositeDist `make_default_prior (IdxT size, double min_sigma, double max_sigma, const std::string &prior_type)`
- static CompositeDist `make_default_prior_beta_position (IdxT size, double min_sigma, double max_sigma)`
- static CompositeDist `make_default_prior_normal_position (IdxT size, double min_sigma, double max_sigma)`
- static CompositeDist `make_prior_beta_position (IdxT size, double beta_xpos, double mean_l, double kappa_l,
double mean_bg, double kappa_bg, double min_sigma, double max_sigma, double alpha_sigma)`
- static CompositeDist `make_prior_normal_position (IdxT size, double sigma_xpos, double mean_l, double
kappa_l, double mean_bg, double kappa_bg, double min_sigma, double max_sigma, double alpha_sigma)`
- static prior_hessian::TruncatedNormalDist `make_prior_component_position_normal (IdxT size, double pos_↵
sigma=default_sigma_pos)`
- static prior_hessian::ScaledSymmetricBetaDist `make_prior_component_position_beta (IdxT size, double pos_↵
beta=default_beta_pos)`
- static prior_hessian::TruncatedGammaDist `make_prior_component_intensity (double mean=default_mean_↵
l, double kappa=default_intensity_kappa)`
- static prior_hessian::TruncatedParetoDist `make_prior_component_sigma (double min_sigma, double max_↵
sigma, double alpha=default_alpha_sigma)`
- static void `set_rng_seed (RngSeedT seed)`
- static `ParallelRngManagerT & get_rng_manager ()`
- static `ParallelRngGeneratorT & get_rng_generator ()`
- static void `check_size (const ImageSizeT &size_)`
Check the size argument for the model.

Static Public Attributes

- static const std::string [name](#)
- static const [StringVecT](#) [prior_types](#)
- static const std::string [DefaultPriorType](#) = "Normal"
- static const std::string [DefaultSeperableInitEstimator](#) = "TrustRegion"
- static const double [bounds_epsilon](#) = 1.0E-6
- static const double [global_min_psf_sigma](#) = 1E-1
- static const double [global_max_psf_sigma](#) = 1E2
- static const double [default_beta_pos](#) = 3
- static const double [default_sigma_pos](#) = 1
- static const double [default_mean_l](#) = 300
- static const double [default_max_l](#) = INFINITY
- static const double [default_intensity_kappa](#) = 2
- static const double [default_pixel_mean_bg](#) = 4
- static const double [default_alpha_sigma](#) = 2
- static const [ImageCoordT](#) [num_dim](#) = 1
- static const [ImageCoordT](#) [global_min_size](#) = 3
- static const [ImageCoordT](#) [global_max_size](#) = 512
- static const double [global_default_mcmc_sigma_scale](#) = 0.05
- static const double [global_max_mcmc_sigma_scale](#) = 0.5
- static const std::vector< std::string > [estimator_names](#)

Protected Member Functions

- void [set_mcmc_num_phases](#) ([IdxT](#) [num_phases](#))

Protected Attributes

- CompositeDist [prior](#)
- [IdxT](#) [num_params](#)
- [IdxT](#) [num_hyperparams](#)
- [ParamT](#) [lbound](#)
- [ParamT](#) [ubound](#)
- [ImageSizeT](#) [size](#)
- double [eta_sigma](#) ==-1
- double [eta_x](#) =0
- double [eta_l](#) =0
- double [eta_bg](#) =0
- [IdxT](#) [num_phases](#)
- double [sigma_scale](#)

9.10.1 Detailed Description

A 1D Gaussian with variable PSF under an Poisson noise assumption and maximum-likelihood estimator.

Model: [Gauss1DsModel](#) - 1D Gaussian PSF with variable PSF sigma Objective: [PoissonNoise1DObjective](#) - Poisson noise model for 1D Estimator: [MLEstimator](#) - Pure-likelihood estimator

Definition at line 24 of file Gauss1DsMLE.h.

9.10.2 Member Typedef Documentation

9.10.2.1 `using mappel::ImageFormat1DBase::ImageCoordT = uint32_t` [inherited]

Image size coordinate storage type

Definition at line 25 of file ImageFormat1DBase.h.

9.10.2.2 `using mappel::ImageFormat1DBase::ImagePixelT = double` [inherited]

Image pixel storage type

Definition at line 26 of file ImageFormat1DBase.h.

9.10.2.3 `template<class PixelT > using mappel::ImageFormat1DBase::ImageShapeT = arma::Col<PixelT>` [inherited]

Shape of the data type for a single image

Definition at line 33 of file ImageFormat1DBase.h.

9.10.2.4 `template<class CoordT > using mappel::ImageFormat1DBase::ImageSizeShapeT = CoordT` [inherited]

Shape of the data type to store 1-image's coordinates

Definition at line 28 of file ImageFormat1DBase.h.

9.10.2.5 `using mappel::ImageFormat1DBase::ImageSizeT = ImageSizeShapeT<ImageCoordT>` [inherited]

Data type for a single image size

Definition at line 30 of file ImageFormat1DBase.h.

9.10.2.6 `template<class CoordT > using mappel::ImageFormat1DBase::ImageSizeVecShapeT = arma::Col<CoordT>` [inherited]

Shape of the data type to store a vector of image's coordinates

Definition at line 29 of file ImageFormat1DBase.h.

9.10.2.7 `using mappel::ImageFormat1DBase::ImageSizeVecT = ImageSizeVecShapeT<ImageCoordT>` [inherited]

Data type for a sequence of image sizes

Definition at line 31 of file ImageFormat1DBase.h.

9.10.2.8 `template<class PixelT > using mappel::ImageFormat1DBase::ImageStackShapeT = arma::Mat<PixelT>`
`[inherited]`

Shape of the data type for a sequence of images

Definition at line 34 of file ImageFormat1DBase.h.

9.10.2.9 `using mappel::ImageFormat1DBase::ImageStackT = ImageStackShapeT<ImagePixelT>`
`[inherited]`

Data type to represent a sequence of images

Definition at line 36 of file ImageFormat1DBase.h.

9.10.2.10 `using mappel::ImageFormat1DBase::ImageT = ImageShapeT<ImagePixelT>` `[inherited]`

Data type to represent single image

Definition at line 35 of file ImageFormat1DBase.h.

9.10.2.11 `using mappel::PoissonNoise1DObjective::ModelDataStackT = ImageStackT` `[inherited]`

Objective function data stack type: 1D double precision image stack, of images gain-corrected to approximate photons counts

Definition at line 26 of file PoissonNoise1DObjective.h.

9.10.2.12 `using mappel::PoissonNoise1DObjective::ModelDataT = ImageT` `[inherited]`

Objective function data type: 1D double precision image, gain-corrected to approximate photons counts

Definition at line 25 of file PoissonNoise1DObjective.h.

9.10.2.13 `using mappel::PointEmitterModel::ParamT = arma::vec` `[inherited]`

Parameter vector

Definition at line 47 of file PointEmitterModel.h.

9.10.2.14 `using mappel::PointEmitterModel::ParamVecT = arma::mat` `[inherited]`

Vector of parameter vectors

Definition at line 48 of file PointEmitterModel.h.

9.10.2.15 `using mappel::Gauss1DsModel::StencilVecT = std::vector<Stencil>` `[inherited]`

Definition at line 47 of file Gauss1DsModel.h.

9.10.3 Constructor & Destructor Documentation

9.10.3.1 `mappel::Gauss1DsMLE::Gauss1DsMLE (arma::Col< ImageCoordT > size, VecT min_sigma, VecT max_sigma, const std::string & prior_type = DefaultPriorType)`

Definition at line 12 of file Gauss1DsMLE.cpp.

9.10.3.2 `mappel::Gauss1DsMLE::Gauss1DsMLE (ImageSizeT size, double min_sigma, double max_sigma, const std::string & prior_type = DefaultPriorType)`

Definition at line 16 of file Gauss1DsMLE.cpp.

9.10.3.3 `mappel::Gauss1DsMLE::Gauss1DsMLE (ImageSizeT size, CompositeDist && prior)`

Definition at line 20 of file Gauss1DsMLE.cpp.

9.10.3.4 `mappel::Gauss1DsMLE::Gauss1DsMLE (ImageSizeT size, const CompositeDist & prior)`

Definition at line 28 of file Gauss1DsMLE.cpp.

9.10.3.5 `mappel::Gauss1DsMLE::Gauss1DsMLE (const Gauss1DsMLE & o)`

Definition at line 36 of file Gauss1DsMLE.cpp.

9.10.3.6 `mappel::Gauss1DsMLE::Gauss1DsMLE (Gauss1DsMLE && o)`

Definition at line 44 of file Gauss1DsMLE.cpp.

9.10.4 Member Function Documentation

9.10.4.1 `void mappel::PointEmitterModel::bound_theta (ParamT & theta, double epsilon = bounds_epsilon) const`
[inherited]

Definition at line 248 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

9.10.4.2 `PointEmitterModel::ParamT mappel::PointEmitterModel::bounded_theta (const ParamT & theta, double epsilon = bounds_epsilon) const` [inherited]

Definition at line 265 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::PointEmitterModel::bounded_theta_stack()`.

9.10.4.3 `PointEmitterModel::ParamVecT mappel::PointEmitterModel::bounded_theta_stack (const ParamVecT & theta, double epsilon = bounds_epsilon) const` [inherited]

Definition at line 306 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::bounded_theta()`, `mappel::PointEmitterModel::check_param_shape()`, and `mappel::PointEmitterModel::make_param_stack()`.

9.10.4.4 `void ImageFormat1DBase::check_image_shape (const ImageT & im) const` [inherited]

Check the shape of a single images is correct for model size.

Definition at line 59 of file ImageFormat1DBase.cpp.

References `mappel::ImageFormat1DBase::size`.

9.10.4.5 `void ImageFormat1DBase::check_image_shape (const ImageStackT & ims) const` [inherited]

Check the shape of a stack of images is correct for model size.

Definition at line 71 of file ImageFormat1DBase.cpp.

References `mappel::ImageFormat1DBase::size`.

9.10.4.6 `void mappel::PointEmitterModel::check_param_shape (const ParamT & theta) const` [inherited]

Definition at line 167 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::num_params`.

Referenced by `mappel::PointEmitterModel::bound_theta()`, `mappel::PointEmitterModel::bounded_theta()`, `mappel::PointEmitterModel::bounded_theta_stack()`, `mappel::PointEmitterModel::reflected_theta()`, `mappel::PointEmitterModel::reflected_theta_stack()`, `mappel::PointEmitterModel::theta_in_bounds()`, and `mappel::PointEmitterModel::theta_stack_in_bounds()`.

9.10.4.7 `void mappel::PointEmitterModel::check_param_shape (const ParamVecT & theta) const` [inherited]

Definition at line 176 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::num_params`.

9.10.4.8 `void mappel::PointEmitterModel::check_psf_sigma (double psf_sigma) const` [inherited]

Definition at line 185 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::global_max_psf_sigma`, and `mappel::PointEmitterModel::global_min_psf_sigma`.

Referenced by `mappel::Gauss1DModel::Gauss1DModel()`, `mappel::Gauss2DModel::Gauss2DModel()`, `mappel::Gauss2DsModel::Gauss2DsModel()`, `mappel::Gauss1DsModel::set_max_sigma()`, `mappel::Gauss2DsModel::set_max_sigma()`, `mappel::Gauss1DsModel::set_min_sigma()`, `mappel::Gauss2DsModel::set_min_sigma()`, `mappel::Gauss1DModel::set_psf_sigma()`, and `mappel::Gauss2DModel::set_psf_sigma()`.

9.10.4.9 `void mappel::PointEmitterModel::check_psf_sigma (const VecT & psf_sigma) const` [inherited]

Definition at line 197 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::global_max_psf_sigma`, and `mappel::PointEmitterModel::global_min_psf_sigma`.

9.10.4.10 `void ImageFormat1DBase::check_size (const ImageSizeT & size_)` [static],[inherited]

Check the size argument for the model.

Definition at line 39 of file ImageFormat1DBase.cpp.

References `mappel::ImageFormat1DBase::global_max_size`, and `mappel::ImageFormat1DBase::global_min_size`.

Referenced by `mappel::ImageFormat1DBase::ImageFormat1DBase()`, and `mappel::ImageFormat1DBase::set_size()`.

9.10.4.11 `int mappel::PointEmitterModel::get_hyperparam_index (const std::string & name) const` [inline],[inherited]

Definition at line 236 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.10.4.12 `StringVecT mappel::PointEmitterModel::get_hyperparam_names () const` [inline],[inherited]

Definition at line 256 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.10.4.13 `double mappel::PointEmitterModel::get_hyperparam_value (const std::string & name) const` [inline],[inherited]

Definition at line 232 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

Referenced by `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`, and `mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling()`.

9.10.4.14 `PointEmitterModel::ParamT mappel::PointEmitterModel::get_hyperparams () const` [inline],[inherited]

Definition at line 224 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.10.4.15 `ImageFormat1DBase::ImageT ImageFormat1DBase::get_image_from_stack (const ImageStackT & stack, ImageCoordT n) const` [inline],[inherited]

Definition at line 108 of file ImageFormat1DBase.h.

9.10.4.16 `const PointEmitterModel::ParamT & mappel::PointEmitterModel::get_lbound () const` `[inline]`,
`[inherited]`

Definition at line 212 of file PointEmitterModel.h.

References mappel::PointEmitterModel::lbound.

Referenced by mappel::MCMCAdaptor1D::MCMCAdaptor1D(), mappel::MCMCAdaptor2D::MCMCAdaptor2D(), and mappel::MCMCAdaptor1D::set_background_mcmc_sampling().

9.10.4.17 `double mappel::Gauss1DsModel::get_max_sigma () const` `[inline]`,`[inherited]`

Definition at line 102 of file Gauss1DsModel.h.

References mappel::PointEmitterModel::prior.

Referenced by mappel::Gauss1DsModel::get_stats(), and mappel::Gauss1DsModel::set_min_sigma().

9.10.4.18 `IdxT mappel::MCMCAdaptorBase::get_mcmc_num_phases () const` `[inherited]`

Definition at line 56 of file MCMCAdaptorBase.cpp.

References mappel::MCMCAdaptorBase::num_phases.

9.10.4.19 `double mappel::MCMCAdaptorBase::get_mcmc_sigma_scale () const` `[inherited]`

Definition at line 53 of file MCMCAdaptorBase.cpp.

References mappel::MCMCAdaptorBase::sigma_scale.

9.10.4.20 `double mappel::Gauss1DsModel::get_min_sigma () const` `[inline]`,`[inherited]`

Definition at line 98 of file Gauss1DsModel.h.

References mappel::PointEmitterModel::prior.

Referenced by mappel::Gauss1DsModel::get_stats(), and mappel::Gauss1DsModel::set_max_sigma().

9.10.4.21 `IdxT mappel::PointEmitterModel::get_num_hyperparams () const` `[inline]`,`[inherited]`

Definition at line 208 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_hyperparams.

9.10.4.22 `IdxT mappel::PointEmitterModel::get_num_params () const` `[inline]`,`[inherited]`

Definition at line 160 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.10.4.23 ImageFormat1DBase::ImageCoordT ImageFormat1DBase::get_num_pixels () const [inline], [inherited]

Definition at line 82 of file ImageFormat1DBase.h.

References mappel::ImageFormat1DBase::size.

Referenced by mappel::ImageFormat1DBase::get_stats().

9.10.4.24 StringVecT mappel::PointEmitterModel::get_param_names () const [inline], [inherited]

Definition at line 248 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.10.4.25 CompositeDist & mappel::PointEmitterModel::get_prior () [inline], [inherited]

Definition at line 200 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

Referenced by mappel::Gauss2DModel::update_internal_1Dsum_estimators(), and mappel::Gauss2DsModel↵
::update_internal_1Dsum_estimators().

9.10.4.26 const CompositeDist & mappel::PointEmitterModel::get_prior () const [inline], [inherited]

Definition at line 204 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.10.4.27 ParallelRngGeneratorT & mappel::PointEmitterModel::get_rng_generator () [static], [inherited]

Definition at line 120 of file PointEmitterModel.cpp.

References mappel::rng_manager.

9.10.4.28 ParallelRngManagerT & mappel::PointEmitterModel::get_rng_manager () [static], [inherited]

Definition at line 115 of file PointEmitterModel.cpp.

References mappel::rng_manager.

9.10.4.29 ImageFormat1DBase::ImageSizeT ImageFormat1DBase::get_size () const [inline], [inherited]

Definition at line 71 of file ImageFormat1DBase.h.

References mappel::ImageFormat1DBase::size.

Referenced by mappel::ImageFormat1DBase::get_stats().

9.10.4.30 **ImageFormat1DBase::ImageCoordT** ImageFormat1DBase::get_size (*IdxT idx*) const [inherited]

Definition at line 20 of file ImageFormat1DBase.cpp.

References mappel::ImageFormat1DBase::size.

9.10.4.31 **ImageFormat1DBase::ImageCoordT** ImageFormat1DBase::get_size_image_stack (const ImageStackT & *stack*) const [inline],[inherited]

Definition at line 101 of file ImageFormat1DBase.h.

9.10.4.32 **StatsT** mappel::Gauss1DsModel::get_stats () const [inherited]

Definition at line 198 of file Gauss1DsModel.cpp.

References mappel::Gauss1DsModel::get_max_sigma(), mappel::Gauss1DsModel::get_min_sigma(), mappel::MCMCAdaptor1Ds::get_stats(), mappel::ImageFormat1DBase::get_stats(), and mappel::PointEmitterModel::get_stats().

9.10.4.33 **const PointEmitterModel::ParamT &** mappel::PointEmitterModel::get_ubound () const [inline],[inherited]

Definition at line 216 of file PointEmitterModel.h.

References mappel::PointEmitterModel::ubound.

Referenced by mappel::Gauss2DsxyModel::get_max_sigma_ratio(), mappel::Gauss2DsModel::get_max_sigma_ratio(), mappel::MCMCAdaptor1D::MCMCAdaptor1D(), mappel::MCMCAdaptor2D::MCMCAdaptor2D(), mappel::MCMCAdaptor1D::set_background_mcmc_sampling(), and mappel::Gauss2DsModel::set_max_sigma_ratio().

9.10.4.34 **bool** mappel::PointEmitterModel::has_hyperparam (const std::string & *name*) const [inline],[inherited]

Definition at line 228 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.10.4.35 **Gauss1DsModel::Stencil** mappel::Gauss1DsModel::initial_theta_estimate (const ImageT & *im*) const [inline],[inherited]

Fast, heuristic estimate of initial theta.

Definition at line 173 of file Gauss1DsModel.h.

References mappel::PointEmitterModel::make_param().

9.10.4.36 **Gauss1DsModel::Stencil** mappel::Gauss1DsModel::initial_theta_estimate (const ImageT & *im*, const ParamT & *theta_init*) const [inherited]

Definition at line 231 of file Gauss1DsModel.cpp.

References mappel::Gauss1DsModel::Stencil::bg(), mappel::Gauss1DsModel::Stencil::l(), mappel::PointEmitterModel::lbound, mappel::Gauss1DsModel::make_stencil(), mappel::Gauss1DsModel::Stencil::sigma(), mappel::ImageFormat1DBase::size, and mappel::PointEmitterModel::ubound.

9.10.4.37 CompositeDist mappel::Gauss1DsModel::make_default_prior (IdxT size, double min_sigma, double max_sigma, const std::string & prior_type) [static],[inherited]

Definition at line 50 of file Gauss1DsModel.cpp.

References mappel::istarts_with(), mappel::Gauss1DsModel::make_default_prior_beta_position(), and mappel::Gauss1DsModel::make_default_prior_normal_position().

9.10.4.38 CompositeDist mappel::Gauss1DsModel::make_default_prior_beta_position (IdxT size, double min_sigma, double max_sigma) [static],[inherited]

Definition at line 72 of file Gauss1DsModel.cpp.

References mappel::PointEmitterModel::default_pixel_mean_bg, mappel::PointEmitterModel::make_prior_component_intensity(), mappel::PointEmitterModel::make_prior_component_position_beta(), and mappel::PointEmitterModel::make_prior_component_sigma().

Referenced by mappel::Gauss1DsModel::make_default_prior().

9.10.4.39 CompositeDist mappel::Gauss1DsModel::make_default_prior_normal_position (IdxT size, double min_sigma, double max_sigma) [static],[inherited]

Definition at line 83 of file Gauss1DsModel.cpp.

References mappel::PointEmitterModel::default_pixel_mean_bg, mappel::PointEmitterModel::make_prior_component_intensity(), mappel::PointEmitterModel::make_prior_component_position_normal(), and mappel::PointEmitterModel::make_prior_component_sigma().

Referenced by mappel::Gauss1DsModel::make_default_prior().

9.10.4.40 ImageFormat1DBase::ImageT ImageFormat1DBase::make_image () const [inline],[inherited]

Definition at line 87 of file ImageFormat1DBase.h.

References mappel::ImageFormat1DBase::size.

9.10.4.41 ImageFormat1DBase::ImageStackT ImageFormat1DBase::make_image_stack (ImageCoordT n) const [inline],[inherited]

Definition at line 94 of file ImageFormat1DBase.h.

References mappel::ImageFormat1DBase::size.

9.10.4.42 PointEmitterModel::ParamT mappel::PointEmitterModel::make_param () const [inline],[inherited]

Definition at line 164 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

Referenced by mappel::Gauss1DModel::initial_theta_estimate(), mappel::Gauss1DsModel::initial_theta_estimate(), mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsxyModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::Gauss1DModel::pixel_hess_update(), mappel::Gauss1DsModel::pixel_hess_update(), mappel::Gauss2DModel::pixel_hess_update(), and mappel::Gauss2DsModel::pixel_hess_update().

9.10.4.43 `template<class FillT > PointEmitterModel::ParamT mappel::PointEmitterModel::make_param (FillT fill) const`
`[inherited]`

Definition at line 181 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.10.4.44 `MatT mappel::PointEmitterModel::make_param_mat () const` `[inline],[inherited]`

Definition at line 172 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.10.4.45 `template<class FillT > MatT mappel::PointEmitterModel::make_param_mat (FillT fill) const` `[inherited]`

Definition at line 191 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.10.4.46 `CubeT mappel::PointEmitterModel::make_param_mat_stack (IdxT n) const` `[inline],[inherited]`

Definition at line 176 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.10.4.47 `template<class FillT > CubeT mappel::PointEmitterModel::make_param_mat_stack (IdxT n, FillT fill) const`
`[inherited]`

Definition at line 196 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.10.4.48 `PointEmitterModel::ParamVecT mappel::PointEmitterModel::make_param_stack (IdxT n) const` `[inline],[inherited]`

Definition at line 168 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

Referenced by mappel::PointEmitterModel::bounded_theta_stack(), and mappel::PointEmitterModel::reflected_theta_stack().

9.10.4.49 `template<class FillT > PointEmitterModel::ParamVecT mappel::PointEmitterModel::make_param_stack (IdxT n, FillT fill) const` `[inherited]`

Definition at line 186 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.10.4.50 **CompositeDist** mappel::Gauss1DsModel::make_prior_beta_position (*IdxT size*, *double beta_xpos*, *double mean_l*, *double kappa_l*, *double mean_bg*, *double kappa_bg*, *double min_sigma*, *double max_sigma*, *double alpha_sigma*)
[static], [inherited]

Definition at line 94 of file Gauss1DsModel.cpp.

References mappel::PointEmitterModel::make_prior_component_intensity(), mappel::PointEmitterModel::make_prior_component_position_beta(), and mappel::PointEmitterModel::make_prior_component_sigma().

Referenced by mappel::Gauss2DsModel::make_internal_1Dsum_estimator().

9.10.4.51 **prior_hessian::TruncatedGammaDist** mappel::PointEmitterModel::make_prior_component_intensity (*double mean = default_mean_l*, *double kappa = default_intensity_kappa*) [static], [inherited]

Definition at line 98 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::default_max_l.

Referenced by mappel::Gauss1DsModel::make_default_prior_beta_position(), mappel::Gauss2DModel::make_default_prior_beta_position(), mappel::Gauss1DModel::make_default_prior_beta_position(), mappel::Gauss2DsModel::make_default_prior_beta_position(), mappel::Gauss1DsModel::make_default_prior_normal_position(), mappel::Gauss1DModel::make_default_prior_normal_position(), mappel::Gauss2DsModel::make_default_prior_normal_position(), mappel::Gauss2DModel::make_prior_beta_position(), mappel::Gauss1DsModel::make_prior_beta_position(), mappel::Gauss1DModel::make_prior_beta_position(), mappel::Gauss2DsModel::make_prior_beta_position(), mappel::Gauss2DModel::make_prior_normal_position(), mappel::Gauss1DsModel::make_prior_normal_position(), mappel::Gauss1DModel::make_prior_normal_position(), and mappel::Gauss2DsModel::make_prior_normal_position().

9.10.4.52 **prior_hessian::ScaledSymmetricBetaDist** mappel::PointEmitterModel::make_prior_component_position_beta (*IdxT size*, *double pos_beta = default_beta_pos*) [static], [inherited]

Definition at line 92 of file PointEmitterModel.cpp.

Referenced by mappel::Gauss1DsModel::make_default_prior_beta_position(), mappel::Gauss2DModel::make_default_prior_beta_position(), mappel::Gauss1DModel::make_default_prior_beta_position(), mappel::Gauss2DsModel::make_default_prior_beta_position(), mappel::Gauss1DsModel::make_prior_beta_position(), mappel::Gauss2DModel::make_prior_beta_position(), mappel::Gauss1DModel::make_prior_beta_position(), and mappel::Gauss2DsModel::make_prior_beta_position().

9.10.4.53 **prior_hessian::TruncatedNormalDist** mappel::PointEmitterModel::make_prior_component_position_normal (*IdxT size*, *double pos_sigma = default_sigma_pos*) [static], [inherited]

Definition at line 85 of file PointEmitterModel.cpp.

Referenced by mappel::Gauss1DsModel::make_default_prior_normal_position(), mappel::Gauss2DModel::make_default_prior_normal_position(), mappel::Gauss1DModel::make_default_prior_normal_position(), mappel::Gauss2DsModel::make_default_prior_normal_position(), mappel::Gauss1DsModel::make_prior_normal_position(), mappel::Gauss1DModel::make_prior_normal_position(), and mappel::Gauss2DsModel::make_prior_normal_position().

9.10.4.54 **prior_hessian::TruncatedParetoDist** mappel::PointEmitterModel::make_prior_component_sigma (double *min_sigma*, double *max_sigma*, double *alpha* = default_alpha_sigma) [static],[inherited]

Definition at line 104 of file PointEmitterModel.cpp.

Referenced by mappel::Gauss1DsModel::make_default_prior_beta_position(), mappel::Gauss2DsModel::make_default_prior_beta_position(), mappel::Gauss1DsModel::make_default_prior_normal_position(), mappel::Gauss2DsModel::make_default_prior_normal_position(), mappel::Gauss1DsModel::make_prior_beta_position(), mappel::Gauss2DsModel::make_prior_beta_position(), mappel::Gauss1DsModel::make_prior_normal_position(), and mappel::Gauss2DsModel::make_prior_normal_position().

9.10.4.55 **CompositeDist** mappel::Gauss1DsModel::make_prior_normal_position (IdxT *size*, double *sigma_xpos*, double *mean_l*, double *kappa_l*, double *mean_bg*, double *kappa_bg*, double *min_sigma*, double *max_sigma*, double *alpha_sigma*) [static],[inherited]

Definition at line 108 of file Gauss1DsModel.cpp.

References mappel::PointEmitterModel::make_prior_component_intensity(), mappel::PointEmitterModel::make_prior_component_position_normal(), and mappel::PointEmitterModel::make_prior_component_sigma().

Referenced by mappel::Gauss2DsModel::make_internal_1Dsum_estimator().

9.10.4.56 **Gauss1DsModel::Stencil** mappel::Gauss1DsModel::make_stencil (const ParamT & *theta*, bool *compute_derivatives* =true) const [inline],[inherited]

Make a new Model::Stencil object at *theta*.

Stencils store all of the important calculations necessary for evaluating the log-likelihood and its derivatives at a particular *theta* (parameter) value.

This allows re-use of the most expensive computations. Stencils can be easily passed around by reference, and most functions in the [mappel::methods](#) namespace accept a const [Stencil](#) reference in place of the model parameter.

Throws [mappel::ModelBoundsError](#) if not model.theta_in_bounds(*theta*).

If derivatives will not be computed with this stencil set *compute_derivatives*=false

Parameters

<i>theta</i>	Parameter to evaluate at
<i>compute_derivatives</i>	True to also prepare for derivative computations

Returns

A new [Stencil](#) object ready to compute with

Definition at line 123 of file Gauss1DsModel.h.

References mappel::Gauss1DsModel::Stencil::Stencil(), and mappel::PointEmitterModel::theta_in_bounds().

Referenced by mappel::Gauss1DsModel::initial_theta_estimate().

9.10.4.57 **Gauss1DsMLE & mappel::Gauss1DsMLE::operator= (const Gauss1DsMLE & o)**

Definition at line 52 of file Gauss1DsMLE.cpp.

References mappel::MLEstimator::operator=(), mappel::PoissonNoise1DObjective::operator=(), mappel::Gauss1DsModel::operator=(), and mappel::PointEmitterModel::operator=().

9.10.4.58 **Gauss1DsMLE & mappel::Gauss1DsMLE::operator= (Gauss1DsMLE && o)**

Definition at line 63 of file Gauss1DsMLE.cpp.

References mappel::MLEstimator::operator=(), mappel::PoissonNoise1DObjective::operator=(), mappel::Gauss1DsModel::operator=(), and mappel::PointEmitterModel::operator=().

9.10.4.59 **void mappel::Gauss1DsModel::pixel_grad (IdxT i, const Stencil & s, ParamT & pgrad) const [inline], [inherited]**

Definition at line 140 of file Gauss1DsModel.h.

References mappel::Gauss1DsModel::Stencil::DX, mappel::Gauss1DsModel::Stencil::DXS, mappel::Gauss1DsModel::Stencil::I(), and mappel::Gauss1DsModel::Stencil::X.

Referenced by mappel::Gauss1DsModel::pixel_hess_update().

9.10.4.60 **void mappel::Gauss1DsModel::pixel_grad2 (IdxT i, const Stencil & s, ParamT & pgrad2) const [inline], [inherited]**

Definition at line 150 of file Gauss1DsModel.h.

References mappel::Gauss1DsModel::Stencil::DXS, mappel::Gauss1DsModel::Stencil::DXS2, mappel::Gauss1DsModel::Stencil::I(), and mappel::Gauss1DsModel::Stencil::sigma().

9.10.4.61 **void mappel::Gauss1DsModel::pixel_hess (IdxT i, const Stencil & s, MatT & hess) const [inline], [inherited]**

Definition at line 160 of file Gauss1DsModel.h.

References mappel::Gauss1DsModel::Stencil::DX, mappel::Gauss1DsModel::Stencil::DXS, mappel::Gauss1DsModel::Stencil::DXS2, mappel::Gauss1DsModel::Stencil::DXSX, mappel::Gauss1DsModel::Stencil::I(), and mappel::Gauss1DsModel::Stencil::sigma().

9.10.4.62 **void mappel::Gauss1DsModel::pixel_hess_update (IdxT i, const Stencil & s, double dm_ratio_m1, double dmm_ratio, ParamT & grad, MatT & hess) const [inherited]**

Definition at line 211 of file Gauss1DsModel.cpp.

References mappel::Gauss1DsModel::Stencil::DX, mappel::Gauss1DsModel::Stencil::DXS, mappel::Gauss1DsModel::Stencil::DXS2, mappel::Gauss1DsModel::Stencil::DXSX, mappel::Gauss1DsModel::Stencil::I(), mappel::PointEmitterModel::make_param(), mappel::Gauss1DsModel::pixel_grad(), and mappel::Gauss1DsModel::Stencil::sigma().

9.10.4.63 `double mappel::Gauss1DsModel::pixel_model_value (IdxT i, const Stencil & s) const` `[inline]`,
`[inherited]`

Definition at line 134 of file Gauss1DsModel.h.

References `mappel::Gauss1DsModel::Stencil::bg()`, `mappel::Gauss1DsModel::Stencil::l()`, and `mappel::Gauss1DsModel::Stencil::X`.

9.10.4.64 `PointEmitterModel::ParamT mappel::PointEmitterModel::reflected_theta (const ParamT & theta) const`
`[inherited]`

Definition at line 276 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::PointEmitterModel::reflected_theta_stack()`.

9.10.4.65 `PointEmitterModel::ParamVecT mappel::PointEmitterModel::reflected_theta_stack (const ParamVecT & theta) const` `[inherited]`

Definition at line 316 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::make_param_stack()`, and `mappel::PointEmitterModel::reflected_theta()`.

9.10.4.66 `void mappel::PointEmitterModel::rename_hyperparam (const std::string & old_name, const std::string & new_name)`
`[inline]`, `[inherited]`

Definition at line 244 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.10.4.67 `void mappel::MCMCAdaptor1Ds::sample_mcmc_candidate (IdxT sample_index, ParamT & candidate, double step_scale = 1.0) const` `[inherited]`

Definition at line 59 of file MCMCAdaptor1Ds.cpp.

References `mappel::MCMCAdaptor1D::eta_bg`, `mappel::MCMCAdaptor1D::eta_l`, `mappel::MCMCAdaptor1Ds::eta_sigma`, `mappel::MCMCAdaptor1D::eta_x`, `mappel::MCMCAdaptorBase::num_phases`, and `mappel::rng_manager`.

9.10.4.68 `void mappel::MCMCAdaptor1Ds::sample_mcmc_candidate (IdxT sample_index, ParamT & candidate, const IdxVecT & fixed_parameters_mask, double step_scale = 1.0) const` `[inherited]`

Definition at line 77 of file MCMCAdaptor1Ds.cpp.

References `mappel::MCMCAdaptor1D::eta_bg`, `mappel::MCMCAdaptor1D::eta_l`, `mappel::MCMCAdaptor1Ds::eta_sigma`, `mappel::MCMCAdaptor1D::eta_x`, `mappel::MCMCAdaptorBase::num_phases`, and `mappel::rng_manager`.

9.10.4.69 `template<class RngT > PointEmitterModel::ParamT mappel::PointEmitterModel::sample_prior (RngT & rng) const`
`[inherited]`

Definition at line 264 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

9.10.4.70 `PointEmitterModel::ParamT mappel::PointEmitterModel::sample_prior () const` `[inline]`, `[inherited]`

Definition at line 268 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`, and `mappel::rng_manager`.

9.10.4.71 `void mappel::MCMCAdaptor1D::set_background_mcmc_sampling (double eta_bg = -1)` `[inherited]`

Definition at line 81 of file `MCMCAdaptor1D.cpp`.

References `mappel::PointEmitterModel::default_pixel_mean_bg`, `mappel::MCMCAdaptor1D::eta_bg`, `mappel::PointEmitterModel::get_hyperparam_value()`, `mappel::PointEmitterModel::get_lbound()`, `mappel::PointEmitterModel::get_ubound()`, and `mappel::MCMCAdaptorBase::sigma_scale`.

Referenced by `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`.

9.10.4.72 `void mappel::PointEmitterModel::set_bounds (const ParamT & lbound_, const ParamT & ubound_)`
`[inherited]`

Box-type parameter bounds

Modifies the prior bounds to prevent sampling outside the valid box-constraints.

Definition at line 213 of file `PointEmitterModel.cpp`.

References `mappel::PointEmitterModel::bounds_epsilon`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

9.10.4.73 `void mappel::PointEmitterModel::set_hyperparam_names (const StringVecT & desc)` `[inline]`,
`[inherited]`

Definition at line 260 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

9.10.4.74 `void mappel::PointEmitterModel::set_hyperparam_value (const std::string & name, double value)` `[inline]`,
`[inherited]`

Definition at line 240 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

9.10.4.75 `void mappel::PointEmitterModel::set_hyperparams (const VecT & hyperparams) [inline], [inherited]`

Definition at line 220 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

Referenced by `mappel::Gauss2DModel::set_hyperparams()`, and `mappel::Gauss2DsModel::set_hyperparams()`.

9.10.4.76 `template<class ImT > void ImageFormat1DBase::set_image_in_stack (ImageStackT & stack, ImageCoordT n, const ImT & im) const [inherited]`

Definition at line 115 of file ImageFormat1DBase.h.

9.10.4.77 `void mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling (double eta_I = -1) [inherited]`

Definition at line 65 of file MCMCAdaptor1D.cpp.

References `mappel::PointEmitterModel::default_mean_I`, `mappel::MCMCAdaptor1D::eta_I`, `mappel::PointEmitterModel::get_hyperparam_value()`, and `mappel::MCMCAdaptorBase::sigma_scale`.

Referenced by `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`.

9.10.4.78 `void mappel::PointEmitterModel::set_lbound (const ParamT & lbound) [inherited]`

Definition at line 226 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::bounds_epsilon`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::Gauss1DsModel::set_min_sigma()`.

9.10.4.79 `void mappel::Gauss1DsModel::set_max_sigma (double max_sigma) [inherited]`

Definition at line 135 of file Gauss1DsModel.cpp.

References `mappel::PointEmitterModel::check_psf_sigma()`, `mappel::Gauss1DsModel::get_min_sigma()`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::set_ubound()`.

Referenced by `mappel::Gauss1DsModel::set_max_sigma()`, `mappel::Gauss2DsModel::set_max_sigma_ratio()`, and `mappel::Gauss2DsModel::set_min_sigma()`.

9.10.4.80 `void mappel::Gauss1DsModel::set_max_sigma (const VecT & max_sigma) [inherited]`

Definition at line 153 of file Gauss1DsModel.cpp.

References `mappel::Gauss1DsModel::set_max_sigma()`.

9.10.4.81 `void mappel::MCMCAdaptorBase::set_mcmc_num_phases (IdxT num_phases)` [protected],[inherited]

Definition at line 59 of file MCMCAdaptorBase.cpp.

References `mappel::MCMCAdaptorBase::num_phases`.

Referenced by `mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds()`, and `mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds()`.

9.10.4.82 `void mappel::MCMCAdaptorBase::set_mcmc_sigma_scale (double scale)` [inherited]

Definition at line 39 of file MCMCAdaptorBase.cpp.

References `mappel::MCMCAdaptorBase::global_max_mcmc_sigma_scale`, and `mappel::MCMCAdaptorBase::sigma_scale`.

9.10.4.83 `void mappel::Gauss1DsModel::set_min_sigma (double min_sigma)` [inherited]

Definition at line 122 of file Gauss1DsModel.cpp.

References `mappel::PointEmitterModel::check_psf_sigma()`, `mappel::Gauss1DsModel::get_max_sigma()`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::set_lbound()`.

Referenced by `mappel::Gauss1DsModel::set_min_sigma()`, and `mappel::Gauss2DsModel::set_min_sigma()`.

9.10.4.84 `void mappel::Gauss1DsModel::set_min_sigma (const VecT & min_sigma)` [inherited]

Definition at line 148 of file Gauss1DsModel.cpp.

References `mappel::Gauss1DsModel::set_min_sigma()`.

9.10.4.85 `void mappel::PointEmitterModel::set_param_names (const StringVecT & desc)` [inline],[inherited]

Definition at line 252 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.10.4.86 `void mappel::PointEmitterModel::set_prior (CompositeDist && prior)` [inherited]

Definition at line 158 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_hyperparams`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::Gauss2DModel::set_prior()`, and `mappel::Gauss2DsModel::set_prior()`.

9.10.4.87 `void mappel::PointEmitterModel::set_prior (const CompositeDist & prior)` [inherited]

Definition at line 149 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_hyperparams`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

9.10.4.88 `void mappel::PointEmitterModel::set_rng_seed (RngSeedT seed) [static],[inherited]`

Definition at line 110 of file PointEmitterModel.cpp.

References mappel::rng_manager.

9.10.4.89 `void ImageFormat1DBase::set_size (const ImageSizeT & size_) [inherited]`

Definition at line 30 of file ImageFormat1DBase.cpp.

References mappel::ImageFormat1DBase::check_size(), and mappel::ImageFormat1DBase::size.

Referenced by mappel::ImageFormat1DBase::set_size(), mappel::Gauss2DModel::set_size(), and mappel::Gauss2DsModel::set_size().

9.10.4.90 `void ImageFormat1DBase::set_size (const arma::Col< ImageCoordT > & sz) [inline],[inherited]`

Definition at line 75 of file ImageFormat1DBase.h.

References mappel::ImageFormat1DBase::set_size().

9.10.4.91 `void mappel::PointEmitterModel::set_ubound (const ParamT & ubound) [inherited]`

Definition at line 237 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::bounds_epsilon, mappel::PointEmitterModel::lbound, mappel::PointEmitterModel::num_params, mappel::PointEmitterModel::prior, and mappel::PointEmitterModel::ubound.

Referenced by mappel::Gauss1DsModel::set_max_sigma(), and mappel::Gauss2DsModel::set_max_sigma_ratio().

9.10.4.92 `bool mappel::PointEmitterModel::theta_in_bounds (const ParamT & theta) const [inherited]`

Definition at line 257 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::check_param_shape(), mappel::PointEmitterModel::lbound, mappel::PointEmitterModel::num_params, and mappel::PointEmitterModel::ubound.

Referenced by mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::Gauss1DModel::make_stencil(), mappel::Gauss1DsModel::make_stencil(), mappel::Gauss2DModel::make_stencil(), mappel::Gauss2DsxyModel::make_stencil(), mappel::Gauss2DsModel::make_stencil(), and mappel::PointEmitterModel::theta_stack_in_bounds().

9.10.4.93 `BoolVecT mappel::PointEmitterModel::theta_stack_in_bounds (const ParamVecT & theta) const [inherited]`

Definition at line 296 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::check_param_shape(), and mappel::PointEmitterModel::theta_in_bounds().

9.10.5 Member Data Documentation

9.10.5.1 `const double mappel::PointEmitterModel::bounds_epsilon = 1.0E-6` `[static], [inherited]`

Distance from the boundary to constrain in `bound_theta` and `bounded_theta` methods

Definition at line 52 of file `PointEmitterModel.h`.

Referenced by `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::Gauss2DModel::set_max_sigma_ratio()`, and `mappel::PointEmitterModel::set_ubound()`.

9.10.5.2 `const double mappel::PointEmitterModel::default_alpha_sigma = 2` `[static], [inherited]`

Default per-pixel background gamma distribution shape

Definition at line 62 of file `PointEmitterModel.h`.

9.10.5.3 `const double mappel::PointEmitterModel::default_beta_pos = 3` `[static], [inherited]`

Default position parameter in symmetric beta-distributions

Definition at line 56 of file `PointEmitterModel.h`.

9.10.5.4 `const double mappel::PointEmitterModel::default_intensity_kappa = 2` `[static], [inherited]`

Default shape for intensity gamma distributions

Definition at line 60 of file `PointEmitterModel.h`.

9.10.5.5 `const double mappel::PointEmitterModel::default_max_l = INFINITY` `[static], [inherited]`

Default maximum emitter intensity

Definition at line 59 of file `PointEmitterModel.h`.

Referenced by `mappel::PointEmitterModel::make_prior_component_intensity()`.

9.10.5.6 `const double mappel::PointEmitterModel::default_mean_l = 300` `[static], [inherited]`

Default emitter intensity mean

Definition at line 58 of file `PointEmitterModel.h`.

Referenced by `mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling()`.

9.10.5.7 `const double mappel::PointEmitterModel::default_pixel_mean_bg = 4` `[static], [inherited]`

Default per-pixel mean background counts

Definition at line 61 of file PointEmitterModel.h.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_beta_position()`, `mappel::Gauss1DModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_default_prior_normal_position()`, `mappel::Gauss1DModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, and `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`.

9.10.5.8 `const double mappel::PointEmitterModel::default_sigma_pos = 1` `[static], [inherited]`

Default position parameter in symmetric beta-distributions

Definition at line 57 of file PointEmitterModel.h.

9.10.5.9 `const std::string mappel::Gauss1DsModel::DefaultPriorType = "Normal"` `[static], [inherited]`

Definition at line 51 of file Gauss1DsModel.h.

Referenced by `mappel::Gauss1DsModel::operator=()`.

9.10.5.10 `const std::string mappel::PointEmitterModel::DefaultSeperableInitEstimator = "TrustRegion"` `[static], [inherited]`

Estimator name to use in 1D separable initializations

Definition at line 49 of file PointEmitterModel.h.

Referenced by `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsxyModel::initial_theta_estimate()`, and `mappel::Gauss2DsModel::initial_theta_estimate()`.

9.10.5.11 `const std::vector< std::string > mappel::PoissonNoise1DObjective::estimator_names` `[static], [inherited]`

Definition at line 24 of file PoissonNoise1DObjective.h.

9.10.5.12 `double mappel::MCMCAdaptor1D::eta_bg = 0` `[protected], [inherited]`

The standard deviation for the normally distributed perturbation to `theta_bg` in the random walk MCMC sampling

Definition at line 33 of file MCMCAdaptor1D.h.

Referenced by `mappel::MCMCAdaptor1D::get_stats()`, `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor1D::operator=()`, `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`, and `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`.

9.10.5.13 `double mappel::MCMCAdaptor1D::eta_l=0` `[protected],[inherited]`

The standard deviation for the normally distributed perturbation to `theta_l` in the random walk MCMC sampling

Definition at line 32 of file `MCMCAdaptor1D.h`.

Referenced by `mappel::MCMCAdaptor1D::get_stats()`, `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor1D::operator=()`, `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`, and `mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling()`.

9.10.5.14 `double mappel::MCMCAdaptor1Ds::eta_sigma=-1` `[protected],[inherited]`

The standard deviation for the normally distributed perturbation to `theta_bg` in the random walk MCMC sampling

Definition at line 28 of file `MCMCAdaptor1Ds.h`.

Referenced by `mappel::MCMCAdaptor1Ds::get_stats()`, `mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds()`, `mappel::MCMCAdaptor1Ds::operator=()`, and `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`.

9.10.5.15 `double mappel::MCMCAdaptor1D::eta_x=0` `[protected],[inherited]`

The standard deviation for the normally distributed perturbation to `theta_x` in the random walk MCMC sampling

Definition at line 31 of file `MCMCAdaptor1D.h`.

Referenced by `mappel::MCMCAdaptor1D::get_stats()`, `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor1D::operator=()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, and `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`.

9.10.5.16 `const double mappel::MCMCAdaptorBase::global_default_mcmc_sigma_scale = 0.05` `[static],[inherited]`

Definition at line 16 of file `MCMCAdaptorBase.h`.

Referenced by `mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds()`, `mappel::MCMCAdaptor2D::MCMCAdaptor2D()`, and `mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds()`.

9.10.5.17 `const double mappel::MCMCAdaptorBase::global_max_mcmc_sigma_scale = 0.5` `[static],[inherited]`

Definition at line 17 of file `MCMCAdaptorBase.h`.

Referenced by `mappel::MCMCAdaptorBase::MCMCAdaptorBase()`, and `mappel::MCMCAdaptorBase::set_mcmc_sigma_scale()`.

9.10.5.18 `const double mappel::PointEmitterModel::global_max_psf_sigma = 1E2` `[static],[inherited]`

Global maximum for any `psf_sigma`. Sizes above this value are invalid, and nowhere near useful for practical point emitter localization

Definition at line 54 of file `PointEmitterModel.h`.

Referenced by `mappel::PointEmitterModel::check_psf_sigma()`.

9.10.5.19 `const ImageFormat1DBase::ImageCoordT ImageFormat1DBase::global_max_size = 512` `[static]`,
`[inherited]`

Maximum size along any dimension of the image. This is insanely big to catch obvious errors

Definition at line 40 of file ImageFormat1DBase.h.

Referenced by `mappel::ImageFormat1DBase::check_size()`.

9.10.5.20 `const double mappel::PointEmitterModel::global_min_psf_sigma = 1E-1` `[static]`, `[inherited]`

Global minimum for any `psf_sigma`. Sizes below this value are invalid, and nowhere near useful for practical point emitter localization

Definition at line 53 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::check_psf_sigma()`.

9.10.5.21 `const ImageFormat1DBase::ImageCoordT ImageFormat1DBase::global_min_size = 3` `[static]`,
`[inherited]`

Minimum size along any dimension of the image.

Definition at line 39 of file ImageFormat1DBase.h.

Referenced by `mappel::ImageFormat1DBase::check_size()`.

9.10.5.22 `ParamT mappel::PointEmitterModel::lbound` `[protected]`, `[inherited]`

Definition at line 148 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::bound_theta()`, `mappel::PointEmitterModel::bounded_theta()`, `mappel::PointEmitterModel::get_lbound()`, `mappel::PointEmitterModel::get_stats()`, `mappel::Gauss1DsModel::initial_theta_estimate()`, `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsModel::initial_theta_estimate()`, `mappel::PointEmitterModel::operator=()`, `mappel::PointEmitterModel::reflected_theta()`, `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::PointEmitterModel::set_prior()`, `mappel::PointEmitterModel::set_ubound()`, and `mappel::PointEmitterModel::theta_in_bounds()`.

9.10.5.23 `const std::string mappel::Gauss1DsMLE::name` `[static]`

Definition at line 35 of file Gauss1DsMLE.h.

9.10.5.24 `const ImageFormat1DBase::ImageCoordT ImageFormat1DBase::num_dim = 1` `[static]`, `[inherited]`

Number of image dimensions.

Definition at line 38 of file ImageFormat1DBase.h.

Referenced by `mappel::ImageFormat1DBase::get_stats()`.

9.10.5.25 `IdxT mappel::PointEmitterModel::num_hyperparams` `[protected]`, `[inherited]`

Definition at line 147 of file `PointEmitterModel.h`.

Referenced by `mappel::PointEmitterModel::get_num_hyperparams()`, `mappel::PointEmitterModel::get_stats()`, `mappel::PointEmitterModel::operator=()`, and `mappel::PointEmitterModel::set_prior()`.

9.10.5.26 `IdxT mappel::PointEmitterModel::num_params` `[protected]`, `[inherited]`

Definition at line 146 of file `PointEmitterModel.h`.

Referenced by `mappel::PointEmitterModel::bound_theta()`, `mappel::PointEmitterModel::bounded_theta()`, `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::get_num_params()`, `mappel::PointEmitterModel::get_stats()`, `mappel::Gauss1DModel::initial_theta_estimate()`, `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsModel::initial_theta_estimate()`, `mappel::PointEmitterModel::make_param()`, `mappel::PointEmitterModel::make_param_mat()`, `mappel::PointEmitterModel::make_param_mat_stack()`, `mappel::PointEmitterModel::make_param_stack()`, `mappel::PointEmitterModel::operator=()`, `mappel::PointEmitterModel::reflected_theta()`, `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::PointEmitterModel::set_prior()`, `mappel::PointEmitterModel::set_ubound()`, and `mappel::PointEmitterModel::theta_in_bounds()`.

9.10.5.27 `IdxT mappel::MCMCAdaptorBase::num_phases` `[protected]`, `[inherited]`

The number of different sampling phases for candidate selection MCMC. Each phase changes a different subset of variables.

Definition at line 29 of file `MCMCAdaptorBase.h`.

Referenced by `mappel::MCMCAdaptorBase::get_mcmc_num_phases()`, `mappel::MCMCAdaptorBase::get_stats()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`, and `mappel::MCMCAdaptorBase::set_mcmc_num_phases()`.

9.10.5.28 `CompositeDist mappel::PointEmitterModel::prior` `[protected]`, `[inherited]`

Definition at line 145 of file `PointEmitterModel.h`.

Referenced by `mappel::Gauss2DModel::debug_internal_sum_model_y()`, `mappel::Gauss2DsModel::debug_internal_sum_model_y()`, `mappel::Gauss2DModel::Gauss2DModel()`, `mappel::Gauss2DsModel::Gauss2DsModel()`, `mappel::PointEmitterModel::get_hyperparam_index()`, `mappel::PointEmitterModel::get_hyperparam_names()`, `mappel::PointEmitterModel::get_hyperparam_value()`, `mappel::PointEmitterModel::get_hyperparams()`, `mappel::Gauss1DsModel::get_max_sigma()`, `mappel::Gauss1DsModel::get_min_sigma()`, `mappel::PointEmitterModel::get_param_names()`, `mappel::PointEmitterModel::get_prior()`, `mappel::PointEmitterModel::get_stats()`, `mappel::PointEmitterModel::has_hyperparam()`, `mappel::PointEmitterModel::operator=()`, `mappel::PointEmitterModel::PointEmitterModel()`, `mappel::PointEmitterModel::rename_hyperparam()`, `mappel::PointEmitterModel::sample_prior()`, `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_hyperparam_names()`, `mappel::PointEmitterModel::set_hyperparam_value()`, `mappel::PointEmitterModel::set_hyperparams()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::Gauss1DsModel::set_max_sigma()`, `mappel::Gauss1DsModel::set_min_sigma()`, `mappel::PointEmitterModel::set_param_names()`, `mappel::PointEmitterModel::set_prior()`, and `mappel::PointEmitterModel::set_ubound()`.

9.10.5.29 const StringVecT mappel::Gauss1DsModel::prior_types [static],[inherited]

Initial value:

```
= { "Beta",  
                                     "Normal"  
}
```

Definition at line 50 of file Gauss1DsModel.h.

Referenced by mappel::Gauss1DsModel::operator=().

9.10.5.30 double mappel::MCMCAdaptorBase::sigma_scale [protected],[inherited]

A scaling factor for step sizes as a fraction of the size of the domain dimension we are walking in. (0.05 default)

Definition at line 30 of file MCMCAdaptorBase.h.

Referenced by mappel::MCMCAdaptorBase::get_mcmc_sigma_scale(), mappel::MCMCAdaptorBase::get_stats(), mappel::MCMCAdaptor1D::MCMCAdaptor1D(), mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds(), mappel::MCMCAdaptor2D::MCMCAdaptor2D(), mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds(), mappel::MCMCAdaptor1D::set_background_mcmc_sampling(), mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling(), and mappel::MCMCAdaptorBase::set_mcmc_sigma_scale().

9.10.5.31 ImageSizeT mappel::ImageFormat1DBase::size [protected],[inherited]

Number of pixels in X dimension for 1D image

Definition at line 65 of file ImageFormat1DBase.h.

Referenced by mappel::ImageFormat1DBase::check_image_shape(), mappel::Gauss1DsModel::Stencil::compute_derivatives(), mappel::Gauss1DModel::Stencil::compute_derivatives(), mappel::ImageFormat1DBase::get_num_pixels(), mappel::ImageFormat1DBase::get_size(), mappel::Gauss1DModel::initial_theta_estimate(), mappel::Gauss1DsModel::initial_theta_estimate(), mappel::ImageFormat1DBase::make_image(), mappel::ImageFormat1DBase::make_image_stack(), mappel::ImageFormat1DBase::set_size(), mappel::Gauss1DsModel::Stencil::Stencil(), and mappel::Gauss1DModel::Stencil::Stencil().

9.10.5.32 ParamT mappel::PointEmitterModel::ubound [protected],[inherited]

Definition at line 148 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::bound_theta(), mappel::PointEmitterModel::bounded_theta(), mappel::PointEmitterModel::get_stats(), mappel::PointEmitterModel::get_ubound(), mappel::Gauss1DsModel::initial_theta_estimate(), mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::PointEmitterModel::operator=(), mappel::PointEmitterModel::reflected_theta(), mappel::PointEmitterModel::set_bounds(), mappel::PointEmitterModel::set_lbound(), mappel::PointEmitterModel::set_prior(), mappel::PointEmitterModel::set_ubound(), and mappel::PointEmitterModel::theta_in_bounds().

The documentation for this class was generated from the following files:


- [Gauss1DsMLE.h](#)
- [Gauss1DsMLE.cpp](#)

9.11 mappel::Gauss1DsModel Class Reference

Base class for 1D Gaussian PSF with variable Gaussian sigma (standard deviation) measured in units of pixels.

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/Gauss1DsModel.h>
```

Inheritance diagram for mappel::Gauss1DsModel:

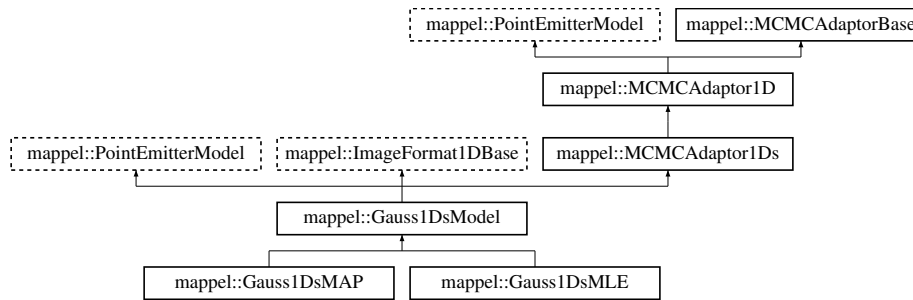

Classes

- class [Stencil](#)
Stencil for 1D variable-sigma models.

Public Types

- using [StencilVecT](#) = std::vector< [Stencil](#) >
- using [ParamT](#) = arma::vec
- using [ParamVecT](#) = arma::mat
- using [ImageCoordT](#) = uint32_t
- using [ImagePixelT](#) = double
- template<class CoordT >
using [ImageSizeShapeT](#) = CoordT
- template<class CoordT >
using [ImageSizeVecShapeT](#) = arma::Col< CoordT >
- using [ImageSizeT](#) = [ImageSizeShapeT](#)< [ImageCoordT](#) >
- using [ImageSizeVecT](#) = [ImageSizeVecShapeT](#)< [ImageCoordT](#) >
- template<class PixelT >
using [ImageShapeT](#) = arma::Col< PixelT >
- template<class PixelT >
using [ImageStackShapeT](#) = arma::Mat< PixelT >
- using [ImageT](#) = [ImageShapeT](#)< [ImagePixelT](#) >
- using [ImageStackT](#) = [ImageStackShapeT](#)< [ImagePixelT](#) >

Public Member Functions

- double [get_min_sigma](#) () const
- double [get_max_sigma](#) () const
- void [set_min_sigma](#) (double min_sigma)
- void [set_max_sigma](#) (double max_sigma)
- void [set_min_sigma](#) (const [VecT](#) &min_sigma)
- void [set_max_sigma](#) (const [VecT](#) &max_sigma)
- [StatsT](#) [get_stats](#) () const
- [Stencil](#) [make_stencil](#) (const [ParamT](#) &theta, bool compute_derivatives=true) const
Make a new Model::Stencil object at theta.
- double [pixel_model_value](#) ([IdxT](#) i, const [Stencil](#) &s) const
- void [pixel_grad](#) ([IdxT](#) i, const [Stencil](#) &s, [ParamT](#) &pgrad) const
- void [pixel_grad2](#) ([IdxT](#) i, const [Stencil](#) &s, [ParamT](#) &pgrad2) const
- void [pixel_hess](#) ([IdxT](#) i, const [Stencil](#) &s, [MatT](#) &hess) const
- void [pixel_hess_update](#) ([IdxT](#) i, const [Stencil](#) &s, double dm_ratio_m1, double dmm_ratio, [ParamT](#) &grad, [MatT](#) &hess) const
- [Stencil](#) [initial_theta_estimate](#) (const [ImageT](#) &im) const
Fast, heuristic estimate of initial theta.
- [Stencil](#) [initial_theta_estimate](#) (const [ImageT](#) &im, const [ParamT](#) &theta_init) const
- [IdxT](#) [get_num_params](#) () const
- void [check_param_shape](#) (const [ParamT](#) &theta) const
- void [check_param_shape](#) (const [ParamVecT](#) &theta) const
- void [check_psf_sigma](#) (double psf_sigma) const
- void [check_psf_sigma](#) (const [VecT](#) &psf_sigma) const
- [ParamT](#) [make_param](#) () const
- template<class FillT >
[ParamT](#) [make_param](#) (FillT fill) const
- [ParamVecT](#) [make_param_stack](#) ([IdxT](#) n) const
- template<class FillT >
[ParamVecT](#) [make_param_stack](#) ([IdxT](#) n, FillT fill) const
- [MatT](#) [make_param_mat](#) () const
- template<class FillT >
[MatT](#) [make_param_mat](#) (FillT fill) const
- [CubeT](#) [make_param_mat_stack](#) ([IdxT](#) n) const
- template<class FillT >
[CubeT](#) [make_param_mat_stack](#) ([IdxT](#) n, FillT fill) const
- [CompositeDist](#) & [get_prior](#) ()
- const [CompositeDist](#) & [get_prior](#) () const
- void [set_prior](#) ([CompositeDist](#) &&prior_)
- void [set_prior](#) (const [CompositeDist](#) &prior_)
- [IdxT](#) [get_num_hyperparams](#) () const
- void [set_hyperparams](#) (const [VecT](#) &hyperparams)
- [VecT](#) [get_hyperparams](#) () const
- bool [has_hyperparam](#) (const std::string &name) const
- double [get_hyperparam_value](#) (const std::string &name) const
- int [get_hyperparam_index](#) (const std::string &name) const
- void [set_hyperparam_value](#) (const std::string &name, double value)
- void [rename_hyperparam](#) (const std::string &old_name, const std::string &new_name)
- [StringVecT](#) [get_param_names](#) () const
- void [set_param_names](#) (const [StringVecT](#) &desc)

- [StringVecT get_hyperparam_names](#) () const
- void [set_hyperparam_names](#) (const [StringVecT](#) &desc)
- template<class RngT >
 [ParamT sample_prior](#) (RngT &rng) const
- [ParamT sample_prior](#) () const
- void [set_bounds](#) (const [ParamT](#) &lbound, const [ParamT](#) &ubound)
- void [set_lbound](#) (const [ParamT](#) &lbound)
- void [set_ubound](#) (const [ParamT](#) &ubound)
- const [ParamT](#) &[get_lbound](#) () const
- const [ParamT](#) &[get_ubound](#) () const
- bool [theta_in_bounds](#) (const [ParamT](#) &theta) const
- void [bound_theta](#) ([ParamT](#) &theta, double epsilon=[bounds_epsilon](#)) const
- [ParamT bounded_theta](#) (const [ParamT](#) &theta, double epsilon=[bounds_epsilon](#)) const
- [ParamT reflected_theta](#) (const [ParamT](#) &theta) const
- [BoolVecT theta_stack_in_bounds](#) (const [ParamVecT](#) &theta) const
- [ParamVecT bounded_theta_stack](#) (const [ParamVecT](#) &theta, double epsilon=[bounds_epsilon](#)) const
- [ParamVecT reflected_theta_stack](#) (const [ParamVecT](#) &theta) const
- [ImageT make_image](#) () const
- [ImageStackT make_image_stack](#) ([ImageCoordT](#) n) const
- [ImageCoordT get_size_image_stack](#) (const [ImageStackT](#) &stack) const
- [ImageT get_image_from_stack](#) (const [ImageStackT](#) &stack, [ImageCoordT](#) n) const
- template<class ImT >
 void [set_image_in_stack](#) ([ImageStackT](#) &stack, [ImageCoordT](#) n, const ImT &im) const
- [ImageSizeT get_size](#) () const
- [ImageCoordT get_size](#) ([IdxT](#) idx) const
- [ImageCoordT get_num_pixels](#) () const
- void [set_size](#) (const [ImageSizeT](#) &size_)
- void [set_size](#) (const arma::Col< [ImageCoordT](#) > &sz)
- void [check_image_shape](#) (const [ImageT](#) &im) const
 Check the shape of a single images is correct for model size.
- void [check_image_shape](#) (const [ImageStackT](#) &ims) const
 Check the shape of a stack of images is correct for model size.
- void [sample_mcmc_candidate](#) ([IdxT](#) sample_index, [ParamT](#) &candidate, double step_scale=1.0) const
- void [sample_mcmc_candidate](#) ([IdxT](#) sample_index, [ParamT](#) &candidate, const [IdxVecT](#) &fixed_parameters_↵
 mask, double step_scale=1.0) const
- void [set_intensity_mcmc_sampling](#) (double eta_l=-1)
- void [set_background_mcmc_sampling](#) (double eta_bg=-1)
- void [set_mcmc_sigma_scale](#) (double scale)
- double [get_mcmc_sigma_scale](#) () const
- [IdxT get_mcmc_num_phases](#) () const

Static Public Member Functions

- static CompositeDist [make_default_prior](#) ([IdxT](#) size, double min_sigma, double max_sigma, const std::string &prior_type)
- static CompositeDist [make_default_prior_beta_position](#) ([IdxT](#) size, double min_sigma, double max_sigma)
- static CompositeDist [make_default_prior_normal_position](#) ([IdxT](#) size, double min_sigma, double max_sigma)
- static CompositeDist [make_prior_beta_position](#) ([IdxT](#) size, double beta_xpos, double mean_l, double kappa_l, double mean_bg, double kappa_bg, double min_sigma, double max_sigma, double alpha_sigma)

- static CompositeDist [make_prior_normal_position](#) (IdxT size, double sigma_xpos, double mean_l, double kappa_l, double mean_bg, double kappa_bg, double min_sigma, double max_sigma, double alpha_sigma)
- static prior_hessian::TruncatedNormalDist [make_prior_component_position_normal](#) (IdxT size, double pos_↵ sigma=[default_sigma_pos](#))
- static prior_hessian::ScaledSymmetricBetaDist [make_prior_component_position_beta](#) (IdxT size, double pos_↵ beta=[default_beta_pos](#))
- static prior_hessian::TruncatedGammaDist [make_prior_component_intensity](#) (double mean=[default_mean_↵ l](#), double kappa=[default_intensity_kappa](#))
- static prior_hessian::TruncatedParetoDist [make_prior_component_sigma](#) (double min_sigma, double max_↵ sigma, double alpha=[default_alpha_sigma](#))
- static void [set_rng_seed](#) (RngSeedT seed)
- static [ParallelRngManagerT](#) & [get_rng_manager](#) ()
- static [ParallelRngGeneratorT](#) & [get_rng_generator](#) ()
- static void [check_size](#) (const [ImageSizeT](#) &size_)

Check the size argument for the model.

Static Public Attributes

- static const [StringVecT](#) [prior_types](#)
- static const std::string [DefaultPriorType](#) = "Normal"
- static const std::string [DefaultSeperableInitEstimator](#) = "TrustRegion"
- static const double [bounds_epsilon](#) = 1.0E-6
- static const double [global_min_psf_sigma](#) = 1E-1
- static const double [global_max_psf_sigma](#) = 1E2
- static const double [default_beta_pos](#) = 3
- static const double [default_sigma_pos](#) = 1
- static const double [default_mean_l](#) = 300
- static const double [default_max_l](#) = INFINITY
- static const double [default_intensity_kappa](#) = 2
- static const double [default_pixel_mean_bg](#) = 4
- static const double [default_alpha_sigma](#) = 2
- static const [ImageCoordT](#) [num_dim](#) = 1
- static const [ImageCoordT](#) [global_min_size](#) = 3
- static const [ImageCoordT](#) [global_max_size](#) = 512
- static const double [global_default_mcmc_sigma_scale](#) = 0.05
- static const double [global_max_mcmc_sigma_scale](#) = 0.5

Protected Member Functions

- [Gauss1DsModel](#) (IdxT size_)
- [Gauss1DsModel](#) (const [Gauss1DsModel](#) &o)
- [Gauss1DsModel](#) ([Gauss1DsModel](#) &&o)
- [Gauss1DsModel](#) & [operator=](#) (const [Gauss1DsModel](#) &o)
- [Gauss1DsModel](#) & [operator=](#) ([Gauss1DsModel](#) &&o)
- void [set_mcmc_num_phases](#) (IdxT num_phases)

Protected Attributes

- CompositeDist [prior](#)
- [IdxT](#) num_params
- [IdxT](#) num_hyperparams
- [ParamT](#) lbound
- [ParamT](#) ubound
- [ImageSizeT](#) size
- double [eta_sigma](#) ==-1
- double [eta_x](#) =0
- double [eta_l](#) =0
- double [eta_bg](#) =0
- [IdxT](#) num_phases
- double [sigma_scale](#)

9.11.1 Detailed Description

Base class for 1D Gaussian PSF with variable Gaussian sigma (standard deviation) measured in units of pixels.

Definition at line 19 of file Gauss1DsModel.h.

9.11.2 Member Typedef Documentation

9.11.2.1 `using mappel::ImageFormat1DBase::ImageCoordT = uint32_t` `[inherited]`

Image size coordinate storage type

Definition at line 25 of file ImageFormat1DBase.h.

9.11.2.2 `using mappel::ImageFormat1DBase::ImagePixelT = double` `[inherited]`

Image pixel storage type

Definition at line 26 of file ImageFormat1DBase.h.

9.11.2.3 `template<class PixelT > using mappel::ImageFormat1DBase::ImageShapeT = arma::Col<PixelT>` `[inherited]`

Shape of the data type for a single image

Definition at line 33 of file ImageFormat1DBase.h.

9.11.2.4 `template<class CoordT > using mappel::ImageFormat1DBase::ImageSizeShapeT = CoordT` `[inherited]`

Shape of the data type to store 1-image's coordinates

Definition at line 28 of file ImageFormat1DBase.h.

9.11.2.5 `using mappel::ImageFormat1DBase::ImageSizeT = ImageSizeShapeT<ImageCoordT>`
`[inherited]`

Data type for a single image size

Definition at line 30 of file ImageFormat1DBase.h.

9.11.2.6 `template<class CoordT > using mappel::ImageFormat1DBase::ImageSizeVecShapeT = arma::Col<CoordT>`
`[inherited]`

Shape of the data type to store a vector of image's coordinates

Definition at line 29 of file ImageFormat1DBase.h.

9.11.2.7 `using mappel::ImageFormat1DBase::ImageSizeVecT = ImageSizeVecShapeT<ImageCoordT>`
`[inherited]`

Data type for a sequence of image sizes

Definition at line 31 of file ImageFormat1DBase.h.

9.11.2.8 `template<class PixelT > using mappel::ImageFormat1DBase::ImageStackShapeT = arma::Mat<PixelT>`
`[inherited]`

Shape of the data type for a sequence of images

Definition at line 34 of file ImageFormat1DBase.h.

9.11.2.9 `using mappel::ImageFormat1DBase::ImageStackT = ImageStackShapeT<ImagePixelT>`
`[inherited]`

Data type to represent a sequence of images

Definition at line 36 of file ImageFormat1DBase.h.

9.11.2.10 `using mappel::ImageFormat1DBase::ImageT = ImageShapeT<ImagePixelT>` `[inherited]`

Data type to represent single image

Definition at line 35 of file ImageFormat1DBase.h.

9.11.2.11 `using mappel::PointEmitterModel::ParamT = arma::vec` `[inherited]`

Parameter vector

Definition at line 47 of file PointEmitterModel.h.

9.11.2.12 `using mappel::PointEmitterModel::ParamVecT = arma::mat` `[inherited]`

Vector of parameter vectors

Definition at line 48 of file `PointEmitterModel.h`.

9.11.2.13 `using mappel::Gauss1DsModel::StencilVecT = std::vector<Stencil>`

Definition at line 47 of file `Gauss1DsModel.h`.

9.11.3 Constructor & Destructor Documentation

9.11.3.1 `mappel::Gauss1DsModel::Gauss1DsModel (IdxT size_)` `[explicit],[protected]`

Definition at line 12 of file `Gauss1DsModel.cpp`.

9.11.3.2 `mappel::Gauss1DsModel::Gauss1DsModel (const Gauss1DsModel & o)` `[protected]`

Definition at line 17 of file `Gauss1DsModel.cpp`.

9.11.3.3 `mappel::Gauss1DsModel::Gauss1DsModel (Gauss1DsModel && o)` `[protected]`

Definition at line 22 of file `Gauss1DsModel.cpp`.

9.11.4 Member Function Documentation

9.11.4.1 `void mappel::PointEmitterModel::bound_theta (ParamT & theta, double epsilon = bounds_epsilon) const`
`[inherited]`

Definition at line 248 of file `PointEmitterModel.cpp`.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

9.11.4.2 `PointEmitterModel::ParamT mappel::PointEmitterModel::bounded_theta (const ParamT & theta, double epsilon = bounds_epsilon) const` `[inherited]`

Definition at line 265 of file `PointEmitterModel.cpp`.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::PointEmitterModel::bounded_theta_stack()`.

9.11.4.3 **PointEmitterModel::ParamVecT mappel::PointEmitterModel::bounded_theta_stack (const ParamVecT & theta, double epsilon = bounds_epsilon) const** [inherited]

Definition at line 306 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::bounded_theta(), mappel::PointEmitterModel::check_param_shape(), and mappel::PointEmitterModel::make_param_stack().

9.11.4.4 **void ImageFormat1DBase::check_image_shape (const ImageT & im) const** [inherited]

Check the shape of a single images is correct for model size.

Definition at line 59 of file ImageFormat1DBase.cpp.

References mappel::ImageFormat1DBase::size.

9.11.4.5 **void ImageFormat1DBase::check_image_shape (const ImageStackT & ims) const** [inherited]

Check the shape of a stack of images is correct for model size.

Definition at line 71 of file ImageFormat1DBase.cpp.

References mappel::ImageFormat1DBase::size.

9.11.4.6 **void mappel::PointEmitterModel::check_param_shape (const ParamT & theta) const** [inherited]

Definition at line 167 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::num_params.

Referenced by mappel::PointEmitterModel::bound_theta(), mappel::PointEmitterModel::bounded_theta(), mappel::PointEmitterModel::bounded_theta_stack(), mappel::PointEmitterModel::reflected_theta(), mappel::PointEmitterModel::reflected_theta_stack(), mappel::PointEmitterModel::theta_in_bounds(), and mappel::PointEmitterModel::theta_stack_in_bounds().

9.11.4.7 **void mappel::PointEmitterModel::check_param_shape (const ParamVecT & theta) const** [inherited]

Definition at line 176 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::num_params.

9.11.4.8 **void mappel::PointEmitterModel::check_psf_sigma (double psf_sigma) const** [inherited]

Definition at line 185 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::global_max_psf_sigma, and mappel::PointEmitterModel::global_min_psf_sigma.

Referenced by mappel::Gauss1DModel::Gauss1DModel(), mappel::Gauss2DModel::Gauss2DModel(), mappel::Gauss2DsModel::Gauss2DsModel(), set_max_sigma(), mappel::Gauss2DsModel::set_max_sigma(), set_min_sigma(), mappel::Gauss2DsModel::set_min_sigma(), mappel::Gauss1DModel::set_psf_sigma(), and mappel::Gauss2DModel::set_psf_sigma().

9.11.4.9 `void mappel::PointEmitterModel::check_psf_sigma (const VecT & psf_sigma) const` [inherited]

Definition at line 197 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::global_max_psf_sigma`, and `mappel::PointEmitterModel::global_min_psf_sigma`.

9.11.4.10 `void ImageFormat1DBase::check_size (const ImageSizeT & size_)` [static],[inherited]

Check the size argument for the model.

Definition at line 39 of file ImageFormat1DBase.cpp.

References `mappel::ImageFormat1DBase::global_max_size`, and `mappel::ImageFormat1DBase::global_min_size`.

Referenced by `mappel::ImageFormat1DBase::ImageFormat1DBase()`, and `mappel::ImageFormat1DBase::set_size()`.

9.11.4.11 `int mappel::PointEmitterModel::get_hyperparam_index (const std::string & name) const` [inline],[inherited]

Definition at line 236 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.11.4.12 `StringVecT mappel::PointEmitterModel::get_hyperparam_names () const` [inline],[inherited]

Definition at line 256 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.11.4.13 `double mappel::PointEmitterModel::get_hyperparam_value (const std::string & name) const` [inline],[inherited]

Definition at line 232 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

Referenced by `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`, and `mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling()`.

9.11.4.14 `PointEmitterModel::ParamT mappel::PointEmitterModel::get_hyperparams () const` [inline],[inherited]

Definition at line 224 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.11.4.15 `ImageFormat1DBase::ImageT ImageFormat1DBase::get_image_from_stack (const ImageStackT & stack, ImageCoordT n) const` [inline],[inherited]

Definition at line 108 of file ImageFormat1DBase.h.

9.11.4.16 `const PointEmitterModel::ParamT & mappel::PointEmitterModel::get_lbound () const` `[inline]`,
`[inherited]`

Definition at line 212 of file PointEmitterModel.h.

References mappel::PointEmitterModel::lbound.

Referenced by mappel::MCMCAdaptor1D::MCMCAdaptor1D(), mappel::MCMCAdaptor2D::MCMCAdaptor2D(), and mappel::MCMCAdaptor1D::set_background_mcmc_sampling().

9.11.4.17 `double mappel::Gauss1DsModel::get_max_sigma () const` `[inline]`

Definition at line 102 of file Gauss1DsModel.h.

References mappel::PointEmitterModel::prior.

Referenced by get_stats(), and set_min_sigma().

9.11.4.18 `IdxT mappel::MCMCAdaptorBase::get_mcmc_num_phases () const` `[inherited]`

Definition at line 56 of file MCMCAdaptorBase.cpp.

References mappel::MCMCAdaptorBase::num_phases.

9.11.4.19 `double mappel::MCMCAdaptorBase::get_mcmc_sigma_scale () const` `[inherited]`

Definition at line 53 of file MCMCAdaptorBase.cpp.

References mappel::MCMCAdaptorBase::sigma_scale.

9.11.4.20 `double mappel::Gauss1DsModel::get_min_sigma () const` `[inline]`

Definition at line 98 of file Gauss1DsModel.h.

References mappel::PointEmitterModel::prior.

Referenced by get_stats(), and set_max_sigma().

9.11.4.21 `IdxT mappel::PointEmitterModel::get_num_hyperparams () const` `[inline]`, `[inherited]`

Definition at line 208 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_hyperparams.

9.11.4.22 `IdxT mappel::PointEmitterModel::get_num_params () const` `[inline]`, `[inherited]`

Definition at line 160 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.11.4.23 ImageFormat1DBase::ImageCoordT ImageFormat1DBase::get_num_pixels () const [inline], [inherited]

Definition at line 82 of file ImageFormat1DBase.h.

References mappel::ImageFormat1DBase::size.

Referenced by mappel::ImageFormat1DBase::get_stats().

9.11.4.24 StringVecT mappel::PointEmitterModel::get_param_names () const [inline], [inherited]

Definition at line 248 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.11.4.25 CompositeDist & mappel::PointEmitterModel::get_prior () [inline], [inherited]

Definition at line 200 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

Referenced by mappel::Gauss2DModel::update_internal_1Dsum_estimators(), and mappel::Gauss2DsModel↵
::update_internal_1Dsum_estimators().

9.11.4.26 const CompositeDist & mappel::PointEmitterModel::get_prior () const [inline], [inherited]

Definition at line 204 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.11.4.27 ParallelRngGeneratorT & mappel::PointEmitterModel::get_rng_generator () [static], [inherited]

Definition at line 120 of file PointEmitterModel.cpp.

References mappel::rng_manager.

9.11.4.28 ParallelRngManagerT & mappel::PointEmitterModel::get_rng_manager () [static], [inherited]

Definition at line 115 of file PointEmitterModel.cpp.

References mappel::rng_manager.

9.11.4.29 ImageFormat1DBase::ImageSizeT ImageFormat1DBase::get_size () const [inline], [inherited]

Definition at line 71 of file ImageFormat1DBase.h.

References mappel::ImageFormat1DBase::size.

Referenced by mappel::ImageFormat1DBase::get_stats().

9.11.4.30 **ImageFormat1DBase::ImageCoordT** ImageFormat1DBase::get_size (*IdxT idx*) const [inherited]

Definition at line 20 of file ImageFormat1DBase.cpp.

References mappel::ImageFormat1DBase::size.

9.11.4.31 **ImageFormat1DBase::ImageCoordT** ImageFormat1DBase::get_size_image_stack (const ImageStackT & *stack*) const [inline],[inherited]

Definition at line 101 of file ImageFormat1DBase.h.

9.11.4.32 **StatsT** mappel::Gauss1DsModel::get_stats () const

Definition at line 198 of file Gauss1DsModel.cpp.

References get_max_sigma(), get_min_sigma(), mappel::MCMCAdaptor1Ds::get_stats(), mappel::ImageFormat1DBase::get_stats(), and mappel::PointEmitterModel::get_stats().

9.11.4.33 **const PointEmitterModel::ParamT &** mappel::PointEmitterModel::get_ubound () const [inline],[inherited]

Definition at line 216 of file PointEmitterModel.h.

References mappel::PointEmitterModel::ubound.

Referenced by mappel::Gauss2DsxyModel::get_max_sigma_ratio(), mappel::Gauss2DsModel::get_max_sigma_ratio(), mappel::MCMCAdaptor1D::MCMCAdaptor1D(), mappel::MCMCAdaptor2D::MCMCAdaptor2D(), mappel::MCMCAdaptor1D::set_background_mcmc_sampling(), and mappel::Gauss2DsModel::set_max_sigma_ratio().

9.11.4.34 **bool** mappel::PointEmitterModel::has_hyperparam (const std::string & *name*) const [inline],[inherited]

Definition at line 228 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.11.4.35 **Gauss1DsModel::Stencil** mappel::Gauss1DsModel::initial_theta_estimate (const ImageT & *im*) const [inline]

Fast, heuristic estimate of initial theta.

Definition at line 173 of file Gauss1DsModel.h.

References mappel::PointEmitterModel::make_param().

9.11.4.36 **Gauss1DsModel::Stencil** mappel::Gauss1DsModel::initial_theta_estimate (const ImageT & *im*, const ParamT & *theta_init*) const

Definition at line 231 of file Gauss1DsModel.cpp.

References mappel::Gauss1DsModel::Stencil::bg(), mappel::Gauss1DsModel::Stencil::l(), mappel::PointEmitterModel::lbound, make_stencil(), mappel::Gauss1DsModel::Stencil::sigma(), mappel::ImageFormat1DBase::size, and mappel::PointEmitterModel::ubound.

9.11.4.37 CompositeDist `mappel::Gauss1DsModel::make_default_prior (IdxT size, double min_sigma, double max_sigma, const std::string & prior_type) [static]`

Definition at line 50 of file Gauss1DsModel.cpp.

References `mappel::istarts_with()`, `make_default_prior_beta_position()`, and `make_default_prior_normal_position()`.

9.11.4.38 CompositeDist `mappel::Gauss1DsModel::make_default_prior_beta_position (IdxT size, double min_sigma, double max_sigma) [static]`

Definition at line 72 of file Gauss1DsModel.cpp.

References `mappel::PointEmitterModel::default_pixel_mean_bg`, `mappel::PointEmitterModel::make_prior_component_intensity()`, `mappel::PointEmitterModel::make_prior_component_position_beta()`, and `mappel::PointEmitterModel::make_prior_component_sigma()`.

Referenced by `make_default_prior()`.

9.11.4.39 CompositeDist `mappel::Gauss1DsModel::make_default_prior_normal_position (IdxT size, double min_sigma, double max_sigma) [static]`

Definition at line 83 of file Gauss1DsModel.cpp.

References `mappel::PointEmitterModel::default_pixel_mean_bg`, `mappel::PointEmitterModel::make_prior_component_intensity()`, `mappel::PointEmitterModel::make_prior_component_position_normal()`, and `mappel::PointEmitterModel::make_prior_component_sigma()`.

Referenced by `make_default_prior()`.

9.11.4.40 ImageFormat1DBase::ImageT `ImageFormat1DBase::make_image () const [inline],[inherited]`

Definition at line 87 of file ImageFormat1DBase.h.

References `mappel::ImageFormat1DBase::size`.

9.11.4.41 ImageFormat1DBase::ImageStackT `ImageFormat1DBase::make_image_stack (ImageCoordT n) const [inline],[inherited]`

Definition at line 94 of file ImageFormat1DBase.h.

References `mappel::ImageFormat1DBase::size`.

9.11.4.42 PointEmitterModel::ParamT `mappel::PointEmitterModel::make_param () const [inline],[inherited]`

Definition at line 164 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::num_params`.

Referenced by `mappel::Gauss1DModel::initial_theta_estimate()`, `initial_theta_estimate()`, `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsxyModel::initial_theta_estimate()`, `mappel::Gauss2DsModel::initial_theta_estimate()`, `mappel::Gauss1DModel::pixel_hess_update()`, `pixel_hess_update()`, `mappel::Gauss2DModel::pixel_hess_update()`, and `mappel::Gauss2DsModel::pixel_hess_update()`.

9.11.4.43 `template<class FillT > PointEmitterModel::ParamT mappel::PointEmitterModel::make_param (FillT fill) const`
`[inherited]`

Definition at line 181 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.11.4.44 `MatT mappel::PointEmitterModel::make_param_mat () const` `[inline],[inherited]`

Definition at line 172 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.11.4.45 `template<class FillT > MatT mappel::PointEmitterModel::make_param_mat (FillT fill) const` `[inherited]`

Definition at line 191 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.11.4.46 `CubeT mappel::PointEmitterModel::make_param_mat_stack (IdxT n) const` `[inline],[inherited]`

Definition at line 176 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.11.4.47 `template<class FillT > CubeT mappel::PointEmitterModel::make_param_mat_stack (IdxT n, FillT fill) const`
`[inherited]`

Definition at line 196 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.11.4.48 `PointEmitterModel::ParamVecT mappel::PointEmitterModel::make_param_stack (IdxT n) const` `[inline],[inherited]`

Definition at line 168 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

Referenced by mappel::PointEmitterModel::bounded_theta_stack(), and mappel::PointEmitterModel::reflected_theta_stack().

9.11.4.49 `template<class FillT > PointEmitterModel::ParamVecT mappel::PointEmitterModel::make_param_stack (IdxT n, FillT fill) const` `[inherited]`

Definition at line 186 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.11.4.50 **CompositeDist** `mappel::Gauss1DsModel::make_prior_beta_position (IdxT size, double beta_xpos, double mean_l, double kappa_l, double mean_bg, double kappa_bg, double min_sigma, double max_sigma, double alpha_sigma) [static]`

Definition at line 94 of file Gauss1DsModel.cpp.

References `mappel::PointEmitterModel::make_prior_component_intensity()`, `mappel::PointEmitterModel::make_prior_component_position_beta()`, and `mappel::PointEmitterModel::make_prior_component_sigma()`.

Referenced by `mappel::Gauss2DsModel::make_internal_1Dsum_estimator()`.

9.11.4.51 **prior_hessian::TruncatedGammaDist** `mappel::PointEmitterModel::make_prior_component_intensity (double mean = default_mean_l, double kappa = default_intensity_kappa) [static], [inherited]`

Definition at line 98 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::default_max_l`.

Referenced by `make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_beta_position()`, `mappel::Gauss1DModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_normal_position()`, `make_default_prior_normal_position()`, `mappel::Gauss1DModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_prior_beta_position()`, `make_prior_beta_position()`, `mappel::Gauss1DModel::make_prior_beta_position()`, `mappel::Gauss2DsModel::make_prior_beta_position()`, `mappel::Gauss2DModel::make_prior_normal_position()`, `make_prior_normal_position()`, `mappel::Gauss1DModel::make_prior_normal_position()`, and `mappel::Gauss2DsModel::make_prior_normal_position()`.

9.11.4.52 **prior_hessian::ScaledSymmetricBetaDist** `mappel::PointEmitterModel::make_prior_component_position_beta (IdxT size, double pos_beta = default_beta_pos) [static], [inherited]`

Definition at line 92 of file PointEmitterModel.cpp.

Referenced by `make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_beta_position()`, `mappel::Gauss1DModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `make_prior_beta_position()`, `mappel::Gauss2DModel::make_prior_beta_position()`, `mappel::Gauss1DModel::make_prior_beta_position()`, and `mappel::Gauss2DsModel::make_prior_beta_position()`.

9.11.4.53 **prior_hessian::TruncatedNormalDist** `mappel::PointEmitterModel::make_prior_component_position_normal (IdxT size, double pos_sigma = default_sigma_pos) [static], [inherited]`

Definition at line 85 of file PointEmitterModel.cpp.

Referenced by `make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_default_prior_normal_position()`, `mappel::Gauss1DModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_prior_normal_position()`, `make_prior_normal_position()`, `mappel::Gauss1DModel::make_prior_normal_position()`, and `mappel::Gauss2DsModel::make_prior_normal_position()`.

9.11.4.54 `prior_hessian::TruncatedParetoDist mappel::PointEmitterModel::make_prior_component_sigma (double min_sigma, double max_sigma, double alpha = default_alpha_sigma) [static], [inherited]`

Definition at line 104 of file `PointEmitterModel.cpp`.

Referenced by `make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, `make_prior_beta_position()`, `mappel::Gauss2DsModel::make_prior_beta_position()`, `make_prior_normal_position()`, and `mappel::Gauss2DsModel::make_prior_normal_position()`.

9.11.4.55 `CompositeDist mappel::Gauss1DsModel::make_prior_normal_position (IdxT size, double sigma_xpos, double mean_l, double kappa_l, double mean_bg, double kappa_bg, double min_sigma, double max_sigma, double alpha_sigma) [static]`

Definition at line 108 of file `Gauss1DsModel.cpp`.

References `mappel::PointEmitterModel::make_prior_component_intensity()`, `mappel::PointEmitterModel::make_prior_component_position_normal()`, and `mappel::PointEmitterModel::make_prior_component_sigma()`.

Referenced by `mappel::Gauss2DsModel::make_internal_1Dsum_estimator()`.

9.11.4.56 `Gauss1DsModel::Stencil mappel::Gauss1DsModel::make_stencil (const ParamT & theta, bool compute_derivatives =true) const [inline]`

Make a new `Model::Stencil` object at `theta`.

Stencils store all of the important calculations necessary for evaluating the log-likelihood and its derivatives at a particular `theta` (parameter) value.

This allows re-use of the most expensive computations. Stencils can be easily passed around by reference, and most functions in the [mappel::methods](#) namespace accept a const [Stencil](#) reference in place of the model parameter.

Throws [mappel::ModelBoundsError](#) if not `model.theta_in_bounds(theta)`.

If derivatives will not be computed with this stencil set `compute_derivatives=false`

Parameters

<i>theta</i>	Parameter to evaluate at
<i>compute_derivatives</i>	True to also prepare for derivative computations

Returns

A new [Stencil](#) object ready to compute with

Definition at line 123 of file `Gauss1DsModel.h`.

References `mappel::Gauss1DsModel::Stencil::Stencil()`, and `mappel::PointEmitterModel::theta_in_bounds()`.

Referenced by `initial_theta_estimate()`.

9.11.4.57 **Gauss1DsModel & mappel::Gauss1DsModel::operator= (const Gauss1DsModel & o)** [protected]

Definition at line 27 of file Gauss1DsModel.cpp.

References mappel::MCMCAdaptor1Ds::operator=().

Referenced by mappel::Gauss1DsMAP::operator=(), and mappel::Gauss1DsMLE::operator=().

9.11.4.58 **Gauss1DsModel & mappel::Gauss1DsModel::operator= (Gauss1DsModel && o)** [protected]

Definition at line 35 of file Gauss1DsModel.cpp.

References DefaultPriorType, mappel::MCMCAdaptor1Ds::operator=(), and prior_types.

9.11.4.59 **void mappel::Gauss1DsModel::pixel_grad (IdxT i, const Stencil & s, ParamT & pgrad) const** [inline]

Definition at line 140 of file Gauss1DsModel.h.

References mappel::Gauss1DsModel::Stencil::DX, mappel::Gauss1DsModel::Stencil::DXS, mappel::Gauss1DsModel::Stencil::l(), and mappel::Gauss1DsModel::Stencil::X.

Referenced by pixel_hess_update().

9.11.4.60 **void mappel::Gauss1DsModel::pixel_grad2 (IdxT i, const Stencil & s, ParamT & pgrad2) const** [inline]

Definition at line 150 of file Gauss1DsModel.h.

References mappel::Gauss1DsModel::Stencil::DXS, mappel::Gauss1DsModel::Stencil::DXS2, mappel::Gauss1DsModel::Stencil::l(), and mappel::Gauss1DsModel::Stencil::sigma().

9.11.4.61 **void mappel::Gauss1DsModel::pixel_hess (IdxT i, const Stencil & s, MatT & hess) const** [inline]

Definition at line 160 of file Gauss1DsModel.h.

References mappel::Gauss1DsModel::Stencil::DX, mappel::Gauss1DsModel::Stencil::DXS, mappel::Gauss1DsModel::Stencil::DXS2, mappel::Gauss1DsModel::Stencil::DXSX, mappel::Gauss1DsModel::Stencil::l(), and mappel::Gauss1DsModel::Stencil::sigma().

9.11.4.62 **void mappel::Gauss1DsModel::pixel_hess_update (IdxT i, const Stencil & s, double dm_ratio_m1, double dmm_ratio, ParamT & grad, MatT & hess) const**

Definition at line 211 of file Gauss1DsModel.cpp.

References mappel::Gauss1DsModel::Stencil::DX, mappel::Gauss1DsModel::Stencil::DXS, mappel::Gauss1DsModel::Stencil::DXS2, mappel::Gauss1DsModel::Stencil::DXSX, mappel::Gauss1DsModel::Stencil::l(), mappel::PointEmitterModel::make_param(), pixel_grad(), and mappel::Gauss1DsModel::Stencil::sigma().

9.11.4.63 `double mappel::Gauss1DsModel::pixel_model_value (IdxT i, const Stencil & s) const [inline]`

Definition at line 134 of file Gauss1DsModel.h.

References `mappel::Gauss1DsModel::Stencil::bg()`, `mappel::Gauss1DsModel::Stencil::l()`, and `mappel::Gauss1DsModel::Stencil::X`.

9.11.4.64 `PointEmitterModel::ParamT mappel::PointEmitterModel::reflected_theta (const ParamT & theta) const [inherited]`

Definition at line 276 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::PointEmitterModel::reflected_theta_stack()`.

9.11.4.65 `PointEmitterModel::ParamVecT mappel::PointEmitterModel::reflected_theta_stack (const ParamVecT & theta) const [inherited]`

Definition at line 316 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::make_param_stack()`, and `mappel::PointEmitterModel::reflected_theta()`.

9.11.4.66 `void mappel::PointEmitterModel::rename_hyperparam (const std::string & old_name, const std::string & new_name) [inline], [inherited]`

Definition at line 244 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.11.4.67 `void mappel::MCMCAdaptor1Ds::sample_mcmc_candidate (IdxT sample_index, ParamT & candidate, double step_scale = 1.0) const [inherited]`

Definition at line 59 of file MCMCAdaptor1Ds.cpp.

References `mappel::MCMCAdaptor1D::eta_bg`, `mappel::MCMCAdaptor1D::eta_l`, `mappel::MCMCAdaptor1Ds::eta_sigma`, `mappel::MCMCAdaptor1D::eta_x`, `mappel::MCMCAdaptorBase::num_phases`, and `mappel::rng_manager`.

9.11.4.68 `void mappel::MCMCAdaptor1Ds::sample_mcmc_candidate (IdxT sample_index, ParamT & candidate, const IdxVecT & fixed_parameters_mask, double step_scale = 1.0) const [inherited]`

Definition at line 77 of file MCMCAdaptor1Ds.cpp.

References `mappel::MCMCAdaptor1D::eta_bg`, `mappel::MCMCAdaptor1D::eta_l`, `mappel::MCMCAdaptor1Ds::eta_sigma`, `mappel::MCMCAdaptor1D::eta_x`, `mappel::MCMCAdaptorBase::num_phases`, and `mappel::rng_manager`.

9.11.4.69 `template<class RngT > PointEmitterModel::ParamT mappel::PointEmitterModel::sample_prior (RngT & rng) const`
`[inherited]`

Definition at line 264 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

9.11.4.70 `PointEmitterModel::ParamT mappel::PointEmitterModel::sample_prior () const` `[inline]`, `[inherited]`

Definition at line 268 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`, and `mappel::rng_manager`.

9.11.4.71 `void mappel::MCMCAdaptor1D::set_background_mcmc_sampling (double eta_bg = -1)` `[inherited]`

Definition at line 81 of file `MCMCAdaptor1D.cpp`.

References `mappel::PointEmitterModel::default_pixel_mean_bg`, `mappel::MCMCAdaptor1D::eta_bg`, `mappel::PointEmitterModel::get_hyperparam_value()`, `mappel::PointEmitterModel::get_lbound()`, `mappel::PointEmitterModel::get_ubound()`, and `mappel::MCMCAdaptorBase::sigma_scale`.

Referenced by `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`.

9.11.4.72 `void mappel::PointEmitterModel::set_bounds (const ParamT & lbound_, const ParamT & ubound_)`
`[inherited]`

Box-type parameter bounds

Modifies the prior bounds to prevent sampling outside the valid box-constraints.

Definition at line 213 of file `PointEmitterModel.cpp`.

References `mappel::PointEmitterModel::bounds_epsilon`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

9.11.4.73 `void mappel::PointEmitterModel::set_hyperparam_names (const StringVecT & desc)` `[inline]`,
`[inherited]`

Definition at line 260 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

9.11.4.74 `void mappel::PointEmitterModel::set_hyperparam_value (const std::string & name, double value)` `[inline]`,
`[inherited]`

Definition at line 240 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

9.11.4.75 `void mappel::PointEmitterModel::set_hyperparams (const VecT & hyperparams)` `[inline]`, `[inherited]`

Definition at line 220 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

Referenced by `mappel::Gauss2DModel::set_hyperparams()`, and `mappel::Gauss2DsModel::set_hyperparams()`.

9.11.4.76 `template<class ImT > void ImageFormat1DBase::set_image_in_stack (ImageStackT & stack, ImageCoordT n, const ImT & im) const` `[inherited]`

Definition at line 115 of file `ImageFormat1DBase.h`.

9.11.4.77 `void mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling (double eta_I = -1)` `[inherited]`

Definition at line 65 of file `MCMCAdaptor1D.cpp`.

References `mappel::PointEmitterModel::default_mean_I`, `mappel::MCMCAdaptor1D::eta_I`, `mappel::PointEmitterModel::get_hyperparam_value()`, and `mappel::MCMCAdaptorBase::sigma_scale`.

Referenced by `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`.

9.11.4.78 `void mappel::PointEmitterModel::set_lbound (const ParamT & lbound)` `[inherited]`

Definition at line 226 of file `PointEmitterModel.cpp`.

References `mappel::PointEmitterModel::bounds_epsilon`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

Referenced by `set_min_sigma()`.

9.11.4.79 `void mappel::Gauss1DsModel::set_max_sigma (double max_sigma)`

Definition at line 135 of file `Gauss1DsModel.cpp`.

References `mappel::PointEmitterModel::check_psf_sigma()`, `get_min_sigma()`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::set_ubound()`.

Referenced by `set_max_sigma()`, `mappel::Gauss2DsModel::set_max_sigma_ratio()`, and `mappel::Gauss2DsModel::set_min_sigma()`.

9.11.4.80 `void mappel::Gauss1DsModel::set_max_sigma (const VecT & max_sigma)`

Definition at line 153 of file `Gauss1DsModel.cpp`.

References `set_max_sigma()`.

9.11.4.81 `void mappel::MCMCAdaptorBase::set_mcmc_num_phases (IdxT num_phases)` [protected],[inherited]

Definition at line 59 of file MCMCAdaptorBase.cpp.

References `mappel::MCMCAdaptorBase::num_phases`.

Referenced by `mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds()`, and `mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds()`.

9.11.4.82 `void mappel::MCMCAdaptorBase::set_mcmc_sigma_scale (double scale)` [inherited]

Definition at line 39 of file MCMCAdaptorBase.cpp.

References `mappel::MCMCAdaptorBase::global_max_mcmc_sigma_scale`, and `mappel::MCMCAdaptorBase::sigma_scale`.

9.11.4.83 `void mappel::Gauss1DsModel::set_min_sigma (double min_sigma)`

Definition at line 122 of file Gauss1DsModel.cpp.

References `mappel::PointEmitterModel::check_psf_sigma()`, `get_max_sigma()`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::set_lbound()`.

Referenced by `set_min_sigma()`, and `mappel::Gauss2DsModel::set_min_sigma()`.

9.11.4.84 `void mappel::Gauss1DsModel::set_min_sigma (const VecT & min_sigma)`

Definition at line 148 of file Gauss1DsModel.cpp.

References `set_min_sigma()`.

9.11.4.85 `void mappel::PointEmitterModel::set_param_names (const StringVecT & desc)` [inline],[inherited]

Definition at line 252 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.11.4.86 `void mappel::PointEmitterModel::set_prior (CompositeDist && prior_)` [inherited]

Definition at line 158 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_hyperparams`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::Gauss2DModel::set_prior()`, and `mappel::Gauss2DsModel::set_prior()`.

9.11.4.87 `void mappel::PointEmitterModel::set_prior (const CompositeDist & prior_)` [inherited]

Definition at line 149 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_hyperparams`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

9.11.4.88 `void mappel::PointEmitterModel::set_rng_seed (RngSeedT seed) [static],[inherited]`

Definition at line 110 of file PointEmitterModel.cpp.

References mappel::rng_manager.

9.11.4.89 `void ImageFormat1DBase::set_size (const ImageSizeT & size_) [inherited]`

Definition at line 30 of file ImageFormat1DBase.cpp.

References mappel::ImageFormat1DBase::check_size(), and mappel::ImageFormat1DBase::size.

Referenced by mappel::ImageFormat1DBase::set_size(), mappel::Gauss2DModel::set_size(), and mappel::Gauss2DsModel::set_size().

9.11.4.90 `void ImageFormat1DBase::set_size (const arma::Col< ImageCoordT > & sz) [inline],[inherited]`

Definition at line 75 of file ImageFormat1DBase.h.

References mappel::ImageFormat1DBase::set_size().

9.11.4.91 `void mappel::PointEmitterModel::set_ubound (const ParamT & ubound) [inherited]`

Definition at line 237 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::bounds_epsilon, mappel::PointEmitterModel::lbound, mappel::PointEmitterModel::num_params, mappel::PointEmitterModel::prior, and mappel::PointEmitterModel::ubound.

Referenced by set_max_sigma(), and mappel::Gauss2DsModel::set_max_sigma_ratio().

9.11.4.92 `bool mappel::PointEmitterModel::theta_in_bounds (const ParamT & theta) const [inherited]`

Definition at line 257 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::check_param_shape(), mappel::PointEmitterModel::lbound, mappel::PointEmitterModel::num_params, and mappel::PointEmitterModel::ubound.

Referenced by mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::Gauss1DModel::make_stencil(), make_stencil(), mappel::Gauss2DModel::make_stencil(), mappel::Gauss2DsxyModel::make_stencil(), mappel::Gauss2DsModel::make_stencil(), and mappel::PointEmitterModel::theta_stack_in_bounds().

9.11.4.93 `BoolVecT mappel::PointEmitterModel::theta_stack_in_bounds (const ParamVecT & theta) const [inherited]`

Definition at line 296 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::check_param_shape(), and mappel::PointEmitterModel::theta_in_bounds().

9.11.5 Member Data Documentation

9.11.5.1 `const double mappel::PointEmitterModel::bounds_epsilon = 1.0E-6` `[static], [inherited]`

Distance from the boundary to constrain in `bound_theta` and `bounded_theta` methods

Definition at line 52 of file `PointEmitterModel.h`.

Referenced by `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::Gauss2D↔DsModel::set_max_sigma_ratio()`, and `mappel::PointEmitterModel::set_ubound()`.

9.11.5.2 `const double mappel::PointEmitterModel::default_alpha_sigma = 2` `[static], [inherited]`

Default per-pixel background gamma distribution shape

Definition at line 62 of file `PointEmitterModel.h`.

9.11.5.3 `const double mappel::PointEmitterModel::default_beta_pos = 3` `[static], [inherited]`

Default position parameter in symmetric beta-distributions

Definition at line 56 of file `PointEmitterModel.h`.

9.11.5.4 `const double mappel::PointEmitterModel::default_intensity_kappa = 2` `[static], [inherited]`

Default shape for intensity gamma distributions

Definition at line 60 of file `PointEmitterModel.h`.

9.11.5.5 `const double mappel::PointEmitterModel::default_max_l = INFINITY` `[static], [inherited]`

Default maximum emitter intensity

Definition at line 59 of file `PointEmitterModel.h`.

Referenced by `mappel::PointEmitterModel::make_prior_component_intensity()`.

9.11.5.6 `const double mappel::PointEmitterModel::default_mean_l = 300` `[static], [inherited]`

Default emitter intensity mean

Definition at line 58 of file `PointEmitterModel.h`.

Referenced by `mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling()`.

9.11.5.7 `const double mappel::PointEmitterModel::default_pixel_mean_bg = 4` `[static], [inherited]`

Default per-pixel mean background counts

Definition at line 61 of file PointEmitterModel.h.

Referenced by `make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_beta_position()`, `mappel::Gauss1DModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_default_prior_normal_position()`, `mappel::Gauss1DModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, and `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`.

9.11.5.8 `const double mappel::PointEmitterModel::default_sigma_pos = 1` `[static], [inherited]`

Default position parameter in symmetric beta-distributions

Definition at line 57 of file PointEmitterModel.h.

9.11.5.9 `const std::string mappel::Gauss1DsModel::DefaultPriorType = "Normal"` `[static]`

Definition at line 51 of file Gauss1DsModel.h.

Referenced by `operator=()`.

9.11.5.10 `const std::string mappel::PointEmitterModel::DefaultSeperableInitEstimator = "TrustRegion"` `[static], [inherited]`

Estimator name to use in 1D separable initializations

Definition at line 49 of file PointEmitterModel.h.

Referenced by `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsxyModel::initial_theta_estimate()`, and `mappel::Gauss2DsModel::initial_theta_estimate()`.

9.11.5.11 `double mappel::MCMCAdaptor1D::eta_bg = 0` `[protected], [inherited]`

The standard deviation for the normally distributed perturbation to `theta_bg` in the random walk MCMC sampling

Definition at line 33 of file MCMCAdaptor1D.h.

Referenced by `mappel::MCMCAdaptor1D::get_stats()`, `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor1D::operator=()`, `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`, and `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`.

9.11.5.12 `double mappel::MCMCAdaptor1D::eta_I = 0` `[protected], [inherited]`

The standard deviation for the normally distributed perturbation to `theta_I` in the random walk MCMC sampling

Definition at line 32 of file MCMCAdaptor1D.h.

Referenced by `mappel::MCMCAdaptor1D::get_stats()`, `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor1D::operator=()`, `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`, and `mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling()`.

9.11.5.13 `double mappel::MCMCAdaptor1Ds::eta_sigma = 1` `[protected], [inherited]`

The standard deviation for the normally distributed perturbation to `theta_bg` in the random walk MCMC sampling

Definition at line 28 of file `MCMCAdaptor1Ds.h`.

Referenced by `mappel::MCMCAdaptor1Ds::get_stats()`, `mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds()`, `mappel::MCMCAdaptor1Ds::operator=()`, and `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`.

9.11.5.14 `double mappel::MCMCAdaptor1D::eta_x = 0` `[protected], [inherited]`

The standard deviation for the normally distributed perturbation to `theta_x` in the random walk MCMC sampling

Definition at line 31 of file `MCMCAdaptor1D.h`.

Referenced by `mappel::MCMCAdaptor1D::get_stats()`, `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor1D::operator=()`, `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, and `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`.

9.11.5.15 `const double mappel::MCMCAdaptorBase::global_default_mcmc_sigma_scale = 0.05` `[static], [inherited]`

Definition at line 16 of file `MCMCAdaptorBase.h`.

Referenced by `mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds()`, `mappel::MCMCAdaptor2D::MCMCAdaptor2D()`, and `mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds()`.

9.11.5.16 `const double mappel::MCMCAdaptorBase::global_max_mcmc_sigma_scale = 0.5` `[static], [inherited]`

Definition at line 17 of file `MCMCAdaptorBase.h`.

Referenced by `mappel::MCMCAdaptorBase::MCMCAdaptorBase()`, and `mappel::MCMCAdaptorBase::set_mcmc_sigma_scale()`.

9.11.5.17 `const double mappel::PointEmitterModel::global_max_psf_sigma = 1E2` `[static], [inherited]`

Global maximum for any `psf_sigma`. Sizes above this value are invalid, and nowhere near useful for practical point emitter localization

Definition at line 54 of file `PointEmitterModel.h`.

Referenced by `mappel::PointEmitterModel::check_psf_sigma()`.

9.11.5.18 `const ImageFormat1DBase::ImageCoordT ImageFormat1DBase::global_max_size = 512` `[static], [inherited]`

Maximum size along any dimension of the image. This is insanely big to catch obvious errors

Definition at line 40 of file `ImageFormat1DBase.h`.

Referenced by `mappel::ImageFormat1DBase::check_size()`.

9.11.5.19 `const double mappel::PointEmitterModel::global_min_psf_sigma = 1E-1` `[static], [inherited]`

Global minimum for any `psf_sigma`. Sizes below this value are invalid, and nowhere near useful for practical point emitter localization

Definition at line 53 of file `PointEmitterModel.h`.

Referenced by `mappel::PointEmitterModel::check_psf_sigma()`.

9.11.5.20 `const ImageFormat1DBase::ImageCoordT ImageFormat1DBase::global_min_size = 3` `[static], [inherited]`

Minimum size along any dimension of the image.

Definition at line 39 of file `ImageFormat1DBase.h`.

Referenced by `mappel::ImageFormat1DBase::check_size()`.

9.11.5.21 `ParamT mappel::PointEmitterModel::lbound` `[protected], [inherited]`

Definition at line 148 of file `PointEmitterModel.h`.

Referenced by `mappel::PointEmitterModel::bound_theta()`, `mappel::PointEmitterModel::bounded_theta()`, `mappel::PointEmitterModel::get_lbound()`, `mappel::PointEmitterModel::get_stats()`, `initial_theta_estimate()`, `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsModel::initial_theta_estimate()`, `mappel::PointEmitterModel::operator=()`, `mappel::PointEmitterModel::reflected_theta()`, `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::PointEmitterModel::set_prior()`, `mappel::PointEmitterModel::set_ubound()`, and `mappel::PointEmitterModel::theta_in_bounds()`.

9.11.5.22 `const ImageFormat1DBase::ImageCoordT ImageFormat1DBase::num_dim = 1` `[static], [inherited]`

Number of image dimensions.

Definition at line 38 of file `ImageFormat1DBase.h`.

Referenced by `mappel::ImageFormat1DBase::get_stats()`.

9.11.5.23 `IdxT mappel::PointEmitterModel::num_hyperparams` `[protected], [inherited]`

Definition at line 147 of file `PointEmitterModel.h`.

Referenced by `mappel::PointEmitterModel::get_num_hyperparams()`, `mappel::PointEmitterModel::get_stats()`, `mappel::PointEmitterModel::operator=()`, and `mappel::PointEmitterModel::set_prior()`.

9.11.5.24 `IdxT mappel::PointEmitterModel::num_params` `[protected], [inherited]`

Definition at line 146 of file `PointEmitterModel.h`.

Referenced by `mappel::PointEmitterModel::bound_theta()`, `mappel::PointEmitterModel::bounded_theta()`, `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::get_num_params()`, `mappel::PointEmitterModel::get_stats()`, `mappel::Gauss1DModel::initial_theta_estimate()`, `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsModel::initial_theta_estimate()`, `mappel::PointEmitterModel::make_param()`, `mappel::PointEmitterModel::make_param_mat()`, `mappel::PointEmitterModel::make_param_mat_stack()`, `mappel::PointEmitterModel::make_param_stack()`, `mappel::PointEmitterModel::operator=()`, `mappel::PointEmitterModel::reflected_theta()`, `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::PointEmitterModel::set_prior()`, `mappel::PointEmitterModel::set_ubound()`, and `mappel::PointEmitterModel::theta_in_bounds()`.

9.11.5.25 `IdxT mappel::MCMCAdaptorBase::num_phases` [protected],[inherited]

The number of different sampling phases for candidate selection MCMC. Each phase changes a different subset of variables.

Definition at line 29 of file `MCMCAdaptorBase.h`.

Referenced by `mappel::MCMCAdaptorBase::get_mcmc_num_phases()`, `mappel::MCMCAdaptorBase::get_stats()`, `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`, and `mappel::MCMCAdaptorBase::set_mcmc_num_phases()`.

9.11.5.26 `CompositeDist mappel::PointEmitterModel::prior` [protected],[inherited]

Definition at line 145 of file `PointEmitterModel.h`.

Referenced by `mappel::Gauss2DModel::debug_internal_sum_model_y()`, `mappel::Gauss2DsModel::debug_internal_sum_model_y()`, `mappel::Gauss2DModel::Gauss2DModel()`, `mappel::Gauss2DsModel::Gauss2DsModel()`, `mappel::PointEmitterModel::get_hyperparam_index()`, `mappel::PointEmitterModel::get_hyperparam_names()`, `mappel::PointEmitterModel::get_hyperparam_value()`, `mappel::PointEmitterModel::get_hyperparams()`, `get_max_sigma()`, `get_min_sigma()`, `mappel::PointEmitterModel::get_param_names()`, `mappel::PointEmitterModel::get_prior()`, `mappel::PointEmitterModel::get_stats()`, `mappel::PointEmitterModel::has_hyperparam()`, `mappel::PointEmitterModel::operator=()`, `mappel::PointEmitterModel::PointEmitterModel()`, `mappel::PointEmitterModel::rename_hyperparam()`, `mappel::PointEmitterModel::sample_prior()`, `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_hyperparam_names()`, `mappel::PointEmitterModel::set_hyperparam_value()`, `mappel::PointEmitterModel::set_hyperparams()`, `mappel::PointEmitterModel::set_lbound()`, `set_max_sigma()`, `set_min_sigma()`, `mappel::PointEmitterModel::set_param_names()`, `mappel::PointEmitterModel::set_prior()`, and `mappel::PointEmitterModel::set_ubound()`.

9.11.5.27 `const StringVecT mappel::Gauss1DsModel::prior_types` [static]

Initial value:

```
= { "Beta",
    "Normal"
}
```

Definition at line 50 of file `Gauss1DsModel.h`.

Referenced by `operator=()`.

9.11.5.28 `double mappel::MCMCAdaptorBase::sigma_scale` [protected],[inherited]

A scaling factor for step sizes as a fraction of the size of the domain dimension we are walking in. (0.05 default)

Definition at line 30 of file `MCMCAdaptorBase.h`.

Referenced by `mappel::MCMCAdaptorBase::get_mcmc_sigma_scale()`, `mappel::MCMCAdaptorBase::get_stats()`, `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds()`, `mappel::MCMCAdaptor2D::MCMCAdaptor2D()`, `mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds()`, `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`, `mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling()`, and `mappel::MCMCAdaptorBase::set_mcmc_sigma_scale()`.

9.11.5.29 `ImageSizeT` `mappel::ImageFormat1DBase::size` `[protected]`, `[inherited]`

Number of pixels in X dimension for 1D image

Definition at line 65 of file `ImageFormat1DBase.h`.

Referenced by `mappel::ImageFormat1DBase::check_image_shape()`, `mappel::Gauss1DsModel::Stencil::compute_derivatives()`, `mappel::Gauss1DModel::Stencil::compute_derivatives()`, `mappel::ImageFormat1DBase::get_num_pixels()`, `mappel::ImageFormat1DBase::get_size()`, `mappel::Gauss1DModel::initial_theta_estimate()`, `initial_theta_estimate()`, `mappel::ImageFormat1DBase::make_image()`, `mappel::ImageFormat1DBase::make_image_stack()`, `mappel::ImageFormat1DBase::set_size()`, `mappel::Gauss1DsModel::Stencil::Stencil()`, and `mappel::Gauss1DModel::Stencil::Stencil()`.

9.11.5.30 `ParamT` `mappel::PointEmitterModel::ubound` `[protected]`, `[inherited]`

Definition at line 148 of file `PointEmitterModel.h`.

Referenced by `mappel::PointEmitterModel::bound_theta()`, `mappel::PointEmitterModel::bounded_theta()`, `mappel::PointEmitterModel::get_stats()`, `mappel::PointEmitterModel::get_ubound()`, `initial_theta_estimate()`, `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsModel::initial_theta_estimate()`, `mappel::PointEmitterModel::operator=()`, `mappel::PointEmitterModel::reflected_theta()`, `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::PointEmitterModel::set_prior()`, `mappel::PointEmitterModel::set_ubound()`, and `mappel::PointEmitterModel::theta_in_bounds()`.

The documentation for this class was generated from the following files:


- [Gauss1DsModel.h](#)
- [Gauss1DsModel.cpp](#)

9.12 mappel::Gauss2DMP Class Reference

A 2D Gaussian with fixed PSF under an Poisson Read Noise assumption and MAP Objective.

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/Gauss2DMP.h>
```

Inheritance diagram for `mappel::Gauss2DMP`:

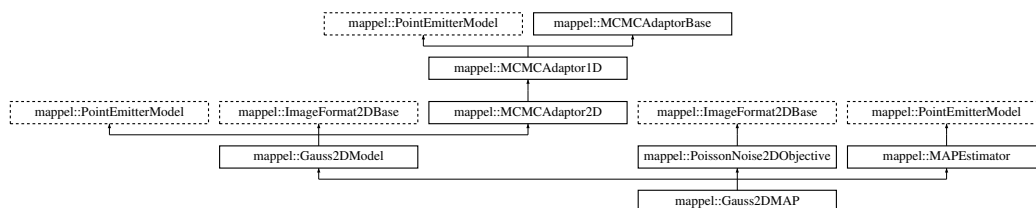

Public Types

- using `Gauss1DSumModelT` = `Gauss1DMAP`
- using `StencilVecT` = `std::vector< Stencil >`
- using `ParamT` = `arma::vec`
- using `ParamVecT` = `arma::mat`
- using `ImageCoordT` = `uint32_t`
- using `ImagePixelT` = `double`
- template<class `CoordT` >
using `ImageSizeShapeT` = `arma::Col< CoordT >`
- template<class `CoordT` >
using `ImageSizeVecShapeT` = `arma::Mat< CoordT >`
- using `ImageSizeT` = `ImageSizeShapeT< ImageCoordT >`
- using `ImageSizeVecT` = `ImageSizeVecShapeT< ImageCoordT >`
- template<class `PixelT` >
using `ImageShapeT` = `arma::Mat< PixelT >`
- template<class `PixelT` >
using `ImageStackShapeT` = `arma::Cube< PixelT >`
- using `ImageT` = `ImageShapeT< ImagePixelT >`
- using `ImageStackT` = `ImageStackShapeT< ImagePixelT >`
- using `ModelDataT` = `ImageT`
- using `ModelDataStackT` = `ImageStackT`

Public Member Functions

- `Gauss2DMAP` (`ImageCoordT` `size`, double `psf_sigma`, const std::string &`prior_type`=`DefaultPriorType`)
- `Gauss2DMAP` (const `ImageSizeT` &`size`, double `psf_sigma`, const std::string &`prior_type`=`DefaultPriorType`)
- template<class `IntType` , class `FloatType` >
`Gauss2DMAP` (const arma::Col< `IntType` > &`size`, const arma::Col< `FloatType` > &`psf_sigma`, const std::string &`prior_type`=`DefaultPriorType`)
- `Gauss2DMAP` (const `ImageSizeT` &`size`, const `VecT` &`psf_sigma`, `CompositeDist` &&`prior`)
- `Gauss2DMAP` (`ImageSizeT` &&`size`, `VecT` &&`psf_sigma`, `CompositeDist` &&`prior`)
- `Gauss2DMAP` (const `ImageSizeT` &`size`, const `VecT` &`psf_sigma`, const `CompositeDist` &`prior`)
- `Gauss2DMAP` (const `Gauss2DMAP` &o)
- `Gauss2DMAP` & `operator=` (const `Gauss2DMAP` &o)
- `Gauss2DMAP` (`Gauss2DMAP` &&o)
- `Gauss2DMAP` & `operator=` (`Gauss2DMAP` &&o)
- void `set_hyperparams` (const `VecT` &`hyperparams`)
- void `set_prior` (`CompositeDist` &&`prior_`)
- void `set_prior` (const `CompositeDist` &`prior_`)
- void `set_size` (const `ImageSizeT` &`size_`)
- const `VecT` & `get_psf_sigma` () const
- double `get_psf_sigma` (`IdxT` `idx`) const
- void `set_psf_sigma` (double `new_psf_sigma`)
- void `set_psf_sigma` (const `VecT` &`new_psf_sigma`)
- `StatsT` `get_stats` () const
- `Stencil` `make_stencil` (const `ParamT` &`theta`, bool `compute_derivatives`=true) const
Make a new Model::Stencil object at theta.
- double `pixel_model_value` (int `i`, int `j`, const `Stencil` &`s`) const
- void `pixel_grad` (int `i`, int `j`, const `Stencil` &`s`, `ParamT` &`pgrad`) const

- void `pixel_grad2` (int i, int j, const `Stencil` &s, `ParamT` &pgrad2) const
- void `pixel_hess` (int i, int j, const `Stencil` &s, `MatT` &hess) const
- void `pixel_hess_update` (int i, int j, const `Stencil` &s, double dm_ratio_m1, double dmm_ratio, `ParamT` &grad, `MatT` &hess) const
 - pixel derivative inner loop calculations.*
- `Stencil initial_theta_estimate` (const `ImageT` &im) const
 - Fast, heuristic estimate of initial theta.*
- `Stencil initial_theta_estimate` (const `ImageT` &im, const `ParamT` &theta_init) const
- `Stencil initial_theta_estimate` (const `ImageT` &im, const `ParamT` &theta_init, const std::string &estimator) const
- `Gauss1DSumModelT debug_internal_sum_model_x` () const
- `Gauss1DSumModelT debug_internal_sum_model_y` () const
- `IdxT get_num_params` () const
- void `check_param_shape` (const `ParamT` &theta) const
- void `check_param_shape` (const `ParamVecT` &theta) const
- void `check_psf_sigma` (double `psf_sigma`) const
- void `check_psf_sigma` (const `VecT` &`psf_sigma`) const
- `ParamT make_param` () const
- template<class FillT >
 - `ParamT make_param` (FillT fill) const
- `ParamVecT make_param_stack` (`IdxT` n) const
- template<class FillT >
 - `ParamVecT make_param_stack` (`IdxT` n, FillT fill) const
- `MatT make_param_mat` () const
- template<class FillT >
 - `MatT make_param_mat` (FillT fill) const
- `CubeT make_param_mat_stack` (`IdxT` n) const
- template<class FillT >
 - `CubeT make_param_mat_stack` (`IdxT` n, FillT fill) const
- `CompositeDist & get_prior` ()
- const `CompositeDist & get_prior` () const
- `IdxT get_num_hyperparams` () const
- `VecT get_hyperparams` () const
- bool `has_hyperparam` (const std::string &name) const
- double `get_hyperparam_value` (const std::string &name) const
- int `get_hyperparam_index` (const std::string &name) const
- void `set_hyperparam_value` (const std::string &name, double value)
- void `rename_hyperparam` (const std::string &old_name, const std::string &new_name)
- `StringVecT get_param_names` () const
- void `set_param_names` (const `StringVecT` &desc)
- `StringVecT get_hyperparam_names` () const
- void `set_hyperparam_names` (const `StringVecT` &desc)
- template<class RngT >
 - `ParamT sample_prior` (RngT &rng) const
- `ParamT sample_prior` () const
- void `set_bounds` (const `ParamT` &lbound, const `ParamT` &ubound)
- void `set_lbound` (const `ParamT` &lbound)
- void `set_ubound` (const `ParamT` &ubound)
- const `ParamT & get_lbound` () const
- const `ParamT & get_ubound` () const
- bool `theta_in_bounds` (const `ParamT` &theta) const
- void `bound_theta` (`ParamT` &theta, double epsilon=`bounds_epsilon`) const

- [ParamT bounded_theta](#) (const [ParamT](#) &theta, double epsilon=[bounds_epsilon](#)) const
- [ParamT reflected_theta](#) (const [ParamT](#) &theta) const
- [BoolVecT theta_stack_in_bounds](#) (const [ParamVecT](#) &theta) const
- [ParamVecT bounded_theta_stack](#) (const [ParamVecT](#) &theta, double epsilon=[bounds_epsilon](#)) const
- [ParamVecT reflected_theta_stack](#) (const [ParamVecT](#) &theta) const
- [ImageT make_image](#) () const
- [ImageStackT make_image_stack](#) ([ImageCoordT](#) n) const
- [ImageCoordT get_size_image_stack](#) (const [ImageStackT](#) &stack) const
- [ImageT get_image_from_stack](#) (const [ImageStackT](#) &stack, [ImageCoordT](#) n) const
- `template<class ImT >`
`void set_image_in_stack (ImageStackT &stack, ImageCoordT n, const ImT &im) const`
- `const ImageSizeT & get_size () const`
- `ImageCoordT get_size (IdxT idx) const`
- `ImageCoordT get_num_pixels () const`
- `void check_image_shape (const ImageT &im) const`
Check the shape of a single images is correct for model size.
- `void check_image_shape (const ImageStackT &ims) const`
Check the shape of a stack of images is correct for model size.
- `void sample_mcmc_candidate (IdxT sample_index, ParamT &candidate, double step_scale=1.0) const`
- `void sample_mcmc_candidate (IdxT sample_index, ParamT &candidate, const IdxVecT &fixed_parameters_↵
mask, double step_scale=1.0) const`
- `void set_intensity_mcmc_sampling (double eta_l=-1)`
- `void set_background_mcmc_sampling (double eta_bg=-1)`
- `void set_mcmc_sigma_scale (double scale)`
- `double get_mcmc_sigma_scale () const`
- `IdxT get_mcmc_num_phases () const`

Static Public Member Functions

- static [CompositeDist make_default_prior](#) (const [ImageSizeT](#) &size, const std::string &prior_type)
- static [CompositeDist make_default_prior_beta_position](#) (const [ImageSizeT](#) &size)
- static [CompositeDist make_default_prior_normal_position](#) (const [ImageSizeT](#) &size)
- static [CompositeDist make_prior_beta_position](#) (const [ImageSizeT](#) &size, double beta_xpos, double beta_ypos, double mean_l, double kappa_l, double mean_bg, double kappa_bg)
- static [CompositeDist make_prior_normal_position](#) (const [ImageSizeT](#) &size, double sigma_xpos, double beta_↵
ypos, double mean_l, double kappa_l, double mean_bg, double kappa_bg)
- static [prior_hessian::TruncatedNormalDist make_prior_component_position_normal](#) ([IdxT](#) size, double pos_↵
sigma=[default_sigma_pos](#))
- static [prior_hessian::ScaledSymmetricBetaDist make_prior_component_position_beta](#) ([IdxT](#) size, double pos_↵
beta=[default_beta_pos](#))
- static [prior_hessian::TruncatedGammaDist make_prior_component_intensity](#) (double mean=[default_mean_↵
l](#), double kappa=[default_intensity_kappa](#))
- static [prior_hessian::TruncatedParetoDist make_prior_component_sigma](#) (double min_sigma, double max_↵
sigma, double alpha=[default_alpha_sigma](#))
- static void [set_rng_seed](#) ([RngSeedT](#) seed)
- static [ParallelRngManagerT](#) & [get_rng_manager](#) ()
- static [ParallelRngGeneratorT](#) & [get_rng_generator](#) ()
- static void [check_size](#) (const [ImageSizeT](#) &size_)

Check the size argument for the model.

Static Public Attributes

- static const std::string `name`
- static const `StringVecT` `prior_types`
- static const std::string `DefaultPriorType` = "Normal"
- static const std::string `DefaultSeperableInitEstimator` = "TrustRegion"
- static const double `bounds_epsilon` = 1.0E-6
- static const double `global_min_psf_sigma` = 1E-1
- static const double `global_max_psf_sigma` = 1E2
- static const double `default_beta_pos` = 3
- static const double `default_sigma_pos` = 1
- static const double `default_mean_l` = 300
- static const double `default_max_l` = INFINITY
- static const double `default_intensity_kappa` = 2
- static const double `default_pixel_mean_bg` = 4
- static const double `default_alpha_sigma` = 2
- static const `ImageCoordT` `num_dim` =2
- static const `ImageCoordT` `global_min_size` =3
- static const `ImageCoordT` `global_max_size` =512
- static const double `global_default_mcmc_sigma_scale` = 0.05
- static const double `global_max_mcmc_sigma_scale` = 0.5
- static const std::vector< std::string > `estimator_names`

Protected Member Functions

- void `update_internal_1Dsum_estimators` ()
- void `set_mcmc_num_phases` (`IdxT` num_phases)

Static Protected Member Functions

- static `Gauss1DSumModelT` `make_internal_1Dsum_estimator` (`IdxT` dim, const `ImageSizeT` &size, const `VecT` &psf_sigma, const `CompositeDist` &prior)

Protected Attributes

- `VecT` `psf_sigma`
- `Gauss1DSumModelT` `x_model`
- `Gauss1DSumModelT` `y_model`
- `CompositeDist` `prior`
- `IdxT` `num_params`
- `IdxT` `num_hyperparams`
- `ParamT` `lbound`
- `ParamT` `ubound`
- `ImageSizeT` `size`
- double `eta_y` =0
- double `eta_x` =0
- double `eta_l` =0
- double `eta_bg` =0
- `IdxT` `num_phases`
- double `sigma_scale`

9.12.1 Detailed Description

A 2D Gaussian with fixed PSF under an Poisson Read Noise assumption and MAP Objective.

Model: [Gauss2DModel](#) a 2D gaussian PSF with fixed psf_sigma Objective: [PoissonNoise2DObjective](#) - Poisson noise model for 2D Estimator: [MAPEstimator](#) - Maximum a-posteriori estimator

Definition at line 23 of file Gauss2DMap.h.

9.12.2 Member Typedef Documentation

9.12.2.1 `using mappel::Gauss2DModel::Gauss1DSumModelT = Gauss1DMap` [inherited]

Definition at line 23 of file Gauss2DModel.h.

9.12.2.2 `using mappel::ImageFormat2DBase::ImageCoordT = uint32_t` [inherited]

Image size coordinate storage type

Definition at line 24 of file ImageFormat2DBase.h.

9.12.2.3 `using mappel::ImageFormat2DBase::ImagePixelT = double` [inherited]

Image pixel storage type

Definition at line 25 of file ImageFormat2DBase.h.

9.12.2.4 `template<class PixelT > using mappel::ImageFormat2DBase::ImageShapeT = arma::Mat<PixelT>`
[inherited]

Shape of the data type for a single image

Definition at line 32 of file ImageFormat2DBase.h.

9.12.2.5 `template<class CoordT > using mappel::ImageFormat2DBase::ImageSizeShapeT = arma::Col<CoordT>`
[inherited]

Shape of the data type to store a single image's coordinates

Definition at line 27 of file ImageFormat2DBase.h.

9.12.2.6 `using mappel::ImageFormat2DBase::ImageSizeT = ImageSizeShapeT<ImageCoordT>`
[inherited]

Data type for a single image size

Definition at line 29 of file ImageFormat2DBase.h.

9.12.2.7 `template<class CoordT > using mappel::ImageFormat2DBase::ImageSizeVecShapeT = arma::Mat<CoordT>`
`[inherited]`

Shape of the data type to store a vector of image's coordinates

Definition at line 28 of file ImageFormat2DBase.h.

9.12.2.8 `using mappel::ImageFormat2DBase::ImageSizeVecT = ImageSizeVecShapeT<ImageCoordT>`
`[inherited]`

Data type for a sequence of image sizes

Definition at line 30 of file ImageFormat2DBase.h.

9.12.2.9 `template<class PixelT > using mappel::ImageFormat2DBase::ImageStackShapeT = arma::Cube<PixelT>`
`[inherited]`

Shape of the data type for a sequence of images

Definition at line 33 of file ImageFormat2DBase.h.

9.12.2.10 `using mappel::ImageFormat2DBase::ImageStackT = ImageStackShapeT<ImagePixelT>`
`[inherited]`

Data type to represent a sequence of images

Definition at line 35 of file ImageFormat2DBase.h.

9.12.2.11 `using mappel::ImageFormat2DBase::ImageT = ImageShapeT<ImagePixelT>` `[inherited]`

Data type to represent single image

Definition at line 34 of file ImageFormat2DBase.h.

9.12.2.12 `using mappel::PoissonNoise2DObjective::ModelDataStackT = ImageStackT` `[inherited]`

Objective function data stack type: 2D double precision image stack, of images gain-corrected to approximate photons counts

Definition at line 25 of file PoissonNoise2DObjective.h.

9.12.2.13 `using mappel::PoissonNoise2DObjective::ModelDataT = ImageT` `[inherited]`

Objective function data type: 2D double precision image, gain-corrected to approximate photons counts

Definition at line 24 of file PoissonNoise2DObjective.h.

9.12.2.14 using mappel::PointEmitterModel::ParamT = arma::vec [inherited]

Parameter vector

Definition at line 47 of file PointEmitterModel.h.

9.12.2.15 using mappel::PointEmitterModel::ParamVecT = arma::mat [inherited]

Vector of parameter vectors

Definition at line 48 of file PointEmitterModel.h.

9.12.2.16 using mappel::Gauss2DModel::StencilVecT = std::vector<Stencil> [inherited]

Definition at line 47 of file Gauss2DModel.h.

9.12.3 Constructor & Destructor Documentation

9.12.3.1 mappel::Gauss2DMap::Gauss2DMap (ImageCoordT *size*, double *psf_sigma*, const std::string & *prior_type* = DefaultPriorType)

Definition at line 11 of file Gauss2DMap.cpp.

9.12.3.2 mappel::Gauss2DMap::Gauss2DMap (const ImageSizeT & *size*, double *psf_sigma*, const std::string & *prior_type* = DefaultPriorType)

Definition at line 15 of file Gauss2DMap.cpp.

9.12.3.3 template<class IntType, class FloatType> mappel::Gauss2DMap::Gauss2DMap (const arma::Col< IntType > & *size*, const arma::Col< FloatType > & *psf_sigma*, const std::string & *prior_type* = DefaultPriorType)

Definition at line 41 of file Gauss2DMap.h.

9.12.3.4 mappel::Gauss2DMap::Gauss2DMap (const ImageSizeT & *size*, const VecT & *psf_sigma*, CompositeDist && *prior*)

Definition at line 27 of file Gauss2DMap.cpp.

9.12.3.5 mappel::Gauss2DMap::Gauss2DMap (ImageSizeT && *size*, VecT && *psf_sigma*, CompositeDist && *prior*)

Definition at line 19 of file Gauss2DMap.cpp.

9.12.3.6 mappel::Gauss2DMap::Gauss2DMap (const ImageSizeT & *size*, const VecT & *psf_sigma*, const CompositeDist & *prior*)

Definition at line 35 of file Gauss2DMap.cpp.

9.12.3.7 mappel::Gauss2DMap::Gauss2DMap (const Gauss2DMap & o)

Definition at line 43 of file Gauss2DMap.cpp.

9.12.3.8 mappel::Gauss2DMap::Gauss2DMap (Gauss2DMap && o)

Definition at line 51 of file Gauss2DMap.cpp.

9.12.4 Member Function Documentation

9.12.4.1 void mappel::PointEmitterModel::bound_theta (ParamT & theta, double epsilon = bounds_epsilon) const [inherited]

Definition at line 248 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::check_param_shape(), mappel::PointEmitterModel::lbound, mappel::PointEmitterModel::num_params, and mappel::PointEmitterModel::ubound.

9.12.4.2 PointEmitterModel::ParamT mappel::PointEmitterModel::bounded_theta (const ParamT & theta, double epsilon = bounds_epsilon) const [inherited]

Definition at line 265 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::check_param_shape(), mappel::PointEmitterModel::lbound, mappel::PointEmitterModel::num_params, and mappel::PointEmitterModel::ubound.

Referenced by mappel::PointEmitterModel::bounded_theta_stack().

9.12.4.3 PointEmitterModel::ParamVecT mappel::PointEmitterModel::bounded_theta_stack (const ParamVecT & theta, double epsilon = bounds_epsilon) const [inherited]

Definition at line 306 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::bounded_theta(), mappel::PointEmitterModel::check_param_shape(), and mappel::PointEmitterModel::make_param_stack().

9.12.4.4 void mappel::ImageFormat2DBase::check_image_shape (const ImageT & im) const [inherited]

Check the shape of a single images is correct for model size.

Definition at line 80 of file ImageFormat2DBase.cpp.

References mappel::ImageFormat2DBase::size.

9.12.4.5 void mappel::ImageFormat2DBase::check_image_shape (const ImageStackT & ims) const [inherited]

Check the shape of a stack of images is correct for model size.

Definition at line 93 of file ImageFormat2DBase.cpp.

References mappel::ImageFormat2DBase::size.

9.12.4.6 `void mappel::PointEmitterModel::check_param_shape (const ParamT & theta) const` [inherited]

Definition at line 167 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::num_params.

Referenced by mappel::PointEmitterModel::bound_theta(), mappel::PointEmitterModel::bounded_theta(), mappel::PointEmitterModel::bounded_theta_stack(), mappel::PointEmitterModel::reflected_theta(), mappel::PointEmitterModel::reflected_theta_stack(), mappel::PointEmitterModel::theta_in_bounds(), and mappel::PointEmitterModel::theta_stack_in_bounds().

9.12.4.7 `void mappel::PointEmitterModel::check_param_shape (const ParamVecT & theta) const` [inherited]

Definition at line 176 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::num_params.

9.12.4.8 `void mappel::PointEmitterModel::check_psf_sigma (double psf_sigma) const` [inherited]

Definition at line 185 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::global_max_psf_sigma, and mappel::PointEmitterModel::global_min_psf_sigma.

Referenced by mappel::Gauss1DModel::Gauss1DModel(), mappel::Gauss2DModel::Gauss2DModel(), mappel::Gauss2DsModel::Gauss2DsModel(), mappel::Gauss1DsModel::set_max_sigma(), mappel::Gauss2DsModel::set_max_sigma(), mappel::Gauss1DsModel::set_min_sigma(), mappel::Gauss2DsModel::set_min_sigma(), mappel::Gauss1DModel::set_psf_sigma(), and mappel::Gauss2DModel::set_psf_sigma().

9.12.4.9 `void mappel::PointEmitterModel::check_psf_sigma (const VecT & psf_sigma) const` [inherited]

Definition at line 197 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::global_max_psf_sigma, and mappel::PointEmitterModel::global_min_psf_sigma.

9.12.4.10 `void mappel::ImageFormat2DBase::check_size (const ImageSizeT & size)` [static],[inherited]

Check the size argument for the model.

Definition at line 60 of file ImageFormat2DBase.cpp.

References mappel::ImageFormat2DBase::global_max_size, and mappel::ImageFormat2DBase::global_min_size.

Referenced by mappel::ImageFormat2DBase::ImageFormat2DBase(), and mappel::ImageFormat2DBase::set_size().

9.12.4.11 `Gauss1DSumModelT mappel::Gauss2DModel::debug_internal_sum_model_x () const` [inline], [inherited]

Definition at line 89 of file Gauss2DModel.h.

References mappel::Gauss2DModel::x_model.

9.12.4.12 `Gauss1DSumModelT mappel::Gauss2DModel::debug_internal_sum_model_y () const` `[inline]`,
`[inherited]`

Definition at line 90 of file Gauss2DModel.h.

References `mappel::Gauss2DModel::Gauss2DModel()`, `mappel::Gauss2DModel::make_internal_1Dsum_estimator()`, `mappel::Gauss2DModel::operator=()`, `mappel::PointEmitterModel::prior`, `mappel::Gauss2DModel::psf_sigma`, `mappel::ImageFormat2DBase::size`, `mappel::Gauss2DModel::update_internal_1Dsum_estimators()`, and `mappel::Gauss2DModel::y_model`.

9.12.4.13 `int mappel::PointEmitterModel::get_hyperparam_index (const std::string & name) const` `[inline]`,
`[inherited]`

Definition at line 236 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.12.4.14 `StringVecT mappel::PointEmitterModel::get_hyperparam_names () const` `[inline]`, `[inherited]`

Definition at line 256 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.12.4.15 `double mappel::PointEmitterModel::get_hyperparam_value (const std::string & name) const` `[inline]`,
`[inherited]`

Definition at line 232 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

Referenced by `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`, and `mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling()`.

9.12.4.16 `PointEmitterModel::ParamT mappel::PointEmitterModel::get_hyperparams () const` `[inline]`,
`[inherited]`

Definition at line 224 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.12.4.17 `ImageFormat2DBase::ImageT mappel::ImageFormat2DBase::get_image_from_stack (const ImageStackT & stack, ImageCoordT n) const` `[inline]`, `[inherited]`

Definition at line 106 of file ImageFormat2DBase.h.

9.12.4.18 `const PointEmitterModel::ParamT & mappel::PointEmitterModel::get_lbound () const` `[inline]`,
`[inherited]`

Definition at line 212 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::lbound`.

Referenced by `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor2D::MCMCAdaptor2D()`, and `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`.

9.12.4.19 `IdxT mappel::MCMCAdaptorBase::get_mcmc_num_phases () const` `[inherited]`

Definition at line 56 of file MCMCAdaptorBase.cpp.

References `mappel::MCMCAdaptorBase::num_phases`.

9.12.4.20 `double mappel::MCMCAdaptorBase::get_mcmc_sigma_scale () const` `[inherited]`

Definition at line 53 of file MCMCAdaptorBase.cpp.

References `mappel::MCMCAdaptorBase::sigma_scale`.

9.12.4.21 `IdxT mappel::PointEmitterModel::get_num_hyperparams () const` `[inline],[inherited]`

Definition at line 208 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::num_hyperparams`.

9.12.4.22 `IdxT mappel::PointEmitterModel::get_num_params () const` `[inline],[inherited]`

Definition at line 160 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::num_params`.

9.12.4.23 `ImageFormat2DBase::ImageCoordT mappel::ImageFormat2DBase::get_num_pixels () const` `[inline],[inherited]`

Definition at line 79 of file ImageFormat2DBase.h.

References `mappel::ImageFormat2DBase::size`.

Referenced by `mappel::ImageFormat2DBase::get_stats()`.

9.12.4.24 `StringVecT mappel::PointEmitterModel::get_param_names () const` `[inline],[inherited]`

Definition at line 248 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.12.4.25 `CompositeDist & mappel::PointEmitterModel::get_prior ()` `[inline],[inherited]`

Definition at line 200 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

Referenced by `mappel::Gauss2DModel::update_internal_1Dsum_estimators()`, and `mappel::Gauss2DsModel::update_internal_1Dsum_estimators()`.

9.12.4.26 `const CompositeDist & mappel::PointEmitterModel::get_prior () const` `[inline],[inherited]`

Definition at line 204 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.12.4.27 `const VecT & mappel::Gauss2DModel::get_psf_sigma () const` `[inline],[inherited]`

Definition at line 142 of file Gauss2DModel.h.

References mappel::Gauss2DModel::psf_sigma.

Referenced by mappel::Gauss2DModel::get_stats().

9.12.4.28 `double mappel::Gauss2DModel::get_psf_sigma (IdxT idx) const` `[inherited]`

Definition at line 132 of file Gauss2DModel.cpp.

References mappel::Gauss2DModel::DefaultPriorType, mappel::Gauss2DModel::prior_types, and mappel::Gauss2DModel::psf_sigma.

9.12.4.29 `ParallelRngGeneratorT & mappel::PointEmitterModel::get_rng_generator ()` `[static],[inherited]`

Definition at line 120 of file PointEmitterModel.cpp.

References mappel::rng_manager.

9.12.4.30 `ParallelRngManagerT & mappel::PointEmitterModel::get_rng_manager ()` `[static],[inherited]`

Definition at line 115 of file PointEmitterModel.cpp.

References mappel::rng_manager.

9.12.4.31 `const ImageFormat2DBase::ImageSizeT & mappel::ImageFormat2DBase::get_size () const` `[inline],[inherited]`

Definition at line 74 of file ImageFormat2DBase.h.

References mappel::ImageFormat2DBase::size.

9.12.4.32 `ImageFormat2DBase::ImageCoordT mappel::ImageFormat2DBase::get_size (IdxT idx) const` `[inherited]`

Definition at line 41 of file ImageFormat2DBase.cpp.

References mappel::ImageFormat2DBase::size.

9.12.4.33 ImageFormat2DBase::ImageCoordT mappel::ImageFormat2DBase::get_size_image_stack (const ImageStackT & stack) const [inline],[inherited]

Definition at line 99 of file ImageFormat2DBase.h.

9.12.4.34 StatsT mappel::Gauss2DModel::get_stats () const [inherited]

Definition at line 268 of file Gauss2DModel.cpp.

References mappel::Gauss2DModel::get_psf_sigma(), mappel::MCMCAdaptor2D::get_stats(), mappel::ImageFormat2DBase::get_stats(), and mappel::PointEmitterModel::get_stats().

9.12.4.35 const PointEmitterModel::ParamT & mappel::PointEmitterModel::get_ubound () const [inline],[inherited]

Definition at line 216 of file PointEmitterModel.h.

References mappel::PointEmitterModel::ubound.

Referenced by mappel::Gauss2DsxyModel::get_max_sigma_ratio(), mappel::Gauss2DsModel::get_max_sigma_ratio(), mappel::MCMCAdaptor1D::MCMCAdaptor1D(), mappel::MCMCAdaptor2D::MCMCAdaptor2D(), mappel::MCMCAdaptor1D::set_background_mcmc_sampling(), and mappel::Gauss2DsModel::set_max_sigma_ratio().

9.12.4.36 bool mappel::PointEmitterModel::has_hyperparam (const std::string & name) const [inline],[inherited]

Definition at line 228 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.12.4.37 Gauss2DModel::Stencil mappel::Gauss2DModel::initial_theta_estimate (const ImageT & im) const [inline],[inherited]

Fast, heuristic estimate of initial theta.

Definition at line 194 of file Gauss2DModel.h.

References mappel::PointEmitterModel::DefaultSeperableInitEstimator, and mappel::PointEmitterModel::make_param().

Referenced by mappel::Gauss2DModel::initial_theta_estimate().

9.12.4.38 Gauss2DModel::Stencil mappel::Gauss2DModel::initial_theta_estimate (const ImageT & im, const ParamT & theta_init) const [inline],[inherited]

Definition at line 201 of file Gauss2DModel.h.

References mappel::PointEmitterModel::DefaultSeperableInitEstimator, and mappel::Gauss2DModel::initial_theta_estimate().

9.12.4.39 `Gauss2DModel::Stencil mappel::Gauss2DModel::initial_theta_estimate (const ImageT & im, const ParamT & theta_init, const std::string & estimator) const` `[inherited]`

Definition at line 303 of file Gauss2DModel.cpp.

References `mappel::Gauss2DModel::Stencil::bg()`, `mappel::methods::estimate_max()`, `mappel::Gauss2DModel::Stencil::l()`, `mappel::PointEmitterModel::lbound`, `mappel::Gauss2DModel::make_stencil()`, `mappel::PointEmitterModel::num_params`, `mappel::ImageFormat2DBase::size`, `mappel::estimator::MLEData::theta`, `mappel::PointEmitterModel::theta_in_bounds()`, `mappel::PointEmitterModel::ubound`, `mappel::Gauss2DModel::x_model`, and `mappel::Gauss2DModel::y_model`.

9.12.4.40 `CompositeDist mappel::Gauss2DModel::make_default_prior (const ImageSizeT & size, const std::string & prior_type)` `[static]`, `[inherited]`

Definition at line 150 of file Gauss2DModel.cpp.

References `mappel::istarts_with()`, `mappel::Gauss2DModel::make_default_prior_beta_position()`, and `mappel::Gauss2DModel::make_default_prior_normal_position()`.

9.12.4.41 `CompositeDist mappel::Gauss2DModel::make_default_prior_beta_position (const ImageSizeT & size)` `[static]`, `[inherited]`

Definition at line 171 of file Gauss2DModel.cpp.

References `mappel::PointEmitterModel::default_pixel_mean_bg`, `mappel::PointEmitterModel::make_prior_component_intensity()`, `mappel::PointEmitterModel::make_prior_component_position_beta()`, and `mappel::ImageFormat2DBase::size`.

Referenced by `mappel::Gauss2DModel::make_default_prior()`.

9.12.4.42 `CompositeDist mappel::Gauss2DModel::make_default_prior_normal_position (const ImageSizeT & size)` `[static]`, `[inherited]`

Definition at line 182 of file Gauss2DModel.cpp.

References `mappel::PointEmitterModel::default_pixel_mean_bg`, `mappel::PointEmitterModel::make_prior_component_intensity()`, `mappel::PointEmitterModel::make_prior_component_position_normal()`, and `mappel::ImageFormat2DBase::size`.

Referenced by `mappel::Gauss2DModel::make_default_prior()`.

9.12.4.43 `ImageFormat2DBase::ImageT mappel::ImageFormat2DBase::make_image () const` `[inline]`, `[inherited]`

Definition at line 85 of file ImageFormat2DBase.h.

References `mappel::ImageFormat2DBase::size`.

9.12.4.44 ImageFormat2DBase::ImageStackT mappel::ImageFormat2DBase::make_image_stack (ImageCoordT *n*) const
[inline],[inherited]

Definition at line 92 of file ImageFormat2DBase.h.

References mappel::ImageFormat2DBase::size.

9.12.4.45 Gauss2DModel::Gauss1DSumModelT mappel::Gauss2DModel::make_internal_1Dsum_estimator (IdxT *dim*,
const ImageSizeT & *size*, const VecT & *psf_sigma*, const CompositeDist & *prior*) [static],[protected],
[inherited]

Definition at line 62 of file Gauss2DModel.cpp.

References mappel::Gauss1DModel::make_prior_beta_position(), mappel::Gauss1DModel::make_prior_normal_↵
position(), mappel::Gauss2DModel::psf_sigma, and mappel::ImageFormat2DBase::size.

Referenced by mappel::Gauss2DModel::debug_internal_sum_model_y(), mappel::Gauss2DModel::Gauss2DModel(),
and mappel::Gauss2DModel::update_internal_1Dsum_estimators().

9.12.4.46 PointEmitterModel::ParamT mappel::PointEmitterModel::make_param () const [inline],[inherited]

Definition at line 164 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

Referenced by mappel::Gauss1DModel::initial_theta_estimate(), mappel::Gauss1DsModel::initial_theta_estimate(),
mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsxyModel::initial_theta_estimate(), mappel::↵
Gauss2DsModel::initial_theta_estimate(), mappel::Gauss1DModel::pixel_hess_update(), mappel::Gauss1DsModel↵
::pixel_hess_update(), mappel::Gauss2DModel::pixel_hess_update(), and mappel::Gauss2DsModel::pixel_hess_↵
update().

9.12.4.47 template<class FillT > PointEmitterModel::ParamT mappel::PointEmitterModel::make_param (FillT *fill*) const
[inherited]

Definition at line 181 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.12.4.48 MatT mappel::PointEmitterModel::make_param_mat () const [inline],[inherited]

Definition at line 172 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.12.4.49 template<class FillT > MatT mappel::PointEmitterModel::make_param_mat (FillT *fill*) const [inherited]

Definition at line 191 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.12.4.50 **CubeT** mappel::PointEmitterModel::make_param_mat_stack (IdxT *n*) const [inline], [inherited]

Definition at line 176 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.12.4.51 **template<class FillT > CubeT** mappel::PointEmitterModel::make_param_mat_stack (IdxT *n*, FillT *fill*) const [inherited]

Definition at line 196 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.12.4.52 **PointEmitterModel::ParamVecT** mappel::PointEmitterModel::make_param_stack (IdxT *n*) const [inline], [inherited]

Definition at line 168 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

Referenced by mappel::PointEmitterModel::bounded_theta_stack(), and mappel::PointEmitterModel::reflected_theta_stack().

9.12.4.53 **template<class FillT > PointEmitterModel::ParamVecT** mappel::PointEmitterModel::make_param_stack (IdxT *n*, FillT *fill*) const [inherited]

Definition at line 186 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.12.4.54 **CompositeDist** mappel::Gauss2DModel::make_prior_beta_position (const ImageSizeT & *size*, double *beta_xpos*, double *beta_ypos*, double *mean_l*, double *kappa_l*, double *mean_bg*, double *kappa_bg*) [static], [inherited]

Definition at line 193 of file Gauss2DModel.cpp.

References mappel::PointEmitterModel::make_prior_component_intensity(), mappel::PointEmitterModel::make_prior_component_position_beta(), and mappel::ImageFormat2DBase::size.

9.12.4.55 **prior_hessian::TruncatedGammaDist** mappel::PointEmitterModel::make_prior_component_intensity (double *mean* = default_mean_l, double *kappa* = default_intensity_kappa) [static], [inherited]

Definition at line 98 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::default_max_l.

Referenced by mappel::Gauss1DsModel::make_default_prior_beta_position(), mappel::Gauss2DModel::make_default_prior_beta_position(), mappel::Gauss1DModel::make_default_prior_beta_position(), mappel::Gauss2DsModel::make_default_prior_beta_position(), mappel::Gauss2DModel::make_default_prior_normal_position(), mappel::Gauss1DsModel::make_default_prior_normal_position(), mappel::Gauss1DModel::make_default_prior_normal_position(), mappel::Gauss2DsModel::make_default_prior_normal_position(), mappel::Gauss2DModel::make_prior_beta_position(), mappel::Gauss1DsModel::make_prior_beta_position(), mappel::Gauss1DModel::make_prior_beta_position(), mappel::Gauss2DsModel::make_prior_beta_position(), mappel::Gauss2DModel::make_prior_normal_position(), mappel::Gauss1DsModel::make_prior_normal_position(), mappel::Gauss1DModel::make_prior_normal_position(), and mappel::Gauss2DsModel::make_prior_normal_position().

9.12.4.56 **prior_hessian::ScaledSymmetricBetaDist** **mappel::PointEmitterModel::make_prior_component_position_beta** (*IdxT size*, *double pos_beta = default_beta_pos*) [static],[inherited]

Definition at line 92 of file PointEmitterModel.cpp.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_beta_position()`, `mappel::Gauss1DModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss1DsModel::make_prior_beta_position()`, `mappel::Gauss2DModel::make_prior_beta_position()`, `mappel::Gauss1DModel::make_prior_beta_position()`, and `mappel::Gauss2DsModel::make_prior_beta_position()`.

9.12.4.57 **prior_hessian::TruncatedNormalDist** **mappel::PointEmitterModel::make_prior_component_position_normal** (*IdxT size*, *double pos_sigma = default_sigma_pos*) [static],[inherited]

Definition at line 85 of file PointEmitterModel.cpp.

Referenced by `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_default_prior_normal_position()`, `mappel::Gauss1DModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, `mappel::Gauss1DsModel::make_prior_normal_position()`, `mappel::Gauss2DModel::make_prior_normal_position()`, and `mappel::Gauss2DsModel::make_prior_normal_position()`.

9.12.4.58 **prior_hessian::TruncatedParetoDist** **mappel::PointEmitterModel::make_prior_component_sigma** (*double min_sigma*, *double max_sigma*, *double alpha = default_alpha_sigma*) [static],[inherited]

Definition at line 104 of file PointEmitterModel.cpp.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, `mappel::Gauss1DsModel::make_prior_beta_position()`, `mappel::Gauss2DsModel::make_prior_beta_position()`, `mappel::Gauss1DsModel::make_prior_normal_position()`, and `mappel::Gauss2DsModel::make_prior_normal_position()`.

9.12.4.59 **CompositeDist** **mappel::Gauss2DModel::make_prior_normal_position** (*const ImageSizeT & size*, *double sigma_xpos*, *double beta_ypos*, *double mean_l*, *double kappa_l*, *double mean_bg*, *double kappa_bg*) [static],[inherited]

Definition at line 206 of file Gauss2DModel.cpp.

References `mappel::PointEmitterModel::make_prior_component_intensity()`, `mappel::PointEmitterModel::make_prior_component_position_normal()`, and `mappel::ImageFormat2DBase::size`.

9.12.4.60 **Gauss2DModel::Stencil** **mappel::Gauss2DModel::make_stencil** (*const ParamT & theta*, *bool compute_derivatives = true*) **const** [inline],[inherited]

Make a new `Model::Stencil` object at `theta`.

Stencils store all of the important calculations necessary for evaluating the log-likelihood and its derivatives at a particular `theta` (parameter) value.

This allows re-use of the most expensive computations. Stencils can be easily passed around by reference, and most functions in the `mappel::methods` namespace accept a `const Stencil` reference in place of the model parameter.

Throws `mappel::ModelBoundsError` if not `model.theta_in_bounds(theta)`.

If derivatives will not be computed with this stencil set `compute_derivatives=false`

Parameters

<i>theta</i>	Parameter to evaluate at
<i>compute_derivatives</i>	True to also prepare for derivative computations

Returns

A new [Stencil](#) object ready to compute with

Definition at line 131 of file Gauss2DModel.h.

References `mappel::Gauss2DModel::Stencil::Stencil()`, and `mappel::PointEmitterModel::theta_in_bounds()`.

Referenced by `mappel::Gauss2DModel::initial_theta_estimate()`.

9.12.4.61 Gauss2DModel & mappel::Gauss2DModel::operator= (const Gauss2DModel & o)

Definition at line 59 of file Gauss2DModel.cpp.

References `mappel::MAPEstimator::operator=()`, `mappel::PoissonNoise2DObjective::operator=()`, `mappel::ImageFormat2DBase::operator=()`, `mappel::Gauss2DModel::operator=()`, and `mappel::PointEmitterModel::operator=()`.

9.12.4.62 Gauss2DModel & mappel::Gauss2DModel::operator= (Gauss2DModel && o)

Definition at line 70 of file Gauss2DModel.cpp.

References `mappel::MAPEstimator::operator=()`, `mappel::PoissonNoise2DObjective::operator=()`, `mappel::ImageFormat2DBase::operator=()`, `mappel::Gauss2DModel::operator=()`, and `mappel::PointEmitterModel::operator=()`.

9.12.4.63 void mappel::Gauss2DModel::pixel_grad (int i, int j, const Stencil & s, ParamT & pgrad) const [inline], [inherited]

Definition at line 159 of file Gauss2DModel.h.

References `mappel::Gauss2DModel::Stencil::DX`, `mappel::Gauss2DModel::Stencil::DY`, `mappel::Gauss2DModel::Stencil::I()`, `mappel::Gauss2DModel::Stencil::X`, and `mappel::Gauss2DModel::Stencil::Y`.

Referenced by `mappel::Gauss2DModel::pixel_hess_update()`.

9.12.4.64 void mappel::Gauss2DModel::pixel_grad2 (int i, int j, const Stencil & s, ParamT & pgrad2) const [inline], [inherited]

Definition at line 170 of file Gauss2DModel.h.

References `mappel::Gauss2DModel::Stencil::DXS`, `mappel::Gauss2DModel::Stencil::DYS`, `mappel::Gauss2DModel::Stencil::I()`, `mappel::Gauss2DModel::psf_sigma`, `mappel::Gauss2DModel::Stencil::X`, and `mappel::Gauss2DModel::Stencil::Y`.

9.12.4.65 `void mappel::Gauss2DModel::pixel_hess (int i, int j, const Stencil & s, MatT & hess) const` `[inline]`,
`[inherited]`

Definition at line 181 of file Gauss2DModel.h.

References `mappel::Gauss2DModel::Stencil::DX`, `mappel::Gauss2DModel::Stencil::DXS`, `mappel::Gauss2DModel::Stencil::DY`, `mappel::Gauss2DModel::Stencil::DYS`, `mappel::Gauss2DModel::Stencil::l()`, `mappel::Gauss2DModel::psf_sigma`, `mappel::Gauss2DModel::Stencil::X`, and `mappel::Gauss2DModel::Stencil::Y`.

9.12.4.66 `void mappel::Gauss2DModel::pixel_hess_update (int i, int j, const Stencil & s, double dm_ratio_m1, double dmm_ratio, ParamT & grad, MatT & hess) const` `[inherited]`

pixel derivative inner loop calculations.

Definition at line 282 of file Gauss2DModel.cpp.

References `mappel::Gauss2DModel::Stencil::DX`, `mappel::Gauss2DModel::Stencil::DXS`, `mappel::Gauss2DModel::Stencil::DY`, `mappel::Gauss2DModel::Stencil::DYS`, `mappel::Gauss2DModel::Stencil::l()`, `mappel::PointEmitterModel::make_param()`, `mappel::Gauss2DModel::pixel_grad()`, `mappel::Gauss2DModel::psf_sigma`, `mappel::Gauss2DModel::Stencil::X`, and `mappel::Gauss2DModel::Stencil::Y`.

9.12.4.67 `double mappel::Gauss2DModel::pixel_model_value (int i, int j, const Stencil & s) const` `[inline]`,
`[inherited]`

Definition at line 152 of file Gauss2DModel.h.

References `mappel::Gauss2DModel::Stencil::bg()`, `mappel::Gauss2DModel::Stencil::l()`, `mappel::Gauss2DModel::Stencil::X`, and `mappel::Gauss2DModel::Stencil::Y`.

9.12.4.68 `PointEmitterModel::ParamT mappel::PointEmitterModel::reflected_theta (const ParamT & theta) const` `[inherited]`

Definition at line 276 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::PointEmitterModel::reflected_theta_stack()`.

9.12.4.69 `PointEmitterModel::ParamVecT mappel::PointEmitterModel::reflected_theta_stack (const ParamVecT & theta) const` `[inherited]`

Definition at line 316 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::make_param_stack()`, and `mappel::PointEmitterModel::reflected_theta()`.

9.12.4.70 `void mappel::PointEmitterModel::rename_hyperparam (const std::string & old_name, const std::string & new_name)` `[inline]`, `[inherited]`

Definition at line 244 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.12.4.71 `void mappel::MCMCAdaptor2D::sample_mcmc_candidate (IdxT sample_index, ParamT & candidate, double step_scale = 1.0) const` [inherited]

Definition at line 59 of file MCMCAdaptor2D.cpp.

References `mappel::MCMCAdaptor1D::eta_bg`, `mappel::MCMCAdaptor1D::eta_l`, `mappel::MCMCAdaptor1D::eta_`
`x`, `mappel::MCMCAdaptor2D::eta_y`, `mappel::MCMCAdaptorBase::num_phases`, and `mappel::rng_manager`.

9.12.4.72 `void mappel::MCMCAdaptor2D::sample_mcmc_candidate (IdxT sample_index, ParamT & candidate, const IdxVecT & fixed_parameters_mask, double step_scale = 1.0) const` [inherited]

Definition at line 74 of file MCMCAdaptor2D.cpp.

References `mappel::MCMCAdaptor1D::eta_bg`, `mappel::MCMCAdaptor1D::eta_l`, `mappel::MCMCAdaptor1D::eta_`
`x`, `mappel::MCMCAdaptor2D::eta_y`, `mappel::MCMCAdaptorBase::num_phases`, and `mappel::rng_manager`.

9.12.4.73 `template<class RngT > PointEmitterModel::ParamT mappel::PointEmitterModel::sample_prior (RngT & rng) const` [inherited]

Definition at line 264 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.12.4.74 `PointEmitterModel::ParamT mappel::PointEmitterModel::sample_prior () const` [inline],[inherited]

Definition at line 268 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`, and `mappel::rng_manager`.

9.12.4.75 `void mappel::MCMCAdaptor1D::set_background_mcmc_sampling (double eta_bg = -1)` [inherited]

Definition at line 81 of file MCMCAdaptor1D.cpp.

References `mappel::PointEmitterModel::default_pixel_mean_bg`, `mappel::MCMCAdaptor1D::eta_bg`, `mappel::Point`
`EmitterModel::get_hyperparam_value()`, `mappel::PointEmitterModel::get_lbound()`, `mappel::PointEmitterModel::get_`
`ubound()`, and `mappel::MCMCAdaptorBase::sigma_scale`.

Referenced by `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`.

9.12.4.76 `void mappel::PointEmitterModel::set_bounds (const ParamT & lbound_, const ParamT & ubound_)` [inherited]

Box-type parameter bounds

Modifies the prior bounds to prevent sampling outside the valid box-constraints.

Definition at line 213 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::bounds_epsilon`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitter`
`Model::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

9.12.4.77 `void mappel::PointEmitterModel::set_hyperparam_names (const StringVecT & desc) [inline], [inherited]`

Definition at line 260 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.12.4.78 `void mappel::PointEmitterModel::set_hyperparam_value (const std::string & name, double value) [inline], [inherited]`

Definition at line 240 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.12.4.79 `void mappel::Gauss2DModel::set_hyperparams (const VecT & hyperparams) [inherited]`

Definition at line 109 of file Gauss2DModel.cpp.

References mappel::PointEmitterModel::set_hyperparams(), and mappel::Gauss2DModel::update_internal_1Dsum_↵ estimators().

9.12.4.80 `template<class ImT > void mappel::ImageFormat2DBase::set_image_in_stack (ImageStackT & stack, ImageCoordT n, const ImT & im) const [inherited]`

Definition at line 113 of file ImageFormat2DBase.h.

9.12.4.81 `void mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling (double eta_I = -1) [inherited]`

Definition at line 65 of file MCMCAdaptor1D.cpp.

References mappel::PointEmitterModel::default_mean_I, mappel::MCMCAdaptor1D::eta_I, mappel::PointEmitter↵ Model::get_hyperparam_value(), and mappel::MCMCAdaptorBase::sigma_scale.

Referenced by mappel::MCMCAdaptor1D::MCMCAdaptor1D().

9.12.4.82 `void mappel::PointEmitterModel::set_lbound (const ParamT & lbound) [inherited]`

Definition at line 226 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::bounds_epsilon, mappel::PointEmitterModel::lbound, mappel::PointEmitter↵ Model::num_params, mappel::PointEmitterModel::prior, and mappel::PointEmitterModel::ubound.

Referenced by mappel::Gauss1DsModel::set_min_sigma().

9.12.4.83 `void mappel::MCMCAdaptorBase::set_mcmc_num_phases (IdxT num_phases) [protected], [inherited]`

Definition at line 59 of file MCMCAdaptorBase.cpp.

References mappel::MCMCAdaptorBase::num_phases.

Referenced by mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds(), and mappel::MCMCAdaptor2Ds::MCMCAdaptor2↵ Ds().

9.12.4.84 `void mappel::MCMCAdaptorBase::set_mcmc_sigma_scale (double scale)` `[inherited]`

Definition at line 39 of file MCMCAdaptorBase.cpp.

References `mappel::MCMCAdaptorBase::global_max_mcmc_sigma_scale`, and `mappel::MCMCAdaptorBase::sigma_↵_scale`.

9.12.4.85 `void mappel::PointEmitterModel::set_param_names (const StringVecT & desc)` `[inline], [inherited]`

Definition at line 252 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.12.4.86 `void mappel::Gauss2DModel::set_prior (CompositeDist && prior_)` `[inherited]`

Definition at line 97 of file Gauss2DModel.cpp.

References `mappel::PointEmitterModel::set_prior()`, and `mappel::Gauss2DModel::update_internal_1Dsum_↵estimators()`.

9.12.4.87 `void mappel::Gauss2DModel::set_prior (const CompositeDist & prior_)` `[inherited]`

Definition at line 103 of file Gauss2DModel.cpp.

References `mappel::PointEmitterModel::set_prior()`, and `mappel::Gauss2DModel::update_internal_1Dsum_↵estimators()`.

9.12.4.88 `void mappel::Gauss2DModel::set_psf_sigma (double new_psf_sigma)` `[inline], [inherited]`

Definition at line 146 of file Gauss2DModel.h.

9.12.4.89 `void mappel::Gauss2DModel::set_psf_sigma (const VecT & new_psf_sigma)` `[inherited]`

Definition at line 123 of file Gauss2DModel.cpp.

References `mappel::PointEmitterModel::check_psf_sigma()`, `mappel::Gauss2DModel::psf_sigma`, `mappel::Gauss1D↵Model::set_psf_sigma()`, `mappel::Gauss2DModel::x_model`, and `mappel::Gauss2DModel::y_model`.

9.12.4.90 `void mappel::PointEmitterModel::set_rng_seed (RngSeedT seed)` `[static], [inherited]`

Definition at line 110 of file PointEmitterModel.cpp.

References `mappel::rng_manager`.

9.12.4.91 `void mappel::Gauss2DModel::set_size (const ImageSizeT & size_)` `[inherited]`

Definition at line 115 of file Gauss2DModel.cpp.

References `mappel::ImageFormat2DBase::set_size()`, `mappel::ImageFormat1DBase::set_size()`, `mappel::Image↵Format2DBase::size`, `mappel::Gauss2DModel::x_model`, and `mappel::Gauss2DModel::y_model`.

9.12.4.92 `void mappel::PointEmitterModel::set_ubound (const ParamT & ubound)` [inherited]

Definition at line 237 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::bounds_epsilon`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::Gauss1DsModel::set_max_sigma()`, and `mappel::Gauss2DsModel::set_max_sigma_ratio()`.

9.12.4.93 `bool mappel::PointEmitterModel::theta_in_bounds (const ParamT & theta) const` [inherited]

Definition at line 257 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsModel::initial_theta_estimate()`, `mappel::Gauss1DModel::make_stencil()`, `mappel::Gauss1DsModel::make_stencil()`, `mappel::Gauss2DModel::make_stencil()`, `mappel::Gauss2DsxModel::make_stencil()`, `mappel::Gauss2DsModel::make_stencil()`, and `mappel::PointEmitterModel::theta_stack_in_bounds()`.

9.12.4.94 `BoolVecT mappel::PointEmitterModel::theta_stack_in_bounds (const ParamVecT & theta) const` [inherited]

Definition at line 296 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, and `mappel::PointEmitterModel::theta_in_bounds()`.

9.12.4.95 `void mappel::Gauss2DModel::update_internal_1Dsum_estimators ()` [protected], [inherited]

Definition at line 91 of file Gauss2DModel.cpp.

References `mappel::PointEmitterModel::get_prior()`, `mappel::Gauss2DModel::make_internal_1Dsum_estimator()`, `mappel::Gauss2DModel::psf_sigma`, `mappel::ImageFormat2DBase::size`, `mappel::Gauss2DModel::x_model`, and `mappel::Gauss2DModel::y_model`.

Referenced by `mappel::Gauss2DModel::debug_internal_sum_model_y()`, `mappel::Gauss2DModel::set_hyperparams()`, and `mappel::Gauss2DModel::set_prior()`.

9.12.5 Member Data Documentation

9.12.5.1 `const double mappel::PointEmitterModel::bounds_epsilon = 1.0E-6` [static], [inherited]

Distance from the boundary to constrain in `bound_theta` and `bounded_theta` methods

Definition at line 52 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::Gauss2DsModel::set_max_sigma_ratio()`, and `mappel::PointEmitterModel::set_ubound()`.

9.12.5.2 `const double mappel::PointEmitterModel::default_alpha_sigma = 2` [static], [inherited]

Default per-pixel background gamma distribution shape

Definition at line 62 of file PointEmitterModel.h.

9.12.5.3 `const double mappel::PointEmitterModel::default_beta_pos = 3` [static], [inherited]

Default position parameter in symmetric beta-distributions

Definition at line 56 of file PointEmitterModel.h.

9.12.5.4 `const double mappel::PointEmitterModel::default_intensity_kappa = 2` [static], [inherited]

Default shape for intensity gamma distributions

Definition at line 60 of file PointEmitterModel.h.

9.12.5.5 `const double mappel::PointEmitterModel::default_max_I = INFINITY` [static], [inherited]

Default maximum emitter intensity

Definition at line 59 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::make_prior_component_intensity()`.

9.12.5.6 `const double mappel::PointEmitterModel::default_mean_I = 300` [static], [inherited]

Default emitter intensity mean

Definition at line 58 of file PointEmitterModel.h.

Referenced by `mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling()`.

9.12.5.7 `const double mappel::PointEmitterModel::default_pixel_mean_bg = 4` [static], [inherited]

Default per-pixel mean background counts

Definition at line 61 of file PointEmitterModel.h.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_beta_position()`, `mappel::Gauss1DModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_default_prior_normal_position()`, `mappel::Gauss1DModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, and `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`.

9.12.5.8 `const double mappel::PointEmitterModel::default_sigma_pos = 1` `[static], [inherited]`

Default position parameter in symmetric beta-distributions

Definition at line 57 of file PointEmitterModel.h.

9.12.5.9 `const std::string mappel::Gauss2DModel::DefaultPriorType = "Normal"` `[static], [inherited]`

Definition at line 51 of file Gauss2DModel.h.

Referenced by `mappel::Gauss2DModel::get_psf_sigma()`.

9.12.5.10 `const std::string mappel::PointEmitterModel::DefaultSeperableInitEstimator = "TrustRegion"` `[static], [inherited]`

Estimator name to use in 1D separable initializations

Definition at line 49 of file PointEmitterModel.h.

Referenced by `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsxyModel::initial_theta_estimate()`, and `mappel::Gauss2DsModel::initial_theta_estimate()`.

9.12.5.11 `const std::vector< std::string > mappel::PoissonNoise2DObjective::estimator_names` `[static], [inherited]`

Definition at line 23 of file PoissonNoise2DObjective.h.

9.12.5.12 `double mappel::MCMCAdaptor1D::eta_bg = 0` `[protected], [inherited]`

The standard deviation for the normally distributed perturbation to `theta_bg` in the random walk MCMC sampling

Definition at line 33 of file MCMCAdaptor1D.h.

Referenced by `mappel::MCMCAdaptor1D::get_stats()`, `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor1D::operator=()`, `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`, and `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`.

9.12.5.13 `double mappel::MCMCAdaptor1D::eta_I = 0` `[protected], [inherited]`

The standard deviation for the normally distributed perturbation to `theta_I` in the random walk MCMC sampling

Definition at line 32 of file MCMCAdaptor1D.h.

Referenced by `mappel::MCMCAdaptor1D::get_stats()`, `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor1D::operator=()`, `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`, and `mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling()`.

9.12.5.14 `double mappel::MCMCAdaptor1D::eta_x=0` `[protected]`, `[inherited]`

The standard deviation for the normally distributed perturbation to `theta_x` in the random walk MCMC sampling

Definition at line 31 of file `MCMCAdaptor1D.h`.

Referenced by `mappel::MCMCAdaptor1D::get_stats()`, `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor1D::operator=()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, and `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`.

9.12.5.15 `double mappel::MCMCAdaptor2D::eta_y=0` `[protected]`, `[inherited]`

The standard deviation for the normally distributed perturbation to `theta_y` in the random walk MCMC sampling

Definition at line 28 of file `MCMCAdaptor2D.h`.

Referenced by `mappel::MCMCAdaptor2D::get_stats()`, `mappel::MCMCAdaptor2D::MCMCAdaptor2D()`, `mappel::MCMCAdaptor2D::operator=()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, and `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`.

9.12.5.16 `const double mappel::MCMCAdaptorBase::global_default_mcmc_sigma_scale = 0.05` `[static]`, `[inherited]`

Definition at line 16 of file `MCMCAdaptorBase.h`.

Referenced by `mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds()`, `mappel::MCMCAdaptor2D::MCMCAdaptor2D()`, and `mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds()`.

9.12.5.17 `const double mappel::MCMCAdaptorBase::global_max_mcmc_sigma_scale = 0.5` `[static]`, `[inherited]`

Definition at line 17 of file `MCMCAdaptorBase.h`.

Referenced by `mappel::MCMCAdaptorBase::MCMCAdaptorBase()`, and `mappel::MCMCAdaptorBase::set_mcmc_sigma_scale()`.

9.12.5.18 `const double mappel::PointEmitterModel::global_max_psf_sigma = 1E2` `[static]`, `[inherited]`

Global maximum for any `psf_sigma`. Sizes above this value are invalid, and nowhere near useful for practical point emitter localization

Definition at line 54 of file `PointEmitterModel.h`.

Referenced by `mappel::PointEmitterModel::check_psf_sigma()`.

9.12.5.19 `const ImageFormat2DBase::ImageCoordT mappel::ImageFormat2DBase::global_max_size=512` `[static]`, `[inherited]`

Maximum size along any dimension of the image. This is insanely big to catch obvious errors

Definition at line 39 of file `ImageFormat2DBase.h`.

Referenced by `mappel::ImageFormat2DBase::check_size()`.

9.12.5.20 `const double mappel::PointEmitterModel::global_min_psf_sigma = 1E-1` `[static], [inherited]`

Global minimum for any `psf_sigma`. Sizes below this value are invalid, and nowhere near useful for practical point emitter localization

Definition at line 53 of file `PointEmitterModel.h`.

Referenced by `mappel::PointEmitterModel::check_psf_sigma()`.

9.12.5.21 `const ImageFormat2DBase::ImageCoordT mappel::ImageFormat2DBase::global_min_size = 3` `[static], [inherited]`

Minimum size along any dimension of the image.

Definition at line 38 of file `ImageFormat2DBase.h`.

Referenced by `mappel::ImageFormat2DBase::check_size()`.

9.12.5.22 `ParamT mappel::PointEmitterModel::lbound` `[protected], [inherited]`

Definition at line 148 of file `PointEmitterModel.h`.

Referenced by `mappel::PointEmitterModel::bound_theta()`, `mappel::PointEmitterModel::bounded_theta()`, `mappel::PointEmitterModel::get_lbound()`, `mappel::PointEmitterModel::get_stats()`, `mappel::Gauss1DsModel::initial_theta_estimate()`, `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsModel::initial_theta_estimate()`, `mappel::PointEmitterModel::operator=()`, `mappel::PointEmitterModel::reflected_theta()`, `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::PointEmitterModel::set_prior()`, `mappel::PointEmitterModel::set_ubound()`, and `mappel::PointEmitterModel::theta_in_bounds()`.

9.12.5.23 `const std::string mappel::Gauss2DMAP::name` `[static]`

Definition at line 37 of file `Gauss2DMAP.h`.

9.12.5.24 `const ImageFormat2DBase::ImageCoordT mappel::ImageFormat2DBase::num_dim = 2` `[static], [inherited]`

Number of image dimensions.

Definition at line 37 of file `ImageFormat2DBase.h`.

Referenced by `mappel::ImageFormat2DBase::get_stats()`.

9.12.5.25 `IdxT mappel::PointEmitterModel::num_hyperparams` `[protected], [inherited]`

Definition at line 147 of file `PointEmitterModel.h`.

Referenced by `mappel::PointEmitterModel::get_num_hyperparams()`, `mappel::PointEmitterModel::get_stats()`, `mappel::PointEmitterModel::operator=()`, and `mappel::PointEmitterModel::set_prior()`.

9.12.5.26 `IdxT mappel::PointEmitterModel::num_params` `[protected]`, `[inherited]`

Definition at line 146 of file `PointEmitterModel.h`.

Referenced by `mappel::PointEmitterModel::bound_theta()`, `mappel::PointEmitterModel::bounded_theta()`, `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::get_num_params()`, `mappel::PointEmitterModel::get_stats()`, `mappel::Gauss1DModel::initial_theta_estimate()`, `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsModel::initial_theta_estimate()`, `mappel::PointEmitterModel::make_param()`, `mappel::PointEmitterModel::make_param_mat()`, `mappel::PointEmitterModel::make_param_mat_stack()`, `mappel::PointEmitterModel::make_param_stack()`, `mappel::PointEmitterModel::operator=()`, `mappel::PointEmitterModel::reflected_theta()`, `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::PointEmitterModel::set_prior()`, `mappel::PointEmitterModel::set_ubound()`, and `mappel::PointEmitterModel::theta_in_bounds()`.

9.12.5.27 `IdxT mappel::MCMCAdaptorBase::num_phases` `[protected]`, `[inherited]`

The number of different sampling phases for candidate selection MCMC. Each phase changes a different subset of variables.

Definition at line 29 of file `MCMCAdaptorBase.h`.

Referenced by `mappel::MCMCAdaptorBase::get_mcmc_num_phases()`, `mappel::MCMCAdaptorBase::get_stats()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`, and `mappel::MCMCAdaptorBase::set_mcmc_num_phases()`.

9.12.5.28 `CompositeDist mappel::PointEmitterModel::prior` `[protected]`, `[inherited]`

Definition at line 145 of file `PointEmitterModel.h`.

Referenced by `mappel::Gauss2DModel::debug_internal_sum_model_y()`, `mappel::Gauss2DsModel::debug_internal_sum_model_y()`, `mappel::Gauss2DModel::Gauss2DModel()`, `mappel::Gauss2DsModel::Gauss2DsModel()`, `mappel::PointEmitterModel::get_hyperparam_index()`, `mappel::PointEmitterModel::get_hyperparam_names()`, `mappel::PointEmitterModel::get_hyperparam_value()`, `mappel::PointEmitterModel::get_hyperparams()`, `mappel::Gauss1DsModel::get_max_sigma()`, `mappel::Gauss1DsModel::get_min_sigma()`, `mappel::PointEmitterModel::get_param_names()`, `mappel::PointEmitterModel::get_prior()`, `mappel::PointEmitterModel::get_stats()`, `mappel::PointEmitterModel::has_hyperparam()`, `mappel::PointEmitterModel::operator=()`, `mappel::PointEmitterModel::PointEmitterModel()`, `mappel::PointEmitterModel::rename_hyperparam()`, `mappel::PointEmitterModel::sample_prior()`, `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_hyperparam_names()`, `mappel::PointEmitterModel::set_hyperparam_value()`, `mappel::PointEmitterModel::set_hyperparams()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::Gauss1DsModel::set_max_sigma()`, `mappel::Gauss1DsModel::set_min_sigma()`, `mappel::PointEmitterModel::set_param_names()`, `mappel::PointEmitterModel::set_prior()`, and `mappel::PointEmitterModel::set_ubound()`.

9.12.5.29 `const StringVecT mappel::Gauss2DModel::prior_types` `[static]`, `[inherited]`

Initial value:

```
= { "Beta",
    "Normal"
}
```

Definition at line 50 of file `Gauss2DModel.h`.

Referenced by `mappel::Gauss2DModel::get_psf_sigma()`.

9.12.5.30 VecT mappel::Gauss2DModel::psf_sigma [protected],[inherited]

Standard deviation of the fixed-sigma 1D Gaussian PSF in pixels

Definition at line 104 of file Gauss2DModel.h.

Referenced by mappel::cgauss_compute_estimate(), mappel::cgauss_compute_estimate_debug(), mappel::cgauss←_heuristic_compute_estimate(), mappel::Gauss2DModel::Stencil::compute_derivatives(), mappel::Gauss2DModel←::debug_internal_sum_model_y(), mappel::Gauss2DModel::Gauss2DModel(), mappel::Gauss2DModel::get_psf←sigma(), mappel::Gauss2DModel::make_internal_1Dsum_estimator(), mappel::Gauss2DModel::operator=(), mappel←::Gauss2DModel::pixel_grad2(), mappel::Gauss2DModel::pixel_hess(), mappel::Gauss2DModel::pixel_hess_update(), mappel::Gauss2DModel::set_psf_sigma(), mappel::Gauss2DModel::Stencil::Stencil(), and mappel::Gauss2DModel←::update_internal_1Dsum_estimators().

9.12.5.31 double mappel::MCMCAdaptorBase::sigma_scale [protected],[inherited]

A scaling factor for step sizes as a fraction of the size of the domain dimension we are walking in. (0.05 default)

Definition at line 30 of file MCMCAdaptorBase.h.

Referenced by mappel::MCMCAdaptorBase::get_mcmc_sigma_scale(), mappel::MCMCAdaptorBase::get_stats(), mappel::MCMCAdaptor1D::MCMCAdaptor1D(), mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds(), mappel::MCMC←Adaptor2D::MCMCAdaptor2D(), mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds(), mappel::MCMCAdaptor1D::set←_background_mcmc_sampling(), mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling(), and mappel::MCMC←AdaptorBase::set_mcmc_sigma_scale().

9.12.5.32 ImageSizeT mappel::ImageFormat2DBase::size [protected],[inherited]

Number of pixels in X dimension for 1D image

Definition at line 67 of file ImageFormat2DBase.h.

Referenced by mappel::cgauss_compute_estimate(), mappel::cgauss_compute_estimate_debug(), mappel::cgauss←_heuristic_compute_estimate(), mappel::ImageFormat2DBase::check_image_shape(), mappel::Gauss2DModel::←Stencil::compute_derivatives(), mappel::Gauss2DsModel::Stencil::compute_derivatives(), mappel::Gauss2DModel←::debug_internal_sum_model_y(), mappel::Gauss2DsModel::debug_internal_sum_model_y(), mappel::methods←::expected_information(), mappel::Gauss2DModel::Gauss2DModel(), mappel::Gauss2DsMAP::Gauss2DsMA←P(), mappel::Gauss2DsMLE::Gauss2DsMLE(), mappel::Gauss2DsModel::Gauss2DsModel(), mappel::Image←Format2DBase::get_num_pixels(), mappel::ImageFormat2DBase::get_size(), mappel::ImageFormat2DBase::get←_stats(), mappel::methods::likelihood::grad(), mappel::methods::likelihood::grad2(), mappel::methods::likelihood←::debug::grad_components(), mappel::methods::likelihood::hessian(), mappel::methods::likelihood::debug::hessian←_components(), mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::methods::likelihood::llh(), mappel::methods::likelihood::debug::llh_components(), mappel::Gauss2DModel←::make_default_prior_beta_position(), mappel::Gauss2DsModel::make_default_prior_beta_position(), mappel::←Gauss2DModel::make_default_prior_normal_position(), mappel::Gauss2DsModel::make_default_prior_normal←_position(), mappel::ImageFormat2DBase::make_image(), mappel::ImageFormat2DBase::make_image_stack(), mappel::Gauss2DModel::make_internal_1Dsum_estimator(), mappel::Gauss2DsModel::make_internal_1Dsum←estimator(), mappel::Gauss2DModel::make_prior_beta_position(), mappel::Gauss2DsModel::make_prior_beta←_position(), mappel::Gauss2DModel::make_prior_normal_position(), mappel::Gauss2DsModel::make_prior_normal←_position(), mappel::methods::model_image(), mappel::ImageFormat2DBase::operator=(), mappel::methods←::likelihood::rllh(), mappel::methods::likelihood::debug::rllh_components(), mappel::ImageFormat2DBase::set←size(), mappel::Gauss2DModel::set_size(), mappel::Gauss2DsModel::set_size(), mappel::methods::simulate_image(), mappel::methods::simulate_image_from_model(), mappel::Gauss2DModel::Stencil::Stencil(), mappel::Gauss2Ds←Model::Stencil::Stencil(), mappel::Gauss2DModel::update_internal_1Dsum_estimators(), and mappel::Gauss2Ds←Model::update_internal_1Dsum_estimators().

9.12.5.33 ParamT mappel::PointEmitterModel::ubound [protected],[inherited]

Definition at line 148 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::bound_theta(), mappel::PointEmitterModel::bounded_theta(), mappel::PointEmitterModel::get_stats(), mappel::PointEmitterModel::get_ubound(), mappel::Gauss1DsModel::initial_theta_estimate(), mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::PointEmitterModel::operator=(), mappel::PointEmitterModel::reflected_theta(), mappel::PointEmitterModel::set_bounds(), mappel::PointEmitterModel::set_lbound(), mappel::PointEmitterModel::set_prior(), mappel::PointEmitterModel::set_ubound(), and mappel::PointEmitterModel::theta_in_bounds().

9.12.5.34 Gauss1DSumModelT mappel::Gauss2DModel::x_model [protected],[inherited]

X-model fits 2D images X-axis (column sum)

Definition at line 105 of file Gauss2DModel.h.

Referenced by mappel::Gauss2DModel::debug_internal_sum_model_x(), mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DModel::operator=(), mappel::Gauss2DModel::set_psf_sigma(), mappel::Gauss2DModel::set_size(), and mappel::Gauss2DModel::update_internal_1Dsum_estimators().

9.12.5.35 Gauss1DSumModelT mappel::Gauss2DModel::y_model [protected],[inherited]

Y-model fits 2D images Y-axis (row sum)

Definition at line 106 of file Gauss2DModel.h.

Referenced by mappel::Gauss2DModel::debug_internal_sum_model_y(), mappel::Gauss2DModel::Gauss2DModel(), mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DModel::operator=(), mappel::Gauss2DModel::set_psf_sigma(), mappel::Gauss2DModel::set_size(), and mappel::Gauss2DModel::update_internal_1Dsum_estimators().

The documentation for this class was generated from the following files:


- [Gauss2DMP.h](#)
- [Gauss2DMP.cpp](#)

9.13 mappel::Gauss2DMLE Class Reference

A 2D Gaussian with fixed PSF under an Poisson noise assumption and maximum-likelihood objective.

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/Gauss2DMLE.h>
```

Inheritance diagram for mappel::Gauss2DMLE:

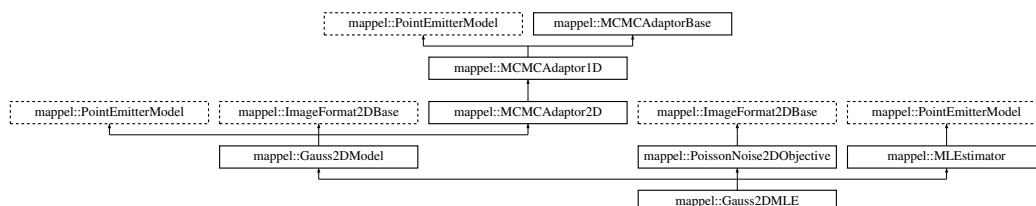

Public Types

- using [Gauss1DSumModelT](#) = [Gauss1DMAP](#)
- using [StencilVecT](#) = `std::vector< Stencil >`
- using [ParamT](#) = `arma::vec`
- using [ParamVecT](#) = `arma::mat`
- using [ImageCoordT](#) = `uint32_t`
- using [ImagePixelT](#) = `double`
- template<class [CoordT](#) >
using [ImageSizeShapeT](#) = `arma::Col< CoordT >`
- template<class [CoordT](#) >
using [ImageSizeVecShapeT](#) = `arma::Mat< CoordT >`
- using [ImageSizeT](#) = [ImageSizeShapeT](#)< [ImageCoordT](#) >
- using [ImageSizeVecT](#) = [ImageSizeVecShapeT](#)< [ImageCoordT](#) >
- template<class [PixelT](#) >
using [ImageShapeT](#) = `arma::Mat< PixelT >`
- template<class [PixelT](#) >
using [ImageStackShapeT](#) = `arma::Cube< PixelT >`
- using [ImageT](#) = [ImageShapeT](#)< [ImagePixelT](#) >
- using [ImageStackT](#) = [ImageStackShapeT](#)< [ImagePixelT](#) >
- using [ModelDataT](#) = [ImageT](#)
- using [ModelDataStackT](#) = [ImageStackT](#)

Public Member Functions

- [Gauss2DMLE](#) ([ImageCoordT](#) [size](#), double [psf_sigma](#), const `std::string` &[prior_type](#)=[DefaultPriorType](#))
- [Gauss2DMLE](#) (const [ImageSizeT](#) &[size](#), double [psf_sigma](#), const `std::string` &[prior_type](#)=[DefaultPriorType](#))
- [Gauss2DMLE](#) (const [ImageSizeT](#) &[size](#), const [VecT](#) &[psf_sigma](#), const `std::string` &[prior_type](#)=[DefaultPriorType](#))
- [Gauss2DMLE](#) (const [ImageSizeT](#) &[size](#), const [VecT](#) &[psf_sigma](#), [CompositeDist](#) &&[prior](#))
- [Gauss2DMLE](#) (const [ImageSizeT](#) &[size](#), const [VecT](#) &[psf_sigma](#), const [CompositeDist](#) &[prior](#))
- [Gauss2DMLE](#) (const [Gauss2DMLE](#) &o)
- [Gauss2DMLE](#) & [operator=](#) (const [Gauss2DMLE](#) &o)
- [Gauss2DMLE](#) ([Gauss2DMLE](#) &&o)
- [Gauss2DMLE](#) & [operator=](#) ([Gauss2DMLE](#) &&o)
- void [set_hyperparams](#) (const [VecT](#) &[hyperparams](#))
- void [set_prior](#) ([CompositeDist](#) &&[prior_](#))
- void [set_prior](#) (const [CompositeDist](#) &[prior_](#))
- void [set_size](#) (const [ImageSizeT](#) &[size_](#))
- const [VecT](#) & [get_psf_sigma](#) () const
- double [get_psf_sigma](#) ([IdxT](#) [idx](#)) const
- void [set_psf_sigma](#) (double [new_psf_sigma](#))
- void [set_psf_sigma](#) (const [VecT](#) &[new_psf_sigma](#))
- [StatsT](#) [get_stats](#) () const
- [Stencil](#) [make_stencil](#) (const [ParamT](#) &[theta](#), bool [compute_derivatives](#)=true) const
Make a new Model::Stencil object at theta.
- double [pixel_model_value](#) (int [i](#), int [j](#), const [Stencil](#) &[s](#)) const
- void [pixel_grad](#) (int [i](#), int [j](#), const [Stencil](#) &[s](#), [ParamT](#) &[pgrad](#)) const
- void [pixel_grad2](#) (int [i](#), int [j](#), const [Stencil](#) &[s](#), [ParamT](#) &[pgrad2](#)) const
- void [pixel_hess](#) (int [i](#), int [j](#), const [Stencil](#) &[s](#), [MatT](#) &[hess](#)) const

- void `pixel_hess_update` (int i, int j, const `Stencil` &s, double dm_ratio_m1, double dmm_ratio, `ParamT` &grad, `MatT` &hess) const
pixel derivative inner loop calculations.
- `Stencil initial_theta_estimate` (const `ImageT` &im) const
Fast, heuristic estimate of initial theta.
- `Stencil initial_theta_estimate` (const `ImageT` &im, const `ParamT` &theta_init) const
- `Stencil initial_theta_estimate` (const `ImageT` &im, const `ParamT` &theta_init, const std::string &estimator) const
- `Gauss1DSumModelT debug_internal_sum_model_x` () const
- `Gauss1DSumModelT debug_internal_sum_model_y` () const
- `IdxT get_num_params` () const
- void `check_param_shape` (const `ParamT` &theta) const
- void `check_param_shape` (const `ParamVecT` &theta) const
- void `check_psf_sigma` (double `psf_sigma`) const
- void `check_psf_sigma` (const `VecT` &`psf_sigma`) const
- `ParamT make_param` () const
- template<class FillT >
 `ParamT make_param` (FillT fill) const
- `ParamVecT make_param_stack` (`IdxT` n) const
- template<class FillT >
 `ParamVecT make_param_stack` (`IdxT` n, FillT fill) const
- `MatT make_param_mat` () const
- template<class FillT >
 `MatT make_param_mat` (FillT fill) const
- `CubeT make_param_mat_stack` (`IdxT` n) const
- template<class FillT >
 `CubeT make_param_mat_stack` (`IdxT` n, FillT fill) const
- `CompositeDist & get_prior` ()
- const `CompositeDist & get_prior` () const
- `IdxT get_num_hyperparams` () const
- `VecT get_hyperparams` () const
- bool `has_hyperparam` (const std::string &name) const
- double `get_hyperparam_value` (const std::string &name) const
- int `get_hyperparam_index` (const std::string &name) const
- void `set_hyperparam_value` (const std::string &name, double value)
- void `rename_hyperparam` (const std::string &old_name, const std::string &new_name)
- `StringVecT get_param_names` () const
- void `set_param_names` (const `StringVecT` &desc)
- `StringVecT get_hyperparam_names` () const
- void `set_hyperparam_names` (const `StringVecT` &desc)
- template<class RngT >
 `ParamT sample_prior` (RngT &rng) const
- `ParamT sample_prior` () const
- void `set_bounds` (const `ParamT` &lbound, const `ParamT` &ubound)
- void `set_lbound` (const `ParamT` &lbound)
- void `set_ubound` (const `ParamT` &ubound)
- const `ParamT & get_lbound` () const
- const `ParamT & get_ubound` () const
- bool `theta_in_bounds` (const `ParamT` &theta) const
- void `bound_theta` (`ParamT` &theta, double epsilon=`bounds_epsilon`) const
- `ParamT bounded_theta` (const `ParamT` &theta, double epsilon=`bounds_epsilon`) const
- `ParamT reflected_theta` (const `ParamT` &theta) const

- [BoolVecT](#) [theta_stack_in_bounds](#) (const [ParamVecT](#) &theta) const
- [ParamVecT](#) [bounded_theta_stack](#) (const [ParamVecT](#) &theta, double epsilon=[bounds_epsilon](#)) const
- [ParamVecT](#) [reflected_theta_stack](#) (const [ParamVecT](#) &theta) const
- [ImageT](#) [make_image](#) () const
- [ImageStackT](#) [make_image_stack](#) ([ImageCoordT](#) n) const
- [ImageCoordT](#) [get_size_image_stack](#) (const [ImageStackT](#) &stack) const
- [ImageT](#) [get_image_from_stack](#) (const [ImageStackT](#) &stack, [ImageCoordT](#) n) const
- template<class ImT >
void [set_image_in_stack](#) ([ImageStackT](#) &stack, [ImageCoordT](#) n, const ImT &im) const
- const [ImageSizeT](#) & [get_size](#) () const
- [ImageCoordT](#) [get_size](#) ([IdxT](#) idx) const
- [ImageCoordT](#) [get_num_pixels](#) () const
- void [check_image_shape](#) (const [ImageT](#) &im) const
Check the shape of a single images is correct for model size.
- void [check_image_shape](#) (const [ImageStackT](#) &ims) const
Check the shape of a stack of images is correct for model size.
- void [sample_mcmc_candidate](#) ([IdxT](#) sample_index, [ParamT](#) &candidate, double step_scale=1.0) const
- void [sample_mcmc_candidate](#) ([IdxT](#) sample_index, [ParamT](#) &candidate, const [IdxVecT](#) &fixed_parameters_↔ mask, double step_scale=1.0) const
- void [set_intensity_mcmc_sampling](#) (double eta_l=-1)
- void [set_background_mcmc_sampling](#) (double eta_bg=-1)
- void [set_mcmc_sigma_scale](#) (double scale)
- double [get_mcmc_sigma_scale](#) () const
- [IdxT](#) [get_mcmc_num_phases](#) () const

Static Public Member Functions

- static [CompositeDist](#) [make_default_prior](#) (const [ImageSizeT](#) &size, const std::string &prior_type)
- static [CompositeDist](#) [make_default_prior_beta_position](#) (const [ImageSizeT](#) &size)
- static [CompositeDist](#) [make_default_prior_normal_position](#) (const [ImageSizeT](#) &size)
- static [CompositeDist](#) [make_prior_beta_position](#) (const [ImageSizeT](#) &size, double beta_xpos, double beta_ypos, double mean_l, double kappa_l, double mean_bg, double kappa_bg)
- static [CompositeDist](#) [make_prior_normal_position](#) (const [ImageSizeT](#) &size, double sigma_xpos, double beta_↔ ypos, double mean_l, double kappa_l, double mean_bg, double kappa_bg)
- static [prior_hessian::TruncatedNormalDist](#) [make_prior_component_position_normal](#) ([IdxT](#) size, double pos_↔ sigma=[default_sigma_pos](#))
- static [prior_hessian::ScaledSymmetricBetaDist](#) [make_prior_component_position_beta](#) ([IdxT](#) size, double pos_↔ beta=[default_beta_pos](#))
- static [prior_hessian::TruncatedGammaDist](#) [make_prior_component_intensity](#) (double mean=[default_mean_↔ l](#), double kappa=[default_intensity_kappa](#))
- static [prior_hessian::TruncatedParetoDist](#) [make_prior_component_sigma](#) (double min_sigma, double max_↔ sigma, double alpha=[default_alpha_sigma](#))
- static void [set_rng_seed](#) ([RngSeedT](#) seed)
- static [ParallelRngManagerT](#) & [get_rng_manager](#) ()
- static [ParallelRngGeneratorT](#) & [get_rng_generator](#) ()
- static void [check_size](#) (const [ImageSizeT](#) &size_)

Check the size argument for the model.

Static Public Attributes

- static const std::string `name`
- static const `StringVecT` `prior_types`
- static const std::string `DefaultPriorType` = "Normal"
- static const std::string `DefaultSeperableInitEstimator` = "TrustRegion"
- static const double `bounds_epsilon` = 1.0E-6
- static const double `global_min_psf_sigma` = 1E-1
- static const double `global_max_psf_sigma` = 1E2
- static const double `default_beta_pos` = 3
- static const double `default_sigma_pos` = 1
- static const double `default_mean_l` = 300
- static const double `default_max_l` = INFINITY
- static const double `default_intensity_kappa` = 2
- static const double `default_pixel_mean_bg` = 4
- static const double `default_alpha_sigma` = 2
- static const `ImageCoordT` `num_dim` =2
- static const `ImageCoordT` `global_min_size` =3
- static const `ImageCoordT` `global_max_size` =512
- static const double `global_default_mcmc_sigma_scale` = 0.05
- static const double `global_max_mcmc_sigma_scale` = 0.5
- static const std::vector< std::string > `estimator_names`

Protected Member Functions

- void `update_internal_1Dsum_estimators` ()
- void `set_mcmc_num_phases` (`IdxT` num_phases)

Static Protected Member Functions

- static `Gauss1DSumModelT` `make_internal_1Dsum_estimator` (`IdxT` dim, const `ImageSizeT` &size, const `VecT` &psf_sigma, const `CompositeDist` &prior)

Protected Attributes

- `VecT` `psf_sigma`
- `Gauss1DSumModelT` `x_model`
- `Gauss1DSumModelT` `y_model`
- `CompositeDist` `prior`
- `IdxT` `num_params`
- `IdxT` `num_hyperparams`
- `ParamT` `lbound`
- `ParamT` `ubound`
- `ImageSizeT` `size`
- double `eta_y` =0
- double `eta_x` =0
- double `eta_l` =0
- double `eta_bg` =0
- `IdxT` `num_phases`
- double `sigma_scale`

9.13.1 Detailed Description

A 2D Gaussian with fixed PSF under an Poisson noise assumption and maximum-likelihood objective.

Model: [Gauss2DModel](#) - 2D Gaussian PSF with fixed PSF sigma Objective: [PoissonNoise2DObjective](#) - Poisson noise model for 2D Estimator: [MLEstimator](#) - Pure-likelihood estimator

Definition at line 24 of file Gauss2DMLE.h.

9.13.2 Member Typedef Documentation

9.13.2.1 `using mappel::Gauss2DModel::Gauss1DSumModelT = Gauss1DMap` `[inherited]`

Definition at line 23 of file Gauss2DModel.h.

9.13.2.2 `using mappel::ImageFormat2DBase::ImageCoordT = uint32_t` `[inherited]`

Image size coordinate storage type

Definition at line 24 of file ImageFormat2DBase.h.

9.13.2.3 `using mappel::ImageFormat2DBase::ImagePixelT = double` `[inherited]`

Image pixel storage type

Definition at line 25 of file ImageFormat2DBase.h.

9.13.2.4 `template<class PixelT > using mappel::ImageFormat2DBase::ImageShapeT = arma::Mat<PixelT>`
`[inherited]`

Shape of the data type for a single image

Definition at line 32 of file ImageFormat2DBase.h.

9.13.2.5 `template<class CoordT > using mappel::ImageFormat2DBase::ImageSizeShapeT = arma::Col<CoordT>`
`[inherited]`

Shape of the data type to store a single image's coordinates

Definition at line 27 of file ImageFormat2DBase.h.

9.13.2.6 `using mappel::ImageFormat2DBase::ImageSizeT = ImageSizeShapeT<ImageCoordT>`
`[inherited]`

Data type for a single image size

Definition at line 29 of file ImageFormat2DBase.h.

9.13.2.7 `template<class CoordT > using mappel::ImageFormat2DBase::ImageSizeVecShapeT = arma::Mat<CoordT>`
`[inherited]`

Shape of the data type to store a vector of image's coordinates

Definition at line 28 of file ImageFormat2DBase.h.

9.13.2.8 `using mappel::ImageFormat2DBase::ImageSizeVecT = ImageSizeVecShapeT<ImageCoordT>`
`[inherited]`

Data type for a sequence of image sizes

Definition at line 30 of file ImageFormat2DBase.h.

9.13.2.9 `template<class PixelT > using mappel::ImageFormat2DBase::ImageStackShapeT = arma::Cube<PixelT>`
`[inherited]`

Shape of the data type for a sequence of images

Definition at line 33 of file ImageFormat2DBase.h.

9.13.2.10 `using mappel::ImageFormat2DBase::ImageStackT = ImageStackShapeT<ImagePixelT>`
`[inherited]`

Data type to represent a sequence of images

Definition at line 35 of file ImageFormat2DBase.h.

9.13.2.11 `using mappel::ImageFormat2DBase::ImageT = ImageShapeT<ImagePixelT>` `[inherited]`

Data type to represent single image

Definition at line 34 of file ImageFormat2DBase.h.

9.13.2.12 `using mappel::PoissonNoise2DObjective::ModelDataStackT = ImageStackT` `[inherited]`

Objective function data stack type: 2D double precision image stack, of images gain-corrected to approximate photons counts

Definition at line 25 of file PoissonNoise2DObjective.h.

9.13.2.13 `using mappel::PoissonNoise2DObjective::ModelDataT = ImageT` `[inherited]`

Objective function data type: 2D double precision image, gain-corrected to approximate photons counts

Definition at line 24 of file PoissonNoise2DObjective.h.

9.13.2.14 `using mappel::PointEmitterModel::ParamT = arma::vec` [inherited]

Parameter vector

Definition at line 47 of file PointEmitterModel.h.

9.13.2.15 `using mappel::PointEmitterModel::ParamVecT = arma::mat` [inherited]

Vector of parameter vectors

Definition at line 48 of file PointEmitterModel.h.

9.13.2.16 `using mappel::Gauss2DModel::StencilVecT = std::vector<Stencil>` [inherited]

Definition at line 47 of file Gauss2DModel.h.

9.13.3 Constructor & Destructor Documentation

9.13.3.1 `mappel::Gauss2DMLE::Gauss2DMLE (ImageCoordT size, double psf_sigma, const std::string & prior_type = DefaultPriorType)`

Definition at line 11 of file Gauss2DMLE.cpp.

9.13.3.2 `mappel::Gauss2DMLE::Gauss2DMLE (const ImageSizeT & size, double psf_sigma, const std::string & prior_type = DefaultPriorType)`

Definition at line 15 of file Gauss2DMLE.cpp.

9.13.3.3 `mappel::Gauss2DMLE::Gauss2DMLE (const ImageSizeT & size, const VecT & psf_sigma, const std::string & prior_type = DefaultPriorType)`

Definition at line 19 of file Gauss2DMLE.cpp.

9.13.3.4 `mappel::Gauss2DMLE::Gauss2DMLE (const ImageSizeT & size, const VecT & psf_sigma, CompositeDist && prior)`

Definition at line 23 of file Gauss2DMLE.cpp.

9.13.3.5 `mappel::Gauss2DMLE::Gauss2DMLE (const ImageSizeT & size, const VecT & psf_sigma, const CompositeDist & prior)`

Definition at line 31 of file Gauss2DMLE.cpp.

9.13.3.6 `mappel::Gauss2DMLE::Gauss2DMLE (const Gauss2DMLE & o)`

Definition at line 39 of file Gauss2DMLE.cpp.

9.13.3.7 mappel::Gauss2DMLE::Gauss2DMLE (Gauss2DMLE && o)

Definition at line 47 of file Gauss2DMLE.cpp.

9.13.4 Member Function Documentation

9.13.4.1 void mappel::PointEmitterModel::bound_theta (ParamT & theta, double epsilon = bounds_epsilon) const [inherited]

Definition at line 248 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::check_param_shape(), mappel::PointEmitterModel::lbound, mappel::PointEmitterModel::num_params, and mappel::PointEmitterModel::ubound.

9.13.4.2 PointEmitterModel::ParamT mappel::PointEmitterModel::bounded_theta (const ParamT & theta, double epsilon = bounds_epsilon) const [inherited]

Definition at line 265 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::check_param_shape(), mappel::PointEmitterModel::lbound, mappel::PointEmitterModel::num_params, and mappel::PointEmitterModel::ubound.

Referenced by mappel::PointEmitterModel::bounded_theta_stack().

9.13.4.3 PointEmitterModel::ParamVecT mappel::PointEmitterModel::bounded_theta_stack (const ParamVecT & theta, double epsilon = bounds_epsilon) const [inherited]

Definition at line 306 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::bounded_theta(), mappel::PointEmitterModel::check_param_shape(), and mappel::PointEmitterModel::make_param_stack().

9.13.4.4 void mappel::ImageFormat2DBase::check_image_shape (const ImageT & im) const [inherited]

Check the shape of a single images is correct for model size.

Definition at line 80 of file ImageFormat2DBase.cpp.

References mappel::ImageFormat2DBase::size.

9.13.4.5 void mappel::ImageFormat2DBase::check_image_shape (const ImageStackT & ims) const [inherited]

Check the shape of a stack of images is correct for model size.

Definition at line 93 of file ImageFormat2DBase.cpp.

References mappel::ImageFormat2DBase::size.

9.13.4.6 `void mappel::PointEmitterModel::check_param_shape (const ParamT & theta) const` [inherited]

Definition at line 167 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::num_params.

Referenced by mappel::PointEmitterModel::bound_theta(), mappel::PointEmitterModel::bounded_theta(), mappel::PointEmitterModel::bounded_theta_stack(), mappel::PointEmitterModel::reflected_theta(), mappel::PointEmitterModel::reflected_theta_stack(), mappel::PointEmitterModel::theta_in_bounds(), and mappel::PointEmitterModel::theta_stack_in_bounds().

9.13.4.7 `void mappel::PointEmitterModel::check_param_shape (const ParamVecT & theta) const` [inherited]

Definition at line 176 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::num_params.

9.13.4.8 `void mappel::PointEmitterModel::check_psf_sigma (double psf_sigma) const` [inherited]

Definition at line 185 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::global_max_psf_sigma, and mappel::PointEmitterModel::global_min_psf_sigma.

Referenced by mappel::Gauss1DModel::Gauss1DModel(), mappel::Gauss2DModel::Gauss2DModel(), mappel::Gauss2DsModel::Gauss2DsModel(), mappel::Gauss1DsModel::set_max_sigma(), mappel::Gauss2DsModel::set_max_sigma(), mappel::Gauss1DsModel::set_min_sigma(), mappel::Gauss2DsModel::set_min_sigma(), mappel::Gauss1DModel::set_psf_sigma(), and mappel::Gauss2DModel::set_psf_sigma().

9.13.4.9 `void mappel::PointEmitterModel::check_psf_sigma (const VecT & psf_sigma) const` [inherited]

Definition at line 197 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::global_max_psf_sigma, and mappel::PointEmitterModel::global_min_psf_sigma.

9.13.4.10 `void mappel::ImageFormat2DBase::check_size (const ImageSizeT & size)` [static],[inherited]

Check the size argument for the model.

Definition at line 60 of file ImageFormat2DBase.cpp.

References mappel::ImageFormat2DBase::global_max_size, and mappel::ImageFormat2DBase::global_min_size.

Referenced by mappel::ImageFormat2DBase::ImageFormat2DBase(), and mappel::ImageFormat2DBase::set_size().

9.13.4.11 `Gauss1DSumModelT mappel::Gauss2DModel::debug_internal_sum_model_x () const` [inline],
[inherited]

Definition at line 89 of file Gauss2DModel.h.

References mappel::Gauss2DModel::x_model.

9.13.4.12 `Gauss1DSumModelT` `mappel::Gauss2DModel::debug_internal_sum_model_y () const` `[inline]`,
`[inherited]`

Definition at line 90 of file `Gauss2DModel.h`.

References `mappel::Gauss2DModel::Gauss2DModel()`, `mappel::Gauss2DModel::make_internal_1Dsum_estimator()`, `mappel::Gauss2DModel::operator=()`, `mappel::PointEmitterModel::prior`, `mappel::Gauss2DModel::psf_sigma`, `mappel::ImageFormat2DBase::size`, `mappel::Gauss2DModel::update_internal_1Dsum_estimators()`, and `mappel::Gauss2DModel::y_model`.

9.13.4.13 `int` `mappel::PointEmitterModel::get_hyperparam_index (const std::string & name) const` `[inline]`,
`[inherited]`

Definition at line 236 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

9.13.4.14 `StringVecT` `mappel::PointEmitterModel::get_hyperparam_names () const` `[inline]`, `[inherited]`

Definition at line 256 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

9.13.4.15 `double` `mappel::PointEmitterModel::get_hyperparam_value (const std::string & name) const` `[inline]`,
`[inherited]`

Definition at line 232 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

Referenced by `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`, and `mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling()`.

9.13.4.16 `PointEmitterModel::ParamT` `mappel::PointEmitterModel::get_hyperparams () const` `[inline]`,
`[inherited]`

Definition at line 224 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

9.13.4.17 `ImageFormat2DBase::ImageT` `mappel::ImageFormat2DBase::get_image_from_stack (const ImageStackT & stack, ImageCoordT n) const` `[inline]`, `[inherited]`

Definition at line 106 of file `ImageFormat2DBase.h`.

9.13.4.18 `const PointEmitterModel::ParamT &` `mappel::PointEmitterModel::get_lbound () const` `[inline]`,
`[inherited]`

Definition at line 212 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::lbound`.

Referenced by `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor2D::MCMCAdaptor2D()`, and `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`.

9.13.4.19 `IdxT mappel::MCMCAdaptorBase::get_mcmc_num_phases () const` `[inherited]`

Definition at line 56 of file MCMCAdaptorBase.cpp.

References `mappel::MCMCAdaptorBase::num_phases`.

9.13.4.20 `double mappel::MCMCAdaptorBase::get_mcmc_sigma_scale () const` `[inherited]`

Definition at line 53 of file MCMCAdaptorBase.cpp.

References `mappel::MCMCAdaptorBase::sigma_scale`.

9.13.4.21 `IdxT mappel::PointEmitterModel::get_num_hyperparams () const` `[inline],[inherited]`

Definition at line 208 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::num_hyperparams`.

9.13.4.22 `IdxT mappel::PointEmitterModel::get_num_params () const` `[inline],[inherited]`

Definition at line 160 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::num_params`.

9.13.4.23 `ImageFormat2DBase::ImageCoordT mappel::ImageFormat2DBase::get_num_pixels () const` `[inline],[inherited]`

Definition at line 79 of file ImageFormat2DBase.h.

References `mappel::ImageFormat2DBase::size`.

Referenced by `mappel::ImageFormat2DBase::get_stats()`.

9.13.4.24 `StringVecT mappel::PointEmitterModel::get_param_names () const` `[inline],[inherited]`

Definition at line 248 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.13.4.25 `CompositeDist & mappel::PointEmitterModel::get_prior ()` `[inline],[inherited]`

Definition at line 200 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

Referenced by `mappel::Gauss2DModel::update_internal_1Dsum_estimators()`, and `mappel::Gauss2DsModel::update_internal_1Dsum_estimators()`.

9.13.4.26 `const CompositeDist & mappel::PointEmitterModel::get_prior () const` `[inline],[inherited]`

Definition at line 204 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.13.4.27 `const VecT & mappel::Gauss2DModel::get_psf_sigma () const` `[inline],[inherited]`

Definition at line 142 of file Gauss2DModel.h.

References mappel::Gauss2DModel::psf_sigma.

Referenced by mappel::Gauss2DModel::get_stats().

9.13.4.28 `double mappel::Gauss2DModel::get_psf_sigma (IdxT idx) const` `[inherited]`

Definition at line 132 of file Gauss2DModel.cpp.

References mappel::Gauss2DModel::DefaultPriorType, mappel::Gauss2DModel::prior_types, and mappel::Gauss2DModel::psf_sigma.

9.13.4.29 `ParallelRngGeneratorT & mappel::PointEmitterModel::get_rng_generator ()` `[static],[inherited]`

Definition at line 120 of file PointEmitterModel.cpp.

References mappel::rng_manager.

9.13.4.30 `ParallelRngManagerT & mappel::PointEmitterModel::get_rng_manager ()` `[static],[inherited]`

Definition at line 115 of file PointEmitterModel.cpp.

References mappel::rng_manager.

9.13.4.31 `const ImageFormat2DBase::ImageSizeT & mappel::ImageFormat2DBase::get_size () const` `[inline],[inherited]`

Definition at line 74 of file ImageFormat2DBase.h.

References mappel::ImageFormat2DBase::size.

9.13.4.32 `ImageFormat2DBase::ImageCoordT mappel::ImageFormat2DBase::get_size (IdxT idx) const` `[inherited]`

Definition at line 41 of file ImageFormat2DBase.cpp.

References mappel::ImageFormat2DBase::size.

9.13.4.33 ImageFormat2DBase::ImageCoordT mappel::ImageFormat2DBase::get_size_image_stack (const ImageStackT & stack) const [inline],[inherited]

Definition at line 99 of file ImageFormat2DBase.h.

9.13.4.34 StatsT mappel::Gauss2DModel::get_stats () const [inherited]

Definition at line 268 of file Gauss2DModel.cpp.

References mappel::Gauss2DModel::get_psf_sigma(), mappel::MCMCAdaptor2D::get_stats(), mappel::ImageFormat2DBase::get_stats(), and mappel::PointEmitterModel::get_stats().

9.13.4.35 const PointEmitterModel::ParamT & mappel::PointEmitterModel::get_ubound () const [inline],[inherited]

Definition at line 216 of file PointEmitterModel.h.

References mappel::PointEmitterModel::ubound.

Referenced by mappel::Gauss2DsxyModel::get_max_sigma_ratio(), mappel::Gauss2DsModel::get_max_sigma_ratio(), mappel::MCMCAdaptor1D::MCMCAdaptor1D(), mappel::MCMCAdaptor2D::MCMCAdaptor2D(), mappel::MCMCAdaptor1D::set_background_mcmc_sampling(), and mappel::Gauss2DsModel::set_max_sigma_ratio().

9.13.4.36 bool mappel::PointEmitterModel::has_hyperparam (const std::string & name) const [inline],[inherited]

Definition at line 228 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.13.4.37 Gauss2DModel::Stencil mappel::Gauss2DModel::initial_theta_estimate (const ImageT & im) const [inline],[inherited]

Fast, heuristic estimate of initial theta.

Definition at line 194 of file Gauss2DModel.h.

References mappel::PointEmitterModel::DefaultSeperableInitEstimator, and mappel::PointEmitterModel::make_param().

Referenced by mappel::Gauss2DModel::initial_theta_estimate().

9.13.4.38 Gauss2DModel::Stencil mappel::Gauss2DModel::initial_theta_estimate (const ImageT & im, const ParamT & theta_init) const [inline],[inherited]

Definition at line 201 of file Gauss2DModel.h.

References mappel::PointEmitterModel::DefaultSeperableInitEstimator, and mappel::Gauss2DModel::initial_theta_estimate().

9.13.4.39 `Gauss2DModel::Stencil mappel::Gauss2DModel::initial_theta_estimate (const ImageT & im, const ParamT & theta_init, const std::string & estimator) const` `[inherited]`

Definition at line 303 of file Gauss2DModel.cpp.

References `mappel::Gauss2DModel::Stencil::bg()`, `mappel::methods::estimate_max()`, `mappel::Gauss2DModel::Stencil::l()`, `mappel::PointEmitterModel::lbound`, `mappel::Gauss2DModel::make_stencil()`, `mappel::PointEmitterModel::num_params`, `mappel::ImageFormat2DBase::size`, `mappel::estimator::MLEData::theta`, `mappel::PointEmitterModel::theta_in_bounds()`, `mappel::PointEmitterModel::ubound`, `mappel::Gauss2DModel::x_model`, and `mappel::Gauss2DModel::y_model`.

9.13.4.40 `CompositeDist mappel::Gauss2DModel::make_default_prior (const ImageSizeT & size, const std::string & prior_type)` `[static]`, `[inherited]`

Definition at line 150 of file Gauss2DModel.cpp.

References `mappel::istarts_with()`, `mappel::Gauss2DModel::make_default_prior_beta_position()`, and `mappel::Gauss2DModel::make_default_prior_normal_position()`.

9.13.4.41 `CompositeDist mappel::Gauss2DModel::make_default_prior_beta_position (const ImageSizeT & size)` `[static]`, `[inherited]`

Definition at line 171 of file Gauss2DModel.cpp.

References `mappel::PointEmitterModel::default_pixel_mean_bg`, `mappel::PointEmitterModel::make_prior_component_intensity()`, `mappel::PointEmitterModel::make_prior_component_position_beta()`, and `mappel::ImageFormat2DBase::size`.

Referenced by `mappel::Gauss2DModel::make_default_prior()`.

9.13.4.42 `CompositeDist mappel::Gauss2DModel::make_default_prior_normal_position (const ImageSizeT & size)` `[static]`, `[inherited]`

Definition at line 182 of file Gauss2DModel.cpp.

References `mappel::PointEmitterModel::default_pixel_mean_bg`, `mappel::PointEmitterModel::make_prior_component_intensity()`, `mappel::PointEmitterModel::make_prior_component_position_normal()`, and `mappel::ImageFormat2DBase::size`.

Referenced by `mappel::Gauss2DModel::make_default_prior()`.

9.13.4.43 `ImageFormat2DBase::ImageT mappel::ImageFormat2DBase::make_image () const` `[inline]`, `[inherited]`

Definition at line 85 of file ImageFormat2DBase.h.

References `mappel::ImageFormat2DBase::size`.

9.13.4.44 ImageFormat2DBase::ImageStackT mappel::ImageFormat2DBase::make_image_stack (ImageCoordT *n*) const
[inline],[inherited]

Definition at line 92 of file ImageFormat2DBase.h.

References mappel::ImageFormat2DBase::size.

9.13.4.45 Gauss2DModel::Gauss1DSumModelT mappel::Gauss2DModel::make_internal_1Dsum_estimator (IdxT *dim*,
const ImageSizeT & *size*, const VecT & *psf_sigma*, const CompositeDist & *prior*) [static],[protected],
[inherited]

Definition at line 62 of file Gauss2DModel.cpp.

References mappel::Gauss1DModel::make_prior_beta_position(), mappel::Gauss1DModel::make_prior_normal_↵
position(), mappel::Gauss2DModel::psf_sigma, and mappel::ImageFormat2DBase::size.

Referenced by mappel::Gauss2DModel::debug_internal_sum_model_y(), mappel::Gauss2DModel::Gauss2DModel(),
and mappel::Gauss2DModel::update_internal_1Dsum_estimators().

9.13.4.46 PointEmitterModel::ParamT mappel::PointEmitterModel::make_param () const [inline],[inherited]

Definition at line 164 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

Referenced by mappel::Gauss1DModel::initial_theta_estimate(), mappel::Gauss1DsModel::initial_theta_estimate(),
mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsxyModel::initial_theta_estimate(), mappel::↵
Gauss2DsModel::initial_theta_estimate(), mappel::Gauss1DModel::pixel_hess_update(), mappel::Gauss1DsModel↵
::pixel_hess_update(), mappel::Gauss2DModel::pixel_hess_update(), and mappel::Gauss2DsModel::pixel_hess_↵
update().

9.13.4.47 template<class FillT > PointEmitterModel::ParamT mappel::PointEmitterModel::make_param (FillT *fill*) const
[inherited]

Definition at line 181 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.13.4.48 MatT mappel::PointEmitterModel::make_param_mat () const [inline],[inherited]

Definition at line 172 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.13.4.49 template<class FillT > MatT mappel::PointEmitterModel::make_param_mat (FillT *fill*) const [inherited]

Definition at line 191 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.13.4.50 **CubeT** mappel::PointEmitterModel::make_param_mat_stack (IdxT n) const [inline],[inherited]

Definition at line 176 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.13.4.51 **template<class FillT > CubeT** mappel::PointEmitterModel::make_param_mat_stack (IdxT n, FillT fill) const [inherited]

Definition at line 196 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.13.4.52 **PointEmitterModel::ParamVecT** mappel::PointEmitterModel::make_param_stack (IdxT n) const [inline],[inherited]

Definition at line 168 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

Referenced by mappel::PointEmitterModel::bounded_theta_stack(), and mappel::PointEmitterModel::reflected_theta_stack().

9.13.4.53 **template<class FillT > PointEmitterModel::ParamVecT** mappel::PointEmitterModel::make_param_stack (IdxT n, FillT fill) const [inherited]

Definition at line 186 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.13.4.54 **CompositeDist** mappel::Gauss2DModel::make_prior_beta_position (const ImageSizeT & size, double beta_xpos, double beta_ypos, double mean_l, double kappa_l, double mean_bg, double kappa_bg) [static],[inherited]

Definition at line 193 of file Gauss2DModel.cpp.

References mappel::PointEmitterModel::make_prior_component_intensity(), mappel::PointEmitterModel::make_prior_component_position_beta(), and mappel::ImageFormat2DBase::size.

9.13.4.55 **prior_hessian::TruncatedGammaDist** mappel::PointEmitterModel::make_prior_component_intensity (double mean = default_mean_l, double kappa = default_intensity_kappa) [static],[inherited]

Definition at line 98 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::default_max_l.

Referenced by mappel::Gauss1DsModel::make_default_prior_beta_position(), mappel::Gauss2DModel::make_default_prior_beta_position(), mappel::Gauss1DModel::make_default_prior_beta_position(), mappel::Gauss2DsModel::make_default_prior_beta_position(), mappel::Gauss2DModel::make_default_prior_normal_position(), mappel::Gauss1DsModel::make_default_prior_normal_position(), mappel::Gauss1DModel::make_default_prior_normal_position(), mappel::Gauss2DsModel::make_default_prior_normal_position(), mappel::Gauss2DModel::make_prior_beta_position(), mappel::Gauss1DsModel::make_prior_beta_position(), mappel::Gauss1DModel::make_prior_beta_position(), mappel::Gauss2DsModel::make_prior_beta_position(), mappel::Gauss2DModel::make_prior_normal_position(), mappel::Gauss1DsModel::make_prior_normal_position(), mappel::Gauss1DModel::make_prior_normal_position(), and mappel::Gauss2DsModel::make_prior_normal_position().

9.13.4.56 **prior_hessian::ScaledSymmetricBetaDist** **mappel::PointEmitterModel::make_prior_component_position_beta** (*IdxT size*, *double pos_beta = default_beta_pos*) [static],[inherited]

Definition at line 92 of file PointEmitterModel.cpp.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_beta_position()`, `mappel::Gauss1DModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss1DsModel::make_prior_beta_position()`, `mappel::Gauss2DModel::make_prior_beta_position()`, `mappel::Gauss1DModel::make_prior_beta_position()`, and `mappel::Gauss2DsModel::make_prior_beta_position()`.

9.13.4.57 **prior_hessian::TruncatedNormalDist** **mappel::PointEmitterModel::make_prior_component_position_normal** (*IdxT size*, *double pos_sigma = default_sigma_pos*) [static],[inherited]

Definition at line 85 of file PointEmitterModel.cpp.

Referenced by `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_default_prior_normal_position()`, `mappel::Gauss1DModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, `mappel::Gauss1DsModel::make_prior_normal_position()`, `mappel::Gauss2DModel::make_prior_normal_position()`, `mappel::Gauss1DModel::make_prior_normal_position()`, and `mappel::Gauss2DsModel::make_prior_normal_position()`.

9.13.4.58 **prior_hessian::TruncatedParetoDist** **mappel::PointEmitterModel::make_prior_component_sigma** (*double min_sigma*, *double max_sigma*, *double alpha = default_alpha_sigma*) [static],[inherited]

Definition at line 104 of file PointEmitterModel.cpp.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, `mappel::Gauss1DsModel::make_prior_beta_position()`, `mappel::Gauss2DsModel::make_prior_beta_position()`, `mappel::Gauss1DsModel::make_prior_normal_position()`, and `mappel::Gauss2DsModel::make_prior_normal_position()`.

9.13.4.59 **CompositeDist** **mappel::Gauss2DModel::make_prior_normal_position** (*const ImageSizeT & size*, *double sigma_xpos*, *double beta_ypos*, *double mean_l*, *double kappa_l*, *double mean_bg*, *double kappa_bg*) [static],[inherited]

Definition at line 206 of file Gauss2DModel.cpp.

References `mappel::PointEmitterModel::make_prior_component_intensity()`, `mappel::PointEmitterModel::make_prior_component_position_normal()`, and `mappel::ImageFormat2DBase::size`.

9.13.4.60 **Gauss2DModel::Stencil** **mappel::Gauss2DModel::make_stencil** (*const ParamT & theta*, *bool compute_derivatives = true*) **const** [inline],[inherited]

Make a new Model::Stencil object at theta.

Stencils store all of the important calculations necessary for evaluating the log-likelihood and its derivatives at a particular theta (parameter) value.

This allows re-use of the most expensive computations. Stencils can be easily passed around by reference, and most functions in the `mappel::methods` namespace accept a `const Stencil` reference in place of the model parameter.

Throws `mappel::ModelBoundsError` if not `model.theta_in_bounds(theta)`.

If derivatives will not be computed with this stencil set `compute_derivatives=false`

Parameters

<i>theta</i>	Prameter to evaluate at
<i>compute_derivatives</i>	True to also prepare for derivative computations

Returns

A new [Stencil](#) object ready to compute with

Definition at line 131 of file Gauss2DModel.h.

References `mappel::Gauss2DModel::Stencil::Stencil()`, and `mappel::PointEmitterModel::theta_in_bounds()`.

Referenced by `mappel::Gauss2DModel::initial_theta_estimate()`.

9.13.4.61 Gauss2DMLE & mappel::Gauss2DMLE::operator= (const Gauss2DMLE & o)

Definition at line 55 of file Gauss2DMLE.cpp.

References `mappel::MLEstimator::operator=()`, `mappel::PoissonNoise2DObjective::operator=()`, `mappel::Image↔Format2DBase::operator=()`, `mappel::Gauss2DModel::operator=()`, and `mappel::PointEmitterModel::operator=()`.

9.13.4.62 Gauss2DMLE & mappel::Gauss2DMLE::operator= (Gauss2DMLE && o)

Definition at line 66 of file Gauss2DMLE.cpp.

References `mappel::MLEstimator::operator=()`, `mappel::PoissonNoise2DObjective::operator=()`, `mappel::Image↔Format2DBase::operator=()`, `mappel::Gauss2DModel::operator=()`, and `mappel::PointEmitterModel::operator=()`.

9.13.4.63 void mappel::Gauss2DModel::pixel_grad (int i, int j, const Stencil & s, ParamT & pgrad) const [inline], [inherited]

Definition at line 159 of file Gauss2DModel.h.

References `mappel::Gauss2DModel::Stencil::DX`, `mappel::Gauss2DModel::Stencil::DY`, `mappel::Gauss2DModel::↔Stencil::I()`, `mappel::Gauss2DModel::Stencil::X`, and `mappel::Gauss2DModel::Stencil::Y`.

Referenced by `mappel::Gauss2DModel::pixel_hess_update()`.

9.13.4.64 void mappel::Gauss2DModel::pixel_grad2 (int i, int j, const Stencil & s, ParamT & pgrad2) const [inline], [inherited]

Definition at line 170 of file Gauss2DModel.h.

References `mappel::Gauss2DModel::Stencil::DXS`, `mappel::Gauss2DModel::Stencil::DYS`, `mappel::Gauss2DModel::↔Stencil::I()`, `mappel::Gauss2DModel::psf_sigma`, `mappel::Gauss2DModel::Stencil::X`, and `mappel::Gauss2DModel::↔Stencil::Y`.

9.13.4.65 `void mappel::Gauss2DModel::pixel_hess (int i, int j, const Stencil & s, MatT & hess) const` `[inline]`,
`[inherited]`

Definition at line 181 of file Gauss2DModel.h.

References `mappel::Gauss2DModel::Stencil::DX`, `mappel::Gauss2DModel::Stencil::DXS`, `mappel::Gauss2DModel::Stencil::DY`, `mappel::Gauss2DModel::Stencil::DYS`, `mappel::Gauss2DModel::Stencil::l()`, `mappel::Gauss2DModel::psf_sigma`, `mappel::Gauss2DModel::Stencil::X`, and `mappel::Gauss2DModel::Stencil::Y`.

9.13.4.66 `void mappel::Gauss2DModel::pixel_hess_update (int i, int j, const Stencil & s, double dm_ratio_m1, double dmm_ratio, ParamT & grad, MatT & hess) const` `[inherited]`

pixel derivative inner loop calculations.

Definition at line 282 of file Gauss2DModel.cpp.

References `mappel::Gauss2DModel::Stencil::DX`, `mappel::Gauss2DModel::Stencil::DXS`, `mappel::Gauss2DModel::Stencil::DY`, `mappel::Gauss2DModel::Stencil::DYS`, `mappel::Gauss2DModel::Stencil::l()`, `mappel::PointEmitterModel::make_param()`, `mappel::Gauss2DModel::pixel_grad()`, `mappel::Gauss2DModel::psf_sigma`, `mappel::Gauss2DModel::Stencil::X`, and `mappel::Gauss2DModel::Stencil::Y`.

9.13.4.67 `double mappel::Gauss2DModel::pixel_model_value (int i, int j, const Stencil & s) const` `[inline]`,
`[inherited]`

Definition at line 152 of file Gauss2DModel.h.

References `mappel::Gauss2DModel::Stencil::bg()`, `mappel::Gauss2DModel::Stencil::l()`, `mappel::Gauss2DModel::Stencil::X`, and `mappel::Gauss2DModel::Stencil::Y`.

9.13.4.68 `PointEmitterModel::ParamT mappel::PointEmitterModel::reflected_theta (const ParamT & theta) const` `[inherited]`

Definition at line 276 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::PointEmitterModel::reflected_theta_stack()`.

9.13.4.69 `PointEmitterModel::ParamVecT mappel::PointEmitterModel::reflected_theta_stack (const ParamVecT & theta) const` `[inherited]`

Definition at line 316 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::make_param_stack()`, and `mappel::PointEmitterModel::reflected_theta()`.

9.13.4.70 `void mappel::PointEmitterModel::rename_hyperparam (const std::string & old_name, const std::string & new_name)` `[inline]`, `[inherited]`

Definition at line 244 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.13.4.71 `void mappel::MCMCAdaptor2D::sample_mcmc_candidate (IdxT sample_index, ParamT & candidate, double step_scale = 1.0) const` [inherited]

Definition at line 59 of file MCMCAdaptor2D.cpp.

References `mappel::MCMCAdaptor1D::eta_bg`, `mappel::MCMCAdaptor1D::eta_l`, `mappel::MCMCAdaptor1D::eta_`
`x`, `mappel::MCMCAdaptor2D::eta_y`, `mappel::MCMCAdaptorBase::num_phases`, and `mappel::rng_manager`.

9.13.4.72 `void mappel::MCMCAdaptor2D::sample_mcmc_candidate (IdxT sample_index, ParamT & candidate, const IdxVecT & fixed_parameters_mask, double step_scale = 1.0) const` [inherited]

Definition at line 74 of file MCMCAdaptor2D.cpp.

References `mappel::MCMCAdaptor1D::eta_bg`, `mappel::MCMCAdaptor1D::eta_l`, `mappel::MCMCAdaptor1D::eta_`
`x`, `mappel::MCMCAdaptor2D::eta_y`, `mappel::MCMCAdaptorBase::num_phases`, and `mappel::rng_manager`.

9.13.4.73 `template<class RngT > PointEmitterModel::ParamT mappel::PointEmitterModel::sample_prior (RngT & rng) const` [inherited]

Definition at line 264 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.13.4.74 `PointEmitterModel::ParamT mappel::PointEmitterModel::sample_prior () const` [inline],[inherited]

Definition at line 268 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`, and `mappel::rng_manager`.

9.13.4.75 `void mappel::MCMCAdaptor1D::set_background_mcmc_sampling (double eta_bg = -1)` [inherited]

Definition at line 81 of file MCMCAdaptor1D.cpp.

References `mappel::PointEmitterModel::default_pixel_mean_bg`, `mappel::MCMCAdaptor1D::eta_bg`, `mappel::Point`
`EmitterModel::get_hyperparam_value()`, `mappel::PointEmitterModel::get_lbound()`, `mappel::PointEmitterModel::get_`
`ubound()`, and `mappel::MCMCAdaptorBase::sigma_scale`.

Referenced by `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`.

9.13.4.76 `void mappel::PointEmitterModel::set_bounds (const ParamT & lbound_, const ParamT & ubound_)` [inherited]

Box-type parameter bounds

Modifies the prior bounds to prevent sampling outside the valid box-constraints.

Definition at line 213 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::bounds_epsilon`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitter`
`Model::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

9.13.4.77 `void mappel::PointEmitterModel::set_hyperparam_names (const StringVecT & desc) [inline], [inherited]`

Definition at line 260 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.13.4.78 `void mappel::PointEmitterModel::set_hyperparam_value (const std::string & name, double value) [inline], [inherited]`

Definition at line 240 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.13.4.79 `void mappel::Gauss2DModel::set_hyperparams (const VecT & hyperparams) [inherited]`

Definition at line 109 of file Gauss2DModel.cpp.

References mappel::PointEmitterModel::set_hyperparams(), and mappel::Gauss2DModel::update_internal_1Dsum_↵ estimators().

9.13.4.80 `template<class ImT > void mappel::ImageFormat2DBase::set_image_in_stack (ImageStackT & stack, ImageCoordT n, const ImT & im) const [inherited]`

Definition at line 113 of file ImageFormat2DBase.h.

9.13.4.81 `void mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling (double eta_I = -1) [inherited]`

Definition at line 65 of file MCMCAdaptor1D.cpp.

References mappel::PointEmitterModel::default_mean_I, mappel::MCMCAdaptor1D::eta_I, mappel::PointEmitter↵ Model::get_hyperparam_value(), and mappel::MCMCAdaptorBase::sigma_scale.

Referenced by mappel::MCMCAdaptor1D::MCMCAdaptor1D().

9.13.4.82 `void mappel::PointEmitterModel::set_lbound (const ParamT & lbound) [inherited]`

Definition at line 226 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::bounds_epsilon, mappel::PointEmitterModel::lbound, mappel::PointEmitter↵ Model::num_params, mappel::PointEmitterModel::prior, and mappel::PointEmitterModel::ubound.

Referenced by mappel::Gauss1DsModel::set_min_sigma().

9.13.4.83 `void mappel::MCMCAdaptorBase::set_mcmc_num_phases (IdxT num_phases) [protected], [inherited]`

Definition at line 59 of file MCMCAdaptorBase.cpp.

References mappel::MCMCAdaptorBase::num_phases.

Referenced by mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds(), and mappel::MCMCAdaptor2Ds::MCMCAdaptor2↵ Ds().

9.13.4.84 void mappel::MCMCAdaptorBase::set_mcmc_sigma_scale (double *scale*) [inherited]

Definition at line 39 of file MCMCAdaptorBase.cpp.

References mappel::MCMCAdaptorBase::global_max_mcmc_sigma_scale, and mappel::MCMCAdaptorBase::sigma_↵_scale.

9.13.4.85 void mappel::PointEmitterModel::set_param_names (const StringVecT & *desc*) [inline],[inherited]

Definition at line 252 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.13.4.86 void mappel::Gauss2DModel::set_prior (CompositeDist && *prior_*) [inherited]

Definition at line 97 of file Gauss2DModel.cpp.

References mappel::PointEmitterModel::set_prior(), and mappel::Gauss2DModel::update_internal_1Dsum_↵estimators().

9.13.4.87 void mappel::Gauss2DModel::set_prior (const CompositeDist & *prior_*) [inherited]

Definition at line 103 of file Gauss2DModel.cpp.

References mappel::PointEmitterModel::set_prior(), and mappel::Gauss2DModel::update_internal_1Dsum_↵estimators().

9.13.4.88 void mappel::Gauss2DModel::set_psf_sigma (double *new_psf_sigma*) [inline],[inherited]

Definition at line 146 of file Gauss2DModel.h.

9.13.4.89 void mappel::Gauss2DModel::set_psf_sigma (const VecT & *new_psf_sigma*) [inherited]

Definition at line 123 of file Gauss2DModel.cpp.

References mappel::PointEmitterModel::check_psf_sigma(), mappel::Gauss2DModel::psf_sigma, mappel::Gauss1D_↵Model::set_psf_sigma(), mappel::Gauss2DModel::x_model, and mappel::Gauss2DModel::y_model.

9.13.4.90 void mappel::PointEmitterModel::set_rng_seed (RngSeedT *seed*) [static],[inherited]

Definition at line 110 of file PointEmitterModel.cpp.

References mappel::rng_manager.

9.13.4.91 void mappel::Gauss2DModel::set_size (const ImageSizeT & *size_*) [inherited]

Definition at line 115 of file Gauss2DModel.cpp.

References mappel::ImageFormat2DBase::set_size(), mappel::ImageFormat1DBase::set_size(), mappel::Image_↵Format2DBase::size, mappel::Gauss2DModel::x_model, and mappel::Gauss2DModel::y_model.

9.13.4.92 `void mappel::PointEmitterModel::set_ubound (const ParamT & ubound)` [inherited]

Definition at line 237 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::bounds_epsilon`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::Gauss1DsModel::set_max_sigma()`, and `mappel::Gauss2DsModel::set_max_sigma_ratio()`.

9.13.4.93 `bool mappel::PointEmitterModel::theta_in_bounds (const ParamT & theta) const` [inherited]

Definition at line 257 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsModel::initial_theta_estimate()`, `mappel::Gauss1DModel::make_stencil()`, `mappel::Gauss1DsModel::make_stencil()`, `mappel::Gauss2DModel::make_stencil()`, `mappel::Gauss2DsxModel::make_stencil()`, `mappel::Gauss2DsModel::make_stencil()`, and `mappel::PointEmitterModel::theta_stack_in_bounds()`.

9.13.4.94 `BoolVecT mappel::PointEmitterModel::theta_stack_in_bounds (const ParamVecT & theta) const` [inherited]

Definition at line 296 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, and `mappel::PointEmitterModel::theta_in_bounds()`.

9.13.4.95 `void mappel::Gauss2DModel::update_internal_1Dsum_estimators ()` [protected],[inherited]

Definition at line 91 of file Gauss2DModel.cpp.

References `mappel::PointEmitterModel::get_prior()`, `mappel::Gauss2DModel::make_internal_1Dsum_estimator()`, `mappel::Gauss2DModel::psf_sigma`, `mappel::ImageFormat2DBase::size`, `mappel::Gauss2DModel::x_model`, and `mappel::Gauss2DModel::y_model`.

Referenced by `mappel::Gauss2DModel::debug_internal_sum_model_y()`, `mappel::Gauss2DModel::set_hyperparams()`, and `mappel::Gauss2DModel::set_prior()`.

9.13.5 Member Data Documentation

9.13.5.1 `const double mappel::PointEmitterModel::bounds_epsilon = 1.0E-6` [static],[inherited]

Distance from the boundary to constrain in `bound_theta` and `bounded_theta` methods

Definition at line 52 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::Gauss2DsModel::set_max_sigma_ratio()`, and `mappel::PointEmitterModel::set_ubound()`.

9.13.5.2 `const double mappel::PointEmitterModel::default_alpha_sigma = 2` [static],[inherited]

Default per-pixel background gamma distribution shape

Definition at line 62 of file PointEmitterModel.h.

9.13.5.3 `const double mappel::PointEmitterModel::default_beta_pos = 3` [static],[inherited]

Default position parameter in symmetric beta-distributions

Definition at line 56 of file PointEmitterModel.h.

9.13.5.4 `const double mappel::PointEmitterModel::default_intensity_kappa = 2` [static],[inherited]

Default shape for intensity gamma distributions

Definition at line 60 of file PointEmitterModel.h.

9.13.5.5 `const double mappel::PointEmitterModel::default_max_l = INFINITY` [static],[inherited]

Default maximum emitter intensity

Definition at line 59 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::make_prior_component_intensity()`.

9.13.5.6 `const double mappel::PointEmitterModel::default_mean_l = 300` [static],[inherited]

Default emitter intensity mean

Definition at line 58 of file PointEmitterModel.h.

Referenced by `mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling()`.

9.13.5.7 `const double mappel::PointEmitterModel::default_pixel_mean_bg = 4` [static],[inherited]

Default per-pixel mean background counts

Definition at line 61 of file PointEmitterModel.h.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_beta_position()`, `mappel::Gauss1DModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_default_prior_normal_position()`, `mappel::Gauss1DModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, and `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`.

9.13.5.8 `const double mappel::PointEmitterModel::default_sigma_pos = 1` `[static], [inherited]`

Default position parameter in symmetric beta-distributions

Definition at line 57 of file PointEmitterModel.h.

9.13.5.9 `const std::string mappel::Gauss2DModel::DefaultPriorType = "Normal"` `[static], [inherited]`

Definition at line 51 of file Gauss2DModel.h.

Referenced by `mappel::Gauss2DModel::get_psf_sigma()`.

9.13.5.10 `const std::string mappel::PointEmitterModel::DefaultSeperableInitEstimator = "TrustRegion"` `[static], [inherited]`

Estimator name to use in 1D separable initializations

Definition at line 49 of file PointEmitterModel.h.

Referenced by `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsxyModel::initial_theta_estimate()`, and `mappel::Gauss2DsModel::initial_theta_estimate()`.

9.13.5.11 `const std::vector< std::string > mappel::PoissonNoise2DObjective::estimator_names` `[static], [inherited]`

Definition at line 23 of file PoissonNoise2DObjective.h.

9.13.5.12 `double mappel::MCMCAdaptor1D::eta_bg = 0` `[protected], [inherited]`

The standard deviation for the normally distributed perturbation to `theta_bg` in the random walk MCMC sampling

Definition at line 33 of file MCMCAdaptor1D.h.

Referenced by `mappel::MCMCAdaptor1D::get_stats()`, `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor1D::operator=()`, `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`, and `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`.

9.13.5.13 `double mappel::MCMCAdaptor1D::eta_I = 0` `[protected], [inherited]`

The standard deviation for the normally distributed perturbation to `theta_I` in the random walk MCMC sampling

Definition at line 32 of file MCMCAdaptor1D.h.

Referenced by `mappel::MCMCAdaptor1D::get_stats()`, `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor1D::operator=()`, `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`, and `mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling()`.

9.13.5.14 `double mappel::MCMCAdaptor1D::eta_x=0` `[protected],[inherited]`

The standard deviation for the normally distributed perturbation to theta_x in the random walk MCMC sampling

Definition at line 31 of file MCMCAdaptor1D.h.

Referenced by `mappel::MCMCAdaptor1D::get_stats()`, `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor1D::operator=()`, `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, and `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`.

9.13.5.15 `double mappel::MCMCAdaptor2D::eta_y=0` `[protected],[inherited]`

The standard deviation for the normally distributed perturbation to theta_y in the random walk MCMC sampling

Definition at line 28 of file MCMCAdaptor2D.h.

Referenced by `mappel::MCMCAdaptor2D::get_stats()`, `mappel::MCMCAdaptor2D::MCMCAdaptor2D()`, `mappel::MCMCAdaptor2D::operator=()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, and `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`.

9.13.5.16 `const double mappel::MCMCAdaptorBase::global_default_mcmc_sigma_scale = 0.05` `[static],[inherited]`

Definition at line 16 of file MCMCAdaptorBase.h.

Referenced by `mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds()`, `mappel::MCMCAdaptor2D::MCMCAdaptor2D()`, and `mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds()`.

9.13.5.17 `const double mappel::MCMCAdaptorBase::global_max_mcmc_sigma_scale = 0.5` `[static],[inherited]`

Definition at line 17 of file MCMCAdaptorBase.h.

Referenced by `mappel::MCMCAdaptorBase::MCMCAdaptorBase()`, and `mappel::MCMCAdaptorBase::set_mcmc_sigma_scale()`.

9.13.5.18 `const double mappel::PointEmitterModel::global_max_psf_sigma = 1E2` `[static],[inherited]`

Global maximum for any psf_sigma. Sizes above this value are invalid, and nowhere near useful for practical point emitter localization

Definition at line 54 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::check_psf_sigma()`.

9.13.5.19 `const ImageFormat2DBase::ImageCoordT mappel::ImageFormat2DBase::global_max_size=512` `[static],[inherited]`

Maximum size along any dimension of the image. This is insanely big to catch obvious errors

Definition at line 39 of file ImageFormat2DBase.h.

Referenced by `mappel::ImageFormat2DBase::check_size()`.

9.13.5.20 `const double mappel::PointEmitterModel::global_min_psf_sigma = 1E-1` `[static], [inherited]`

Global minimum for any `psf_sigma`. Sizes below this value are invalid, and nowhere near useful for practical point emitter localization

Definition at line 53 of file `PointEmitterModel.h`.

Referenced by `mappel::PointEmitterModel::check_psf_sigma()`.

9.13.5.21 `const ImageFormat2DBase::ImageCoordT mappel::ImageFormat2DBase::global_min_size = 3` `[static], [inherited]`

Minimum size along any dimension of the image.

Definition at line 38 of file `ImageFormat2DBase.h`.

Referenced by `mappel::ImageFormat2DBase::check_size()`.

9.13.5.22 `ParamT mappel::PointEmitterModel::lbound` `[protected], [inherited]`

Definition at line 148 of file `PointEmitterModel.h`.

Referenced by `mappel::PointEmitterModel::bound_theta()`, `mappel::PointEmitterModel::bounded_theta()`, `mappel::PointEmitterModel::get_lbound()`, `mappel::PointEmitterModel::get_stats()`, `mappel::Gauss1DsModel::initial_theta_estimate()`, `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsModel::initial_theta_estimate()`, `mappel::PointEmitterModel::operator=()`, `mappel::PointEmitterModel::reflected_theta()`, `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::PointEmitterModel::set_prior()`, `mappel::PointEmitterModel::set_ubound()`, and `mappel::PointEmitterModel::theta_in_bounds()`.

9.13.5.23 `const std::string mappel::Gauss2DMLE::name` `[static]`

Definition at line 37 of file `Gauss2DMLE.h`.

9.13.5.24 `const ImageFormat2DBase::ImageCoordT mappel::ImageFormat2DBase::num_dim = 2` `[static], [inherited]`

Number of image dimensions.

Definition at line 37 of file `ImageFormat2DBase.h`.

Referenced by `mappel::ImageFormat2DBase::get_stats()`.

9.13.5.25 `IdxT mappel::PointEmitterModel::num_hyperparams` `[protected], [inherited]`

Definition at line 147 of file `PointEmitterModel.h`.

Referenced by `mappel::PointEmitterModel::get_num_hyperparams()`, `mappel::PointEmitterModel::get_stats()`, `mappel::PointEmitterModel::operator=()`, and `mappel::PointEmitterModel::set_prior()`.

9.13.5.26 `IdxT mappel::PointEmitterModel::num_params` `[protected]`, `[inherited]`

Definition at line 146 of file `PointEmitterModel.h`.

Referenced by `mappel::PointEmitterModel::bound_theta()`, `mappel::PointEmitterModel::bounded_theta()`, `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::get_num_params()`, `mappel::PointEmitterModel::get_stats()`, `mappel::Gauss1DModel::initial_theta_estimate()`, `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsModel::initial_theta_estimate()`, `mappel::PointEmitterModel::make_param()`, `mappel::PointEmitterModel::make_param_mat()`, `mappel::PointEmitterModel::make_param_mat_stack()`, `mappel::PointEmitterModel::make_param_stack()`, `mappel::PointEmitterModel::operator=()`, `mappel::PointEmitterModel::reflected_theta()`, `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::PointEmitterModel::set_prior()`, `mappel::PointEmitterModel::set_ubound()`, and `mappel::PointEmitterModel::theta_in_bounds()`.

9.13.5.27 `IdxT mappel::MCMCAdaptorBase::num_phases` `[protected]`, `[inherited]`

The number of different sampling phases for candidate selection MCMC. Each phase changes a different subset of variables.

Definition at line 29 of file `MCMCAdaptorBase.h`.

Referenced by `mappel::MCMCAdaptorBase::get_mcmc_num_phases()`, `mappel::MCMCAdaptorBase::get_stats()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`, and `mappel::MCMCAdaptorBase::set_mcmc_num_phases()`.

9.13.5.28 `CompositeDist mappel::PointEmitterModel::prior` `[protected]`, `[inherited]`

Definition at line 145 of file `PointEmitterModel.h`.

Referenced by `mappel::Gauss2DModel::debug_internal_sum_model_y()`, `mappel::Gauss2DsModel::debug_internal_sum_model_y()`, `mappel::Gauss2DModel::Gauss2DModel()`, `mappel::Gauss2DsModel::Gauss2DsModel()`, `mappel::PointEmitterModel::get_hyperparam_index()`, `mappel::PointEmitterModel::get_hyperparam_names()`, `mappel::PointEmitterModel::get_hyperparam_value()`, `mappel::PointEmitterModel::get_hyperparams()`, `mappel::Gauss1DsModel::get_max_sigma()`, `mappel::Gauss1DsModel::get_min_sigma()`, `mappel::PointEmitterModel::get_param_names()`, `mappel::PointEmitterModel::get_prior()`, `mappel::PointEmitterModel::get_stats()`, `mappel::PointEmitterModel::has_hyperparam()`, `mappel::PointEmitterModel::operator=()`, `mappel::PointEmitterModel::PointEmitterModel()`, `mappel::PointEmitterModel::rename_hyperparam()`, `mappel::PointEmitterModel::sample_prior()`, `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_hyperparam_names()`, `mappel::PointEmitterModel::set_hyperparam_value()`, `mappel::PointEmitterModel::set_hyperparams()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::Gauss1DsModel::set_max_sigma()`, `mappel::Gauss1DsModel::set_min_sigma()`, `mappel::PointEmitterModel::set_param_names()`, `mappel::PointEmitterModel::set_prior()`, and `mappel::PointEmitterModel::set_ubound()`.

9.13.5.29 `const StringVecT mappel::Gauss2DModel::prior_types` `[static]`, `[inherited]`

Initial value:

```
= { "Beta",
    "Normal"
}
```

Definition at line 50 of file `Gauss2DModel.h`.

Referenced by `mappel::Gauss2DModel::get_psf_sigma()`.

9.13.5.30 VecT mappel::Gauss2DModel::psf_sigma [protected],[inherited]

Standard deviation of the fixed-sigma 1D Gaussian PSF in pixels

Definition at line 104 of file Gauss2DModel.h.

Referenced by mappel::cgauss_compute_estimate(), mappel::cgauss_compute_estimate_debug(), mappel::cgauss_←
_heuristic_compute_estimate(), mappel::Gauss2DModel::Stencil::compute_derivatives(), mappel::Gauss2DModel←
::debug_internal_sum_model_y(), mappel::Gauss2DModel::Gauss2DModel(), mappel::Gauss2DModel::get_psf_←
sigma(), mappel::Gauss2DModel::make_internal_1Dsum_estimator(), mappel::Gauss2DModel::operator=(), mappel←
::Gauss2DModel::pixel_grad2(), mappel::Gauss2DModel::pixel_hess(), mappel::Gauss2DModel::pixel_hess_update(),
mappel::Gauss2DModel::set_psf_sigma(), mappel::Gauss2DModel::Stencil::Stencil(), and mappel::Gauss2DModel←
::update_internal_1Dsum_estimators().

9.13.5.31 double mappel::MCMCAdaptorBase::sigma_scale [protected],[inherited]

A scaling factor for step sizes as a fraction of the size of the domain dimension we are walking in. (0.05 default)

Definition at line 30 of file MCMCAdaptorBase.h.

Referenced by mappel::MCMCAdaptorBase::get_mcmc_sigma_scale(), mappel::MCMCAdaptorBase::get_stats(),
mappel::MCMCAdaptor1D::MCMCAdaptor1D(), mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds(), mappel::MCMC←
Adaptor2D::MCMCAdaptor2D(), mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds(), mappel::MCMCAdaptor1D::set←
_background_mcmc_sampling(), mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling(), and mappel::MCMC←
AdaptorBase::set_mcmc_sigma_scale().

9.13.5.32 ImageSizeT mappel::ImageFormat2DBase::size [protected],[inherited]

Number of pixels in X dimension for 1D image

Definition at line 67 of file ImageFormat2DBase.h.

Referenced by mappel::cgauss_compute_estimate(), mappel::cgauss_compute_estimate_debug(), mappel::cgauss_←
_heuristic_compute_estimate(), mappel::ImageFormat2DBase::check_image_shape(), mappel::Gauss2DModel::←
Stencil::compute_derivatives(), mappel::Gauss2DsModel::Stencil::compute_derivatives(), mappel::Gauss2DModel←
::debug_internal_sum_model_y(), mappel::Gauss2DsModel::debug_internal_sum_model_y(), mappel::methods←
::expected_information(), mappel::Gauss2DModel::Gauss2DModel(), mappel::Gauss2DsMAP::Gauss2DsMA←
P(), mappel::Gauss2DsMLE::Gauss2DsMLE(), mappel::Gauss2DsModel::Gauss2DsModel(), mappel::Image←
Format2DBase::get_num_pixels(), mappel::ImageFormat2DBase::get_size(), mappel::ImageFormat2DBase::get←
_stats(), mappel::methods::likelihood::grad(), mappel::methods::likelihood::grad2(), mappel::methods::likelihood←
::debug::grad_components(), mappel::methods::likelihood::hessian(), mappel::methods::likelihood::debug::hessian←
_components(), mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(),
mappel::methods::likelihood::llh(), mappel::methods::likelihood::debug::llh_components(), mappel::Gauss2DModel←
::make_default_prior_beta_position(), mappel::Gauss2DsModel::make_default_prior_beta_position(), mappel::←
Gauss2DModel::make_default_prior_normal_position(), mappel::Gauss2DsModel::make_default_prior_normal←
_position(), mappel::ImageFormat2DBase::make_image(), mappel::ImageFormat2DBase::make_image_stack(),
mappel::Gauss2DModel::make_internal_1Dsum_estimator(), mappel::Gauss2DsModel::make_internal_1Dsum_←
estimator(), mappel::Gauss2DModel::make_prior_beta_position(), mappel::Gauss2DsModel::make_prior_beta_←
position(), mappel::Gauss2DModel::make_prior_normal_position(), mappel::Gauss2DsModel::make_prior_normal←
_position(), mappel::methods::model_image(), mappel::ImageFormat2DBase::operator=(), mappel::methods←
::likelihood::rllh(), mappel::methods::likelihood::debug::rllh_components(), mappel::ImageFormat2DBase::set_←
size(), mappel::Gauss2DModel::set_size(), mappel::Gauss2DsModel::set_size(), mappel::methods::simulate_image(),
mappel::methods::simulate_image_from_model(), mappel::Gauss2DModel::Stencil::Stencil(), mappel::Gauss2Ds←
Model::Stencil::Stencil(), mappel::Gauss2DModel::update_internal_1Dsum_estimators(), and mappel::Gauss2Ds←
Model::update_internal_1Dsum_estimators().

9.13.5.33 ParamT mappel::PointEmitterModel::ubound [protected],[inherited]

Definition at line 148 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::bound_theta(), mappel::PointEmitterModel::bounded_theta(), mappel::PointEmitterModel::get_stats(), mappel::PointEmitterModel::get_ubound(), mappel::Gauss1DsModel::initial_theta_estimate(), mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::PointEmitterModel::operator=(), mappel::PointEmitterModel::reflected_theta(), mappel::PointEmitterModel::set_bounds(), mappel::PointEmitterModel::set_lbound(), mappel::PointEmitterModel::set_prior(), mappel::PointEmitterModel::set_ubound(), and mappel::PointEmitterModel::theta_in_bounds().

9.13.5.34 Gauss1DSumModelT mappel::Gauss2DModel::x_model [protected],[inherited]

X-model fits 2D images X-axis (column sum)

Definition at line 105 of file Gauss2DModel.h.

Referenced by mappel::Gauss2DModel::debug_internal_sum_model_x(), mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DModel::operator=(), mappel::Gauss2DModel::set_psf_sigma(), mappel::Gauss2DModel::set_size(), and mappel::Gauss2DModel::update_internal_1Dsum_estimators().

9.13.5.35 Gauss1DSumModelT mappel::Gauss2DModel::y_model [protected],[inherited]

Y-model fits 2D images Y-axis (row sum)

Definition at line 106 of file Gauss2DModel.h.

Referenced by mappel::Gauss2DModel::debug_internal_sum_model_y(), mappel::Gauss2DModel::Gauss2DModel(), mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DModel::operator=(), mappel::Gauss2DModel::set_psf_sigma(), mappel::Gauss2DModel::set_size(), and mappel::Gauss2DModel::update_internal_1Dsum_estimators().

The documentation for this class was generated from the following files:


- [Gauss2DMLE.h](#)
- [Gauss2DMLE.cpp](#)

9.14 mappel::Gauss2DModel Class Reference

A base class for 2D Gaussian PSF with fixed but possibly asymmetric sigma.

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/Gauss2DModel.h>
```

Inheritance diagram for mappel::Gauss2DModel:

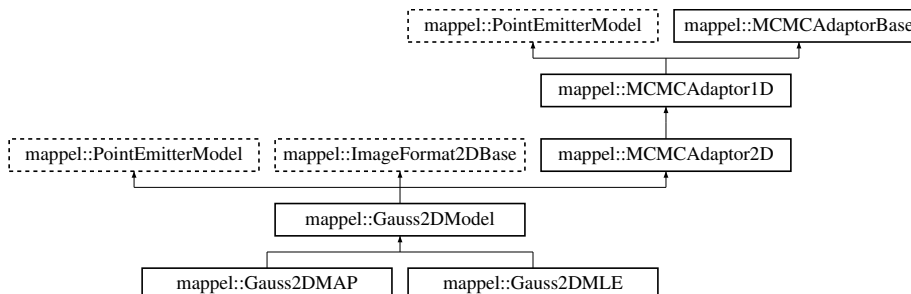

Classes

- class [Stencil](#)
Stencil for 2D fixed-sigma models.

Public Types

- using [Gauss1DSumModelT](#) = [Gauss1DMP](#)
- using [StencilVecT](#) = std::vector< [Stencil](#) >
- using [ParamT](#) = arma::vec
- using [ParamVecT](#) = arma::mat
- using [ImageCoordT](#) = uint32_t
- using [ImagePixelT](#) = double
- template<class CoordT >
using [ImageSizeShapeT](#) = arma::Col< CoordT >
- template<class CoordT >
using [ImageSizeVecShapeT](#) = arma::Mat< CoordT >
- using [ImageSizeT](#) = [ImageSizeShapeT](#)< [ImageCoordT](#) >
- using [ImageSizeVecT](#) = [ImageSizeVecShapeT](#)< [ImageCoordT](#) >
- template<class PixelT >
using [ImageShapeT](#) = arma::Mat< PixelT >
- template<class PixelT >
using [ImageStackShapeT](#) = arma::Cube< PixelT >
- using [ImageT](#) = [ImageShapeT](#)< [ImagePixelT](#) >
- using [ImageStackT](#) = [ImageStackShapeT](#)< [ImagePixelT](#) >

Public Member Functions

- void [set_hyperparams](#) (const [VecT](#) &hyperparams)
- void [set_prior](#) (CompositeDist &&prior_)
- void [set_prior](#) (const CompositeDist &prior_)
- void [set_size](#) (const [ImageSizeT](#) &size_)
- const [VecT](#) & [get_psf_sigma](#) () const
- double [get_psf_sigma](#) (IdxT idx) const
- void [set_psf_sigma](#) (double new_psf_sigma)
- void [set_psf_sigma](#) (const [VecT](#) &new_psf_sigma)
- [StatsT](#) [get_stats](#) () const
- [Stencil](#) [make_stencil](#) (const [ParamT](#) &theta, bool compute_derivatives=true) const
Make a new Model::Stencil object at theta.
- double [pixel_model_value](#) (int i, int j, const [Stencil](#) &s) const
- void [pixel_grad](#) (int i, int j, const [Stencil](#) &s, [ParamT](#) &pgrad) const
- void [pixel_grad2](#) (int i, int j, const [Stencil](#) &s, [ParamT](#) &pgrad2) const
- void [pixel_hess](#) (int i, int j, const [Stencil](#) &s, [MatT](#) &hess) const
- void [pixel_hess_update](#) (int i, int j, const [Stencil](#) &s, double dm_ratio_m1, double dmm_ratio, [ParamT](#) &grad, [MatT](#) &hess) const
pixel derivative inner loop calculations.
- [Stencil](#) [initial_theta_estimate](#) (const [ImageT](#) &im) const
Fast, heuristic estimate of initial theta.
- [Stencil](#) [initial_theta_estimate](#) (const [ImageT](#) &im, const [ParamT](#) &theta_init) const

- [Stencil initial_theta_estimate](#) (const [ImageT](#) &im, const [ParamT](#) &theta_init, const std::string &estimator) const
- [Gauss1DSumModelT debug_internal_sum_model_x](#) () const
- [Gauss1DSumModelT debug_internal_sum_model_y](#) () const
- [IdxT get_num_params](#) () const
- void [check_param_shape](#) (const [ParamT](#) &theta) const
- void [check_param_shape](#) (const [ParamVecT](#) &theta) const
- void [check_psf_sigma](#) (double [psf_sigma](#)) const
- void [check_psf_sigma](#) (const [VecT](#) &[psf_sigma](#)) const
- [ParamT make_param](#) () const
- template<class FillT >
 [ParamT make_param](#) (FillT fill) const
- [ParamVecT make_param_stack](#) ([IdxT](#) n) const
- template<class FillT >
 [ParamVecT make_param_stack](#) ([IdxT](#) n, FillT fill) const
- [MatT make_param_mat](#) () const
- template<class FillT >
 [MatT make_param_mat](#) (FillT fill) const
- [CubeT make_param_mat_stack](#) ([IdxT](#) n) const
- template<class FillT >
 [CubeT make_param_mat_stack](#) ([IdxT](#) n, FillT fill) const
- [CompositeDist & get_prior](#) ()
- const [CompositeDist & get_prior](#) () const
- [IdxT get_num_hyperparams](#) () const
- [VecT get_hyperparams](#) () const
- bool [has_hyperparam](#) (const std::string &name) const
- double [get_hyperparam_value](#) (const std::string &name) const
- int [get_hyperparam_index](#) (const std::string &name) const
- void [set_hyperparam_value](#) (const std::string &name, double value)
- void [rename_hyperparam](#) (const std::string &old_name, const std::string &new_name)
- [StringVecT get_param_names](#) () const
- void [set_param_names](#) (const [StringVecT](#) &desc)
- [StringVecT get_hyperparam_names](#) () const
- void [set_hyperparam_names](#) (const [StringVecT](#) &desc)
- template<class RngT >
 [ParamT sample_prior](#) (RngT &rng) const
- [ParamT sample_prior](#) () const
- void [set_bounds](#) (const [ParamT](#) &lbound, const [ParamT](#) &ubound)
- void [set_lbound](#) (const [ParamT](#) &lbound)
- void [set_ubound](#) (const [ParamT](#) &ubound)
- const [ParamT & get_lbound](#) () const
- const [ParamT & get_ubound](#) () const
- bool [theta_in_bounds](#) (const [ParamT](#) &theta) const
- void [bound_theta](#) ([ParamT](#) &theta, double epsilon=[bounds_epsilon](#)) const
- [ParamT bounded_theta](#) (const [ParamT](#) &theta, double epsilon=[bounds_epsilon](#)) const
- [ParamT reflected_theta](#) (const [ParamT](#) &theta) const
- [BoolVecT theta_stack_in_bounds](#) (const [ParamVecT](#) &theta) const
- [ParamVecT bounded_theta_stack](#) (const [ParamVecT](#) &theta, double epsilon=[bounds_epsilon](#)) const
- [ParamVecT reflected_theta_stack](#) (const [ParamVecT](#) &theta) const
- [ImageT make_image](#) () const
- [ImageStackT make_image_stack](#) ([ImageCoordT](#) n) const
- [ImageCoordT get_size_image_stack](#) (const [ImageStackT](#) &stack) const

- `ImageT get_image_from_stack` (const `ImageStackT` &stack, `ImageCoordT` n) const
- `template<class ImT >`
void `set_image_in_stack` (`ImageStackT` &stack, `ImageCoordT` n, const `ImT` &im) const
- const `ImageSizeT` & `get_size` () const
- `ImageCoordT` `get_size` (`IdxT` idx) const
- `ImageCoordT` `get_num_pixels` () const
- void `check_image_shape` (const `ImageT` &im) const
Check the shape of a single images is correct for model size.
- void `check_image_shape` (const `ImageStackT` &ims) const
Check the shape of a stack of images is correct for model size.
- void `sample_mcmc_candidate` (`IdxT` sample_index, `ParamT` &candidate, double step_scale=1.0) const
- void `sample_mcmc_candidate` (`IdxT` sample_index, `ParamT` &candidate, const `IdxVecT` &fixed_parameters_↵
mask, double step_scale=1.0) const
- void `set_intensity_mcmc_sampling` (double eta_l=-1)
- void `set_background_mcmc_sampling` (double eta_bg=-1)
- void `set_mcmc_sigma_scale` (double scale)
- double `get_mcmc_sigma_scale` () const
- `IdxT` `get_mcmc_num_phases` () const

Static Public Member Functions

- static CompositeDist `make_default_prior` (const `ImageSizeT` &size, const std::string &prior_type)
 - static CompositeDist `make_default_prior_beta_position` (const `ImageSizeT` &size)
 - static CompositeDist `make_default_prior_normal_position` (const `ImageSizeT` &size)
 - static CompositeDist `make_prior_beta_position` (const `ImageSizeT` &size, double beta_xpos, double beta_ypos,
double mean_l, double kappa_l, double mean_bg, double kappa_bg)
 - static CompositeDist `make_prior_normal_position` (const `ImageSizeT` &size, double sigma_xpos, double beta_↵
ypos, double mean_l, double kappa_l, double mean_bg, double kappa_bg)
 - static prior_hessian::TruncatedNormalDist `make_prior_component_position_normal` (`IdxT` size, double pos_↵
sigma=default_sigma_pos)
 - static prior_hessian::ScaledSymmetricBetaDist `make_prior_component_position_beta` (`IdxT` size, double pos_↵
beta=default_beta_pos)
 - static prior_hessian::TruncatedGammaDist `make_prior_component_intensity` (double mean=default_mean_↵
l, double kappa=default_intensity_kappa)
 - static prior_hessian::TruncatedParetoDist `make_prior_component_sigma` (double min_sigma, double max_↵
sigma, double alpha=default_alpha_sigma)
 - static void `set_rng_seed` (`RngSeedT` seed)
 - static `ParallelRngManagerT` & `get_rng_manager` ()
 - static `ParallelRngGeneratorT` & `get_rng_generator` ()
 - static void `check_size` (const `ImageSizeT` &size_)
- Check the size argument for the model.*

Static Public Attributes

- static const `StringVecT` `prior_types`
- static const std::string `DefaultPriorType` = "Normal"
- static const std::string `DefaultSeperableInitEstimator` = "TrustRegion"
- static const double `bounds_epsilon` = 1.0E-6
- static const double `global_min_psf_sigma` = 1E-1

- static const double [global_max_psf_sigma](#) = 1E2
- static const double [default_beta_pos](#) = 3
- static const double [default_sigma_pos](#) = 1
- static const double [default_mean_l](#) = 300
- static const double [default_max_l](#) = INFINITY
- static const double [default_intensity_kappa](#) = 2
- static const double [default_pixel_mean_bg](#) = 4
- static const double [default_alpha_sigma](#) = 2
- static const [ImageCoordT](#) [num_dim](#) =2
- static const [ImageCoordT](#) [global_min_size](#) =3
- static const [ImageCoordT](#) [global_max_size](#) =512
- static const double [global_default_mcmc_sigma_scale](#) = 0.05
- static const double [global_max_mcmc_sigma_scale](#) = 0.5

Protected Member Functions

- [Gauss2DModel](#) (const [ImageSizeT](#) &size, const [VecT](#) &psf_sigma)
- [Gauss2DModel](#) (const [Gauss2DModel](#) &o)
- [Gauss2DModel](#) ([Gauss2DModel](#) &&o)
- [Gauss2DModel](#) & operator= (const [Gauss2DModel](#) &o)
- [Gauss2DModel](#) & operator= ([Gauss2DModel](#) &&o)
- void [update_internal_1Dsum_estimators](#) ()
- void [set_mcmc_num_phases](#) ([IdxT](#) num_phases)

Static Protected Member Functions

- static [Gauss1DSumModelT](#) [make_internal_1Dsum_estimator](#) ([IdxT](#) dim, const [ImageSizeT](#) &size, const [VecT](#) &psf_sigma, const [CompositeDist](#) &prior)

Protected Attributes

- [VecT](#) [psf_sigma](#)
- [Gauss1DSumModelT](#) [x_model](#)
- [Gauss1DSumModelT](#) [y_model](#)
- [CompositeDist](#) [prior](#)
- [IdxT](#) [num_params](#)
- [IdxT](#) [num_hyperparams](#)
- [ParamT](#) [lbound](#)
- [ParamT](#) [ubound](#)
- [ImageSizeT](#) [size](#)
- double [eta_y](#) =0
- double [eta_x](#) =0
- double [eta_l](#) =0
- double [eta_bg](#) =0
- [IdxT](#) [num_phases](#)
- double [sigma_scale](#)

9.14.1 Detailed Description

A base class for 2D Gaussian PSF with fixed but possibly asymmetric sigma.

Definition at line 20 of file Gauss2DModel.h.

9.14.2 Member Typedef Documentation

9.14.2.1 `using mappel::Gauss2DModel::Gauss1DSumModelT = Gauss1DMap`

Definition at line 23 of file Gauss2DModel.h.

9.14.2.2 `using mappel::ImageFormat2DBase::ImageCoordT = uint32_t` [inherited]

Image size coordinate storage type

Definition at line 24 of file ImageFormat2DBase.h.

9.14.2.3 `using mappel::ImageFormat2DBase::ImagePixelT = double` [inherited]

Image pixel storage type

Definition at line 25 of file ImageFormat2DBase.h.

9.14.2.4 `template<class PixelT > using mappel::ImageFormat2DBase::ImageShapeT = arma::Mat<PixelT>` [inherited]

Shape of the data type for a single image

Definition at line 32 of file ImageFormat2DBase.h.

9.14.2.5 `template<class CoordT > using mappel::ImageFormat2DBase::ImageSizeShapeT = arma::Col<CoordT>` [inherited]

Shape of the data type to store a single image's coordinates

Definition at line 27 of file ImageFormat2DBase.h.

9.14.2.6 `using mappel::ImageFormat2DBase::ImageSizeT = ImageSizeShapeT<ImageCoordT>` [inherited]

Data type for a single image size

Definition at line 29 of file ImageFormat2DBase.h.

9.14.2.7 `template<class CoordT > using mappel::ImageFormat2DBase::ImageSizeVecShapeT = arma::Mat<CoordT>`
[inherited]

Shape of the data type to store a vector of image's coordinates

Definition at line 28 of file ImageFormat2DBase.h.

9.14.2.8 `using mappel::ImageFormat2DBase::ImageSizeVecT = ImageSizeVecShapeT<ImageCoordT>`
[inherited]

Data type for a sequence of image sizes

Definition at line 30 of file ImageFormat2DBase.h.

9.14.2.9 `template<class PixelT > using mappel::ImageFormat2DBase::ImageStackShapeT = arma::Cube<PixelT>`
[inherited]

Shape of the data type for a sequence of images

Definition at line 33 of file ImageFormat2DBase.h.

9.14.2.10 `using mappel::ImageFormat2DBase::ImageStackT = ImageStackShapeT<ImagePixelT>`
[inherited]

Data type to represent a sequence of images

Definition at line 35 of file ImageFormat2DBase.h.

9.14.2.11 `using mappel::ImageFormat2DBase::ImageT = ImageShapeT<ImagePixelT>` [inherited]

Data type to represent single image

Definition at line 34 of file ImageFormat2DBase.h.

9.14.2.12 `using mappel::PointEmitterModel::ParamT = arma::vec` [inherited]

Parameter vector

Definition at line 47 of file PointEmitterModel.h.

9.14.2.13 `using mappel::PointEmitterModel::ParamVecT = arma::mat` [inherited]

Vector of parameter vectors

Definition at line 48 of file PointEmitterModel.h.

9.14.2.14 `using mappel::Gauss2DModel::StencilVecT = std::vector<Stencil>`

Definition at line 47 of file Gauss2DModel.h.

9.14.3 Constructor & Destructor Documentation

9.14.3.1 `mappel::Gauss2DModel::Gauss2DModel (const ImageSizeT & size, const VecT & psf_sigma)` [protected]

Definition at line 12 of file Gauss2DModel.cpp.

References `mappel::PointEmitterModel::check_psf_sigma()`, `make_internal_1Dsum_estimator()`, `mappel::PointEmitterModel::prior`, `psf_sigma`, `mappel::ImageFormat2DBase::size`, and `y_model`.

Referenced by `debug_internal_sum_model_y()`.

9.14.3.2 `mappel::Gauss2DModel::Gauss2DModel (const Gauss2DModel & o)` [protected]

Definition at line 22 of file Gauss2DModel.cpp.

References `make_internal_1Dsum_estimator()`, `mappel::PointEmitterModel::prior`, `psf_sigma`, `mappel::ImageFormat2DBase::size`, and `y_model`.

9.14.3.3 `mappel::Gauss2DModel::Gauss2DModel (Gauss2DModel && o)` [protected]

Definition at line 30 of file Gauss2DModel.cpp.

References `make_internal_1Dsum_estimator()`, `mappel::PointEmitterModel::prior`, `psf_sigma`, `mappel::ImageFormat2DBase::size`, and `y_model`.

9.14.4 Member Function Documentation

9.14.4.1 `void mappel::PointEmitterModel::bound_theta (ParamT & theta, double epsilon = bounds_epsilon) const` [inherited]

Definition at line 248 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

9.14.4.2 `PointEmitterModel::ParamT mappel::PointEmitterModel::bounded_theta (const ParamT & theta, double epsilon = bounds_epsilon) const` [inherited]

Definition at line 265 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::PointEmitterModel::bounded_theta_stack()`.

9.14.4.3 **PointEmitterModel::ParamVecT mappel::PointEmitterModel::bounded_theta_stack (const ParamVecT & *theta*, double *epsilon* = bounds_epsilon) const** [inherited]

Definition at line 306 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::bounded_theta(), mappel::PointEmitterModel::check_param_shape(), and mappel::PointEmitterModel::make_param_stack().

9.14.4.4 **void mappel::ImageFormat2DBase::check_image_shape (const ImageT & *im*) const** [inherited]

Check the shape of a single images is correct for model size.

Definition at line 80 of file ImageFormat2DBase.cpp.

References mappel::ImageFormat2DBase::size.

9.14.4.5 **void mappel::ImageFormat2DBase::check_image_shape (const ImageStackT & *ims*) const** [inherited]

Check the shape of a stack of images is correct for model size.

Definition at line 93 of file ImageFormat2DBase.cpp.

References mappel::ImageFormat2DBase::size.

9.14.4.6 **void mappel::PointEmitterModel::check_param_shape (const ParamT & *theta*) const** [inherited]

Definition at line 167 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::num_params.

Referenced by mappel::PointEmitterModel::bound_theta(), mappel::PointEmitterModel::bounded_theta(), mappel::PointEmitterModel::bounded_theta_stack(), mappel::PointEmitterModel::reflected_theta(), mappel::PointEmitterModel::reflected_theta_stack(), mappel::PointEmitterModel::theta_in_bounds(), and mappel::PointEmitterModel::theta_stack_in_bounds().

9.14.4.7 **void mappel::PointEmitterModel::check_param_shape (const ParamVecT & *theta*) const** [inherited]

Definition at line 176 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::num_params.

9.14.4.8 **void mappel::PointEmitterModel::check_psf_sigma (double *psf_sigma*) const** [inherited]

Definition at line 185 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::global_max_psf_sigma, and mappel::PointEmitterModel::global_min_psf_sigma.

Referenced by mappel::Gauss1DModel::Gauss1DModel(), Gauss2DModel(), mappel::Gauss2DsModel::Gauss2DsModel(), mappel::Gauss1DsModel::set_max_sigma(), mappel::Gauss2DsModel::set_max_sigma(), mappel::Gauss1DsModel::set_min_sigma(), mappel::Gauss2DsModel::set_min_sigma(), mappel::Gauss1DModel::set_psf_sigma(), and set_psf_sigma().

9.14.4.9 **void mappel::PointEmitterModel::check_psf_sigma (const VecT & psf_sigma) const** [inherited]

Definition at line 197 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::global_max_psf_sigma, and mappel::PointEmitterModel::global_min_psf_sigma.

9.14.4.10 **void mappel::ImageFormat2DBase::check_size (const ImageSizeT & size_)** [static],[inherited]

Check the size argument for the model.

Definition at line 60 of file ImageFormat2DBase.cpp.

References mappel::ImageFormat2DBase::global_max_size, and mappel::ImageFormat2DBase::global_min_size.

Referenced by mappel::ImageFormat2DBase::ImageFormat2DBase(), and mappel::ImageFormat2DBase::set_size().

9.14.4.11 **Gauss1DSumModelT mappel::Gauss2DModel::debug_internal_sum_model_x () const** [inline]

Definition at line 89 of file Gauss2DModel.h.

References x_model.

9.14.4.12 **Gauss1DSumModelT mappel::Gauss2DModel::debug_internal_sum_model_y () const** [inline]

Definition at line 90 of file Gauss2DModel.h.

References Gauss2DModel(), make_internal_1Dsum_estimator(), operator=(), mappel::PointEmitterModel::prior, psf_sigma, mappel::ImageFormat2DBase::size, update_internal_1Dsum_estimators(), and y_model.

9.14.4.13 **int mappel::PointEmitterModel::get_hyperparam_index (const std::string & name) const** [inline], [inherited]

Definition at line 236 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.14.4.14 **StringVecT mappel::PointEmitterModel::get_hyperparam_names () const** [inline],[inherited]

Definition at line 256 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.14.4.15 **double mappel::PointEmitterModel::get_hyperparam_value (const std::string & name) const** [inline], [inherited]

Definition at line 232 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

Referenced by mappel::MCMCAdaptor1D::set_background_mcmc_sampling(), and mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling().

9.14.4.16 **PointEmitterModel::ParamT** mappel::PointEmitterModel::get_hyperparams () const [inline],
[inherited]

Definition at line 224 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.14.4.17 **ImageFormat2DBase::ImageT** mappel::ImageFormat2DBase::get_image_from_stack (const ImageStackT &
stack, ImageCoordT *n*) const [inline],[inherited]

Definition at line 106 of file ImageFormat2DBase.h.

9.14.4.18 **const PointEmitterModel::ParamT &** mappel::PointEmitterModel::get_lbound () const [inline],
[inherited]

Definition at line 212 of file PointEmitterModel.h.

References mappel::PointEmitterModel::lbound.

Referenced by mappel::MCMCAdaptor1D::MCMCAdaptor1D(), mappel::MCMCAdaptor2D::MCMCAdaptor2D(), and mappel::MCMCAdaptor1D::set_background_mcmc_sampling().

9.14.4.19 **IdxT** mappel::MCMCAdaptorBase::get_mcmc_num_phases () const [inherited]

Definition at line 56 of file MCMCAdaptorBase.cpp.

References mappel::MCMCAdaptorBase::num_phases.

9.14.4.20 **double** mappel::MCMCAdaptorBase::get_mcmc_sigma_scale () const [inherited]

Definition at line 53 of file MCMCAdaptorBase.cpp.

References mappel::MCMCAdaptorBase::sigma_scale.

9.14.4.21 **IdxT** mappel::PointEmitterModel::get_num_hyperparams () const [inline],[inherited]

Definition at line 208 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_hyperparams.

9.14.4.22 **IdxT** mappel::PointEmitterModel::get_num_params () const [inline],[inherited]

Definition at line 160 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.14.4.23 ImageFormat2DBase::ImageCoordT mappel::ImageFormat2DBase::get_num_pixels () const [inline], [inherited]

Definition at line 79 of file ImageFormat2DBase.h.

References mappel::ImageFormat2DBase::size.

Referenced by mappel::ImageFormat2DBase::get_stats().

9.14.4.24 StringVecT mappel::PointEmitterModel::get_param_names () const [inline], [inherited]

Definition at line 248 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.14.4.25 CompositeDist & mappel::PointEmitterModel::get_prior () [inline], [inherited]

Definition at line 200 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

Referenced by update_internal_1Dsum_estimators(), and mappel::Gauss2DsModel::update_internal_1Dsum_↔
estimators().

9.14.4.26 const CompositeDist & mappel::PointEmitterModel::get_prior () const [inline], [inherited]

Definition at line 204 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.14.4.27 const VecT & mappel::Gauss2DModel::get_psf_sigma () const [inline]

Definition at line 142 of file Gauss2DModel.h.

References psf_sigma.

Referenced by get_stats().

9.14.4.28 double mappel::Gauss2DModel::get_psf_sigma (IdxT idx) const

Definition at line 132 of file Gauss2DModel.cpp.

References DefaultPriorType, prior_types, and psf_sigma.

9.14.4.29 ParallelRngGeneratorT & mappel::PointEmitterModel::get_rng_generator () [static], [inherited]

Definition at line 120 of file PointEmitterModel.cpp.

References mappel::rng_manager.

9.14.4.30 **ParallelRngManagerT & mappel::PointEmitterModel::get_rng_manager ()** [static],[inherited]

Definition at line 115 of file PointEmitterModel.cpp.

References mappel::rng_manager.

9.14.4.31 **const ImageFormat2DBase::ImageSizeT & mappel::ImageFormat2DBase::get_size () const** [inline],[inherited]

Definition at line 74 of file ImageFormat2DBase.h.

References mappel::ImageFormat2DBase::size.

9.14.4.32 **ImageFormat2DBase::ImageCoordT mappel::ImageFormat2DBase::get_size (IdxT idx) const** [inherited]

Definition at line 41 of file ImageFormat2DBase.cpp.

References mappel::ImageFormat2DBase::size.

9.14.4.33 **ImageFormat2DBase::ImageCoordT mappel::ImageFormat2DBase::get_size_image_stack (const ImageStackT & stack) const** [inline],[inherited]

Definition at line 99 of file ImageFormat2DBase.h.

9.14.4.34 **StatsT mappel::Gauss2DModel::get_stats () const**

Definition at line 268 of file Gauss2DModel.cpp.

References get_psf_sigma(), mappel::MCMCAdaptor2D::get_stats(), mappel::ImageFormat2DBase::get_stats(), and mappel::PointEmitterModel::get_stats().

9.14.4.35 **const PointEmitterModel::ParamT & mappel::PointEmitterModel::get_ubound () const** [inline],[inherited]

Definition at line 216 of file PointEmitterModel.h.

References mappel::PointEmitterModel::ubound.

Referenced by mappel::Gauss2DsxyModel::get_max_sigma_ratio(), mappel::Gauss2DsModel::get_max_sigma_ratio(), mappel::MCMCAdaptor1D::MCMCAdaptor1D(), mappel::MCMCAdaptor2D::MCMCAdaptor2D(), mappel::MCMCAdaptor1D::set_background_mcmc_sampling(), and mappel::Gauss2DsModel::set_max_sigma_ratio().

9.14.4.36 **bool mappel::PointEmitterModel::has_hyperparam (const std::string & name) const** [inline],[inherited]

Definition at line 228 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.14.4.37 **Gauss2DModel::Stencil** mappel::Gauss2DModel::initial_theta_estimate (const ImageT & *im*) const [inline]

Fast, heuristic estimate of initial theta.

Definition at line 194 of file Gauss2DModel.h.

References mappel::PointEmitterModel::DefaultSeperableInitEstimator, and mappel::PointEmitterModel::make_param().

Referenced by initial_theta_estimate().

9.14.4.38 **Gauss2DModel::Stencil** mappel::Gauss2DModel::initial_theta_estimate (const ImageT & *im*, const ParamT & *theta_init*) const [inline]

Definition at line 201 of file Gauss2DModel.h.

References mappel::PointEmitterModel::DefaultSeperableInitEstimator, and initial_theta_estimate().

9.14.4.39 **Gauss2DModel::Stencil** mappel::Gauss2DModel::initial_theta_estimate (const ImageT & *im*, const ParamT & *theta_init*, const std::string & *estimator*) const

Definition at line 303 of file Gauss2DModel.cpp.

References mappel::Gauss2DModel::Stencil::bg(), mappel::methods::estimate_max(), mappel::Gauss2DModel::Stencil::l(), mappel::PointEmitterModel::lbound, make_stencil(), mappel::PointEmitterModel::num_params, mappel::ImageFormat2DBase::size, mappel::estimator::MLEData::theta, mappel::PointEmitterModel::theta_in_bounds(), mappel::PointEmitterModel::ubound, x_model, and y_model.

9.14.4.40 **CompositeDist** mappel::Gauss2DModel::make_default_prior (const ImageSizeT & *size*, const std::string & *prior_type*) [static]

Definition at line 150 of file Gauss2DModel.cpp.

References mappel::istarts_with(), make_default_prior_beta_position(), and make_default_prior_normal_position().

9.14.4.41 **CompositeDist** mappel::Gauss2DModel::make_default_prior_beta_position (const ImageSizeT & *size*) [static]

Definition at line 171 of file Gauss2DModel.cpp.

References mappel::PointEmitterModel::default_pixel_mean_bg, mappel::PointEmitterModel::make_prior_component_intensity(), mappel::PointEmitterModel::make_prior_component_position_beta(), and mappel::ImageFormat2DBase::size.

Referenced by make_default_prior().

9.14.4.42 **CompositeDist** mappel::Gauss2DModel::make_default_prior_normal_position (const ImageSizeT & *size*) [static]

Definition at line 182 of file Gauss2DModel.cpp.

References mappel::PointEmitterModel::default_pixel_mean_bg, mappel::PointEmitterModel::make_prior_component_intensity(), mappel::PointEmitterModel::make_prior_component_position_normal(), and mappel::ImageFormat2DBase::size.

Referenced by make_default_prior().

9.14.4.43 **ImageFormat2DBase::ImageT** mappel::ImageFormat2DBase::make_image () const [inline],
[inherited]

Definition at line 85 of file ImageFormat2DBase.h.

References mappel::ImageFormat2DBase::size.

9.14.4.44 **ImageFormat2DBase::ImageStackT** mappel::ImageFormat2DBase::make_image_stack (ImageCoordT *n*) const
[inline], [inherited]

Definition at line 92 of file ImageFormat2DBase.h.

References mappel::ImageFormat2DBase::size.

9.14.4.45 **Gauss2DModel::Gauss1DSumModelT** mappel::Gauss2DModel::make_internal_1Dsum_estimator (IdxT *dim*,
const ImageSizeT & *size*, const VecT & *psf_sigma*, const CompositeDist & *prior*) [static], [protected]

Definition at line 62 of file Gauss2DModel.cpp.

References mappel::Gauss1DModel::make_prior_beta_position(), mappel::Gauss1DModel::make_prior_normal_↵
position(), psf_sigma, and mappel::ImageFormat2DBase::size.

Referenced by debug_internal_sum_model_y(), Gauss2DModel(), and update_internal_1Dsum_estimators().

9.14.4.46 **PointEmitterModel::ParamT** mappel::PointEmitterModel::make_param () const [inline], [inherited]

Definition at line 164 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

Referenced by mappel::Gauss1DModel::initial_theta_estimate(), mappel::Gauss1DsModel::initial_theta_estimate(),
initial_theta_estimate(), mappel::Gauss2DsxyModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_↵
_estimate(), mappel::Gauss1DModel::pixel_hess_update(), mappel::Gauss1DsModel::pixel_hess_update(), pixel_↵
hess_update(), and mappel::Gauss2DsModel::pixel_hess_update().

9.14.4.47 **template<class FillT > PointEmitterModel::ParamT** mappel::PointEmitterModel::make_param (FillT *fill*) const
[inherited]

Definition at line 181 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.14.4.48 **MatT** mappel::PointEmitterModel::make_param_mat () const [inline], [inherited]

Definition at line 172 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.14.4.49 `template<class FillT > MatT mappel::PointEmitterModel::make_param_mat (FillT fill) const` `[inherited]`

Definition at line 191 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.14.4.50 `CubeT mappel::PointEmitterModel::make_param_mat_stack (IdxT n) const` `[inline],[inherited]`

Definition at line 176 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.14.4.51 `template<class FillT > CubeT mappel::PointEmitterModel::make_param_mat_stack (IdxT n, FillT fill) const`
`[inherited]`

Definition at line 196 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.14.4.52 `PointEmitterModel::ParamVecT mappel::PointEmitterModel::make_param_stack (IdxT n) const` `[inline],[inherited]`

Definition at line 168 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

Referenced by mappel::PointEmitterModel::bounded_theta_stack(), and mappel::PointEmitterModel::reflected_theta↔_stack().

9.14.4.53 `template<class FillT > PointEmitterModel::ParamVecT mappel::PointEmitterModel::make_param_stack (IdxT n, FillT fill) const` `[inherited]`

Definition at line 186 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.14.4.54 `CompositeDist mappel::Gauss2DModel::make_prior_beta_position (const ImageSizeT & size, double beta_xpos, double beta_ypos, double mean_l, double kappa_l, double mean_bg, double kappa_bg)` `[static]`

Definition at line 193 of file Gauss2DModel.cpp.

References mappel::PointEmitterModel::make_prior_component_intensity(), mappel::PointEmitterModel::make_prior↔_component_position_beta(), and mappel::ImageFormat2DBase::size.

9.14.4.55 **prior_hessian::TruncatedGammaDist** mappel::PointEmitterModel::make_prior_component_intensity (double *mean* = default_mean_l, double *kappa* = default_intensity_kappa) [static],[inherited]

Definition at line 98 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::default_max_l.

Referenced by mappel::Gauss1DsModel::make_default_prior_beta_position(), make_default_prior_beta_position(), mappel::Gauss1DModel::make_default_prior_beta_position(), mappel::Gauss2DsModel::make_default_prior_beta_position(), make_default_prior_normal_position(), mappel::Gauss1DsModel::make_default_prior_normal_position(), mappel::Gauss1DModel::make_default_prior_normal_position(), mappel::Gauss2DsModel::make_default_prior_normal_position(), make_prior_beta_position(), mappel::Gauss1DsModel::make_prior_beta_position(), mappel::Gauss1DModel::make_prior_beta_position(), mappel::Gauss2DsModel::make_prior_beta_position(), make_prior_normal_position(), mappel::Gauss1DsModel::make_prior_normal_position(), mappel::Gauss1DModel::make_prior_normal_position(), and mappel::Gauss2DsModel::make_prior_normal_position().

9.14.4.56 **prior_hessian::ScaledSymmetricBetaDist** mappel::PointEmitterModel::make_prior_component_position_beta (IdxT *size*, double *pos_beta* = default_beta_pos) [static],[inherited]

Definition at line 92 of file PointEmitterModel.cpp.

Referenced by mappel::Gauss1DsModel::make_default_prior_beta_position(), make_default_prior_beta_position(), mappel::Gauss1DModel::make_default_prior_beta_position(), mappel::Gauss2DsModel::make_default_prior_beta_position(), mappel::Gauss1DsModel::make_prior_beta_position(), make_prior_beta_position(), mappel::Gauss1DModel::make_prior_beta_position(), and mappel::Gauss2DsModel::make_prior_beta_position().

9.14.4.57 **prior_hessian::TruncatedNormalDist** mappel::PointEmitterModel::make_prior_component_position_normal (IdxT *size*, double *pos_sigma* = default_sigma_pos) [static],[inherited]

Definition at line 85 of file PointEmitterModel.cpp.

Referenced by mappel::Gauss1DsModel::make_default_prior_normal_position(), make_default_prior_normal_position(), mappel::Gauss1DModel::make_default_prior_normal_position(), mappel::Gauss2DsModel::make_default_prior_normal_position(), make_prior_normal_position(), mappel::Gauss1DsModel::make_prior_normal_position(), mappel::Gauss1DModel::make_prior_normal_position(), and mappel::Gauss2DsModel::make_prior_normal_position().

9.14.4.58 **prior_hessian::TruncatedParetoDist** mappel::PointEmitterModel::make_prior_component_sigma (double *min_sigma*, double *max_sigma*, double *alpha* = default_alpha_sigma) [static],[inherited]

Definition at line 104 of file PointEmitterModel.cpp.

Referenced by mappel::Gauss1DsModel::make_default_prior_beta_position(), mappel::Gauss2DsModel::make_default_prior_beta_position(), mappel::Gauss1DsModel::make_default_prior_normal_position(), mappel::Gauss2DsModel::make_default_prior_normal_position(), mappel::Gauss1DsModel::make_prior_beta_position(), mappel::Gauss2DsModel::make_prior_beta_position(), mappel::Gauss1DsModel::make_prior_normal_position(), and mappel::Gauss2DsModel::make_prior_normal_position().

9.14.4.59 **CompositeDist** mappel::Gauss2DModel::make_prior_normal_position (const ImageSizeT & *size*, double *sigma_xpos*, double *beta_ypos*, double *mean_l*, double *kappa_l*, double *mean_bg*, double *kappa_bg*) [static]

Definition at line 206 of file Gauss2DModel.cpp.

References mappel::PointEmitterModel::make_prior_component_intensity(), mappel::PointEmitterModel::make_prior_component_position_normal(), and mappel::ImageFormat2DBase::size.

9.14.4.60 Gauss2DModel::Stencil mappel::Gauss2DModel::make_stencil (const ParamT & theta, bool compute_derivatives = true) const [inline]

Make a new Model::Stencil object at theta.

Stencils store all of the important calculations necessary for evaluating the log-likelihood and its derivatives at a particular theta (parameter) value.

This allows re-use of the most expensive computations. Stencils can be easily passed around by reference, and most functions in the [mappel::methods](#) namespace accept a const [Stencil](#) reference in place of the model parameter.

Throws [mappel::ModelBoundsError](#) if not model.theta_in_bounds(theta).

If derivatives will not be computed with this stencil set compute_derivatives=false

Parameters

<i>theta</i>	Parameter to evaluate at
<i>compute_derivatives</i>	True to also prepare for derivative computations

Returns

A new [Stencil](#) object ready to compute with

Definition at line 131 of file Gauss2DModel.h.

References [mappel::Gauss2DModel::Stencil::Stencil\(\)](#), and [mappel::PointEmitterModel::theta_in_bounds\(\)](#).

Referenced by [initial_theta_estimate\(\)](#).

9.14.4.61 Gauss2DModel & mappel::Gauss2DModel::operator= (const Gauss2DModel & o) [protected]

Definition at line 38 of file Gauss2DModel.cpp.

References [mappel::MCMCAdaptor2D::operator=\(\)](#), [psf_sigma](#), [x_model](#), and [y_model](#).

Referenced by [debug_internal_sum_model_y\(\)](#), [mappel::Gauss2DModel::operator=\(\)](#), and [mappel::Gauss2DModel::operator=\(\)](#).

9.14.4.62 Gauss2DModel & mappel::Gauss2DModel::operator= (Gauss2DModel && o) [protected]

Definition at line 49 of file Gauss2DModel.cpp.

References [mappel::MCMCAdaptor2D::operator=\(\)](#), [psf_sigma](#), [x_model](#), and [y_model](#).

9.14.4.63 void mappel::Gauss2DModel::pixel_grad (int i, int j, const Stencil & s, ParamT & pgrad) const [inline]

Definition at line 159 of file Gauss2DModel.h.

References [mappel::Gauss2DModel::Stencil::DX](#), [mappel::Gauss2DModel::Stencil::DY](#), [mappel::Gauss2DModel::Stencil::I\(\)](#), [mappel::Gauss2DModel::Stencil::X](#), and [mappel::Gauss2DModel::Stencil::Y](#).

Referenced by [pixel_hess_update\(\)](#).

9.14.4.64 `void mappel::Gauss2DModel::pixel_grad2 (int i, int j, const Stencil & s, ParamT & pgrad2) const` `[inline]`

Definition at line 170 of file Gauss2DModel.h.

References `mappel::Gauss2DModel::Stencil::DXS`, `mappel::Gauss2DModel::Stencil::DYS`, `mappel::Gauss2DModel::Stencil::l()`, `psf_sigma`, `mappel::Gauss2DModel::Stencil::X`, and `mappel::Gauss2DModel::Stencil::Y`.

9.14.4.65 `void mappel::Gauss2DModel::pixel_hess (int i, int j, const Stencil & s, MatT & hess) const` `[inline]`

Definition at line 181 of file Gauss2DModel.h.

References `mappel::Gauss2DModel::Stencil::DX`, `mappel::Gauss2DModel::Stencil::DXS`, `mappel::Gauss2DModel::Stencil::DY`, `mappel::Gauss2DModel::Stencil::DYS`, `mappel::Gauss2DModel::Stencil::l()`, `psf_sigma`, `mappel::Gauss2DModel::Stencil::X`, and `mappel::Gauss2DModel::Stencil::Y`.

9.14.4.66 `void mappel::Gauss2DModel::pixel_hess_update (int i, int j, const Stencil & s, double dm_ratio_m1, double dmm_ratio, ParamT & grad, MatT & hess) const`

pixel derivative inner loop calculations.

Definition at line 282 of file Gauss2DModel.cpp.

References `mappel::Gauss2DModel::Stencil::DX`, `mappel::Gauss2DModel::Stencil::DXS`, `mappel::Gauss2DModel::Stencil::DY`, `mappel::Gauss2DModel::Stencil::DYS`, `mappel::Gauss2DModel::Stencil::l()`, `mappel::PointEmitterModel::make_param()`, `pixel_grad()`, `psf_sigma`, `mappel::Gauss2DModel::Stencil::X`, and `mappel::Gauss2DModel::Stencil::Y`.

9.14.4.67 `double mappel::Gauss2DModel::pixel_model_value (int i, int j, const Stencil & s) const` `[inline]`

Definition at line 152 of file Gauss2DModel.h.

References `mappel::Gauss2DModel::Stencil::bg()`, `mappel::Gauss2DModel::Stencil::l()`, `mappel::Gauss2DModel::Stencil::X`, and `mappel::Gauss2DModel::Stencil::Y`.

9.14.4.68 `PointEmitterModel::ParamT mappel::PointEmitterModel::reflected_theta (const ParamT & theta) const` `[inherited]`

Definition at line 276 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::PointEmitterModel::reflected_theta_stack()`.

9.14.4.69 `PointEmitterModel::ParamVecT mappel::PointEmitterModel::reflected_theta_stack (const ParamVecT & theta) const` `[inherited]`

Definition at line 316 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::make_param_stack()`, and `mappel::PointEmitterModel::reflected_theta()`.

9.14.4.70 `void mappel::PointEmitterModel::rename_hyperparam (const std::string & old_name, const std::string & new_name)`
`[inline],[inherited]`

Definition at line 244 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

9.14.4.71 `void mappel::MCMCAdaptor2D::sample_mcmc_candidate (IdxT sample_index, ParamT & candidate, double step_scale = 1.0) const` `[inherited]`

Definition at line 59 of file `MCMCAdaptor2D.cpp`.

References `mappel::MCMCAdaptor1D::eta_bg`, `mappel::MCMCAdaptor1D::eta_l`, `mappel::MCMCAdaptor1D::eta_↔x`, `mappel::MCMCAdaptor2D::eta_y`, `mappel::MCMCAdaptorBase::num_phases`, and `mappel::rng_manager`.

9.14.4.72 `void mappel::MCMCAdaptor2D::sample_mcmc_candidate (IdxT sample_index, ParamT & candidate, const IdxVecT & fixed_parameters_mask, double step_scale = 1.0) const` `[inherited]`

Definition at line 74 of file `MCMCAdaptor2D.cpp`.

References `mappel::MCMCAdaptor1D::eta_bg`, `mappel::MCMCAdaptor1D::eta_l`, `mappel::MCMCAdaptor1D::eta_↔x`, `mappel::MCMCAdaptor2D::eta_y`, `mappel::MCMCAdaptorBase::num_phases`, and `mappel::rng_manager`.

9.14.4.73 `template<class RngT > PointEmitterModel::ParamT mappel::PointEmitterModel::sample_prior (RngT & rng) const`
`[inherited]`

Definition at line 264 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

9.14.4.74 `PointEmitterModel::ParamT mappel::PointEmitterModel::sample_prior () const` `[inline],[inherited]`

Definition at line 268 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`, and `mappel::rng_manager`.

9.14.4.75 `void mappel::MCMCAdaptor1D::set_background_mcmc_sampling (double eta_bg = -1)` `[inherited]`

Definition at line 81 of file `MCMCAdaptor1D.cpp`.

References `mappel::PointEmitterModel::default_pixel_mean_bg`, `mappel::MCMCAdaptor1D::eta_bg`, `mappel::PointEmitterModel::get_hyperparam_value()`, `mappel::PointEmitterModel::get_lbound()`, `mappel::PointEmitterModel::get_↔ubound()`, and `mappel::MCMCAdaptorBase::sigma_scale`.

Referenced by `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`.

9.14.4.76 `void mappel::PointEmitterModel::set_bounds (const ParamT & lbound_, const ParamT & ubound_)`
`[inherited]`

Box-type parameter bounds

Modifies the prior bounds to prevent sampling outside the valid box-constraints.

Definition at line 213 of file `PointEmitterModel.cpp`.

References `mappel::PointEmitterModel::bounds_epsilon`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

9.14.4.77 `void mappel::PointEmitterModel::set_hyperparam_names (const StringVecT & desc)` `[inline]`,
`[inherited]`

Definition at line 260 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

9.14.4.78 `void mappel::PointEmitterModel::set_hyperparam_value (const std::string & name, double value)` `[inline]`,
`[inherited]`

Definition at line 240 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

9.14.4.79 `void mappel::Gauss2DModel::set_hyperparams (const VecT & hyperparams)`

Definition at line 109 of file `Gauss2DModel.cpp`.

References `mappel::PointEmitterModel::set_hyperparams()`, and `update_internal_1Dsum_estimators()`.

9.14.4.80 `template<class ImT > void mappel::ImageFormat2DBase::set_image_in_stack (ImageStackT & stack, ImageCoordT n, const ImT & im) const` `[inherited]`

Definition at line 113 of file `ImageFormat2DBase.h`.

9.14.4.81 `void mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling (double eta_I = -1)` `[inherited]`

Definition at line 65 of file `MCMCAdaptor1D.cpp`.

References `mappel::PointEmitterModel::default_mean_I`, `mappel::MCMCAdaptor1D::eta_I`, `mappel::PointEmitterModel::get_hyperparam_value()`, and `mappel::MCMCAdaptorBase::sigma_scale`.

Referenced by `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`.

9.14.4.82 `void mappel::PointEmitterModel::set_lbound (const ParamT & lbound)` `[inherited]`

Definition at line 226 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::bounds_epsilon`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::Gauss1DsModel::set_min_sigma()`.

9.14.4.83 `void mappel::MCMCAdaptorBase::set_mcmc_num_phases (IdxT num_phases)` `[protected],[inherited]`

Definition at line 59 of file MCMCAdaptorBase.cpp.

References `mappel::MCMCAdaptorBase::num_phases`.

Referenced by `mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds()`, and `mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds()`.

9.14.4.84 `void mappel::MCMCAdaptorBase::set_mcmc_sigma_scale (double scale)` `[inherited]`

Definition at line 39 of file MCMCAdaptorBase.cpp.

References `mappel::MCMCAdaptorBase::global_max_mcmc_sigma_scale`, and `mappel::MCMCAdaptorBase::sigma_scale`.

9.14.4.85 `void mappel::PointEmitterModel::set_param_names (const StringVecT & desc)` `[inline],[inherited]`

Definition at line 252 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.14.4.86 `void mappel::Gauss2DModel::set_prior (CompositeDist && prior_)`

Definition at line 97 of file Gauss2DModel.cpp.

References `mappel::PointEmitterModel::set_prior()`, and `update_internal_1Dsum_estimators()`.

9.14.4.87 `void mappel::Gauss2DModel::set_prior (const CompositeDist & prior_)`

Definition at line 103 of file Gauss2DModel.cpp.

References `mappel::PointEmitterModel::set_prior()`, and `update_internal_1Dsum_estimators()`.

9.14.4.88 `void mappel::Gauss2DModel::set_psf_sigma (double new_psf_sigma)` `[inline]`

Definition at line 146 of file Gauss2DModel.h.

9.14.4.89 void mappel::Gauss2DModel::set_psf_sigma (const VecT & new_psf_sigma)

Definition at line 123 of file Gauss2DModel.cpp.

References mappel::PointEmitterModel::check_psf_sigma(), psf_sigma, mappel::Gauss1DModel::set_psf_sigma(), x_model, and y_model.

9.14.4.90 void mappel::PointEmitterModel::set_rng_seed (RngSeedT seed) [static], [inherited]

Definition at line 110 of file PointEmitterModel.cpp.

References mappel::rng_manager.

9.14.4.91 void mappel::Gauss2DModel::set_size (const ImageSizeT & size_)

Definition at line 115 of file Gauss2DModel.cpp.

References mappel::ImageFormat2DBase::set_size(), mappel::ImageFormat1DBase::set_size(), mappel::ImageFormat2DBase::size, x_model, and y_model.

9.14.4.92 void mappel::PointEmitterModel::set_ubound (const ParamT & ubound) [inherited]

Definition at line 237 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::bounds_epsilon, mappel::PointEmitterModel::lbound, mappel::PointEmitterModel::num_params, mappel::PointEmitterModel::prior, and mappel::PointEmitterModel::ubound.

Referenced by mappel::Gauss1DsModel::set_max_sigma(), and mappel::Gauss2DsModel::set_max_sigma_ratio().

9.14.4.93 bool mappel::PointEmitterModel::theta_in_bounds (const ParamT & theta) const [inherited]

Definition at line 257 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::check_param_shape(), mappel::PointEmitterModel::lbound, mappel::PointEmitterModel::num_params, and mappel::PointEmitterModel::ubound.

Referenced by initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::Gauss1DModel::make_stencil(), mappel::Gauss1DsModel::make_stencil(), make_stencil(), mappel::Gauss2DsxyModel::make_stencil(), mappel::Gauss2DsModel::make_stencil(), and mappel::PointEmitterModel::theta_stack_in_bounds().

9.14.4.94 BoolVecT mappel::PointEmitterModel::theta_stack_in_bounds (const ParamVecT & theta) const [inherited]

Definition at line 296 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::check_param_shape(), and mappel::PointEmitterModel::theta_in_bounds().

9.14.4.95 `void mappel::Gauss2DModel::update_internal_1Dsum_estimators ()` [protected]

Definition at line 91 of file Gauss2DModel.cpp.

References `mappel::PointEmitterModel::get_prior()`, `make_internal_1Dsum_estimator()`, `psf_sigma`, `mappel::Image2DFormat2DBase::size`, `x_model`, and `y_model`.

Referenced by `debug_internal_sum_model_y()`, `set_hyperparams()`, and `set_prior()`.

9.14.5 Member Data Documentation

9.14.5.1 `const double mappel::PointEmitterModel::bounds_epsilon = 1.0E-6` [static],[inherited]

Distance from the boundary to constrain in `bound_theta` and `bounded_theta` methods

Definition at line 52 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::Gauss2DModel::set_max_sigma_ratio()`, and `mappel::PointEmitterModel::set_ubound()`.

9.14.5.2 `const double mappel::PointEmitterModel::default_alpha_sigma = 2` [static],[inherited]

Default per-pixel background gamma distribution shape

Definition at line 62 of file PointEmitterModel.h.

9.14.5.3 `const double mappel::PointEmitterModel::default_beta_pos = 3` [static],[inherited]

Default position parameter in symmetric beta-distributions

Definition at line 56 of file PointEmitterModel.h.

9.14.5.4 `const double mappel::PointEmitterModel::default_intensity_kappa = 2` [static],[inherited]

Default shape for intensity gamma distributions

Definition at line 60 of file PointEmitterModel.h.

9.14.5.5 `const double mappel::PointEmitterModel::default_max_I = INFINITY` [static],[inherited]

Default maximum emitter intensity

Definition at line 59 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::make_prior_component_intensity()`.

9.14.5.6 `const double mappel::PointEmitterModel::default_mean_l = 300` `[static], [inherited]`

Default emitter intensity mean

Definition at line 58 of file PointEmitterModel.h.

Referenced by `mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling()`.

9.14.5.7 `const double mappel::PointEmitterModel::default_pixel_mean_bg = 4` `[static], [inherited]`

Default per-pixel mean background counts

Definition at line 61 of file PointEmitterModel.h.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `make_default_prior_beta_position()`, `mappel::Gauss1DModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `make_default_prior_normal_position()`, `mappel::Gauss1DModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, and `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`.

9.14.5.8 `const double mappel::PointEmitterModel::default_sigma_pos = 1` `[static], [inherited]`

Default position parameter in symmetric beta-distributions

Definition at line 57 of file PointEmitterModel.h.

9.14.5.9 `const std::string mappel::Gauss2DModel::DefaultPriorType = "Normal"` `[static]`

Definition at line 51 of file Gauss2DModel.h.

Referenced by `get_psf_sigma()`.

9.14.5.10 `const std::string mappel::PointEmitterModel::DefaultSeperableInitEstimator = "TrustRegion"` `[static], [inherited]`

Estimator name to use in 1D separable initializations

Definition at line 49 of file PointEmitterModel.h.

Referenced by `initial_theta_estimate()`, `mappel::Gauss2DsxyModel::initial_theta_estimate()`, and `mappel::Gauss2DsModel::initial_theta_estimate()`.

9.14.5.11 `double mappel::MCMCAdaptor1D::eta_bg = 0` `[protected], [inherited]`

The standard deviation for the normally distributed perturbation to `theta_bg` in the random walk MCMC sampling

Definition at line 33 of file MCMCAdaptor1D.h.

Referenced by `mappel::MCMCAdaptor1D::get_stats()`, `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor1D::operator=()`, `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`, and `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`.

9.14.5.12 `double mappel::MCMCAdaptor1D::eta_l=0` `[protected],[inherited]`

The standard deviation for the normally distributed perturbation to `theta_l` in the random walk MCMC sampling

Definition at line 32 of file `MCMCAdaptor1D.h`.

Referenced by `mappel::MCMCAdaptor1D::get_stats()`, `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor1D::operator=()`, `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`, and `mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling()`.

9.14.5.13 `double mappel::MCMCAdaptor1D::eta_x=0` `[protected],[inherited]`

The standard deviation for the normally distributed perturbation to `theta_x` in the random walk MCMC sampling

Definition at line 31 of file `MCMCAdaptor1D.h`.

Referenced by `mappel::MCMCAdaptor1D::get_stats()`, `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor1D::operator=()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, and `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`.

9.14.5.14 `double mappel::MCMCAdaptor2D::eta_y=0` `[protected],[inherited]`

The standard deviation for the normally distributed perturbation to `theta_y` in the random walk MCMC sampling

Definition at line 28 of file `MCMCAdaptor2D.h`.

Referenced by `mappel::MCMCAdaptor2D::get_stats()`, `mappel::MCMCAdaptor2D::MCMCAdaptor2D()`, `mappel::MCMCAdaptor2D::operator=()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, and `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`.

9.14.5.15 `const double mappel::MCMCAdaptorBase::global_default_mcmc_sigma_scale = 0.05` `[static],[inherited]`

Definition at line 16 of file `MCMCAdaptorBase.h`.

Referenced by `mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds()`, `mappel::MCMCAdaptor2D::MCMCAdaptor2D()`, and `mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds()`.

9.14.5.16 `const double mappel::MCMCAdaptorBase::global_max_mcmc_sigma_scale = 0.5` `[static],[inherited]`

Definition at line 17 of file `MCMCAdaptorBase.h`.

Referenced by `mappel::MCMCAdaptorBase::MCMCAdaptorBase()`, and `mappel::MCMCAdaptorBase::set_mcmc_sigma_scale()`.

9.14.5.17 `const double mappel::PointEmitterModel::global_max_psf_sigma = 1E2` `[static],[inherited]`

Global maximum for any `psf_sigma`. Sizes above this value are invalid, and nowhere near useful for practical point emitter localization

Definition at line 54 of file `PointEmitterModel.h`.

Referenced by `mappel::PointEmitterModel::check_psf_sigma()`.

9.14.5.18 `const ImageFormat2DBase::ImageCoordT mappel::ImageFormat2DBase::global_max_size = 512` `[static]`,
`[inherited]`

Maximum size along any dimension of the image. This is insanely big to catch obvious errors

Definition at line 39 of file ImageFormat2DBase.h.

Referenced by `mappel::ImageFormat2DBase::check_size()`.

9.14.5.19 `const double mappel::PointEmitterModel::global_min_psf_sigma = 1E-1` `[static]`, `[inherited]`

Global minimum for any `psf_sigma`. Sizes below this value are invalid, and nowhere near useful for practical point emitter localization

Definition at line 53 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::check_psf_sigma()`.

9.14.5.20 `const ImageFormat2DBase::ImageCoordT mappel::ImageFormat2DBase::global_min_size = 3` `[static]`,
`[inherited]`

Minimum size along any dimension of the image.

Definition at line 38 of file ImageFormat2DBase.h.

Referenced by `mappel::ImageFormat2DBase::check_size()`.

9.14.5.21 `ParamT mappel::PointEmitterModel::lbound` `[protected]`, `[inherited]`

Definition at line 148 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::bound_theta()`, `mappel::PointEmitterModel::bounded_theta()`, `mappel::PointEmitterModel::get_lbound()`, `mappel::PointEmitterModel::get_stats()`, `mappel::Gauss1DsModel::initial_theta_estimate()`, `initial_theta_estimate()`, `mappel::Gauss2DsModel::initial_theta_estimate()`, `mappel::PointEmitterModel::operator=()`, `mappel::PointEmitterModel::reflected_theta()`, `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::PointEmitterModel::set_prior()`, `mappel::PointEmitterModel::set_ubound()`, and `mappel::PointEmitterModel::theta_in_bounds()`.

9.14.5.22 `const ImageFormat2DBase::ImageCoordT mappel::ImageFormat2DBase::num_dim = 2` `[static]`,
`[inherited]`

Number of image dimensions.

Definition at line 37 of file ImageFormat2DBase.h.

Referenced by `mappel::ImageFormat2DBase::get_stats()`.

9.14.5.23 `IdxT mappel::PointEmitterModel::num_hyperparams` `[protected]`, `[inherited]`

Definition at line 147 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::get_num_hyperparams()`, `mappel::PointEmitterModel::get_stats()`, `mappel::PointEmitterModel::operator=()`, and `mappel::PointEmitterModel::set_prior()`.

9.14.5.24 `IdxT mappel::PointEmitterModel::num_params` `[protected]`, `[inherited]`

Definition at line 146 of file `PointEmitterModel.h`.

Referenced by `mappel::PointEmitterModel::bound_theta()`, `mappel::PointEmitterModel::bounded_theta()`, `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::get_num_params()`, `mappel::PointEmitterModel::get_stats()`, `mappel::Gauss1DModel::initial_theta_estimate()`, `initial_theta_estimate()`, `mappel::Gauss2DsModel::initial_theta_estimate()`, `mappel::PointEmitterModel::make_param()`, `mappel::PointEmitterModel::make_param_mat()`, `mappel::PointEmitterModel::make_param_mat_stack()`, `mappel::PointEmitterModel::make_param_stack()`, `mappel::PointEmitterModel::operator=()`, `mappel::PointEmitterModel::reflected_theta()`, `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::PointEmitterModel::set_prior()`, `mappel::PointEmitterModel::set_ubound()`, and `mappel::PointEmitterModel::theta_in_bounds()`.

9.14.5.25 `IdxT mappel::MCMCAdaptorBase::num_phases` `[protected]`, `[inherited]`

The number of different sampling phases for candidate selection MCMC. Each phase changes a different subset of variables.

Definition at line 29 of file `MCMCAdaptorBase.h`.

Referenced by `mappel::MCMCAdaptorBase::get_mcmc_num_phases()`, `mappel::MCMCAdaptorBase::get_stats()`, `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`, and `mappel::MCMCAdaptorBase::set_mcmc_num_phases()`.

9.14.5.26 `CompositeDist mappel::PointEmitterModel::prior` `[protected]`, `[inherited]`

Definition at line 145 of file `PointEmitterModel.h`.

Referenced by `debug_internal_sum_model_y()`, `mappel::Gauss2DsModel::debug_internal_sum_model_y()`, `Gauss2DModel()`, `mappel::Gauss2DsModel::Gauss2DsModel()`, `mappel::PointEmitterModel::get_hyperparam_index()`, `mappel::PointEmitterModel::get_hyperparam_names()`, `mappel::PointEmitterModel::get_hyperparam_value()`, `mappel::PointEmitterModel::get_hyperparams()`, `mappel::Gauss1DsModel::get_max_sigma()`, `mappel::Gauss1DsModel::get_min_sigma()`, `mappel::PointEmitterModel::get_param_names()`, `mappel::PointEmitterModel::get_prior()`, `mappel::PointEmitterModel::get_stats()`, `mappel::PointEmitterModel::has_hyperparam()`, `mappel::PointEmitterModel::operator=()`, `mappel::PointEmitterModel::PointEmitterModel()`, `mappel::PointEmitterModel::rename_hyperparam()`, `mappel::PointEmitterModel::sample_prior()`, `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_hyperparam_names()`, `mappel::PointEmitterModel::set_hyperparam_value()`, `mappel::PointEmitterModel::set_hyperparams()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::Gauss1DsModel::set_max_sigma()`, `mappel::Gauss1DsModel::set_min_sigma()`, `mappel::PointEmitterModel::set_param_names()`, `mappel::PointEmitterModel::set_prior()`, and `mappel::PointEmitterModel::set_ubound()`.

9.14.5.27 `const StringVecT mappel::Gauss2DModel::prior_types` `[static]`

Initial value:

```
= { "Beta",
    "Normal"
}
```

Definition at line 50 of file `Gauss2DModel.h`.

Referenced by `get_psf_sigma()`.

9.14.5.28 VecT mappel::Gauss2DModel::psf_sigma [protected]

Standard deviation of the fixed-sigma 1D Gaussian PSF in pixels

Definition at line 104 of file Gauss2DModel.h.

Referenced by mappel::cgauss_compute_estimate(), mappel::cgauss_compute_estimate_debug(), mappel::cgauss_← heuristic_compute_estimate(), mappel::Gauss2DModel::Stencil::compute_derivatives(), debug_internal_sum_model_← _y(), Gauss2DModel(), get_psf_sigma(), make_internal_1Dsum_estimator(), operator=(), pixel_grad2(), pixel_hess(), pixel_hess_update(), set_psf_sigma(), mappel::Gauss2DModel::Stencil::Stencil(), and update_internal_1Dsum_← estimators().

9.14.5.29 double mappel::MCMCAdaptorBase::sigma_scale [protected],[inherited]

A scaling factor for step sizes as a fraction of the size of the domain dimension we are walking in. (0.05 default)

Definition at line 30 of file MCMCAdaptorBase.h.

Referenced by mappel::MCMCAdaptorBase::get_mcmc_sigma_scale(), mappel::MCMCAdaptorBase::get_stats(), mappel::MCMCAdaptor1D::MCMCAdaptor1D(), mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds(), mappel::MCMC_← Adaptor2D::MCMCAdaptor2D(), mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds(), mappel::MCMCAdaptor1D::set_← _background_mcmc_sampling(), mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling(), and mappel::MCMC_← AdaptorBase::set_mcmc_sigma_scale().

9.14.5.30 ImageSizeT mappel::ImageFormat2DBase::size [protected],[inherited]

Number of pixels in X dimension for 1D image

Definition at line 67 of file ImageFormat2DBase.h.

Referenced by mappel::cgauss_compute_estimate(), mappel::cgauss_compute_estimate_debug(), mappel::cgauss_← _heuristic_compute_estimate(), mappel::ImageFormat2DBase::check_image_shape(), mappel::Gauss2DModel::_← Stencil::compute_derivatives(), mappel::Gauss2DsModel::Stencil::compute_derivatives(), debug_internal_sum_← model_y(), mappel::Gauss2DsModel::debug_internal_sum_model_y(), mappel::methods::expected_information(), Gauss2DModel(), mappel::Gauss2DsMAP::Gauss2DsMAP(), mappel::Gauss2DsMLE::Gauss2DsMLE(), mappel_← ::Gauss2DsModel::Gauss2DsModel(), mappel::ImageFormat2DBase::get_num_pixels(), mappel::ImageFormat2D_← Base::get_size(), mappel::ImageFormat2DBase::get_stats(), mappel::methods::likelihood::grad(), mappel::methods_← ::likelihood::grad2(), mappel::methods::likelihood::debug::grad_components(), mappel::methods::likelihood::hessian(), mappel::methods::likelihood::debug::hessian_components(), initial_theta_estimate(), mappel::Gauss2DsModel_← ::initial_theta_estimate(), mappel::methods::likelihood::llh(), mappel::methods::likelihood::debug::llh_components(), make_default_prior_beta_position(), mappel::Gauss2DsModel::make_default_prior_beta_position(), make_default_← prior_normal_position(), mappel::Gauss2DsModel::make_default_prior_normal_position(), mappel::ImageFormat2_← DBase::make_image(), mappel::ImageFormat2DBase::make_image_stack(), make_internal_1Dsum_estimator(), mappel::Gauss2DsModel::make_internal_1Dsum_estimator(), make_prior_beta_position(), mappel::Gauss2Ds_← Model::make_prior_beta_position(), make_prior_normal_position(), mappel::Gauss2DsModel::make_prior_normal_← _position(), mappel::methods::model_image(), mappel::ImageFormat2DBase::operator=(), mappel::methods_← ::likelihood::rllh(), mappel::methods::likelihood::debug::rllh_components(), mappel::ImageFormat2DBase::set_size(), set_size(), mappel::Gauss2DsModel::set_size(), mappel::methods::simulate_image(), mappel::methods::simulate_← image_from_model(), mappel::Gauss2DModel::Stencil::Stencil(), mappel::Gauss2DsModel::Stencil::Stencil(), update_← _internal_1Dsum_estimators(), and mappel::Gauss2DsModel::update_internal_1Dsum_estimators().

9.14.5.31 **ParamT mappel::PointEmitterModel::ubound** [protected],[inherited]

Definition at line 148 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::bound_theta(), mappel::PointEmitterModel::bounded_theta(), mappel::PointEmitterModel::get_stats(), mappel::PointEmitterModel::get_ubound(), mappel::Gauss1DsModel::initial_theta_estimate(), initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::PointEmitterModel::operator=(), mappel::PointEmitterModel::reflected_theta(), mappel::PointEmitterModel::set_bounds(), mappel::PointEmitterModel::set_lbound(), mappel::PointEmitterModel::set_prior(), mappel::PointEmitterModel::set_ubound(), and mappel::PointEmitterModel::theta_in_bounds().

9.14.5.32 **Gauss1DSumModelT mappel::Gauss2DModel::x_model** [protected]

X-model fits 2D images X-axis (column sum)

Definition at line 105 of file Gauss2DModel.h.

Referenced by debug_internal_sum_model_x(), initial_theta_estimate(), operator=(), set_psf_sigma(), set_size(), and update_internal_1Dsum_estimators().

9.14.5.33 **Gauss1DSumModelT mappel::Gauss2DModel::y_model** [protected]

Y-model fits 2D images Y-axis (row sum)

Definition at line 106 of file Gauss2DModel.h.

Referenced by debug_internal_sum_model_y(), Gauss2DModel(), initial_theta_estimate(), operator=(), set_psf_sigma(), set_size(), and update_internal_1Dsum_estimators().

The documentation for this class was generated from the following files:


- [Gauss2DModel.h](#)
- [Gauss2DModel.cpp](#)

9.15 mappel::Gauss2DsMAP Class Reference

A 2D Gaussian with a variable scalar PSF sigma under a Poisson noise assumption using a maximum a-posteriori objective.

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/Gauss2DsMAP.h>
```

Inheritance diagram for mappel::Gauss2DsMAP:

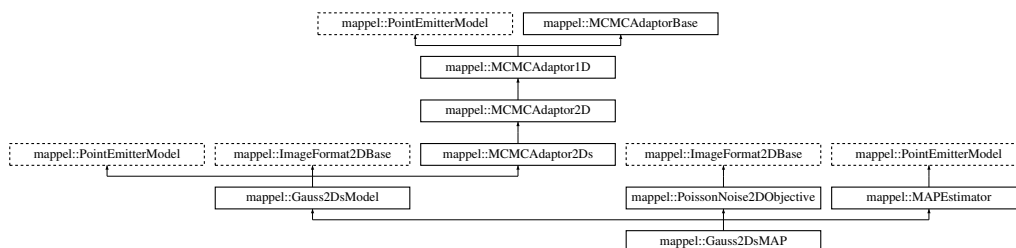

Public Types

- using [Gauss1DSumModelT](#) = [Gauss1DsMAP](#)
- using [StencilVecT](#) = `std::vector< Stencil >`
- using [ParamT](#) = `arma::vec`
- using [ParamVecT](#) = `arma::mat`
- using [ImageCoordT](#) = `uint32_t`
- using [ImagePixelT](#) = `double`
- template<class [CoordT](#) >
using [ImageSizeShapeT](#) = `arma::Col< CoordT >`
- template<class [CoordT](#) >
using [ImageSizeVecShapeT](#) = `arma::Mat< CoordT >`
- using [ImageSizeT](#) = [ImageSizeShapeT](#)< [ImageCoordT](#) >
- using [ImageSizeVecT](#) = [ImageSizeVecShapeT](#)< [ImageCoordT](#) >
- template<class [PixelT](#) >
using [ImageShapeT](#) = `arma::Mat< PixelT >`
- template<class [PixelT](#) >
using [ImageStackShapeT](#) = `arma::Cube< PixelT >`
- using [ImageT](#) = [ImageShapeT](#)< [ImagePixelT](#) >
- using [ImageStackT](#) = [ImageStackShapeT](#)< [ImagePixelT](#) >
- using [ModelDataT](#) = [ImageT](#)
- using [ModelDataStackT](#) = [ImageStackT](#)

Public Member Functions

- [Gauss2DsMAP](#) (const [ImageSizeT](#) &size, const [VecT](#) &min_sigma, double max_sigma_ratio, const std::string &prior_type=[DefaultPriorType](#))
- [Gauss2DsMAP](#) (const [ImageSizeT](#) &size, const [VecT](#) &min_sigma, const [VecT](#) &max_sigma, const std::string &prior_type=[DefaultPriorType](#))
- [Gauss2DsMAP](#) (const [ImageSizeT](#) &size, const [VecT](#) &min_sigma, [CompositeDist](#) &&prior)
- [Gauss2DsMAP](#) (const [ImageSizeT](#) &size, const [VecT](#) &min_sigma, const [CompositeDist](#) &prior)
- [Gauss2DsMAP](#) (const [Gauss2DsMAP](#) &o)
- [Gauss2DsMAP](#) & operator= (const [Gauss2DsMAP](#) &o)
- [Gauss2DsMAP](#) ([Gauss2DsMAP](#) &&o)
- [Gauss2DsMAP](#) & operator= ([Gauss2DsMAP](#) &&o)
- void [set_hyperparams](#) (const [VecT](#) &hyperparams)
- void [set_prior](#) ([CompositeDist](#) &&prior_)
- void [set_prior](#) (const [CompositeDist](#) &prior_)
- void [set_size](#) (const [ImageSizeT](#) &size_)
- [VecT](#) [get_min_sigma](#) () const
- double [get_min_sigma](#) ([IdxT](#) dim) const
- [VecT](#) [get_max_sigma](#) () const
- double [get_max_sigma](#) ([IdxT](#) dim) const
- double [get_max_sigma_ratio](#) () const
- void [set_min_sigma](#) (const [VecT](#) &min_sigma)
- void [set_max_sigma](#) (const [VecT](#) &max_sigma)
- void [set_max_sigma_ratio](#) (double max_sigma_ratio)
- [StatsT](#) [get_stats](#) () const
- [Stencil](#) [make_stencil](#) (const [ParamT](#) &theta, bool compute_derivatives=true) const

Make a new Model::Stencil object at theta.

- double `pixel_model_value` (int i, int j, const `Stencil` &s) const
- void `pixel_grad` (int i, int j, const `Stencil` &s, `ParamT` &pgrad) const
- void `pixel_grad2` (int i, int j, const `Stencil` &s, `ParamT` &pgrad2) const
- void `pixel_hess` (int i, int j, const `Stencil` &s, `MatT` &hess) const
- void `pixel_hess_update` (int i, int j, const `Stencil` &s, double dm_ratio_m1, double dmm_ratio, `ParamT` &grad, `MatT` &hess) const
- pixel derivative inner loop calculations.*
- `Stencil initial_theta_estimate` (const `ImageT` &im) const
- Fast, heuristic estimate of initial theta.*
- `Stencil initial_theta_estimate` (const `ImageT` &im, const `ParamT` &theta_init) const
- `Stencil initial_theta_estimate` (const `ImageT` &im, const `ParamT` &theta_init, const std::string &estimator) const
- `Gauss1DSumModelT debug_internal_sum_model_x` () const
- `Gauss1DSumModelT debug_internal_sum_model_y` () const
- `IdxT get_num_params` () const
- void `check_param_shape` (const `ParamT` &theta) const
- void `check_param_shape` (const `ParamVecT` &theta) const
- void `check_psf_sigma` (double psf_sigma) const
- void `check_psf_sigma` (const `VecT` &psf_sigma) const
- `ParamT make_param` () const
- template<class FillT >
 - `ParamT make_param` (FillT fill) const
- `ParamVecT make_param_stack` (`IdxT` n) const
- template<class FillT >
 - `ParamVecT make_param_stack` (`IdxT` n, FillT fill) const
- `MatT make_param_mat` () const
- template<class FillT >
 - `MatT make_param_mat` (FillT fill) const
- `CubeT make_param_mat_stack` (`IdxT` n) const
- template<class FillT >
 - `CubeT make_param_mat_stack` (`IdxT` n, FillT fill) const
- `CompositeDist & get_prior` ()
- const `CompositeDist & get_prior` () const
- `IdxT get_num_hyperparams` () const
- `VecT get_hyperparams` () const
- bool `has_hyperparam` (const std::string &name) const
- double `get_hyperparam_value` (const std::string &name) const
- int `get_hyperparam_index` (const std::string &name) const
- void `set_hyperparam_value` (const std::string &name, double value)
- void `rename_hyperparam` (const std::string &old_name, const std::string &new_name)
- `StringVecT get_param_names` () const
- void `set_param_names` (const `StringVecT` &desc)
- `StringVecT get_hyperparam_names` () const
- void `set_hyperparam_names` (const `StringVecT` &desc)
- template<class RngT >
 - `ParamT sample_prior` (RngT &rng) const
- `ParamT sample_prior` () const
- void `set_bounds` (const `ParamT` &lbound, const `ParamT` &ubound)
- void `set_lbound` (const `ParamT` &lbound)
- void `set_ubound` (const `ParamT` &ubound)
- const `ParamT & get_lbound` () const
- const `ParamT & get_ubound` () const

- bool `theta_in_bounds` (const `ParamT` &theta) const
- void `bound_theta` (`ParamT` &theta, double epsilon=`bounds_epsilon`) const
- `ParamT` `bounded_theta` (const `ParamT` &theta, double epsilon=`bounds_epsilon`) const
- `ParamT` `reflected_theta` (const `ParamT` &theta) const
- `BoolVecT` `theta_stack_in_bounds` (const `ParamVecT` &theta) const
- `ParamVecT` `bounded_theta_stack` (const `ParamVecT` &theta, double epsilon=`bounds_epsilon`) const
- `ParamVecT` `reflected_theta_stack` (const `ParamVecT` &theta) const
- `ImageT` `make_image` () const
- `ImageStackT` `make_image_stack` (`ImageCoordT` n) const
- `ImageCoordT` `get_size_image_stack` (const `ImageStackT` &stack) const
- `ImageT` `get_image_from_stack` (const `ImageStackT` &stack, `ImageCoordT` n) const
- template<class `ImT` >
void `set_image_in_stack` (`ImageStackT` &stack, `ImageCoordT` n, const `ImT` &im) const
- const `ImageSizeT` & `get_size` () const
- `ImageCoordT` `get_size` (`IdxT` idx) const
- `ImageCoordT` `get_num_pixels` () const
- void `check_image_shape` (const `ImageT` &im) const
Check the shape of a single images is correct for model size.
- void `check_image_shape` (const `ImageStackT` &ims) const
Check the shape of a stack of images is correct for model size.
- void `sample_mcmc_candidate` (`IdxT` sample_index, `ParamT` &candidate, double step_scale=1.0) const
- void `sample_mcmc_candidate` (`IdxT` sample_index, `ParamT` &candidate, const `IdxVecT` &fixed_parameters_↵
mask, double step_scale=1.0) const
- void `set_intensity_mcmc_sampling` (double eta_l=-1)
- void `set_background_mcmc_sampling` (double eta_bg=-1)
- void `set_mcmc_sigma_scale` (double scale)
- double `get_mcmc_sigma_scale` () const
- `IdxT` `get_mcmc_num_phases` () const

Static Public Member Functions

- static `CompositeDist` `make_default_prior` (const `ImageSizeT` &size, double max_sigma_ratio, const std::string &prior_type)
- static `CompositeDist` `make_default_prior_beta_position` (const `ImageSizeT` &size, double max_sigma_ratio)
- static `CompositeDist` `make_default_prior_normal_position` (const `ImageSizeT` &size, double max_sigma_ratio)
- static `CompositeDist` `make_prior_beta_position` (const `ImageSizeT` &size, double beta_xpos, double beta_ypos, double mean_l, double kappa_l, double mean_bg, double kappa_bg, double max_sigma_ratio, double alpha_↵
sigma)
- static `CompositeDist` `make_prior_normal_position` (const `ImageSizeT` &size, double sigma_xpos, double sigma_↵
_ypos, double mean_l, double kappa_l, double mean_bg, double kappa_bg, double max_sigma_ratio, double alpha_sigma)
- static `prior_hessian::TruncatedNormalDist` `make_prior_component_position_normal` (`IdxT` size, double pos_↵
sigma=`default_sigma_pos`)
- static `prior_hessian::ScaledSymmetricBetaDist` `make_prior_component_position_beta` (`IdxT` size, double pos_↵
beta=`default_beta_pos`)
- static `prior_hessian::TruncatedGammaDist` `make_prior_component_intensity` (double mean=`default_mean_↵
l`, double kappa=`default_intensity_kappa`)
- static `prior_hessian::TruncatedParetoDist` `make_prior_component_sigma` (double min_sigma, double max_↵
sigma, double alpha=`default_alpha_sigma`)
- static void `set_rng_seed` (`RngSeedT` seed)

- static [ParallelRngManagerT](#) & [get_rng_manager](#) ()
- static [ParallelRngGeneratorT](#) & [get_rng_generator](#) ()
- static void [check_size](#) (const [ImageSizeT](#) &size_)

Check the size argument for the model.

Static Public Attributes

- static const std::string [name](#)
- static const [StringVecT](#) [prior_types](#)
- static const std::string [DefaultPriorType](#) = "Normal"
- static const std::string [DefaultSeperableInitEstimator](#) = "TrustRegion"
- static const double [bounds_epsilon](#) = 1.0E-6
- static const double [global_min_psf_sigma](#) = 1E-1
- static const double [global_max_psf_sigma](#) = 1E2
- static const double [default_beta_pos](#) = 3
- static const double [default_sigma_pos](#) = 1
- static const double [default_mean_l](#) = 300
- static const double [default_max_l](#) = INFINITY
- static const double [default_intensity_kappa](#) = 2
- static const double [default_pixel_mean_bg](#) = 4
- static const double [default_alpha_sigma](#) = 2
- static const [ImageCoordT](#) [num_dim](#) =2
- static const [ImageCoordT](#) [global_min_size](#) =3
- static const [ImageCoordT](#) [global_max_size](#) =512
- static const double [global_default_mcmc_sigma_scale](#) = 0.05
- static const double [global_max_mcmc_sigma_scale](#) = 0.5
- static const std::vector< std::string > [estimator_names](#)

Protected Member Functions

- void [update_internal_1Dsum_estimators](#) ()
- void [set_mcmc_num_phases](#) ([IdxT](#) num_phases)

Static Protected Member Functions

- static [Gauss1DSumModelT](#) [make_internal_1Dsum_estimator](#) ([IdxT](#) dim, const [ImageSizeT](#) &size, const [VecT](#) &min_sigma, const [VecT](#) &max_sigma, const [CompositeDist](#) &prior)
- static double [compute_max_sigma_ratio](#) (const [VecT](#) &min_sigma, const [VecT](#) &max_sigma)

Protected Attributes

- [VecT min_sigma](#)
- [Gauss1DSumModelT x_model](#)
- [Gauss1DSumModelT y_model](#)
- [CompositeDist prior](#)
- [IdxT num_params](#)
- [IdxT num_hyperparams](#)
- [ParamT lbound](#)
- [ParamT ubound](#)
- [ImageSizeT size](#)
- [double eta_sigma](#) =0
- [double eta_y](#) =0
- [double eta_x](#) =0
- [double eta_l](#) =0
- [double eta_bg](#) =0
- [IdxT num_phases](#)
- [double sigma_scale](#)

9.15.1 Detailed Description

A 2D Gaussian with a variable scalar PSF sigma under a Poisson noise assumption using a maximum a-posteriori objective.

Model: [Gauss2DsModel](#) - 2D Gaussian variable scalar PSF sigma Objective: [PoissonNoise2DObjective](#) - Poisson noise model for 2D Estimator: [MAPEstimator](#) - Maximum a-posteriori estimator

Definition at line 24 of file Gauss2DsMAP.h.

9.15.2 Member Typedef Documentation

9.15.2.1 `using mappel::Gauss2DsModel::Gauss1DSumModelT = Gauss1DsMAP` [\[inherited\]](#)

Definition at line 26 of file Gauss2DsModel.h.

9.15.2.2 `using mappel::ImageFormat2DBase::ImageCoordT = uint32_t` [\[inherited\]](#)

Image size coordinate storage type

Definition at line 24 of file ImageFormat2DBase.h.

9.15.2.3 `using mappel::ImageFormat2DBase::ImagePixelT = double` [\[inherited\]](#)

Image pixel storage type

Definition at line 25 of file ImageFormat2DBase.h.

9.15.2.4 `template<class PixelT > using mappel::ImageFormat2DBase::ImageShapeT = arma::Mat<PixelT>`
[inherited]

Shape of the data type for a single image

Definition at line 32 of file ImageFormat2DBase.h.

9.15.2.5 `template<class CoordT > using mappel::ImageFormat2DBase::ImageSizeShapeT = arma::Col<CoordT>`
[inherited]

Shape of the data type to store a single image's coordinates

Definition at line 27 of file ImageFormat2DBase.h.

9.15.2.6 `using mappel::ImageFormat2DBase::ImageSizeT = ImageSizeShapeT<ImageCoordT>`
[inherited]

Data type for a single image size

Definition at line 29 of file ImageFormat2DBase.h.

9.15.2.7 `template<class CoordT > using mappel::ImageFormat2DBase::ImageSizeVecShapeT = arma::Mat<CoordT>`
[inherited]

Shape of the data type to store a vector of image's coordinates

Definition at line 28 of file ImageFormat2DBase.h.

9.15.2.8 `using mappel::ImageFormat2DBase::ImageSizeVecT = ImageSizeVecShapeT<ImageCoordT>`
[inherited]

Data type for a sequence of image sizes

Definition at line 30 of file ImageFormat2DBase.h.

9.15.2.9 `template<class PixelT > using mappel::ImageFormat2DBase::ImageStackShapeT = arma::Cube<PixelT>`
[inherited]

Shape of the data type for a sequence of images

Definition at line 33 of file ImageFormat2DBase.h.

9.15.2.10 `using mappel::ImageFormat2DBase::ImageStackT = ImageStackShapeT<ImagePixelT>`
[inherited]

Data type to represent a sequence of images

Definition at line 35 of file ImageFormat2DBase.h.

9.15.2.11 `using mappel::ImageFormat2DBase::ImageT = ImageShapeT<ImagePixelT> [inherited]`

Data type to represent single image

Definition at line 34 of file ImageFormat2DBase.h.

9.15.2.12 `using mappel::PoissonNoise2DObjective::ModelDataStackT = ImageStackT [inherited]`

Objective function data stack type: 2D double precision image stack, of images gain-corrected to approximate photons counts

Definition at line 25 of file PoissonNoise2DObjective.h.

9.15.2.13 `using mappel::PoissonNoise2DObjective::ModelDataT = ImageT [inherited]`

Objective function data type: 2D double precision image, gain-corrected to approximate photons counts

Definition at line 24 of file PoissonNoise2DObjective.h.

9.15.2.14 `using mappel::PointEmitterModel::ParamT = arma::vec [inherited]`

Parameter vector

Definition at line 47 of file PointEmitterModel.h.

9.15.2.15 `using mappel::PointEmitterModel::ParamVecT = arma::mat [inherited]`

Vector of parameter vectors

Definition at line 48 of file PointEmitterModel.h.

9.15.2.16 `using mappel::Gauss2DsModel::StencilVecT = std::vector<Stencil> [inherited]`

Definition at line 55 of file Gauss2DsModel.h.

9.15.3 Constructor & Destructor Documentation

9.15.3.1 `mappel::Gauss2DsMAP::Gauss2DsMAP (const ImageSizeT & size, const VecT & min_sigma, double max_sigma_ratio, const std::string & prior_type = DefaultPriorType)`

Definition at line 11 of file Gauss2DsMAP.cpp.

References `mappel::Gauss2DsModel::min_sigma`, and `mappel::ImageFormat2DBase::size`.

9.15.3.2 `mappel::Gauss2DsMAP::Gauss2DsMAP (const ImageSizeT & size, const VecT & min_sigma, const VecT & max_sigma, const std::string & prior_type = DefaultPriorType)`

Definition at line 15 of file Gauss2DsMAP.cpp.

References `mappel::Gauss2DsModel::compute_max_sigma_ratio()`, `mappel::Gauss2DsModel::make_default_prior()`, `mappel::Gauss2DsModel::min_sigma`, and `mappel::ImageFormat2DBase::size`.

9.15.3.3 `mappel::Gauss2DsMAP::Gauss2DsMAP (const ImageSizeT & size, const VecT & min_sigma, CompositeDist && prior)`

Definition at line 19 of file Gauss2DsMAP.cpp.

9.15.3.4 `mappel::Gauss2DsMAP::Gauss2DsMAP (const ImageSizeT & size, const VecT & min_sigma, const CompositeDist & prior)`

Definition at line 27 of file Gauss2DsMAP.cpp.

9.15.3.5 `mappel::Gauss2DsMAP::Gauss2DsMAP (const Gauss2DsMAP & o)`

Definition at line 35 of file Gauss2DsMAP.cpp.

9.15.3.6 `mappel::Gauss2DsMAP::Gauss2DsMAP (Gauss2DsMAP && o)`

Definition at line 43 of file Gauss2DsMAP.cpp.

9.15.4 Member Function Documentation

9.15.4.1 `void mappel::PointEmitterModel::bound_theta (ParamT & theta, double epsilon = bounds_epsilon) const`
[inherited]

Definition at line 248 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

9.15.4.2 `PointEmitterModel::ParamT mappel::PointEmitterModel::bounded_theta (const ParamT & theta, double epsilon = bounds_epsilon) const` [inherited]

Definition at line 265 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::PointEmitterModel::bounded_theta_stack()`.

9.15.4.3 `PointEmitterModel::ParamVecT mappel::PointEmitterModel::bounded_theta_stack (const ParamVecT & theta, double epsilon = bounds_epsilon) const` [inherited]

Definition at line 306 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::bounded_theta()`, `mappel::PointEmitterModel::check_param_shape()`, and `mappel::PointEmitterModel::make_param_stack()`.

9.15.4.4 `void mappel::ImageFormat2DBase::check_image_shape (const ImageT & im) const` [inherited]

Check the shape of a single images is correct for model size.

Definition at line 80 of file ImageFormat2DBase.cpp.

References `mappel::ImageFormat2DBase::size`.

9.15.4.5 `void mappel::ImageFormat2DBase::check_image_shape (const ImageStackT & ims) const` [inherited]

Check the shape of a stack of images is correct for model size.

Definition at line 93 of file ImageFormat2DBase.cpp.

References `mappel::ImageFormat2DBase::size`.

9.15.4.6 `void mappel::PointEmitterModel::check_param_shape (const ParamT & theta) const` [inherited]

Definition at line 167 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::num_params`.

Referenced by `mappel::PointEmitterModel::bound_theta()`, `mappel::PointEmitterModel::bounded_theta()`, `mappel::PointEmitterModel::bounded_theta_stack()`, `mappel::PointEmitterModel::reflected_theta()`, `mappel::PointEmitterModel::reflected_theta_stack()`, `mappel::PointEmitterModel::theta_in_bounds()`, and `mappel::PointEmitterModel::theta_stack_in_bounds()`.

9.15.4.7 `void mappel::PointEmitterModel::check_param_shape (const ParamVecT & theta) const` [inherited]

Definition at line 176 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::num_params`.

9.15.4.8 `void mappel::PointEmitterModel::check_psf_sigma (double psf_sigma) const` [inherited]

Definition at line 185 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::global_max_psf_sigma`, and `mappel::PointEmitterModel::global_min_psf_sigma`.

Referenced by `mappel::Gauss1DModel::Gauss1DModel()`, `mappel::Gauss2DModel::Gauss2DModel()`, `mappel::Gauss2DsModel::Gauss2DsModel()`, `mappel::Gauss1DsModel::set_max_sigma()`, `mappel::Gauss2DsModel::set_max_sigma()`, `mappel::Gauss1DsModel::set_min_sigma()`, `mappel::Gauss2DsModel::set_min_sigma()`, `mappel::Gauss1DModel::set_psf_sigma()`, and `mappel::Gauss2DModel::set_psf_sigma()`.

9.15.4.9 `void mappel::PointEmitterModel::check_psf_sigma (const VecT & psf_sigma) const` [inherited]

Definition at line 197 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::global_max_psf_sigma`, and `mappel::PointEmitterModel::global_min_psf_sigma`.

9.15.4.10 `void mappel::ImageFormat2DBase::check_size (const ImageSizeT & size_)` [static],[inherited]

Check the size argument for the model.

Definition at line 60 of file ImageFormat2DBase.cpp.

References `mappel::ImageFormat2DBase::global_max_size`, and `mappel::ImageFormat2DBase::global_min_size`.

Referenced by `mappel::ImageFormat2DBase::ImageFormat2DBase()`, and `mappel::ImageFormat2DBase::set_size()`.

9.15.4.11 `double mappel::Gauss2DsModel::compute_max_sigma_ratio (const VecT & min_sigma, const VecT & max_sigma)` [static],[protected],[inherited]

Definition at line 162 of file Gauss2DsModel.cpp.

References `mappel::Gauss2DsModel::min_sigma`.

Referenced by `mappel::Gauss2DsModel::debug_internal_sum_model_y()`, `Gauss2DsMAP()`, `mappel::Gauss2DsMLE()`, `E::Gauss2DsMLE()`, and `mappel::Gauss2DsModel::set_max_sigma()`.

9.15.4.12 `Gauss1DSumModelT mappel::Gauss2DsModel::debug_internal_sum_model_x () const` [inline],[inherited]

Definition at line 104 of file Gauss2DsModel.h.

References `mappel::Gauss2DsModel::x_model`.

9.15.4.13 `Gauss1DSumModelT mappel::Gauss2DsModel::debug_internal_sum_model_y () const` [inline],[inherited]

Definition at line 105 of file Gauss2DsModel.h.

References `mappel::Gauss2DsModel::compute_max_sigma_ratio()`, `mappel::Gauss2DsModel::Gauss2DsModel()`, `mappel::Gauss2DsModel::make_internal_1Dsum_estimator()`, `mappel::Gauss2DsModel::min_sigma`, `mappel::Gauss2DsModel::operator=()`, `mappel::PointEmitterModel::prior`, `mappel::ImageFormat2DBase::size`, `mappel::Gauss2DsModel::update_internal_1Dsum_estimators()`, and `mappel::Gauss2DsModel::y_model`.

9.15.4.14 `int mappel::PointEmitterModel::get_hyperparam_index (const std::string & name) const` [inline],[inherited]

Definition at line 236 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.15.4.15 **StringVecT** mappel::PointEmitterModel::get_hyperparam_names () const [inline], [inherited]

Definition at line 256 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.15.4.16 **double** mappel::PointEmitterModel::get_hyperparam_value (const std::string & *name*) const [inline], [inherited]

Definition at line 232 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

Referenced by mappel::MCMCAdaptor1D::set_background_mcmc_sampling(), and mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling().

9.15.4.17 **PointEmitterModel::ParamT** mappel::PointEmitterModel::get_hyperparams () const [inline], [inherited]

Definition at line 224 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.15.4.18 **ImageFormat2DBase::ImageT** mappel::ImageFormat2DBase::get_image_from_stack (const ImageStackT & *stack*, ImageCoordT *n*) const [inline], [inherited]

Definition at line 106 of file ImageFormat2DBase.h.

9.15.4.19 **const PointEmitterModel::ParamT &** mappel::PointEmitterModel::get_lbound () const [inline], [inherited]

Definition at line 212 of file PointEmitterModel.h.

References mappel::PointEmitterModel::lbound.

Referenced by mappel::MCMCAdaptor1D::MCMCAdaptor1D(), mappel::MCMCAdaptor2D::MCMCAdaptor2D(), and mappel::MCMCAdaptor1D::set_background_mcmc_sampling().

9.15.4.20 **VecT** mappel::Gauss2DsModel::get_max_sigma () const [inline], [inherited]

Definition at line 132 of file Gauss2DsModel.h.

References mappel::Gauss2DsModel::get_max_sigma_ratio(), and mappel::Gauss2DsModel::get_min_sigma().

Referenced by mappel::Gauss2DsModel::Gauss2DsModel(), mappel::Gauss2DsModel::get_stats(), mappel::Gauss2DsModel::operator=(), mappel::Gauss2DsModel::set_max_sigma_ratio(), mappel::Gauss2DsModel::set_min_sigma(), and mappel::Gauss2DsModel::update_internal_1Dsum_estimators().

9.15.4.21 `double mappel::Gauss2DsModel::get_max_sigma (IdxT dim) const` `[inline],[inherited]`

Definition at line 136 of file Gauss2DsModel.h.

References `mappel::Gauss2DsModel::get_max_sigma_ratio()`, and `mappel::Gauss2DsModel::get_min_sigma()`.

9.15.4.22 `double mappel::Gauss2DsModel::get_max_sigma_ratio () const` `[inline],[inherited]`

Definition at line 140 of file Gauss2DsModel.h.

References `mappel::PointEmitterModel::get_ubound()`.

Referenced by `mappel::Gauss2DsModel::get_max_sigma()`, and `mappel::Gauss2DsModel::get_stats()`.

9.15.4.23 `IdxT mappel::MCMCAdaptorBase::get_mcmc_num_phases () const` `[inherited]`

Definition at line 56 of file MCMCAdaptorBase.cpp.

References `mappel::MCMCAdaptorBase::num_phases`.

9.15.4.24 `double mappel::MCMCAdaptorBase::get_mcmc_sigma_scale () const` `[inherited]`

Definition at line 53 of file MCMCAdaptorBase.cpp.

References `mappel::MCMCAdaptorBase::sigma_scale`.

9.15.4.25 `VecT mappel::Gauss2DsModel::get_min_sigma () const` `[inline],[inherited]`

Definition at line 128 of file Gauss2DsModel.h.

References `mappel::Gauss2DsModel::min_sigma`.

Referenced by `mappel::Gauss2DsModel::get_max_sigma()`, `mappel::Gauss2DsModel::get_stats()`, and `mappel::Gauss2DsModel::set_max_sigma()`.

9.15.4.26 `double mappel::Gauss2DsModel::get_min_sigma (IdxT dim) const` `[inherited]`

Definition at line 191 of file Gauss2DsModel.cpp.

References `mappel::Gauss2DsModel::DefaultPriorType`, `mappel::Gauss2DsModel::min_sigma`, and `mappel::Gauss2DsModel::prior_types`.

9.15.4.27 `IdxT mappel::PointEmitterModel::get_num_hyperparams () const` `[inline],[inherited]`

Definition at line 208 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::num_hyperparams`.

9.15.4.28 `IdxT mappel::PointEmitterModel::get_num_params () const [inline],[inherited]`

Definition at line 160 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.15.4.29 `ImageFormat2DBase::ImageCoordT mappel::ImageFormat2DBase::get_num_pixels () const [inline],[inherited]`

Definition at line 79 of file ImageFormat2DBase.h.

References mappel::ImageFormat2DBase::size.

Referenced by mappel::ImageFormat2DBase::get_stats().

9.15.4.30 `StringVecT mappel::PointEmitterModel::get_param_names () const [inline],[inherited]`

Definition at line 248 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.15.4.31 `CompositeDist & mappel::PointEmitterModel::get_prior () [inline],[inherited]`

Definition at line 200 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

Referenced by mappel::Gauss2DModel::update_internal_1Dsum_estimators(), and mappel::Gauss2DsModel↵
::update_internal_1Dsum_estimators().

9.15.4.32 `const CompositeDist & mappel::PointEmitterModel::get_prior () const [inline],[inherited]`

Definition at line 204 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.15.4.33 `ParallelRngGeneratorT & mappel::PointEmitterModel::get_rng_generator () [static],[inherited]`

Definition at line 120 of file PointEmitterModel.cpp.

References mappel::rng_manager.

9.15.4.34 `ParallelRngManagerT & mappel::PointEmitterModel::get_rng_manager () [static],[inherited]`

Definition at line 115 of file PointEmitterModel.cpp.

References mappel::rng_manager.

9.15.4.35 `const ImageFormat2DBase::ImageSizeT & mappel::ImageFormat2DBase::get_size () const [inline], [inherited]`

Definition at line 74 of file ImageFormat2DBase.h.

References mappel::ImageFormat2DBase::size.

9.15.4.36 `ImageFormat2DBase::ImageCoordT mappel::ImageFormat2DBase::get_size (IdxT idx) const [inherited]`

Definition at line 41 of file ImageFormat2DBase.cpp.

References mappel::ImageFormat2DBase::size.

9.15.4.37 `ImageFormat2DBase::ImageCoordT mappel::ImageFormat2DBase::get_size_image_stack (const ImageStackT & stack) const [inline], [inherited]`

Definition at line 99 of file ImageFormat2DBase.h.

9.15.4.38 `StatsT mappel::Gauss2DsModel::get_stats () const [inherited]`

Definition at line 337 of file Gauss2DsModel.cpp.

References mappel::Gauss2DsModel::get_max_sigma(), mappel::Gauss2DsModel::get_max_sigma_ratio(), mappel::Gauss2DsModel::get_min_sigma(), mappel::MCMCAdaptor2Ds::get_stats(), mappel::ImageFormat2DBase::get_stats(), and mappel::PointEmitterModel::get_stats().

9.15.4.39 `const PointEmitterModel::ParamT & mappel::PointEmitterModel::get_ubound () const [inline], [inherited]`

Definition at line 216 of file PointEmitterModel.h.

References mappel::PointEmitterModel::ubound.

Referenced by mappel::Gauss2DsxyModel::get_max_sigma_ratio(), mappel::Gauss2DsModel::get_max_sigma_ratio(), mappel::MCMCAdaptor1D::MCMCAdaptor1D(), mappel::MCMCAdaptor2D::MCMCAdaptor2D(), mappel::MCMCAdaptor1D::set_background_mcmc_sampling(), and mappel::Gauss2DsModel::set_max_sigma_ratio().

9.15.4.40 `bool mappel::PointEmitterModel::has_hyperparam (const std::string & name) const [inline], [inherited]`

Definition at line 228 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.15.4.41 `Gauss2DsModel::Stencil mappel::Gauss2DsModel::initial_theta_estimate (const ImageT & im) const [inline], [inherited]`

Fast, heuristic estimate of initial theta.

Definition at line 224 of file Gauss2DsModel.h.

References mappel::PointEmitterModel::DefaultSeperableInitEstimator, and mappel::PointEmitterModel::make_param().

Referenced by mappel::Gauss2DsModel::initial_theta_estimate().

9.15.4.42 `Gauss2DsModel::Stencil mappel::Gauss2DsModel::initial_theta_estimate (const ImageT & im, const ParamT & theta_init) const` `[inline],[inherited]`

Definition at line 231 of file Gauss2DsModel.h.

References `mappel::PointEmitterModel::DefaultSeperableInitEstimator`, and `mappel::Gauss2DsModel::initial_theta_estimate()`.

9.15.4.43 `Gauss2DsModel::Stencil mappel::Gauss2DsModel::initial_theta_estimate (const ImageT & im, const ParamT & theta_init, const std::string & estimator) const` `[inherited]`

Definition at line 381 of file Gauss2DsModel.cpp.

References `mappel::Gauss2DsModel::Stencil::bg()`, `mappel::methods::estimate_max()`, `mappel::Gauss2DsModel::Stencil::l()`, `mappel::PointEmitterModel::lbound`, `mappel::Gauss2DsModel::make_stencil()`, `mappel::Gauss2DsModel::min_sigma`, `mappel::PointEmitterModel::num_params`, `mappel::Gauss2DsModel::Stencil::sigma_ratio()`, `mappel::ImageFormat2DBase::size`, `mappel::estimator::MLEData::theta`, `mappel::PointEmitterModel::theta_in_bounds()`, `mappel::PointEmitterModel::ubound`, `mappel::Gauss2DsModel::x_model`, and `mappel::Gauss2DsModel::y_model`.

9.15.4.44 `CompositeDist mappel::Gauss2DsModel::make_default_prior (const ImageSizeT & size, double max_sigma_ratio, const std::string & prior_type)` `[static],[inherited]`

Definition at line 208 of file Gauss2DsModel.cpp.

References `mappel::istarts_with()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, and `mappel::Gauss2DsModel::make_default_prior_normal_position()`.

Referenced by `Gauss2DsMAP()`, and `mappel::Gauss2DsMLE::Gauss2DsMLE()`.

9.15.4.45 `CompositeDist mappel::Gauss2DsModel::make_default_prior_beta_position (const ImageSizeT & size, double max_sigma_ratio)` `[static],[inherited]`

Definition at line 229 of file Gauss2DsModel.cpp.

References `mappel::PointEmitterModel::default_pixel_mean_bg`, `mappel::PointEmitterModel::make_prior_component_intensity()`, `mappel::PointEmitterModel::make_prior_component_position_beta()`, `mappel::PointEmitterModel::make_prior_component_sigma()`, and `mappel::ImageFormat2DBase::size`.

Referenced by `mappel::Gauss2DsModel::make_default_prior()`.

9.15.4.46 `CompositeDist mappel::Gauss2DsModel::make_default_prior_normal_position (const ImageSizeT & size, double max_sigma_ratio)` `[static],[inherited]`

Definition at line 241 of file Gauss2DsModel.cpp.

References `mappel::PointEmitterModel::default_pixel_mean_bg`, `mappel::PointEmitterModel::make_prior_component_intensity()`, `mappel::PointEmitterModel::make_prior_component_position_normal()`, `mappel::PointEmitterModel::make_prior_component_sigma()`, and `mappel::ImageFormat2DBase::size`.

Referenced by `mappel::Gauss2DsModel::make_default_prior()`.

9.15.4.47 ImageFormat2DBase::ImageT mappel::ImageFormat2DBase::make_image () const [inline],
[inherited]

Definition at line 85 of file ImageFormat2DBase.h.

References mappel::ImageFormat2DBase::size.

9.15.4.48 ImageFormat2DBase::ImageStackT mappel::ImageFormat2DBase::make_image_stack (ImageCoordT *n*) const
[inline], [inherited]

Definition at line 92 of file ImageFormat2DBase.h.

References mappel::ImageFormat2DBase::size.

9.15.4.49 Gauss2DsModel::Gauss1DSumModelT mappel::Gauss2DsModel::make_internal_1Dsum_estimator (IdxT *dim*,
const ImageSizeT & *size*, const VecT & *min_sigma*, const VecT & *max_sigma*, const CompositeDist & *prior*)
[static], [protected], [inherited]

Definition at line 69 of file Gauss2DsModel.cpp.

References mappel::Gauss1DsModel::make_prior_beta_position(), mappel::Gauss1DsModel::make_prior_normal_↵
position(), mappel::Gauss2DsModel::min_sigma, and mappel::ImageFormat2DBase::size.

Referenced by mappel::Gauss2DsModel::debug_internal_sum_model_y(), mappel::Gauss2DsModel::Gauss2Ds↵
Model(), and mappel::Gauss2DsModel::update_internal_1Dsum_estimators().

9.15.4.50 PointEmitterModel::ParamT mappel::PointEmitterModel::make_param () const [inline], [inherited]

Definition at line 164 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

Referenced by mappel::Gauss1DModel::initial_theta_estimate(), mappel::Gauss1DsModel::initial_theta_estimate(),
mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsxyModel::initial_theta_estimate(), mappel::↵
Gauss2DsModel::initial_theta_estimate(), mappel::Gauss1DModel::pixel_hess_update(), mappel::Gauss1DsModel↵
::pixel_hess_update(), mappel::Gauss2DModel::pixel_hess_update(), and mappel::Gauss2DsModel::pixel_hess_↵
update().

9.15.4.51 template<class FillT > PointEmitterModel::ParamT mappel::PointEmitterModel::make_param (FillT *fill*) const
[inherited]

Definition at line 181 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.15.4.52 MatT mappel::PointEmitterModel::make_param_mat () const [inline], [inherited]

Definition at line 172 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.15.4.53 `template<class FillT > MatT mappel::PointEmitterModel::make_param_mat (FillT fill) const` `[inherited]`

Definition at line 191 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.15.4.54 `CubeT mappel::PointEmitterModel::make_param_mat_stack (IdxT n) const` `[inline], [inherited]`

Definition at line 176 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.15.4.55 `template<class FillT > CubeT mappel::PointEmitterModel::make_param_mat_stack (IdxT n, FillT fill) const`
`[inherited]`

Definition at line 196 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.15.4.56 `PointEmitterModel::ParamVecT mappel::PointEmitterModel::make_param_stack (IdxT n) const` `[inline], [inherited]`

Definition at line 168 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

Referenced by mappel::PointEmitterModel::bounded_theta_stack(), and mappel::PointEmitterModel::reflected_theta_stack().

9.15.4.57 `template<class FillT > PointEmitterModel::ParamVecT mappel::PointEmitterModel::make_param_stack (IdxT n, FillT fill) const` `[inherited]`

Definition at line 186 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.15.4.58 `CompositeDist mappel::Gauss2DsModel::make_prior_beta_position (const ImageSizeT & size, double beta_xpos, double beta_ypos, double mean_l, double kappa_l, double mean_bg, double kappa_bg, double max_sigma_ratio, double alpha_sigma)` `[static], [inherited]`

Definition at line 253 of file Gauss2DsModel.cpp.

References mappel::PointEmitterModel::make_prior_component_intensity(), mappel::PointEmitterModel::make_prior_component_position_beta(), mappel::PointEmitterModel::make_prior_component_sigma(), and mappel::ImageFormat2DBase::size.

9.15.4.59 **prior_hessian::TruncatedGammaDist mappel::PointEmitterModel::make_prior_component_intensity (double mean = default_mean_I, double kappa = default_intensity_kappa)** [static],[inherited]

Definition at line 98 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::default_max_I.

Referenced by mappel::Gauss1DsModel::make_default_prior_beta_position(), mappel::Gauss2DModel::make_default_prior_beta_position(), mappel::Gauss1DModel::make_default_prior_beta_position(), mappel::Gauss2DsModel::make_default_prior_beta_position(), mappel::Gauss2DModel::make_default_prior_normal_position(), mappel::Gauss1DsModel::make_default_prior_normal_position(), mappel::Gauss1DModel::make_default_prior_normal_position(), mappel::Gauss2DsModel::make_default_prior_normal_position(), mappel::Gauss2DModel::make_prior_beta_position(), mappel::Gauss1DsModel::make_prior_beta_position(), mappel::Gauss1DModel::make_prior_beta_position(), mappel::Gauss2DsModel::make_prior_beta_position(), mappel::Gauss2DModel::make_prior_normal_position(), mappel::Gauss1DsModel::make_prior_normal_position(), mappel::Gauss1DModel::make_prior_normal_position(), and mappel::Gauss2DsModel::make_prior_normal_position().

9.15.4.60 **prior_hessian::ScaledSymmetricBetaDist mappel::PointEmitterModel::make_prior_component_position_beta (IdxT size, double pos_beta = default_beta_pos)** [static],[inherited]

Definition at line 92 of file PointEmitterModel.cpp.

Referenced by mappel::Gauss1DsModel::make_default_prior_beta_position(), mappel::Gauss2DModel::make_default_prior_beta_position(), mappel::Gauss1DModel::make_default_prior_beta_position(), mappel::Gauss2DsModel::make_default_prior_beta_position(), mappel::Gauss1DsModel::make_prior_beta_position(), mappel::Gauss2DModel::make_prior_beta_position(), mappel::Gauss1DModel::make_prior_beta_position(), and mappel::Gauss2DsModel::make_prior_beta_position().

9.15.4.61 **prior_hessian::TruncatedNormalDist mappel::PointEmitterModel::make_prior_component_position_normal (IdxT size, double pos_sigma = default_sigma_pos)** [static],[inherited]

Definition at line 85 of file PointEmitterModel.cpp.

Referenced by mappel::Gauss1DsModel::make_default_prior_normal_position(), mappel::Gauss2DModel::make_default_prior_normal_position(), mappel::Gauss1DModel::make_default_prior_normal_position(), mappel::Gauss2DsModel::make_default_prior_normal_position(), mappel::Gauss2DModel::make_prior_normal_position(), mappel::Gauss1DsModel::make_prior_normal_position(), mappel::Gauss1DModel::make_prior_normal_position(), and mappel::Gauss2DsModel::make_prior_normal_position().

9.15.4.62 **prior_hessian::TruncatedParetoDist mappel::PointEmitterModel::make_prior_component_sigma (double min_sigma, double max_sigma, double alpha = default_alpha_sigma)** [static],[inherited]

Definition at line 104 of file PointEmitterModel.cpp.

Referenced by mappel::Gauss1DsModel::make_default_prior_beta_position(), mappel::Gauss2DsModel::make_default_prior_beta_position(), mappel::Gauss1DsModel::make_default_prior_normal_position(), mappel::Gauss2DsModel::make_default_prior_normal_position(), mappel::Gauss1DsModel::make_prior_beta_position(), mappel::Gauss2DsModel::make_prior_beta_position(), mappel::Gauss1DsModel::make_prior_normal_position(), and mappel::Gauss2DsModel::make_prior_normal_position().

9.15.4.63 **CompositeDist** mappel::Gauss2DsModel::make_prior_normal_position (const ImageSizeT & size, double sigma_xpos, double sigma_ypos, double mean_l, double kappa_l, double mean_bg, double kappa_bg, double max_sigma_ratio, double alpha_sigma) [static],[inherited]

Definition at line 268 of file Gauss2DsModel.cpp.

References mappel::PointEmitterModel::make_prior_component_intensity(), mappel::PointEmitterModel::make_prior_component_position_normal(), mappel::PointEmitterModel::make_prior_component_sigma(), and mappel::ImageFormat2DBase::size.

9.15.4.64 **Gauss2DsModel::Stencil** mappel::Gauss2DsModel::make_stencil (const ParamT & theta, bool compute_derivatives =true) const [inline],[inherited]

Make a new Model::Stencil object at theta.

Stencils store all of the important calculations necessary for evaluating the log-likelihood and its derivatives at a particular theta (parameter) value.

This allows re-use of the most expensive computations. Stencils can be easily passed around by reference, and most functions in the [mappel::methods](#) namespace accept a const [Stencil](#) reference in place of the model parameter.

Throws [mappel::ModelBoundsError](#) if not model.theta_in_bounds(theta).

If derivatives will not be computed with this stencil set compute_derivatives=false

Parameters

<i>theta</i>	Parameter to evaluate at
<i>compute_derivatives</i>	True to also prepare for derivative computations

Returns

A new [Stencil](#) object ready to compute with

Definition at line 162 of file Gauss2DsModel.h.

References mappel::Gauss2DsModel::Stencil::Stencil(), and mappel::PointEmitterModel::theta_in_bounds().

Referenced by mappel::Gauss2DsModel::initial_theta_estimate().

9.15.4.65 **Gauss2DsMAP & mappel::Gauss2DsMAP::operator=** (const Gauss2DsMAP & o)

Definition at line 51 of file Gauss2DsMAP.cpp.

References mappel::MAPEstimator::operator=(), mappel::PoissonNoise2DObjective::operator=(), mappel::ImageFormat2DBase::operator=(), mappel::Gauss2DsModel::operator=(), and mappel::PointEmitterModel::operator=().

9.15.4.66 Gauss2DsMAP & mappel::Gauss2DsMAP::operator= (Gauss2DsMAP && o)

Definition at line 62 of file Gauss2DsMAP.cpp.

References mappel::MAPEstimator::operator=(), mappel::PoissonNoise2DObjective::operator=(), mappel::Image↵
Format2DBase::operator=(), mappel::Gauss2DsModel::operator=(), and mappel::PointEmitterModel::operator=().

9.15.4.67 void mappel::Gauss2DsModel::pixel_grad (int i, int j, const Stencil & s, ParamT & pgrad) const [inline], [inherited]

Definition at line 180 of file Gauss2DsModel.h.

References mappel::Gauss2DsModel::Stencil::DX, mappel::Gauss2DsModel::Stencil::DXS, mappel::Gauss2Ds↵
Model::Stencil::DY, mappel::Gauss2DsModel::Stencil::DYS, mappel::Gauss2DsModel::Stencil::l(), mappel::Gauss2↵
DsModel::Stencil::X, and mappel::Gauss2DsModel::Stencil::Y.

Referenced by mappel::Gauss2DsModel::pixel_hess_update().

9.15.4.68 void mappel::Gauss2DsModel::pixel_grad2 (int i, int j, const Stencil & s, ParamT & pgrad2) const [inline], [inherited]

Definition at line 192 of file Gauss2DsModel.h.

References mappel::Gauss2DsModel::Stencil::DXS, mappel::Gauss2DsModel::Stencil::DXS2, mappel::Gauss2↵
DsModel::Stencil::DYS, mappel::Gauss2DsModel::Stencil::DYS2, mappel::Gauss2DsModel::Stencil::l(), mappel::↵
Gauss2DsModel::Stencil::sigmaX(), mappel::Gauss2DsModel::Stencil::sigmaY(), mappel::Gauss2DsModel::Stencil::X,
and mappel::Gauss2DsModel::Stencil::Y.

9.15.4.69 void mappel::Gauss2DsModel::pixel_hess (int i, int j, const Stencil & s, MatT & hess) const [inline], [inherited]

Definition at line 204 of file Gauss2DsModel.h.

References mappel::Gauss2DsModel::Stencil::DX, mappel::Gauss2DsModel::Stencil::DXS, mappel::Gauss2Ds↵
Model::Stencil::DXS2, mappel::Gauss2DsModel::Stencil::DXSX, mappel::Gauss2DsModel::Stencil::DY, mappel::↵
Gauss2DsModel::Stencil::DYS, mappel::Gauss2DsModel::Stencil::DYS2, mappel::Gauss2DsModel::Stencil::DYSY,
mappel::Gauss2DsModel::Stencil::l(), mappel::Gauss2DsModel::Stencil::sigmaX(), mappel::Gauss2DsModel::Stencil↵
::sigmaY(), mappel::Gauss2DsModel::Stencil::X, and mappel::Gauss2DsModel::Stencil::Y.

9.15.4.70 void mappel::Gauss2DsModel::pixel_hess_update (int i, int j, const Stencil & s, double dm_ratio_m1, double dmm_ratio, ParamT & grad, MatT & hess) const [inherited]

pixel derivative inner loop calculations.

Definition at line 354 of file Gauss2DsModel.cpp.

References mappel::Gauss2DsModel::Stencil::DX, mappel::Gauss2DsModel::Stencil::DXS, mappel::Gauss2Ds↵
Model::Stencil::DXS2, mappel::Gauss2DsModel::Stencil::DXSX, mappel::Gauss2DsModel::Stencil::DY, mappel::↵
Gauss2DsModel::Stencil::DYS, mappel::Gauss2DsModel::Stencil::DYS2, mappel::Gauss2DsModel::Stencil::DYSY,
mappel::Gauss2DsModel::Stencil::l(), mappel::PointEmitterModel::make_param(), mappel::Gauss2DsModel::pixel_↵
grad(), mappel::Gauss2DsModel::Stencil::sigmaX(), mappel::Gauss2DsModel::Stencil::sigmaY(), mappel::Gauss2Ds↵
Model::Stencil::X, and mappel::Gauss2DsModel::Stencil::Y.

9.15.4.71 `double mappel::Gauss2DsModel::pixel_model_value (int i, int j, const Stencil & s) const` `[inline]`,
`[inherited]`

Definition at line 173 of file Gauss2DsModel.h.

References `mappel::Gauss2DsModel::Stencil::bg()`, `mappel::Gauss2DsModel::Stencil::l()`, `mappel::Gauss2DsModel::Stencil::X`, and `mappel::Gauss2DsModel::Stencil::Y`.

9.15.4.72 `PointEmitterModel::ParamT mappel::PointEmitterModel::reflected_theta (const ParamT & theta) const`
`[inherited]`

Definition at line 276 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::PointEmitterModel::reflected_theta_stack()`.

9.15.4.73 `PointEmitterModel::ParamVecT mappel::PointEmitterModel::reflected_theta_stack (const ParamVecT & theta) const` `[inherited]`

Definition at line 316 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::make_param_stack()`, and `mappel::PointEmitterModel::reflected_theta()`.

9.15.4.74 `void mappel::PointEmitterModel::rename_hyperparam (const std::string & old_name, const std::string & new_name)`
`[inline]`, `[inherited]`

Definition at line 244 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.15.4.75 `void mappel::MCMCAdaptor2Ds::sample_mcmc_candidate (IdxT sample_index, ParamT & candidate, double step_scale = 1.0) const` `[inherited]`

Definition at line 56 of file MCMCAdaptor2Ds.cpp.

References `mappel::MCMCAdaptor1D::eta_bg`, `mappel::MCMCAdaptor1D::eta_l`, `mappel::MCMCAdaptor2Ds::eta_sigma`, `mappel::MCMCAdaptor1D::eta_x`, `mappel::MCMCAdaptor2D::eta_y`, `mappel::MCMCAdaptorBase::num_phases`, and `mappel::rng_manager`.

9.15.4.76 `void mappel::MCMCAdaptor2Ds::sample_mcmc_candidate (IdxT sample_index, ParamT & candidate, const IdxVecT & fixed_parameters_mask, double step_scale = 1.0) const` `[inherited]`

Definition at line 75 of file MCMCAdaptor2Ds.cpp.

References `mappel::MCMCAdaptor1D::eta_bg`, `mappel::MCMCAdaptor1D::eta_l`, `mappel::MCMCAdaptor2Ds::eta_sigma`, `mappel::MCMCAdaptor1D::eta_x`, `mappel::MCMCAdaptor2D::eta_y`, `mappel::MCMCAdaptorBase::num_phases`, and `mappel::rng_manager`.

9.15.4.77 `template<class RngT > PointEmitterModel::ParamT mappel::PointEmitterModel::sample_prior (RngT & rng) const`
`[inherited]`

Definition at line 264 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

9.15.4.78 `PointEmitterModel::ParamT mappel::PointEmitterModel::sample_prior () const` `[inline]`, `[inherited]`

Definition at line 268 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`, and `mappel::rng_manager`.

9.15.4.79 `void mappel::MCMCAdaptor1D::set_background_mcmc_sampling (double eta_bg = -1)` `[inherited]`

Definition at line 81 of file `MCMCAdaptor1D.cpp`.

References `mappel::PointEmitterModel::default_pixel_mean_bg`, `mappel::MCMCAdaptor1D::eta_bg`, `mappel::PointEmitterModel::get_hyperparam_value()`, `mappel::PointEmitterModel::get_lbound()`, `mappel::PointEmitterModel::get_ubound()`, and `mappel::MCMCAdaptorBase::sigma_scale`.

Referenced by `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`.

9.15.4.80 `void mappel::PointEmitterModel::set_bounds (const ParamT & lbound_, const ParamT & ubound_)`
`[inherited]`

Box-type parameter bounds

Modifies the prior bounds to prevent sampling outside the valid box-constraints.

Definition at line 213 of file `PointEmitterModel.cpp`.

References `mappel::PointEmitterModel::bounds_epsilon`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

9.15.4.81 `void mappel::PointEmitterModel::set_hyperparam_names (const StringVecT & desc)` `[inline]`,
`[inherited]`

Definition at line 260 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

9.15.4.82 `void mappel::PointEmitterModel::set_hyperparam_value (const std::string & name, double value)` `[inline]`,
`[inherited]`

Definition at line 240 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

9.15.4.83 void mappel::Gauss2DsModel::set_hyperparams (const VecT & *hyperparams*) [inherited]

Definition at line 119 of file Gauss2DsModel.cpp.

References mappel::PointEmitterModel::set_hyperparams(), and mappel::Gauss2DsModel::update_internal_1Dsum←
_estimators().

9.15.4.84 template<class ImT > void mappel::ImageFormat2DBase::set_image_in_stack (ImageStackT & *stack*,
ImageCoordT *n*, const ImT & *im*) const [inherited]

Definition at line 113 of file ImageFormat2DBase.h.

9.15.4.85 void mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling (double *eta_l* = -1) [inherited]

Definition at line 65 of file MCMCAdaptor1D.cpp.

References mappel::PointEmitterModel::default_mean_l, mappel::MCMCAdaptor1D::eta_l, mappel::PointEmitter←
Model::get_hyperparam_value(), and mappel::MCMCAdaptorBase::sigma_scale.

Referenced by mappel::MCMCAdaptor1D::MCMCAdaptor1D().

9.15.4.86 void mappel::PointEmitterModel::set_lbound (const ParamT & *lbound*) [inherited]

Definition at line 226 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::bounds_epsilon, mappel::PointEmitterModel::lbound, mappel::PointEmitter←
Model::num_params, mappel::PointEmitterModel::prior, and mappel::PointEmitterModel::ubound.

Referenced by mappel::Gauss1DsModel::set_min_sigma().

9.15.4.87 void mappel::Gauss2DsModel::set_max_sigma (const VecT & *new_sigma*) [inherited]

Set the max_sigma_ratio based on the new max_sigma's ratio with the current min_sigma.

Definition at line 155 of file Gauss2DsModel.cpp.

References mappel::PointEmitterModel::check_psf_sigma(), mappel::Gauss2DsModel::compute_max_sigma_ratio(),
mappel::Gauss2DsModel::get_min_sigma(), and mappel::Gauss2DsModel::set_max_sigma_ratio().

9.15.4.88 void mappel::Gauss2DsModel::set_max_sigma_ratio (double *max_sigma_ratio*) [inherited]

Definition at line 176 of file Gauss2DsModel.cpp.

References mappel::PointEmitterModel::bounds_epsilon, mappel::Gauss2DsModel::get_max_sigma(), mappel::Point←
EmitterModel::get_ubound(), mappel::Gauss1DsModel::set_max_sigma(), mappel::PointEmitterModel::set_ubound(),
mappel::Gauss2DsModel::x_model, and mappel::Gauss2DsModel::y_model.

Referenced by mappel::Gauss2DsModel::set_max_sigma().

9.15.4.89 `void mappel::MCMCAdaptorBase::set_mcmc_num_phases (IdxT num_phases)` [protected],[inherited]

Definition at line 59 of file MCMCAdaptorBase.cpp.

References `mappel::MCMCAdaptorBase::num_phases`.

Referenced by `mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds()`, and `mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds()`.

9.15.4.90 `void mappel::MCMCAdaptorBase::set_mcmc_sigma_scale (double scale)` [inherited]

Definition at line 39 of file MCMCAdaptorBase.cpp.

References `mappel::MCMCAdaptorBase::global_max_mcmc_sigma_scale`, and `mappel::MCMCAdaptorBase::sigma_scale`.

9.15.4.91 `void mappel::Gauss2DsModel::set_min_sigma (const VecT & new_sigma)` [inherited]

Set the minimum sigma, keeping the `max_sigma_ratio` the same.

Definition at line 137 of file Gauss2DsModel.cpp.

References `mappel::PointEmitterModel::check_psf_sigma()`, `mappel::Gauss2DsModel::get_max_sigma()`, `mappel::Gauss2DsModel::min_sigma`, `mappel::Gauss1DsModel::set_max_sigma()`, `mappel::Gauss1DsModel::set_min_sigma()`, `mappel::Gauss2DsModel::x_model`, and `mappel::Gauss2DsModel::y_model`.

9.15.4.92 `void mappel::PointEmitterModel::set_param_names (const StringVecT & desc)` [inline],[inherited]

Definition at line 252 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.15.4.93 `void mappel::Gauss2DsModel::set_prior (CompositeDist && prior_)` [inherited]

Definition at line 107 of file Gauss2DsModel.cpp.

References `mappel::PointEmitterModel::set_prior()`, and `mappel::Gauss2DsModel::update_internal_1Dsum_estimators()`.

9.15.4.94 `void mappel::Gauss2DsModel::set_prior (const CompositeDist & prior_)` [inherited]

Definition at line 113 of file Gauss2DsModel.cpp.

References `mappel::PointEmitterModel::set_prior()`, and `mappel::Gauss2DsModel::update_internal_1Dsum_estimators()`.

9.15.4.95 `void mappel::PointEmitterModel::set_rng_seed (RngSeedT seed)` [static],[inherited]

Definition at line 110 of file PointEmitterModel.cpp.

References `mappel::rng_manager`.

9.15.4.96 `void mappel::Gauss2DsModel::set_size (const ImageSizeT & size_)` [inherited]

Definition at line 125 of file Gauss2DsModel.cpp.

References `mappel::ImageFormat2DBase::set_size()`, `mappel::ImageFormat1DBase::set_size()`, `mappel::ImageFormat2DBase::size`, `mappel::Gauss2DsModel::x_model`, and `mappel::Gauss2DsModel::y_model`.

9.15.4.97 `void mappel::PointEmitterModel::set_ubound (const ParamT & ubound)` [inherited]

Definition at line 237 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::bounds_epsilon`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::Gauss1DsModel::set_max_sigma()`, and `mappel::Gauss2DsModel::set_max_sigma_ratio()`.

9.15.4.98 `bool mappel::PointEmitterModel::theta_in_bounds (const ParamT & theta) const` [inherited]

Definition at line 257 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsModel::initial_theta_estimate()`, `mappel::Gauss1DModel::make_stencil()`, `mappel::Gauss1DsModel::make_stencil()`, `mappel::Gauss2DModel::make_stencil()`, `mappel::Gauss2DsxModel::make_stencil()`, `mappel::Gauss2DsModel::make_stencil()`, and `mappel::PointEmitterModel::theta_stack_in_bounds()`.

9.15.4.99 `BoolVecT mappel::PointEmitterModel::theta_stack_in_bounds (const ParamVecT & theta) const` [inherited]

Definition at line 296 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, and `mappel::PointEmitterModel::theta_in_bounds()`.

9.15.4.100 `void mappel::Gauss2DsModel::update_internal_1Dsum_estimators ()` [protected], [inherited]

Definition at line 100 of file Gauss2DsModel.cpp.

References `mappel::Gauss2DsModel::get_max_sigma()`, `mappel::PointEmitterModel::get_prior()`, `mappel::Gauss2DsModel::make_internal_1Dsum_estimator()`, `mappel::Gauss2DsModel::min_sigma`, `mappel::ImageFormat2DBase::size`, `mappel::Gauss2DsModel::x_model`, and `mappel::Gauss2DsModel::y_model`.

Referenced by `mappel::Gauss2DsModel::debug_internal_sum_model_y()`, `mappel::Gauss2DsModel::set_hyperparams()`, and `mappel::Gauss2DsModel::set_prior()`.

9.15.5 Member Data Documentation

9.15.5.1 `const double mappel::PointEmitterModel::bounds_epsilon = 1.0E-6` `[static], [inherited]`

Distance from the boundary to constrain in `bound_theta` and `bounded_theta` methods

Definition at line 52 of file `PointEmitterModel.h`.

Referenced by `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::Gauss2D↔DsModel::set_max_sigma_ratio()`, and `mappel::PointEmitterModel::set_ubound()`.

9.15.5.2 `const double mappel::PointEmitterModel::default_alpha_sigma = 2` `[static], [inherited]`

Default per-pixel background gamma distribution shape

Definition at line 62 of file `PointEmitterModel.h`.

9.15.5.3 `const double mappel::PointEmitterModel::default_beta_pos = 3` `[static], [inherited]`

Default position parameter in symmetric beta-distributions

Definition at line 56 of file `PointEmitterModel.h`.

9.15.5.4 `const double mappel::PointEmitterModel::default_intensity_kappa = 2` `[static], [inherited]`

Default shape for intensity gamma distributions

Definition at line 60 of file `PointEmitterModel.h`.

9.15.5.5 `const double mappel::PointEmitterModel::default_max_l = INFINITY` `[static], [inherited]`

Default maximum emitter intensity

Definition at line 59 of file `PointEmitterModel.h`.

Referenced by `mappel::PointEmitterModel::make_prior_component_intensity()`.

9.15.5.6 `const double mappel::PointEmitterModel::default_mean_l = 300` `[static], [inherited]`

Default emitter intensity mean

Definition at line 58 of file `PointEmitterModel.h`.

Referenced by `mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling()`.

9.15.5.7 `const double mappel::PointEmitterModel::default_pixel_mean_bg = 4` `[static], [inherited]`

Default per-pixel mean background counts

Definition at line 61 of file PointEmitterModel.h.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_beta_position()`, `mappel::Gauss1DModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_default_prior_normal_position()`, `mappel::Gauss1DModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, and `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`.

9.15.5.8 `const double mappel::PointEmitterModel::default_sigma_pos = 1` `[static], [inherited]`

Default position parameter in symmetric beta-distributions

Definition at line 57 of file PointEmitterModel.h.

9.15.5.9 `const std::string mappel::Gauss2DsModel::DefaultPriorType = "Normal"` `[static], [inherited]`

Definition at line 59 of file Gauss2DsModel.h.

Referenced by `mappel::Gauss2DsModel::get_min_sigma()`.

9.15.5.10 `const std::string mappel::PointEmitterModel::DefaultSeperableInitEstimator = "TrustRegion"` `[static], [inherited]`

Estimator name to use in 1D separable initializations

Definition at line 49 of file PointEmitterModel.h.

Referenced by `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsxyModel::initial_theta_estimate()`, and `mappel::Gauss2DsModel::initial_theta_estimate()`.

9.15.5.11 `const std::vector< std::string > mappel::PoissonNoise2DObjective::estimator_names` `[static], [inherited]`

Definition at line 23 of file PoissonNoise2DObjective.h.

9.15.5.12 `double mappel::MCMCAdaptor1D::eta_bg = 0` `[protected], [inherited]`

The standard deviation for the normally distributed perturbation to `theta_bg` in the random walk MCMC sampling

Definition at line 33 of file MCMCAdaptor1D.h.

Referenced by `mappel::MCMCAdaptor1D::get_stats()`, `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor1D::operator=()`, `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`, and `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`.

9.15.5.13 `double mappel::MCMCAdaptor1D::eta_l=0` `[protected]`, `[inherited]`

The standard deviation for the normally distributed perturbation to `theta_l` in the random walk MCMC sampling

Definition at line 32 of file `MCMCAdaptor1D.h`.

Referenced by `mappel::MCMCAdaptor1D::get_stats()`, `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor1D::operator=()`, `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`, and `mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling()`.

9.15.5.14 `double mappel::MCMCAdaptor2Ds::eta_sigma=0` `[protected]`, `[inherited]`

The standard deviation for the normally distributed perturbation to `theta_bg` in the random walk MCMC sampling

Definition at line 27 of file `MCMCAdaptor2Ds.h`.

Referenced by `mappel::MCMCAdaptor2Ds::get_stats()`, `mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds()`, `mappel::MCMCAdaptor2Ds::operator=()`, and `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`.

9.15.5.15 `double mappel::MCMCAdaptor1D::eta_x=0` `[protected]`, `[inherited]`

The standard deviation for the normally distributed perturbation to `theta_x` in the random walk MCMC sampling

Definition at line 31 of file `MCMCAdaptor1D.h`.

Referenced by `mappel::MCMCAdaptor1D::get_stats()`, `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor1D::operator=()`, `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, and `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`.

9.15.5.16 `double mappel::MCMCAdaptor2D::eta_y=0` `[protected]`, `[inherited]`

The standard deviation for the normally distributed perturbation to `theta_y` in the random walk MCMC sampling

Definition at line 28 of file `MCMCAdaptor2D.h`.

Referenced by `mappel::MCMCAdaptor2D::get_stats()`, `mappel::MCMCAdaptor2D::MCMCAdaptor2D()`, `mappel::MCMCAdaptor2D::operator=()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, and `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`.

9.15.5.17 `const double mappel::MCMCAdaptorBase::global_default_mcmc_sigma_scale=0.05` `[static]`, `[inherited]`

Definition at line 16 of file `MCMCAdaptorBase.h`.

Referenced by `mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds()`, `mappel::MCMCAdaptor2D::MCMCAdaptor2D()`, and `mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds()`.

9.15.5.18 `const double mappel::MCMCAdaptorBase::global_max_mcmc_sigma_scale = 0.5` `[static], [inherited]`

Definition at line 17 of file MCMCAdaptorBase.h.

Referenced by `mappel::MCMCAdaptorBase::MCMCAdaptorBase()`, and `mappel::MCMCAdaptorBase::set_mcmc_sigma_scale()`.

9.15.5.19 `const double mappel::PointEmitterModel::global_max_psf_sigma = 1E2` `[static], [inherited]`

Global maximum for any `psf_sigma`. Sizes above this value are invalid, and nowhere near useful for practical point emitter localization

Definition at line 54 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::check_psf_sigma()`.

9.15.5.20 `const ImageFormat2DBase::ImageCoordT mappel::ImageFormat2DBase::global_max_size = 512` `[static], [inherited]`

Maximum size along any dimension of the image. This is insanely big to catch obvious errors

Definition at line 39 of file ImageFormat2DBase.h.

Referenced by `mappel::ImageFormat2DBase::check_size()`.

9.15.5.21 `const double mappel::PointEmitterModel::global_min_psf_sigma = 1E-1` `[static], [inherited]`

Global minimum for any `psf_sigma`. Sizes below this value are invalid, and nowhere near useful for practical point emitter localization

Definition at line 53 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::check_psf_sigma()`.

9.15.5.22 `const ImageFormat2DBase::ImageCoordT mappel::ImageFormat2DBase::global_min_size = 3` `[static], [inherited]`

Minimum size along any dimension of the image.

Definition at line 38 of file ImageFormat2DBase.h.

Referenced by `mappel::ImageFormat2DBase::check_size()`.

9.15.5.23 `ParamT mappel::PointEmitterModel::lbound` `[protected], [inherited]`

Definition at line 148 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::bound_theta()`, `mappel::PointEmitterModel::bounded_theta()`, `mappel::PointEmitterModel::get_lbound()`, `mappel::PointEmitterModel::get_stats()`, `mappel::Gauss1DsModel::initial_theta_estimate()`, `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsModel::initial_theta_estimate()`, `mappel::PointEmitterModel::operator=()`, `mappel::PointEmitterModel::reflected_theta()`, `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::PointEmitterModel::set_prior()`, `mappel::PointEmitterModel::set_ubound()`, and `mappel::PointEmitterModel::theta_in_bounds()`.

9.15.5.24 **VecT** mappel::Gauss2DsModel::min_sigma [protected],[inherited]

Gaussian PSF in pixels

Definition at line 118 of file Gauss2DsModel.h.

Referenced by mappel::Gauss2DsModel::compute_max_sigma_ratio(), mappel::Gauss2DsModel::debug_internal←_sum_model_y(), Gauss2DsMAP(), mappel::Gauss2DsMLE::Gauss2DsMLE(), mappel::Gauss2DsModel::Gauss2←DsModel(), mappel::Gauss2DsModel::get_min_sigma(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel←::Gauss2DsModel::make_internal_1Dsum_estimator(), mappel::Gauss2DsModel::operator=(), mappel::Gauss2Ds←Model::set_min_sigma(), mappel::Gauss2DsModel::Stencil::sigmaX(), mappel::Gauss2DsModel::Stencil::sigmaY(), and mappel::Gauss2DsModel::update_internal_1Dsum_estimators().

9.15.5.25 **const std::string** mappel::Gauss2DsMAP::name [static]

Definition at line 36 of file Gauss2DsMAP.h.

9.15.5.26 **const ImageFormat2DBase::ImageCoordT** mappel::ImageFormat2DBase::num_dim =2 [static], [inherited]

Number of image dimensions.

Definition at line 37 of file ImageFormat2DBase.h.

Referenced by mappel::ImageFormat2DBase::get_stats().

9.15.5.27 **IdxT** mappel::PointEmitterModel::num_hyperparams [protected],[inherited]

Definition at line 147 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::get_num_hyperparams(), mappel::PointEmitterModel::get_stats(), mappel::PointEmitterModel::operator=(), and mappel::PointEmitterModel::set_prior().

9.15.5.28 **IdxT** mappel::PointEmitterModel::num_params [protected],[inherited]

Definition at line 146 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::bound_theta(), mappel::PointEmitterModel::bounded_theta(), mappel←::PointEmitterModel::check_param_shape(), mappel::PointEmitterModel::get_num_params(), mappel::PointEmitter←Model::get_stats(), mappel::Gauss1DModel::initial_theta_estimate(), mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::PointEmitterModel::make_param(), mappel::Point←EmitterModel::make_param_mat(), mappel::PointEmitterModel::make_param_mat_stack(), mappel::PointEmitter←Model::make_param_stack(), mappel::PointEmitterModel::operator=(), mappel::PointEmitterModel::reflected_theta(), mappel::PointEmitterModel::set_bounds(), mappel::PointEmitterModel::set_lbound(), mappel::PointEmitterModel::set←_prior(), mappel::PointEmitterModel::set_ubound(), and mappel::PointEmitterModel::theta_in_bounds().

9.15.5.29 `IdxT mappel::MCMCAdaptorBase::num_phases` `[protected]`, `[inherited]`

The number of different sampling phases for candidate selection MCMC. Each phase changes a different subset of variables.

Definition at line 29 of file MCMCAdaptorBase.h.

Referenced by `mappel::MCMCAdaptorBase::get_mcmc_num_phases()`, `mappel::MCMCAdaptorBase::get_stats()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`, and `mappel::MCMCAdaptorBase::set_mcmc_num_phases()`.

9.15.5.30 `CompositeDist mappel::PointEmitterModel::prior` `[protected]`, `[inherited]`

Definition at line 145 of file PointEmitterModel.h.

Referenced by `mappel::Gauss2DModel::debug_internal_sum_model_y()`, `mappel::Gauss2DsModel::debug_internal_sum_model_y()`, `mappel::Gauss2DModel::Gauss2DModel()`, `mappel::Gauss2DsModel::Gauss2DsModel()`, `mappel::PointEmitterModel::get_hyperparam_index()`, `mappel::PointEmitterModel::get_hyperparam_names()`, `mappel::PointEmitterModel::get_hyperparam_value()`, `mappel::PointEmitterModel::get_hyperparams()`, `mappel::Gauss1DsModel::get_max_sigma()`, `mappel::Gauss1DsModel::get_min_sigma()`, `mappel::PointEmitterModel::get_param_names()`, `mappel::PointEmitterModel::get_prior()`, `mappel::PointEmitterModel::get_stats()`, `mappel::PointEmitterModel::has_hyperparam()`, `mappel::PointEmitterModel::operator=()`, `mappel::PointEmitterModel::PointEmitterModel()`, `mappel::PointEmitterModel::rename_hyperparam()`, `mappel::PointEmitterModel::sample_prior()`, `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_hyperparam_names()`, `mappel::PointEmitterModel::set_hyperparam_value()`, `mappel::PointEmitterModel::set_hyperparams()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::Gauss1DsModel::set_max_sigma()`, `mappel::Gauss1DsModel::set_min_sigma()`, `mappel::PointEmitterModel::set_param_names()`, `mappel::PointEmitterModel::set_prior()`, and `mappel::PointEmitterModel::set_ubound()`.

9.15.5.31 `const StringVecT mappel::Gauss2DsModel::prior_types` `[static]`, `[inherited]`

Initial value:

```
= { "Beta",
    "Normal"
}
```

Definition at line 58 of file Gauss2DsModel.h.

Referenced by `mappel::Gauss2DsModel::get_min_sigma()`.

9.15.5.32 `double mappel::MCMCAdaptorBase::sigma_scale` `[protected]`, `[inherited]`

A scaling factor for step sizes as a fraction of the size of the domain dimension we are walking in. (0.05 default)

Definition at line 30 of file MCMCAdaptorBase.h.

Referenced by `mappel::MCMCAdaptorBase::get_mcmc_sigma_scale()`, `mappel::MCMCAdaptorBase::get_stats()`, `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds()`, `mappel::MCMCAdaptor2D::MCMCAdaptor2D()`, `mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds()`, `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`, `mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling()`, and `mappel::MCMCAdaptorBase::set_mcmc_sigma_scale()`.

9.15.5.33 **ImageSizeT** `mappel::ImageFormat2DBase::size` [protected],[inherited]

Number of pixels in X dimension for 1D image

Definition at line 67 of file ImageFormat2DBase.h.

Referenced by `mappel::cgauss_compute_estimate()`, `mappel::cgauss_compute_estimate_debug()`, `mappel::cgauss_heuristic_compute_estimate()`, `mappel::ImageFormat2DBase::check_image_shape()`, `mappel::Gauss2DModel::Stencil::compute_derivatives()`, `mappel::Gauss2DsModel::Stencil::compute_derivatives()`, `mappel::Gauss2DModel::debug_internal_sum_model_y()`, `mappel::Gauss2DsModel::debug_internal_sum_model_y()`, `mappel::methods::expected_information()`, `mappel::Gauss2DModel::Gauss2DModel()`, `Gauss2DsMAP()`, `mappel::Gauss2DsMLE::Gauss2DsMLE()`, `mappel::Gauss2DsModel::Gauss2DsModel()`, `mappel::ImageFormat2DBase::get_num_pixels()`, `mappel::ImageFormat2DBase::get_size()`, `mappel::ImageFormat2DBase::get_stats()`, `mappel::methods::likelihood::grad()`, `mappel::methods::likelihood::grad2()`, `mappel::methods::likelihood::debug::grad_components()`, `mappel::methods::likelihood::hessian()`, `mappel::methods::likelihood::debug::hessian_components()`, `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsModel::initial_theta_estimate()`, `mappel::methods::likelihood::llh()`, `mappel::methods::likelihood::debug::llh_components()`, `mappel::Gauss2DModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, `mappel::ImageFormat2DBase::make_image()`, `mappel::ImageFormat2DBase::make_image_stack()`, `mappel::Gauss2DModel::make_internal_1Dsum_estimator()`, `mappel::Gauss2DsModel::make_internal_1Dsum_estimator()`, `mappel::Gauss2DModel::make_prior_beta_position()`, `mappel::Gauss2DsModel::make_prior_beta_position()`, `mappel::Gauss2DModel::make_prior_normal_position()`, `mappel::Gauss2DsModel::make_prior_normal_position()`, `mappel::methods::model_image()`, `mappel::ImageFormat2DBase::operator=()`, `mappel::methods::likelihood::rllh()`, `mappel::methods::likelihood::debug::rllh_components()`, `mappel::ImageFormat2DBase::set_size()`, `mappel::Gauss2DModel::set_size()`, `mappel::Gauss2DsModel::set_size()`, `mappel::methods::simulate_image()`, `mappel::methods::simulate_image_from_model()`, `mappel::Gauss2DModel::Stencil::Stencil()`, `mappel::Gauss2DsModel::Stencil::Stencil()`, `mappel::Gauss2DModel::update_internal_1Dsum_estimators()`, and `mappel::Gauss2DsModel::update_internal_1Dsum_estimators()`.

9.15.5.34 **ParamT** `mappel::PointEmitterModel::ubound` [protected],[inherited]

Definition at line 148 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::bound_theta()`, `mappel::PointEmitterModel::bounded_theta()`, `mappel::PointEmitterModel::get_stats()`, `mappel::PointEmitterModel::get_ubound()`, `mappel::Gauss1DsModel::initial_theta_estimate()`, `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsModel::initial_theta_estimate()`, `mappel::PointEmitterModel::operator=()`, `mappel::PointEmitterModel::reflected_theta()`, `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::PointEmitterModel::set_prior()`, `mappel::PointEmitterModel::set_ubound()`, and `mappel::PointEmitterModel::theta_in_bounds()`.

9.15.5.35 **Gauss1DSumModelT** `mappel::Gauss2DsModel::x_model` [protected],[inherited]

X-model fits 2D images X-axis (column sum). Using variable sigma 1D model.

Definition at line 119 of file Gauss2DsModel.h.

Referenced by `mappel::Gauss2DsModel::debug_internal_sum_model_x()`, `mappel::Gauss2DsModel::initial_theta_estimate()`, `mappel::Gauss2DsModel::operator=()`, `mappel::Gauss2DsModel::set_max_sigma_ratio()`, `mappel::Gauss2DsModel::set_min_sigma()`, `mappel::Gauss2DsModel::set_size()`, and `mappel::Gauss2DsModel::update_internal_1Dsum_estimators()`.

9.15.5.36 Gauss1DSumModelT mappel::Gauss2DsModel::y_model [protected], [inherited]

Y-model fits 2D images Y-axis (row sum). Using variable sigma 1D model.

Definition at line 120 of file Gauss2DsModel.h.

Referenced by mappel::Gauss2DsModel::debug_internal_sum_model_y(), mappel::Gauss2DsModel::Gauss2DsModel(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::Gauss2DsModel::operator=(), mappel::Gauss2DsModel::set_max_sigma_ratio(), mappel::Gauss2DsModel::set_min_sigma(), mappel::Gauss2DsModel::set_size(), and mappel::Gauss2DsModel::update_internal_1Dsum_estimators().

The documentation for this class was generated from the following files:


- [Gauss2DsMAP.h](#)
- [Gauss2DsMAP.cpp](#)

9.16 mappel::Gauss2DsMLE Class Reference

A 2D Gaussian with a variable scalar PSF sigma under a Poisson noise assumption using a maximum-likelihood objective.

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/Gauss2DsMLE.h>
```

Inheritance diagram for mappel::Gauss2DsMLE:

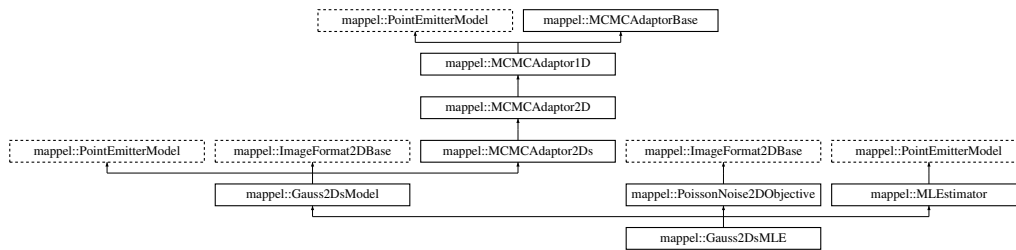

Public Types

- using [Gauss1DSumModelT](#) = [Gauss1DsMAP](#)
- using [StencilVecT](#) = std::vector< [Stencil](#) >
- using [ParamT](#) = arma::vec
- using [ParamVecT](#) = arma::mat
- using [ImageCoordT](#) = uint32_t
- using [ImagePixelT](#) = double
- template<class CoordT >
using [ImageSizeShapeT](#) = arma::Col< CoordT >
- template<class CoordT >
using [ImageSizeVecShapeT](#) = arma::Mat< CoordT >
- using [ImageSizeT](#) = [ImageSizeShapeT](#)< [ImageCoordT](#) >
- using [ImageSizeVecT](#) = [ImageSizeVecShapeT](#)< [ImageCoordT](#) >
- template<class PixelT >
using [ImageShapeT](#) = arma::Mat< PixelT >
- template<class PixelT >
using [ImageStackShapeT](#) = arma::Cube< PixelT >
- using [ImageT](#) = [ImageShapeT](#)< [ImagePixelT](#) >
- using [ImageStackT](#) = [ImageStackShapeT](#)< [ImagePixelT](#) >
- using [ModelDataT](#) = [ImageT](#)
- using [ModelDataStackT](#) = [ImageStackT](#)

Public Member Functions

- [Gauss2DsMLE](#) (const [ImageSizeT](#) &size, const [VecT](#) &min_sigma, double max_sigma_ratio, const std::string &prior_type=DefaultPriorType)
- [Gauss2DsMLE](#) (const [ImageSizeT](#) &size, const [VecT](#) &min_sigma, const [VecT](#) &max_sigma, const std::string &prior_type=DefaultPriorType)
- [Gauss2DsMLE](#) (const [ImageSizeT](#) &size, const [VecT](#) &min_sigma, CompositeDist &&prior)
- [Gauss2DsMLE](#) (const [ImageSizeT](#) &size, const [VecT](#) &min_sigma, const CompositeDist &prior)
- [Gauss2DsMLE](#) (const [Gauss2DsMLE](#) &o)
- [Gauss2DsMLE](#) & operator= (const [Gauss2DsMLE](#) &o)
- [Gauss2DsMLE](#) ([Gauss2DsMLE](#) &&o)
- [Gauss2DsMLE](#) & operator= ([Gauss2DsMLE](#) &&o)
- void [set_hyperparams](#) (const [VecT](#) &hyperparams)
- void [set_prior](#) (CompositeDist &&prior_)
- void [set_prior](#) (const CompositeDist &prior_)
- void [set_size](#) (const [ImageSizeT](#) &size_)
- [VecT](#) [get_min_sigma](#) () const
- double [get_min_sigma](#) (IdxT dim) const
- [VecT](#) [get_max_sigma](#) () const
- double [get_max_sigma](#) (IdxT dim) const
- double [get_max_sigma_ratio](#) () const
- void [set_min_sigma](#) (const [VecT](#) &min_sigma)
- void [set_max_sigma](#) (const [VecT](#) &max_sigma)
- void [set_max_sigma_ratio](#) (double max_sigma_ratio)
- [StatsT](#) [get_stats](#) () const
- [Stencil](#) [make_stencil](#) (const [ParamT](#) &theta, bool compute_derivatives=true) const
Make a new Model::Stencil object at theta.
- double [pixel_model_value](#) (int i, int j, const [Stencil](#) &s) const
- void [pixel_grad](#) (int i, int j, const [Stencil](#) &s, [ParamT](#) &pgrad) const
- void [pixel_grad2](#) (int i, int j, const [Stencil](#) &s, [ParamT](#) &pgrad2) const
- void [pixel_hess](#) (int i, int j, const [Stencil](#) &s, [MatT](#) &hess) const
- void [pixel_hess_update](#) (int i, int j, const [Stencil](#) &s, double dm_ratio_m1, double dmm_ratio, [ParamT](#) &grad, [MatT](#) &hess) const
pixel derivative inner loop calculations.
- [Stencil](#) [initial_theta_estimate](#) (const [ImageT](#) &im) const
Fast, heuristic estimate of initial theta.
- [Stencil](#) [initial_theta_estimate](#) (const [ImageT](#) &im, const [ParamT](#) &theta_init) const
- [Stencil](#) [initial_theta_estimate](#) (const [ImageT](#) &im, const [ParamT](#) &theta_init, const std::string &estimator) const
- [Gauss1DSumModelT](#) [debug_internal_sum_model_x](#) () const
- [Gauss1DSumModelT](#) [debug_internal_sum_model_y](#) () const
- [IdxT](#) [get_num_params](#) () const
- void [check_param_shape](#) (const [ParamT](#) &theta) const
- void [check_param_shape](#) (const [ParamVecT](#) &theta) const
- void [check_psf_sigma](#) (double psf_sigma) const
- void [check_psf_sigma](#) (const [VecT](#) &psf_sigma) const
- [ParamT](#) [make_param](#) () const
- template<class FillT >
[ParamT](#) [make_param](#) (FillT fill) const
- [ParamVecT](#) [make_param_stack](#) ([IdxT](#) n) const
- template<class FillT >
[ParamVecT](#) [make_param_stack](#) ([IdxT](#) n, FillT fill) const

- [MatT make_param_mat](#) () const
- `template<class FillT >`
[MatT make_param_mat](#) (FillT fill) const
- [CubeT make_param_mat_stack](#) (IdxT n) const
- `template<class FillT >`
[CubeT make_param_mat_stack](#) (IdxT n, FillT fill) const
- [CompositeDist & get_prior](#) ()
- const [CompositeDist & get_prior](#) () const
- [IdxT get_num_hyperparams](#) () const
- [VecT get_hyperparams](#) () const
- bool [has_hyperparam](#) (const std::string &name) const
- double [get_hyperparam_value](#) (const std::string &name) const
- int [get_hyperparam_index](#) (const std::string &name) const
- void [set_hyperparam_value](#) (const std::string &name, double value)
- void [rename_hyperparam](#) (const std::string &old_name, const std::string &new_name)
- [StringVecT get_param_names](#) () const
- void [set_param_names](#) (const [StringVecT](#) &desc)
- [StringVecT get_hyperparam_names](#) () const
- void [set_hyperparam_names](#) (const [StringVecT](#) &desc)
- `template<class RngT >`
[ParamT sample_prior](#) (RngT &rng) const
- [ParamT sample_prior](#) () const
- void [set_bounds](#) (const [ParamT](#) &lbound, const [ParamT](#) &ubound)
- void [set_lbound](#) (const [ParamT](#) &lbound)
- void [set_ubound](#) (const [ParamT](#) &ubound)
- const [ParamT](#) & [get_lbound](#) () const
- const [ParamT](#) & [get_ubound](#) () const
- bool [theta_in_bounds](#) (const [ParamT](#) &theta) const
- void [bound_theta](#) ([ParamT](#) &theta, double epsilon=[bounds_epsilon](#)) const
- [ParamT bounded_theta](#) (const [ParamT](#) &theta, double epsilon=[bounds_epsilon](#)) const
- [ParamT reflected_theta](#) (const [ParamT](#) &theta) const
- [BoolVecT theta_stack_in_bounds](#) (const [ParamVecT](#) &theta) const
- [ParamVecT bounded_theta_stack](#) (const [ParamVecT](#) &theta, double epsilon=[bounds_epsilon](#)) const
- [ParamVecT reflected_theta_stack](#) (const [ParamVecT](#) &theta) const
- [ImageT make_image](#) () const
- [ImageStackT make_image_stack](#) ([ImageCoordT](#) n) const
- [ImageCoordT get_size_image_stack](#) (const [ImageStackT](#) &stack) const
- [ImageT get_image_from_stack](#) (const [ImageStackT](#) &stack, [ImageCoordT](#) n) const
- `template<class ImT >`
void [set_image_in_stack](#) ([ImageStackT](#) &stack, [ImageCoordT](#) n, const ImT &im) const
- const [ImageSizeT](#) & [get_size](#) () const
- [ImageCoordT get_size](#) (IdxT idx) const
- [ImageCoordT get_num_pixels](#) () const
- void [check_image_shape](#) (const [ImageT](#) &im) const
Check the shape of a single images is correct for model size.
- void [check_image_shape](#) (const [ImageStackT](#) &ims) const
Check the shape of a stack of images is correct for model size.
- void [sample_mcmc_candidate](#) (IdxT sample_index, [ParamT](#) &candidate, double step_scale=1.0) const
- void [sample_mcmc_candidate](#) (IdxT sample_index, [ParamT](#) &candidate, const [IdxVecT](#) &fixed_parameters_←
mask, double step_scale=1.0) const
- void [set_intensity_mcmc_sampling](#) (double eta_l=-1)

- void [set_background_mcmc_sampling](#) (double [eta_bg](#)=-1)
- void [set_mcmc_sigma_scale](#) (double [scale](#))
- double [get_mcmc_sigma_scale](#) () const
- [IdxT](#) [get_mcmc_num_phases](#) () const

Static Public Member Functions

- static CompositeDist [make_default_prior](#) (const [ImageSizeT](#) &[size](#), double [max_sigma_ratio](#), const std::string &[prior_type](#))
- static CompositeDist [make_default_prior_beta_position](#) (const [ImageSizeT](#) &[size](#), double [max_sigma_ratio](#))
- static CompositeDist [make_default_prior_normal_position](#) (const [ImageSizeT](#) &[size](#), double [max_sigma_ratio](#))
- static CompositeDist [make_prior_beta_position](#) (const [ImageSizeT](#) &[size](#), double [beta_xpos](#), double [beta_ypos](#), double [mean_l](#), double [kappa_l](#), double [mean_bg](#), double [kappa_bg](#), double [max_sigma_ratio](#), double [alpha_sigma](#))
- static CompositeDist [make_prior_normal_position](#) (const [ImageSizeT](#) &[size](#), double [sigma_xpos](#), double [sigma_ypos](#), double [mean_l](#), double [kappa_l](#), double [mean_bg](#), double [kappa_bg](#), double [max_sigma_ratio](#), double [alpha_sigma](#))
- static [prior_hessian::TruncatedNormalDist](#) [make_prior_component_position_normal](#) ([IdxT](#) [size](#), double [pos_sigma](#)=[default_sigma_pos](#))
- static [prior_hessian::ScaledSymmetricBetaDist](#) [make_prior_component_position_beta](#) ([IdxT](#) [size](#), double [pos_beta](#)=[default_beta_pos](#))
- static [prior_hessian::TruncatedGammaDist](#) [make_prior_component_intensity](#) (double [mean](#)=[default_mean_l](#), double [kappa](#)=[default_intensity_kappa](#))
- static [prior_hessian::TruncatedParetoDist](#) [make_prior_component_sigma](#) (double [min_sigma](#), double [max_sigma](#), double [alpha](#)=[default_alpha_sigma](#))
- static void [set_rng_seed](#) ([RngSeedT](#) [seed](#))
- static [ParallelRngManagerT](#) & [get_rng_manager](#) ()
- static [ParallelRngGeneratorT](#) & [get_rng_generator](#) ()
- static void [check_size](#) (const [ImageSizeT](#) &[size](#))

Check the size argument for the model.

Static Public Attributes

- static const std::string [name](#)
- static const [StringVecT](#) [prior_types](#)
- static const std::string [DefaultPriorType](#) = "Normal"
- static const std::string [DefaultSeperableInitEstimator](#) = "TrustRegion"
- static const double [bounds_epsilon](#) = 1.0E-6
- static const double [global_min_psf_sigma](#) = 1E-1
- static const double [global_max_psf_sigma](#) = 1E2
- static const double [default_beta_pos](#) = 3
- static const double [default_sigma_pos](#) = 1
- static const double [default_mean_l](#) = 300
- static const double [default_max_l](#) = INFINITY
- static const double [default_intensity_kappa](#) = 2
- static const double [default_pixel_mean_bg](#) = 4
- static const double [default_alpha_sigma](#) = 2
- static const [ImageCoordT](#) [num_dim](#) =2
- static const [ImageCoordT](#) [global_min_size](#) =3
- static const [ImageCoordT](#) [global_max_size](#) =512
- static const double [global_default_mcmc_sigma_scale](#) = 0.05
- static const double [global_max_mcmc_sigma_scale](#) = 0.5
- static const std::vector< std::string > [estimator_names](#)

Protected Member Functions

- void [update_internal_1Dsum_estimators](#) ()
- void [set_mcmc_num_phases](#) (IdxT num_phases)

Static Protected Member Functions

- static [Gauss1DSumModelT](#) [make_internal_1Dsum_estimator](#) (IdxT dim, const [ImageSizeT](#) &size, const [VecT](#) &min_sigma, const [VecT](#) &max_sigma, const [CompositeDist](#) &prior)
- static double [compute_max_sigma_ratio](#) (const [VecT](#) &min_sigma, const [VecT](#) &max_sigma)

Protected Attributes

- [VecT](#) min_sigma
- [Gauss1DSumModelT](#) x_model
- [Gauss1DSumModelT](#) y_model
- [CompositeDist](#) prior
- [IdxT](#) num_params
- [IdxT](#) num_hyperparams
- [ParamT](#) lbound
- [ParamT](#) ubound
- [ImageSizeT](#) size
- double eta_sigma =0
- double eta_y =0
- double eta_x =0
- double eta_l =0
- double eta_bg =0
- [IdxT](#) num_phases
- double sigma_scale

9.16.1 Detailed Description

A 2D Gaussian with a variable scalar PSF sigma under a Poisson noise assumption using a maximum-likelihood objective.

Model: [Gauss2DsModel](#) - 2D Gaussian variable scalar PSF sigma Objective: [PoissonNoise2DObjective](#) - Poisson noise model for 2D Estimator: [MLEstimator](#) - Pure-likelihood estimator

Definition at line 24 of file [Gauss2DsMLE.h](#).

9.16.2 Member Typedef Documentation

9.16.2.1 using mappel::Gauss2DsModel::Gauss1DSumModelT = Gauss1DsMAP [inherited]

Definition at line 26 of file [Gauss2DsModel.h](#).

9.16.2.2 `using mappel::ImageFormat2DBase::ImageCoordT = uint32_t` `[inherited]`

Image size coordinate storage type

Definition at line 24 of file ImageFormat2DBase.h.

9.16.2.3 `using mappel::ImageFormat2DBase::ImagePixelT = double` `[inherited]`

Image pixel storage type

Definition at line 25 of file ImageFormat2DBase.h.

9.16.2.4 `template<class PixelT > using mappel::ImageFormat2DBase::ImageShapeT = arma::Mat<PixelT>`
`[inherited]`

Shape of the data type for a single image

Definition at line 32 of file ImageFormat2DBase.h.

9.16.2.5 `template<class CoordT > using mappel::ImageFormat2DBase::ImageSizeShapeT = arma::Col<CoordT>`
`[inherited]`

Shape of the data type to store a single image's coordinates

Definition at line 27 of file ImageFormat2DBase.h.

9.16.2.6 `using mappel::ImageFormat2DBase::ImageSizeT = ImageSizeShapeT<ImageCoordT>`
`[inherited]`

Data type for a single image size

Definition at line 29 of file ImageFormat2DBase.h.

9.16.2.7 `template<class CoordT > using mappel::ImageFormat2DBase::ImageSizeVecShapeT = arma::Mat<CoordT>`
`[inherited]`

Shape of the data type to store a vector of image's coordinates

Definition at line 28 of file ImageFormat2DBase.h.

9.16.2.8 `using mappel::ImageFormat2DBase::ImageSizeVecT = ImageSizeVecShapeT<ImageCoordT>`
`[inherited]`

Data type for a sequence of image sizes

Definition at line 30 of file ImageFormat2DBase.h.

9.16.2.9 `template<class PixelT > using mappel::ImageFormat2DBase::ImageStackShapeT = arma::Cube<PixelT>`
`[inherited]`

Shape of the data type for a sequence of images

Definition at line 33 of file ImageFormat2DBase.h.

9.16.2.10 `using mappel::ImageFormat2DBase::ImageStackT = ImageStackShapeT<ImagePixelT>`
`[inherited]`

Data type to represent a sequence of images

Definition at line 35 of file ImageFormat2DBase.h.

9.16.2.11 `using mappel::ImageFormat2DBase::ImageT = ImageShapeT<ImagePixelT>` `[inherited]`

Data type to represent single image

Definition at line 34 of file ImageFormat2DBase.h.

9.16.2.12 `using mappel::PoissonNoise2DObjective::ModelDataStackT = ImageStackT` `[inherited]`

Objective function data stack type: 2D double precision image stack, of images gain-corrected to approximate photons counts

Definition at line 25 of file PoissonNoise2DObjective.h.

9.16.2.13 `using mappel::PoissonNoise2DObjective::ModelDataT = ImageT` `[inherited]`

Objective function data type: 2D double precision image, gain-corrected to approximate photons counts

Definition at line 24 of file PoissonNoise2DObjective.h.

9.16.2.14 `using mappel::PointEmitterModel::ParamT = arma::vec` `[inherited]`

Parameter vector

Definition at line 47 of file PointEmitterModel.h.

9.16.2.15 `using mappel::PointEmitterModel::ParamVecT = arma::mat` `[inherited]`

Vector of parameter vectors

Definition at line 48 of file PointEmitterModel.h.

9.16.2.16 `using mappel::Gauss2DsModel::StencilVecT = std::vector<Stencil>` `[inherited]`

Definition at line 55 of file Gauss2DsModel.h.

9.16.3 Constructor & Destructor Documentation

9.16.3.1 `mappel::Gauss2DsMLE::Gauss2DsMLE (const ImageSizeT & size, const VecT & min_sigma, double max_sigma_ratio, const std::string & prior_type = DefaultPriorType)`

Definition at line 11 of file Gauss2DsMLE.cpp.

References `mappel::Gauss2DsModel::min_sigma`, and `mappel::ImageFormat2DBase::size`.

9.16.3.2 `mappel::Gauss2DsMLE::Gauss2DsMLE (const ImageSizeT & size, const VecT & min_sigma, const VecT & max_sigma, const std::string & prior_type = DefaultPriorType)`

Definition at line 15 of file Gauss2DsMLE.cpp.

References `mappel::Gauss2DsModel::compute_max_sigma_ratio()`, `mappel::Gauss2DsModel::make_default_prior()`, `mappel::Gauss2DsModel::min_sigma`, and `mappel::ImageFormat2DBase::size`.

9.16.3.3 `mappel::Gauss2DsMLE::Gauss2DsMLE (const ImageSizeT & size, const VecT & min_sigma, CompositeDist && prior)`

Definition at line 19 of file Gauss2DsMLE.cpp.

9.16.3.4 `mappel::Gauss2DsMLE::Gauss2DsMLE (const ImageSizeT & size, const VecT & min_sigma, const CompositeDist & prior)`

Definition at line 27 of file Gauss2DsMLE.cpp.

9.16.3.5 `mappel::Gauss2DsMLE::Gauss2DsMLE (const Gauss2DsMLE & o)`

Definition at line 35 of file Gauss2DsMLE.cpp.

9.16.3.6 `mappel::Gauss2DsMLE::Gauss2DsMLE (Gauss2DsMLE && o)`

Definition at line 43 of file Gauss2DsMLE.cpp.

9.16.4 Member Function Documentation

9.16.4.1 `void mappel::PointEmitterModel::bound_theta (ParamT & theta, double epsilon = bounds_epsilon) const`
[inherited]

Definition at line 248 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

9.16.4.2 `PointEmitterModel::ParamT mappel::PointEmitterModel::bounded_theta (const ParamT & theta, double epsilon = bounds_epsilon) const` [inherited]

Definition at line 265 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::PointEmitterModel::bounded_theta_stack()`.

9.16.4.3 `PointEmitterModel::ParamVecT mappel::PointEmitterModel::bounded_theta_stack (const ParamVecT & theta, double epsilon = bounds_epsilon) const` [inherited]

Definition at line 306 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::bounded_theta()`, `mappel::PointEmitterModel::check_param_shape()`, and `mappel::PointEmitterModel::make_param_stack()`.

9.16.4.4 `void mappel::ImageFormat2DBase::check_image_shape (const ImageT & im) const` [inherited]

Check the shape of a single images is correct for model size.

Definition at line 80 of file ImageFormat2DBase.cpp.

References `mappel::ImageFormat2DBase::size`.

9.16.4.5 `void mappel::ImageFormat2DBase::check_image_shape (const ImageStackT & ims) const` [inherited]

Check the shape of a stack of images is correct for model size.

Definition at line 93 of file ImageFormat2DBase.cpp.

References `mappel::ImageFormat2DBase::size`.

9.16.4.6 `void mappel::PointEmitterModel::check_param_shape (const ParamT & theta) const` [inherited]

Definition at line 167 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::num_params`.

Referenced by `mappel::PointEmitterModel::bound_theta()`, `mappel::PointEmitterModel::bounded_theta()`, `mappel::PointEmitterModel::bounded_theta_stack()`, `mappel::PointEmitterModel::reflected_theta()`, `mappel::PointEmitterModel::reflected_theta_stack()`, `mappel::PointEmitterModel::theta_in_bounds()`, and `mappel::PointEmitterModel::theta_stack_in_bounds()`.

9.16.4.7 `void mappel::PointEmitterModel::check_param_shape (const ParamVecT & theta) const` [inherited]

Definition at line 176 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::num_params`.

9.16.4.8 `void mappel::PointEmitterModel::check_psf_sigma (double psf_sigma) const` `[inherited]`

Definition at line 185 of file `PointEmitterModel.cpp`.

References `mappel::PointEmitterModel::global_max_psf_sigma`, and `mappel::PointEmitterModel::global_min_psf_sigma`.

Referenced by `mappel::Gauss1DModel::Gauss1DModel()`, `mappel::Gauss2DModel::Gauss2DModel()`, `mappel::Gauss2DsModel::Gauss2DsModel()`, `mappel::Gauss1DsModel::set_max_sigma()`, `mappel::Gauss2DsModel::set_max_sigma()`, `mappel::Gauss1DsModel::set_min_sigma()`, `mappel::Gauss2DsModel::set_min_sigma()`, `mappel::Gauss1DModel::set_psf_sigma()`, and `mappel::Gauss2DModel::set_psf_sigma()`.

9.16.4.9 `void mappel::PointEmitterModel::check_psf_sigma (const VecT & psf_sigma) const` `[inherited]`

Definition at line 197 of file `PointEmitterModel.cpp`.

References `mappel::PointEmitterModel::global_max_psf_sigma`, and `mappel::PointEmitterModel::global_min_psf_sigma`.

9.16.4.10 `void mappel::ImageFormat2DBase::check_size (const ImageSizeT & size_)` `[static],[inherited]`

Check the size argument for the model.

Definition at line 60 of file `ImageFormat2DBase.cpp`.

References `mappel::ImageFormat2DBase::global_max_size`, and `mappel::ImageFormat2DBase::global_min_size`.

Referenced by `mappel::ImageFormat2DBase::ImageFormat2DBase()`, and `mappel::ImageFormat2DBase::set_size()`.

9.16.4.11 `double mappel::Gauss2DsModel::compute_max_sigma_ratio (const VecT & min_sigma, const VecT & max_sigma)` `[static],[protected],[inherited]`

Definition at line 162 of file `Gauss2DsModel.cpp`.

References `mappel::Gauss2DsModel::min_sigma`.

Referenced by `mappel::Gauss2DsModel::debug_internal_sum_model_y()`, `mappel::Gauss2DsMAP::Gauss2DsMAP()`, `Gauss2DsMLE()`, and `mappel::Gauss2DsModel::set_max_sigma()`.

9.16.4.12 `Gauss1DSumModelT mappel::Gauss2DsModel::debug_internal_sum_model_x () const` `[inline],[inherited]`

Definition at line 104 of file `Gauss2DsModel.h`.

References `mappel::Gauss2DsModel::x_model`.

9.16.4.13 `Gauss1DSumModelT` `mappel::Gauss2DsModel::debug_internal_sum_model_y () const` `[inline]`,
`[inherited]`

Definition at line 105 of file `Gauss2DsModel.h`.

References `mappel::Gauss2DsModel::compute_max_sigma_ratio()`, `mappel::Gauss2DsModel::Gauss2DsModel()`, `mappel::Gauss2DsModel::make_internal_1Dsum_estimator()`, `mappel::Gauss2DsModel::min_sigma`, `mappel::Gauss2DsModel::operator=()`, `mappel::PointEmitterModel::prior`, `mappel::ImageFormat2DBase::size`, `mappel::Gauss2DsModel::update_internal_1Dsum_estimators()`, and `mappel::Gauss2DsModel::y_model`.

9.16.4.14 `int` `mappel::PointEmitterModel::get_hyperparam_index (const std::string & name) const` `[inline]`,
`[inherited]`

Definition at line 236 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

9.16.4.15 `StringVecT` `mappel::PointEmitterModel::get_hyperparam_names () const` `[inline]`, `[inherited]`

Definition at line 256 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

9.16.4.16 `double` `mappel::PointEmitterModel::get_hyperparam_value (const std::string & name) const` `[inline]`,
`[inherited]`

Definition at line 232 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

Referenced by `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`, and `mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling()`.

9.16.4.17 `PointEmitterModel::ParamT` `mappel::PointEmitterModel::get_hyperparams () const` `[inline]`,
`[inherited]`

Definition at line 224 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

9.16.4.18 `ImageFormat2DBase::ImageT` `mappel::ImageFormat2DBase::get_image_from_stack (const ImageStackT & stack, ImageCoordT n) const` `[inline]`, `[inherited]`

Definition at line 106 of file `ImageFormat2DBase.h`.

9.16.4.19 `const PointEmitterModel::ParamT &` `mappel::PointEmitterModel::get_lbound () const` `[inline]`,
`[inherited]`

Definition at line 212 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::lbound`.

Referenced by `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor2D::MCMCAdaptor2D()`, and `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`.

9.16.4.20 **VecT** mappel::Gauss2DsModel::get_max_sigma () const [inline],[inherited]

Definition at line 132 of file Gauss2DsModel.h.

References mappel::Gauss2DsModel::get_max_sigma_ratio(), and mappel::Gauss2DsModel::get_min_sigma().

Referenced by mappel::Gauss2DsModel::Gauss2DsModel(), mappel::Gauss2DsModel::get_stats(), mappel::Gauss2DsModel::operator=(), mappel::Gauss2DsModel::set_max_sigma_ratio(), mappel::Gauss2DsModel::set_min_sigma(), and mappel::Gauss2DsModel::update_internal_1Dsum_estimators().

9.16.4.21 **double** mappel::Gauss2DsModel::get_max_sigma (IdxT dim) const [inline],[inherited]

Definition at line 136 of file Gauss2DsModel.h.

References mappel::Gauss2DsModel::get_max_sigma_ratio(), and mappel::Gauss2DsModel::get_min_sigma().

9.16.4.22 **double** mappel::Gauss2DsModel::get_max_sigma_ratio () const [inline],[inherited]

Definition at line 140 of file Gauss2DsModel.h.

References mappel::PointEmitterModel::get_ubound().

Referenced by mappel::Gauss2DsModel::get_max_sigma(), and mappel::Gauss2DsModel::get_stats().

9.16.4.23 **IdxT** mappel::MCMCAdaptorBase::get_mcmc_num_phases () const [inherited]

Definition at line 56 of file MCMCAdaptorBase.cpp.

References mappel::MCMCAdaptorBase::num_phases.

9.16.4.24 **double** mappel::MCMCAdaptorBase::get_mcmc_sigma_scale () const [inherited]

Definition at line 53 of file MCMCAdaptorBase.cpp.

References mappel::MCMCAdaptorBase::sigma_scale.

9.16.4.25 **VecT** mappel::Gauss2DsModel::get_min_sigma () const [inline],[inherited]

Definition at line 128 of file Gauss2DsModel.h.

References mappel::Gauss2DsModel::min_sigma.

Referenced by mappel::Gauss2DsModel::get_max_sigma(), mappel::Gauss2DsModel::get_stats(), and mappel::Gauss2DsModel::set_max_sigma().

9.16.4.26 **double** mappel::Gauss2DsModel::get_min_sigma (IdxT dim) const [inherited]

Definition at line 191 of file Gauss2DsModel.cpp.

References mappel::Gauss2DsModel::DefaultPriorType, mappel::Gauss2DsModel::min_sigma, and mappel::Gauss2DsModel::prior_types.

9.16.4.27 `IdxT mappel::PointEmitterModel::get_num_hyperparams () const [inline],[inherited]`

Definition at line 208 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_hyperparams.

9.16.4.28 `IdxT mappel::PointEmitterModel::get_num_params () const [inline],[inherited]`

Definition at line 160 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.16.4.29 `ImageFormat2DBase::ImageCoordT mappel::ImageFormat2DBase::get_num_pixels () const [inline],[inherited]`

Definition at line 79 of file ImageFormat2DBase.h.

References mappel::ImageFormat2DBase::size.

Referenced by mappel::ImageFormat2DBase::get_stats().

9.16.4.30 `StringVecT mappel::PointEmitterModel::get_param_names () const [inline],[inherited]`

Definition at line 248 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.16.4.31 `CompositeDist & mappel::PointEmitterModel::get_prior () [inline],[inherited]`

Definition at line 200 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

Referenced by mappel::Gauss2DModel::update_internal_1Dsum_estimators(), and mappel::Gauss2DsModel::update_internal_1Dsum_estimators().

9.16.4.32 `const CompositeDist & mappel::PointEmitterModel::get_prior () const [inline],[inherited]`

Definition at line 204 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.16.4.33 `ParallelRngGeneratorT & mappel::PointEmitterModel::get_rng_generator () [static],[inherited]`

Definition at line 120 of file PointEmitterModel.cpp.

References mappel::rng_manager.

9.16.4.34 ParallelRngManagerT & mappel::PointEmitterModel::get_rng_manager () [static],[inherited]

Definition at line 115 of file PointEmitterModel.cpp.

References mappel::rng_manager.

9.16.4.35 const ImageFormat2DBase::ImageSizeT & mappel::ImageFormat2DBase::get_size () const [inline],[inherited]

Definition at line 74 of file ImageFormat2DBase.h.

References mappel::ImageFormat2DBase::size.

9.16.4.36 ImageFormat2DBase::ImageCoordT mappel::ImageFormat2DBase::get_size (IdxT idx) const [inherited]

Definition at line 41 of file ImageFormat2DBase.cpp.

References mappel::ImageFormat2DBase::size.

9.16.4.37 ImageFormat2DBase::ImageCoordT mappel::ImageFormat2DBase::get_size_image_stack (const ImageStackT & stack) const [inline],[inherited]

Definition at line 99 of file ImageFormat2DBase.h.

9.16.4.38 StatsT mappel::Gauss2DsModel::get_stats () const [inherited]

Definition at line 337 of file Gauss2DsModel.cpp.

References mappel::Gauss2DsModel::get_max_sigma(), mappel::Gauss2DsModel::get_max_sigma_ratio(), mappel::Gauss2DsModel::get_min_sigma(), mappel::MCMCAdaptor2Ds::get_stats(), mappel::ImageFormat2DBase::get_stats(), and mappel::PointEmitterModel::get_stats().

9.16.4.39 const PointEmitterModel::ParamT & mappel::PointEmitterModel::get_ubound () const [inline],[inherited]

Definition at line 216 of file PointEmitterModel.h.

References mappel::PointEmitterModel::ubound.

Referenced by mappel::Gauss2DsxyModel::get_max_sigma_ratio(), mappel::Gauss2DsModel::get_max_sigma_ratio(), mappel::MCMCAdaptor1D::MCMCAdaptor1D(), mappel::MCMCAdaptor2D::MCMCAdaptor2D(), mappel::MCMCAdaptor1D::set_background_mcmc_sampling(), and mappel::Gauss2DsModel::set_max_sigma_ratio().

9.16.4.40 bool mappel::PointEmitterModel::has_hyperparam (const std::string & name) const [inline],[inherited]

Definition at line 228 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.16.4.41 Gauss2DsModel::Stencil mappel::Gauss2DsModel::initial_theta_estimate (const ImageT & *im*) const
[inline], [inherited]

Fast, heuristic estimate of initial theta.

Definition at line 224 of file Gauss2DsModel.h.

References mappel::PointEmitterModel::DefaultSeperableInitEstimator, and mappel::PointEmitterModel::make_↵
param().

Referenced by mappel::Gauss2DsModel::initial_theta_estimate().

9.16.4.42 Gauss2DsModel::Stencil mappel::Gauss2DsModel::initial_theta_estimate (const ImageT & *im*, const ParamT &
theta_init) const [inline], [inherited]

Definition at line 231 of file Gauss2DsModel.h.

References mappel::PointEmitterModel::DefaultSeperableInitEstimator, and mappel::Gauss2DsModel::initial_theta_↵
estimate().

9.16.4.43 Gauss2DsModel::Stencil mappel::Gauss2DsModel::initial_theta_estimate (const ImageT & *im*, const ParamT &
theta_init, const std::string & *estimator*) const [inherited]

Definition at line 381 of file Gauss2DsModel.cpp.

References mappel::Gauss2DsModel::Stencil::bg(), mappel::methods::estimate_max(), mappel::Gauss2DsModel::↵
Stencil::l(), mappel::PointEmitterModel::lbound, mappel::Gauss2DsModel::make_stencil(), mappel::Gauss2DsModel↵
::min_sigma, mappel::PointEmitterModel::num_params, mappel::Gauss2DsModel::Stencil::sigma_ratio(), mappel↵
::ImageFormat2DBase::size, mappel::estimator::MLEData::theta, mappel::PointEmitterModel::theta_in_bounds(),
mappel::PointEmitterModel::ubound, mappel::Gauss2DsModel::x_model, and mappel::Gauss2DsModel::y_model.

9.16.4.44 CompositeDist mappel::Gauss2DsModel::make_default_prior (const ImageSizeT & *size*, double *max_sigma_ratio*,
const std::string & *prior_type*) [static], [inherited]

Definition at line 208 of file Gauss2DsModel.cpp.

References mappel::istarts_with(), mappel::Gauss2DsModel::make_default_prior_beta_position(), and mappel::↵
Gauss2DsModel::make_default_prior_normal_position().

Referenced by mappel::Gauss2DsMAP::Gauss2DsMAP(), and Gauss2DsMLE().

9.16.4.45 CompositeDist mappel::Gauss2DsModel::make_default_prior_beta_position (const ImageSizeT & *size*, double
max_sigma_ratio) [static], [inherited]

Definition at line 229 of file Gauss2DsModel.cpp.

References mappel::PointEmitterModel::default_pixel_mean_bg, mappel::PointEmitterModel::make_prior_component↵
_intensity(), mappel::PointEmitterModel::make_prior_component_position_beta(), mappel::PointEmitterModel::make↵
_prior_component_sigma(), and mappel::ImageFormat2DBase::size.

Referenced by mappel::Gauss2DsModel::make_default_prior().

9.16.4.46 CompositeDist mappel::Gauss2DsModel::make_default_prior_normal_position (const ImageSizeT & size, double max_sigma_ratio) [static],[inherited]

Definition at line 241 of file Gauss2DsModel.cpp.

References mappel::PointEmitterModel::default_pixel_mean_bg, mappel::PointEmitterModel::make_prior_component←_intensity(), mappel::PointEmitterModel::make_prior_component_position_normal(), mappel::PointEmitterModel←::make_prior_component_sigma(), and mappel::ImageFormat2DBase::size.

Referenced by mappel::Gauss2DsModel::make_default_prior().

9.16.4.47 ImageFormat2DBase::ImageT mappel::ImageFormat2DBase::make_image () const [inline],[inherited]

Definition at line 85 of file ImageFormat2DBase.h.

References mappel::ImageFormat2DBase::size.

9.16.4.48 ImageFormat2DBase::ImageStackT mappel::ImageFormat2DBase::make_image_stack (ImageCoordT n) const [inline],[inherited]

Definition at line 92 of file ImageFormat2DBase.h.

References mappel::ImageFormat2DBase::size.

9.16.4.49 Gauss2DsModel::Gauss1DSumModelT mappel::Gauss2DsModel::make_internal_1Dsum_estimator (IdxT dim, const ImageSizeT & size, const VecT & min_sigma, const VecT & max_sigma, const CompositeDist & prior) [static],[protected],[inherited]

Definition at line 69 of file Gauss2DsModel.cpp.

References mappel::Gauss1DsModel::make_prior_beta_position(), mappel::Gauss1DsModel::make_prior_normal←position(), mappel::Gauss2DsModel::min_sigma, and mappel::ImageFormat2DBase::size.

Referenced by mappel::Gauss2DsModel::debug_internal_sum_model_y(), mappel::Gauss2DsModel::Gauss2Ds←Model(), and mappel::Gauss2DsModel::update_internal_1Dsum_estimators().

9.16.4.50 PointEmitterModel::ParamT mappel::PointEmitterModel::make_param () const [inline],[inherited]

Definition at line 164 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

Referenced by mappel::Gauss1DModel::initial_theta_estimate(), mappel::Gauss1DsModel::initial_theta_estimate(), mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsxyModel::initial_theta_estimate(), mappel::←Gauss2DsModel::initial_theta_estimate(), mappel::Gauss1DModel::pixel_hess_update(), mappel::Gauss1DsModel←::pixel_hess_update(), mappel::Gauss2DModel::pixel_hess_update(), and mappel::Gauss2DsModel::pixel_hess←update().

9.16.4.51 `template<class FillT > PointEmitterModel::ParamT mappel::PointEmitterModel::make_param (FillT fill) const`
`[inherited]`

Definition at line 181 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.16.4.52 `MatT mappel::PointEmitterModel::make_param_mat () const` `[inline],[inherited]`

Definition at line 172 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.16.4.53 `template<class FillT > MatT mappel::PointEmitterModel::make_param_mat (FillT fill) const` `[inherited]`

Definition at line 191 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.16.4.54 `CubeT mappel::PointEmitterModel::make_param_mat_stack (IdxT n) const` `[inline],[inherited]`

Definition at line 176 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.16.4.55 `template<class FillT > CubeT mappel::PointEmitterModel::make_param_mat_stack (IdxT n, FillT fill) const`
`[inherited]`

Definition at line 196 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.16.4.56 `PointEmitterModel::ParamVecT mappel::PointEmitterModel::make_param_stack (IdxT n) const` `[inline],[inherited]`

Definition at line 168 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

Referenced by mappel::PointEmitterModel::bounded_theta_stack(), and mappel::PointEmitterModel::reflected_theta_stack().

9.16.4.57 `template<class FillT > PointEmitterModel::ParamVecT mappel::PointEmitterModel::make_param_stack (IdxT n, FillT fill) const` `[inherited]`

Definition at line 186 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.16.4.58 **CompositeDist** `mappel::Gauss2DsModel::make_prior_beta_position (const ImageSizeT & size, double beta_xpos, double beta_ypos, double mean_l, double kappa_l, double mean_bg, double kappa_bg, double max_sigma_ratio, double alpha_sigma) [static],[inherited]`

Definition at line 253 of file Gauss2DsModel.cpp.

References `mappel::PointEmitterModel::make_prior_component_intensity()`, `mappel::PointEmitterModel::make_prior_component_position_beta()`, `mappel::PointEmitterModel::make_prior_component_sigma()`, and `mappel::ImageFormat2DBase::size`.

9.16.4.59 **prior_hessian::TruncatedGammaDist** `mappel::PointEmitterModel::make_prior_component_intensity (double mean = default_mean_l, double kappa = default_intensity_kappa) [static],[inherited]`

Definition at line 98 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::default_max_l`.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_beta_position()`, `mappel::Gauss1DModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_normal_position()`, `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss1DModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_prior_beta_position()`, `mappel::Gauss1DsModel::make_prior_beta_position()`, `mappel::Gauss1DModel::make_prior_beta_position()`, `mappel::Gauss2DsModel::make_prior_beta_position()`, `mappel::Gauss2DModel::make_prior_normal_position()`, `mappel::Gauss1DsModel::make_prior_normal_position()`, `mappel::Gauss1DModel::make_prior_normal_position()`, and `mappel::Gauss2DsModel::make_prior_normal_position()`.

9.16.4.60 **prior_hessian::ScaledSymmetricBetaDist** `mappel::PointEmitterModel::make_prior_component_position_beta (IdxT size, double pos_beta = default_beta_pos) [static],[inherited]`

Definition at line 92 of file PointEmitterModel.cpp.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_beta_position()`, `mappel::Gauss1DModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss1DsModel::make_prior_beta_position()`, `mappel::Gauss2DModel::make_prior_beta_position()`, `mappel::Gauss1DModel::make_prior_beta_position()`, and `mappel::Gauss2DsModel::make_prior_beta_position()`.

9.16.4.61 **prior_hessian::TruncatedNormalDist** `mappel::PointEmitterModel::make_prior_component_position_normal (IdxT size, double pos_sigma = default_sigma_pos) [static],[inherited]`

Definition at line 85 of file PointEmitterModel.cpp.

Referenced by `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_default_prior_normal_position()`, `mappel::Gauss1DModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_prior_normal_position()`, `mappel::Gauss1DsModel::make_prior_normal_position()`, `mappel::Gauss1DModel::make_prior_normal_position()`, and `mappel::Gauss2DsModel::make_prior_normal_position()`.

9.16.4.62 `prior_hessian::TruncatedParetoDist mappel::PointEmitterModel::make_prior_component_sigma (double min_sigma, double max_sigma, double alpha = default_alpha_sigma)` [static],[inherited]

Definition at line 104 of file `PointEmitterModel.cpp`.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, `mappel::Gauss1DsModel::make_prior_beta_position()`, `mappel::Gauss2DsModel::make_prior_beta_position()`, `mappel::Gauss1DsModel::make_prior_normal_position()`, and `mappel::Gauss2DsModel::make_prior_normal_position()`.

9.16.4.63 `CompositeDist mappel::Gauss2DsModel::make_prior_normal_position (const ImageSizeT & size, double sigma_xpos, double sigma_ypos, double mean_l, double kappa_l, double mean_bg, double kappa_bg, double max_sigma_ratio, double alpha_sigma)` [static],[inherited]

Definition at line 268 of file `Gauss2DsModel.cpp`.

References `mappel::PointEmitterModel::make_prior_component_intensity()`, `mappel::PointEmitterModel::make_prior_component_position_normal()`, `mappel::PointEmitterModel::make_prior_component_sigma()`, and `mappel::ImageFormat2DBase::size`.

9.16.4.64 `Gauss2DsModel::Stencil mappel::Gauss2DsModel::make_stencil (const ParamT & theta, bool compute_derivatives =true) const` [inline],[inherited]

Make a new `Model::Stencil` object at `theta`.

Stencils store all of the important calculations necessary for evaluating the log-likelihood and its derivatives at a particular `theta` (parameter) value.

This allows re-use of the most expensive computations. Stencils can be easily passed around by reference, and most functions in the [mappel::methods](#) namespace accept a const [Stencil](#) reference in place of the model parameter.

Throws [mappel::ModelBoundsError](#) if not `model.theta_in_bounds(theta)`.

If derivatives will not be computed with this stencil set `compute_derivatives=false`

Parameters

<i>theta</i>	Parameter to evaluate at
<i>compute_derivatives</i>	True to also prepare for derivative computations

Returns

A new [Stencil](#) object ready to compute with

Definition at line 162 of file `Gauss2DsModel.h`.

References `mappel::Gauss2DsModel::Stencil::Stencil()`, and `mappel::PointEmitterModel::theta_in_bounds()`.

Referenced by `mappel::Gauss2DsModel::initial_theta_estimate()`.

9.16.4.65 **Gauss2DsMLE & mappel::Gauss2DsMLE::operator= (const Gauss2DsMLE & o)**

Definition at line 51 of file Gauss2DsMLE.cpp.

References mappel::MLEstimator::operator=(), mappel::PoissonNoise2DObjective::operator=(), mappel::Image↵
Format2DBase::operator=(), mappel::Gauss2DsModel::operator=(), and mappel::PointEmitterModel::operator=().

9.16.4.66 **Gauss2DsMLE & mappel::Gauss2DsMLE::operator= (Gauss2DsMLE && o)**

Definition at line 62 of file Gauss2DsMLE.cpp.

References mappel::MLEstimator::operator=(), mappel::PoissonNoise2DObjective::operator=(), mappel::Image↵
Format2DBase::operator=(), mappel::Gauss2DsModel::operator=(), and mappel::PointEmitterModel::operator=().

9.16.4.67 **void mappel::Gauss2DsModel::pixel_grad (int i, int j, const Stencil & s, ParamT & pgrad) const [inline], [inherited]**

Definition at line 180 of file Gauss2DsModel.h.

References mappel::Gauss2DsModel::Stencil::DX, mappel::Gauss2DsModel::Stencil::DXS, mappel::Gauss2Ds↵
Model::Stencil::DY, mappel::Gauss2DsModel::Stencil::DYS, mappel::Gauss2DsModel::Stencil::l(), mappel::Gauss2↵
DsModel::Stencil::X, and mappel::Gauss2DsModel::Stencil::Y.

Referenced by mappel::Gauss2DsModel::pixel_hess_update().

9.16.4.68 **void mappel::Gauss2DsModel::pixel_grad2 (int i, int j, const Stencil & s, ParamT & pgrad2) const [inline], [inherited]**

Definition at line 192 of file Gauss2DsModel.h.

References mappel::Gauss2DsModel::Stencil::DXS, mappel::Gauss2DsModel::Stencil::DXS2, mappel::Gauss2↵
DsModel::Stencil::DYS, mappel::Gauss2DsModel::Stencil::DYS2, mappel::Gauss2DsModel::Stencil::l(), mappel::↵
Gauss2DsModel::Stencil::sigmaX(), mappel::Gauss2DsModel::Stencil::sigmaY(), mappel::Gauss2DsModel::Stencil::X,
and mappel::Gauss2DsModel::Stencil::Y.

9.16.4.69 **void mappel::Gauss2DsModel::pixel_hess (int i, int j, const Stencil & s, MatT & hess) const [inline], [inherited]**

Definition at line 204 of file Gauss2DsModel.h.

References mappel::Gauss2DsModel::Stencil::DX, mappel::Gauss2DsModel::Stencil::DXS, mappel::Gauss2Ds↵
Model::Stencil::DXS2, mappel::Gauss2DsModel::Stencil::DXSX, mappel::Gauss2DsModel::Stencil::DY, mappel::↵
Gauss2DsModel::Stencil::DYS, mappel::Gauss2DsModel::Stencil::DYS2, mappel::Gauss2DsModel::Stencil::DYSY,
mappel::Gauss2DsModel::Stencil::l(), mappel::Gauss2DsModel::Stencil::sigmaX(), mappel::Gauss2DsModel::Stencil↵
::sigmaY(), mappel::Gauss2DsModel::Stencil::X, and mappel::Gauss2DsModel::Stencil::Y.

9.16.4.70 `void mappel::Gauss2DsModel::pixel_hess_update (int i, int j, const Stencil & s, double dm_ratio_m1, double dmm_ratio, ParamT & grad, MatT & hess) const` `[inherited]`

pixel derivative inner loop calculations.

Definition at line 354 of file Gauss2DsModel.cpp.

References mappel::Gauss2DsModel::Stencil::DX, mappel::Gauss2DsModel::Stencil::DXS, mappel::Gauss2DsModel::Stencil::DXS2, mappel::Gauss2DsModel::Stencil::DXSX, mappel::Gauss2DsModel::Stencil::DY, mappel::Gauss2DsModel::Stencil::DYS, mappel::Gauss2DsModel::Stencil::DYS2, mappel::Gauss2DsModel::Stencil::DYSY, mappel::Gauss2DsModel::Stencil::I(), mappel::PointEmitterModel::make_param(), mappel::Gauss2DsModel::pixel_grad(), mappel::Gauss2DsModel::Stencil::sigmaX(), mappel::Gauss2DsModel::Stencil::sigmaY(), mappel::Gauss2DsModel::Stencil::X, and mappel::Gauss2DsModel::Stencil::Y.

9.16.4.71 `double mappel::Gauss2DsModel::pixel_model_value (int i, int j, const Stencil & s) const` `[inline]`, `[inherited]`

Definition at line 173 of file Gauss2DsModel.h.

References mappel::Gauss2DsModel::Stencil::bg(), mappel::Gauss2DsModel::Stencil::I(), mappel::Gauss2DsModel::Stencil::X, and mappel::Gauss2DsModel::Stencil::Y.

9.16.4.72 `PointEmitterModel::ParamT mappel::PointEmitterModel::reflected_theta (const ParamT & theta) const` `[inherited]`

Definition at line 276 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::check_param_shape(), mappel::PointEmitterModel::lbound, mappel::PointEmitterModel::num_params, and mappel::PointEmitterModel::ubound.

Referenced by mappel::PointEmitterModel::reflected_theta_stack().

9.16.4.73 `PointEmitterModel::ParamVecT mappel::PointEmitterModel::reflected_theta_stack (const ParamVecT & theta) const` `[inherited]`

Definition at line 316 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::check_param_shape(), mappel::PointEmitterModel::make_param_stack(), and mappel::PointEmitterModel::reflected_theta().

9.16.4.74 `void mappel::PointEmitterModel::rename_hyperparam (const std::string & old_name, const std::string & new_name)` `[inline]`, `[inherited]`

Definition at line 244 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.16.4.75 `void mappel::MCMCAdaptor2Ds::sample_mcmc_candidate (IdxT sample_index, ParamT & candidate, double step_scale = 1.0) const` [inherited]

Definition at line 56 of file MCMCAdaptor2Ds.cpp.

References `mappel::MCMCAdaptor1D::eta_bg`, `mappel::MCMCAdaptor1D::eta_l`, `mappel::MCMCAdaptor2Ds::eta_`
`_sigma`, `mappel::MCMCAdaptor1D::eta_x`, `mappel::MCMCAdaptor2D::eta_y`, `mappel::MCMCAdaptorBase::num_`
`phases`, and `mappel::rng_manager`.

9.16.4.76 `void mappel::MCMCAdaptor2Ds::sample_mcmc_candidate (IdxT sample_index, ParamT & candidate, const IdxVecT & fixed_parameters_mask, double step_scale = 1.0) const` [inherited]

Definition at line 75 of file MCMCAdaptor2Ds.cpp.

References `mappel::MCMCAdaptor1D::eta_bg`, `mappel::MCMCAdaptor1D::eta_l`, `mappel::MCMCAdaptor2Ds::eta_`
`_sigma`, `mappel::MCMCAdaptor1D::eta_x`, `mappel::MCMCAdaptor2D::eta_y`, `mappel::MCMCAdaptorBase::num_`
`phases`, and `mappel::rng_manager`.

9.16.4.77 `template<class RngT > PointEmitterModel::ParamT mappel::PointEmitterModel::sample_prior (RngT & rng) const` [inherited]

Definition at line 264 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.16.4.78 `PointEmitterModel::ParamT mappel::PointEmitterModel::sample_prior () const` [inline], [inherited]

Definition at line 268 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`, and `mappel::rng_manager`.

9.16.4.79 `void mappel::MCMCAdaptor1D::set_background_mcmc_sampling (double eta_bg = -1)` [inherited]

Definition at line 81 of file MCMCAdaptor1D.cpp.

References `mappel::PointEmitterModel::default_pixel_mean_bg`, `mappel::MCMCAdaptor1D::eta_bg`, `mappel::Point`
`EmitterModel::get_hyperparam_value()`, `mappel::PointEmitterModel::get_lbound()`, `mappel::PointEmitterModel::get_`
`ubound()`, and `mappel::MCMCAdaptorBase::sigma_scale`.

Referenced by `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`.

9.16.4.80 `void mappel::PointEmitterModel::set_bounds (const ParamT & lbound_, const ParamT & ubound_)` [inherited]

Box-type parameter bounds

Modifies the prior bounds to prevent sampling outside the valid box-constraints.

Definition at line 213 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::bounds_epsilon`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitter`
`Model::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

9.16.4.81 `void mappel::PointEmitterModel::set_hyperparam_names (const StringVecT & desc) [inline], [inherited]`

Definition at line 260 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.16.4.82 `void mappel::PointEmitterModel::set_hyperparam_value (const std::string & name, double value) [inline], [inherited]`

Definition at line 240 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.16.4.83 `void mappel::Gauss2DsModel::set_hyperparams (const VecT & hyperparams) [inherited]`

Definition at line 119 of file Gauss2DsModel.cpp.

References mappel::PointEmitterModel::set_hyperparams(), and mappel::Gauss2DsModel::update_internal_1Dsum←_estimators().

9.16.4.84 `template<class ImT > void mappel::ImageFormat2DBase::set_image_in_stack (ImageStackT & stack, ImageCoordT n, const ImT & im) const [inherited]`

Definition at line 113 of file ImageFormat2DBase.h.

9.16.4.85 `void mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling (double eta_I = -1) [inherited]`

Definition at line 65 of file MCMCAdaptor1D.cpp.

References mappel::PointEmitterModel::default_mean_I, mappel::MCMCAdaptor1D::eta_I, mappel::PointEmitter←Model::get_hyperparam_value(), and mappel::MCMCAdaptorBase::sigma_scale.

Referenced by mappel::MCMCAdaptor1D::MCMCAdaptor1D().

9.16.4.86 `void mappel::PointEmitterModel::set_lbound (const ParamT & lbound) [inherited]`

Definition at line 226 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::bounds_epsilon, mappel::PointEmitterModel::lbound, mappel::PointEmitter←Model::num_params, mappel::PointEmitterModel::prior, and mappel::PointEmitterModel::ubound.

Referenced by mappel::Gauss1DsModel::set_min_sigma().

9.16.4.87 `void mappel::Gauss2DsModel::set_max_sigma (const VecT & new_sigma) [inherited]`

Set the max_sigma_ratio based on the new max_sigma's ratio with the current min_sigma.

Definition at line 155 of file Gauss2DsModel.cpp.

References mappel::PointEmitterModel::check_psf_sigma(), mappel::Gauss2DsModel::compute_max_sigma_ratio(), mappel::Gauss2DsModel::get_min_sigma(), and mappel::Gauss2DsModel::set_max_sigma_ratio().

9.16.4.88 `void mappel::Gauss2DsModel::set_max_sigma_ratio (double max_sigma_ratio)` `[inherited]`

Definition at line 176 of file Gauss2DsModel.cpp.

References `mappel::PointEmitterModel::bounds_epsilon`, `mappel::Gauss2DsModel::get_max_sigma()`, `mappel::PointEmitterModel::get_ubound()`, `mappel::Gauss1DsModel::set_max_sigma()`, `mappel::PointEmitterModel::set_ubound()`, `mappel::Gauss2DsModel::x_model`, and `mappel::Gauss2DsModel::y_model`.

Referenced by `mappel::Gauss2DsModel::set_max_sigma()`.

9.16.4.89 `void mappel::MCMCAdaptorBase::set_mcmc_num_phases (IdxT num_phases)` `[protected],[inherited]`

Definition at line 59 of file MCMCAdaptorBase.cpp.

References `mappel::MCMCAdaptorBase::num_phases`.

Referenced by `mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds()`, and `mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds()`.

9.16.4.90 `void mappel::MCMCAdaptorBase::set_mcmc_sigma_scale (double scale)` `[inherited]`

Definition at line 39 of file MCMCAdaptorBase.cpp.

References `mappel::MCMCAdaptorBase::global_max_mcmc_sigma_scale`, and `mappel::MCMCAdaptorBase::sigma_scale`.

9.16.4.91 `void mappel::Gauss2DsModel::set_min_sigma (const VecT & new_sigma)` `[inherited]`

Set the minimum sigma, keeping the `max_sigma_ratio` the same.

Definition at line 137 of file Gauss2DsModel.cpp.

References `mappel::PointEmitterModel::check_psf_sigma()`, `mappel::Gauss2DsModel::get_max_sigma()`, `mappel::Gauss2DsModel::min_sigma`, `mappel::Gauss1DsModel::set_max_sigma()`, `mappel::Gauss1DsModel::set_min_sigma()`, `mappel::Gauss2DsModel::x_model`, and `mappel::Gauss2DsModel::y_model`.

9.16.4.92 `void mappel::PointEmitterModel::set_param_names (const StringVecT & desc)` `[inline],[inherited]`

Definition at line 252 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.16.4.93 `void mappel::Gauss2DsModel::set_prior (CompositeDist && prior)` `[inherited]`

Definition at line 107 of file Gauss2DsModel.cpp.

References `mappel::PointEmitterModel::set_prior()`, and `mappel::Gauss2DsModel::update_internal_1Dsum_estimators()`.

9.16.4.94 `void mappel::Gauss2DsModel::set_prior (const CompositeDist & prior_) [inherited]`

Definition at line 113 of file Gauss2DsModel.cpp.

References `mappel::PointEmitterModel::set_prior()`, and `mappel::Gauss2DsModel::update_internal_1Dsum_← estimators()`.

9.16.4.95 `void mappel::PointEmitterModel::set_rng_seed (RngSeedT seed) [static],[inherited]`

Definition at line 110 of file PointEmitterModel.cpp.

References `mappel::rng_manager`.

9.16.4.96 `void mappel::Gauss2DsModel::set_size (const ImageSizeT & size_) [inherited]`

Definition at line 125 of file Gauss2DsModel.cpp.

References `mappel::ImageFormat2DBase::set_size()`, `mappel::ImageFormat1DBase::set_size()`, `mappel::Image← Format2DBase::size`, `mappel::Gauss2DsModel::x_model`, and `mappel::Gauss2DsModel::y_model`.

9.16.4.97 `void mappel::PointEmitterModel::set_ubound (const ParamT & ubound) [inherited]`

Definition at line 237 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::bounds_epsilon`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitter← Model::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::Gauss1DsModel::set_max_sigma()`, and `mappel::Gauss2DsModel::set_max_sigma_ratio()`.

9.16.4.98 `bool mappel::PointEmitterModel::theta_in_bounds (const ParamT & theta) const [inherited]`

Definition at line 257 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::Point← EmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsModel::initial_theta_estimate()`, `mappel::Gauss1DModel::make_stencil()`, `mappel::Gauss1DsModel::make_stencil()`, `mappel::Gauss2DModel::make← _stencil()`, `mappel::Gauss2DsxModel::make_stencil()`, `mappel::Gauss2DsModel::make_stencil()`, and `mappel::Point← EmitterModel::theta_stack_in_bounds()`.

9.16.4.99 `BoolVecT mappel::PointEmitterModel::theta_stack_in_bounds (const ParamVecT & theta) const [inherited]`

Definition at line 296 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, and `mappel::PointEmitterModel::theta_in_bounds()`.

9.16.4.100 `void mappel::Gauss2DsModel::update_internal_1Dsum_estimators ()` `[protected]`, `[inherited]`

Definition at line 100 of file Gauss2DsModel.cpp.

References `mappel::Gauss2DsModel::get_max_sigma()`, `mappel::PointEmitterModel::get_prior()`, `mappel::Gauss2DsModel::make_internal_1Dsum_estimator()`, `mappel::Gauss2DsModel::min_sigma`, `mappel::ImageFormat2DBase::size`, `mappel::Gauss2DsModel::x_model`, and `mappel::Gauss2DsModel::y_model`.

Referenced by `mappel::Gauss2DsModel::debug_internal_sum_model_y()`, `mappel::Gauss2DsModel::set_hyperparams()`, and `mappel::Gauss2DsModel::set_prior()`.

9.16.5 Member Data Documentation

9.16.5.1 `const double mappel::PointEmitterModel::bounds_epsilon = 1.0E-6` `[static]`, `[inherited]`

Distance from the boundary to constrain in `bound_theta` and `bounded_theta` methods

Definition at line 52 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::Gauss2DsModel::set_max_sigma_ratio()`, and `mappel::PointEmitterModel::set_ubound()`.

9.16.5.2 `const double mappel::PointEmitterModel::default_alpha_sigma = 2` `[static]`, `[inherited]`

Default per-pixel background gamma distribution shape

Definition at line 62 of file PointEmitterModel.h.

9.16.5.3 `const double mappel::PointEmitterModel::default_beta_pos = 3` `[static]`, `[inherited]`

Default position parameter in symmetric beta-distributions

Definition at line 56 of file PointEmitterModel.h.

9.16.5.4 `const double mappel::PointEmitterModel::default_intensity_kappa = 2` `[static]`, `[inherited]`

Default shape for intensity gamma distributions

Definition at line 60 of file PointEmitterModel.h.

9.16.5.5 `const double mappel::PointEmitterModel::default_max_l = INFINITY` `[static]`, `[inherited]`

Default maximum emitter intensity

Definition at line 59 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::make_prior_component_intensity()`.

9.16.5.6 `const double mappel::PointEmitterModel::default_mean_l = 300` `[static], [inherited]`

Default emitter intensity mean

Definition at line 58 of file PointEmitterModel.h.

Referenced by `mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling()`.

9.16.5.7 `const double mappel::PointEmitterModel::default_pixel_mean_bg = 4` `[static], [inherited]`

Default per-pixel mean background counts

Definition at line 61 of file PointEmitterModel.h.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_beta_position()`, `mappel::Gauss1DModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_default_prior_normal_position()`, `mappel::Gauss1DModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, and `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`.

9.16.5.8 `const double mappel::PointEmitterModel::default_sigma_pos = 1` `[static], [inherited]`

Default position parameter in symmetric beta-distributions

Definition at line 57 of file PointEmitterModel.h.

9.16.5.9 `const std::string mappel::Gauss2DsModel::DefaultPriorType = "Normal"` `[static], [inherited]`

Definition at line 59 of file Gauss2DsModel.h.

Referenced by `mappel::Gauss2DsModel::get_min_sigma()`.

9.16.5.10 `const std::string mappel::PointEmitterModel::DefaultSeperableInitEstimator = "TrustRegion"` `[static], [inherited]`

Estimator name to use in 1D separable initializations

Definition at line 49 of file PointEmitterModel.h.

Referenced by `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsxyModel::initial_theta_estimate()`, and `mappel::Gauss2DsModel::initial_theta_estimate()`.

9.16.5.11 `const std::vector< std::string > mappel::PoissonNoise2DObjective::estimator_names` `[static], [inherited]`

Definition at line 23 of file PoissonNoise2DObjective.h.

9.16.5.12 `double mappel::MCMCAdaptor1D::eta_bg=0` [protected],[inherited]

The standard deviation for the normally distributed perturbation to `theta_bg` in the random walk MCMC sampling

Definition at line 33 of file `MCMCAdaptor1D.h`.

Referenced by `mappel::MCMCAdaptor1D::get_stats()`, `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor1D::operator=()`, `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`, and `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`.

9.16.5.13 `double mappel::MCMCAdaptor1D::eta_l=0` [protected],[inherited]

The standard deviation for the normally distributed perturbation to `theta_l` in the random walk MCMC sampling

Definition at line 32 of file `MCMCAdaptor1D.h`.

Referenced by `mappel::MCMCAdaptor1D::get_stats()`, `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor1D::operator=()`, `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`, and `mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling()`.

9.16.5.14 `double mappel::MCMCAdaptor2Ds::eta_sigma=0` [protected],[inherited]

The standard deviation for the normally distributed perturbation to `theta_bg` in the random walk MCMC sampling

Definition at line 27 of file `MCMCAdaptor2Ds.h`.

Referenced by `mappel::MCMCAdaptor2Ds::get_stats()`, `mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds()`, `mappel::MCMCAdaptor2Ds::operator=()`, and `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`.

9.16.5.15 `double mappel::MCMCAdaptor1D::eta_x=0` [protected],[inherited]

The standard deviation for the normally distributed perturbation to `theta_x` in the random walk MCMC sampling

Definition at line 31 of file `MCMCAdaptor1D.h`.

Referenced by `mappel::MCMCAdaptor1D::get_stats()`, `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor1D::operator=()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, and `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`.

9.16.5.16 `double mappel::MCMCAdaptor2D::eta_y=0` [protected],[inherited]

The standard deviation for the normally distributed perturbation to `theta_y` in the random walk MCMC sampling

Definition at line 28 of file `MCMCAdaptor2D.h`.

Referenced by `mappel::MCMCAdaptor2D::get_stats()`, `mappel::MCMCAdaptor2D::MCMCAdaptor2D()`, `mappel::MCMCAdaptor2D::operator=()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, and `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`.

9.16.5.17 `const double mappel::MCMCAdaptorBase::global_default_mcmc_sigma_scale = 0.05` `[static], [inherited]`

Definition at line 16 of file MCMCAdaptorBase.h.

Referenced by `mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds()`, `mappel::MCMCAdaptor2D::MCMCAdaptor2D()`, and `mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds()`.

9.16.5.18 `const double mappel::MCMCAdaptorBase::global_max_mcmc_sigma_scale = 0.5` `[static], [inherited]`

Definition at line 17 of file MCMCAdaptorBase.h.

Referenced by `mappel::MCMCAdaptorBase::MCMCAdaptorBase()`, and `mappel::MCMCAdaptorBase::set_mcmc_sigma_scale()`.

9.16.5.19 `const double mappel::PointEmitterModel::global_max_psf_sigma = 1E2` `[static], [inherited]`

Global maximum for any `psf_sigma`. Sizes above this value are invalid, and nowhere near useful for practical point emitter localization

Definition at line 54 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::check_psf_sigma()`.

9.16.5.20 `const ImageFormat2DBase::ImageCoordT mappel::ImageFormat2DBase::global_max_size = 512` `[static], [inherited]`

Maximum size along any dimension of the image. This is insanely big to catch obvious errors

Definition at line 39 of file ImageFormat2DBase.h.

Referenced by `mappel::ImageFormat2DBase::check_size()`.

9.16.5.21 `const double mappel::PointEmitterModel::global_min_psf_sigma = 1E-1` `[static], [inherited]`

Global minimum for any `psf_sigma`. Sizes below this value are invalid, and nowhere near useful for practical point emitter localization

Definition at line 53 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::check_psf_sigma()`.

9.16.5.22 `const ImageFormat2DBase::ImageCoordT mappel::ImageFormat2DBase::global_min_size = 3` `[static], [inherited]`

Minimum size along any dimension of the image.

Definition at line 38 of file ImageFormat2DBase.h.

Referenced by `mappel::ImageFormat2DBase::check_size()`.

9.16.5.23 **ParamT** mappel::PointEmitterModel::lbound [protected],[inherited]

Definition at line 148 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::bound_theta(), mappel::PointEmitterModel::bounded_theta(), mappel::PointEmitterModel::get_lbound(), mappel::PointEmitterModel::get_stats(), mappel::Gauss1DsModel::initial_theta_estimate(), mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::PointEmitterModel::operator=(), mappel::PointEmitterModel::reflected_theta(), mappel::PointEmitterModel::set_bounds(), mappel::PointEmitterModel::set_lbound(), mappel::PointEmitterModel::set_prior(), mappel::PointEmitterModel::set_ubound(), and mappel::PointEmitterModel::theta_in_bounds().

9.16.5.24 **VecT** mappel::Gauss2DsModel::min_sigma [protected],[inherited]

Gaussian PSF in pixels

Definition at line 118 of file Gauss2DsModel.h.

Referenced by mappel::Gauss2DsModel::compute_max_sigma_ratio(), mappel::Gauss2DsModel::debug_internal_sum_model_y(), mappel::Gauss2DsMAP::Gauss2DsMAP(), Gauss2DsMLE(), mappel::Gauss2DsModel::Gauss2DsModel(), mappel::Gauss2DsModel::get_min_sigma(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::Gauss2DsModel::make_internal_1Dsum_estimator(), mappel::Gauss2DsModel::operator=(), mappel::Gauss2DsModel::set_min_sigma(), mappel::Gauss2DsModel::Stencil::sigmaX(), mappel::Gauss2DsModel::Stencil::sigmaY(), and mappel::Gauss2DsModel::update_internal_1Dsum_estimators().

9.16.5.25 **const std::string** mappel::Gauss2DsMLE::name [static]

Definition at line 36 of file Gauss2DsMLE.h.

9.16.5.26 **const ImageFormat2DBase::ImageCoordT** mappel::ImageFormat2DBase::num_dim =2 [static],[inherited]

Number of image dimensions.

Definition at line 37 of file ImageFormat2DBase.h.

Referenced by mappel::ImageFormat2DBase::get_stats().

9.16.5.27 **IdxT** mappel::PointEmitterModel::num_hyperparams [protected],[inherited]

Definition at line 147 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::get_num_hyperparams(), mappel::PointEmitterModel::get_stats(), mappel::PointEmitterModel::operator=(), and mappel::PointEmitterModel::set_prior().

9.16.5.28 **IdxT** mappel::PointEmitterModel::num_params [protected],[inherited]

Definition at line 146 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::bound_theta(), mappel::PointEmitterModel::bounded_theta(), mappel::PointEmitterModel::check_param_shape(), mappel::PointEmitterModel::get_num_params(), mappel::PointEmitterModel::get_stats(), mappel::Gauss1DModel::initial_theta_estimate(), mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::PointEmitterModel::make_param(), mappel::PointEmitterModel::make_param_mat(), mappel::PointEmitterModel::make_param_mat_stack(), mappel::PointEmitterModel::make_param_stack(), mappel::PointEmitterModel::operator=(), mappel::PointEmitterModel::reflected_theta(), mappel::PointEmitterModel::set_bounds(), mappel::PointEmitterModel::set_lbound(), mappel::PointEmitterModel::set_prior(), mappel::PointEmitterModel::set_ubound(), and mappel::PointEmitterModel::theta_in_bounds().

9.16.5.29 `IdxT mappel::MCMCAdaptorBase::num_phases` `[protected]`, `[inherited]`

The number of different sampling phases for candidate selection MCMC. Each phase changes a different subset of variables.

Definition at line 29 of file MCMCAdaptorBase.h.

Referenced by `mappel::MCMCAdaptorBase::get_mcmc_num_phases()`, `mappel::MCMCAdaptorBase::get_stats()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`, and `mappel::MCMCAdaptorBase::set_mcmc_num_phases()`.

9.16.5.30 `CompositeDist mappel::PointEmitterModel::prior` `[protected]`, `[inherited]`

Definition at line 145 of file PointEmitterModel.h.

Referenced by `mappel::Gauss2DModel::debug_internal_sum_model_y()`, `mappel::Gauss2DsModel::debug_internal_sum_model_y()`, `mappel::Gauss2DModel::Gauss2DModel()`, `mappel::Gauss2DsModel::Gauss2DsModel()`, `mappel::PointEmitterModel::get_hyperparam_index()`, `mappel::PointEmitterModel::get_hyperparam_names()`, `mappel::PointEmitterModel::get_hyperparam_value()`, `mappel::PointEmitterModel::get_hyperparams()`, `mappel::Gauss1DsModel::get_max_sigma()`, `mappel::Gauss1DsModel::get_min_sigma()`, `mappel::PointEmitterModel::get_param_names()`, `mappel::PointEmitterModel::get_prior()`, `mappel::PointEmitterModel::get_stats()`, `mappel::PointEmitterModel::has_hyperparam()`, `mappel::PointEmitterModel::operator=()`, `mappel::PointEmitterModel::PointEmitterModel()`, `mappel::PointEmitterModel::rename_hyperparam()`, `mappel::PointEmitterModel::sample_prior()`, `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_hyperparam_names()`, `mappel::PointEmitterModel::set_hyperparam_value()`, `mappel::PointEmitterModel::set_hyperparams()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::Gauss1DsModel::set_max_sigma()`, `mappel::Gauss1DsModel::set_min_sigma()`, `mappel::PointEmitterModel::set_param_names()`, `mappel::PointEmitterModel::set_prior()`, and `mappel::PointEmitterModel::set_ubound()`.

9.16.5.31 `const StringVecT mappel::Gauss2DsModel::prior_types` `[static]`, `[inherited]`

Initial value:

```
= { "Beta",
    "Normal"
}
```

Definition at line 58 of file Gauss2DsModel.h.

Referenced by `mappel::Gauss2DsModel::get_min_sigma()`.

9.16.5.32 `double mappel::MCMCAdaptorBase::sigma_scale` `[protected]`, `[inherited]`

A scaling factor for step sizes as a fraction of the size of the domain dimension we are walking in. (0.05 default)

Definition at line 30 of file MCMCAdaptorBase.h.

Referenced by `mappel::MCMCAdaptorBase::get_mcmc_sigma_scale()`, `mappel::MCMCAdaptorBase::get_stats()`, `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds()`, `mappel::MCMCAdaptor2D::MCMCAdaptor2D()`, `mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds()`, `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`, `mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling()`, and `mappel::MCMCAdaptorBase::set_mcmc_sigma_scale()`.

9.16.5.33 **ImageSizeT** `mappel::ImageFormat2DBase::size` [protected],[inherited]

Number of pixels in X dimension for 1D image

Definition at line 67 of file `ImageFormat2DBase.h`.

Referenced by `mappel::cgauss_compute_estimate()`, `mappel::cgauss_compute_estimate_debug()`, `mappel::cgauss_heuristic_compute_estimate()`, `mappel::ImageFormat2DBase::check_image_shape()`, `mappel::Gauss2DModel::Stencil::compute_derivatives()`, `mappel::Gauss2DsModel::Stencil::compute_derivatives()`, `mappel::Gauss2DModel::debug_internal_sum_model_y()`, `mappel::Gauss2DsModel::debug_internal_sum_model_y()`, `mappel::methods::expected_information()`, `mappel::Gauss2DModel::Gauss2DModel()`, `mappel::Gauss2DsMAP::Gauss2DsMAP()`, `Gauss2DsMLE()`, `mappel::Gauss2DsModel::Gauss2DsModel()`, `mappel::ImageFormat2DBase::get_num_pixels()`, `mappel::ImageFormat2DBase::get_size()`, `mappel::ImageFormat2DBase::get_stats()`, `mappel::methods::likelihood::grad()`, `mappel::methods::likelihood::grad2()`, `mappel::methods::likelihood::debug::grad_components()`, `mappel::methods::likelihood::hessian()`, `mappel::methods::likelihood::debug::hessian_components()`, `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsModel::initial_theta_estimate()`, `mappel::methods::likelihood::llh()`, `mappel::methods::likelihood::debug::llh_components()`, `mappel::Gauss2DModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, `mappel::ImageFormat2DBase::make_image()`, `mappel::ImageFormat2DBase::make_image_stack()`, `mappel::Gauss2DModel::make_internal_1Dsum_estimator()`, `mappel::Gauss2DsModel::make_internal_1Dsum_estimator()`, `mappel::Gauss2DModel::make_prior_beta_position()`, `mappel::Gauss2DsModel::make_prior_beta_position()`, `mappel::Gauss2DModel::make_prior_normal_position()`, `mappel::Gauss2DsModel::make_prior_normal_position()`, `mappel::methods::model_image()`, `mappel::ImageFormat2DBase::operator=()`, `mappel::methods::likelihood::rllh()`, `mappel::methods::likelihood::debug::rllh_components()`, `mappel::ImageFormat2DBase::set_size()`, `mappel::Gauss2DModel::set_size()`, `mappel::Gauss2DsModel::set_size()`, `mappel::methods::simulate_image()`, `mappel::methods::simulate_image_from_model()`, `mappel::Gauss2DModel::Stencil::Stencil()`, `mappel::Gauss2DsModel::Stencil::Stencil()`, `mappel::Gauss2DModel::update_internal_1Dsum_estimators()`, and `mappel::Gauss2DsModel::update_internal_1Dsum_estimators()`.

9.16.5.34 **ParamT** `mappel::PointEmitterModel::ubound` [protected],[inherited]

Definition at line 148 of file `PointEmitterModel.h`.

Referenced by `mappel::PointEmitterModel::bound_theta()`, `mappel::PointEmitterModel::bounded_theta()`, `mappel::PointEmitterModel::get_stats()`, `mappel::PointEmitterModel::get_ubound()`, `mappel::Gauss1DsModel::initial_theta_estimate()`, `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsModel::initial_theta_estimate()`, `mappel::PointEmitterModel::operator=()`, `mappel::PointEmitterModel::reflected_theta()`, `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::PointEmitterModel::set_prior()`, `mappel::PointEmitterModel::set_ubound()`, and `mappel::PointEmitterModel::theta_in_bounds()`.

9.16.5.35 **Gauss1DSumModelT** `mappel::Gauss2DsModel::x_model` [protected],[inherited]

X-model fits 2D images X-axis (column sum). Using variable sigma 1D model.

Definition at line 119 of file `Gauss2DsModel.h`.

Referenced by `mappel::Gauss2DsModel::debug_internal_sum_model_x()`, `mappel::Gauss2DsModel::initial_theta_estimate()`, `mappel::Gauss2DsModel::operator=()`, `mappel::Gauss2DsModel::set_max_sigma_ratio()`, `mappel::Gauss2DsModel::set_min_sigma()`, `mappel::Gauss2DsModel::set_size()`, and `mappel::Gauss2DsModel::update_internal_1Dsum_estimators()`.

9.16.5.36 Gauss1DSumModelT mappel::Gauss2DsModel::y_model [protected],[inherited]

Y-model fits 2D images Y-axis (row sum). Using variable sigma 1D model.

Definition at line 120 of file Gauss2DsModel.h.

Referenced by mappel::Gauss2DsModel::debug_internal_sum_model_y(), mappel::Gauss2DsModel::Gauss2DsModel(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::Gauss2DsModel::operator=(), mappel::Gauss2DsModel::set_max_sigma_ratio(), mappel::Gauss2DsModel::set_min_sigma(), mappel::Gauss2DsModel::set_size(), and mappel::Gauss2DsModel::update_internal_1Dsum_estimators().

The documentation for this class was generated from the following files:


- [Gauss2DsMLE.h](#)
- [Gauss2DsMLE.cpp](#)

9.17 mappel::Gauss2DsModel Class Reference

A base class for 2D Gaussian PSF where the gaussian sigma is controlled by a single scalar parameter which is called sigma_ratio. The size of the gaussian psf is sigma_ratio*psf_sigma, where psf_sigma is considered as a vector [psf_sigmaX, psf_sigmaY].

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/Gauss2DsModel.h>
```

Inheritance diagram for mappel::Gauss2DsModel:

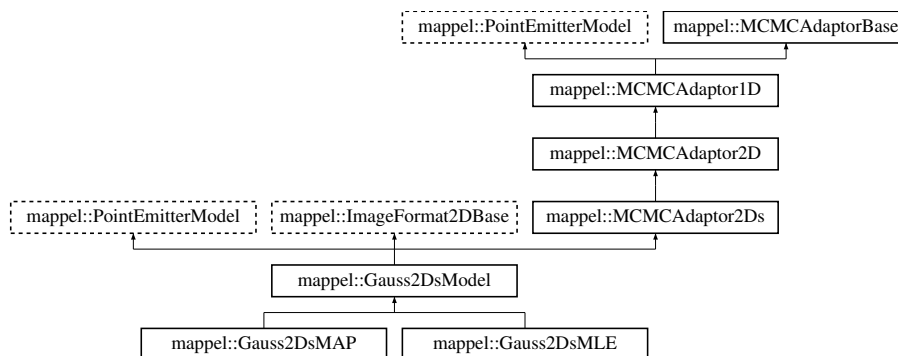

Classes

- class [Stencil](#)
Stencil for 2D scalar-sigma models.

Public Types

- using [Gauss1DSumModelT](#) = [Gauss1DsMAP](#)
- using [StencilVecT](#) = `std::vector< Stencil >`
- using [ParamT](#) = `arma::vec`
- using [ParamVecT](#) = `arma::mat`
- using [ImageCoordT](#) = `uint32_t`
- using [ImagePixelT](#) = `double`
- `template<class CoordT >`
using [ImageSizeShapeT](#) = `arma::Col< CoordT >`
- `template<class CoordT >`
using [ImageSizeVecShapeT](#) = `arma::Mat< CoordT >`
- using [ImageSizeT](#) = [ImageSizeShapeT](#)< [ImageCoordT](#) >
- using [ImageSizeVecT](#) = [ImageSizeVecShapeT](#)< [ImageCoordT](#) >
- `template<class PixelT >`
using [ImageShapeT](#) = `arma::Mat< PixelT >`
- `template<class PixelT >`
using [ImageStackShapeT](#) = `arma::Cube< PixelT >`
- using [ImageT](#) = [ImageShapeT](#)< [ImagePixelT](#) >
- using [ImageStackT](#) = [ImageStackShapeT](#)< [ImagePixelT](#) >

Public Member Functions

- void [set_hyperparams](#) (const [VecT](#) &hyperparams)
- void [set_prior](#) (CompositeDist &&prior_)
- void [set_prior](#) (const CompositeDist &prior_)
- void [set_size](#) (const [ImageSizeT](#) &size_)
- [VecT](#) [get_min_sigma](#) () const
- double [get_min_sigma](#) ([IdxT](#) dim) const
- [VecT](#) [get_max_sigma](#) () const
- double [get_max_sigma](#) ([IdxT](#) dim) const
- double [get_max_sigma_ratio](#) () const
- void [set_min_sigma](#) (const [VecT](#) &min_sigma)
- void [set_max_sigma](#) (const [VecT](#) &max_sigma)
- void [set_max_sigma_ratio](#) (double max_sigma_ratio)
- [StatsT](#) [get_stats](#) () const
- [Stencil](#) [make_stencil](#) (const [ParamT](#) &theta, bool compute_derivatives=true) const
Make a new Model::Stencil object at theta.
- double [pixel_model_value](#) (int i, int j, const [Stencil](#) &s) const
- void [pixel_grad](#) (int i, int j, const [Stencil](#) &s, [ParamT](#) &pgrad) const
- void [pixel_grad2](#) (int i, int j, const [Stencil](#) &s, [ParamT](#) &pgrad2) const
- void [pixel_hess](#) (int i, int j, const [Stencil](#) &s, [MatT](#) &hess) const
- void [pixel_hess_update](#) (int i, int j, const [Stencil](#) &s, double dm_ratio_m1, double dmm_ratio, [ParamT](#) &grad, [MatT](#) &hess) const
pixel derivative inner loop calculations.
- [Stencil](#) [initial_theta_estimate](#) (const [ImageT](#) &im) const
Fast, heuristic estimate of initial theta.
- [Stencil](#) [initial_theta_estimate](#) (const [ImageT](#) &im, const [ParamT](#) &theta_init) const
- [Stencil](#) [initial_theta_estimate](#) (const [ImageT](#) &im, const [ParamT](#) &theta_init, const std::string &estimator) const
- [Gauss1DSumModelT](#) [debug_internal_sum_model_x](#) () const

- [Gauss1DSumModelT debug_internal_sum_model_y \(\)](#) const
- [IdxT get_num_params \(\)](#) const
- void [check_param_shape](#) (const [ParamT](#) &theta) const
- void [check_param_shape](#) (const [ParamVecT](#) &theta) const
- void [check_psf_sigma](#) (double psf_sigma) const
- void [check_psf_sigma](#) (const [VecT](#) &psf_sigma) const
- [ParamT make_param \(\)](#) const
- template<class FillT >
 [ParamT make_param](#) (FillT fill) const
- [ParamVecT make_param_stack](#) ([IdxT](#) n) const
- template<class FillT >
 [ParamVecT make_param_stack](#) ([IdxT](#) n, FillT fill) const
- [MatT make_param_mat \(\)](#) const
- template<class FillT >
 [MatT make_param_mat](#) (FillT fill) const
- [CubeT make_param_mat_stack](#) ([IdxT](#) n) const
- template<class FillT >
 [CubeT make_param_mat_stack](#) ([IdxT](#) n, FillT fill) const
- CompositeDist & [get_prior \(\)](#)
- const CompositeDist & [get_prior \(\)](#) const
- [IdxT get_num_hyperparams \(\)](#) const
- [VecT get_hyperparams \(\)](#) const
- bool [has_hyperparam](#) (const std::string &name) const
- double [get_hyperparam_value](#) (const std::string &name) const
- int [get_hyperparam_index](#) (const std::string &name) const
- void [set_hyperparam_value](#) (const std::string &name, double value)
- void [rename_hyperparam](#) (const std::string &old_name, const std::string &new_name)
- [StringVecT get_param_names \(\)](#) const
- void [set_param_names](#) (const [StringVecT](#) &desc)
- [StringVecT get_hyperparam_names \(\)](#) const
- void [set_hyperparam_names](#) (const [StringVecT](#) &desc)
- template<class RngT >
 [ParamT sample_prior](#) (RngT &rng) const
- [ParamT sample_prior \(\)](#) const
- void [set_bounds](#) (const [ParamT](#) &lbound, const [ParamT](#) &ubound)
- void [set_lbound](#) (const [ParamT](#) &lbound)
- void [set_ubound](#) (const [ParamT](#) &ubound)
- const [ParamT](#) & [get_lbound \(\)](#) const
- const [ParamT](#) & [get_ubound \(\)](#) const
- bool [theta_in_bounds](#) (const [ParamT](#) &theta) const
- void [bound_theta](#) ([ParamT](#) &theta, double epsilon=[bounds_epsilon](#)) const
- [ParamT bounded_theta](#) (const [ParamT](#) &theta, double epsilon=[bounds_epsilon](#)) const
- [ParamT reflected_theta](#) (const [ParamT](#) &theta) const
- [BoolVecT theta_stack_in_bounds](#) (const [ParamVecT](#) &theta) const
- [ParamVecT bounded_theta_stack](#) (const [ParamVecT](#) &theta, double epsilon=[bounds_epsilon](#)) const
- [ParamVecT reflected_theta_stack](#) (const [ParamVecT](#) &theta) const
- [ImageT make_image \(\)](#) const
- [ImageStackT make_image_stack](#) ([ImageCoordT](#) n) const
- [ImageCoordT get_size_image_stack](#) (const [ImageStackT](#) &stack) const
- [ImageT get_image_from_stack](#) (const [ImageStackT](#) &stack, [ImageCoordT](#) n) const

- `template<class ImT >`
`void set_image_in_stack (ImageStackT &stack, ImageCoordT n, const ImT &im) const`
- `const ImageSizeT & get_size () const`
- `ImageCoordT get_size (IdxT idx) const`
- `ImageCoordT get_num_pixels () const`
- `void check_image_shape (const ImageT &im) const`
Check the shape of a single images is correct for model size.
- `void check_image_shape (const ImageStackT &ims) const`
Check the shape of a stack of images is correct for model size.
- `void sample_mcmc_candidate (IdxT sample_index, ParamT &candidate, double step_scale=1.0) const`
- `void sample_mcmc_candidate (IdxT sample_index, ParamT &candidate, const IdxVecT &fixed_parameters_↵
mask, double step_scale=1.0) const`
- `void set_intensity_mcmc_sampling (double eta_l=-1)`
- `void set_background_mcmc_sampling (double eta_bg=-1)`
- `void set_mcmc_sigma_scale (double scale)`
- `double get_mcmc_sigma_scale () const`
- `IdxT get_mcmc_num_phases () const`

Static Public Member Functions

- static CompositeDist `make_default_prior` (const ImageSizeT &size, double max_sigma_ratio, const std::string &prior_type)
- static CompositeDist `make_default_prior_beta_position` (const ImageSizeT &size, double max_sigma_ratio)
- static CompositeDist `make_default_prior_normal_position` (const ImageSizeT &size, double max_sigma_ratio)
- static CompositeDist `make_prior_beta_position` (const ImageSizeT &size, double beta_xpos, double beta_ypos, double mean_l, double kappa_l, double mean_bg, double kappa_bg, double max_sigma_ratio, double alpha_↵
sigma)
- static CompositeDist `make_prior_normal_position` (const ImageSizeT &size, double sigma_xpos, double sigma_↵
_ypos, double mean_l, double kappa_l, double mean_bg, double kappa_bg, double max_sigma_ratio, double alpha_sigma)
- static prior_hessian::TruncatedNormalDist `make_prior_component_position_normal` (IdxT size, double pos_↵
sigma=default_sigma_pos)
- static prior_hessian::ScaledSymmetricBetaDist `make_prior_component_position_beta` (IdxT size, double pos_↵
beta=default_beta_pos)
- static prior_hessian::TruncatedGammaDist `make_prior_component_intensity` (double mean=default_mean_↵
l, double kappa=default_intensity_kappa)
- static prior_hessian::TruncatedParetoDist `make_prior_component_sigma` (double min_sigma, double max_↵
sigma, double alpha=default_alpha_sigma)
- static void `set_rng_seed` (RngSeedT seed)
- static ParallelRngManagerT & `get_rng_manager` ()
- static ParallelRngGeneratorT & `get_rng_generator` ()
- static void `check_size` (const ImageSizeT &size_)

Check the size argument for the model.

Static Public Attributes

- static const [StringVecT](#) [prior_types](#)
- static const std::string [DefaultPriorType](#) = "Normal"
- static const std::string [DefaultSeperableInitEstimator](#) = "TrustRegion"
- static const double [bounds_epsilon](#) = 1.0E-6
- static const double [global_min_psf_sigma](#) = 1E-1
- static const double [global_max_psf_sigma](#) = 1E2
- static const double [default_beta_pos](#) = 3
- static const double [default_sigma_pos](#) = 1
- static const double [default_mean_l](#) = 300
- static const double [default_max_l](#) = INFINITY
- static const double [default_intensity_kappa](#) = 2
- static const double [default_pixel_mean_bg](#) = 4
- static const double [default_alpha_sigma](#) = 2
- static const [ImageCoordT](#) [num_dim](#) =2
- static const [ImageCoordT](#) [global_min_size](#) =3
- static const [ImageCoordT](#) [global_max_size](#) =512
- static const double [global_default_mcmc_sigma_scale](#) = 0.05
- static const double [global_max_mcmc_sigma_scale](#) = 0.5

Protected Member Functions

- [Gauss2DsModel](#) (const [ImageSizeT](#) &size, const [VecT](#) &min_sigma, const [VecT](#) &max_sigma)
- [Gauss2DsModel](#) (const [Gauss2DsModel](#) &o)
- [Gauss2DsModel](#) ([Gauss2DsModel](#) &&o)
- [Gauss2DsModel](#) & operator= (const [Gauss2DsModel](#) &o)
- [Gauss2DsModel](#) & operator= ([Gauss2DsModel](#) &&o)
- void [update_internal_1Dsum_estimators](#) ()
- void [set_mcmc_num_phases](#) ([IdxT](#) num_phases)

Static Protected Member Functions

- static [Gauss1DSumModelT](#) [make_internal_1Dsum_estimator](#) ([IdxT](#) dim, const [ImageSizeT](#) &size, const [VecT](#) &min_sigma, const [VecT](#) &max_sigma, const [CompositeDist](#) &prior)
- static double [compute_max_sigma_ratio](#) (const [VecT](#) &min_sigma, const [VecT](#) &max_sigma)

Protected Attributes

- [VecT](#) [min_sigma](#)
- [Gauss1DSumModelT](#) [x_model](#)
- [Gauss1DSumModelT](#) [y_model](#)
- [CompositeDist](#) [prior](#)
- [IdxT](#) [num_params](#)
- [IdxT](#) [num_hyperparams](#)
- [ParamT](#) [lbound](#)
- [ParamT](#) [ubound](#)
- [ImageSizeT](#) [size](#)
- double [eta_sigma](#) =0
- double [eta_y](#) =0
- double [eta_x](#) =0
- double [eta_l](#) =0
- double [eta_bg](#) =0
- [IdxT](#) [num_phases](#)
- double [sigma_scale](#)

9.17.1 Detailed Description

A base class for 2D Gaussian PSF where the gaussian sigma is controlled by a single scalar parameter which is called `sigma_ratio`. The size of the gaussian psf is `sigma_ratio*psf_sigma`, where `psf_sigma` is considered as a vector [`psf_sigmaX`, `psf_sigmaY`].

Definition at line 23 of file `Gauss2DsModel.h`.

9.17.2 Member Typedef Documentation

9.17.2.1 `using mappel::Gauss2DsModel::Gauss1DSumModelT = Gauss1DsMAP`

Definition at line 26 of file `Gauss2DsModel.h`.

9.17.2.2 `using mappel::ImageFormat2DBase::ImageCoordT = uint32_t` [inherited]

Image size coordinate storage type

Definition at line 24 of file `ImageFormat2DBase.h`.

9.17.2.3 `using mappel::ImageFormat2DBase::ImagePixelT = double` [inherited]

Image pixel storage type

Definition at line 25 of file `ImageFormat2DBase.h`.

9.17.2.4 `template<class PixelT> using mappel::ImageFormat2DBase::ImageShapeT = arma::Mat<PixelT>` [inherited]

Shape of the data type for a single image

Definition at line 32 of file `ImageFormat2DBase.h`.

9.17.2.5 `template<class CoordT> using mappel::ImageFormat2DBase::ImageSizeShapeT = arma::Col<CoordT>` [inherited]

Shape of the data type to store a single image's coordinates

Definition at line 27 of file `ImageFormat2DBase.h`.

9.17.2.6 `using mappel::ImageFormat2DBase::ImageSizeT = ImageSizeShapeT<ImageCoordT>` [inherited]

Data type for a single image size

Definition at line 29 of file `ImageFormat2DBase.h`.

9.17.2.7 `template<class CoordT > using mappel::ImageFormat2DBase::ImageSizeVecShapeT = arma::Mat<CoordT>`
`[inherited]`

Shape of the data type to store a vector of image's coordinates

Definition at line 28 of file ImageFormat2DBase.h.

9.17.2.8 `using mappel::ImageFormat2DBase::ImageSizeVecT = ImageSizeVecShapeT<ImageCoordT>`
`[inherited]`

Data type for a sequence of image sizes

Definition at line 30 of file ImageFormat2DBase.h.

9.17.2.9 `template<class PixelT > using mappel::ImageFormat2DBase::ImageStackShapeT = arma::Cube<PixelT>`
`[inherited]`

Shape of the data type for a sequence of images

Definition at line 33 of file ImageFormat2DBase.h.

9.17.2.10 `using mappel::ImageFormat2DBase::ImageStackT = ImageStackShapeT<ImagePixelT>`
`[inherited]`

Data type to represent a sequence of images

Definition at line 35 of file ImageFormat2DBase.h.

9.17.2.11 `using mappel::ImageFormat2DBase::ImageT = ImageShapeT<ImagePixelT>` `[inherited]`

Data type to represent single image

Definition at line 34 of file ImageFormat2DBase.h.

9.17.2.12 `using mappel::PointEmitterModel::ParamT = arma::vec` `[inherited]`

Parameter vector

Definition at line 47 of file PointEmitterModel.h.

9.17.2.13 `using mappel::PointEmitterModel::ParamVecT = arma::mat` `[inherited]`

Vector of parameter vectors

Definition at line 48 of file PointEmitterModel.h.

9.17.2.14 `using mappel::Gauss2DsModel::StencilVecT = std::vector<Stencil>`

Definition at line 55 of file Gauss2DsModel.h.

9.17.3 Constructor & Destructor Documentation

9.17.3.1 `mappel::Gauss2DsModel::Gauss2DsModel (const ImageSizeT & size, const VecT & min_sigma, const VecT & max_sigma)` `[protected]`

Definition at line 12 of file Gauss2DsModel.cpp.

References `mappel::PointEmitterModel::check_psf_sigma()`, `make_internal_1Dsum_estimator()`, `min_sigma`, `mappel::PointEmitterModel::prior`, `mappel::ImageFormat2DBase::size`, and `y_model`.

Referenced by `debug_internal_sum_model_y()`.

9.17.3.2 `mappel::Gauss2DsModel::Gauss2DsModel (const Gauss2DsModel & o)` `[protected]`

Definition at line 28 of file Gauss2DsModel.cpp.

References `get_max_sigma()`, `make_internal_1Dsum_estimator()`, `min_sigma`, `mappel::PointEmitterModel::prior`, `mappel::ImageFormat2DBase::size`, and `y_model`.

9.17.3.3 `mappel::Gauss2DsModel::Gauss2DsModel (Gauss2DsModel && o)` `[protected]`

Definition at line 36 of file Gauss2DsModel.cpp.

References `get_max_sigma()`, `make_internal_1Dsum_estimator()`, `min_sigma`, `mappel::PointEmitterModel::prior`, `mappel::ImageFormat2DBase::size`, and `y_model`.

9.17.4 Member Function Documentation

9.17.4.1 `void mappel::PointEmitterModel::bound_theta (ParamT & theta, double epsilon = bounds_epsilon)` `const` `[inherited]`

Definition at line 248 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

9.17.4.2 `PointEmitterModel::ParamT mappel::PointEmitterModel::bounded_theta (const ParamT & theta, double epsilon = bounds_epsilon)` `const` `[inherited]`

Definition at line 265 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::PointEmitterModel::bounded_theta_stack()`.

9.17.4.3 `PointEmitterModel::ParamVecT mappel::PointEmitterModel::bounded_theta_stack (const ParamVecT & theta, double epsilon = bounds_epsilon) const` [inherited]

Definition at line 306 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::bounded_theta()`, `mappel::PointEmitterModel::check_param_shape()`, and `mappel::PointEmitterModel::make_param_stack()`.

9.17.4.4 `void mappel::ImageFormat2DBase::check_image_shape (const ImageT & im) const` [inherited]

Check the shape of a single images is correct for model size.

Definition at line 80 of file ImageFormat2DBase.cpp.

References `mappel::ImageFormat2DBase::size`.

9.17.4.5 `void mappel::ImageFormat2DBase::check_image_shape (const ImageStackT & ims) const` [inherited]

Check the shape of a stack of images is correct for model size.

Definition at line 93 of file ImageFormat2DBase.cpp.

References `mappel::ImageFormat2DBase::size`.

9.17.4.6 `void mappel::PointEmitterModel::check_param_shape (const ParamT & theta) const` [inherited]

Definition at line 167 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::num_params`.

Referenced by `mappel::PointEmitterModel::bound_theta()`, `mappel::PointEmitterModel::bounded_theta()`, `mappel::PointEmitterModel::bounded_theta_stack()`, `mappel::PointEmitterModel::reflected_theta()`, `mappel::PointEmitterModel::reflected_theta_stack()`, `mappel::PointEmitterModel::theta_in_bounds()`, and `mappel::PointEmitterModel::theta_stack_in_bounds()`.

9.17.4.7 `void mappel::PointEmitterModel::check_param_shape (const ParamVecT & theta) const` [inherited]

Definition at line 176 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::num_params`.

9.17.4.8 `void mappel::PointEmitterModel::check_psf_sigma (double psf_sigma) const` [inherited]

Definition at line 185 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::global_max_psf_sigma`, and `mappel::PointEmitterModel::global_min_psf_sigma`.

Referenced by `mappel::Gauss1DModel::Gauss1DModel()`, `mappel::Gauss2DModel::Gauss2DModel()`, `Gauss2DsModel()`, `mappel::Gauss1DsModel::set_max_sigma()`, `set_max_sigma()`, `mappel::Gauss1DsModel::set_min_sigma()`, `set_min_sigma()`, `mappel::Gauss1DModel::set_psf_sigma()`, and `mappel::Gauss2DModel::set_psf_sigma()`.

9.17.4.9 `void mappel::PointEmitterModel::check_psf_sigma (const VecT & psf_sigma) const` `[inherited]`

Definition at line 197 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::global_max_psf_sigma`, and `mappel::PointEmitterModel::global_min_psf_sigma`.

9.17.4.10 `void mappel::ImageFormat2DBase::check_size (const ImageSizeT & size_)` `[static]`, `[inherited]`

Check the size argument for the model.

Definition at line 60 of file ImageFormat2DBase.cpp.

References `mappel::ImageFormat2DBase::global_max_size`, and `mappel::ImageFormat2DBase::global_min_size`.

Referenced by `mappel::ImageFormat2DBase::ImageFormat2DBase()`, and `mappel::ImageFormat2DBase::set_size()`.

9.17.4.11 `double mappel::Gauss2DsModel::compute_max_sigma_ratio (const VecT & min_sigma, const VecT & max_sigma)` `[static]`, `[protected]`

Definition at line 162 of file Gauss2DsModel.cpp.

References `min_sigma`.

Referenced by `debug_internal_sum_model_y()`, `mappel::Gauss2DsMAP::Gauss2DsMAP()`, `mappel::Gauss2DsMLE::Gauss2DsMLE()`, and `set_max_sigma()`.

9.17.4.12 `Gauss1DSumModelT mappel::Gauss2DsModel::debug_internal_sum_model_x () const` `[inline]`

Definition at line 104 of file Gauss2DsModel.h.

References `x_model`.

9.17.4.13 `Gauss1DSumModelT mappel::Gauss2DsModel::debug_internal_sum_model_y () const` `[inline]`

Definition at line 105 of file Gauss2DsModel.h.

References `compute_max_sigma_ratio()`, `Gauss2DsModel()`, `make_internal_1Dsum_estimator()`, `min_sigma`, `operator=()`, `mappel::PointEmitterModel::prior`, `mappel::ImageFormat2DBase::size`, `update_internal_1Dsum_estimators()`, and `y_model`.

9.17.4.14 `int mappel::PointEmitterModel::get_hyperparam_index (const std::string & name) const` `[inline]`, `[inherited]`

Definition at line 236 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.17.4.15 **StringVecT** mappel::PointEmitterModel::get_hyperparam_names () const [inline], [inherited]

Definition at line 256 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.17.4.16 **double** mappel::PointEmitterModel::get_hyperparam_value (const std::string & name) const [inline], [inherited]

Definition at line 232 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

Referenced by mappel::MCMCAdaptor1D::set_background_mcmc_sampling(), and mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling().

9.17.4.17 **PointEmitterModel::ParamT** mappel::PointEmitterModel::get_hyperparams () const [inline], [inherited]

Definition at line 224 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.17.4.18 **ImageFormat2DBase::ImageT** mappel::ImageFormat2DBase::get_image_from_stack (const ImageStackT & stack, ImageCoordT n) const [inline], [inherited]

Definition at line 106 of file ImageFormat2DBase.h.

9.17.4.19 **const PointEmitterModel::ParamT &** mappel::PointEmitterModel::get_lbound () const [inline], [inherited]

Definition at line 212 of file PointEmitterModel.h.

References mappel::PointEmitterModel::lbound.

Referenced by mappel::MCMCAdaptor1D::MCMCAdaptor1D(), mappel::MCMCAdaptor2D::MCMCAdaptor2D(), and mappel::MCMCAdaptor1D::set_background_mcmc_sampling().

9.17.4.20 **VecT** mappel::Gauss2DsModel::get_max_sigma () const [inline]

Definition at line 132 of file Gauss2DsModel.h.

References get_max_sigma_ratio(), and get_min_sigma().

Referenced by Gauss2DsModel(), get_stats(), operator=(), set_max_sigma_ratio(), set_min_sigma(), and update_internal_1Dsum_estimators().

9.17.4.21 `double mappel::Gauss2DsModel::get_max_sigma (IdxT dim) const` `[inline]`

Definition at line 136 of file Gauss2DsModel.h.

References `get_max_sigma_ratio()`, and `get_min_sigma()`.

9.17.4.22 `double mappel::Gauss2DsModel::get_max_sigma_ratio () const` `[inline]`

Definition at line 140 of file Gauss2DsModel.h.

References `mappel::PointEmitterModel::get_ubound()`.

Referenced by `get_max_sigma()`, and `get_stats()`.

9.17.4.23 `IdxT mappel::MCMCAdaptorBase::get_mcmc_num_phases () const` `[inherited]`

Definition at line 56 of file MCMCAdaptorBase.cpp.

References `mappel::MCMCAdaptorBase::num_phases`.

9.17.4.24 `double mappel::MCMCAdaptorBase::get_mcmc_sigma_scale () const` `[inherited]`

Definition at line 53 of file MCMCAdaptorBase.cpp.

References `mappel::MCMCAdaptorBase::sigma_scale`.

9.17.4.25 `VecT mappel::Gauss2DsModel::get_min_sigma () const` `[inline]`

Definition at line 128 of file Gauss2DsModel.h.

References `min_sigma`.

Referenced by `get_max_sigma()`, `get_stats()`, and `set_max_sigma()`.

9.17.4.26 `double mappel::Gauss2DsModel::get_min_sigma (IdxT dim) const`

Definition at line 191 of file Gauss2DsModel.cpp.

References `DefaultPriorType`, `min_sigma`, and `prior_types`.

9.17.4.27 `IdxT mappel::PointEmitterModel::get_num_hyperparams () const` `[inline]`, `[inherited]`

Definition at line 208 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::num_hyperparams`.

9.17.4.28 `IdxT mappel::PointEmitterModel::get_num_params () const` `[inline]`, `[inherited]`

Definition at line 160 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::num_params`.

9.17.4.29 ImageFormat2DBase::ImageCoordT mappel::ImageFormat2DBase::get_num_pixels () const [inline],
[inherited]

Definition at line 79 of file ImageFormat2DBase.h.

References mappel::ImageFormat2DBase::size.

Referenced by mappel::ImageFormat2DBase::get_stats().

9.17.4.30 StringVecT mappel::PointEmitterModel::get_param_names () const [inline],[inherited]

Definition at line 248 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.17.4.31 CompositeDist & mappel::PointEmitterModel::get_prior () [inline],[inherited]

Definition at line 200 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

Referenced by mappel::Gauss2DModel::update_internal_1Dsum_estimators(), and update_internal_1Dsum_↵
estimators().

9.17.4.32 const CompositeDist & mappel::PointEmitterModel::get_prior () const [inline],[inherited]

Definition at line 204 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.17.4.33 ParallelRngGeneratorT & mappel::PointEmitterModel::get_rng_generator () [static],[inherited]

Definition at line 120 of file PointEmitterModel.cpp.

References mappel::rng_manager.

9.17.4.34 ParallelRngManagerT & mappel::PointEmitterModel::get_rng_manager () [static],[inherited]

Definition at line 115 of file PointEmitterModel.cpp.

References mappel::rng_manager.

9.17.4.35 const ImageFormat2DBase::ImageSizeT & mappel::ImageFormat2DBase::get_size () const [inline],
[inherited]

Definition at line 74 of file ImageFormat2DBase.h.

References mappel::ImageFormat2DBase::size.

9.17.4.36 ImageFormat2DBase::ImageCoordT mappel::ImageFormat2DBase::get_size (IdxT *idx*) const
[inherited]

Definition at line 41 of file ImageFormat2DBase.cpp.

References mappel::ImageFormat2DBase::size.

9.17.4.37 ImageFormat2DBase::ImageCoordT mappel::ImageFormat2DBase::get_size_image_stack (const ImageStackT & *stack*) const [inline],[inherited]

Definition at line 99 of file ImageFormat2DBase.h.

9.17.4.38 StatsT mappel::Gauss2DsModel::get_stats () const

Definition at line 337 of file Gauss2DsModel.cpp.

References get_max_sigma(), get_max_sigma_ratio(), get_min_sigma(), mappel::MCMCAdaptor2Ds::get_stats(), mappel::ImageFormat2DBase::get_stats(), and mappel::PointEmitterModel::get_stats().

9.17.4.39 const PointEmitterModel::ParamT & mappel::PointEmitterModel::get_ubound () const [inline],[inherited]

Definition at line 216 of file PointEmitterModel.h.

References mappel::PointEmitterModel::ubound.

Referenced by mappel::Gauss2DsxyModel::get_max_sigma_ratio(), get_max_sigma_ratio(), mappel::MCMCAdaptor1D::MCMCAdaptor1D(), mappel::MCMCAdaptor2D::MCMCAdaptor2D(), mappel::MCMCAdaptor1D::set_background_mcmc_sampling(), and set_max_sigma_ratio().

9.17.4.40 bool mappel::PointEmitterModel::has_hyperparam (const std::string & *name*) const [inline],[inherited]

Definition at line 228 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.17.4.41 Gauss2DsModel::Stencil mappel::Gauss2DsModel::initial_theta_estimate (const ImageT & *im*) const
[inline]

Fast, heuristic estimate of initial theta.

Definition at line 224 of file Gauss2DsModel.h.

References mappel::PointEmitterModel::DefaultSeperableInitEstimator, and mappel::PointEmitterModel::make_param().

Referenced by initial_theta_estimate().

9.17.4.42 `Gauss2DsModel::Stencil mappel::Gauss2DsModel::initial_theta_estimate (const ImageT & im, const ParamT & theta_init) const` [inline]

Definition at line 231 of file Gauss2DsModel.h.

References `mappel::PointEmitterModel::DefaultSeperableInitEstimator`, and `initial_theta_estimate()`.

9.17.4.43 `Gauss2DsModel::Stencil mappel::Gauss2DsModel::initial_theta_estimate (const ImageT & im, const ParamT & theta_init, const std::string & estimator) const`

Definition at line 381 of file Gauss2DsModel.cpp.

References `mappel::Gauss2DsModel::Stencil::bg()`, `mappel::methods::estimate_max()`, `mappel::Gauss2DsModel::Stencil::l()`, `mappel::PointEmitterModel::lbound`, `make_stencil()`, `min_sigma`, `mappel::PointEmitterModel::num_params`, `mappel::Gauss2DsModel::Stencil::sigma_ratio()`, `mappel::ImageFormat2DBase::size`, `mappel::estimator::MLEData::theta`, `mappel::PointEmitterModel::theta_in_bounds()`, `mappel::PointEmitterModel::ubound`, `x_model`, and `y_model`.

9.17.4.44 `CompositeDist mappel::Gauss2DsModel::make_default_prior (const ImageSizeT & size, double max_sigma_ratio, const std::string & prior_type)` [static]

Definition at line 208 of file Gauss2DsModel.cpp.

References `mappel::istarts_with()`, `make_default_prior_beta_position()`, and `make_default_prior_normal_position()`.

Referenced by `mappel::Gauss2DsMAP::Gauss2DsMAP()`, and `mappel::Gauss2DsMLE::Gauss2DsMLE()`.

9.17.4.45 `CompositeDist mappel::Gauss2DsModel::make_default_prior_beta_position (const ImageSizeT & size, double max_sigma_ratio)` [static]

Definition at line 229 of file Gauss2DsModel.cpp.

References `mappel::PointEmitterModel::default_pixel_mean_bg`, `mappel::PointEmitterModel::make_prior_component_intensity()`, `mappel::PointEmitterModel::make_prior_component_position_beta()`, `mappel::PointEmitterModel::make_prior_component_sigma()`, and `mappel::ImageFormat2DBase::size`.

Referenced by `make_default_prior()`.

9.17.4.46 `CompositeDist mappel::Gauss2DsModel::make_default_prior_normal_position (const ImageSizeT & size, double max_sigma_ratio)` [static]

Definition at line 241 of file Gauss2DsModel.cpp.

References `mappel::PointEmitterModel::default_pixel_mean_bg`, `mappel::PointEmitterModel::make_prior_component_intensity()`, `mappel::PointEmitterModel::make_prior_component_position_normal()`, `mappel::PointEmitterModel::make_prior_component_sigma()`, and `mappel::ImageFormat2DBase::size`.

Referenced by `make_default_prior()`.

9.17.4.47 ImageFormat2DBase::ImageT mappel::ImageFormat2DBase::make_image () const [inline],
[inherited]

Definition at line 85 of file ImageFormat2DBase.h.

References mappel::ImageFormat2DBase::size.

9.17.4.48 ImageFormat2DBase::ImageStackT mappel::ImageFormat2DBase::make_image_stack (ImageCoordT *n*) const
[inline], [inherited]

Definition at line 92 of file ImageFormat2DBase.h.

References mappel::ImageFormat2DBase::size.

9.17.4.49 Gauss2DsModel::Gauss1DSumModelT mappel::Gauss2DsModel::make_internal_1Dsum_estimator (IdxT *dim*,
const ImageSizeT & *size*, const VecT & *min_sigma*, const VecT & *max_sigma*, const CompositeDist & *prior*)
[static], [protected]

Definition at line 69 of file Gauss2DsModel.cpp.

References mappel::Gauss1DsModel::make_prior_beta_position(), mappel::Gauss1DsModel::make_prior_normal_↵
position(), min_sigma, and mappel::ImageFormat2DBase::size.

Referenced by debug_internal_sum_model_y(), Gauss2DsModel(), and update_internal_1Dsum_estimators().

9.17.4.50 PointEmitterModel::ParamT mappel::PointEmitterModel::make_param () const [inline], [inherited]

Definition at line 164 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

Referenced by mappel::Gauss1DModel::initial_theta_estimate(), mappel::Gauss1DsModel::initial_theta_estimate(),
mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DskyModel::initial_theta_estimate(), initial_theta_↵
estimate(), mappel::Gauss1DModel::pixel_hess_update(), mappel::Gauss1DsModel::pixel_hess_update(), mappel::↵
Gauss2DModel::pixel_hess_update(), and pixel_hess_update().

9.17.4.51 template<class FillT > PointEmitterModel::ParamT mappel::PointEmitterModel::make_param (FillT *fill*) const
[inherited]

Definition at line 181 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.17.4.52 MatT mappel::PointEmitterModel::make_param_mat () const [inline], [inherited]

Definition at line 172 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.17.4.53 `template<class FillT > MatT mappel::PointEmitterModel::make_param_mat (FillT fill) const` [inherited]

Definition at line 191 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.17.4.54 `CubeT mappel::PointEmitterModel::make_param_mat_stack (IdxT n) const` [inline], [inherited]

Definition at line 176 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.17.4.55 `template<class FillT > CubeT mappel::PointEmitterModel::make_param_mat_stack (IdxT n, FillT fill) const`
[inherited]

Definition at line 196 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.17.4.56 `PointEmitterModel::ParamVecT mappel::PointEmitterModel::make_param_stack (IdxT n) const` [inline],
[inherited]

Definition at line 168 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

Referenced by mappel::PointEmitterModel::bounded_theta_stack(), and mappel::PointEmitterModel::reflected_theta_stack().

9.17.4.57 `template<class FillT > PointEmitterModel::ParamVecT mappel::PointEmitterModel::make_param_stack (IdxT n, FillT fill) const` [inherited]

Definition at line 186 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.17.4.58 `CompositeDist mappel::Gauss2DsModel::make_prior_beta_position (const ImageSizeT & size, double beta_xpos, double beta_ypos, double mean_l, double kappa_l, double mean_bg, double kappa_bg, double max_sigma_ratio, double alpha_sigma)` [static]

Definition at line 253 of file Gauss2DsModel.cpp.

References mappel::PointEmitterModel::make_prior_component_intensity(), mappel::PointEmitterModel::make_prior_component_position_beta(), mappel::PointEmitterModel::make_prior_component_sigma(), and mappel::ImageFormat2DBase::size.

9.17.4.59 `prior_hessian::TruncatedGammaDist mappel::PointEmitterModel::make_prior_component_intensity (double mean = default_mean_I, double kappa = default_intensity_kappa) [static],[inherited]`

Definition at line 98 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::default_max_I`.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_beta_position()`, `mappel::Gauss1DModel::make_default_prior_beta_position()`, `make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_normal_position()`, `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss1DModel::make_default_prior_normal_position()`, `make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_prior_beta_position()`, `mappel::Gauss1DsModel::make_prior_beta_position()`, `mappel::Gauss1DModel::make_prior_beta_position()`, `make_prior_beta_position()`, `mappel::Gauss2DModel::make_prior_normal_position()`, `mappel::Gauss1DsModel::make_prior_normal_position()`, `mappel::Gauss1DModel::make_prior_normal_position()`, and `make_prior_normal_position()`.

9.17.4.60 `prior_hessian::ScaledSymmetricBetaDist mappel::PointEmitterModel::make_prior_component_position_beta (IdxT size, double pos_beta = default_beta_pos) [static],[inherited]`

Definition at line 92 of file PointEmitterModel.cpp.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_beta_position()`, `mappel::Gauss1DModel::make_default_prior_beta_position()`, `make_default_prior_beta_position()`, `mappel::Gauss1DsModel::make_prior_beta_position()`, `mappel::Gauss2DModel::make_prior_beta_position()`, `mappel::Gauss1DModel::make_prior_beta_position()`, and `make_prior_beta_position()`.

9.17.4.61 `prior_hessian::TruncatedNormalDist mappel::PointEmitterModel::make_prior_component_position_normal (IdxT size, double pos_sigma = default_sigma_pos) [static],[inherited]`

Definition at line 85 of file PointEmitterModel.cpp.

Referenced by `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_default_prior_normal_position()`, `mappel::Gauss1DModel::make_default_prior_normal_position()`, `make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_prior_normal_position()`, `mappel::Gauss1DsModel::make_prior_normal_position()`, `mappel::Gauss1DModel::make_prior_normal_position()`, and `make_prior_normal_position()`.

9.17.4.62 `prior_hessian::TruncatedParetoDist mappel::PointEmitterModel::make_prior_component_sigma (double min_sigma, double max_sigma, double alpha = default_alpha_sigma) [static],[inherited]`

Definition at line 104 of file PointEmitterModel.cpp.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `make_default_prior_beta_position()`, `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `make_default_prior_normal_position()`, `mappel::Gauss1DsModel::make_prior_beta_position()`, `make_prior_beta_position()`, `mappel::Gauss1DsModel::make_prior_normal_position()`, and `make_prior_normal_position()`.

9.17.4.63 `CompositeDist mappel::Gauss2DsModel::make_prior_normal_position (const ImageSizeT & size, double sigma_xpos, double sigma_ypos, double mean_I, double kappa_I, double mean_bg, double kappa_bg, double max_sigma_ratio, double alpha_sigma) [static]`

Definition at line 268 of file Gauss2DsModel.cpp.

References `mappel::PointEmitterModel::make_prior_component_intensity()`, `mappel::PointEmitterModel::make_prior_component_position_normal()`, `mappel::PointEmitterModel::make_prior_component_sigma()`, and `mappel::ImageFormat2DBase::size`.

9.17.4.64 `Gauss2DsModel::Stencil mappel::Gauss2DsModel::make_stencil(const ParamT & theta, bool compute_derivatives = true) const [inline]`

Make a new Model::Stencil object at theta.

Stencils store all of the important calculations necessary for evaluating the log-likelihood and its derivatives at a particular theta (parameter) value.

This allows re-use of the most expensive computations. Stencils can be easily passed around by reference, and most functions in the [mappel::methods](#) namespace accept a const [Stencil](#) reference in place of the model parameter.

Throws [mappel::ModelBoundsError](#) if not model.theta_in_bounds(theta).

If derivatives will not be computed with this stencil set compute_derivatives=false

Parameters

<i>theta</i>	Parameter to evaluate at
<i>compute_derivatives</i>	True to also prepare for derivative computations

Returns

A new [Stencil](#) object ready to compute with

Definition at line 162 of file Gauss2DsModel.h.

References [mappel::Gauss2DsModel::Stencil::Stencil\(\)](#), and [mappel::PointEmitterModel::theta_in_bounds\(\)](#).

Referenced by [initial_theta_estimate\(\)](#).

9.17.4.65 `Gauss2DsModel & mappel::Gauss2DsModel::operator=(const Gauss2DsModel & o) [protected]`

Definition at line 44 of file Gauss2DsModel.cpp.

References [get_max_sigma\(\)](#), [min_sigma](#), [mappel::MCMCAdaptor2Ds::operator=\(\)](#), [x_model](#), and [y_model](#).

Referenced by [debug_internal_sum_model_y\(\)](#), [mappel::Gauss2DsMAP::operator=\(\)](#), and [mappel::Gauss2DsMLE::operator=\(\)](#).

9.17.4.66 `Gauss2DsModel & mappel::Gauss2DsModel::operator=(Gauss2DsModel && o) [protected]`

Definition at line 56 of file Gauss2DsModel.cpp.

References [min_sigma](#), [mappel::MCMCAdaptor2Ds::operator=\(\)](#), [x_model](#), and [y_model](#).

9.17.4.67 `void mappel::Gauss2DsModel::pixel_grad(int i, int j, const Stencil & s, ParamT & pgrad) const [inline]`

Definition at line 180 of file Gauss2DsModel.h.

References [mappel::Gauss2DsModel::Stencil::DX](#), [mappel::Gauss2DsModel::Stencil::DXS](#), [mappel::Gauss2DsModel::Stencil::DY](#), [mappel::Gauss2DsModel::Stencil::DYS](#), [mappel::Gauss2DsModel::Stencil::l\(\)](#), [mappel::Gauss2DsModel::Stencil::X](#), and [mappel::Gauss2DsModel::Stencil::Y](#).

Referenced by [pixel_hess_update\(\)](#).

9.17.4.68 `void mappel::Gauss2DsModel::pixel_grad2 (int i, int j, const Stencil & s, ParamT & pgrad2) const [inline]`

Definition at line 192 of file Gauss2DsModel.h.

References `mappel::Gauss2DsModel::Stencil::DXS`, `mappel::Gauss2DsModel::Stencil::DXS2`, `mappel::Gauss2DsModel::Stencil::DYS`, `mappel::Gauss2DsModel::Stencil::DYS2`, `mappel::Gauss2DsModel::Stencil::l()`, `mappel::Gauss2DsModel::Stencil::sigmaX()`, `mappel::Gauss2DsModel::Stencil::sigmaY()`, `mappel::Gauss2DsModel::Stencil::X`, and `mappel::Gauss2DsModel::Stencil::Y`.

9.17.4.69 `void mappel::Gauss2DsModel::pixel_hess (int i, int j, const Stencil & s, MatT & hess) const [inline]`

Definition at line 204 of file Gauss2DsModel.h.

References `mappel::Gauss2DsModel::Stencil::DX`, `mappel::Gauss2DsModel::Stencil::DXS`, `mappel::Gauss2DsModel::Stencil::DXS2`, `mappel::Gauss2DsModel::Stencil::DXSX`, `mappel::Gauss2DsModel::Stencil::DY`, `mappel::Gauss2DsModel::Stencil::DYS`, `mappel::Gauss2DsModel::Stencil::DYS2`, `mappel::Gauss2DsModel::Stencil::DYSY`, `mappel::Gauss2DsModel::Stencil::l()`, `mappel::Gauss2DsModel::Stencil::sigmaX()`, `mappel::Gauss2DsModel::Stencil::sigmaY()`, `mappel::Gauss2DsModel::Stencil::X`, and `mappel::Gauss2DsModel::Stencil::Y`.

9.17.4.70 `void mappel::Gauss2DsModel::pixel_hess_update (int i, int j, const Stencil & s, double dm_ratio_m1, double dmm_ratio, ParamT & grad, MatT & hess) const`

pixel derivative inner loop calculations.

Definition at line 354 of file Gauss2DsModel.cpp.

References `mappel::Gauss2DsModel::Stencil::DX`, `mappel::Gauss2DsModel::Stencil::DXS`, `mappel::Gauss2DsModel::Stencil::DXS2`, `mappel::Gauss2DsModel::Stencil::DXSX`, `mappel::Gauss2DsModel::Stencil::DY`, `mappel::Gauss2DsModel::Stencil::DYS`, `mappel::Gauss2DsModel::Stencil::DYS2`, `mappel::Gauss2DsModel::Stencil::DYSY`, `mappel::Gauss2DsModel::Stencil::l()`, `mappel::PointEmitterModel::make_param()`, `pixel_grad()`, `mappel::Gauss2DsModel::Stencil::sigmaX()`, `mappel::Gauss2DsModel::Stencil::sigmaY()`, `mappel::Gauss2DsModel::Stencil::X`, and `mappel::Gauss2DsModel::Stencil::Y`.

9.17.4.71 `double mappel::Gauss2DsModel::pixel_model_value (int i, int j, const Stencil & s) const [inline]`

Definition at line 173 of file Gauss2DsModel.h.

References `mappel::Gauss2DsModel::Stencil::bg()`, `mappel::Gauss2DsModel::Stencil::l()`, `mappel::Gauss2DsModel::Stencil::X`, and `mappel::Gauss2DsModel::Stencil::Y`.

9.17.4.72 `PointEmitterModel::ParamT mappel::PointEmitterModel::reflected_theta (const ParamT & theta) const [inherited]`

Definition at line 276 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::PointEmitterModel::reflected_theta_stack()`.

9.17.4.73 `PointEmitterModel::ParamVecT mappel::PointEmitterModel::reflected_theta_stack (const ParamVecT & theta) const` `[inherited]`

Definition at line 316 of file `PointEmitterModel.cpp`.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::make_param_stack()`, and `mappel::PointEmitterModel::reflected_theta()`.

9.17.4.74 `void mappel::PointEmitterModel::rename_hyperparam (const std::string & old_name, const std::string & new_name)` `[inline]`, `[inherited]`

Definition at line 244 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

9.17.4.75 `void mappel::MCMCAdaptor2Ds::sample_mcmc_candidate (IdxT sample_index, ParamT & candidate, double step_scale = 1.0) const` `[inherited]`

Definition at line 56 of file `MCMCAdaptor2Ds.cpp`.

References `mappel::MCMCAdaptor1D::eta_bg`, `mappel::MCMCAdaptor1D::eta_l`, `mappel::MCMCAdaptor2Ds::eta_`
`_sigma`, `mappel::MCMCAdaptor1D::eta_x`, `mappel::MCMCAdaptor2D::eta_y`, `mappel::MCMCAdaptorBase::num_`
`phases`, and `mappel::rng_manager`.

9.17.4.76 `void mappel::MCMCAdaptor2Ds::sample_mcmc_candidate (IdxT sample_index, ParamT & candidate, const IdxVecT & fixed_parameters_mask, double step_scale = 1.0) const` `[inherited]`

Definition at line 75 of file `MCMCAdaptor2Ds.cpp`.

References `mappel::MCMCAdaptor1D::eta_bg`, `mappel::MCMCAdaptor1D::eta_l`, `mappel::MCMCAdaptor2Ds::eta_`
`_sigma`, `mappel::MCMCAdaptor1D::eta_x`, `mappel::MCMCAdaptor2D::eta_y`, `mappel::MCMCAdaptorBase::num_`
`phases`, and `mappel::rng_manager`.

9.17.4.77 `template<class RngT> PointEmitterModel::ParamT mappel::PointEmitterModel::sample_prior (RngT & rng) const` `[inherited]`

Definition at line 264 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

9.17.4.78 `PointEmitterModel::ParamT mappel::PointEmitterModel::sample_prior () const` `[inline]`, `[inherited]`

Definition at line 268 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`, and `mappel::rng_manager`.

9.17.4.79 `void mappel::MCMCAdaptor1D::set_background_mcmc_sampling (double eta_bg = -1) [inherited]`

Definition at line 81 of file MCMCAdaptor1D.cpp.

References `mappel::PointEmitterModel::default_pixel_mean_bg`, `mappel::MCMCAdaptor1D::eta_bg`, `mappel::PointEmitterModel::get_hyperparam_value()`, `mappel::PointEmitterModel::get_lbound()`, `mappel::PointEmitterModel::get_ubound()`, and `mappel::MCMCAdaptorBase::sigma_scale`.

Referenced by `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`.

9.17.4.80 `void mappel::PointEmitterModel::set_bounds (const ParamT & lbound_, const ParamT & ubound_) [inherited]`

Box-type parameter bounds

Modifies the prior bounds to prevent sampling outside the valid box-constraints.

Definition at line 213 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::bounds_epsilon`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

9.17.4.81 `void mappel::PointEmitterModel::set_hyperparam_names (const StringVecT & desc) [inline], [inherited]`

Definition at line 260 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.17.4.82 `void mappel::PointEmitterModel::set_hyperparam_value (const std::string & name, double value) [inline], [inherited]`

Definition at line 240 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.17.4.83 `void mappel::Gauss2DsModel::set_hyperparams (const VecT & hyperparams)`

Definition at line 119 of file Gauss2DsModel.cpp.

References `mappel::PointEmitterModel::set_hyperparams()`, and `update_internal_1Dsum_estimators()`.

9.17.4.84 `template<class ImT > void mappel::ImageFormat2DBase::set_image_in_stack (ImageStackT & stack, ImageCoordT n, const ImT & im) const [inherited]`

Definition at line 113 of file ImageFormat2DBase.h.

9.17.4.85 void mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling (double *eta_l* = -1) [inherited]

Definition at line 65 of file MCMCAdaptor1D.cpp.

References mappel::PointEmitterModel::default_mean_l, mappel::MCMCAdaptor1D::eta_l, mappel::PointEmitterModel::get_hyperparam_value(), and mappel::MCMCAdaptorBase::sigma_scale.

Referenced by mappel::MCMCAdaptor1D::MCMCAdaptor1D().

9.17.4.86 void mappel::PointEmitterModel::set_lbound (const ParamT & *lbound*) [inherited]

Definition at line 226 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::bounds_epsilon, mappel::PointEmitterModel::lbound, mappel::PointEmitterModel::num_params, mappel::PointEmitterModel::prior, and mappel::PointEmitterModel::ubound.

Referenced by mappel::Gauss1DsModel::set_min_sigma().

9.17.4.87 void mappel::Gauss2DsModel::set_max_sigma (const VecT & *new_sigma*)

Set the max_sigma_ratio based on the new max_sigma's ratio with the current min_sigma.

Definition at line 155 of file Gauss2DsModel.cpp.

References mappel::PointEmitterModel::check_psf_sigma(), compute_max_sigma_ratio(), get_min_sigma(), and set_max_sigma_ratio().

9.17.4.88 void mappel::Gauss2DsModel::set_max_sigma_ratio (double *max_sigma_ratio*)

Definition at line 176 of file Gauss2DsModel.cpp.

References mappel::PointEmitterModel::bounds_epsilon, get_max_sigma(), mappel::PointEmitterModel::get_ubound(), mappel::Gauss1DsModel::set_max_sigma(), mappel::PointEmitterModel::set_ubound(), x_model, and y_model.

Referenced by set_max_sigma().

9.17.4.89 void mappel::MCMCAdaptorBase::set_mcmc_num_phases (IdxT *num_phases*) [protected],[inherited]

Definition at line 59 of file MCMCAdaptorBase.cpp.

References mappel::MCMCAdaptorBase::num_phases.

Referenced by mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds(), and mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds().

9.17.4.90 void mappel::MCMCAdaptorBase::set_mcmc_sigma_scale (double *scale*) [inherited]

Definition at line 39 of file MCMCAdaptorBase.cpp.

References mappel::MCMCAdaptorBase::global_max_mcmc_sigma_scale, and mappel::MCMCAdaptorBase::sigma_scale.

9.17.4.91 `void mappel::Gauss2DsModel::set_min_sigma (const VecT & new_sigma)`

Set the minimum sigma, keeping the max_sigma_ratio the same.

Definition at line 137 of file Gauss2DsModel.cpp.

References `mappel::PointEmitterModel::check_psf_sigma()`, `get_max_sigma()`, `min_sigma`, `mappel::Gauss1DsModel::set_max_sigma()`, `mappel::Gauss1DsModel::set_min_sigma()`, `x_model`, and `y_model`.

9.17.4.92 `void mappel::PointEmitterModel::set_param_names (const StringVecT & desc)` `[inline]`, `[inherited]`

Definition at line 252 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.17.4.93 `void mappel::Gauss2DsModel::set_prior (CompositeDist && prior_)`

Definition at line 107 of file Gauss2DsModel.cpp.

References `mappel::PointEmitterModel::set_prior()`, and `update_internal_1Dsum_estimators()`.

9.17.4.94 `void mappel::Gauss2DsModel::set_prior (const CompositeDist & prior_)`

Definition at line 113 of file Gauss2DsModel.cpp.

References `mappel::PointEmitterModel::set_prior()`, and `update_internal_1Dsum_estimators()`.

9.17.4.95 `void mappel::PointEmitterModel::set_rng_seed (RngSeedT seed)` `[static]`, `[inherited]`

Definition at line 110 of file PointEmitterModel.cpp.

References `mappel::rng_manager`.

9.17.4.96 `void mappel::Gauss2DsModel::set_size (const ImageSizeT & size_)`

Definition at line 125 of file Gauss2DsModel.cpp.

References `mappel::ImageFormat2DBase::set_size()`, `mappel::ImageFormat1DBase::set_size()`, `mappel::ImageFormat2DBase::size`, `x_model`, and `y_model`.

9.17.4.97 `void mappel::PointEmitterModel::set_ubound (const ParamT & ubound)` `[inherited]`

Definition at line 237 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::bounds_epsilon`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::Gauss1DsModel::set_max_sigma()`, and `set_max_sigma_ratio()`.

9.17.4.98 `bool mappel::PointEmitterModel::theta_in_bounds (const ParamT & theta) const` `[inherited]`

Definition at line 257 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::Gauss2DModel::initial_theta_estimate()`, `initial_theta_estimate()`, `mappel::Gauss1DModel::make_stencil()`, `mappel::Gauss1DsModel::make_stencil()`, `mappel::Gauss2DModel::make_stencil()`, `mappel::Gauss2DsxyModel::make_stencil()`, `make_stencil()`, and `mappel::PointEmitterModel::theta_stack_in_bounds()`.

9.17.4.99 `BoolVecT mappel::PointEmitterModel::theta_stack_in_bounds (const ParamVecT & theta) const` `[inherited]`

Definition at line 296 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, and `mappel::PointEmitterModel::theta_in_bounds()`.

9.17.4.100 `void mappel::Gauss2DsModel::update_internal_1Dsum_estimators ()` `[protected]`

Definition at line 100 of file Gauss2DsModel.cpp.

References `get_max_sigma()`, `mappel::PointEmitterModel::get_prior()`, `make_internal_1Dsum_estimator()`, `min_sigma`, `mappel::ImageFormat2DBase::size`, `x_model`, and `y_model`.

Referenced by `debug_internal_sum_model_y()`, `set_hyperparams()`, and `set_prior()`.

9.17.5 Member Data Documentation

9.17.5.1 `const double mappel::PointEmitterModel::bounds_epsilon = 1.0E-6` `[static]`, `[inherited]`

Distance from the boundary to constrain in `bound_theta` and `bounded_theta` methods

Definition at line 52 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_lbound()`, `set_max_sigma_ratio()`, and `mappel::PointEmitterModel::set_ubound()`.

9.17.5.2 `const double mappel::PointEmitterModel::default_alpha_sigma = 2` `[static]`, `[inherited]`

Default per-pixel background gamma distribution shape

Definition at line 62 of file PointEmitterModel.h.

9.17.5.3 `const double mappel::PointEmitterModel::default_beta_pos = 3` `[static]`, `[inherited]`

Default position parameter in symmetric beta-distributions

Definition at line 56 of file PointEmitterModel.h.

9.17.5.4 `const double mappel::PointEmitterModel::default_intensity_kappa = 2` `[static],[inherited]`

Default shape for intensity gamma distributions

Definition at line 60 of file PointEmitterModel.h.

9.17.5.5 `const double mappel::PointEmitterModel::default_max_l = INFINITY` `[static],[inherited]`

Default maximum emitter intensity

Definition at line 59 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::make_prior_component_intensity()`.

9.17.5.6 `const double mappel::PointEmitterModel::default_mean_l = 300` `[static],[inherited]`

Default emitter intensity mean

Definition at line 58 of file PointEmitterModel.h.

Referenced by `mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling()`.

9.17.5.7 `const double mappel::PointEmitterModel::default_pixel_mean_bg = 4` `[static],[inherited]`

Default per-pixel mean background counts

Definition at line 61 of file PointEmitterModel.h.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_beta_position()`, `mappel::Gauss1DModel::make_default_prior_beta_position()`, `make_default_prior_beta_position()`, `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_default_prior_normal_position()`, `mappel::Gauss1DModel::make_default_prior_normal_position()`, `make_default_prior_normal_position()`, and `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`.

9.17.5.8 `const double mappel::PointEmitterModel::default_sigma_pos = 1` `[static],[inherited]`

Default position parameter in symmetric beta-distributions

Definition at line 57 of file PointEmitterModel.h.

9.17.5.9 `const std::string mappel::Gauss2DsModel::DefaultPriorType = "Normal"` `[static]`

Definition at line 59 of file Gauss2DsModel.h.

Referenced by `get_min_sigma()`.

9.17.5.10 `const std::string mappel::PointEmitterModel::DefaultSeperableInitEstimator = "TrustRegion" [static],
[inherited]`

Estimator name to use in 1D separable initializations

Definition at line 49 of file PointEmitterModel.h.

Referenced by mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsxyModel::initial_theta_estimate(), and initial_theta_estimate().

9.17.5.11 `double mappel::MCMCAdaptor1D::eta_bg =0 [protected],[inherited]`

The standard deviation for the normally distributed perturbation to theta_bg in the random walk MCMC sampling

Definition at line 33 of file MCMCAdaptor1D.h.

Referenced by mappel::MCMCAdaptor1D::get_stats(), mappel::MCMCAdaptor1D::MCMCAdaptor1D(), mappel::MCMCAdaptor1D::operator=(), mappel::MCMCAdaptor2D::sample_mcmc_candidate(), mappel::MCMCAdaptor2Ds::sample_mcmc_candidate(), mappel::MCMCAdaptor1Ds::sample_mcmc_candidate(), mappel::MCMCAdaptor1D::sample_mcmc_candidate(), and mappel::MCMCAdaptor1D::set_background_mcmc_sampling().

9.17.5.12 `double mappel::MCMCAdaptor1D::eta_I =0 [protected],[inherited]`

The standard deviation for the normally distributed perturbation to theta_I in the random walk MCMC sampling

Definition at line 32 of file MCMCAdaptor1D.h.

Referenced by mappel::MCMCAdaptor1D::get_stats(), mappel::MCMCAdaptor1D::MCMCAdaptor1D(), mappel::MCMCAdaptor1D::operator=(), mappel::MCMCAdaptor2D::sample_mcmc_candidate(), mappel::MCMCAdaptor2Ds::sample_mcmc_candidate(), mappel::MCMCAdaptor1Ds::sample_mcmc_candidate(), mappel::MCMCAdaptor1D::sample_mcmc_candidate(), and mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling().

9.17.5.13 `double mappel::MCMCAdaptor2Ds::eta_sigma =0 [protected],[inherited]`

The standard deviation for the normally distributed perturbation to theta_bg in the random walk MCMC sampling

Definition at line 27 of file MCMCAdaptor2Ds.h.

Referenced by mappel::MCMCAdaptor2Ds::get_stats(), mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds(), mappel::MCMCAdaptor2Ds::operator=(), and mappel::MCMCAdaptor2Ds::sample_mcmc_candidate().

9.17.5.14 `double mappel::MCMCAdaptor1D::eta_x =0 [protected],[inherited]`

The standard deviation for the normally distributed perturbation to theta_x in the random walk MCMC sampling

Definition at line 31 of file MCMCAdaptor1D.h.

Referenced by mappel::MCMCAdaptor1D::get_stats(), mappel::MCMCAdaptor1D::MCMCAdaptor1D(), mappel::MCMCAdaptor1D::operator=(), mappel::MCMCAdaptor2D::sample_mcmc_candidate(), mappel::MCMCAdaptor1Ds::sample_mcmc_candidate(), mappel::MCMCAdaptor2Ds::sample_mcmc_candidate(), and mappel::MCMCAdaptor1D::sample_mcmc_candidate().

9.17.5.15 `double mappel::MCMCAdaptor2D::eta_y = 0` `[protected], [inherited]`

The standard deviation for the normally distributed perturbation to `theta_y` in the random walk MCMC sampling

Definition at line 28 of file `MCMCAdaptor2D.h`.

Referenced by `mappel::MCMCAdaptor2D::get_stats()`, `mappel::MCMCAdaptor2D::MCMCAdaptor2D()`, `mappel::MCMCAdaptor2D::operator=()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, and `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`.

9.17.5.16 `const double mappel::MCMCAdaptorBase::global_default_mcmc_sigma_scale = 0.05` `[static], [inherited]`

Definition at line 16 of file `MCMCAdaptorBase.h`.

Referenced by `mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds()`, `mappel::MCMCAdaptor2D::MCMCAdaptor2D()`, and `mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds()`.

9.17.5.17 `const double mappel::MCMCAdaptorBase::global_max_mcmc_sigma_scale = 0.5` `[static], [inherited]`

Definition at line 17 of file `MCMCAdaptorBase.h`.

Referenced by `mappel::MCMCAdaptorBase::MCMCAdaptorBase()`, and `mappel::MCMCAdaptorBase::set_mcmc_sigma_scale()`.

9.17.5.18 `const double mappel::PointEmitterModel::global_max_psf_sigma = 1E2` `[static], [inherited]`

Global maximum for any `psf_sigma`. Sizes above this value are invalid, and nowhere near useful for practical point emitter localization

Definition at line 54 of file `PointEmitterModel.h`.

Referenced by `mappel::PointEmitterModel::check_psf_sigma()`.

9.17.5.19 `const ImageFormat2DBase::ImageCoordT mappel::ImageFormat2DBase::global_max_size = 512` `[static], [inherited]`

Maximum size along any dimension of the image. This is insanely big to catch obvious errors

Definition at line 39 of file `ImageFormat2DBase.h`.

Referenced by `mappel::ImageFormat2DBase::check_size()`.

9.17.5.20 `const double mappel::PointEmitterModel::global_min_psf_sigma = 1E-1` `[static], [inherited]`

Global minimum for any `psf_sigma`. Sizes below this value are invalid, and nowhere near useful for practical point emitter localization

Definition at line 53 of file `PointEmitterModel.h`.

Referenced by `mappel::PointEmitterModel::check_psf_sigma()`.

9.17.5.21 `const ImageFormat2DBase::ImageCoordT mappel::ImageFormat2DBase::global_min_size =3` `[static]`,
`[inherited]`

Minimum size along any dimension of the image.

Definition at line 38 of file ImageFormat2DBase.h.

Referenced by mappel::ImageFormat2DBase::check_size().

9.17.5.22 `ParamT mappel::PointEmitterModel::lbound` `[protected]`, `[inherited]`

Definition at line 148 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::bound_theta(), mappel::PointEmitterModel::bounded_theta(), mappel::PointEmitterModel::get_lbound(), mappel::PointEmitterModel::get_stats(), mappel::Gauss1DsModel::initial_theta_estimate(), mappel::Gauss2DModel::initial_theta_estimate(), initial_theta_estimate(), mappel::PointEmitterModel::operator=(), mappel::PointEmitterModel::reflected_theta(), mappel::PointEmitterModel::set_bounds(), mappel::PointEmitterModel::set_lbound(), mappel::PointEmitterModel::set_prior(), mappel::PointEmitterModel::set_ubound(), and mappel::PointEmitterModel::theta_in_bounds().

9.17.5.23 `VecT mappel::Gauss2DsModel::min_sigma` `[protected]`

Gaussian PSF in pixels

Definition at line 118 of file Gauss2DsModel.h.

Referenced by compute_max_sigma_ratio(), debug_internal_sum_model_y(), mappel::Gauss2DsMAP::Gauss2DsMAP(), mappel::Gauss2DsMLE::Gauss2DsMLE(), Gauss2DsModel(), get_min_sigma(), initial_theta_estimate(), make_internal_1Dsum_estimator(), operator=(), set_min_sigma(), mappel::Gauss2DsModel::Stencil::sigmaX(), mappel::Gauss2DsModel::Stencil::sigmaY(), and update_internal_1Dsum_estimators().

9.17.5.24 `const ImageFormat2DBase::ImageCoordT mappel::ImageFormat2DBase::num_dim =2` `[static]`,
`[inherited]`

Number of image dimensions.

Definition at line 37 of file ImageFormat2DBase.h.

Referenced by mappel::ImageFormat2DBase::get_stats().

9.17.5.25 `IdxT mappel::PointEmitterModel::num_hyperparams` `[protected]`, `[inherited]`

Definition at line 147 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::get_num_hyperparams(), mappel::PointEmitterModel::get_stats(), mappel::PointEmitterModel::operator=(), and mappel::PointEmitterModel::set_prior().

9.17.5.26 `IdxT mappel::PointEmitterModel::num_params` `[protected]`, `[inherited]`

Definition at line 146 of file `PointEmitterModel.h`.

Referenced by `mappel::PointEmitterModel::bound_theta()`, `mappel::PointEmitterModel::bounded_theta()`, `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::get_num_params()`, `mappel::PointEmitterModel::get_stats()`, `mappel::Gauss1DModel::initial_theta_estimate()`, `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::PointEmitterModel::make_param()`, `mappel::PointEmitterModel::make_param_mat()`, `mappel::PointEmitterModel::make_param_mat_stack()`, `mappel::PointEmitterModel::make_param_stack()`, `mappel::PointEmitterModel::operator=()`, `mappel::PointEmitterModel::reflected_theta()`, `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::PointEmitterModel::set_prior()`, `mappel::PointEmitterModel::set_ubound()`, and `mappel::PointEmitterModel::theta_in_bounds()`.

9.17.5.27 `IdxT mappel::MCMCAdaptorBase::num_phases` `[protected]`, `[inherited]`

The number of different sampling phases for candidate selection MCMC. Each phase changes a different subset of variables.

Definition at line 29 of file `MCMCAdaptorBase.h`.

Referenced by `mappel::MCMCAdaptorBase::get_mcmc_num_phases()`, `mappel::MCMCAdaptorBase::get_stats()`, `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`, and `mappel::MCMCAdaptorBase::set_mcmc_num_phases()`.

9.17.5.28 `CompositeDist mappel::PointEmitterModel::prior` `[protected]`, `[inherited]`

Definition at line 145 of file `PointEmitterModel.h`.

Referenced by `mappel::Gauss2DModel::debug_internal_sum_model_y()`, `debug_internal_sum_model_y()`, `mappel::Gauss2DModel::Gauss2DModel()`, `Gauss2DsModel()`, `mappel::PointEmitterModel::get_hyperparam_index()`, `mappel::PointEmitterModel::get_hyperparam_names()`, `mappel::PointEmitterModel::get_hyperparam_value()`, `mappel::PointEmitterModel::get_hyperparams()`, `mappel::Gauss1DsModel::get_max_sigma()`, `mappel::Gauss1DsModel::get_min_sigma()`, `mappel::PointEmitterModel::get_param_names()`, `mappel::PointEmitterModel::get_prior()`, `mappel::PointEmitterModel::get_stats()`, `mappel::PointEmitterModel::has_hyperparam()`, `mappel::PointEmitterModel::operator=()`, `mappel::PointEmitterModel::PointEmitterModel()`, `mappel::PointEmitterModel::rename_hyperparam()`, `mappel::PointEmitterModel::sample_prior()`, `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_hyperparam_names()`, `mappel::PointEmitterModel::set_hyperparam_value()`, `mappel::PointEmitterModel::set_hyperparams()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::Gauss1DsModel::set_max_sigma()`, `mappel::Gauss1DsModel::set_min_sigma()`, `mappel::PointEmitterModel::set_param_names()`, `mappel::PointEmitterModel::set_prior()`, and `mappel::PointEmitterModel::set_ubound()`.

9.17.5.29 `const StringVecT mappel::Gauss2DsModel::prior_types` `[static]`

Initial value:

```
= { "Beta",
    "Normal"
}
```

Definition at line 58 of file `Gauss2DsModel.h`.

Referenced by `get_min_sigma()`.

9.17.5.30 double mappel::MCMCAdaptorBase::sigma_scale [protected],[inherited]

A scaling factor for step sizes as a fraction of the size of the domain dimension we are walking in. (0.05 default)

Definition at line 30 of file MCMCAdaptorBase.h.

Referenced by mappel::MCMCAdaptorBase::get_mcmc_sigma_scale(), mappel::MCMCAdaptorBase::get_stats(), mappel::MCMCAdaptor1D::MCMCAdaptor1D(), mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds(), mappel::MCMCAdaptor2D::MCMCAdaptor2D(), mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds(), mappel::MCMCAdaptor1D::set_background_mcmc_sampling(), mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling(), and mappel::MCMCAdaptorBase::set_mcmc_sigma_scale().

9.17.5.31 ImageSizeT mappel::ImageFormat2DBase::size [protected],[inherited]

Number of pixels in X dimension for 1D image

Definition at line 67 of file ImageFormat2DBase.h.

Referenced by mappel::cgauss_compute_estimate(), mappel::cgauss_compute_estimate_debug(), mappel::cgauss_heuristic_compute_estimate(), mappel::ImageFormat2DBase::check_image_shape(), mappel::Gauss2DModel::Stencil::compute_derivatives(), mappel::Gauss2DsModel::Stencil::compute_derivatives(), mappel::Gauss2DModel::debug_internal_sum_model_y(), debug_internal_sum_model_y(), mappel::methods::expected_information(), mappel::Gauss2DModel::Gauss2DModel(), mappel::Gauss2DsMAP::Gauss2DsMAP(), mappel::Gauss2DsMLE::Gauss2DsMLE(), Gauss2DsModel(), mappel::ImageFormat2DBase::get_num_pixels(), mappel::ImageFormat2DBase::get_size(), mappel::ImageFormat2DBase::get_stats(), mappel::methods::likelihood::grad(), mappel::methods::likelihood::grad2(), mappel::methods::likelihood::debug::grad_components(), mappel::methods::likelihood::hessian(), mappel::methods::likelihood::debug::hessian_components(), mappel::Gauss2DModel::initial_theta_estimate(), initial_theta_estimate(), mappel::methods::likelihood::llh(), mappel::methods::likelihood::debug::llh_components(), mappel::Gauss2DModel::make_default_prior_beta_position(), make_default_prior_beta_position(), mappel::Gauss2DModel::make_default_prior_normal_position(), make_default_prior_normal_position(), mappel::ImageFormat2DBase::make_image(), mappel::ImageFormat2DBase::make_image_stack(), mappel::Gauss2DModel::make_internal_1Dsum_estimator(), make_internal_1Dsum_estimator(), mappel::Gauss2DModel::make_prior_beta_position(), make_prior_beta_position(), mappel::Gauss2DModel::make_prior_normal_position(), make_prior_normal_position(), mappel::methods::model_image(), mappel::ImageFormat2DBase::operator=(), mappel::methods::likelihood::rllh(), mappel::methods::likelihood::debug::rllh_components(), mappel::ImageFormat2DBase::set_size(), mappel::Gauss2DModel::set_size(), set_size(), mappel::methods::simulate_image(), mappel::methods::simulate_image_from_model(), mappel::Gauss2DModel::Stencil::Stencil(), mappel::Gauss2DsModel::Stencil::Stencil(), mappel::Gauss2DModel::update_internal_1Dsum_estimators(), and update_internal_1Dsum_estimators().

9.17.5.32 ParamT mappel::PointEmitterModel::ubound [protected],[inherited]

Definition at line 148 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::bound_theta(), mappel::PointEmitterModel::bounded_theta(), mappel::PointEmitterModel::get_stats(), mappel::PointEmitterModel::get_ubound(), mappel::Gauss1DsModel::initial_theta_estimate(), mappel::Gauss2DModel::initial_theta_estimate(), initial_theta_estimate(), mappel::PointEmitterModel::operator=(), mappel::PointEmitterModel::reflected_theta(), mappel::PointEmitterModel::set_bounds(), mappel::PointEmitterModel::set_lbound(), mappel::PointEmitterModel::set_prior(), mappel::PointEmitterModel::set_ubound(), and mappel::PointEmitterModel::theta_in_bounds().

9.17.5.33 Gauss1DSumModelT mappel::Gauss2DsModel::x_model [protected]

X-model fits 2D images X-axis (column sum). Using variable sigma 1D model.

Definition at line 119 of file Gauss2DsModel.h.

Referenced by debug_internal_sum_model_x(), initial_theta_estimate(), operator=(), set_max_sigma_ratio(), set_min_sigma_ratio(), set_size(), and update_internal_1Dsum_estimators().

9.17.5.34 Gauss1DSumModelT mappel::Gauss2DsModel::y_model [protected]

Y-model fits 2D images Y-axis (row sum). Using variable sigma 1D model.

Definition at line 120 of file Gauss2DsModel.h.

Referenced by debug_internal_sum_model_y(), Gauss2DsModel(), initial_theta_estimate(), operator=(), set_max_sigma_ratio(), set_min_sigma_ratio(), set_size(), and update_internal_1Dsum_estimators().

The documentation for this class was generated from the following files:


- [Gauss2DsModel.h](#)
- [Gauss2DsModel.cpp](#)

9.18 mappel::Gauss2DsxyMAP Class Reference

A 1D Gaussian with fixed PSF under an Poisson Read Noise assumption and MAP Objective.

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/Gauss2DsxyMAP.h>
```

Inheritance diagram for mappel::Gauss2DsxyMAP:

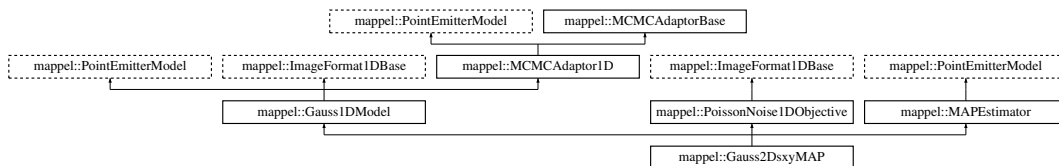

Public Types

- using [StencilVecT](#) = std::vector< [Stencil](#) >
- using [ParamT](#) = arma::vec
- using [ParamVecT](#) = arma::mat
- using [ImageCoordT](#) = uint32_t
- using [ImagePixelT](#) = double
- template<class CoordT >
using [ImageSizeShapeT](#) = CoordT
- template<class CoordT >
using [ImageSizeVecShapeT](#) = arma::Col< CoordT >
- using [ImageSizeT](#) = [ImageSizeShapeT](#)< [ImageCoordT](#) >
- using [ImageSizeVecT](#) = [ImageSizeVecShapeT](#)< [ImageCoordT](#) >
- template<class PixelT >
using [ImageShapeT](#) = arma::Col< PixelT >
- template<class PixelT >
using [ImageStackShapeT](#) = arma::Mat< PixelT >
- using [ImageT](#) = [ImageShapeT](#)< [ImagePixelT](#) >
- using [ImageStackT](#) = [ImageStackShapeT](#)< [ImagePixelT](#) >
- using [ModelDataT](#) = [ImageT](#)
- using [ModelDataStackT](#) = [ImageStackT](#)

Public Member Functions

- [Gauss2DsxMAP](#) (const [ImageSizeT](#) &size, const [VecT](#) &min_sigma, const [VecT](#) &max_sigma)
- [Gauss2DsxMAP](#) (const [ImageSizeT](#) &size, const [VecT](#) &min_sigma, const [VecT](#) &max_sigma, CompositeDist &&prior)
- double [get_psf_sigma](#) () const
- double [get_psf_sigma](#) ([IdxT](#) idx) const
- void [set_psf_sigma](#) (double new_psf_sigma)
- void [set_psf_sigma](#) (const [VecT](#) &new_psf_sigma)
- [StatsT](#) [get_stats](#) () const
- [Stencil](#) [make_stencil](#) (const [ParamT](#) &theta, bool compute_derivatives=true) const
Make a new Model::Stencil object at theta.
- double [pixel_model_value](#) ([IdxT](#) i, const [Stencil](#) &s) const
- void [pixel_grad](#) ([IdxT](#) i, const [Stencil](#) &s, [ParamT](#) &pgrad) const
- void [pixel_grad2](#) ([IdxT](#) i, const [Stencil](#) &s, [ParamT](#) &pgrad2) const
- void [pixel_hess](#) ([IdxT](#) i, const [Stencil](#) &s, [MatT](#) &hess) const
- void [pixel_hess_update](#) ([IdxT](#) i, const [Stencil](#) &s, double dm_ratio_m1, double dmm_ratio, [ParamT](#) &grad, [MatT](#) &hess) const
pixel derivative inner loop calculations.
- [Stencil](#) [initial_theta_estimate](#) (const [ImageT](#) &im) const
Fast, heuristic estimate of initial theta.
- [Stencil](#) [initial_theta_estimate](#) (const [ImageT](#) &im, const [ParamT](#) &theta_init) const
- [IdxT](#) [get_num_params](#) () const
- void [check_param_shape](#) (const [ParamT](#) &theta) const
- void [check_param_shape](#) (const [ParamVecT](#) &theta) const
- void [check_psf_sigma](#) (double psf_sigma) const
- void [check_psf_sigma](#) (const [VecT](#) &psf_sigma) const
- [ParamT](#) [make_param](#) () const
- template<class FillT >
[ParamT](#) [make_param](#) (FillT fill) const
- [ParamVecT](#) [make_param_stack](#) ([IdxT](#) n) const
- template<class FillT >
[ParamVecT](#) [make_param_stack](#) ([IdxT](#) n, FillT fill) const
- [MatT](#) [make_param_mat](#) () const
- template<class FillT >
[MatT](#) [make_param_mat](#) (FillT fill) const
- [CubeT](#) [make_param_mat_stack](#) ([IdxT](#) n) const
- template<class FillT >
[CubeT](#) [make_param_mat_stack](#) ([IdxT](#) n, FillT fill) const
- CompositeDist & [get_prior](#) ()
- const CompositeDist & [get_prior](#) () const
- void [set_prior](#) (CompositeDist &&prior_)
- void [set_prior](#) (const CompositeDist &prior_)
- [IdxT](#) [get_num_hyperparams](#) () const
- void [set_hyperparams](#) (const [VecT](#) &hyperparams)
- [VecT](#) [get_hyperparams](#) () const
- bool [has_hyperparam](#) (const std::string &name) const
- double [get_hyperparam_value](#) (const std::string &name) const
- int [get_hyperparam_index](#) (const std::string &name) const
- void [set_hyperparam_value](#) (const std::string &name, double value)
- void [rename_hyperparam](#) (const std::string &old_name, const std::string &new_name)

- [StringVecT get_param_names](#) () const
- void [set_param_names](#) (const [StringVecT](#) &desc)
- [StringVecT get_hyperparam_names](#) () const
- void [set_hyperparam_names](#) (const [StringVecT](#) &desc)
- template<class RngT >
 [ParamT sample_prior](#) (RngT &rng) const
- [ParamT sample_prior](#) () const
- void [set_bounds](#) (const [ParamT](#) &lbound, const [ParamT](#) &ubound)
- void [set_lbound](#) (const [ParamT](#) &lbound)
- void [set_ubound](#) (const [ParamT](#) &ubound)
- const [ParamT](#) & [get_lbound](#) () const
- const [ParamT](#) & [get_ubound](#) () const
- bool [theta_in_bounds](#) (const [ParamT](#) &theta) const
- void [bound_theta](#) ([ParamT](#) &theta, double epsilon=[bounds_epsilon](#)) const
- [ParamT bounded_theta](#) (const [ParamT](#) &theta, double epsilon=[bounds_epsilon](#)) const
- [ParamT reflected_theta](#) (const [ParamT](#) &theta) const
- [BoolVecT theta_stack_in_bounds](#) (const [ParamVecT](#) &theta) const
- [ParamVecT bounded_theta_stack](#) (const [ParamVecT](#) &theta, double epsilon=[bounds_epsilon](#)) const
- [ParamVecT reflected_theta_stack](#) (const [ParamVecT](#) &theta) const
- [ImageT make_image](#) () const
- [ImageStackT make_image_stack](#) ([ImageCoordT](#) n) const
- [ImageCoordT get_size_image_stack](#) (const [ImageStackT](#) &stack) const
- [ImageT get_image_from_stack](#) (const [ImageStackT](#) &stack, [ImageCoordT](#) n) const
- template<class ImT >
 void [set_image_in_stack](#) ([ImageStackT](#) &stack, [ImageCoordT](#) n, const ImT &im) const
- [ImageSizeT get_size](#) () const
- [ImageCoordT get_size](#) ([IdxT](#) idx) const
- [ImageCoordT get_num_pixels](#) () const
- void [set_size](#) (const [ImageSizeT](#) &size_)
- void [set_size](#) (const arma::Col< [ImageCoordT](#) > &sz)
- void [check_image_shape](#) (const [ImageT](#) &im) const
 Check the shape of a single images is correct for model size.
- void [check_image_shape](#) (const [ImageStackT](#) &ims) const
 Check the shape of a stack of images is correct for model size.
- void [sample_mcmc_candidate](#) ([IdxT](#) sample_index, [ParamT](#) &candidate, double step_scale=1.0) const
- void [sample_mcmc_candidate](#) ([IdxT](#) sample_index, [ParamT](#) &candidate, const [IdxVecT](#) &fixed_parameters_↵
 mask, double step_scale=1.0) const
- void [set_intensity_mcmc_sampling](#) (double eta_l=-1)
- void [set_background_mcmc_sampling](#) (double eta_bg=-1)
- void [set_mcmc_sigma_scale](#) (double scale)
- double [get_mcmc_sigma_scale](#) () const
- [IdxT get_mcmc_num_phases](#) () const

Static Public Member Functions

- static CompositeDist [make_default_prior](#) ([IdxT](#) size, const std::string &prior_type)
- static CompositeDist [make_default_prior_beta_position](#) ([IdxT](#) size)
- static CompositeDist [make_default_prior_normal_position](#) ([IdxT](#) size)
- static CompositeDist [make_prior_beta_position](#) ([IdxT](#) size, double beta_xpos, double mean_l, double kappa_l,
 double mean_bg, double kappa_bg)

- static CompositeDist [make_prior_normal_position](#) (IdxT size, double sigma_xpos, double mean_l, double kappa_l, double mean_bg, double kappa_bg)
- static prior_hessian::TruncatedNormalDist [make_prior_component_position_normal](#) (IdxT size, double pos_↵ sigma=[default_sigma_pos](#))
- static prior_hessian::ScaledSymmetricBetaDist [make_prior_component_position_beta](#) (IdxT size, double pos_↵ beta=[default_beta_pos](#))
- static prior_hessian::TruncatedGammaDist [make_prior_component_intensity](#) (double mean=[default_mean_↵ l](#), double kappa=[default_intensity_kappa](#))
- static prior_hessian::TruncatedParetoDist [make_prior_component_sigma](#) (double min_sigma, double max_↵ sigma, double alpha=[default_alpha_sigma](#))
- static void [set_rng_seed](#) (RngSeedT seed)
- static [ParallelRngManagerT](#) & [get_rng_manager](#) ()
- static [ParallelRngGeneratorT](#) & [get_rng_generator](#) ()
- static void [check_size](#) (const [ImageSizeT](#) &size_)

Check the size argument for the model.

Static Public Attributes

- static const std::string [name](#)
- static const [StringVecT](#) [prior_types](#)
- static const std::string [DefaultPriorType](#) = "Normal"
- static const std::string [DefaultSeperableInitEstimator](#) = "TrustRegion"
- static const double [bounds_epsilon](#) = 1.0E-6
- static const double [global_min_psf_sigma](#) = 1E-1
- static const double [global_max_psf_sigma](#) = 1E2
- static const double [default_beta_pos](#) = 3
- static const double [default_sigma_pos](#) = 1
- static const double [default_mean_l](#) = 300
- static const double [default_max_l](#) = INFINITY
- static const double [default_intensity_kappa](#) = 2
- static const double [default_pixel_mean_bg](#) = 4
- static const double [default_alpha_sigma](#) = 2
- static const [ImageCoordT](#) [num_dim](#) = 1
- static const [ImageCoordT](#) [global_min_size](#) = 3
- static const [ImageCoordT](#) [global_max_size](#) = 512
- static const double [global_default_mcmc_sigma_scale](#) = 0.05
- static const double [global_max_mcmc_sigma_scale](#) = 0.5
- static const std::vector< std::string > [estimator_names](#)

Protected Member Functions

- void [set_mcmc_num_phases](#) (IdxT num_phases)

Protected Attributes

- double [psf_sigma](#)
- CompositeDist [prior](#)
- [IdxT num_params](#)
- [IdxT num_hyperparams](#)
- [ParamT lbound](#)
- [ParamT ubound](#)
- [ImageSizeT size](#)
- double [eta_x](#) =0
- double [eta_l](#) =0
- double [eta_bg](#) =0
- [IdxT num_phases](#)
- double [sigma_scale](#)

9.18.1 Detailed Description

A 1D Gaussian with fixed PSF under an Poisson Read Noise assumption and MAP Objective.

Model: [Gauss1DModel](#) a 1D gaussian PSF with fixed psf_sigma Objective Statistical Noise Model: PoissonNoise1D↔
MAPObjective an MLE objective for Poisson noise ImageFormat: [ImageFormat1DBase](#) - Data format

Definition at line 25 of file Gauss2DsxyMAP.h.

9.18.2 Member Typedef Documentation

9.18.2.1 `using mappel::ImageFormat1DBase::ImageCoordT = uint32_t` `[inherited]`

Image size coordinate storage type

Definition at line 25 of file ImageFormat1DBase.h.

9.18.2.2 `using mappel::ImageFormat1DBase::ImagePixelT = double` `[inherited]`

Image pixel storage type

Definition at line 26 of file ImageFormat1DBase.h.

9.18.2.3 `template<class PixelT > using mappel::ImageFormat1DBase::ImageShapeT = arma::Col<PixelT>`
`[inherited]`

Shape of the data type for a single image

Definition at line 33 of file ImageFormat1DBase.h.

9.18.2.4 `template<class CoordT > using mappel::ImageFormat1DBase::ImageSizeShapeT = CoordT` [inherited]

Shape of the data type to store 1-image's coordinates

Definition at line 28 of file ImageFormat1DBase.h.

9.18.2.5 `using mappel::ImageFormat1DBase::ImageSizeT = ImageSizeShapeT<ImageCoordT>`
[inherited]

Data type for a single image size

Definition at line 30 of file ImageFormat1DBase.h.

9.18.2.6 `template<class CoordT > using mappel::ImageFormat1DBase::ImageSizeVecShapeT = arma::Col<CoordT>`
[inherited]

Shape of the data type to store a vector of image's coordinates

Definition at line 29 of file ImageFormat1DBase.h.

9.18.2.7 `using mappel::ImageFormat1DBase::ImageSizeVecT = ImageSizeVecShapeT<ImageCoordT>`
[inherited]

Data type for a sequence of image sizes

Definition at line 31 of file ImageFormat1DBase.h.

9.18.2.8 `template<class PixelT > using mappel::ImageFormat1DBase::ImageStackShapeT = arma::Mat<PixelT>`
[inherited]

Shape of the data type for a sequence of images

Definition at line 34 of file ImageFormat1DBase.h.

9.18.2.9 `using mappel::ImageFormat1DBase::ImageStackT = ImageStackShapeT<ImagePixelT>`
[inherited]

Data type to represent a sequence of images

Definition at line 36 of file ImageFormat1DBase.h.

9.18.2.10 `using mappel::ImageFormat1DBase::ImageT = ImageShapeT<ImagePixelT>` [inherited]

Data type to represent single image

Definition at line 35 of file ImageFormat1DBase.h.

9.18.2.11 **using mappel::PoissonNoise1DObjective::ModelDataStackT = ImageStackT** [inherited]

Objective function data stack type: 1D double precision image stack, of images gain-corrected to approximate photons counts

Definition at line 26 of file PoissonNoise1DObjective.h.

9.18.2.12 **using mappel::PoissonNoise1DObjective::ModelDataT = ImageT** [inherited]

Objective function data type: 1D double precision image, gain-corrected to approximate photons counts

Definition at line 25 of file PoissonNoise1DObjective.h.

9.18.2.13 **using mappel::PointEmitterModel::ParamT = arma::vec** [inherited]

Parameter vector

Definition at line 47 of file PointEmitterModel.h.

9.18.2.14 **using mappel::PointEmitterModel::ParamVecT = arma::mat** [inherited]

Vector of parameter vectors

Definition at line 48 of file PointEmitterModel.h.

9.18.2.15 **using mappel::Gauss1DModel::StencilVecT = std::vector<Stencil>** [inherited]

Definition at line 49 of file Gauss1DModel.h.

9.18.3 Constructor & Destructor Documentation

9.18.3.1 **mappel::Gauss2DskyMAP::Gauss2DskyMAP (const ImageSizeT & size, const VecT & min_sigma, const VecT & max_sigma)**

9.18.3.2 **mappel::Gauss2DskyMAP::Gauss2DskyMAP (const ImageSizeT & size, const VecT & min_sigma, const VecT & max_sigma, CompositeDist && prior)**

9.18.4 Member Function Documentation

9.18.4.1 **void mappel::PointEmitterModel::bound_theta (ParamT & theta, double epsilon = bounds_epsilon) const**
[inherited]

Definition at line 248 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::check_param_shape(), mappel::PointEmitterModel::lbound, mappel::PointEmitterModel::num_params, and mappel::PointEmitterModel::ubound.

9.18.4.2 `PointEmitterModel::ParamT mappel::PointEmitterModel::bounded_theta (const ParamT & theta, double epsilon = bounds_epsilon) const` [inherited]

Definition at line 265 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::PointEmitterModel::bounded_theta_stack()`.

9.18.4.3 `PointEmitterModel::ParamVecT mappel::PointEmitterModel::bounded_theta_stack (const ParamVecT & theta, double epsilon = bounds_epsilon) const` [inherited]

Definition at line 306 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::bounded_theta()`, `mappel::PointEmitterModel::check_param_shape()`, and `mappel::PointEmitterModel::make_param_stack()`.

9.18.4.4 `void ImageFormat1DBase::check_image_shape (const ImageT & im) const` [inherited]

Check the shape of a single images is correct for model size.

Definition at line 59 of file ImageFormat1DBase.cpp.

References `mappel::ImageFormat1DBase::size`.

9.18.4.5 `void ImageFormat1DBase::check_image_shape (const ImageStackT & ims) const` [inherited]

Check the shape of a stack of images is correct for model size.

Definition at line 71 of file ImageFormat1DBase.cpp.

References `mappel::ImageFormat1DBase::size`.

9.18.4.6 `void mappel::PointEmitterModel::check_param_shape (const ParamT & theta) const` [inherited]

Definition at line 167 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::num_params`.

Referenced by `mappel::PointEmitterModel::bound_theta()`, `mappel::PointEmitterModel::bounded_theta()`, `mappel::PointEmitterModel::bounded_theta_stack()`, `mappel::PointEmitterModel::reflected_theta()`, `mappel::PointEmitterModel::reflected_theta_stack()`, `mappel::PointEmitterModel::theta_in_bounds()`, and `mappel::PointEmitterModel::theta_stack_in_bounds()`.

9.18.4.7 `void mappel::PointEmitterModel::check_param_shape (const ParamVecT & theta) const` [inherited]

Definition at line 176 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::num_params`.

9.18.4.8 `void mappel::PointEmitterModel::check_psf_sigma (double psf_sigma) const` `[inherited]`

Definition at line 185 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::global_max_psf_sigma`, and `mappel::PointEmitterModel::global_min_psf_sigma`.

Referenced by `mappel::Gauss1DModel::Gauss1DModel()`, `mappel::Gauss2DModel::Gauss2DModel()`, `mappel::Gauss2DsModel::Gauss2DsModel()`, `mappel::Gauss1DsModel::set_max_sigma()`, `mappel::Gauss2DsModel::set_max_sigma()`, `mappel::Gauss1DsModel::set_min_sigma()`, `mappel::Gauss2DsModel::set_min_sigma()`, `mappel::Gauss1DModel::set_psf_sigma()`, and `mappel::Gauss2DModel::set_psf_sigma()`.

9.18.4.9 `void mappel::PointEmitterModel::check_psf_sigma (const VecT & psf_sigma) const` `[inherited]`

Definition at line 197 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::global_max_psf_sigma`, and `mappel::PointEmitterModel::global_min_psf_sigma`.

9.18.4.10 `void ImageFormat1DBase::check_size (const ImageSizeT & size)` `[static]`, `[inherited]`

Check the size argument for the model.

Definition at line 39 of file ImageFormat1DBase.cpp.

References `mappel::ImageFormat1DBase::global_max_size`, and `mappel::ImageFormat1DBase::global_min_size`.

Referenced by `mappel::ImageFormat1DBase::ImageFormat1DBase()`, and `mappel::ImageFormat1DBase::set_size()`.

9.18.4.11 `int mappel::PointEmitterModel::get_hyperparam_index (const std::string & name) const` `[inline]`, `[inherited]`

Definition at line 236 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.18.4.12 `StringVecT mappel::PointEmitterModel::get_hyperparam_names () const` `[inline]`, `[inherited]`

Definition at line 256 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.18.4.13 `double mappel::PointEmitterModel::get_hyperparam_value (const std::string & name) const` `[inline]`, `[inherited]`

Definition at line 232 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

Referenced by `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`, and `mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling()`.

9.18.4.14 **PointEmitterModel::ParamT** mappel::PointEmitterModel::get_hyperparams () const [inline],
[inherited]

Definition at line 224 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.18.4.15 **ImageFormat1DBase::ImageT** ImageFormat1DBase::get_image_from_stack (const ImageStackT & stack,
ImageCoordT n) const [inline], [inherited]

Definition at line 108 of file ImageFormat1DBase.h.

9.18.4.16 **const PointEmitterModel::ParamT &** mappel::PointEmitterModel::get_lbound () const [inline],
[inherited]

Definition at line 212 of file PointEmitterModel.h.

References mappel::PointEmitterModel::lbound.

Referenced by mappel::MCMCAdaptor1D::MCMCAdaptor1D(), mappel::MCMCAdaptor2D::MCMCAdaptor2D(), and mappel::MCMCAdaptor1D::set_background_mcmc_sampling().

9.18.4.17 **IdxT** mappel::MCMCAdaptorBase::get_mcmc_num_phases () const [inherited]

Definition at line 56 of file MCMCAdaptorBase.cpp.

References mappel::MCMCAdaptorBase::num_phases.

9.18.4.18 **double** mappel::MCMCAdaptorBase::get_mcmc_sigma_scale () const [inherited]

Definition at line 53 of file MCMCAdaptorBase.cpp.

References mappel::MCMCAdaptorBase::sigma_scale.

9.18.4.19 **IdxT** mappel::PointEmitterModel::get_num_hyperparams () const [inline], [inherited]

Definition at line 208 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_hyperparams.

9.18.4.20 **IdxT** mappel::PointEmitterModel::get_num_params () const [inline], [inherited]

Definition at line 160 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.18.4.21 ImageFormat1DBase::ImageCoordT ImageFormat1DBase::get_num_pixels () const [inline], [inherited]

Definition at line 82 of file ImageFormat1DBase.h.

References mappel::ImageFormat1DBase::size.

Referenced by mappel::ImageFormat1DBase::get_stats().

9.18.4.22 StringVecT mappel::PointEmitterModel::get_param_names () const [inline], [inherited]

Definition at line 248 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.18.4.23 CompositeDist & mappel::PointEmitterModel::get_prior () [inline], [inherited]

Definition at line 200 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

Referenced by mappel::Gauss2DModel::update_internal_1Dsum_estimators(), and mappel::Gauss2DsModel::update_internal_1Dsum_estimators().

9.18.4.24 const CompositeDist & mappel::PointEmitterModel::get_prior () const [inline], [inherited]

Definition at line 204 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.18.4.25 double mappel::Gauss1DModel::get_psf_sigma () const [inline], [inherited]

Definition at line 127 of file Gauss1DModel.h.

References mappel::Gauss1DModel::psf_sigma.

Referenced by mappel::Gauss1DModel::get_stats().

9.18.4.26 double mappel::Gauss1DModel::get_psf_sigma (IdxT idx) const [inherited]

Definition at line 131 of file Gauss1DModel.cpp.

References mappel::Gauss1DModel::psf_sigma.

9.18.4.27 ParallelRngGeneratorT & mappel::PointEmitterModel::get_rng_generator () [static], [inherited]

Definition at line 120 of file PointEmitterModel.cpp.

References mappel::rng_manager.

9.18.4.28 ParallelRngManagerT & mappel::PointEmitterModel::get_rng_manager () [static],[inherited]

Definition at line 115 of file PointEmitterModel.cpp.

References mappel::rng_manager.

9.18.4.29 ImageFormat1DBase::ImageSizeT ImageFormat1DBase::get_size () const [inline],[inherited]

Definition at line 71 of file ImageFormat1DBase.h.

References mappel::ImageFormat1DBase::size.

Referenced by mappel::ImageFormat1DBase::get_stats().

9.18.4.30 ImageFormat1DBase::ImageCoordT ImageFormat1DBase::get_size (IdxT idx) const [inherited]

Definition at line 20 of file ImageFormat1DBase.cpp.

References mappel::ImageFormat1DBase::size.

9.18.4.31 ImageFormat1DBase::ImageCoordT ImageFormat1DBase::get_size_image_stack (const ImageStackT & stack) const [inline],[inherited]

Definition at line 101 of file ImageFormat1DBase.h.

9.18.4.32 StatsT mappel::Gauss1DModel::get_stats () const [inherited]

Definition at line 178 of file Gauss1DModel.cpp.

References mappel::Gauss1DModel::get_psf_sigma(), mappel::MCMCAdaptor1D::get_stats(), mappel::ImageFormat1DBase::get_stats(), and mappel::PointEmitterModel::get_stats().

9.18.4.33 const PointEmitterModel::ParamT & mappel::PointEmitterModel::get_ubound () const [inline],[inherited]

Definition at line 216 of file PointEmitterModel.h.

References mappel::PointEmitterModel::ubound.

Referenced by mappel::Gauss2DsxyModel::get_max_sigma_ratio(), mappel::Gauss2DsModel::get_max_sigma_ratio(), mappel::MCMCAdaptor1D::MCMCAdaptor1D(), mappel::MCMCAdaptor2D::MCMCAdaptor2D(), mappel::MCMCAdaptor1D::set_background_mcmc_sampling(), and mappel::Gauss2DsModel::set_max_sigma_ratio().

9.18.4.34 bool mappel::PointEmitterModel::has_hyperparam (const std::string & name) const [inline],[inherited]

Definition at line 228 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.18.4.35 Gauss1DModel::Stencil mappel::Gauss1DModel::initial_theta_estimate (const ImageT & *im*) const [inline], [inherited]

Fast, heuristic estimate of initial theta.

Definition at line 169 of file Gauss1DModel.h.

References mappel::PointEmitterModel::make_param(), and mappel::Gauss1DModel::Stencil::theta.

9.18.4.36 Gauss1DModel::Stencil mappel::Gauss1DModel::initial_theta_estimate (const ImageT & *im*, const ParamT & *theta_init*) const [inherited]

Definition at line 207 of file Gauss1DModel.cpp.

References mappel::Gauss1DModel::Stencil::bg(), mappel::Gauss1DModel::Stencil::l(), mappel::Gauss1DModel::make_stencil(), mappel::PointEmitterModel::num_params, and mappel::ImageFormat1DBase::size.

9.18.4.37 CompositeDist mappel::Gauss1DModel::make_default_prior (IdxT *size*, const std::string & *prior_type*) [static], [inherited]

Definition at line 59 of file Gauss1DModel.cpp.

References mappel::istarts_with(), mappel::Gauss1DModel::make_default_prior_beta_position(), and mappel::Gauss1DModel::make_default_prior_normal_position().

9.18.4.38 CompositeDist mappel::Gauss1DModel::make_default_prior_beta_position (IdxT *size*) [static], [inherited]

Definition at line 80 of file Gauss1DModel.cpp.

References mappel::PointEmitterModel::default_pixel_mean_bg, mappel::PointEmitterModel::make_prior_component_intensity(), and mappel::PointEmitterModel::make_prior_component_position_beta().

Referenced by mappel::Gauss1DModel::make_default_prior().

9.18.4.39 CompositeDist mappel::Gauss1DModel::make_default_prior_normal_position (IdxT *size*) [static], [inherited]

Definition at line 90 of file Gauss1DModel.cpp.

References mappel::PointEmitterModel::default_pixel_mean_bg, mappel::PointEmitterModel::make_prior_component_intensity(), and mappel::PointEmitterModel::make_prior_component_position_normal().

Referenced by mappel::Gauss1DModel::make_default_prior().

9.18.4.40 ImageFormat1DBase::ImageT ImageFormat1DBase::make_image () const [inline], [inherited]

Definition at line 87 of file ImageFormat1DBase.h.

References mappel::ImageFormat1DBase::size.

9.18.4.41 ImageFormat1DBase::ImageStackT ImageFormat1DBase::make_image_stack (ImageCoordT *n*) const
 [inline],[inherited]

Definition at line 94 of file ImageFormat1DBase.h.

References mappel::ImageFormat1DBase::size.

9.18.4.42 PointEmitterModel::ParamT mappel::PointEmitterModel::make_param () const [inline],[inherited]

Definition at line 164 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

Referenced by mappel::Gauss1DModel::initial_theta_estimate(), mappel::Gauss1DsModel::initial_theta_estimate(), mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsxyModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::Gauss1DModel::pixel_hess_update(), mappel::Gauss1DsModel::pixel_hess_update(), mappel::Gauss2DModel::pixel_hess_update(), and mappel::Gauss2DsModel::pixel_hess_update().

9.18.4.43 template<class FillT > PointEmitterModel::ParamT mappel::PointEmitterModel::make_param (FillT *fill*) const
 [inherited]

Definition at line 181 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.18.4.44 MatT mappel::PointEmitterModel::make_param_mat () const [inline],[inherited]

Definition at line 172 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.18.4.45 template<class FillT > MatT mappel::PointEmitterModel::make_param_mat (FillT *fill*) const [inherited]

Definition at line 191 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.18.4.46 CubeT mappel::PointEmitterModel::make_param_mat_stack (IdxT *n*) const [inline],[inherited]

Definition at line 176 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.18.4.47 template<class FillT > CubeT mappel::PointEmitterModel::make_param_mat_stack (IdxT *n*, FillT *fill*) const
 [inherited]

Definition at line 196 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.18.4.48 `PointEmitterModel::ParamVecT mappel::PointEmitterModel::make_param_stack (IdxT n) const [inline], [inherited]`

Definition at line 168 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::num_params`.

Referenced by `mappel::PointEmitterModel::bounded_theta_stack()`, and `mappel::PointEmitterModel::reflected_theta_stack()`.

9.18.4.49 `template<class FillT > PointEmitterModel::ParamVecT mappel::PointEmitterModel::make_param_stack (IdxT n, FillT fill) const [inherited]`

Definition at line 186 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::num_params`.

9.18.4.50 `CompositeDist mappel::Gauss1DModel::make_prior_beta_position (IdxT size, double beta_xpos, double mean_l, double kappa_l, double mean_bg, double kappa_bg) [static], [inherited]`

Definition at line 101 of file Gauss1DModel.cpp.

References `mappel::PointEmitterModel::make_prior_component_intensity()`, and `mappel::PointEmitterModel::make_prior_component_position_beta()`.

Referenced by `mappel::Gauss2DModel::make_internal_1Dsum_estimator()`.

9.18.4.51 `prior_hessian::TruncatedGammaDist mappel::PointEmitterModel::make_prior_component_intensity (double mean = default_mean_l, double kappa = default_intensity_kappa) [static], [inherited]`

Definition at line 98 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::default_max_l`.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_beta_position()`, `mappel::Gauss1DModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_normal_position()`, `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss1DModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_prior_beta_position()`, `mappel::Gauss1DsModel::make_prior_beta_position()`, `mappel::Gauss1DModel::make_prior_beta_position()`, `mappel::Gauss2DsModel::make_prior_beta_position()`, `mappel::Gauss2DModel::make_prior_normal_position()`, `mappel::Gauss1DsModel::make_prior_normal_position()`, `mappel::Gauss1DModel::make_prior_normal_position()`, and `mappel::Gauss2DsModel::make_prior_normal_position()`.

9.18.4.52 `prior_hessian::ScaledSymmetricBetaDist mappel::PointEmitterModel::make_prior_component_position_beta (IdxT size, double pos_beta = default_beta_pos) [static], [inherited]`

Definition at line 92 of file PointEmitterModel.cpp.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_beta_position()`, `mappel::Gauss1DModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss1DsModel::make_prior_beta_position()`, `mappel::Gauss2DsModel::make_prior_beta_position()`, and `mappel::Gauss2DsModel::make_prior_beta_position()`.

9.18.4.53 **prior_hessian::TruncatedNormalDist** mappel::PointEmitterModel::make_prior_component_position_normal (*IdxT size*, *double pos_sigma = default_sigma_pos*) [static],[inherited]

Definition at line 85 of file PointEmitterModel.cpp.

Referenced by mappel::Gauss1DsModel::make_default_prior_normal_position(), mappel::Gauss2DModel::make_default_prior_normal_position(), mappel::Gauss1DModel::make_default_prior_normal_position(), mappel::Gauss2DsModel::make_default_prior_normal_position(), mappel::Gauss1DsModel::make_prior_normal_position(), mappel::Gauss1DModel::make_prior_normal_position(), and mappel::Gauss2DsModel::make_prior_normal_position().

9.18.4.54 **prior_hessian::TruncatedParetoDist** mappel::PointEmitterModel::make_prior_component_sigma (*double min_sigma*, *double max_sigma*, *double alpha = default_alpha_sigma*) [static],[inherited]

Definition at line 104 of file PointEmitterModel.cpp.

Referenced by mappel::Gauss1DsModel::make_default_prior_beta_position(), mappel::Gauss2DsModel::make_default_prior_beta_position(), mappel::Gauss1DsModel::make_default_prior_normal_position(), mappel::Gauss2DsModel::make_default_prior_normal_position(), mappel::Gauss1DsModel::make_prior_beta_position(), mappel::Gauss2DsModel::make_prior_beta_position(), mappel::Gauss1DsModel::make_prior_normal_position(), and mappel::Gauss2DsModel::make_prior_normal_position().

9.18.4.55 **CompositeDist** mappel::Gauss1DModel::make_prior_normal_position (*IdxT size*, *double sigma_xpos*, *double mean_l*, *double kappa_l*, *double mean_bg*, *double kappa_bg*) [static],[inherited]

Definition at line 114 of file Gauss1DModel.cpp.

References mappel::PointEmitterModel::make_prior_component_intensity(), and mappel::PointEmitterModel::make_prior_component_position_normal().

Referenced by mappel::Gauss2DModel::make_internal_1Dsum_estimator().

9.18.4.56 **Gauss1DModel::Stencil** mappel::Gauss1DModel::make_stencil (*const ParamT & theta*, *bool compute_derivatives = true*) **const** [inline],[inherited]

Make a new Model::Stencil object at theta.

Stencils store all of the important calculations necessary for evaluating the log-likelihood and its derivatives at a particular theta (parameter) value.

This allows re-use of the most expensive computations. Stencils can be easily passed around by reference, and most functions in the [mappel::methods](#) namespace accept a [const Stencil](#) reference in place of the model parameter.

Throws [mappel::ModelBoundsError](#) if not model.theta_in_bounds(theta).

If derivatives will not be computed with this stencil set compute_derivatives=false

Parameters

<i>theta</i>	Parameter to evaluate at
<i>compute_derivatives</i>	True to also prepare for derivative computations

Returns

A new [Stencil](#) object ready to compute with

Definition at line 116 of file Gauss1DModel.h.

References `mappel::Gauss1DModel::Stencil::Stencil()`, and `mappel::PointEmitterModel::theta_in_bounds()`.

Referenced by `mappel::Gauss1DModel::initial_theta_estimate()`.

```
9.18.4.57 void mappel::Gauss1DModel::pixel_grad ( IdxT i, const Stencil & s, ParamT & pgrad ) const [inline],
[inherited]
```

Definition at line 141 of file Gauss1DModel.h.

References `mappel::Gauss1DModel::Stencil::DX`, `mappel::Gauss1DModel::Stencil::l()`, and `mappel::Gauss1DModel::Stencil::X`.

Referenced by `mappel::Gauss1DModel::pixel_hess_update()`.

```
9.18.4.58 void mappel::Gauss1DModel::pixel_grad2 ( IdxT i, const Stencil & s, ParamT & pgrad2 ) const [inline],
[inherited]
```

Definition at line 150 of file Gauss1DModel.h.

References `mappel::Gauss1DModel::Stencil::DXS`, `mappel::Gauss1DModel::Stencil::l()`, and `mappel::Gauss1DModel::psf_sigma`.

```
9.18.4.59 void mappel::Gauss1DModel::pixel_hess ( IdxT i, const Stencil & s, MatT & hess ) const [inline],
[inherited]
```

Definition at line 159 of file Gauss1DModel.h.

References `mappel::Gauss1DModel::Stencil::DX`, `mappel::Gauss1DModel::Stencil::DXS`, `mappel::Gauss1DModel::Stencil::l()`, and `mappel::Gauss1DModel::psf_sigma`.

```
9.18.4.60 void mappel::Gauss1DModel::pixel_hess_update ( IdxT i, const Stencil & s, double dm_ratio_m1, double dmm_ratio,
ParamT & grad, MatT & hess ) const [inherited]
```

pixel derivative inner loop calculations.

Definition at line 191 of file Gauss1DModel.cpp.

References `mappel::Gauss1DModel::Stencil::DXS`, `mappel::Gauss1DModel::Stencil::l()`, `mappel::PointEmitterModel::make_param()`, `mappel::Gauss1DModel::pixel_grad()`, and `mappel::Gauss1DModel::psf_sigma`.

```
9.18.4.61 double mappel::Gauss1DModel::pixel_model_value ( IdxT i, const Stencil & s ) const [inline],
[inherited]
```

Definition at line 135 of file Gauss1DModel.h.

References `mappel::Gauss1DModel::Stencil::bg()`, `mappel::Gauss1DModel::Stencil::l()`, and `mappel::Gauss1DModel::Stencil::X`.

9.18.4.62 `PointEmitterModel::ParamT mappel::PointEmitterModel::reflected_theta (const ParamT & theta) const`
`[inherited]`

Definition at line 276 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::PointEmitterModel::reflected_theta_stack()`.

9.18.4.63 `PointEmitterModel::ParamVecT mappel::PointEmitterModel::reflected_theta_stack (const ParamVecT & theta) const`
`[inherited]`

Definition at line 316 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::make_param_stack()`, and `mappel::PointEmitterModel::reflected_theta()`.

9.18.4.64 `void mappel::PointEmitterModel::rename_hyperparam (const std::string & old_name, const std::string & new_name)`
`[inline], [inherited]`

Definition at line 244 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.18.4.65 `void mappel::MCMCAdaptor1D::sample_mcmc_candidate (IdxT sample_index, ParamT & candidate, double step_scale = 1.0) const`
`[inherited]`

Definition at line 108 of file MCMCAdaptor1D.cpp.

References `mappel::MCMCAdaptor1D::eta_bg`, `mappel::MCMCAdaptor1D::eta_l`, `mappel::MCMCAdaptor1D::eta_x`, `mappel::MCMCAdaptorBase::num_phases`, and `mappel::rng_manager`.

9.18.4.66 `void mappel::MCMCAdaptor1D::sample_mcmc_candidate (IdxT sample_index, ParamT & candidate, const IdxVecT & fixed_parameters_mask, double step_scale = 1.0) const`
`[inherited]`

Definition at line 122 of file MCMCAdaptor1D.cpp.

References `mappel::MCMCAdaptor1D::eta_bg`, `mappel::MCMCAdaptor1D::eta_l`, `mappel::MCMCAdaptor1D::eta_x`, `mappel::MCMCAdaptorBase::num_phases`, and `mappel::rng_manager`.

9.18.4.67 `template<class RngT> PointEmitterModel::ParamT mappel::PointEmitterModel::sample_prior (RngT & rng) const`
`[inherited]`

Definition at line 264 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.18.4.68 `PointEmitterModel::ParamT mappel::PointEmitterModel::sample_prior () const` `[inline],[inherited]`

Definition at line 268 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`, and `mappel::rng_manager`.

9.18.4.69 `void mappel::MCMCAdaptor1D::set_background_mcmc_sampling (double eta_bg = -1)` `[inherited]`

Definition at line 81 of file `MCMCAdaptor1D.cpp`.

References `mappel::PointEmitterModel::default_pixel_mean_bg`, `mappel::MCMCAdaptor1D::eta_bg`, `mappel::PointEmitterModel::get_hyperparam_value()`, `mappel::PointEmitterModel::get_lbound()`, `mappel::PointEmitterModel::get_ubound()`, and `mappel::MCMCAdaptorBase::sigma_scale`.

Referenced by `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`.

9.18.4.70 `void mappel::PointEmitterModel::set_bounds (const ParamT & lbound_, const ParamT & ubound_)` `[inherited]`

Box-type parameter bounds

Modifies the prior bounds to prevent sampling outside the valid box-constraints.

Definition at line 213 of file `PointEmitterModel.cpp`.

References `mappel::PointEmitterModel::bounds_epsilon`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

9.18.4.71 `void mappel::PointEmitterModel::set_hyperparam_names (const StringVecT & desc)` `[inline],[inherited]`

Definition at line 260 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

9.18.4.72 `void mappel::PointEmitterModel::set_hyperparam_value (const std::string & name, double value)` `[inline],[inherited]`

Definition at line 240 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

9.18.4.73 `void mappel::PointEmitterModel::set_hyperparams (const VecT & hyperparams)` `[inline],[inherited]`

Definition at line 220 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

Referenced by `mappel::Gauss2DModel::set_hyperparams()`, and `mappel::Gauss2DsModel::set_hyperparams()`.

9.18.4.74 `template<class ImT > void ImageFormat1DBase::set_image_in_stack (ImageStackT & stack, ImageCoordT n, const ImT & im) const` [inherited]

Definition at line 115 of file ImageFormat1DBase.h.

9.18.4.75 `void mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling (double eta_I = -1)` [inherited]

Definition at line 65 of file MCMCAdaptor1D.cpp.

References `mappel::PointEmitterModel::default_mean_I`, `mappel::MCMCAdaptor1D::eta_I`, `mappel::PointEmitterModel::get_hyperparam_value()`, and `mappel::MCMCAdaptorBase::sigma_scale`.

Referenced by `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`.

9.18.4.76 `void mappel::PointEmitterModel::set_lbound (const ParamT & lbound)` [inherited]

Definition at line 226 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::bounds_epsilon`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::Gauss1DsModel::set_min_sigma()`.

9.18.4.77 `void mappel::MCMCAdaptorBase::set_mcmc_num_phases (IdxT num_phases)` [protected],[inherited]

Definition at line 59 of file MCMCAdaptorBase.cpp.

References `mappel::MCMCAdaptorBase::num_phases`.

Referenced by `mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds()`, and `mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds()`.

9.18.4.78 `void mappel::MCMCAdaptorBase::set_mcmc_sigma_scale (double scale)` [inherited]

Definition at line 39 of file MCMCAdaptorBase.cpp.

References `mappel::MCMCAdaptorBase::global_max_mcmc_sigma_scale`, and `mappel::MCMCAdaptorBase::sigma_scale`.

9.18.4.79 `void mappel::PointEmitterModel::set_param_names (const StringVecT & desc)` [inline],[inherited]

Definition at line 252 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.18.4.80 `void mappel::PointEmitterModel::set_prior (CompositeDist && prior_)` [inherited]

Definition at line 158 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_hyperparams`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::Gauss2DModel::set_prior()`, and `mappel::Gauss2DsModel::set_prior()`.

9.18.4.81 `void mappel::PointEmitterModel::set_prior (const CompositeDist & prior_)` `[inherited]`

Definition at line 149 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_hyperparams`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

9.18.4.82 `void mappel::Gauss1DModel::set_psf_sigma (double new_psf_sigma)` `[inherited]`

Definition at line 125 of file Gauss1DModel.cpp.

References `mappel::PointEmitterModel::check_psf_sigma()`, and `mappel::Gauss1DModel::psf_sigma`.

Referenced by `mappel::Gauss1DModel::set_psf_sigma()`, and `mappel::Gauss2DModel::set_psf_sigma()`.

9.18.4.83 `void mappel::Gauss1DModel::set_psf_sigma (const VecT & new_psf_sigma)` `[inline],[inherited]`

Definition at line 131 of file Gauss1DModel.h.

References `mappel::Gauss1DModel::set_psf_sigma()`.

9.18.4.84 `void mappel::PointEmitterModel::set_rng_seed (RngSeedT seed)` `[static],[inherited]`

Definition at line 110 of file PointEmitterModel.cpp.

References `mappel::rng_manager`.

9.18.4.85 `void ImageFormat1DBase::set_size (const ImageSizeT & size_)` `[inherited]`

Definition at line 30 of file ImageFormat1DBase.cpp.

References `mappel::ImageFormat1DBase::check_size()`, and `mappel::ImageFormat1DBase::size`.

Referenced by `mappel::ImageFormat1DBase::set_size()`, `mappel::Gauss2DModel::set_size()`, and `mappel::Gauss2DsModel::set_size()`.

9.18.4.86 `void ImageFormat1DBase::set_size (const arma::Col< ImageCoordT > & sz)` `[inline],[inherited]`

Definition at line 75 of file ImageFormat1DBase.h.

References `mappel::ImageFormat1DBase::set_size()`.

9.18.4.87 `void mappel::PointEmitterModel::set_ubound (const ParamT & ubound)` `[inherited]`

Definition at line 237 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::bounds_epsilon`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::Gauss1DsModel::set_max_sigma()`, and `mappel::Gauss2DsModel::set_max_sigma_ratio()`.

9.18.4.88 `bool mappel::PointEmitterModel::theta_in_bounds (const ParamT & theta) const` [inherited]

Definition at line 257 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsModel::initial_theta_estimate()`, `mappel::Gauss1DModel::make_stencil()`, `mappel::Gauss1DsModel::make_stencil()`, `mappel::Gauss2DModel::make_stencil()`, `mappel::Gauss2DsxyModel::make_stencil()`, `mappel::Gauss2DsModel::make_stencil()`, and `mappel::PointEmitterModel::theta_stack_in_bounds()`.

9.18.4.89 `BoolVecT mappel::PointEmitterModel::theta_stack_in_bounds (const ParamVecT & theta) const` [inherited]

Definition at line 296 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, and `mappel::PointEmitterModel::theta_in_bounds()`.

9.18.5 Member Data Documentation

9.18.5.1 `const double mappel::PointEmitterModel::bounds_epsilon = 1.0E-6` [static], [inherited]

Distance from the boundary to constrain in `bound_theta` and `bounded_theta` methods

Definition at line 52 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::Gauss2DsModel::set_max_sigma_ratio()`, and `mappel::PointEmitterModel::set_ubound()`.

9.18.5.2 `const double mappel::PointEmitterModel::default_alpha_sigma = 2` [static], [inherited]

Default per-pixel background gamma distribution shape

Definition at line 62 of file PointEmitterModel.h.

9.18.5.3 `const double mappel::PointEmitterModel::default_beta_pos = 3` [static], [inherited]

Default position parameter in symmetric beta-distributions

Definition at line 56 of file PointEmitterModel.h.

9.18.5.4 `const double mappel::PointEmitterModel::default_intensity_kappa = 2` [static], [inherited]

Default shape for intensity gamma distributions

Definition at line 60 of file PointEmitterModel.h.

9.18.5.5 `const double mappel::PointEmitterModel::default_max_l = INFINITY` `[static], [inherited]`

Default maximum emitter intensity

Definition at line 59 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::make_prior_component_intensity()`.

9.18.5.6 `const double mappel::PointEmitterModel::default_mean_l = 300` `[static], [inherited]`

Default emitter intensity mean

Definition at line 58 of file PointEmitterModel.h.

Referenced by `mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling()`.

9.18.5.7 `const double mappel::PointEmitterModel::default_pixel_mean_bg = 4` `[static], [inherited]`

Default per-pixel mean background counts

Definition at line 61 of file PointEmitterModel.h.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_beta_position()`, `mappel::Gauss1DModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_default_prior_normal_position()`, `mappel::Gauss1DModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, and `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`.

9.18.5.8 `const double mappel::PointEmitterModel::default_sigma_pos = 1` `[static], [inherited]`

Default position parameter in symmetric beta-distributions

Definition at line 57 of file PointEmitterModel.h.

9.18.5.9 `const std::string mappel::Gauss1DModel::DefaultPriorType = "Normal"` `[static], [inherited]`

Definition at line 53 of file Gauss1DModel.h.

Referenced by `mappel::Gauss1DModel::operator=()`.

9.18.5.10 `const std::string mappel::PointEmitterModel::DefaultSeperableInitEstimator = "TrustRegion"` `[static], [inherited]`

Estimator name to use in 1D separable initializations

Definition at line 49 of file PointEmitterModel.h.

Referenced by `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsxyModel::initial_theta_estimate()`, and `mappel::Gauss2DsModel::initial_theta_estimate()`.

9.18.5.11 `const std::vector< std::string > mappel::PoissonNoise1DObjective::estimator_names` `[static], [inherited]`

Definition at line 24 of file PoissonNoise1DObjective.h.

9.18.5.12 `double mappel::MCMCAdaptor1D::eta_bg = 0` `[protected], [inherited]`

The standard deviation for the normally distributed perturbation to `theta_bg` in the random walk MCMC sampling

Definition at line 33 of file MCMCAdaptor1D.h.

Referenced by `mappel::MCMCAdaptor1D::get_stats()`, `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor1D::operator=()`, `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`, and `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`.

9.18.5.13 `double mappel::MCMCAdaptor1D::eta_I = 0` `[protected], [inherited]`

The standard deviation for the normally distributed perturbation to `theta_I` in the random walk MCMC sampling

Definition at line 32 of file MCMCAdaptor1D.h.

Referenced by `mappel::MCMCAdaptor1D::get_stats()`, `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor1D::operator=()`, `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`, and `mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling()`.

9.18.5.14 `double mappel::MCMCAdaptor1D::eta_x = 0` `[protected], [inherited]`

The standard deviation for the normally distributed perturbation to `theta_x` in the random walk MCMC sampling

Definition at line 31 of file MCMCAdaptor1D.h.

Referenced by `mappel::MCMCAdaptor1D::get_stats()`, `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor1D::operator=()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, and `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`.

9.18.5.15 `const double mappel::MCMCAdaptorBase::global_default_mcmc_sigma_scale = 0.05` `[static], [inherited]`

Definition at line 16 of file MCMCAdaptorBase.h.

Referenced by `mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds()`, `mappel::MCMCAdaptor2D::MCMCAdaptor2D()`, and `mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds()`.

9.18.5.16 `const double mappel::MCMCAdaptorBase::global_max_mcmc_sigma_scale = 0.5` `[static], [inherited]`

Definition at line 17 of file MCMCAdaptorBase.h.

Referenced by `mappel::MCMCAdaptorBase::MCMCAdaptorBase()`, and `mappel::MCMCAdaptorBase::set_mcmc_sigma_scale()`.

9.18.5.17 `const double mappel::PointEmitterModel::global_max_psf_sigma = 1E2` `[static], [inherited]`

Global maximum for any `psf_sigma`. Sizes above this value are invalid, and nowhere near useful for practical point emitter localization

Definition at line 54 of file `PointEmitterModel.h`.

Referenced by `mappel::PointEmitterModel::check_psf_sigma()`.

9.18.5.18 `const ImageFormat1DBase::ImageCoordT ImageFormat1DBase::global_max_size = 512` `[static], [inherited]`

Maximum size along any dimension of the image. This is insanely big to catch obvious errors

Definition at line 40 of file `ImageFormat1DBase.h`.

Referenced by `mappel::ImageFormat1DBase::check_size()`.

9.18.5.19 `const double mappel::PointEmitterModel::global_min_psf_sigma = 1E-1` `[static], [inherited]`

Global minimum for any `psf_sigma`. Sizes below this value are invalid, and nowhere near useful for practical point emitter localization

Definition at line 53 of file `PointEmitterModel.h`.

Referenced by `mappel::PointEmitterModel::check_psf_sigma()`.

9.18.5.20 `const ImageFormat1DBase::ImageCoordT ImageFormat1DBase::global_min_size = 3` `[static], [inherited]`

Minimum size along any dimension of the image.

Definition at line 39 of file `ImageFormat1DBase.h`.

Referenced by `mappel::ImageFormat1DBase::check_size()`.

9.18.5.21 `ParamT mappel::PointEmitterModel::lbound` `[protected], [inherited]`

Definition at line 148 of file `PointEmitterModel.h`.

Referenced by `mappel::PointEmitterModel::bound_theta()`, `mappel::PointEmitterModel::bounded_theta()`, `mappel::PointEmitterModel::get_lbound()`, `mappel::PointEmitterModel::get_stats()`, `mappel::Gauss1DsModel::initial_theta_estimate()`, `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsModel::initial_theta_estimate()`, `mappel::PointEmitterModel::operator=()`, `mappel::PointEmitterModel::reflected_theta()`, `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::PointEmitterModel::set_prior()`, `mappel::PointEmitterModel::set_ubound()`, and `mappel::PointEmitterModel::theta_in_bounds()`.

9.18.5.22 `const std::string mappel::Gauss2DsxyMAP::name` `[static]`

Definition at line 30 of file `Gauss2DsxyMAP.h`.

9.18.5.23 `const ImageFormat1DBase::ImageCoordT ImageFormat1DBase::num_dim = 1` `[static]`, `[inherited]`

Number of image dimensions.

Definition at line 38 of file ImageFormat1DBase.h.

Referenced by mappel::ImageFormat1DBase::get_stats().

9.18.5.24 `IdxT mappel::PointEmitterModel::num_hyperparams` `[protected]`, `[inherited]`

Definition at line 147 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::get_num_hyperparams(), mappel::PointEmitterModel::get_stats(), mappel::PointEmitterModel::operator=(), and mappel::PointEmitterModel::set_prior().

9.18.5.25 `IdxT mappel::PointEmitterModel::num_params` `[protected]`, `[inherited]`

Definition at line 146 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::bound_theta(), mappel::PointEmitterModel::bounded_theta(), mappel::PointEmitterModel::check_param_shape(), mappel::PointEmitterModel::get_num_params(), mappel::PointEmitterModel::get_stats(), mappel::Gauss1DModel::initial_theta_estimate(), mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::PointEmitterModel::make_param(), mappel::PointEmitterModel::make_param_mat(), mappel::PointEmitterModel::make_param_mat_stack(), mappel::PointEmitterModel::make_param_stack(), mappel::PointEmitterModel::operator=(), mappel::PointEmitterModel::reflected_theta(), mappel::PointEmitterModel::set_bounds(), mappel::PointEmitterModel::set_lbound(), mappel::PointEmitterModel::set_prior(), mappel::PointEmitterModel::set_ubound(), and mappel::PointEmitterModel::theta_in_bounds().

9.18.5.26 `IdxT mappel::MCMCAdaptorBase::num_phases` `[protected]`, `[inherited]`

The number of different sampling phases for candidate selection MCMC. Each phase changes a different subset of variables.

Definition at line 29 of file MCMCAdaptorBase.h.

Referenced by mappel::MCMCAdaptorBase::get_mcmc_num_phases(), mappel::MCMCAdaptorBase::get_stats(), mappel::MCMCAdaptor1Ds::sample_mcmc_candidate(), mappel::MCMCAdaptor2Ds::sample_mcmc_candidate(), mappel::MCMCAdaptor2D::sample_mcmc_candidate(), mappel::MCMCAdaptor1D::sample_mcmc_candidate(), and mappel::MCMCAdaptorBase::set_mcmc_num_phases().

9.18.5.27 `CompositeDist mappel::PointEmitterModel::prior` `[protected]`, `[inherited]`

Definition at line 145 of file PointEmitterModel.h.

Referenced by mappel::Gauss2DModel::debug_internal_sum_model_y(), mappel::Gauss2DsModel::debug_internal_sum_model_y(), mappel::Gauss2DModel::Gauss2DModel(), mappel::Gauss2DsModel::Gauss2DsModel(), mappel::PointEmitterModel::get_hyperparam_index(), mappel::PointEmitterModel::get_hyperparam_names(), mappel::PointEmitterModel::get_hyperparam_value(), mappel::PointEmitterModel::get_hyperparams(), mappel::Gauss1DsModel::get_max_sigma(), mappel::Gauss1DsModel::get_min_sigma(), mappel::PointEmitterModel::get_param_names(), mappel::PointEmitterModel::get_prior(), mappel::PointEmitterModel::get_stats(), mappel::PointEmitterModel::has_hyperparam(), mappel::PointEmitterModel::operator=(), mappel::PointEmitterModel::PointEmitterModel(), mappel::PointEmitterModel::rename_hyperparam(), mappel::PointEmitterModel::sample_prior(), mappel::PointEmitterModel::set_bounds(), mappel::PointEmitterModel::set_hyperparam_names(), mappel::PointEmitterModel::set_hyperparam_value(), mappel::PointEmitterModel::set_hyperparams(), mappel::PointEmitterModel::set_lbound(), mappel::Gauss1DsModel::set_max_sigma(), mappel::Gauss1DsModel::set_min_sigma(), mappel::PointEmitterModel::set_param_names(), mappel::PointEmitterModel::set_prior(), and mappel::PointEmitterModel::set_ubound().

9.18.5.28 `const StringVect mappel::Gauss1DModel::prior_types` `[static],[inherited]`

Initial value:

```
= { "Beta",  
                                     "Normal"  
}
```

Definition at line 52 of file Gauss1DModel.h.

Referenced by `mappel::Gauss1DModel::operator=()`.

9.18.5.29 `double mappel::Gauss1DModel::psf_sigma` `[protected],[inherited]`

Standard deviation of the fixed-sigma 1D Gaussian PSF in pixels

Definition at line 90 of file Gauss1DModel.h.

Referenced by `mappel::Gauss1DModel::Stencil::compute_derivatives()`, `mappel::Gauss1DModel::get_psf_sigma()`, `mappel::Gauss1DModel::operator=()`, `mappel::Gauss1DModel::pixel_grad2()`, `mappel::Gauss1DModel::pixel_hess()`, `mappel::Gauss1DModel::pixel_hess_update()`, `mappel::Gauss1DModel::set_psf_sigma()`, and `mappel::Gauss1DModel::Stencil::Stencil()`.

9.18.5.30 `double mappel::MCMCAdaptorBase::sigma_scale` `[protected],[inherited]`

A scaling factor for step sizes as a fraction of the size of the domain dimension we are walking in. (0.05 default)

Definition at line 30 of file MCMCAdaptorBase.h.

Referenced by `mappel::MCMCAdaptorBase::get_mcmc_sigma_scale()`, `mappel::MCMCAdaptorBase::get_stats()`, `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds()`, `mappel::MCMCAdaptor2D::MCMCAdaptor2D()`, `mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds()`, `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`, `mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling()`, and `mappel::MCMCAdaptorBase::set_mcmc_sigma_scale()`.

9.18.5.31 `ImageSizeT mappel::ImageFormat1DBase::size` `[protected],[inherited]`

Number of pixels in X dimension for 1D image

Definition at line 65 of file ImageFormat1DBase.h.

Referenced by `mappel::ImageFormat1DBase::check_image_shape()`, `mappel::Gauss1DsModel::Stencil::compute_derivatives()`, `mappel::Gauss1DModel::Stencil::compute_derivatives()`, `mappel::ImageFormat1DBase::get_num_pixels()`, `mappel::ImageFormat1DBase::get_size()`, `mappel::Gauss1DModel::initial_theta_estimate()`, `mappel::Gauss1DsModel::initial_theta_estimate()`, `mappel::ImageFormat1DBase::make_image()`, `mappel::ImageFormat1DBase::make_image_stack()`, `mappel::ImageFormat1DBase::set_size()`, `mappel::Gauss1DsModel::Stencil::Stencil()`, and `mappel::Gauss1DModel::Stencil::Stencil()`.

9.18.5.32 ParamT mappel::PointEmitterModel::ubound [protected],[inherited]

Definition at line 148 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::bound_theta(), mappel::PointEmitterModel::bounded_theta(), mappel::PointEmitterModel::get_stats(), mappel::PointEmitterModel::get_ubound(), mappel::Gauss1DsModel::initial_theta_estimate(), mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::PointEmitterModel::operator=(), mappel::PointEmitterModel::reflected_theta(), mappel::PointEmitterModel::set_bounds(), mappel::PointEmitterModel::set_lbound(), mappel::PointEmitterModel::set_prior(), mappel::PointEmitterModel::set_ubound(), and mappel::PointEmitterModel::theta_in_bounds().

The documentation for this class was generated from the following file:


- [Gauss2DsxxyMAP.h](#)

9.19 mappel::Gauss2DsxxyModel Class Reference

A base class for 2D Gaussian PSF with axis-aligned gaussian with free parameters for both sigma_x and sigma_y. Gaussian sigma parameters sigma_x and sigma_y are measured in units of pixels. The model has 6 parameters, [x,y,l,bg,sigma_x,sigma_y].

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/Gauss2DsxxyModel.h>
```

Inheritance diagram for mappel::Gauss2DsxxyModel:



Classes

- class [Stencil](#)
Stencil for 2D free-sigma (astigmatic) models.

Public Types

- using [StencilVecT](#) = std::vector< [Stencil](#) >
- using [ParamT](#) = arma::vec
- using [ParamVecT](#) = arma::mat
- using [ImageCoordT](#) = uint32_t
- using [ImagePixelT](#) = double
- template<class CoordT >
using [ImageSizeShapeT](#) = arma::Col< CoordT >
- template<class CoordT >
using [ImageSizeVecShapeT](#) = arma::Mat< CoordT >
- using [ImageSizeT](#) = [ImageSizeShapeT](#)< [ImageCoordT](#) >
- using [ImageSizeVecT](#) = [ImageSizeVecShapeT](#)< [ImageCoordT](#) >
- template<class PixelT >
using [ImageShapeT](#) = arma::Mat< PixelT >
- template<class PixelT >
using [ImageStackShapeT](#) = arma::Cube< PixelT >
- using [ImageT](#) = [ImageShapeT](#)< [ImagePixelT](#) >
- using [ImageStackT](#) = [ImageStackShapeT](#)< [ImagePixelT](#) >

Public Member Functions

- [Gauss2DsxxyModel](#) (const [ImageSizeT](#) &size, const [VecT](#) &min_sigma, const [VecT](#) &max_sigma)
- void [set_hyperparams](#) (const [VecT](#) &hyperparams)
- void [set_prior](#) (CompositeDist &&prior_)
- void [set_size](#) (const [ImageSizeT](#) &size_)
- [VecT](#) [get_min_sigma](#) () const
- double [get_min_sigma](#) ([IdxT](#) dim) const
- [VecT](#) [get_max_sigma](#) () const
- double [get_max_sigma](#) ([IdxT](#) dim) const
- double [get_max_sigma_ratio](#) () const
- void [set_min_sigma](#) (const [VecT](#) &min_sigma)
- void [set_max_sigma](#) (const [VecT](#) &max_sigma)
- void [set_max_sigma_ratio](#) (double max_sigma_ratio)
- [StatsT](#) [get_stats](#) () const
- [Stencil](#) [make_stencil](#) (const [ParamT](#) &theta, bool compute_derivatives=true) const
Make a new Model::Stencil object at theta.
- double [pixel_model_value](#) (int i, int j, const [Stencil](#) &s) const
- void [pixel_grad](#) (int i, int j, const [Stencil](#) &s, [ParamT](#) &pgrad) const
- void [pixel_grad2](#) (int i, int j, const [Stencil](#) &s, [ParamT](#) &pgrad2) const
- void [pixel_hess](#) (int i, int j, const [Stencil](#) &s, [MatT](#) &hess) const
- void [pixel_hess_update](#) (int i, int j, const [Stencil](#) &s, double dm_ratio_m1, double dmm_ratio, [ParamT](#) &grad, [MatT](#) &hess) const
- [Stencil](#) [initial_theta_estimate](#) (const [ImageT](#) &im)
Fast, heuristic estimate of initial theta.
- [Stencil](#) [initial_theta_estimate](#) (const [ImageT](#) &im, const [ParamT](#) &theta_init)
- [Stencil](#) [initial_theta_estimate](#) (const [ImageT](#) &im, const [ParamT](#) &theta_init, const std::string &estimator)
- void [sample_mcmc_candidate](#) (int sample_index, [ParamT](#) &candidate_theta, double scale=1.0)
- [IdxT](#) [get_num_params](#) () const
- void [check_param_shape](#) (const [ParamT](#) &theta) const
- void [check_param_shape](#) (const [ParamVecT](#) &theta) const
- void [check_psf_sigma](#) (double psf_sigma) const
- void [check_psf_sigma](#) (const [VecT](#) &psf_sigma) const
- [ParamT](#) [make_param](#) () const
- template<class FillT >
[ParamT](#) [make_param](#) (FillT fill) const
- [ParamVecT](#) [make_param_stack](#) ([IdxT](#) n) const
- template<class FillT >
[ParamVecT](#) [make_param_stack](#) ([IdxT](#) n, FillT fill) const
- [MatT](#) [make_param_mat](#) () const
- template<class FillT >
[MatT](#) [make_param_mat](#) (FillT fill) const
- [CubeT](#) [make_param_mat_stack](#) ([IdxT](#) n) const
- template<class FillT >
[CubeT](#) [make_param_mat_stack](#) ([IdxT](#) n, FillT fill) const
- CompositeDist & [get_prior](#) ()
- const CompositeDist & [get_prior](#) () const
- void [set_prior](#) (const CompositeDist &prior_)
- [IdxT](#) [get_num_hyperparams](#) () const
- [VecT](#) [get_hyperparams](#) () const
- bool [has_hyperparam](#) (const std::string &name) const

- double [get_hyperparam_value](#) (const std::string &name) const
- int [get_hyperparam_index](#) (const std::string &name) const
- void [set_hyperparam_value](#) (const std::string &name, double value)
- void [rename_hyperparam](#) (const std::string &old_name, const std::string &new_name)
- [StringVecT](#) [get_param_names](#) () const
- void [set_param_names](#) (const [StringVecT](#) &desc)
- [StringVecT](#) [get_hyperparam_names](#) () const
- void [set_hyperparam_names](#) (const [StringVecT](#) &desc)
- template<class RngT >
 [ParamT](#) [sample_prior](#) (RngT &rng) const
- [ParamT](#) [sample_prior](#) () const
- void [set_bounds](#) (const [ParamT](#) &lbound, const [ParamT](#) &ubound)
- void [set_lbound](#) (const [ParamT](#) &lbound)
- void [set_ubound](#) (const [ParamT](#) &ubound)
- const [ParamT](#) & [get_lbound](#) () const
- const [ParamT](#) & [get_ubound](#) () const
- bool [theta_in_bounds](#) (const [ParamT](#) &theta) const
- void [bound_theta](#) ([ParamT](#) &theta, double epsilon=[bounds_epsilon](#)) const
- [ParamT](#) [bounded_theta](#) (const [ParamT](#) &theta, double epsilon=[bounds_epsilon](#)) const
- [ParamT](#) [reflected_theta](#) (const [ParamT](#) &theta) const
- [BoolVecT](#) [theta_stack_in_bounds](#) (const [ParamVecT](#) &theta) const
- [ParamVecT](#) [bounded_theta_stack](#) (const [ParamVecT](#) &theta, double epsilon=[bounds_epsilon](#)) const
- [ParamVecT](#) [reflected_theta_stack](#) (const [ParamVecT](#) &theta) const
- [ImageT](#) [make_image](#) () const
- [ImageStackT](#) [make_image_stack](#) ([ImageCoordT](#) n) const
- [ImageCoordT](#) [get_size_image_stack](#) (const [ImageStackT](#) &stack) const
- [ImageT](#) [get_image_from_stack](#) (const [ImageStackT](#) &stack, [ImageCoordT](#) n) const
- template<class ImT >
 void [set_image_in_stack](#) ([ImageStackT](#) &stack, [ImageCoordT](#) n, const ImT &im) const
- const [ImageSizeT](#) & [get_size](#) () const
- [ImageCoordT](#) [get_size](#) ([IdxT](#) idx) const
- [ImageCoordT](#) [get_num_pixels](#) () const
- void [check_image_shape](#) (const [ImageT](#) &im) const
 Check the shape of a single images is correct for model size.
- void [check_image_shape](#) (const [ImageStackT](#) &ims) const
 Check the shape of a stack of images is correct for model size.

Static Public Member Functions

- static CompositeDist [make_default_prior](#) (const [ImageSizeT](#) &size, double max_sigma_ratio)
- static CompositeDist [make_prior_beta_position](#) (const [ImageSizeT](#) &size, double beta_xpos, double beta_ypos, double mean_l, double kappa_l, double mean_bg, double kappa_bg, double max_sigma_ratio, double alpha_←sigma)
- static CompositeDist [make_prior_normal_position](#) (const [ImageSizeT](#) &size, double sigma_xpos, double sigma_←ypos, double mean_l, double kappa_l, double mean_bg, double kappa_bg, double max_sigma_ratio, double alpha_sigma)
- static prior_hessian::TruncatedNormalDist [make_prior_component_position_normal](#) ([IdxT](#) size, double pos_←sigma=default_sigma_pos)
- static prior_hessian::ScaledSymmetricBetaDist [make_prior_component_position_beta](#) ([IdxT](#) size, double pos_←beta=default_beta_pos)

- static prior_hessian::TruncatedGammaDist [make_prior_component_intensity](#) (double mean=[default_mean_↵](#), double kappa=[default_intensity_kappa](#))
- static prior_hessian::TruncatedParetoDist [make_prior_component_sigma](#) (double [min_sigma](#), double max_[↵](#)sigma, double alpha=[default_alpha_sigma](#))
- static void [set_rng_seed](#) (RngSeedT seed)
- static [ParallelRngManagerT](#) & [get_rng_manager](#) ()
- static [ParallelRngGeneratorT](#) & [get_rng_generator](#) ()
- static void [check_size](#) (const [ImageSizeT](#) &size_)

Check the size argument for the model.

Static Public Attributes

- static const std::string [DefaultSeperableInitEstimator](#) = "TrustRegion"
- static const double [bounds_epsilon](#) = 1.0E-6
- static const double [global_min_psf_sigma](#) = 1E-1
- static const double [global_max_psf_sigma](#) = 1E2
- static const double [default_beta_pos](#) = 3
- static const double [default_sigma_pos](#) = 1
- static const double [default_mean_l](#) = 300
- static const double [default_max_l](#) = INFINITY
- static const double [default_intensity_kappa](#) = 2
- static const double [default_pixel_mean_bg](#) = 4
- static const double [default_alpha_sigma](#) = 2
- static const [ImageCoordT](#) num_dim =2
- static const [ImageCoordT](#) global_min_size =3
- static const [ImageCoordT](#) global_max_size =512

Protected Member Functions

- void [update_internal_1D_estimators](#) ()

Static Protected Member Functions

- static double [compute_max_sigma_ratio](#) (const [VecT](#) &min_sigma, const [VecT](#) &max_sigma)

Protected Attributes

- double [mcmc_candidate_eta_y](#)
- double [mcmc_candidate_eta_sigma](#)
- [VecT](#) min_sigma
- [Gauss1DsMAP](#) x_model
- [Gauss1DsMAP](#) y_model
- CompositeDist prior
- [IdxT](#) num_params
- [IdxT](#) num_hyperparams
- [ParamT](#) lbound
- [ParamT](#) ubound
- [ImageSizeT](#) size

9.19.1 Detailed Description

A base class for 2D Gaussian PSF with axis-aligned gaussian with free parameters for both `sigma_x` and `sigma_y`. Gaussian sigma parameters `sigma_x` and `sigma_y` are measured in units of pixels. The model has 6 parameters, `[x,y,l,bg,sigma_x,sigma_y]`.

Importantly `sigma_x` and `sigma_y` must be in the range given by parameters `min_sigma`, `max_sigma`. Each is a 2-element vector, giving the minimum and maximum acceptable values for the gaussian sigma. It is important that `min_sigma` is at least 0.5 pixel, estimating gaussian centers when any component of the sigma is significantly smaller than a pixel will lead to poor results anyways.

Definition at line 27 of file `Gauss2DsxyModel.h`.

9.19.2 Member Typedef Documentation

9.19.2.1 `using mappel::ImageFormat2DBase::ImageCoordT = uint32_t` [inherited]

Image size coordinate storage type

Definition at line 24 of file `ImageFormat2DBase.h`.

9.19.2.2 `using mappel::ImageFormat2DBase::ImagePixelT = double` [inherited]

Image pixel storage type

Definition at line 25 of file `ImageFormat2DBase.h`.

9.19.2.3 `template<class PixelT> using mappel::ImageFormat2DBase::ImageShapeT = arma::Mat<PixelT>` [inherited]

Shape of the data type for a single image

Definition at line 32 of file `ImageFormat2DBase.h`.

9.19.2.4 `template<class CoordT> using mappel::ImageFormat2DBase::ImageSizeShapeT = arma::Col<CoordT>` [inherited]

Shape of the data type to store a single image's coordinates

Definition at line 27 of file `ImageFormat2DBase.h`.

9.19.2.5 `using mappel::ImageFormat2DBase::ImageSizeT = ImageSizeShapeT<ImageCoordT>` [inherited]

Data type for a single image size

Definition at line 29 of file `ImageFormat2DBase.h`.

9.19.2.6 `template<class CoordT > using mappel::ImageFormat2DBase::ImageSizeVecShapeT = arma::Mat<CoordT>`
`[inherited]`

Shape of the data type to store a vector of image's coordinates

Definition at line 28 of file ImageFormat2DBase.h.

9.19.2.7 `using mappel::ImageFormat2DBase::ImageSizeVecT = ImageSizeVecShapeT<ImageCoordT>`
`[inherited]`

Data type for a sequence of image sizes

Definition at line 30 of file ImageFormat2DBase.h.

9.19.2.8 `template<class PixelT > using mappel::ImageFormat2DBase::ImageStackShapeT = arma::Cube<PixelT>`
`[inherited]`

Shape of the data type for a sequence of images

Definition at line 33 of file ImageFormat2DBase.h.

9.19.2.9 `using mappel::ImageFormat2DBase::ImageStackT = ImageStackShapeT<ImagePixelT>`
`[inherited]`

Data type to represent a sequence of images

Definition at line 35 of file ImageFormat2DBase.h.

9.19.2.10 `using mappel::ImageFormat2DBase::ImageT = ImageShapeT<ImagePixelT>` `[inherited]`

Data type to represent single image

Definition at line 34 of file ImageFormat2DBase.h.

9.19.2.11 `using mappel::PointEmitterModel::ParamT = arma::vec` `[inherited]`

Parameter vector

Definition at line 47 of file PointEmitterModel.h.

9.19.2.12 `using mappel::PointEmitterModel::ParamVecT = arma::mat` `[inherited]`

Vector of parameter vectors

Definition at line 48 of file PointEmitterModel.h.

9.19.2.13 `using mappel::Gauss2DsxyModel::StencilVecT = std::vector<Stencil>`

Definition at line 59 of file Gauss2DsxyModel.h.

9.19.3 Constructor & Destructor Documentation

9.19.3.1 `mappel::Gauss2DsxyModel::Gauss2DsxyModel (const ImageSizeT & size, const VecT & min_sigma, const VecT & max_sigma)`

9.19.4 Member Function Documentation

9.19.4.1 `void mappel::PointEmitterModel::bound_theta (ParamT & theta, double epsilon = bounds_epsilon) const` [inherited]

Definition at line 248 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

9.19.4.2 `PointEmitterModel::ParamT mappel::PointEmitterModel::bounded_theta (const ParamT & theta, double epsilon = bounds_epsilon) const` [inherited]

Definition at line 265 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::PointEmitterModel::bounded_theta_stack()`.

9.19.4.3 `PointEmitterModel::ParamVecT mappel::PointEmitterModel::bounded_theta_stack (const ParamVecT & theta, double epsilon = bounds_epsilon) const` [inherited]

Definition at line 306 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::bounded_theta()`, `mappel::PointEmitterModel::check_param_shape()`, and `mappel::PointEmitterModel::make_param_stack()`.

9.19.4.4 `void mappel::ImageFormat2DBase::check_image_shape (const ImageT & im) const` [inherited]

Check the shape of a single images is correct for model size.

Definition at line 80 of file ImageFormat2DBase.cpp.

References `mappel::ImageFormat2DBase::size`.

9.19.4.5 `void mappel::ImageFormat2DBase::check_image_shape (const ImageStackT & ims) const` [inherited]

Check the shape of a stack of images is correct for model size.

Definition at line 93 of file ImageFormat2DBase.cpp.

References `mappel::ImageFormat2DBase::size`.

9.19.4.6 void mappel::PointEmitterModel::check_param_shape (const ParamT & *theta*) const [inherited]

Definition at line 167 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::num_params.

Referenced by mappel::PointEmitterModel::bound_theta(), mappel::PointEmitterModel::bounded_theta(), mappel::PointEmitterModel::bounded_theta_stack(), mappel::PointEmitterModel::reflected_theta(), mappel::PointEmitterModel::reflected_theta_stack(), mappel::PointEmitterModel::theta_in_bounds(), and mappel::PointEmitterModel::theta_stack_in_bounds().

9.19.4.7 void mappel::PointEmitterModel::check_param_shape (const ParamVecT & *theta*) const [inherited]

Definition at line 176 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::num_params.

9.19.4.8 void mappel::PointEmitterModel::check_psf_sigma (double *psf_sigma*) const [inherited]

Definition at line 185 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::global_max_psf_sigma, and mappel::PointEmitterModel::global_min_psf_sigma.

Referenced by mappel::Gauss1DModel::Gauss1DModel(), mappel::Gauss2DModel::Gauss2DModel(), mappel::Gauss2DsModel::Gauss2DsModel(), mappel::Gauss1DsModel::set_max_sigma(), mappel::Gauss2DsModel::set_max_sigma(), mappel::Gauss1DsModel::set_min_sigma(), mappel::Gauss2DsModel::set_min_sigma(), mappel::Gauss1DModel::set_psf_sigma(), and mappel::Gauss2DModel::set_psf_sigma().

9.19.4.9 void mappel::PointEmitterModel::check_psf_sigma (const VecT & *psf_sigma*) const [inherited]

Definition at line 197 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::global_max_psf_sigma, and mappel::PointEmitterModel::global_min_psf_sigma.

9.19.4.10 void mappel::ImageFormat2DBase::check_size (const ImageSizeT & *size*) [static],[inherited]

Check the size argument for the model.

Definition at line 60 of file ImageFormat2DBase.cpp.

References mappel::ImageFormat2DBase::global_max_size, and mappel::ImageFormat2DBase::global_min_size.

Referenced by mappel::ImageFormat2DBase::ImageFormat2DBase(), and mappel::ImageFormat2DBase::set_size().

9.19.4.11 `static double mappel::Gauss2DsxyModel::compute_max_sigma_ratio (const VecT & min_sigma, const VecT & max_sigma) [static], [protected]`

9.19.4.12 `int mappel::PointEmitterModel::get_hyperparam_index (const std::string & name) const [inline], [inherited]`

Definition at line 236 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.19.4.13 `StringVecT mappel::PointEmitterModel::get_hyperparam_names () const [inline], [inherited]`

Definition at line 256 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.19.4.14 `double mappel::PointEmitterModel::get_hyperparam_value (const std::string & name) const [inline], [inherited]`

Definition at line 232 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

Referenced by mappel::MCMCAdaptor1D::set_background_mcmc_sampling(), and mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling().

9.19.4.15 `PointEmitterModel::ParamT mappel::PointEmitterModel::get_hyperparams () const [inline], [inherited]`

Definition at line 224 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.19.4.16 `ImageFormat2DBase::ImageT mappel::ImageFormat2DBase::get_image_from_stack (const ImageStackT & stack, ImageCoordT n) const [inline], [inherited]`

Definition at line 106 of file ImageFormat2DBase.h.

9.19.4.17 `const PointEmitterModel::ParamT & mappel::PointEmitterModel::get_lbound () const [inline], [inherited]`

Definition at line 212 of file PointEmitterModel.h.

References mappel::PointEmitterModel::lbound.

Referenced by mappel::MCMCAdaptor1D::MCMCAdaptor1D(), mappel::MCMCAdaptor2D::MCMCAdaptor2D(), and mappel::MCMCAdaptor1D::set_background_mcmc_sampling().

9.19.4.18 `VecT mappel::Gauss2DsxModel::get_max_sigma () const [inline]`

Definition at line 127 of file Gauss2DsxModel.h.

References `get_max_sigma_ratio()`, and `get_min_sigma()`.

9.19.4.19 `double mappel::Gauss2DsxModel::get_max_sigma (IdxT dim) const [inline]`

Definition at line 131 of file Gauss2DsxModel.h.

References `get_max_sigma_ratio()`, and `get_min_sigma()`.

9.19.4.20 `double mappel::Gauss2DsxModel::get_max_sigma_ratio () const [inline]`

Definition at line 135 of file Gauss2DsxModel.h.

References `mappel::PointEmitterModel::get_ubound()`.

Referenced by `get_max_sigma()`.

9.19.4.21 `VecT mappel::Gauss2DsxModel::get_min_sigma () const [inline]`

Definition at line 122 of file Gauss2DsxModel.h.

References `min_sigma`.

Referenced by `get_max_sigma()`.

9.19.4.22 `double mappel::Gauss2DsxModel::get_min_sigma (IdxT dim) const`

9.19.4.23 `IdxT mappel::PointEmitterModel::get_num_hyperparams () const [inline],[inherited]`

Definition at line 208 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::num_hyperparams`.

9.19.4.24 `IdxT mappel::PointEmitterModel::get_num_params () const [inline],[inherited]`

Definition at line 160 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::num_params`.

9.19.4.25 `ImageFormat2DBase::ImageCoordT mappel::ImageFormat2DBase::get_num_pixels () const [inline],[inherited]`

Definition at line 79 of file ImageFormat2DBase.h.

References `mappel::ImageFormat2DBase::size`.

Referenced by `mappel::ImageFormat2DBase::get_stats()`.

9.19.4.26 `StringVecT mappel::PointEmitterModel::get_param_names () const` `[inline],[inherited]`

Definition at line 248 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.19.4.27 `CompositeDist & mappel::PointEmitterModel::get_prior ()` `[inline],[inherited]`

Definition at line 200 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

Referenced by mappel::Gauss2DModel::update_internal_1Dsum_estimators(), and mappel::Gauss2DsModel::update_internal_1Dsum_estimators().

9.19.4.28 `const CompositeDist & mappel::PointEmitterModel::get_prior () const` `[inline],[inherited]`

Definition at line 204 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.19.4.29 `ParallelRngGeneratorT & mappel::PointEmitterModel::get_rng_generator ()` `[static],[inherited]`

Definition at line 120 of file PointEmitterModel.cpp.

References mappel::rng_manager.

9.19.4.30 `ParallelRngManagerT & mappel::PointEmitterModel::get_rng_manager ()` `[static],[inherited]`

Definition at line 115 of file PointEmitterModel.cpp.

References mappel::rng_manager.

9.19.4.31 `const ImageFormat2DBase::ImageSizeT & mappel::ImageFormat2DBase::get_size () const` `[inline],[inherited]`

Definition at line 74 of file ImageFormat2DBase.h.

References mappel::ImageFormat2DBase::size.

9.19.4.32 `ImageFormat2DBase::ImageCoordT mappel::ImageFormat2DBase::get_size (IdxT idx) const` `[inherited]`

Definition at line 41 of file ImageFormat2DBase.cpp.

References mappel::ImageFormat2DBase::size.

9.19.4.33 ImageFormat2DBase::ImageCoordT `mappel::ImageFormat2DBase::get_size_image_stack (const ImageStackT & stack) const` `[inline],[inherited]`

Definition at line 99 of file ImageFormat2DBase.h.

9.19.4.34 StatsT `mappel::Gauss2DsxyModel::get_stats () const`

9.19.4.35 const PointEmitterModel::ParamT & mappel::PointEmitterModel::get_ubound () const `[inline],[inherited]`

Definition at line 216 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::ubound`.

Referenced by `get_max_sigma_ratio()`, `mappel::Gauss2DsModel::get_max_sigma_ratio()`, `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor2D::MCMCAdaptor2D()`, `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`, and `mappel::Gauss2DsModel::set_max_sigma_ratio()`.

9.19.4.36 bool `mappel::PointEmitterModel::has_hyperparam (const std::string & name) const` `[inline],[inherited]`

Definition at line 228 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.19.4.37 Gauss2DsxyModel::Stencil `mappel::Gauss2DsxyModel::initial_theta_estimate (const ImageT & im)` `[inline]`

Fast, heuristic estimate of initial theta.

Definition at line 222 of file Gauss2DsxyModel.h.

References `mappel::PointEmitterModel::DefaultSeperableInitEstimator`, and `mappel::PointEmitterModel::make_param()`.

Referenced by `initial_theta_estimate()`.

9.19.4.38 Gauss2DsxyModel::Stencil `mappel::Gauss2DsxyModel::initial_theta_estimate (const ImageT & im, const ParamT & theta_init)` `[inline]`

Definition at line 229 of file Gauss2DsxyModel.h.

References `mappel::PointEmitterModel::DefaultSeperableInitEstimator`, and `initial_theta_estimate()`.

9.19.4.39 Stencil `mappel::Gauss2DsxyModel::initial_theta_estimate (const ImageT & im, const ParamT & theta_init, const std::string & estimator)`

9.19.4.40 static CompositeDist `mappel::Gauss2DsxyModel::make_default_prior (const ImageSizeT & size, double max_sigma_ratio)` `[static]`

9.19.4.41 ImageFormat2DBase::ImageT `mappel::ImageFormat2DBase::make_image () const` `[inline],[inherited]`

Definition at line 85 of file ImageFormat2DBase.h.

References `mappel::ImageFormat2DBase::size`.

9.19.4.42 ImageFormat2DBase::ImageStackT mappel::ImageFormat2DBase::make_image_stack (ImageCoordT *n*) const
 [inline],[inherited]

Definition at line 92 of file ImageFormat2DBase.h.

References mappel::ImageFormat2DBase::size.

9.19.4.43 PointEmitterModel::ParamT mappel::PointEmitterModel::make_param () const [inline],[inherited]

Definition at line 164 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

Referenced by mappel::Gauss1DModel::initial_theta_estimate(), mappel::Gauss1DsModel::initial_theta_estimate(), mappel::Gauss2DModel::initial_theta_estimate(), initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_← estimate(), mappel::Gauss1DModel::pixel_hess_update(), mappel::Gauss1DsModel::pixel_hess_update(), mappel::← Gauss2DModel::pixel_hess_update(), and mappel::Gauss2DsModel::pixel_hess_update().

9.19.4.44 template<class FillT > PointEmitterModel::ParamT mappel::PointEmitterModel::make_param (FillT *fill*) const
 [inherited]

Definition at line 181 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.19.4.45 MatT mappel::PointEmitterModel::make_param_mat () const [inline],[inherited]

Definition at line 172 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.19.4.46 template<class FillT > MatT mappel::PointEmitterModel::make_param_mat (FillT *fill*) const [inherited]

Definition at line 191 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.19.4.47 CubeT mappel::PointEmitterModel::make_param_mat_stack (IdxT *n*) const [inline],[inherited]

Definition at line 176 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.19.4.48 template<class FillT > CubeT mappel::PointEmitterModel::make_param_mat_stack (IdxT *n*, FillT *fill*) const
 [inherited]

Definition at line 196 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.19.4.49 `PointEmitterModel::ParamVecT mappel::PointEmitterModel::make_param_stack (IdxT n) const` `[inline]`,
`[inherited]`

Definition at line 168 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::num_params`.

Referenced by `mappel::PointEmitterModel::bounded_theta_stack()`, and `mappel::PointEmitterModel::reflected_theta_stack()`.

9.19.4.50 `template<class FillT > PointEmitterModel::ParamVecT mappel::PointEmitterModel::make_param_stack (IdxT n, FillT fill) const` `[inherited]`

Definition at line 186 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::num_params`.

9.19.4.51 `static CompositeDist mappel::Gauss2DsxyModel::make_prior_beta_position (const ImageSizeT & size, double beta_xpos, double beta_ypos, double mean_l, double kappa_l, double mean_bg, double kappa_bg, double max_sigma_ratio, double alpha_sigma)` `[static]`

9.19.4.52 `prior_hessian::TruncatedGammaDist mappel::PointEmitterModel::make_prior_component_intensity (double mean = default_mean_l, double kappa = default_intensity_kappa)` `[static]`, `[inherited]`

Definition at line 98 of file `PointEmitterModel.cpp`.

References `mappel::PointEmitterModel::default_max_l`.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_beta_position()`, `mappel::Gauss1DModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_normal_position()`, `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss1DModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_prior_beta_position()`, `mappel::Gauss1DsModel::make_prior_beta_position()`, `mappel::Gauss1DModel::make_prior_beta_position()`, `mappel::Gauss2DsModel::make_prior_beta_position()`, `mappel::Gauss2DModel::make_prior_normal_position()`, `mappel::Gauss1DsModel::make_prior_normal_position()`, `mappel::Gauss1DModel::make_prior_normal_position()`, and `mappel::Gauss2DsModel::make_prior_normal_position()`.

9.19.4.53 `prior_hessian::ScaledSymmetricBetaDist mappel::PointEmitterModel::make_prior_component_position_beta (IdxT size, double pos_beta = default_beta_pos)` `[static]`, `[inherited]`

Definition at line 92 of file `PointEmitterModel.cpp`.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_beta_position()`, `mappel::Gauss1DModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss1DsModel::make_prior_beta_position()`, `mappel::Gauss2DsModel::make_prior_beta_position()`, and `mappel::Gauss2DsModel::make_prior_beta_position()`.

9.19.4.54 `prior_hessian::TruncatedNormalDist mappel::PointEmitterModel::make_prior_component_position_normal (IdxT size, double pos_sigma = default_sigma_pos) [static],[inherited]`

Definition at line 85 of file PointEmitterModel.cpp.

Referenced by `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_default_prior_normal_position()`, `mappel::Gauss1DModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_prior_normal_position()`, `mappel::Gauss1DsModel::make_prior_normal_position()`, `mappel::Gauss1DModel::make_prior_normal_position()`, and `mappel::Gauss2DsModel::make_prior_normal_position()`.

9.19.4.55 `prior_hessian::TruncatedParetoDist mappel::PointEmitterModel::make_prior_component_sigma (double min_sigma, double max_sigma, double alpha = default_alpha_sigma) [static],[inherited]`

Definition at line 104 of file PointEmitterModel.cpp.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, `mappel::Gauss1DsModel::make_prior_beta_position()`, `mappel::Gauss2DsModel::make_prior_beta_position()`, `mappel::Gauss1DsModel::make_prior_normal_position()`, and `mappel::Gauss2DsModel::make_prior_normal_position()`.

9.19.4.56 `static CompositeDist mappel::Gauss2DsxyModel::make_prior_normal_position (const ImageSizeT & size, double sigma_xpos, double sigma_ypos, double mean_l, double kappa_l, double mean_bg, double kappa_bg, double max_sigma_ratio, double alpha_sigma) [static]`

9.19.4.57 `Gauss2DsxyModel::Stencil mappel::Gauss2DsxyModel::make_stencil (const ParamT & theta, bool compute_derivatives = true) const [inline]`

Make a new Model::Stencil object at theta.

Stencils store all of the important calculations necessary for evaluating the log-likelihood and its derivatives at a particular theta (parameter) value.

This allows re-use of the most expensive computations. Stencils can be easily passed around by reference, and most functions in the [mappel::methods](#) namespace accept a const [Stencil](#) reference in place of the model parameter.

Throws [mappel::ModelBoundsError](#) if not model.theta_in_bounds(theta).

If derivatives will not be computed with this stencil set `compute_derivatives=false`

Parameters

<i>theta</i>	Parameter to evaluate at
<i>compute_derivatives</i>	True to also prepare for derivative computations

Returns

A new [Stencil](#) object ready to compute with

Definition at line 157 of file Gauss2DsxModel.h.

References `mappel::Gauss2DsxModel::Stencil::Stencil()`, and `mappel::PointEmitterModel::theta_in_bounds()`.

9.19.4.58 `void mappel::Gauss2DsxModel::pixel_grad (int i, int j, const Stencil & s, ParamT & pgrad) const [inline]`

Definition at line 178 of file Gauss2DsxModel.h.

References `mappel::Gauss2DsxModel::Stencil::DX`, `mappel::Gauss2DsxModel::Stencil::DXS`, `mappel::Gauss2DsxModel::Stencil::DY`, `mappel::Gauss2DsxModel::Stencil::DYS`, `mappel::Gauss2DsxModel::Stencil::l()`, `mappel::Gauss2DsxModel::Stencil::X`, and `mappel::Gauss2DsxModel::Stencil::Y`.

9.19.4.59 `void mappel::Gauss2DsxModel::pixel_grad2 (int i, int j, const Stencil & s, ParamT & pgrad2) const [inline]`

Definition at line 190 of file Gauss2DsxModel.h.

References `mappel::Gauss2DsxModel::Stencil::DXS`, `mappel::Gauss2DsxModel::Stencil::DXS2`, `mappel::Gauss2DsxModel::Stencil::DYS`, `mappel::Gauss2DsxModel::Stencil::DYS2`, `mappel::Gauss2DsxModel::Stencil::l()`, `mappel::Gauss2DsxModel::Stencil::sigmaX()`, `mappel::Gauss2DsxModel::Stencil::sigmaY()`, `mappel::Gauss2DsxModel::Stencil::X`, and `mappel::Gauss2DsxModel::Stencil::Y`.

9.19.4.60 `void mappel::Gauss2DsxModel::pixel_hess (int i, int j, const Stencil & s, MatT & hess) const [inline]`

Definition at line 202 of file Gauss2DsxModel.h.

References `mappel::Gauss2DsxModel::Stencil::DX`, `mappel::Gauss2DsxModel::Stencil::DXS`, `mappel::Gauss2DsxModel::Stencil::DXS2`, `mappel::Gauss2DsxModel::Stencil::DXSX`, `mappel::Gauss2DsxModel::Stencil::DY`, `mappel::Gauss2DsxModel::Stencil::DYS`, `mappel::Gauss2DsxModel::Stencil::DYS2`, `mappel::Gauss2DsxModel::Stencil::DYSY`, `mappel::Gauss2DsxModel::Stencil::l()`, `mappel::Gauss2DsxModel::Stencil::sigmaX()`, `mappel::Gauss2DsxModel::Stencil::sigmaY()`, `mappel::Gauss2DsxModel::Stencil::X`, and `mappel::Gauss2DsxModel::Stencil::Y`.

9.19.4.61 `void mappel::Gauss2DsxModel::pixel_hess_update (int i, int j, const Stencil & s, double dm_ratio_m1, double dmm_ratio, ParamT & grad, MatT & hess) const`

9.19.4.62 `double mappel::Gauss2DsxModel::pixel_model_value (int i, int j, const Stencil & s) const [inline]`

Definition at line 171 of file Gauss2DsxModel.h.

References `mappel::Gauss2DsxModel::Stencil::bg()`, `mappel::Gauss2DsxModel::Stencil::l()`, `mappel::Gauss2DsxModel::Stencil::X`, and `mappel::Gauss2DsxModel::Stencil::Y`.

9.19.4.63 `PointEmitterModel::ParamT mappel::PointEmitterModel::reflected_theta (const ParamT & theta) const [inherited]`

Definition at line 276 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::PointEmitterModel::reflected_theta_stack()`.

9.19.4.64 `PointEmitterModel::ParamVecT mappel::PointEmitterModel::reflected_theta_stack (const ParamVecT & theta)`
`const [inherited]`

Definition at line 316 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::make_param_stack()`, and `mappel::PointEmitterModel::reflected_theta()`.

9.19.4.65 `void mappel::PointEmitterModel::rename_hyperparam (const std::string & old_name, const std::string & new_name)`
`[inline], [inherited]`

Definition at line 244 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.19.4.66 `void mappel::Gauss2DsxyModel::sample_mcmc_candidate (int sample_index, ParamT & candidate_theta, double scale = 1.0)`

9.19.4.67 `template<class RngT > PointEmitterModel::ParamT mappel::PointEmitterModel::sample_prior (RngT & rng) const`
`[inherited]`

Definition at line 264 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.19.4.68 `PointEmitterModel::ParamT mappel::PointEmitterModel::sample_prior () const` `[inline], [inherited]`

Definition at line 268 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`, and `mappel::rng_manager`.

9.19.4.69 `void mappel::PointEmitterModel::set_bounds (const ParamT & lbound_, const ParamT & ubound_)`
`[inherited]`

Box-type parameter bounds

Modifies the prior bounds to prevent sampling outside the valid box-constraints.

Definition at line 213 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::bounds_epsilon`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

9.19.4.70 `void mappel::PointEmitterModel::set_hyperparam_names (const StringVecT & desc)` `[inline], [inherited]`

Definition at line 260 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.19.4.71 `void mappel::PointEmitterModel::set_hyperparam_value (const std::string & name, double value) [inline], [inherited]`

Definition at line 240 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.19.4.72 `void mappel::Gauss2DsxyModel::set_hyperparams (const VecT & hyperparams)`

9.19.4.73 `template<class ImT > void mappel::ImageFormat2DBase::set_image_in_stack (ImageStackT & stack, ImageCoordT n, const ImT & im) const [inherited]`

Definition at line 113 of file ImageFormat2DBase.h.

9.19.4.74 `void mappel::PointEmitterModel::set_lbound (const ParamT & lbound) [inherited]`

Definition at line 226 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::bounds_epsilon, mappel::PointEmitterModel::lbound, mappel::PointEmitterModel::num_params, mappel::PointEmitterModel::prior, and mappel::PointEmitterModel::ubound.

Referenced by mappel::Gauss1DsModel::set_min_sigma().

9.19.4.75 `void mappel::Gauss2DsxyModel::set_max_sigma (const VecT & max_sigma)`

9.19.4.76 `void mappel::Gauss2DsxyModel::set_max_sigma_ratio (double max_sigma_ratio)`

9.19.4.77 `void mappel::Gauss2DsxyModel::set_min_sigma (const VecT & min_sigma)`

9.19.4.78 `void mappel::PointEmitterModel::set_param_names (const StringVecT & desc) [inline], [inherited]`

Definition at line 252 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.19.4.79 `void mappel::Gauss2DsxyModel::set_prior (CompositeDist && prior_)`

9.19.4.80 `void mappel::PointEmitterModel::set_prior (const CompositeDist & prior_) [inherited]`

Definition at line 149 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::lbound, mappel::PointEmitterModel::num_hyperparams, mappel::PointEmitterModel::num_params, mappel::PointEmitterModel::prior, and mappel::PointEmitterModel::ubound.

9.19.4.81 `void mappel::PointEmitterModel::set_rng_seed (RngSeedT seed) [static], [inherited]`

Definition at line 110 of file PointEmitterModel.cpp.

References mappel::rng_manager.

9.19.4.82 void mappel::Gauss2DsxyModel::set_size (const ImageSizeT & size_)

9.19.4.83 void mappel::PointEmitterModel::set_ubound (const ParamT & ubound) [inherited]

Definition at line 237 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::bounds_epsilon, mappel::PointEmitterModel::lbound, mappel::PointEmitterModel::num_params, mappel::PointEmitterModel::prior, and mappel::PointEmitterModel::ubound.

Referenced by mappel::Gauss1DsModel::set_max_sigma(), and mappel::Gauss2DsModel::set_max_sigma_ratio().

9.19.4.84 bool mappel::PointEmitterModel::theta_in_bounds (const ParamT & theta) const [inherited]

Definition at line 257 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::check_param_shape(), mappel::PointEmitterModel::lbound, mappel::PointEmitterModel::num_params, and mappel::PointEmitterModel::ubound.

Referenced by mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::Gauss1DModel::make_stencil(), mappel::Gauss1DsModel::make_stencil(), mappel::Gauss2DModel::make_stencil(), make_stencil(), mappel::Gauss2DsModel::make_stencil(), and mappel::PointEmitterModel::theta_stack_in_bounds().

9.19.4.85 BoolVecT mappel::PointEmitterModel::theta_stack_in_bounds (const ParamVecT & theta) const [inherited]

Definition at line 296 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::check_param_shape(), and mappel::PointEmitterModel::theta_in_bounds().

9.19.4.86 void mappel::Gauss2DsxyModel::update_internal_1D_estimators () [protected]

9.19.5 Member Data Documentation

9.19.5.1 const double mappel::PointEmitterModel::bounds_epsilon = 1.0E-6 [static], [inherited]

Distance from the boundary to constrain in bound_theta and bounded_theta methods

Definition at line 52 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::set_bounds(), mappel::PointEmitterModel::set_lbound(), mappel::Gauss2DsModel::set_max_sigma_ratio(), and mappel::PointEmitterModel::set_ubound().

9.19.5.2 const double mappel::PointEmitterModel::default_alpha_sigma = 2 [static], [inherited]

Default per-pixel background gamma distribution shape

Definition at line 62 of file PointEmitterModel.h.

9.19.5.3 `const double mappel::PointEmitterModel::default_beta_pos = 3` `[static],[inherited]`

Default position parameter in symmetric beta-distributions

Definition at line 56 of file PointEmitterModel.h.

9.19.5.4 `const double mappel::PointEmitterModel::default_intensity_kappa = 2` `[static],[inherited]`

Default shape for intensity gamma distributions

Definition at line 60 of file PointEmitterModel.h.

9.19.5.5 `const double mappel::PointEmitterModel::default_max_l = INFINITY` `[static],[inherited]`

Default maximum emitter intensity

Definition at line 59 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::make_prior_component_intensity()`.

9.19.5.6 `const double mappel::PointEmitterModel::default_mean_l = 300` `[static],[inherited]`

Default emitter intensity mean

Definition at line 58 of file PointEmitterModel.h.

Referenced by `mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling()`.

9.19.5.7 `const double mappel::PointEmitterModel::default_pixel_mean_bg = 4` `[static],[inherited]`

Default per-pixel mean background counts

Definition at line 61 of file PointEmitterModel.h.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_beta_position()`, `mappel::Gauss1DModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_default_prior_normal_position()`, `mappel::Gauss1DModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, and `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`.

9.19.5.8 `const double mappel::PointEmitterModel::default_sigma_pos = 1` `[static],[inherited]`

Default position parameter in symmetric beta-distributions

Definition at line 57 of file PointEmitterModel.h.

9.19.5.9 `const std::string mappel::PointEmitterModel::DefaultSeperableInitEstimator = "TrustRegion" [static],
[inherited]`

Estimator name to use in 1D separable initializations

Definition at line 49 of file PointEmitterModel.h.

Referenced by `mappel::Gauss2DModel::initial_theta_estimate()`, `initial_theta_estimate()`, and `mappel::Gauss2DsxyModel::initial_theta_estimate()`.

9.19.5.10 `const double mappel::PointEmitterModel::global_max_psf_sigma = 1E2 [static], [inherited]`

Global maximum for any `psf_sigma`. Sizes above this value are invalid, and nowhere near useful for practical point emitter localization

Definition at line 54 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::check_psf_sigma()`.

9.19.5.11 `const ImageFormat2DBase::ImageCoordT mappel::ImageFormat2DBase::global_max_size =512 [static],
[inherited]`

Maximum size along any dimension of the image. This is insanely big to catch obvious errors

Definition at line 39 of file ImageFormat2DBase.h.

Referenced by `mappel::ImageFormat2DBase::check_size()`.

9.19.5.12 `const double mappel::PointEmitterModel::global_min_psf_sigma = 1E-1 [static], [inherited]`

Global minimum for any `psf_sigma`. Sizes below this value are invalid, and nowhere near useful for practical point emitter localization

Definition at line 53 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::check_psf_sigma()`.

9.19.5.13 `const ImageFormat2DBase::ImageCoordT mappel::ImageFormat2DBase::global_min_size =3 [static],
[inherited]`

Minimum size along any dimension of the image.

Definition at line 38 of file ImageFormat2DBase.h.

Referenced by `mappel::ImageFormat2DBase::check_size()`.

9.19.5.14 **ParamT** mappel::PointEmitterModel::lbound [protected],[inherited]

Definition at line 148 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::bound_theta(), mappel::PointEmitterModel::bounded_theta(), mappel::PointEmitterModel::get_lbound(), mappel::PointEmitterModel::get_stats(), mappel::Gauss1DsModel::initial_theta_estimate(), mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::PointEmitterModel::operator=(), mappel::PointEmitterModel::reflected_theta(), mappel::PointEmitterModel::set_bounds(), mappel::PointEmitterModel::set_lbound(), mappel::PointEmitterModel::set_prior(), mappel::PointEmitterModel::set_ubound(), and mappel::PointEmitterModel::theta_in_bounds().

9.19.5.15 **double** mappel::Gauss2DsxyModel::mcmc_candidate_eta_sigma [protected]

The standard deviation for the normally distributed perturbation to theta_sigma in the random walk MCMC sampling

Definition at line 108 of file Gauss2DsxyModel.h.

9.19.5.16 **double** mappel::Gauss2DsxyModel::mcmc_candidate_eta_y [protected]

Std-dev for the normal perturbations to theta_y under MCMC sampling

Definition at line 107 of file Gauss2DsxyModel.h.

9.19.5.17 **VecT** mappel::Gauss2DsxyModel::min_sigma [protected]

Gaussian PSF in pixels

Definition at line 113 of file Gauss2DsxyModel.h.

Referenced by get_min_sigma().

9.19.5.18 **const ImageFormat2DBase::ImageCoordT** mappel::ImageFormat2DBase::num_dim =2 [static],[inherited]

Number of image dimensions.

Definition at line 37 of file ImageFormat2DBase.h.

Referenced by mappel::ImageFormat2DBase::get_stats().

9.19.5.19 **IdxT** mappel::PointEmitterModel::num_hyperparams [protected],[inherited]

Definition at line 147 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::get_num_hyperparams(), mappel::PointEmitterModel::get_stats(), mappel::PointEmitterModel::operator=(), and mappel::PointEmitterModel::set_prior().

9.19.5.20 IdxT mappel::PointEmitterModel::num_params [protected],[inherited]

Definition at line 146 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::bound_theta(), mappel::PointEmitterModel::bounded_theta(), mappel::PointEmitterModel::check_param_shape(), mappel::PointEmitterModel::get_num_params(), mappel::PointEmitterModel::get_stats(), mappel::Gauss1DModel::initial_theta_estimate(), mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::PointEmitterModel::make_param(), mappel::PointEmitterModel::make_param_mat(), mappel::PointEmitterModel::make_param_mat_stack(), mappel::PointEmitterModel::make_param_stack(), mappel::PointEmitterModel::operator=(), mappel::PointEmitterModel::reflected_theta(), mappel::PointEmitterModel::set_bounds(), mappel::PointEmitterModel::set_lbound(), mappel::PointEmitterModel::set_prior(), mappel::PointEmitterModel::set_ubound(), and mappel::PointEmitterModel::theta_in_bounds().

9.19.5.21 CompositeDist mappel::PointEmitterModel::prior [protected],[inherited]

Definition at line 145 of file PointEmitterModel.h.

Referenced by mappel::Gauss2DModel::debug_internal_sum_model_y(), mappel::Gauss2DsModel::debug_internal_sum_model_y(), mappel::Gauss2DModel::Gauss2DModel(), mappel::Gauss2DsModel::Gauss2DsModel(), mappel::PointEmitterModel::get_hyperparam_index(), mappel::PointEmitterModel::get_hyperparam_names(), mappel::PointEmitterModel::get_hyperparam_value(), mappel::PointEmitterModel::get_hyperparams(), mappel::Gauss1DsModel::get_max_sigma(), mappel::Gauss1DsModel::get_min_sigma(), mappel::PointEmitterModel::get_param_names(), mappel::PointEmitterModel::get_prior(), mappel::PointEmitterModel::get_stats(), mappel::PointEmitterModel::has_hyperparam(), mappel::PointEmitterModel::operator=(), mappel::PointEmitterModel::PointEmitterModel(), mappel::PointEmitterModel::rename_hyperparam(), mappel::PointEmitterModel::sample_prior(), mappel::PointEmitterModel::set_bounds(), mappel::PointEmitterModel::set_hyperparam_names(), mappel::PointEmitterModel::set_hyperparam_value(), mappel::PointEmitterModel::set_hyperparams(), mappel::PointEmitterModel::set_lbound(), mappel::Gauss1DsModel::set_max_sigma(), mappel::Gauss1DsModel::set_min_sigma(), mappel::PointEmitterModel::set_param_names(), mappel::PointEmitterModel::set_prior(), and mappel::PointEmitterModel::set_ubound().

9.19.5.22 ImageSizeT mappel::ImageFormat2DBase::size [protected],[inherited]

Number of pixels in X dimension for 1D image

Definition at line 67 of file ImageFormat2DBase.h.

Referenced by mappel::cgauss_compute_estimate(), mappel::cgauss_compute_estimate_debug(), mappel::cgauss_heuristic_compute_estimate(), mappel::ImageFormat2DBase::check_image_shape(), mappel::Gauss2DModel::Stencil::compute_derivatives(), mappel::Gauss2DsModel::Stencil::compute_derivatives(), mappel::Gauss2DModel::debug_internal_sum_model_y(), mappel::Gauss2DsModel::debug_internal_sum_model_y(), mappel::methods::expected_information(), mappel::Gauss2DModel::Gauss2DModel(), mappel::Gauss2DsMAP::Gauss2DsMAP(), mappel::Gauss2DsMLE::Gauss2DsMLE(), mappel::Gauss2DsModel::Gauss2DsModel(), mappel::ImageFormat2DBase::get_num_pixels(), mappel::ImageFormat2DBase::get_size(), mappel::ImageFormat2DBase::get_stats(), mappel::methods::likelihood::grad(), mappel::methods::likelihood::grad2(), mappel::methods::likelihood::debug::grad_components(), mappel::methods::likelihood::hessian(), mappel::methods::likelihood::debug::hessian_components(), mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::methods::likelihood::llh(), mappel::methods::likelihood::debug::llh_components(), mappel::Gauss2DModel::make_default_prior_beta_position(), mappel::Gauss2DsModel::make_default_prior_beta_position(), mappel::Gauss2DModel::make_default_prior_normal_position(), mappel::Gauss2DsModel::make_default_prior_normal_position(), mappel::ImageFormat2DBase::make_image(), mappel::ImageFormat2DBase::make_image_stack(),

mappel::Gauss2DModel::make_internal_1Dsum_estimator(), mappel::Gauss2DsModel::make_internal_1Dsum_estimator(), mappel::Gauss2DModel::make_prior_beta_position(), mappel::Gauss2DsModel::make_prior_beta_position(), mappel::Gauss2DModel::make_prior_normal_position(), mappel::Gauss2DsModel::make_prior_normal_position(), mappel::methods::model_image(), mappel::ImageFormat2DBase::operator=(), mappel::methods::likelihood::rllh(), mappel::methods::likelihood::debug::rllh_components(), mappel::ImageFormat2DBase::set_size(), mappel::Gauss2DModel::set_size(), mappel::Gauss2DsModel::set_size(), mappel::methods::simulate_image(), mappel::methods::simulate_image_from_model(), mappel::Gauss2DModel::Stencil::Stencil(), mappel::Gauss2DsModel::Stencil::Stencil(), mappel::Gauss2DModel::update_internal_1Dsum_estimators(), and mappel::Gauss2DsModel::update_internal_1Dsum_estimators().

9.19.5.23 ParamT mappel::PointEmitterModel::ubound [protected], [inherited]

Definition at line 148 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::bound_theta(), mappel::PointEmitterModel::bounded_theta(), mappel::PointEmitterModel::get_stats(), mappel::PointEmitterModel::get_ubound(), mappel::Gauss1DsModel::initial_theta_estimate(), mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::PointEmitterModel::operator=(), mappel::PointEmitterModel::reflected_theta(), mappel::PointEmitterModel::set_bounds(), mappel::PointEmitterModel::set_lbound(), mappel::PointEmitterModel::set_prior(), mappel::PointEmitterModel::set_ubound(), and mappel::PointEmitterModel::theta_in_bounds().

9.19.5.24 Gauss1DsMAP mappel::Gauss2DsxModel::x_model [protected]

X-model fits 2D images X-axis (column sum). Using variable sigma 1D model.

Definition at line 114 of file Gauss2DsxModel.h.

9.19.5.25 Gauss1DsMAP mappel::Gauss2DsyModel::y_model [protected]

Y-model fits 2D images Y-axis (row sum). Using variable sigma 1D model.

Definition at line 115 of file Gauss2DsyModel.h.


The documentation for this class was generated from the following file:

- [Gauss2DsxModel.h](#)

9.20 mappel::estimator::HeuristicEstimator< Model > Class Template Reference

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/estimator.h>
```

Inheritance diagram for mappel::estimator::HeuristicEstimator< Model >:

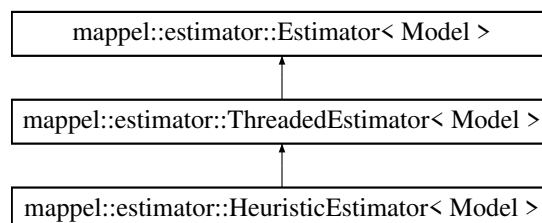

Public Member Functions

- [HeuristicEstimator](#) (const Model &model)
- [StatsT get_stats](#) ()
- [StatsT get_debug_stats](#) ()
- [std::string name](#) () const
- void [estimate_max_stack](#) (const [ModelDataStackT](#)< Model > &data, const [ParamVecT](#)< Model > &theta_init, [MLEDataStack](#) &mle_data_stack) override
- void [estimate_profile_max](#) (const [ModelDataT](#)< Model > &data, const [ParamVecT](#)< Model > &theta_init, [ProfileLikelihoodData](#) &profile) override
- void [estimate_profile_bounds_parallel](#) (const [ModelDataT](#)< Model > &data, [ProfileBoundsData](#) &bounds_est) override
- void [estimate_profile_bounds_stack](#) (const [ModelDataStackT](#)< Model > &data, [ProfileBoundsDataStack](#) &bounds_est_stack) override
- void [clear_stats](#) ()
- const Model & [get_model](#) ()

- void [estimate_max_stack](#) (const [ModelDataStackT](#)< Model > &data_stack, [MLEDataStack](#) &mle_data_stack)
- void [estimate_max](#) (const [ModelDataT](#)< Model > &data, const [ParamT](#)< Model > &theta_init, [MLEData](#) &mle_data, [StencilT](#)< Model > &mle_stencil)
- void [estimate_max](#) (const [ModelDataT](#)< Model > &data, const [ParamT](#)< Model > &theta_init, [MLEData](#) &mle_data)
- void [estimate_max](#) (const [ModelDataT](#)< Model > &data, [MLEData](#) &mle_data)
- void [estimate_max_debug](#) (const [ModelDataT](#)< Model > &data, const [ParamT](#)< Model > &theta_init, [MLEDebugData](#) &mle_data, [StencilT](#)< Model > &mle_stencil)
- void [estimate_max_debug](#) (const [ModelDataT](#)< Model > &data, const [ParamT](#)< Model > &theta_init, [MLEDebugData](#) &mle_data)

- double [estimate_profile_max](#) (const [ModelDataT](#)< Model > &data, const [IdxVecT](#) &fixed_idx, const [ParamT](#)< Model > &fixed_theta_init, [StencilT](#)< Model > &theta_max)

- void [estimate_profile_bounds](#) (const [ModelDataT](#)< Model > &data, [ProfileBoundsData](#) &bounds_est)
- void [estimate_profile_bounds_debug](#) (const [ModelDataT](#)< Model > &data, [ProfileBoundsDebugData](#) &bounds_est)

- [IdxVecT get_exit_counts](#) () const

Protected Member Functions

- void [record_exit_code](#) ([ExitCode](#) code) override
- virtual void [compute_estimate_debug](#) (const [ModelDataT](#)< Model > &data, const [ParamT](#)< Model > &theta_init, [MLEDebugData](#) &mle_data, [StencilT](#)< Model > &mle_stencil)
- virtual double [compute_profile_estimate](#) (const [ModelDataT](#)< Model > &data, const [ParamT](#)< Model > &theta_init, const [IdxVecT](#) &fixed_idx, [StencilT](#)< Model > &max_stencil)
- virtual void [compute_profile_bound](#) (const [ModelDataT](#)< Model > &data, [ProfileBoundsData](#) &est, const [VecT](#) &init_step, [IdxT](#) param_idx, [IdxT](#) which_bound)
- virtual void [compute_profile_bound_debug](#) (const [ModelDataT](#)< Model > &data, [ProfileBoundsDebugData](#) &est)
- void [record_walltime](#) ([ClockT::time_point](#) start_walltime, int [num_estimations](#))

Protected Attributes

- int [max_threads](#)
- int [num_threads](#)
- std::mutex [mtx](#)
- const Model & [model](#)
- int [num_estimations](#) = 0
- double [total_walltime](#) = 0.
- [IdxVecT](#) [exit_counts](#)

9.20.1 Detailed Description

```
template<class Model>
class mappel::estimator::HeuristicEstimator< Model >
```

Definition at line 332 of file estimator.h.

9.20.2 Constructor & Destructor Documentation

9.20.2.1 `template<class Model > mappel::estimator::HeuristicEstimator< Model >::HeuristicEstimator (const Model & model) [inline]`

Definition at line 335 of file estimator.h.

9.20.3 Member Function Documentation

9.20.3.1 `template<class Model > void mappel::estimator::ThreadedEstimator< Model >::clear_stats () [virtual], [inherited]`

Run statistics.

Reimplemented from [mappel::estimator::Estimator< Model >](#).

Reimplemented in [mappel::estimator::IterativeMaximizer< Model >](#).

Definition at line 570 of file estimator_impl.h.

References [mappel::estimator::Estimator< Model >::clear_stats\(\)](#), [mappel::estimator::ThreadedEstimator< Model >::mtx](#), and [mappel::estimator::ThreadedEstimator< Model >::num_threads](#).

Referenced by [mappel::estimator::IterativeMaximizer< Model >::clear_stats\(\)](#).

9.20.3.2 `template<class Model> void mappel::estimator::Estimator< Model >::compute_estimate_debug (const ModelDataT< Model > & im, const ParamT< Model > & theta_init, MLEDebugData & mle_debug, StencilT< Model > & mle_stencil)` [protected], [virtual], [inherited]

Virtual estimate_debug interface

Estimators that produce a sequence of results (e.g. IterativeEstimators) can override this dummy debug implementation.

Reimplemented in [mappel::estimator::IterativeMaximizer< Model >](#).

Definition at line 285 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model >::compute_estimate()`, `mappel::estimator::Estimator< Model >::model`, `mappel::estimator::MLEData::obsI`, `mappel::estimator::MLEDebugData::obsI`, `mappel::estimator::MLEData::rllh`, `mappel::estimator::MLEDebugData::rllh`, `mappel::estimator::MLEDebugData::sequence`, `mappel::estimator::MLEDebugData::sequence_rllh`, `mappel::estimator::MLEData::theta`, and `mappel::estimator::MLEDebugData::theta`.

Referenced by `mappel::estimator::Estimator< Model >::estimate_max_debug()`.

9.20.3.3 `template<class Model> void mappel::estimator::Estimator< Model >::compute_profile_bound (const ModelDataT< Model > & data, ProfileBoundsData & est, const VecT & init_step, IdxT param_idx, IdxT which_bound)` [protected], [virtual], [inherited]

Reimplemented in [mappel::estimator::IterativeMaximizer< Model >](#).

Definition at line 309 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model >::model`.

Referenced by `mappel::estimator::Estimator< Model >::estimate_profile_bounds()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel()`, and `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack()`.

9.20.3.4 `template<class Model> void mappel::estimator::Estimator< Model >::compute_profile_bound_debug (const ModelDataT< Model > & data, ProfileBoundsDebugData & est)` [protected], [virtual], [inherited]

Reimplemented in [mappel::estimator::IterativeMaximizer< Model >](#).

Definition at line 318 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model >::model`.

Referenced by `mappel::estimator::Estimator< Model >::estimate_profile_bounds_debug()`.

9.20.3.5 `template<class Model> double mappel::estimator::Estimator< Model >::compute_profile_estimate (const ModelDataT< Model > & data, const ParamT< Model > & theta_init, const IdxVecT & fixed_idxs, StencilT< Model > & max_stencil)` [protected], [virtual], [inherited]

Reimplemented in [mappel::estimator::IterativeMaximizer< Model >](#).

Definition at line 300 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model >::model`.

Referenced by `mappel::estimator::Estimator< Model >::estimate_profile_max()`, and `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_max()`.

9.20.3.6 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max (const ModelDataT< Model > & data, const ParamT< Model > & theta_init, MLEData & mle_data, StencilT< Model > & mle_stencil)`
[inherited]

Maximum likelihood point estimators Estimate for a single data starting at theta_init, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with theta_init, theta_init is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of theta_init will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 128 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model >::compute_estimate()`, `mappel::estimator::Error`, `mappel::estimator::MLEData::obsI`, `mappel::print_text_image()`, `mappel::estimator::Estimator< Model >::record_exit_code()`, `mappel::estimator::Estimator< Model >::record_walltime()`, `mappel::estimator::MLEData::rllh`, and `mappel::estimator::MLEData::theta`.

Referenced by `mappel::estimator::Estimator< Model >::estimate_max()`.

9.20.3.7 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max (const ModelDataT< Model > & data, const ParamT< Model > & theta_init, MLEData & mle_data)` [inherited]

Maximum likelihood point estimators Estimate for a single data starting at theta_init, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with theta_init, theta_init is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of theta_init will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 121 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model >::estimate_max()`.

9.20.3.8 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max (const ModelDataT< Model > & data, MLEData & mle_data) [inherited]`

Maximum likelihood point estimators Estimate for a single data starting at `theta_init`, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with `theta_init`, `theta_init` is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of `theta_init` will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 112 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::estimate_max()`, and `mappel::estimator::Estimator< Model >::model`.

9.20.3.9 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max_debug (const ModelDataT< Model > & data, const ParamT< Model > & theta_init, MLEDebugData & mle_data, StencilT< Model > & mle_stencil) [inherited]`

Debug estimation for a single data starting at `theta_init`, fill in the [MLEDebugData](#) struct with data including the sequence of evaluated points. Estimation is initialized with `theta_init`, `theta_init` is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of `theta_init` will not be modified in the initialization process.

The sequence and `sequence_rllh` parameters of the [MLEDebugData](#) struct record the entire sequence of evaluated points including `theta_init` and `theta_mle`, which should be first and last respectively.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	Initial theta value.
out	<i>mle_data</i>	MLEDebugData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

9.20.3.10 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max_debug (const ModelDataT< Model > & data, const ParamT< Model > & theta_init, MLEDebugData & mle_data)`
`[inherited]`

Maximum likelihood point estimators Estimate for a single data starting at `theta_init`, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with `theta_init`, `theta_init` is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of `theta_init` will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 157 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::compute_estimate_debug()`, `mappel::estimator::Error`, `mappel::estimator::MLEDebugData::obsI`, `mappel::print_text_image()`, `mappel::estimator::Estimator< Model >::record_exit_code()`, `mappel::estimator::Estimator< Model >::record_walltime()`, `mappel::estimator::MLEDebugData::rllh`, and `mappel::estimator::MLEDebugData::theta`.

9.20.3.11 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max_stack (const ModelDataStackT< Model > & data_stack, MLEDataStack & mle_data_stack)` `[inherited]`

Maximum likelihood point estimators Estimate for a single data starting at `theta_init`, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with `theta_init`, `theta_init` is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of `theta_init` will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 183 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::estimate_max_stack()`, and `mappel::estimator::Estimator< Model >::model`.

9.20.3.12 `template<class Model > void mappel::estimator::ThreadedEstimator< Model >::estimate_max_stack (const ModelDataStackT< Model > & data_stack, const ParamVecT< Model > & theta_init_stack, MLEDataStack & mle_data_stack)` [override],[virtual],[inherited]

Estimate for a stack of data and fill in the [MLEDataStack](#) struct with the estimated parameter, RLLH, and observed information for each data in parallel. Estimation is initialized with `theta_init`, `theta_init` is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of `theta_init` will not be modified in the initialization process.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[optional] Initial theta value for each image.
out	<i>mle</i>	MLEStackData records the maximum likelihood estimate, RLLH, and Observed information for each data

Implements [mappel::estimator::Estimator< Model >](#).

Definition at line 377 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::compute_estimate()`, `mappel::estimator::Error`, `mappel::estimator::Estimator< Model >::model`, `mappel::estimator::MLEDataStack::Ndata`, `mappel::estimator::ThreadedEstimator< Model >::num_threads`, `mappel::estimator::MLEData::obsI`, `mappel::estimator::MLEDataStack::obsI`, `mappel::print_text_image()`, `mappel::estimator::ThreadedEstimator< Model >::record_exit_code()`, `mappel::estimator::Estimator< Model >::record_walltime()`, `mappel::estimator::MLEData::rllh`, `mappel::estimator::MLEDataStack::rllh`, `mappel::estimator::MLEData::theta`, and `mappel::estimator::MLEDataStack::theta`.

9.20.3.13 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_profile_bounds (const ModelDataT< Model > & data, ProfileBoundsData & bounds_est)` [inherited]

Profile likelihood bounds computations with VM algorithm

Definition at line 220 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::compute_profile_bound()`, `mappel::estimator::Error`, `mappel::estimator::ProfileBoundsData::estimated_idx`s, `mappel::estimator::ProfileBoundsData::initialize_arrays()`, `mappel::estimator::ProfileBoundsData::mle`, `mappel::estimator::Estimator< Model >::model`, `mappel::estimator::ProfileBoundsData::Nparams_est`, `mappel::estimator::MLEData::obsI`, `mappel::print_text_image()`, `mappel::estimator::ProfileBoundsData::profile_lb`, `mappel::estimator::ProfileBoundsData::profile_points_lb`, `mappel::estimator::ProfileBoundsData::profile_points_lb_rllh`, `mappel::estimator::ProfileBoundsData::profile_points_ub`, `mappel::estimator::ProfileBoundsData::profile_ub`, `mappel::estimator::Estimator< Model >::record_exit_code()`, `mappel::estimator::Estimator< Model >::record_walltime()`, `mappel::estimator::subroutine::solve_profile_initial_step()`, `mappel::estimator::ProfileBoundsData::target_rllh_delta`, and `mappel::estimator::MLEData::theta`.

Referenced by `mappel::methods::error_bounds_profile_likelihood()`.

9.20.3.14 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_profile_bounds_debug (const ModelDataT< Model > & data, ProfileBoundsDebugData & bounds_est) [inherited]`

Profile likelihood bounds computations with VM algorithm

Definition at line 258 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model >::compute_profile_bound_debug()`, `mappel::estimator::Error`, `mappel::estimator::ProfileBoundsDebugData::estimated_idx`, `mappel::estimator::ProfileBoundsDebugData::mle`, `mappel::print_text_image()`, `mappel::estimator::Estimator< Model >::record_exit_code()`, `mappel::estimator::Estimator< Model >::record_walltime()`, `mappel::estimator::ProfileBoundsDebugData::target_rllh_delta`, and `mappel::estimator::MLEData::theta`.

Referenced by `mappel::methods::debug::error_bounds_profile_likelihood_debug()`.

9.20.3.15 `template<class Model > void mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel (const ModelDataT< Model > & data, ProfileBoundsData & bounds_est) [override], [virtual], [inherited]`

Profile likelihood bounds computations with VM algorithm

Implements [mappel::estimator::Estimator< Model >](#).

Definition at line 464 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model >::compute_profile_bound()`, `mappel::estimator::Error`, `mappel::estimator::ProfileBoundsData::estimated_idx`s, `mappel::estimator::ProfileBoundsData::initialize_arrays()`, `mappel::estimator::ProfileBoundsData::mle`, `mappel::estimator::Estimator< Model >::model`, `mappel::estimator::ProfileBoundsData::Nparams_est`, `mappel::estimator::ThreadedEstimator< Model >::num_threads`, `mappel::estimator::MLEData::obs`, `mappel::print_text_image()`, `mappel::estimator::ThreadedEstimator< Model >::record_exit_code()`, `mappel::estimator::Estimator< Model >::record_walltime()`, `mappel::estimator::subroutine::solve_profile_initial_step()`, `mappel::estimator::ProfileBoundsData::target_rllh_delta`, and `mappel::estimator::MLEData::theta`.

Referenced by `mappel::methods::openmp::error_bounds_profile_likelihood_parallel()`.

9.20.3.16 `template<class Model > void mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack (const ModelDataStackT< Model > & data_stack, ProfileBoundsDataStack & bounds_est) [override], [virtual], [inherited]`

Profile likelihood bounds computations with VM algorithm

Implements [mappel::estimator::Estimator< Model >](#).

Definition at line 500 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model >::compute_profile_bound()`, `mappel::estimator::Error`, `mappel::estimator::ProfileBoundsData::estimated_idx`s, `mappel::estimator::ProfileBoundsDataStack::estimated_idx`s, `mappel::estimator::ProfileBoundsData::initialize_arrays()`, and `mappel::estimator::ProfileBoundsDataStack::initialize_arrays()`.

mappel::estimator::ProfileBoundsData::mle, mappel::estimator::ProfileBoundsDataStack::mle, mappel::estimator::Estimator< Model >::model, mappel::estimator::ProfileBoundsDataStack::Ndata, mappel::estimator::ProfileBoundsDataStack::Nparams_est, mappel::estimator::ThreadedEstimator< Model >::num_threads, mappel::estimator::MLEData::obsI, mappel::estimator::MLEDataStack::obsI, mappel::print_text_image(), mappel::estimator::ProfileBoundsData::profile_lb, mappel::estimator::ProfileBoundsDataStack::profile_lb, mappel::estimator::ProfileBoundsData::profile_points_lb, mappel::estimator::ProfileBoundsDataStack::profile_points_lb, mappel::estimator::ProfileBoundsData::profile_points_lb_rllh, mappel::estimator::ProfileBoundsDataStack::profile_points_lb_rllh, mappel::estimator::ProfileBoundsData::profile_points_ub, mappel::estimator::ProfileBoundsDataStack::profile_points_ub, mappel::estimator::ProfileBoundsData::profile_points_ub_rllh, mappel::estimator::ProfileBoundsDataStack::profile_points_ub_rllh, mappel::estimator::ProfileBoundsData::profile_ub, mappel::estimator::ProfileBoundsDataStack::profile_ub, mappel::estimator::ThreadedEstimator< Model >::record_exit_code(), mappel::estimator::Estimator< Model >::record_walltime(), mappel::estimator::MLEData::rllh, mappel::estimator::MLEDataStack::rllh, mappel::estimator::subroutine::solve_profile_initial_step(), mappel::estimator::ProfileBoundsData::target_rllh_delta, mappel::estimator::ProfileBoundsDataStack::target_rllh_delta, mappel::estimator::MLEData::theta, and mappel::estimator::MLEDataStack::theta.

Referenced by mappel::methods::openmp::error_bounds_profile_likelihood_stack().

9.20.3.17 `template<class Model> double mappel::estimator::Estimator< Model >::estimate_profile_max (const ModelDataT< Model > & data, const IdxVecT & fixed_idx, const ParamT< Model > & fixed_theta_init, StencilT< Model > & theta_max) [inherited]`

Profile likelihood estimation methods

Definition at line 190 of file estimator_impl.h.

References mappel::estimator::Estimator< Model >::compute_profile_estimate(), mappel::estimator::Error, mappel::print_text_image(), mappel::estimator::Estimator< Model >::record_exit_code(), mappel::estimator::Estimator< Model >::record_walltime(), and mappel::methods::objective::rllh().

9.20.3.18 `template<class Model> void mappel::estimator::ThreadedEstimator< Model >::estimate_profile_max (const ModelDataT< Model > & data, const ParamVecT< Model > & fixed_theta_init, ProfileLikelihoodData & profile) [override],[virtual],[inherited]`

Profile likelihood estimation methods

Implements [mappel::estimator::Estimator< Model >](#).

Definition at line 418 of file estimator_impl.h.

References mappel::estimator::Estimator< Model >::compute_profile_estimate(), mappel::estimator::Error, mappel::estimator::ProfileLikelihoodData::fixed_idx, mappel::estimator::ProfileLikelihoodData::fixed_values, mappel::estimator::Estimator< Model >::model, mappel::estimator::ProfileLikelihoodData::Nfixed, mappel::estimator::ThreadedEstimator< Model >::num_threads, mappel::estimator::ProfileLikelihoodData::Nvalues, mappel::print_text_image(), mappel::estimator::ProfileLikelihoodData::profile_likelihood, mappel::estimator::ProfileLikelihoodData::profile_parameters, mappel::estimator::ThreadedEstimator< Model >::record_exit_code(), and mappel::estimator::Estimator< Model >::record_walltime().

9.20.3.19 `template<class Model > StatsT mappel::estimator::HeuristicEstimator< Model >::get_debug_stats ()`
`[virtual]`

Run statistics.

Reimplemented from [mappel::estimator::ThreadedEstimator< Model >](#).

Definition at line 612 of file `estimator_impl.h`.

References `mappel::cgauss_heuristic_compute_estimate()`, `mappel::estimator::ThreadedEstimator< Model >::get_stats()`, `mappel::estimator::Estimator< Model >::model`, `mappel::methods::observed_information()`, `mappel::estimator::MLEData::obsI`, `mappel::estimator::ThreadedEstimator< Model >::record_exit_code()`, `mappel::estimator::MLEData::rllh`, `mappel::methods::objective::rllh()`, `mappel::estimator::Success`, and `mappel::estimator::MLEData::theta`.

9.20.3.20 `template<class Model > IdxVecT mappel::estimator::Estimator< Model >::get_exit_counts () const`
`[inline],[inherited]`

Run statistics.

Definition at line 274 of file `estimator.h`.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.20.3.21 `template<class Model > const Model & mappel::estimator::Estimator< Model >::get_model ()`
`[inherited]`

Definition at line 108 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::model`.

9.20.3.22 `template<class Model > StatsT mappel::estimator::HeuristicEstimator< Model >::get_stats ()`
`[virtual]`

Run statistics.

Reimplemented from [mappel::estimator::ThreadedEstimator< Model >](#).

Definition at line 597 of file `estimator_impl.h`.

References `mappel::estimator::ThreadedEstimator< Model >::get_stats()`, `mappel::estimator::ThreadedEstimator< Model >::mtx`, and `mappel::estimator::Estimator< Model >::num_estimations`.

9.20.3.23 `template<class Model > std::string mappel::estimator::HeuristicEstimator< Model >::name () const`
`[inline],[virtual]`

Implements [mappel::estimator::Estimator< Model >](#).

Definition at line 339 of file `estimator.h`.

9.20.3.24 `template<class Model > void mappel::estimator::ThreadedEstimator< Model >::record_exit_code (ExitCode code)` [override], [protected], [virtual], [inherited]

Implements [mappel::estimator::Estimator< Model >](#).

Definition at line 578 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::exit_counts`, `mappel::estimator::Estimator< Model >::model`, `mappel::estimator::ThreadedEstimator< Model >::mtx`, `mappel::methods::observed_information()`, `mappel::estimator::MLEData::obsI`, `mappel::estimator::MLEData::rllh`, `mappel::methods::objective::rllh()`, `mappel::estimator::Success`, and `mappel::estimator::MLEData::theta`.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::backtrack()`, `mappel::estimator::IterativeMaximizer< Model >::convergence_test_grad_ratio()`, `mappel::estimator::IterativeMaximizer< Model >::convergence_test_step_size()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_max_stack()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_max()`, `mappel::estimator::HeuristicEstimator< Model >::get_debug_stats()`, `mappel::estimator::CGaussMLE< Model >::get_debug_stats()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, and `mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack()`.

9.20.3.25 `template<class Model > void mappel::estimator::Estimator< Model >::record_walltime (ClockT::time_point start_walltime, int num_estimations)` [protected], [inherited]

Definition at line 360 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::num_estimations`, and `mappel::estimator::Estimator< Model >::total_walltime`.

Referenced by `mappel::estimator::Estimator< Model >::estimate_max()`, `mappel::estimator::Estimator< Model >::estimate_max_debug()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_max_stack()`, `mappel::estimator::Estimator< Model >::estimate_profile_bounds()`, `mappel::estimator::Estimator< Model >::estimate_profile_bounds_debug()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack()`, `mappel::estimator::Estimator< Model >::estimate_profile_max()`, and `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_max()`.

9.20.4 Member Data Documentation

9.20.4.1 `template<class Model > IdxVecT mappel::estimator::Estimator< Model >::exit_counts` [protected], [inherited]

Definition at line 299 of file `estimator.h`.

Referenced by `mappel::estimator::Estimator< Model >::clear_stats()`, `mappel::estimator::Estimator< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, and `mappel::estimator::ThreadedEstimator< Model >::record_exit_code()`.

9.20.4.2 `template<class Model > int mappel::estimator::ThreadedEstimator< Model >::max_threads` [protected], [inherited]

Definition at line 324 of file `estimator.h`.

9.20.4.3 `template<class Model> const Model& mappel::estimator::Estimator< Model>::model` [protected],
[inherited]

Definition at line 294 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model>::backtrack()`, `mappel::estimator::IterativeMaximizer< Model>::compute_estimate()`, `mappel::estimator::Estimator< Model>::compute_estimate_debug()`, `mappel::estimator::IterativeMaximizer< Model>::compute_estimate_debug()`, `mappel::estimator::Estimator< Model>::compute_profile_bound()`, `mappel::estimator::IterativeMaximizer< Model>::compute_profile_bound()`, `mappel::estimator::Estimator< Model>::compute_profile_bound_debug()`, `mappel::estimator::IterativeMaximizer< Model>::compute_profile_bound_debug()`, `mappel::estimator::Estimator< Model>::compute_profile_estimate()`, `mappel::estimator::IterativeMaximizer< Model>::compute_profile_estimate()`, `mappel::estimator::Estimator< Model>::estimate_max()`, `mappel::estimator::Estimator< Model>::estimate_max_stack()`, `mappel::estimator::ThreadedEstimator< Model>::estimate_max_stack()`, `mappel::estimator::Estimator< Model>::estimate_profile_bounds()`, `mappel::estimator::ThreadedEstimator< Model>::estimate_profile_bounds_parallel()`, `mappel::estimator::ThreadedEstimator< Model>::estimate_profile_bounds_stack()`, `mappel::estimator::ThreadedEstimator< Model>::estimate_profile_max()`, `mappel::estimator::HeuristicEstimator< Model>::get_debug_stats()`, `mappel::estimator::CGaussMLE< Model>::get_debug_stats()`, `mappel::estimator::Estimator< Model>::get_model()`, `mappel::estimator::IterativeMaximizer< Model>::local_maximize()`, `mappel::estimator::IterativeMaximizer< Model>::local_profile_maximize()`, `mappel::estimator::IterativeMaximizer< Model>::profile_bound_backtrack()`, and `mappel::estimator::ThreadedEstimator< Model>::record_exit_code()`.

9.20.4.4 `template<class Model> std::mutex mappel::estimator::ThreadedEstimator< Model>::mtx` [protected],
[inherited]

Definition at line 326 of file estimator.h.

Referenced by `mappel::estimator::ThreadedEstimator< Model>::clear_stats()`, `mappel::estimator::IterativeMaximizer< Model>::clear_stats()`, `mappel::estimator::ThreadedEstimator< Model>::get_stats()`, `mappel::estimator::HeuristicEstimator< Model>::get_stats()`, `mappel::estimator::CGaussHeuristicEstimator< Model>::get_stats()`, `mappel::estimator::CGaussMLE< Model>::get_stats()`, `mappel::estimator::SimulatedAnnealingMaximizer< Model>::get_stats()`, `mappel::estimator::IterativeMaximizer< Model>::get_stats()`, `mappel::estimator::IterativeMaximizer< Model>::local_profile_maximize()`, `mappel::estimator::ThreadedEstimator< Model>::record_exit_code()`, and `mappel::estimator::IterativeMaximizer< Model>::record_run_statistics()`.

9.20.4.5 `template<class Model> int mappel::estimator::Estimator< Model>::num_estimations = 0` [protected],
[inherited]

Definition at line 297 of file estimator.h.

Referenced by `mappel::estimator::Estimator< Model>::clear_stats()`, `mappel::estimator::Estimator< Model>::get_stats()`, `mappel::estimator::ThreadedEstimator< Model>::get_stats()`, `mappel::estimator::HeuristicEstimator< Model>::get_stats()`, `mappel::estimator::CGaussHeuristicEstimator< Model>::get_stats()`, `mappel::estimator::CGaussMLE< Model>::get_stats()`, `mappel::estimator::SimulatedAnnealingMaximizer< Model>::get_stats()`, `mappel::estimator::IterativeMaximizer< Model>::get_stats()`, and `mappel::estimator::Estimator< Model>::record_walltime()`.

9.20.4.6 `template<class Model> int mappel::estimator::ThreadedEstimator< Model>::num_threads` [protected],
[inherited]

Definition at line 325 of file estimator.h.

Referenced by `mappel::estimator::ThreadedEstimator< Model>::clear_stats()`, `mappel::estimator::ThreadedEstimator< Model>::estimate_max_stack()`, `mappel::estimator::ThreadedEstimator< Model>::estimate_profile_bounds_parallel()`, `mappel::estimator::ThreadedEstimator< Model>::estimate_profile_bounds_stack()`, `mappel::estimator::ThreadedEstimator< Model>::estimate_profile_max()`, and `mappel::estimator::ThreadedEstimator< Model>::get_stats()`.

9.20.4.7 `template<class Model > double mappel::estimator::Estimator< Model >::total_walltime = 0.` [protected], [inherited]

Definition at line 298 of file estimator.h.

Referenced by `mappel::estimator::Estimator< Model >::clear_stats()`, `mappel::estimator::Estimator< Model >::get_stats()`, `mappel::estimator::ThreadedEstimator< Model >::get_stats()`, and `mappel::estimator::Estimator< Model >::record_walltime()`.

The documentation for this class was generated from the following files:


- [estimator.h](#)
- [estimator_impl.h](#)

9.21 mappel::ImageFormat1DBase Class Reference

A virtual base class for 2D image localization objectives.

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/ImageFormat1DBase.h>
```

Inheritance diagram for `mappel::ImageFormat1DBase`:

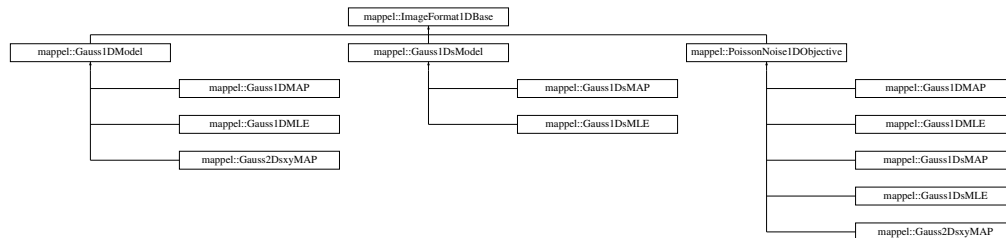

Public Types

- using `ImageCoordT` = `uint32_t`
- using `ImagePixelT` = `double`
- `template<class CoordT >`
using `ImageSizeShapeT` = `CoordT`
- `template<class CoordT >`
using `ImageSizeVecShapeT` = `arma::Col< CoordT >`
- using `ImageSizeT` = `ImageSizeShapeT< ImageCoordT >`
- using `ImageSizeVecT` = `ImageSizeVecShapeT< ImageCoordT >`
- `template<class PixelT >`
using `ImageShapeT` = `arma::Col< PixelT >`
- `template<class PixelT >`
using `ImageStackShapeT` = `arma::Mat< PixelT >`
- using `ImageT` = `ImageShapeT< ImagePixelT >`
- using `ImageStackT` = `ImageStackShapeT< ImagePixelT >`

Public Member Functions

- [StatsT get_stats](#) () const
- [ImageT make_image](#) () const
- [ImageStackT make_image_stack](#) ([ImageCoordT](#) n) const
- [ImageCoordT get_size_image_stack](#) (const [ImageStackT](#) &stack) const
- [ImageT get_image_from_stack](#) (const [ImageStackT](#) &stack, [ImageCoordT](#) n) const
- template<class ImT >
void [set_image_in_stack](#) ([ImageStackT](#) &stack, [ImageCoordT](#) n, const ImT &im) const
- [ImageSizeT get_size](#) () const
- [ImageCoordT get_size](#) ([IdxT](#) idx) const
- [ImageCoordT get_num_pixels](#) () const
- void [set_size](#) (const [ImageSizeT](#) &size_)
- void [set_size](#) (const arma::Col< [ImageCoordT](#) > &sz)
- void [check_image_shape](#) (const [ImageT](#) &im) const
Check the shape of a single images is correct for model size.
- void [check_image_shape](#) (const [ImageStackT](#) &ims) const
Check the shape of a stack of images is correct for model size.

Static Public Member Functions

- static void [check_size](#) (const [ImageSizeT](#) &size_)
Check the size argument for the model.

Static Public Attributes

- static const [ImageCoordT](#) num_dim = 1
- static const [ImageCoordT](#) global_min_size = 3
- static const [ImageCoordT](#) global_max_size = 512

Protected Member Functions

- [ImageFormat1DBase](#) ()=default
- [ImageFormat1DBase](#) ([ImageSizeT](#) size_)

Protected Attributes

- [ImageSizeT](#) size

9.21.1 Detailed Description

A virtual base class for 2D image localization objectives.

This class should be inherited virtually by both the model and the objective so that the common image information and functions are available in both Model and Objective classes hierarchies

Definition at line 23 of file [ImageFormat1DBase.h](#).

9.21.2 Member Typedef Documentation

9.21.2.1 using mappel::ImageFormat1DBase::ImageCoordT = uint32_t

Image size coordinate storage type

Definition at line 25 of file ImageFormat1DBase.h.

9.21.2.2 using mappel::ImageFormat1DBase::ImagePixelT = double

Image pixel storage type

Definition at line 26 of file ImageFormat1DBase.h.

9.21.2.3 template<class PixelT > using mappel::ImageFormat1DBase::ImageShapeT = arma::Col<PixelT>

Shape of the data type for a single image

Definition at line 33 of file ImageFormat1DBase.h.

9.21.2.4 template<class CoordT > using mappel::ImageFormat1DBase::ImageSizeShapeT = CoordT

Shape of the data type to store 1-image's coordinates

Definition at line 28 of file ImageFormat1DBase.h.

9.21.2.5 using mappel::ImageFormat1DBase::ImageSizeT = ImageSizeShapeT<ImageCoordT>

Data type for a single image size

Definition at line 30 of file ImageFormat1DBase.h.

9.21.2.6 template<class CoordT > using mappel::ImageFormat1DBase::ImageSizeVecShapeT = arma::Col<CoordT>

Shape of the data type to store a vector of image's coordinates

Definition at line 29 of file ImageFormat1DBase.h.

9.21.2.7 using mappel::ImageFormat1DBase::ImageSizeVecT = ImageSizeVecShapeT<ImageCoordT>

Data type for a sequence of image sizes

Definition at line 31 of file ImageFormat1DBase.h.

9.21.2.8 template<class PixelT > using mappel::ImageFormat1DBase::ImageStackShapeT = arma::Mat<PixelT>

Shape of the data type for a sequence of images

Definition at line 34 of file ImageFormat1DBase.h.

9.21.2.9 `using mappel::ImageFormat1DBase::ImageStackT = ImageStackShapeT<ImagePixelT>`

Data type to represent a sequence of images

Definition at line 36 of file ImageFormat1DBase.h.

9.21.2.10 `using mappel::ImageFormat1DBase::ImageT = ImageShapeT<ImagePixelT>`

Data type to represent single image

Definition at line 35 of file ImageFormat1DBase.h.

9.21.3 Constructor & Destructor Documentation

9.21.3.1 `mappel::ImageFormat1DBase::ImageFormat1DBase ()` `[protected]`, `[default]`

9.21.3.2 `ImageFormat1DBase::ImageFormat1DBase (ImageSizeT size_)` `[explicit]`, `[protected]`

Definition at line 13 of file ImageFormat1DBase.cpp.

References `check_size()`.

9.21.4 Member Function Documentation

9.21.4.1 `void ImageFormat1DBase::check_image_shape (const ImageT & im) const`

Check the shape of a single images is correct for model size.

Definition at line 59 of file ImageFormat1DBase.cpp.

References `size`.

9.21.4.2 `void ImageFormat1DBase::check_image_shape (const ImageStackT & ims) const`

Check the shape of a stack of images is correct for model size.

Definition at line 71 of file ImageFormat1DBase.cpp.

References `size`.

9.21.4.3 `void ImageFormat1DBase::check_size (const ImageSizeT & size_)` `[static]`

Check the size argument for the model.

Definition at line 39 of file ImageFormat1DBase.cpp.

References `global_max_size`, and `global_min_size`.

Referenced by `ImageFormat1DBase()`, and `set_size()`.

9.21.4.4 `ImageFormat1DBase::ImageT ImageFormat1DBase::get_image_from_stack (const ImageStackT & stack, ImageCoordT n) const [inline]`

Definition at line 108 of file ImageFormat1DBase.h.

9.21.4.5 `ImageFormat1DBase::ImageCoordT ImageFormat1DBase::get_num_pixels () const [inline]`

Definition at line 82 of file ImageFormat1DBase.h.

References size.

Referenced by get_stats().

9.21.4.6 `ImageFormat1DBase::ImageSizeT ImageFormat1DBase::get_size () const [inline]`

Definition at line 71 of file ImageFormat1DBase.h.

References size.

Referenced by get_stats().

9.21.4.7 `ImageFormat1DBase::ImageCoordT ImageFormat1DBase::get_size (IdxT idx) const`

Definition at line 20 of file ImageFormat1DBase.cpp.

References size.

9.21.4.8 `ImageFormat1DBase::ImageCoordT ImageFormat1DBase::get_size_image_stack (const ImageStackT & stack) const [inline]`

Definition at line 101 of file ImageFormat1DBase.h.

9.21.4.9 `StatsT ImageFormat1DBase::get_stats () const`

Definition at line 81 of file ImageFormat1DBase.cpp.

References get_num_pixels(), get_size(), and num_dim.

Referenced by mappel::Gauss1DModel::get_stats(), and mappel::Gauss1DsModel::get_stats().

9.21.4.10 `ImageFormat1DBase::ImageT ImageFormat1DBase::make_image () const [inline]`

Definition at line 87 of file ImageFormat1DBase.h.

References size.

9.21.4.11 `ImageFormat1DBase::ImageStackT ImageFormat1DBase::make_image_stack (ImageCoordT n) const`
`[inline]`

Definition at line 94 of file ImageFormat1DBase.h.

References `size`.

9.21.4.12 `template<class ImT > void ImageFormat1DBase::set_image_in_stack (ImageStackT & stack, ImageCoordT n,
const ImT & im) const`

Definition at line 115 of file ImageFormat1DBase.h.

9.21.4.13 `void ImageFormat1DBase::set_size (const ImageSizeT & size_)`

Definition at line 30 of file ImageFormat1DBase.cpp.

References `check_size()`, and `size`.

Referenced by `set_size()`, `mappel::Gauss2DModel::set_size()`, and `mappel::Gauss2DsModel::set_size()`.

9.21.4.14 `void ImageFormat1DBase::set_size (const arma::Col< ImageCoordT > & sz)` `[inline]`

Definition at line 75 of file ImageFormat1DBase.h.

References `set_size()`.

9.21.5 Member Data Documentation

9.21.5.1 `const ImageFormat1DBase::ImageCoordT ImageFormat1DBase::global_max_size = 512` `[static]`

Maximum size along any dimension of the image. This is insanely big to catch obvious errors

Definition at line 40 of file ImageFormat1DBase.h.

Referenced by `check_size()`.

9.21.5.2 `const ImageFormat1DBase::ImageCoordT ImageFormat1DBase::global_min_size = 3` `[static]`

Minimum size along any dimension of the image.

Definition at line 39 of file ImageFormat1DBase.h.

Referenced by `check_size()`.

9.21.5.3 `const ImageFormat1DBase::ImageCoordT ImageFormat1DBase::num_dim = 1` `[static]`

Number of image dimensions.

Definition at line 38 of file ImageFormat1DBase.h.

Referenced by `get_stats()`.

9.21.5.4 ImageSizeT mappel::ImageFormat1DBase::size [protected]

Number of pixels in X dimension for 1D image

Definition at line 65 of file ImageFormat1DBase.h.

Referenced by check_image_shape(), mappel::Gauss1DsModel::Stencil::compute_derivatives(), mappel::Gauss1DModel::Stencil::compute_derivatives(), get_num_pixels(), get_size(), mappel::Gauss1DModel::initial_theta_estimate(), mappel::Gauss1DsModel::initial_theta_estimate(), make_image(), make_image_stack(), set_size(), mappel::Gauss1DsModel::Stencil::Stencil(), and mappel::Gauss1DModel::Stencil::Stencil().

The documentation for this class was generated from the following files:


- [ImageFormat1DBase.h](#)
- [ImageFormat1DBase.cpp](#)

9.22 mappel::ImageFormat2DBase Class Reference

A virtual base class for 2D image localization objectives.

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/ImageFormat2DBase.h>
```

Inheritance diagram for mappel::ImageFormat2DBase:

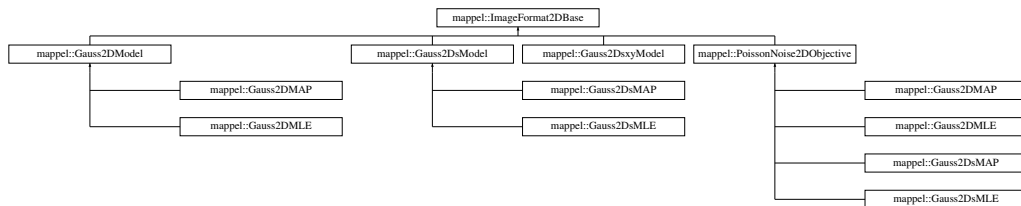

Public Types

- using [ImageCoordT](#) = uint32_t
- using [ImagePixelT](#) = double
- template<class CoordT >
using [ImageSizeShapeT](#) = arma::Col< CoordT >
- template<class CoordT >
using [ImageSizeVecShapeT](#) = arma::Mat< CoordT >
- using [ImageSizeT](#) = [ImageSizeShapeT](#)< [ImageCoordT](#) >
- using [ImageSizeVecT](#) = [ImageSizeVecShapeT](#)< [ImageCoordT](#) >
- template<class PixelT >
using [ImageShapeT](#) = arma::Mat< PixelT >
- template<class PixelT >
using [ImageStackShapeT](#) = arma::Cube< PixelT >
- using [ImageT](#) = [ImageShapeT](#)< [ImagePixelT](#) >
- using [ImageStackT](#) = [ImageStackShapeT](#)< [ImagePixelT](#) >

Public Member Functions

- [StatsT get_stats](#) () const
- [ImageT make_image](#) () const
- [ImageStackT make_image_stack](#) ([ImageCoordT](#) n) const
- [ImageCoordT get_size_image_stack](#) (const [ImageStackT](#) &stack) const
- [ImageT get_image_from_stack](#) (const [ImageStackT](#) &stack, [ImageCoordT](#) n) const
- template<class [ImT](#) >
void [set_image_in_stack](#) ([ImageStackT](#) &stack, [ImageCoordT](#) n, const [ImT](#) &im) const
- const [ImageSizeT](#) & [get_size](#) () const
- [ImageCoordT get_size](#) ([IdxT](#) idx) const
- [ImageCoordT get_num_pixels](#) () const
- void [set_size](#) (const [ImageSizeT](#) &size_)
- void [check_image_shape](#) (const [ImageT](#) &im) const
Check the shape of a single images is correct for model size.
- void [check_image_shape](#) (const [ImageStackT](#) &ims) const
Check the shape of a stack of images is correct for model size.

Static Public Member Functions

- static void [check_size](#) (const [ImageSizeT](#) &size_)
Check the size argument for the model.

Static Public Attributes

- static const [ImageCoordT](#) [num_dim](#) =2
- static const [ImageCoordT](#) [global_min_size](#) =3
- static const [ImageCoordT](#) [global_max_size](#) =512

Protected Member Functions

- [ImageFormat2DBase](#) ()=default
- [ImageFormat2DBase](#) (const [ImageSizeT](#) &size)
- [ImageFormat2DBase](#) (const [ImageFormat2DBase](#) &)
- [ImageFormat2DBase](#) ([ImageFormat2DBase](#) &&)
- [ImageFormat2DBase](#) & [operator=](#) (const [ImageFormat2DBase](#) &)
- [ImageFormat2DBase](#) & [operator=](#) ([ImageFormat2DBase](#) &&)

Protected Attributes

- [ImageSizeT](#) [size](#)

9.22.1 Detailed Description

A virtual base class for 2D image localization objectives.

This class should be inherited virtually by both the model and the objective so that the common image information and functions are available in both Model and Objective classes hierarchies

Definition at line 22 of file ImageFormat2DBase.h.

9.22.2 Member Typedef Documentation

9.22.2.1 using mappel::ImageFormat2DBase::ImageCoordT = uint32_t

Image size coordinate storage type

Definition at line 24 of file ImageFormat2DBase.h.

9.22.2.2 using mappel::ImageFormat2DBase::ImagePixelT = double

Image pixel storage type

Definition at line 25 of file ImageFormat2DBase.h.

9.22.2.3 template<class PixelT > using mappel::ImageFormat2DBase::ImageShapeT = arma::Mat<PixelT>

Shape of the data type for a single image

Definition at line 32 of file ImageFormat2DBase.h.

9.22.2.4 template<class CoordT > using mappel::ImageFormat2DBase::ImageSizeShapeT = arma::Col<CoordT>

Shape of the data type to store a single image's coordinates

Definition at line 27 of file ImageFormat2DBase.h.

9.22.2.5 using mappel::ImageFormat2DBase::ImageSizeT = ImageSizeShapeT<ImageCoordT>

Data type for a single image size

Definition at line 29 of file ImageFormat2DBase.h.

9.22.2.6 template<class CoordT > using mappel::ImageFormat2DBase::ImageSizeVecShapeT = arma::Mat<CoordT>

Shape of the data type to store a vector of image's coordinates

Definition at line 28 of file ImageFormat2DBase.h.

9.22.2.7 `using mappel::ImageFormat2DBase::ImageSizeVecT = ImageSizeVecShapeT<ImageCoordT>`

Data type for a sequence of image sizes

Definition at line 30 of file ImageFormat2DBase.h.

9.22.2.8 `template<class PixelT > using mappel::ImageFormat2DBase::ImageStackShapeT = arma::Cube<PixelT>`

Shape of the data type for a sequence of images

Definition at line 33 of file ImageFormat2DBase.h.

9.22.2.9 `using mappel::ImageFormat2DBase::ImageStackT = ImageStackShapeT<ImagePixelT>`

Data type to represent a sequence of images

Definition at line 35 of file ImageFormat2DBase.h.

9.22.2.10 `using mappel::ImageFormat2DBase::ImageT = ImageShapeT<ImagePixelT>`

Data type to represent single image

Definition at line 34 of file ImageFormat2DBase.h.

9.22.3 Constructor & Destructor Documentation

9.22.3.1 `mappel::ImageFormat2DBase::ImageFormat2DBase () [protected],[default]`

9.22.3.2 `mappel::ImageFormat2DBase::ImageFormat2DBase (const ImageSizeT & size) [explicit],[protected]`

Definition at line 13 of file ImageFormat2DBase.cpp.

References `check_size()`.

9.22.3.3 `mappel::ImageFormat2DBase::ImageFormat2DBase (const ImageFormat2DBase & o) [protected]`

Definition at line 19 of file ImageFormat2DBase.cpp.

9.22.3.4 `mappel::ImageFormat2DBase::ImageFormat2DBase (ImageFormat2DBase && o) [protected]`

Definition at line 23 of file ImageFormat2DBase.cpp.

9.22.4 Member Function Documentation

9.22.4.1 void mappel::ImageFormat2DBase::check_image_shape (const ImageT & *im*) const

Check the shape of a single images is correct for model size.

Definition at line 80 of file ImageFormat2DBase.cpp.

References size.

9.22.4.2 void mappel::ImageFormat2DBase::check_image_shape (const ImageStackT & *ims*) const

Check the shape of a stack of images is correct for model size.

Definition at line 93 of file ImageFormat2DBase.cpp.

References size.

9.22.4.3 void mappel::ImageFormat2DBase::check_size (const ImageSizeT & *size_*) [static]

Check the size argument for the model.

Definition at line 60 of file ImageFormat2DBase.cpp.

References global_max_size, and global_min_size.

Referenced by ImageFormat2DBase(), and set_size().

9.22.4.4 ImageFormat2DBase::ImageT mappel::ImageFormat2DBase::get_image_from_stack (const ImageStackT & *stack*, ImageCoordT *n*) const [inline]

Definition at line 106 of file ImageFormat2DBase.h.

9.22.4.5 ImageFormat2DBase::ImageCoordT mappel::ImageFormat2DBase::get_num_pixels () const [inline]

Definition at line 79 of file ImageFormat2DBase.h.

References size.

Referenced by get_stats().

9.22.4.6 const ImageFormat2DBase::ImageSizeT & mappel::ImageFormat2DBase::get_size () const [inline]

Definition at line 74 of file ImageFormat2DBase.h.

References size.

9.22.4.7 **ImageFormat2DBase::ImageCoordT** mappel::ImageFormat2DBase::get_size (**IdxT idx**) const

Definition at line 41 of file ImageFormat2DBase.cpp.

References size.

9.22.4.8 **ImageFormat2DBase::ImageCoordT** mappel::ImageFormat2DBase::get_size_image_stack (const **ImageStackT & stack**) const `[inline]`

Definition at line 99 of file ImageFormat2DBase.h.

9.22.4.9 **StatsT** mappel::ImageFormat2DBase::get_stats () const

Definition at line 103 of file ImageFormat2DBase.cpp.

References get_num_pixels(), num_dim, and size.

Referenced by mappel::Gauss2DModel::get_stats(), and mappel::Gauss2DsModel::get_stats().

9.22.4.10 **ImageFormat2DBase::ImageT** mappel::ImageFormat2DBase::make_image () const `[inline]`

Definition at line 85 of file ImageFormat2DBase.h.

References size.

9.22.4.11 **ImageFormat2DBase::ImageStackT** mappel::ImageFormat2DBase::make_image_stack (**ImageCoordT n**) const `[inline]`

Definition at line 92 of file ImageFormat2DBase.h.

References size.

9.22.4.12 **ImageFormat2DBase & mappel::ImageFormat2DBase::operator=** (const **ImageFormat2DBase & o**) `[protected]`

Definition at line 27 of file ImageFormat2DBase.cpp.

References size.

Referenced by mappel::Gauss2DsMAP::operator=(), mappel::Gauss2DsMLE::operator=(), mappel::Gauss2DMAP↔::operator=(), and mappel::Gauss2DMLE::operator=().

9.22.4.13 **ImageFormat2DBase & mappel::ImageFormat2DBase::operator=** (**ImageFormat2DBase && o**) `[protected]`

Definition at line 33 of file ImageFormat2DBase.cpp.

References size.

9.22.4.14 `template<class ImT > void mappel::ImageFormat2DBase::set_image_in_stack (ImageStackT & stack, ImageCoordT n, const ImT & im) const`

Definition at line 113 of file ImageFormat2DBase.h.

9.22.4.15 `void mappel::ImageFormat2DBase::set_size (const ImageSizeT & size_)`

Definition at line 51 of file ImageFormat2DBase.cpp.

References `check_size()`, and `size`.

Referenced by `mappel::Gauss2DModel::set_size()`, and `mappel::Gauss2DsModel::set_size()`.

9.22.5 Member Data Documentation

9.22.5.1 `const ImageFormat2DBase::ImageCoordT mappel::ImageFormat2DBase::global_max_size=512` `[static]`

Maximum size along any dimension of the image. This is insanely big to catch obvious errors

Definition at line 39 of file ImageFormat2DBase.h.

Referenced by `check_size()`.

9.22.5.2 `const ImageFormat2DBase::ImageCoordT mappel::ImageFormat2DBase::global_min_size=3` `[static]`

Minimum size along any dimension of the image.

Definition at line 38 of file ImageFormat2DBase.h.

Referenced by `check_size()`.

9.22.5.3 `const ImageFormat2DBase::ImageCoordT mappel::ImageFormat2DBase::num_dim=2` `[static]`

Number of image dimensions.

Definition at line 37 of file ImageFormat2DBase.h.

Referenced by `get_stats()`.

9.22.5.4 `ImageSizeT` `mappel::ImageFormat2DBase::size` [protected]

Number of pixels in X dimension for 1D image

Definition at line 67 of file `ImageFormat2DBase.h`.

Referenced by `mappel::cgauss_compute_estimate()`, `mappel::cgauss_compute_estimate_debug()`, `mappel::cgauss_`
`_heuristic_compute_estimate()`, `check_image_shape()`, `mappel::Gauss2DModel::Stencil::compute_derivatives()`,
`mappel::Gauss2DsModel::Stencil::compute_derivatives()`, `mappel::Gauss2DModel::debug_internal_sum_model_`
`y()`, `mappel::Gauss2DsModel::debug_internal_sum_model_y()`, `mappel::methods::expected_information()`, `mappel::`
`Gauss2DModel::Gauss2DModel()`, `mappel::Gauss2DsMAP::Gauss2DsMAP()`, `mappel::Gauss2DsMLE::Gauss2Ds`
`MLE()`, `mappel::Gauss2DsModel::Gauss2DsModel()`, `get_num_pixels()`, `get_size()`, `get_stats()`, `mappel::methods`
`::likelihood::grad()`, `mappel::methods::likelihood::grad2()`, `mappel::methods::likelihood::debug::grad_components()`,
`mappel::methods::likelihood::hessian()`, `mappel::methods::likelihood::debug::hessian_components()`, `mappel::`
`Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsModel::initial_theta_estimate()`, `mappel::methods`
`::likelihood::llh()`, `mappel::methods::likelihood::debug::llh_components()`, `mappel::Gauss2DModel::make_default_`
`prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_`
`_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, `make_image()`,
`make_image_stack()`, `mappel::Gauss2DModel::make_internal_1Dsum_estimator()`, `mappel::Gauss2DsModel::make_`
`_internal_1Dsum_estimator()`, `mappel::Gauss2DModel::make_prior_beta_position()`, `mappel::Gauss2DsModel`
`::make_prior_beta_position()`, `mappel::Gauss2DModel::make_prior_normal_position()`, `mappel::Gauss2DsModel`
`::make_prior_normal_position()`, `mappel::methods::model_image()`, `operator=()`, `mappel::methods::likelihood::rllh()`,
`mappel::methods::likelihood::debug::rllh_components()`, `set_size()`, `mappel::Gauss2DModel::set_size()`, `mappel::`
`Gauss2DsModel::set_size()`, `mappel::methods::simulate_image()`, `mappel::methods::simulate_image_from_model()`,
`mappel::Gauss2DModel::Stencil::Stencil()`, `mappel::Gauss2DsModel::Stencil::Stencil()`, `mappel::Gauss2DModel`
`::update_internal_1Dsum_estimators()`, and `mappel::Gauss2DsModel::update_internal_1Dsum_estimators()`.


The documentation for this class was generated from the following files:

- [ImageFormat2DBase.h](#)
- [ImageFormat2DBase.cpp](#)

9.23 `mappel::estimator::IterativeMaximizer< Model >` Class Template Reference

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/estimator.h>
```

Inheritance diagram for `mappel::estimator::IterativeMaximizer< Model >`:

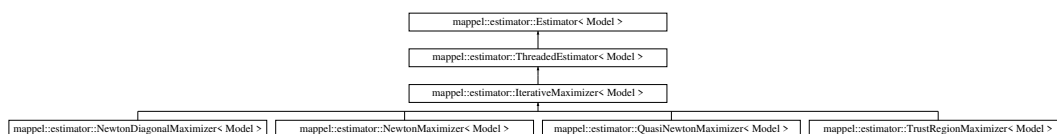

Classes

- class [MaximizerData](#)

Public Member Functions

- [IterativeMaximizer](#) (const Model &model, int max_iterations=DefaultIterations)
 - double [mean_iterations](#) ()
 - double [mean_backtracks](#) ()
 - double [mean_fun_evals](#) ()
 - double [mean_der_evals](#) ()
 - StatsT [get_stats](#) ()
 - StatsT [get_debug_stats](#) ()
 - void [clear_stats](#) ()
 - int [get_total_iterations](#) () const
 - int [get_total_backtracks](#) () const
 - int [get_total_fun_evals](#) () const
 - int [get_total_der_evals](#) () const
 - void [local_maximize](#) (const ModelDataT< Model > &im, StencilT< Model > &stencil, MLEData &data)
 - Perform a local maximization to finish off a simulated annealing run.*
 - void [local_maximize](#) (const ModelDataT< Model > &im, StencilT< Model > &stencil, MLEDebugData &debug←_data)
 - void [local_profile_maximize](#) (const ModelDataT< Model > &im, const IdxVecT &fixed_param_idxes, StencilT< Model > &stencil, MLEDebugData &mle)
 - void [estimate_max_stack](#) (const ModelDataStackT< Model > &data, const ParamVecT< Model > &theta_init←_stack, MLEDataStack &mle_data_stack) override
 - void [estimate_profile_max](#) (const ModelDataT< Model > &data, const ParamVecT< Model > &theta_init, ProfileLikelihoodData &profile) override
 - void [estimate_profile_bounds_parallel](#) (const ModelDataT< Model > &data, ProfileBoundsData &bounds_est) override
 - void [estimate_profile_bounds_stack](#) (const ModelDataStackT< Model > &data, ProfileBoundsDataStack &bounds_est_stack) override
 - virtual std::string [name](#) () const =0
 - const Model & [get_model](#) ()
-
- void [estimate_max_stack](#) (const ModelDataStackT< Model > &data_stack, MLEDataStack &mle_data_stack)
 - void [estimate_max](#) (const ModelDataT< Model > &data, const ParamT< Model > &theta_init, MLEData &mle←_data, StencilT< Model > &mle_stencil)
 - void [estimate_max](#) (const ModelDataT< Model > &data, const ParamT< Model > &theta_init, MLEData &mle←_data)
 - void [estimate_max](#) (const ModelDataT< Model > &data, MLEData &mle_data)
 - void [estimate_max_debug](#) (const ModelDataT< Model > &data, const ParamT< Model > &theta_init, MLE←_DebugData &mle_data, StencilT< Model > &mle_stencil)
 - void [estimate_max_debug](#) (const ModelDataT< Model > &data, const ParamT< Model > &theta_init, MLE←_DebugData &mle_data)
-
- double [estimate_profile_max](#) (const ModelDataT< Model > &data, const IdxVecT &fixed_idxes, const ParamT< Model > &fixed_theta_init, StencilT< Model > &theta_max)
-
- void [estimate_profile_bounds](#) (const ModelDataT< Model > &data, ProfileBoundsData &bounds_est)
 - void [estimate_profile_bounds_debug](#) (const ModelDataT< Model > &data, ProfileBoundsDebugData &bounds←_est)
-
- IdxVecT [get_exit_counts](#) () const

Static Public Attributes

- static const int `DefaultIterations` =100

Protected Member Functions

- void `record_run_statistics` (const `MaximizerData` &data)
- void `compute_estimate` (const `ModelDataT`< Model > &data, const `ParamT`< Model > &theta_init, `MLEDData` &mle_data, `StencilT`< Model > &mle_stencil) override
- void `compute_estimate_debug` (const `ModelDataT`< Model > &data, const `ParamT`< Model > &theta_init, `MLEDData` &mle_data, `StencilT`< Model > &mle_stencil) override
- double `compute_profile_estimate` (const `ModelDataT`< Model > &data, const `ParamT`< Model > &theta_init, const `IdxVecT` &fixed_idx, `StencilT`< Model > &theta_max) override
- void `compute_profile_bound` (const `ModelDataT`< Model > &data, `ProfileBoundsData` &est, const `VecT` &init_← step, `IdxT` param_idx, `IdxT` which_bound) override
- void `compute_profile_bound_debug` (const `ModelDataT`< Model > &data, `ProfileBoundsDebugData` &bounds) override
- bool `backtrack` (`MaximizerData` &data)
- bool `profile_bound_backtrack` (`MaximizerData` &data, `IdxT` fixed_idx, double target_rllh, double old_fval, const `VecT` &fgrad)
- virtual void `maximize` (`MaximizerData` &data)=0
- virtual void `solve_profile_bound` (`MaximizerData` &data, `MLEDData` &mle, double llh_delta, `IdxT` fixed_idx, `IdxT` which_bound)
- bool `convergence_test_grad_ratio` (const `VecT` &grad, double fval)
- bool `convergence_test_step_size` (const `VecT` &new_theta, const `VecT` &old_theta)
- void `record_exit_code` (`ExitCode` code) override
- void `record_walltime` (`ClockT`::time_point start_walltime, int num_estimations)

Protected Attributes

- int `max_iterations`
- int `total_iterations` = 0
- int `total_backtracks` = 0
- int `total_fun_evals` = 0
- int `total_der_evals` = 0
- `IdxVecT` `last_backtrack_idx`

Debugging: Stores last set of backtrack_idx when data.save_seq==true.

- int `max_threads`
- int `num_threads`
- std::mutex `mtx`
- const Model & `model`
- int `num_estimations` = 0
- double `total_walltime` = 0.
- `IdxVecT` `exit_counts`

Static Protected Attributes

- static const double [min_eigenvalue_correction_delta](#) = 1e-3
Ensure the minimum eigenvalue is at least this big when correcting indefinite matrix.
- static const double [convergence_min_function_change_ratio](#) = 1.0e-9
Convergence criteria: tolerance for function-value change.
- static const double [convergence_min_step_size_ratio](#) = 1.0e-9
Convergence criteria: tolerance of relative step size.
- static const double [backtrack_min_ratio](#) = 0.05
- static const double [backtrack_max_ratio](#) = 0.50
- static const double [backtrack_min_linear_step_ratio](#) = 1e-3
- static const int [max_backtracks](#) = 8
- static const double [min_profile_bound_residual](#) = 1e-4
Minimum residual in quadratic solutions of equation (8) to accept. Revert to newton step.

9.23.1 Detailed Description

```
template<class Model>
class mappel::estimator::IterativeMaximizer< Model >
```

Definition at line 424 of file estimator.h.

9.23.2 Constructor & Destructor Documentation

9.23.2.1 `template<class Model > mappel::estimator::IterativeMaximizer< Model >::IterativeMaximizer (const Model & model, int max_iterations = DefaultIterations)`

Definition at line 732 of file estimator_impl.h.

9.23.3 Member Function Documentation

9.23.3.1 `template<class Model > bool mappel::estimator::IterativeMaximizer< Model >::backtrack (MaximizerData & data) [protected]`

Definition at line 870 of file estimator_impl.h.

References `mappel::estimator::IterativeMaximizer< Model >::backtrack_min_linear_step_ratio`, `mappel::clamp()`, `mappel::estimator::IterativeMaximizer< Model >::convergence_min_step_size_ratio`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::grad`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::im`, `mappel::estimator::IterativeMaximizer< Model >::max_backtracks`, `mappel::estimator::MaxBacktracks`, `mappel::estimator::Estimator< Model >::model`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::record_backtrack()`, `mappel::estimator::ThreadedEstimator< Model >::record_exit_code()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::record_iteration()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::restore_stencil()`, `mappel::methods::objective::rllh()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::rllh`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::save_stencil()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::saved_theta()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::set_stencil()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::stencil()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::step`, `mappel::estimator::StepSize`, and `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::theta()`.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.23.3.2 `template<class Model> void mappel::estimator::IterativeMaximizer< Model>::clear_stats () [virtual]`

Run statistics.

Reimplemented from [mappel::estimator::ThreadedEstimator< Model>](#).

Definition at line 848 of file `estimator_impl.h`.

References `mappel::estimator::ThreadedEstimator< Model>::clear_stats()`, `mappel::estimator::ThreadedEstimator< Model>::mtx`, `mappel::estimator::IterativeMaximizer< Model>::total_backtracks`, `mappel::estimator::IterativeMaximizer< Model>::total_der_evals`, `mappel::estimator::IterativeMaximizer< Model>::total_fun_evals`, and `mappel::estimator::IterativeMaximizer< Model>::total_iterations`.

9.23.3.3 `template<class Model> void mappel::estimator::IterativeMaximizer< Model>::compute_estimate (const ModelDataT< Model> & data, const ParamT< Model> & theta_init, MLEData & mle_data, StencilT< Model> & mle_stencil) [override], [protected], [virtual]`

Implements [mappel::estimator::Estimator< Model>](#).

Definition at line 1043 of file `estimator_impl.h`.

References `mappel::estimator::IterativeMaximizer< Model>::maximize()`, `mappel::estimator::Estimator< Model>::model`, `mappel::methods::observed_information()`, `mappel::estimator::MLEData::obsI`, `mappel::estimator::IterativeMaximizer< Model>::record_run_statistics()`, `mappel::estimator::MLEData::rllh`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::rllh`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::stencil()`, `mappel::estimator::MLEData::theta`, and `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::theta()`.

9.23.3.4 `template<class Model> void mappel::estimator::IterativeMaximizer< Model>::compute_estimate_debug (const ModelDataT< Model> & im, const ParamT< Model> & theta_init, MLEDebugData & mle_debug, StencilT< Model> & mle_stencil) [override], [protected], [virtual]`

Virtual `estimate_debug` interface

Estimators that produce a sequence of results (e.g. `IterativeEstimators`) can override this dummy debug implementation.

Reimplemented from [mappel::estimator::Estimator< Model>](#).

Definition at line 1057 of file `estimator_impl.h`.

References `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::get_theta_sequence()`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::get_theta_sequence_rllh()`, `mappel::estimator::IterativeMaximizer< Model>::maximize()`, `mappel::estimator::Estimator< Model>::model`, `mappel::methods::observed_information()`, `mappel::estimator::MLEDebugData::obsI`, `mappel::estimator::IterativeMaximizer< Model>::record_run_statistics()`, `mappel::estimator::MLEDebugData::rllh`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::rllh`, `mappel::estimator::MLEDebugData::sequence`, `mappel::estimator::MLEDebugData::sequence_rllh`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::stencil()`, `mappel::estimator::MLEDebugData::theta`, and `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::theta()`.

9.23.3.5 `template<class Model> void mappel::estimator::IterativeMaximizer< Model >::compute_profile_bound (const ModelDataT< Model > & data, ProfileBoundsData & est, const VecT & init_step, IdxT param_idx, IdxT which_bound)` [override], [protected], [virtual]

Reimplemented from [mappel::estimator::Estimator< Model >](#).

Definition at line 1088 of file estimator_impl.h.

References [mappel::estimator::ProfileBoundsData::estimated_idx](#)s, [mappel::estimator::ProfileBoundsData::mle](#), [mappel::estimator::Estimator< Model >::model](#), [mappel::estimator::ProfileBoundsData::profile_lb](#), [mappel::estimator::ProfileBoundsData::profile_points_lb](#), [mappel::estimator::ProfileBoundsData::profile_points_lb_rllh](#), [mappel::estimator::ProfileBoundsData::profile_points_ub](#), [mappel::estimator::ProfileBoundsData::profile_points_ub_rllh](#), [mappel::estimator::ProfileBoundsData::profile_ub](#), [mappel::estimator::IterativeMaximizer< Model >::record_run_statistics\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::solve_profile_bound\(\)](#), [mappel::estimator::ProfileBoundsData::target_rllh_delta](#), and [mappel::estimator::MLEData::theta](#).

9.23.3.6 `template<class Model> void mappel::estimator::IterativeMaximizer< Model >::compute_profile_bound_debug (const ModelDataT< Model > & data, ProfileBoundsDebugData & bounds)` [override], [protected], [virtual]

Reimplemented from [mappel::estimator::Estimator< Model >](#).

Definition at line 1114 of file estimator_impl.h.

References [mappel::estimator::ProfileBoundsDebugData::estimated_idx](#), [mappel::estimator::ProfileBoundsDebugData::mle](#), [mappel::estimator::Estimator< Model >::model](#), [mappel::estimator::ProfileBoundsDebugData::Nseq_lb](#), [mappel::estimator::ProfileBoundsDebugData::Nseq_ub](#), [mappel::estimator::MLEData::obs](#), [mappel::estimator::ProfileBoundsDebugData::profile_lb](#), [mappel::estimator::ProfileBoundsDebugData::profile_ub](#), [mappel::estimator::IterativeMaximizer< Model >::record_run_statistics\(\)](#), [mappel::estimator::ProfileBoundsDebugData::sequence_lb](#), [mappel::estimator::ProfileBoundsDebugData::sequence_lb_rllh](#), [mappel::estimator::ProfileBoundsDebugData::sequence_ub](#), [mappel::estimator::ProfileBoundsDebugData::sequence_ub_rllh](#), [mappel::estimator::IterativeMaximizer< Model >::solve_profile_bound\(\)](#), [mappel::estimator::subroutine::solve_profile_initial_step\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::step](#), [mappel::estimator::ProfileBoundsDebugData::target_rllh_delta](#), and [mappel::estimator::MLEData::theta](#).

9.23.3.7 `template<class Model> double mappel::estimator::IterativeMaximizer< Model >::compute_profile_estimate (const ModelDataT< Model > & data, const ParamT< Model > & theta_init, const IdxVecT & fixed_idxes, StencilT< Model > & theta_max)` [override], [protected], [virtual]

Reimplemented from [mappel::estimator::Estimator< Model >](#).

Definition at line 1074 of file estimator_impl.h.

References [mappel::estimator::IterativeMaximizer< Model >::maximize\(\)](#), [mappel::estimator::Estimator< Model >::model](#), [mappel::estimator::IterativeMaximizer< Model >::record_run_statistics\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::rllh](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::set_fixed_parameters\(\)](#), and [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::stencil\(\)](#).

9.23.3.8 `template<class Model> bool mappel::estimator::IterativeMaximizer< Model>::convergence_test_grad_ratio (const VecT & grad, double fval) [protected]`

Definition at line 1015 of file estimator_impl.h.

References `mappel::estimator::IterativeMaximizer< Model>::convergence_min_function_change_ratio`, `mappel::estimator::GradRatio`, `mappel::norm_sq()`, `mappel::estimator::ThreadedEstimator< Model>::record_exit_code()`, and `mappel::square()`.

Referenced by `mappel::estimator::IterativeMaximizer< Model>::local_profile_maximize()`.

9.23.3.9 `template<class Model> bool mappel::estimator::IterativeMaximizer< Model>::convergence_test_step_size (const VecT & new_theta, const VecT & old_theta) [protected]`

Definition at line 1027 of file estimator_impl.h.

References `mappel::estimator::IterativeMaximizer< Model>::convergence_min_step_size_ratio`, `mappel::norm_sq()`, `mappel::estimator::ThreadedEstimator< Model>::record_exit_code()`, and `mappel::estimator::StepSize`.

Referenced by `mappel::estimator::IterativeMaximizer< Model>::local_profile_maximize()`.

9.23.3.10 `template<class Model> void mappel::estimator::Estimator< Model>::estimate_max (const ModelDataT< Model> & data, const ParamT< Model> & theta_init, MLEData & mle_data, StencilT< Model> & mle_stencil) [inherited]`

Maximum likelihood point estimators Estimate for a single data starting at `theta_init`, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with `theta_init`, `theta_init` is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of `theta_init` will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 128 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model>::compute_estimate()`, `mappel::estimator::Error`, `mappel::estimator::MLEData::obsI`, `mappel::print_text_image()`, `mappel::estimator::Estimator< Model>::record_exit_code()`, `mappel::estimator::Estimator< Model>::record_walltime()`, `mappel::estimator::MLEData::rllh`, and `mappel::estimator::MLEData::theta`.

Referenced by `mappel::estimator::Estimator< Model>::estimate_max()`.

9.23.3.11 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max (const ModelDataT< Model > & data, const ParamT< Model > & theta_init, MLEData & mle_data) [inherited]`

Maximum likelihood point estimators Estimate for a single data starting at theta_init, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with theta_init, theta_init is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of theta_init will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 121 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model >::estimate_max()`.

9.23.3.12 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max (const ModelDataT< Model > & data, MLEData & mle_data) [inherited]`

Maximum likelihood point estimators Estimate for a single data starting at theta_init, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with theta_init, theta_init is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of theta_init will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 112 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model >::estimate_max()`, and `mappel::estimator::Estimator< Model >::model`.

9.23.3.13 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max_debug (const ModelDataT< Model > & data, const ParamT< Model > & theta_init, MLEDebugData & mle_data, StencilT< Model > & mle_stencil) [inherited]`

Debug estimation for a single data starting at theta_init, fill in the [MLEDebugData](#) struct with data including the sequence of evaluated points. Estimation is initialized with theta_init, theta_init is empty, it is estimated with the Heuristic estimator.

If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of `theta_init` will not be modified in the initialization process.

The sequence and `sequence_rllh` parameters of the [MLEDebugData](#) struct record the entire sequence of evaluated points including `theta_init` and `theta_mle`, which should be first and last respectively.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	Initial theta value.
out	<i>mle_data</i>	MLEDebugData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

9.23.3.14 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max_debug (const ModelDataT< Model > & data, const ParamT< Model > & theta_init, MLEDebugData & mle_data) [inherited]`

Maximum likelihood point estimators Estimate for a single data starting at `theta_init`, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with `theta_init`, `theta_init` is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of `theta_init` will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 157 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::compute_estimate_debug()`, `mappel::estimator::Error`, `mappel::estimator::MLEDebugData::obsI`, `mappel::print_text_image()`, `mappel::estimator::Estimator< Model >::record_exit_code()`, `mappel::estimator::Estimator< Model >::record_walltime()`, `mappel::estimator::MLEDebugData::rllh`, and `mappel::estimator::MLEDebugData::theta`.

9.23.3.15 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max_stack (const ModelDataStackT< Model > & data_stack, MLEDataStack & mle_data_stack) [inherited]`

Maximum likelihood point estimators Estimate for a single data starting at `theta_init`, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with `theta_init`, `theta_init` is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of `theta_init` will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 183 of file estimator_impl.h.

References [mappel::estimator::Estimator< Model >::estimate_max_stack\(\)](#), and [mappel::estimator::Estimator< Model >::model](#).

9.23.3.16 `template<class Model > void mappel::estimator::ThreadedEstimator< Model >::estimate_max_stack (const ModelDataStackT< Model > & data_stack, const ParamVecT< Model > & theta_init_stack, MLEDataStack & mle_data_stack)` `[override], [virtual], [inherited]`

Estimate for a stack of data and fill in the [MLEDataStack](#) struct with the estimated parameter, RLLH, and observed information for each data in parallel. Estimation is initialized with *theta_init*, *theta_init* is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of *theta_init* will not be modified in the initialization process.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[optional] Initial theta value for each image.
out	<i>mle</i>	MLEStackData records the maximum likelihood estimate, RLLH, and Observed information for each data

Implements [mappel::estimator::Estimator< Model >](#).

Definition at line 377 of file estimator_impl.h.

References [mappel::estimator::Estimator< Model >::compute_estimate\(\)](#), [mappel::estimator::Error](#), [mappel::estimator::Estimator< Model >::model](#), [mappel::estimator::MLEDataStack::Ndata](#), [mappel::estimator::ThreadedEstimator< Model >::num_threads](#), [mappel::estimator::MLEData::obsI](#), [mappel::estimator::MLEDataStack::obsI](#), [mappel::print_text_image\(\)](#), [mappel::estimator::ThreadedEstimator< Model >::record_exit_code\(\)](#), [mappel::estimator::Estimator< Model >::record_walltime\(\)](#), [mappel::estimator::MLEData::rllh](#), [mappel::estimator::MLEDataStack::rllh](#), [mappel::estimator::MLEData::theta](#), and [mappel::estimator::MLEDataStack::theta](#).

9.23.3.17 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_profile_bounds (const ModelDataT< Model > & data, ProfileBoundsData & bounds_est)` `[inherited]`

Profile likelihood bounds computations with VM algorithm

Definition at line 220 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model >::compute_profile_bound()`, `mappel::estimator::Error`, `mappel::estimator::ProfileBoundsData::estimated_idx`s, `mappel::estimator::ProfileBoundsData::initialize_arrays()`, `mappel::estimator::ProfileBoundsData::mle`, `mappel::estimator::Estimator< Model >::model`, `mappel::estimator::ProfileBoundsData::Nparams_est`, `mappel::estimator::MLEData::obsI`, `mappel::print_text_image()`, `mappel::estimator::ProfileBoundsData::profile_lb`, `mappel::estimator::ProfileBoundsData::profile_points_lb`, `mappel::estimator::ProfileBoundsData::profile_points_lb_rllh`, `mappel::estimator::ProfileBoundsData::profile_points_ub`, `mappel::estimator::ProfileBoundsData::profile_ub`, `mappel::estimator::Estimator< Model >::record_exit_code()`, `mappel::estimator::Estimator< Model >::record_walltime()`, `mappel::estimator::subroutine::solve_profile_initial_step()`, `mappel::estimator::ProfileBoundsData::target_rllh_delta`, and `mappel::estimator::MLEData::theta`.

Referenced by `mappel::methods::error_bounds_profile_likelihood()`.

9.23.3.18 `template<class Model> void mappel::estimator::Estimator< Model >::estimate_profile_bounds_debug (const ModelDataT< Model> & data, ProfileBoundsDebugData & bounds_est) [inherited]`

Profile likelihood bounds computations with VM algorithm

Definition at line 258 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::compute_profile_bound_debug()`, `mappel::estimator::Error`, `mappel::estimator::ProfileBoundsDebugData::estimated_idx`, `mappel::estimator::ProfileBoundsDebugData::mle`, `mappel::print_text_image()`, `mappel::estimator::Estimator< Model >::record_exit_code()`, `mappel::estimator::Estimator< Model >::record_walltime()`, `mappel::estimator::ProfileBoundsDebugData::target_rllh_delta`, and `mappel::estimator::MLEData::theta`.

Referenced by `mappel::methods::debug::error_bounds_profile_likelihood_debug()`.

9.23.3.19 `template<class Model> void mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel (const ModelDataT< Model> & data, ProfileBoundsData & bounds_est) [override], [virtual], [inherited]`

Profile likelihood bounds computations with VM algorithm

Implements [mappel::estimator::Estimator< Model >](#).

Definition at line 464 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::compute_profile_bound()`, `mappel::estimator::Error`, `mappel::estimator::ProfileBoundsData::estimated_idx`s, `mappel::estimator::ProfileBoundsData::initialize_arrays()`, `mappel::estimator::ProfileBoundsData::mle`, `mappel::estimator::Estimator< Model >::model`, `mappel::estimator::ProfileBoundsData::Nparams_est`, `mappel::estimator::ThreadedEstimator< Model >::num_threads`, `mappel::estimator::MLEData::obsI`, `mappel::print_text_image()`, `mappel::estimator::ThreadedEstimator< Model >::record_exit_code()`, `mappel::estimator::Estimator< Model >::record_walltime()`, `mappel::estimator::subroutine::solve_profile_initial_step()`, `mappel::estimator::ProfileBoundsData::target_rllh_delta`, and `mappel::estimator::MLEData::theta`.

Referenced by `mappel::methods::openmp::error_bounds_profile_likelihood_parallel()`.

9.23.3.20 `template<class Model > void mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack (const ModelDataStackT< Model > & data_stack, ProfileBoundsDataStack & bounds_est) [override], [virtual], [inherited]`

Profile likelihood bounds computations with VM algorithm

Implements [mappel::estimator::Estimator< Model >](#).

Definition at line 500 of file estimator_impl.h.

References [mappel::estimator::Estimator< Model >::compute_profile_bound\(\)](#), [mappel::estimator::Error](#), [mappel::estimator::ProfileBoundsData::estimated_idx](#)s, [mappel::estimator::ProfileBoundsDataStack::estimated_idx](#)s, [mappel::estimator::ProfileBoundsData::initialize_arrays\(\)](#), [mappel::estimator::ProfileBoundsDataStack::initialize_arrays\(\)](#), [mappel::estimator::ProfileBoundsData::mle](#), [mappel::estimator::ProfileBoundsDataStack::mle](#), [mappel::estimator::Estimator< Model >::model](#), [mappel::estimator::ProfileBoundsDataStack::Ndata](#), [mappel::estimator::ProfileBoundsDataStack::Nparams_est](#), [mappel::estimator::ThreadedEstimator< Model >::num_threads](#), [mappel::estimator::MLEData::obs](#), [mappel::estimator::MLEDataStack::obs](#), [mappel::print_text_image\(\)](#), [mappel::estimator::ProfileBoundsData::profile_lb](#), [mappel::estimator::ProfileBoundsDataStack::profile_lb](#), [mappel::estimator::ProfileBoundsData::profile_points_lb](#), [mappel::estimator::ProfileBoundsDataStack::profile_points_lb](#), [mappel::estimator::ProfileBoundsData::profile_points_lb_rllh](#), [mappel::estimator::ProfileBoundsDataStack::profile_points_lb_rllh](#), [mappel::estimator::ProfileBoundsData::profile_points_ub](#), [mappel::estimator::ProfileBoundsDataStack::profile_points_ub](#), [mappel::estimator::ProfileBoundsData::profile_points_ub_rllh](#), [mappel::estimator::ProfileBoundsDataStack::profile_points_ub_rllh](#), [mappel::estimator::ProfileBoundsData::profile_ub](#), [mappel::estimator::ProfileBoundsDataStack::profile_ub](#), [mappel::estimator::ThreadedEstimator< Model >::record_exit_code\(\)](#), [mappel::estimator::Estimator< Model >::record_walltime\(\)](#), [mappel::estimator::MLEData::rllh](#), [mappel::estimator::MLEDataStack::rllh](#), [mappel::estimator::subroutine::solve_profile_initial_step\(\)](#), [mappel::estimator::ProfileBoundsData::target_rllh_delta](#), [mappel::estimator::ProfileBoundsDataStack::target_rllh_delta](#), [mappel::estimator::MLEData::theta](#), and [mappel::estimator::MLEDataStack::theta](#).

Referenced by [mappel::methods::openmp::error_bounds_profile_likelihood_stack\(\)](#).

9.23.3.21 `template<class Model > double mappel::estimator::Estimator< Model >::estimate_profile_max (const ModelDataT< Model > & data, const IdxVecT & fixed_idx, const ParamT< Model > & fixed_theta_init, StencilT< Model > & theta_max) [inherited]`

Profile likelihood estimation methods

Definition at line 190 of file estimator_impl.h.

References [mappel::estimator::Estimator< Model >::compute_profile_estimate\(\)](#), [mappel::estimator::Error](#), [mappel::print_text_image\(\)](#), [mappel::estimator::Estimator< Model >::record_exit_code\(\)](#), [mappel::estimator::Estimator< Model >::record_walltime\(\)](#), and [mappel::methods::objective::rllh\(\)](#).

9.23.3.22 `template<class Model > void mappel::estimator::ThreadedEstimator< Model >::estimate_profile_max (const ModelDataT< Model > & data, const ParamVecT< Model > & fixed_theta_init, ProfileLikelihoodData & profile) [override], [virtual], [inherited]`

Profile likelihood estimation methods

Implements [mappel::estimator::Estimator< Model >](#).

Definition at line 418 of file estimator_impl.h.

References [mappel::estimator::Estimator< Model >::compute_profile_estimate\(\)](#), [mappel::estimator::Error](#), [mappel::estimator::ProfileLikelihoodData::fixed_idx](#)s, [mappel::estimator::ProfileLikelihoodData::fixed_values](#), [mappel::estimator::Estimator< Model >::model](#), [mappel::estimator::ProfileLikelihoodData::Nfixed](#), [mappel::estimator::ThreadedEstimator< Model >::num_threads](#), [mappel::estimator::ProfileLikelihoodData::Nvalues](#), [mappel::print_text_image\(\)](#), [mappel::estimator::ProfileLikelihoodData::profile_likelihood](#), [mappel::estimator::ProfileLikelihoodData::profile_parameters](#), [mappel::estimator::ThreadedEstimator< Model >::record_exit_code\(\)](#), and [mappel::estimator::Estimator< Model >::record_walltime\(\)](#).

9.23.3.23 `template<class Model > StatsT mappel::estimator::IterativeMaximizer< Model >::get_debug_stats ()`
`[virtual]`

Run statistics.

Reimplemented from [mappel::estimator::ThreadedEstimator< Model >](#).

Definition at line 832 of file `estimator_impl.h`.

References `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::backtrack_idx`s, `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, and `mappel::estimator::IterativeMaximizer< Model >::last_backtrack_idx`s.

9.23.3.24 `template<class Model > IdxVecT mappel::estimator::Estimator< Model >::get_exit_counts () const`
`[inline], [inherited]`

Run statistics.

Definition at line 274 of file `estimator.h`.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.23.3.25 `template<class Model > const Model & mappel::estimator::Estimator< Model >::get_model ()`
`[inherited]`

Definition at line 108 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::model`.

9.23.3.26 `template<class Model > StatsT mappel::estimator::IterativeMaximizer< Model >::get_stats ()`
`[virtual]`

Run statistics.

Reimplemented from [mappel::estimator::ThreadedEstimator< Model >](#).

Definition at line 811 of file `estimator_impl.h`.

References `mappel::estimator::IterativeMaximizer< Model >::convergence_min_function_change_ratio`, `mappel::estimator::IterativeMaximizer< Model >::convergence_min_step_size_ratio`, `mappel::estimator::ThreadedEstimator< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::max_backtracks`, `mappel::estimator::IterativeMaximizer< Model >::max_iterations`, `mappel::estimator::ThreadedEstimator< Model >::mtx`, `mappel::estimator::Estimator< Model >::num_estimations`, `mappel::estimator::IterativeMaximizer< Model >::total_backtracks`, `mappel::estimator::IterativeMaximizer< Model >::total_der_evals`, `mappel::estimator::IterativeMaximizer< Model >::total_fun_evals`, and `mappel::estimator::IterativeMaximizer< Model >::total_iterations`.

Referenced by `mappel::methods::error_bounds_profile_likelihood()`, `mappel::methods::debug::error_bounds_profile_likelihood_debug()`, `mappel::methods::openmp::error_bounds_profile_likelihood_parallel()`, `mappel::methods::openmp::error_bounds_profile_likelihood_stack()`, `mappel::estimator::SimulatedAnnealingMaximizer< Model >::get_debug_stats()`, and `mappel::estimator::IterativeMaximizer< Model >::get_debug_stats()`.

9.23.3.27 `template<class Model > int mappel::estimator::IterativeMaximizer< Model >::get_total_backtracks () const`
`[inline]`

Definition at line 441 of file estimator.h.

9.23.3.28 `template<class Model > int mappel::estimator::IterativeMaximizer< Model >::get_total_der_evals () const`
`[inline]`

Definition at line 443 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.23.3.29 `template<class Model > int mappel::estimator::IterativeMaximizer< Model >::get_total_fun_evals () const`
`[inline]`

Definition at line 442 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.23.3.30 `template<class Model > int mappel::estimator::IterativeMaximizer< Model >::get_total_iterations () const`
`[inline]`

Definition at line 440 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.23.3.31 `template<class Model > void mappel::estimator::IterativeMaximizer< Model >::local_maximize (const`
`ModelDataT< Model > & im, StencilT< Model > & stencil, MLEData & data)`

Perform a local maximization to finish off a simulated annealing run.

Definition at line 1145 of file estimator_impl.h.

References `mappel::estimator::IterativeMaximizer< Model >::maximize()`, `mappel::estimator::Estimator< Model >::model`, `mappel::methods::observed_information()`, `mappel::estimator::MLEData::obsI`, `mappel::estimator::IterativeMaximizer< Model >::record_run_statistics()`, `mappel::estimator::MLEData::rllh`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::rllh`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::stencil()`, `mappel::estimator::MLEData::theta`, and `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::theta()`.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.23.3.32 `template<class Model > void mappel::estimator::IterativeMaximizer< Model >::local_maximize (const`
`ModelDataT< Model > & im, StencilT< Model > & stencil, MLEDebugData & debug_data)`

Definition at line 1158 of file estimator_impl.h.

References `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::get_theta_sequence()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::get_theta_sequence_rllh()`, `mappel::estimator::IterativeMaximizer< Model >::maximize()`, `mappel::estimator::Estimator< Model >::model`, `mappel::methods::observed_information()`, `mappel::estimator::MLEDebugData::obsI`, `mappel::estimator::IterativeMaximizer< Model >::record_run_statistics()`, `mappel::estimator::MLEDebugData::rllh`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::rllh`, `mappel::estimator::MLEDebugData::sequence`, `mappel::estimator::MLEDebugData::sequence_rllh`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::stencil()`, `mappel::estimator::MLEDebugData::theta`, and `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::theta()`.

9.23.3.33 `template<class Model> void mappel::estimator::IterativeMaximizer< Model>::local_profile_maximize (const ModelDataT< Model> & im, const IdxVecT & fixed_param_idx, StencilT< Model> & stencil, MLEDebugData & mle)`

Definition at line 1173 of file estimator_impl.h.

References `mappel::estimator::IterativeMaximizer< Model>::backtrack()`, `mappel::estimator::subroutine::bound_step()`, `mappel::clamp()`, `mappel::estimator::subroutine::compute_bound_scaling_vec()`, `mappel::estimator::subroutine::compute_cauchy_point()`, `mappel::estimator::subroutine::compute_initial_trust_radius()`, `mappel::estimator::subroutine::compute_quadratic_model_value()`, `mappel::estimator::subroutine::compute_scaled_problem()`, `mappel::estimator::IterativeMaximizer< Model>::convergence_test_grad_ratio()`, `mappel::estimator::IterativeMaximizer< Model>::convergence_test_step_size()`, `mappel::estimator::Estimator< Model>::exit_counts`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::fixed_idx`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::free_idx`, `mappel::estimator::Estimator< Model>::get_exit_counts()`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::get_theta_sequence()`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::get_theta_sequence_rllh()`, `mappel::estimator::IterativeMaximizer< Model>::get_total_der_evals()`, `mappel::estimator::IterativeMaximizer< Model>::get_total_fun_evals()`, `mappel::estimator::IterativeMaximizer< Model>::get_total_iterations()`, `mappel::methods::objective::grad()`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::grad`, `mappel::methods::objective::grad2()`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::has_fixed_parameters()`, `mappel::methods::objective::hessian()`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::im`, `mappel::is_positive_definite()`, `mappel::estimator::IterativeMaximizer< Model>::local_maximize()`, `mappel::estimator::IterativeMaximizer< Model>::local_profile_maximize()`, `mappel::estimator::IterativeMaximizer< Model>::max_iterations`, `mappel::estimator::IterativeMaximizer< Model>::maximize()`, `mappel::estimator::MaxIter`, `mappel::estimator::IterativeMaximizer< Model>::min_profile_bound_residual`, `mappel::estimator::Estimator< Model>::model`, `mappel::estimator::ThreadedEstimator< Model>::mtx`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::num_fixed_parameters()`, `mappel::methods::observed_information()`, `mappel::estimator::MLEData::obs`, `mappel::estimator::MLEDebugData::obs`, `mappel::estimator::IterativeMaximizer< Model>::profile_bound_backtrack()`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::record_backtrack()`, `mappel::estimator::ThreadedEstimator< Model>::record_exit_code()`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::record_iteration()`, `mappel::estimator::IterativeMaximizer< Model>::record_run_statistics()`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::restore_stencil()`, `mappel::estimator::MLEData::rllh`, `mappel::methods::objective::rllh()`, `mappel::estimator::MLEDebugData::rllh`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::rllh`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::s0`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::s1`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::save_stencil()`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::saved_theta()`, `mappel::estimator::MLEDebugData::sequence`, `mappel::estimator::MLEDebugData::sequence_rllh`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::set_fixed_parameters()`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::set_stencil()`, `mappel::estimator::subroutine::solve_TR_subproblem()`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::stencil()`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::step`, `mappel::estimator::MLEData::theta`, `mappel::estimator::MLEDebugData::theta`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::theta()`, `mappel::estimator::IterativeMaximizer< Model>::total_der_evals`, `mappel::estimator::IterativeMaximizer< Model>::total_fun_evals`, `mappel::estimator::IterativeMaximizer< Model>::total_iterations`, and `mappel::estimator::TrustRegionRadius`.

Referenced by `mappel::estimator::IterativeMaximizer< Model>::local_profile_maximize()`.

9.23.3.34 `template<class Model> virtual void mappel::estimator::IterativeMaximizer< Model>::maximize (MaximizerData & data) [protected], [pure virtual]`

Referenced by `mappel::estimator::IterativeMaximizer< Model>::compute_estimate()`, `mappel::estimator::IterativeMaximizer< Model>::compute_estimate_debug()`, `mappel::estimator::IterativeMaximizer< Model>::compute_profile_estimate()`, `mappel::estimator::IterativeMaximizer< Model>::local_maximize()`, and `mappel::estimator::IterativeMaximizer< Model>::local_profile_maximize()`.

9.23.3.35 `template<class Model > double mappel::estimator::IterativeMaximizer< Model >::mean_backtracks ()`

9.23.3.36 `template<class Model > double mappel::estimator::IterativeMaximizer< Model >::mean_der_evals ()`

9.23.3.37 `template<class Model > double mappel::estimator::IterativeMaximizer< Model >::mean_fun_evals ()`

9.23.3.38 `template<class Model > double mappel::estimator::IterativeMaximizer< Model >::mean_iterations ()`

9.23.3.39 `template<class Model > virtual std::string mappel::estimator::Estimator< Model >::name () const [pure virtual],[inherited]`

Implemented in [mappel::estimator::TrustRegionMaximizer< Model >](#), [mappel::estimator::QuasiNewtonMaximizer< Model >](#), [mappel::estimator::NewtonMaximizer< Model >](#), [mappel::estimator::NewtonDiagonalMaximizer< Model >](#), [mappel::estimator::SimulatedAnnealingMaximizer< Model >](#), [mappel::estimator::CGaussMLE< Model >](#), [mappel::estimator::CGaussHeuristicEstimator< Model >](#), and [mappel::estimator::HeuristicEstimator< Model >](#).

Referenced by [mappel::estimator::IterativeMaximizer< Model >::solve_profile_bound\(\)](#).

9.23.3.40 `template<class Model > bool mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack (MaximizerData & data, IdxT fixed_idx, double target_rllh, double old_fval, const VecT & fgrad) [protected]`

Definition at line 943 of file `estimator_impl.h`.

References [mappel::estimator::IterativeMaximizer< Model >::backtrack_max_ratio](#), [mappel::estimator::IterativeMaximizer< Model >::backtrack_min_linear_step_ratio](#), [mappel::estimator::IterativeMaximizer< Model >::backtrack_min_ratio](#), [mappel::clamp\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::convergence_min_step_size_ratio](#), [mappel::methods::objective::grad\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::im](#), [mappel::estimator::IterativeMaximizer< Model >::max_backtracks](#), [mappel::estimator::MaxBacktracks](#), [mappel::estimator::Estimator< Model >::model](#), [mappel::norm_sq\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::record_backtrack\(\)](#), [mappel::estimator::ThreadedEstimator< Model >::record_exit_code\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::record_iteration\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::restore_stencil\(\)](#), [mappel::methods::objective::rllh\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::rllh](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::save_stencil\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::saved_theta\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::set_stencil\(\)](#), [mappel::square\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::stencil\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::step](#), [mappel::estimator::StepSize](#), and [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::theta\(\)](#).

Referenced by [mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize\(\)](#).

9.23.3.41 `template<class Model > void mappel::estimator::ThreadedEstimator< Model >::record_exit_code (ExitCode code) [override],[protected],[virtual],[inherited]`

Implements [mappel::estimator::Estimator< Model >](#).

Definition at line 578 of file `estimator_impl.h`.

References [mappel::estimator::Estimator< Model >::exit_counts](#), [mappel::estimator::Estimator< Model >::model](#), [mappel::estimator::ThreadedEstimator< Model >::mtx](#), [mappel::methods::observed_information\(\)](#), [mappel::estimator::MLEData::obsI](#), [mappel::estimator::MLEData::rllh](#), [mappel::methods::objective::rllh\(\)](#), [mappel::estimator::Success](#), and [mappel::estimator::MLEData::theta](#).

Referenced by [mappel::estimator::IterativeMaximizer< Model >::backtrack\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::convergence_test_grad_ratio\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::convergence_test_step_size\(\)](#), [mappel::estimator::ThreadedEstimator< Model >::estimate_max_stack\(\)](#), [mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel\(\)](#), [mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack\(\)](#), [mappel::estimator::ThreadedEstimator< Model >::estimate_profile_max\(\)](#), [mappel::estimator::HeuristicEstimator< Model >::get_debug_stats\(\)](#), [mappel::estimator::CGaussMLE< Model >::get_debug_stats\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize\(\)](#), and [mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack\(\)](#).

9.23.3.42 `template<class Model> void mappel::estimator::IterativeMaximizer< Model>::record_run_statistics (const MaximizerData & data) [protected]`

Definition at line 859 of file estimator_impl.h.

References `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::get_backtrack_idxes()`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::has_theta_sequence()`, `mappel::estimator::IterativeMaximizer< Model>::last_backtrack_idxes`, `mappel::estimator::ThreadedEstimator< Model>::mtx`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::nBacktracks`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::nIterations`, `mappel::estimator::IterativeMaximizer< Model>::total_backtracks`, `mappel::estimator::IterativeMaximizer< Model>::total_der_evals`, `mappel::estimator::IterativeMaximizer< Model>::total_fun_evals`, and `mappel::estimator::IterativeMaximizer< Model>::total_iterations`.

Referenced by `mappel::estimator::IterativeMaximizer< Model>::compute_estimate()`, `mappel::estimator::IterativeMaximizer< Model>::compute_estimate_debug()`, `mappel::estimator::IterativeMaximizer< Model>::compute_profile_bound()`, `mappel::estimator::IterativeMaximizer< Model>::compute_profile_bound_debug()`, `mappel::estimator::IterativeMaximizer< Model>::compute_profile_estimate()`, `mappel::estimator::IterativeMaximizer< Model>::local_maximize()`, and `mappel::estimator::IterativeMaximizer< Model>::local_profile_maximize()`.

9.23.3.43 `template<class Model> void mappel::estimator::Estimator< Model>::record_walltime (ClockT::time_point start_walltime, int num_estimations) [protected], [inherited]`

Definition at line 360 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model>::num_estimations`, and `mappel::estimator::Estimator< Model>::total_walltime`.

Referenced by `mappel::estimator::Estimator< Model>::estimate_max()`, `mappel::estimator::Estimator< Model>::estimate_max_debug()`, `mappel::estimator::ThreadedEstimator< Model>::estimate_max_stack()`, `mappel::estimator::Estimator< Model>::estimate_profile_bounds()`, `mappel::estimator::Estimator< Model>::estimate_profile_bounds_debug()`, `mappel::estimator::ThreadedEstimator< Model>::estimate_profile_bounds_parallel()`, `mappel::estimator::ThreadedEstimator< Model>::estimate_profile_bounds_stack()`, `mappel::estimator::Estimator< Model>::estimate_profile_max()`, and `mappel::estimator::ThreadedEstimator< Model>::estimate_profile_max()`.

9.23.3.44 `template<class Model> void mappel::estimator::IterativeMaximizer< Model>::solve_profile_bound (MaximizerData & data, MLEData & mle, double llh_delta, IdxT fixed_idx, IdxT which_bound) [protected], [virtual]`

Definition at line 1137 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model>::name()`.

Referenced by `mappel::estimator::IterativeMaximizer< Model>::compute_profile_bound()`, and `mappel::estimator::IterativeMaximizer< Model>::compute_profile_bound_debug()`.

9.23.4 Member Data Documentation

9.23.4.1 `template<class Model> const double mappel::estimator::IterativeMaximizer< Model>::backtrack_max_ratio = 0.50 [static], [protected]`

Definition at line 460 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model>::profile_bound_backtrack()`.

9.23.4.2 `template<class Model > const double mappel::estimator::IterativeMaximizer< Model >::backtrack_min_linear_step_ratio = 1e-3 [static], [protected]`

Definition at line 461 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::backtrack()`, and `mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack()`.

9.23.4.3 `template<class Model > const double mappel::estimator::IterativeMaximizer< Model >::backtrack_min_ratio = 0.05 [static], [protected]`

Definition at line 459 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack()`.

9.23.4.4 `template<class Model > const double mappel::estimator::IterativeMaximizer< Model >::convergence_min_function_change_ratio = 1.0e-9 [static], [protected]`

Convergence criteria: tolerance for function-value change.

Definition at line 456 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::convergence_test_grad_ratio()`, and `mappel::estimator::IterativeMaximizer< Model >::get_stats()`.

9.23.4.5 `template<class Model > const double mappel::estimator::IterativeMaximizer< Model >::convergence_min_step_size_ratio = 1.0e-9 [static], [protected]`

Convergence criteria: tolerance of relative step size.

Definition at line 457 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::backtrack()`, `mappel::estimator::IterativeMaximizer< Model >::convergence_test_step_size()`, `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, and `mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack()`.

9.23.4.6 `template<class Model > const int mappel::estimator::IterativeMaximizer< Model >::DefaultIterations = 100 [static]`

Definition at line 428 of file estimator.h.

9.23.4.7 `template<class Model > IdxVecT mappel::estimator::Estimator< Model >::exit_counts [protected], [inherited]`

Definition at line 299 of file estimator.h.

Referenced by `mappel::estimator::Estimator< Model >::clear_stats()`, `mappel::estimator::Estimator< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, and `mappel::estimator::ThreadedEstimator< Model >::record_exit_code()`.

9.23.4.8 `template<class Model> IdxVecT mappel::estimator::IterativeMaximizer< Model>::last_backtrack_idx`
`[protected]`

Debugging: Stores last set of backtrack_idx when data.save_seq==true.

Definition at line 475 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model>::get_debug_stats()`, and `mappel::estimator::IterativeMaximizer< Model>::record_run_statistics()`.

9.23.4.9 `template<class Model> const int mappel::estimator::IterativeMaximizer< Model>::max_backtracks = 8`
`[static], [protected]`

Definition at line 462 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model>::backtrack()`, `mappel::estimator::IterativeMaximizer< Model>::get_stats()`, and `mappel::estimator::IterativeMaximizer< Model>::profile_bound_backtrack()`.

9.23.4.10 `template<class Model> int mappel::estimator::IterativeMaximizer< Model>::max_iterations`
`[protected]`

Definition at line 466 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model>::get_stats()`, and `mappel::estimator::IterativeMaximizer< Model>::local_profile_maximize()`.

9.23.4.11 `template<class Model> int mappel::estimator::ThreadedEstimator< Model>::max_threads`
`[protected], [inherited]`

Definition at line 324 of file estimator.h.

9.23.4.12 `template<class Model> const double mappel::estimator::IterativeMaximizer< Model>::min_eigenvalue_correction_delta = 1e-3`
`[static], [protected]`

Ensure the minimum eigenvalue is at least this big when correcting indefinite matrix.

Definition at line 454 of file estimator.h.

9.23.4.13 `template<class Model> const double mappel::estimator::IterativeMaximizer< Model>::min_profile_bound_residual = 1e-4`
`[static], [protected]`

Minimum residual in quadratic solutions of equation (8) to accept. Revert to newton step.

Definition at line 464 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model>::local_profile_maximize()`.

9.23.4.14 `template<class Model > const Model& mappel::estimator::Estimator< Model >::model` [protected],
[inherited]

Definition at line 294 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::backtrack()`, `mappel::estimator::IterativeMaximizer< Model >::compute_estimate()`, `mappel::estimator::Estimator< Model >::compute_estimate_debug()`, `mappel::estimator::IterativeMaximizer< Model >::compute_estimate_debug()`, `mappel::estimator::Estimator< Model >::compute_profile_bound()`, `mappel::estimator::IterativeMaximizer< Model >::compute_profile_bound()`, `mappel::estimator::Estimator< Model >::compute_profile_bound_debug()`, `mappel::estimator::IterativeMaximizer< Model >::compute_profile_bound_debug()`, `mappel::estimator::Estimator< Model >::compute_profile_estimate()`, `mappel::estimator::IterativeMaximizer< Model >::compute_profile_estimate()`, `mappel::estimator::Estimator< Model >::estimate_max()`, `mappel::estimator::Estimator< Model >::estimate_max_stack()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_max_stack()`, `mappel::estimator::Estimator< Model >::estimate_profile_bounds()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_max()`, `mappel::estimator::HeuristicEstimator< Model >::get_debug_stats()`, `mappel::estimator::CGaussMLE< Model >::get_debug_stats()`, `mappel::estimator::Estimator< Model >::get_model()`, `mappel::estimator::IterativeMaximizer< Model >::local_maximize()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, `mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack()`, and `mappel::estimator::ThreadedEstimator< Model >::record_exit_code()`.

9.23.4.15 `template<class Model > std::mutex mappel::estimator::ThreadedEstimator< Model >::mtx` [protected],
[inherited]

Definition at line 326 of file estimator.h.

Referenced by `mappel::estimator::ThreadedEstimator< Model >::clear_stats()`, `mappel::estimator::IterativeMaximizer< Model >::clear_stats()`, `mappel::estimator::ThreadedEstimator< Model >::get_stats()`, `mappel::estimator::HeuristicEstimator< Model >::get_stats()`, `mappel::estimator::CGaussHeuristicEstimator< Model >::get_stats()`, `mappel::estimator::CGaussMLE< Model >::get_stats()`, `mappel::estimator::SimulatedAnnealingMaximizer< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, `mappel::estimator::ThreadedEstimator< Model >::record_exit_code()`, and `mappel::estimator::IterativeMaximizer< Model >::record_run_statistics()`.

9.23.4.16 `template<class Model > int mappel::estimator::Estimator< Model >::num_estimations = 0` [protected],
[inherited]

Definition at line 297 of file estimator.h.

Referenced by `mappel::estimator::Estimator< Model >::clear_stats()`, `mappel::estimator::Estimator< Model >::get_stats()`, `mappel::estimator::ThreadedEstimator< Model >::get_stats()`, `mappel::estimator::HeuristicEstimator< Model >::get_stats()`, `mappel::estimator::CGaussHeuristicEstimator< Model >::get_stats()`, `mappel::estimator::CGaussMLE< Model >::get_stats()`, `mappel::estimator::SimulatedAnnealingMaximizer< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, and `mappel::estimator::Estimator< Model >::record_walltime()`.

9.23.4.17 `template<class Model > int mappel::estimator::ThreadedEstimator< Model >::num_threads`
[protected], [inherited]

Definition at line 325 of file estimator.h.

Referenced by `mappel::estimator::ThreadedEstimator< Model >::clear_stats()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_max_stack()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_max()`, and `mappel::estimator::ThreadedEstimator< Model >::get_stats()`.

9.23.4.18 `template<class Model > int mappel::estimator::IterativeMaximizer< Model >::total_backtracks = 0`
`[protected]`

Definition at line 470 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::clear_stats()`, `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, and `mappel::estimator::IterativeMaximizer< Model >::record_run_statistics()`.

9.23.4.19 `template<class Model > int mappel::estimator::IterativeMaximizer< Model >::total_der_evals = 0`
`[protected]`

Definition at line 472 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::clear_stats()`, `mappel::estimator::SimulatedAnnealingMaximizer< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, and `mappel::estimator::IterativeMaximizer< Model >::record_run_statistics()`.

9.23.4.20 `template<class Model > int mappel::estimator::IterativeMaximizer< Model >::total_fun_evals = 0`
`[protected]`

Definition at line 471 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::clear_stats()`, `mappel::estimator::SimulatedAnnealingMaximizer< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, and `mappel::estimator::IterativeMaximizer< Model >::record_run_statistics()`.

9.23.4.21 `template<class Model > int mappel::estimator::IterativeMaximizer< Model >::total_iterations = 0`
`[protected]`

Definition at line 469 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::clear_stats()`, `mappel::estimator::SimulatedAnnealingMaximizer< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, and `mappel::estimator::IterativeMaximizer< Model >::record_run_statistics()`.

9.23.4.22 `template<class Model > double mappel::estimator::Estimator< Model >::total_walltime = 0.` `[protected]`,
`[inherited]`

Definition at line 298 of file estimator.h.

Referenced by `mappel::estimator::Estimator< Model >::clear_stats()`, `mappel::estimator::Estimator< Model >::get_stats()`, `mappel::estimator::ThreadedEstimator< Model >::get_stats()`, and `mappel::estimator::Estimator< Model >::record_walltime()`.

The documentation for this class was generated from the following files:


- [estimator.h](#)
- [estimator_impl.h](#)

9.24 mappel::LogicalError Struct Reference

Failure of code or algorithm logic.

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/util.h>
```

Inheritance diagram for mappel::LogicalError:

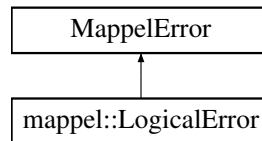

Public Member Functions

- [LogicalError](#) (std::string message)

9.24.1 Detailed Description

Failure of code or algorithm logic.

Definition at line 104 of file util.h.

9.24.2 Constructor & Destructor Documentation

9.24.2.1 mappel::LogicalError::LogicalError (std::string *message*) [inline]

Definition at line 106 of file util.h.

The documentation for this struct was generated from the following file:


- [util.h](#)

9.25 mappel::MAPEstimator Class Reference

A Mixin class to configure a for MLE estimation (null prior).

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/MAPEstimator.h>
```

Inheritance diagram for mappel::MAPEstimator:

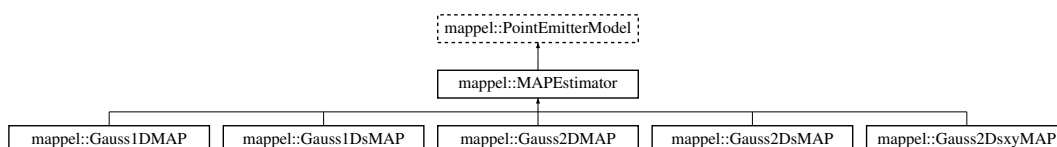

Public Types

- using [ParamT](#) = arma::vec
- using [ParamVecT](#) = arma::mat

Public Member Functions

- [StatsT](#) [get_stats](#) () const
- [IdxT](#) [get_num_params](#) () const
- void [check_param_shape](#) (const [ParamT](#) &theta) const
- void [check_param_shape](#) (const [ParamVecT](#) &theta) const
- void [check_psf_sigma](#) (double psf_sigma) const
- void [check_psf_sigma](#) (const [VecT](#) &psf_sigma) const
- [ParamT](#) [make_param](#) () const
- template<class FillT >
 [ParamT](#) [make_param](#) (FillT fill) const
- [ParamVecT](#) [make_param_stack](#) ([IdxT](#) n) const
- template<class FillT >
 [ParamVecT](#) [make_param_stack](#) ([IdxT](#) n, FillT fill) const
- [MatT](#) [make_param_mat](#) () const
- template<class FillT >
 [MatT](#) [make_param_mat](#) (FillT fill) const
- [CubeT](#) [make_param_mat_stack](#) ([IdxT](#) n) const
- template<class FillT >
 [CubeT](#) [make_param_mat_stack](#) ([IdxT](#) n, FillT fill) const
- CompositeDist & [get_prior](#) ()
- const CompositeDist & [get_prior](#) () const
- void [set_prior](#) (CompositeDist &&prior_)
- void [set_prior](#) (const CompositeDist &prior_)
- [IdxT](#) [get_num_hyperparams](#) () const
- void [set_hyperparams](#) (const [VecT](#) &hyperparams)
- [VecT](#) [get_hyperparams](#) () const
- bool [has_hyperparam](#) (const std::string &name) const
- double [get_hyperparam_value](#) (const std::string &name) const
- int [get_hyperparam_index](#) (const std::string &name) const
- void [set_hyperparam_value](#) (const std::string &name, double value)
- void [rename_hyperparam](#) (const std::string &old_name, const std::string &new_name)
- [StringVecT](#) [get_param_names](#) () const
- void [set_param_names](#) (const [StringVecT](#) &desc)
- [StringVecT](#) [get_hyperparam_names](#) () const
- void [set_hyperparam_names](#) (const [StringVecT](#) &desc)
- template<class RngT >
 [ParamT](#) [sample_prior](#) (RngT &rng) const
- [ParamT](#) [sample_prior](#) () const
- void [set_bounds](#) (const [ParamT](#) &lbound, const [ParamT](#) &ubound)
- void [set_lbound](#) (const [ParamT](#) &lbound)
- void [set_ubound](#) (const [ParamT](#) &ubound)
- const [ParamT](#) & [get_lbound](#) () const
- const [ParamT](#) & [get_ubound](#) () const
- bool [theta_in_bounds](#) (const [ParamT](#) &theta) const

- void `bound_theta` (`ParamT` &theta, double epsilon=`bounds_epsilon`) const
- `ParamT` `bounded_theta` (const `ParamT` &theta, double epsilon=`bounds_epsilon`) const
- `ParamT` `reflected_theta` (const `ParamT` &theta) const
- `BoolVecT` `theta_stack_in_bounds` (const `ParamVecT` &theta) const
- `ParamVecT` `bounded_theta_stack` (const `ParamVecT` &theta, double epsilon=`bounds_epsilon`) const
- `ParamVecT` `reflected_theta_stack` (const `ParamVecT` &theta) const

Static Public Member Functions

- static `prior_hessian::TruncatedNormalDist` `make_prior_component_position_normal` (`IdxT` size, double pos_↔ sigma=`default_sigma_pos`)
- static `prior_hessian::ScaledSymmetricBetaDist` `make_prior_component_position_beta` (`IdxT` size, double pos_↔ beta=`default_beta_pos`)
- static `prior_hessian::TruncatedGammaDist` `make_prior_component_intensity` (double mean=`default_mean_l`↔ l, double kappa=`default_intensity_kappa`)
- static `prior_hessian::TruncatedParetoDist` `make_prior_component_sigma` (double min_sigma, double max_↔ sigma, double alpha=`default_alpha_sigma`)
- static void `set_rng_seed` (`RngSeedT` seed)
- static `ParallelRngManagerT` & `get_rng_manager` ()
- static `ParallelRngGeneratorT` & `get_rng_generator` ()

Static Public Attributes

- static const std::string `DefaultSeperableInitEstimator` = "TrustRegion"
- static const double `bounds_epsilon` = 1.0E-6
- static const double `global_min_psf_sigma` = 1E-1
- static const double `global_max_psf_sigma` = 1E2
- static const double `default_beta_pos` = 3
- static const double `default_sigma_pos` = 1
- static const double `default_mean_l` = 300
- static const double `default_max_l` = INFINITY
- static const double `default_intensity_kappa` = 2
- static const double `default_pixel_mean_bg` = 4
- static const double `default_alpha_sigma` = 2

Protected Member Functions

- `MAPEstimator` ()
- `MAPEstimator` (const `MAPEstimator` &o)
- `MAPEstimator` (`MAPEstimator` &&o)
- `MAPEstimator` & `operator=` (const `MAPEstimator` &o)
- `MAPEstimator` & `operator=` (`MAPEstimator` &&o)

Protected Attributes

- `CompositeDist` `prior`
- `IdxT` `num_params`
- `IdxT` `num_hyperparams`
- `ParamT` `lbound`
- `ParamT` `ubound`

9.25.1 Detailed Description

A Mixin class to configure a for MLE estimation (null prior).

Inheriting from this class modifies the objective function undergoing optimization to use a Null prior, by simply ignoring the effect of the prior on the objective. This which effectively turns the objective function into a pure likelihood function, and the estimator becomes an MLE estimator.

Definition at line 22 of file MAPEstimator.h.

9.25.2 Member Typedef Documentation

9.25.2.1 `using mappel::PointEmitterModel::ParamT = arma::vec` [inherited]

Parameter vector

Definition at line 47 of file PointEmitterModel.h.

9.25.2.2 `using mappel::PointEmitterModel::ParamVecT = arma::mat` [inherited]

Vector of parameter vectors

Definition at line 48 of file PointEmitterModel.h.

9.25.3 Constructor & Destructor Documentation

9.25.3.1 `mappel::MAPEstimator::MAPEstimator ()` [inline],[protected]

Definition at line 24 of file MAPEstimator.h.

9.25.3.2 `mappel::MAPEstimator::MAPEstimator (const MAPEstimator & o)` [inline],[protected]

Definition at line 25 of file MAPEstimator.h.

9.25.3.3 `mappel::MAPEstimator::MAPEstimator (MAPEstimator && o)` [inline],[protected]

Definition at line 26 of file MAPEstimator.h.

9.25.4 Member Function Documentation

9.25.4.1 `void mappel::PointEmitterModel::bound_theta (ParamT & theta, double epsilon = bounds_epsilon) const`
[inherited]

Definition at line 248 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

9.25.4.2 PointEmitterModel::ParamT mappel::PointEmitterModel::bounded_theta (const ParamT & *theta*, double *epsilon* = bounds_epsilon) const [inherited]

Definition at line 265 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::check_param_shape(), mappel::PointEmitterModel::lbound, mappel::PointEmitterModel::num_params, and mappel::PointEmitterModel::ubound.

Referenced by mappel::PointEmitterModel::bounded_theta_stack().

9.25.4.3 PointEmitterModel::ParamVecT mappel::PointEmitterModel::bounded_theta_stack (const ParamVecT & *theta*, double *epsilon* = bounds_epsilon) const [inherited]

Definition at line 306 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::bounded_theta(), mappel::PointEmitterModel::check_param_shape(), and mappel::PointEmitterModel::make_param_stack().

9.25.4.4 void mappel::PointEmitterModel::check_param_shape (const ParamT & *theta*) const [inherited]

Definition at line 167 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::num_params.

Referenced by mappel::PointEmitterModel::bound_theta(), mappel::PointEmitterModel::bounded_theta(), mappel::PointEmitterModel::bounded_theta_stack(), mappel::PointEmitterModel::reflected_theta(), mappel::PointEmitterModel::reflected_theta_stack(), mappel::PointEmitterModel::theta_in_bounds(), and mappel::PointEmitterModel::theta_stack_in_bounds().

9.25.4.5 void mappel::PointEmitterModel::check_param_shape (const ParamVecT & *theta*) const [inherited]

Definition at line 176 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::num_params.

9.25.4.6 void mappel::PointEmitterModel::check_psf_sigma (double *psf_sigma*) const [inherited]

Definition at line 185 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::global_max_psf_sigma, and mappel::PointEmitterModel::global_min_psf_sigma.

Referenced by mappel::Gauss1DModel::Gauss1DModel(), mappel::Gauss2DModel::Gauss2DModel(), mappel::Gauss2DsModel::Gauss2DsModel(), mappel::Gauss1DsModel::set_max_sigma(), mappel::Gauss2DsModel::set_max_sigma(), mappel::Gauss1DsModel::set_min_sigma(), mappel::Gauss2DsModel::set_min_sigma(), mappel::Gauss1DModel::set_psf_sigma(), and mappel::Gauss2DModel::set_psf_sigma().

9.25.4.7 void mappel::PointEmitterModel::check_psf_sigma (const VecT & *psf_sigma*) const [inherited]

Definition at line 197 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::global_max_psf_sigma, and mappel::PointEmitterModel::global_min_psf_sigma.

9.25.4.8 `int mappel::PointEmitterModel::get_hyperparam_index (const std::string & name) const` `[inline]`,
`[inherited]`

Definition at line 236 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.25.4.9 `StringVecT mappel::PointEmitterModel::get_hyperparam_names () const` `[inline]`,`[inherited]`

Definition at line 256 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.25.4.10 `double mappel::PointEmitterModel::get_hyperparam_value (const std::string & name) const` `[inline]`,
`[inherited]`

Definition at line 232 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

Referenced by mappel::MCMCAdaptor1D::set_background_mcmc_sampling(), and mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling().

9.25.4.11 `PointEmitterModel::ParamT mappel::PointEmitterModel::get_hyperparams () const` `[inline]`,
`[inherited]`

Definition at line 224 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.25.4.12 `const PointEmitterModel::ParamT & mappel::PointEmitterModel::get_lbound () const` `[inline]`,
`[inherited]`

Definition at line 212 of file PointEmitterModel.h.

References mappel::PointEmitterModel::lbound.

Referenced by mappel::MCMCAdaptor1D::MCMCAdaptor1D(), mappel::MCMCAdaptor2D::MCMCAdaptor2D(), and mappel::MCMCAdaptor1D::set_background_mcmc_sampling().

9.25.4.13 `IdxT mappel::PointEmitterModel::get_num_hyperparams () const` `[inline]`,`[inherited]`

Definition at line 208 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_hyperparams.

9.25.4.14 `IdxT mappel::PointEmitterModel::get_num_params () const` `[inline]`,`[inherited]`

Definition at line 160 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.25.4.15 StringVecT mappel::PointEmitterModel::get_param_names () const [inline],[inherited]

Definition at line 248 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.25.4.16 CompositeDist & mappel::PointEmitterModel::get_prior () [inline],[inherited]

Definition at line 200 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

Referenced by mappel::Gauss2DModel::update_internal_1Dsum_estimators(), and mappel::Gauss2DsModel::update_internal_1Dsum_estimators().

9.25.4.17 const CompositeDist & mappel::PointEmitterModel::get_prior () const [inline],[inherited]

Definition at line 204 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.25.4.18 ParallelRngGeneratorT & mappel::PointEmitterModel::get_rng_generator () [static],[inherited]

Definition at line 120 of file PointEmitterModel.cpp.

References mappel::rng_manager.

9.25.4.19 ParallelRngManagerT & mappel::PointEmitterModel::get_rng_manager () [static],[inherited]

Definition at line 115 of file PointEmitterModel.cpp.

References mappel::rng_manager.

9.25.4.20 StatsT mappel::PointEmitterModel::get_stats () const [inherited]

Definition at line 125 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::lbound, mappel::PointEmitterModel::num_hyperparams, mappel::PointEmitterModel::num_params, mappel::PointEmitterModel::prior, mappel::rng_manager, and mappel::PointEmitterModel::ubound.

Referenced by mappel::Gauss1DModel::get_stats(), mappel::Gauss1DsModel::get_stats(), mappel::Gauss2DModel::get_stats(), and mappel::Gauss2DsModel::get_stats().

9.25.4.21 const PointEmitterModel::ParamT & mappel::PointEmitterModel::get_ubound () const [inline],[inherited]

Definition at line 216 of file PointEmitterModel.h.

References mappel::PointEmitterModel::ubound.

Referenced by mappel::Gauss2DsxyModel::get_max_sigma_ratio(), mappel::Gauss2DsModel::get_max_sigma_ratio(), mappel::MCMCAdaptor1D::MCMCAdaptor1D(), mappel::MCMCAdaptor2D::MCMCAdaptor2D(), mappel::MCMCAdaptor1D::set_background_mcmc_sampling(), and mappel::Gauss2DsModel::set_max_sigma_ratio().

9.25.4.22 **bool** mappel::PointEmitterModel::has_hyperparam (const std::string & name) const [inline],[inherited]

Definition at line 228 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.25.4.23 **PointEmitterModel::ParamT** mappel::PointEmitterModel::make_param () const [inline],[inherited]

Definition at line 164 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

Referenced by mappel::Gauss1DModel::initial_theta_estimate(), mappel::Gauss1DsModel::initial_theta_estimate(), mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsxyModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::Gauss1DModel::pixel_hess_update(), mappel::Gauss1DsModel::pixel_hess_update(), mappel::Gauss2DModel::pixel_hess_update(), and mappel::Gauss2DsModel::pixel_hess_update().

9.25.4.24 **template<class FillT > PointEmitterModel::ParamT** mappel::PointEmitterModel::make_param (FillT fill) const [inherited]

Definition at line 181 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.25.4.25 **MatT** mappel::PointEmitterModel::make_param_mat () const [inline],[inherited]

Definition at line 172 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.25.4.26 **template<class FillT > MatT** mappel::PointEmitterModel::make_param_mat (FillT fill) const [inherited]

Definition at line 191 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.25.4.27 **CubeT** mappel::PointEmitterModel::make_param_mat_stack (IdxT n) const [inline],[inherited]

Definition at line 176 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.25.4.28 **template<class FillT > CubeT** mappel::PointEmitterModel::make_param_mat_stack (IdxT n, FillT fill) const [inherited]

Definition at line 196 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.25.4.29 `PointEmitterModel::ParamVecT mappel::PointEmitterModel::make_param_stack (IdxT n) const` `[inline]`,
`[inherited]`

Definition at line 168 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::num_params`.

Referenced by `mappel::PointEmitterModel::bounded_theta_stack()`, and `mappel::PointEmitterModel::reflected_theta_stack()`.

9.25.4.30 `template<class FillT > PointEmitterModel::ParamVecT mappel::PointEmitterModel::make_param_stack (IdxT n, FillT fill) const` `[inherited]`

Definition at line 186 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::num_params`.

9.25.4.31 `prior_hessian::TruncatedGammaDist mappel::PointEmitterModel::make_prior_component_intensity (double mean = default_mean_I, double kappa = default_intensity_kappa)` `[static]`, `[inherited]`

Definition at line 98 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::default_max_I`.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_beta_position()`, `mappel::Gauss1DModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_normal_position()`, `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss1DModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_prior_beta_position()`, `mappel::Gauss1DsModel::make_prior_beta_position()`, `mappel::Gauss1DModel::make_prior_beta_position()`, `mappel::Gauss2DsModel::make_prior_beta_position()`, `mappel::Gauss2DModel::make_prior_normal_position()`, `mappel::Gauss1DsModel::make_prior_normal_position()`, `mappel::Gauss1DModel::make_prior_normal_position()`, and `mappel::Gauss2DsModel::make_prior_normal_position()`.

9.25.4.32 `prior_hessian::ScaledSymmetricBetaDist mappel::PointEmitterModel::make_prior_component_position_beta (IdxT size, double pos_beta = default_beta_pos)` `[static]`, `[inherited]`

Definition at line 92 of file PointEmitterModel.cpp.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_beta_position()`, `mappel::Gauss1DModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss1DsModel::make_prior_beta_position()`, `mappel::Gauss2DModel::make_prior_beta_position()`, and `mappel::Gauss2DsModel::make_prior_beta_position()`.

9.25.4.33 `prior_hessian::TruncatedNormalDist mappel::PointEmitterModel::make_prior_component_position_normal (IdxT size, double pos_sigma = default_sigma_pos)` `[static]`, `[inherited]`

Definition at line 85 of file PointEmitterModel.cpp.

Referenced by `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_default_prior_normal_position()`, `mappel::Gauss1DModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_prior_normal_position()`, `mappel::Gauss1DsModel::make_prior_normal_position()`, `mappel::Gauss1DModel::make_prior_normal_position()`, and `mappel::Gauss2DsModel::make_prior_normal_position()`.

9.25.4.34 `prior_hessian::TruncatedParetoDist mappel::PointEmitterModel::make_prior_component_sigma (double min_sigma, double max_sigma, double alpha = default_alpha_sigma)` `[static],[inherited]`

Definition at line 104 of file `PointEmitterModel.cpp`.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, `mappel::Gauss1DsModel::make_prior_beta_position()`, `mappel::Gauss2DsModel::make_prior_beta_position()`, `mappel::Gauss1DsModel::make_prior_normal_position()`, and `mappel::Gauss2DsModel::make_prior_normal_position()`.

9.25.4.35 `MAPEstimator& mappel::MAPEstimator::operator= (const MAPEstimator & o)` `[inline],[protected]`

Definition at line 27 of file `MAPEstimator.h`.

Referenced by `mappel::Gauss1DMap::operator=()`, `mappel::Gauss1DsMap::operator=()`, `mappel::Gauss2DsMap::operator=()`, and `mappel::Gauss2DMap::operator=()`.

9.25.4.36 `MAPEstimator& mappel::MAPEstimator::operator= (MAPEstimator && o)` `[inline],[protected]`

Definition at line 28 of file `MAPEstimator.h`.

9.25.4.37 `PointEmitterModel::ParamT mappel::PointEmitterModel::reflected_theta (const ParamT & theta) const` `[inherited]`

Definition at line 276 of file `PointEmitterModel.cpp`.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::PointEmitterModel::reflected_theta_stack()`.

9.25.4.38 `PointEmitterModel::ParamVecT mappel::PointEmitterModel::reflected_theta_stack (const ParamVecT & theta) const` `[inherited]`

Definition at line 316 of file `PointEmitterModel.cpp`.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::make_param_stack()`, and `mappel::PointEmitterModel::reflected_theta()`.

9.25.4.39 `void mappel::PointEmitterModel::rename_hyperparam (const std::string & old_name, const std::string & new_name)` `[inline],[inherited]`

Definition at line 244 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

9.25.4.40 `template<class RngT > PointEmitterModel::ParamT mappel::PointEmitterModel::sample_prior (RngT & rng) const`
`[inherited]`

Definition at line 264 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

9.25.4.41 `PointEmitterModel::ParamT mappel::PointEmitterModel::sample_prior () const` `[inline],[inherited]`

Definition at line 268 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`, and `mappel::rng_manager`.

9.25.4.42 `void mappel::PointEmitterModel::set_bounds (const ParamT & lbound_, const ParamT & ubound_)`
`[inherited]`

Box-type parameter bounds

Modifies the prior bounds to prevent sampling outside the valid box-constraints.

Definition at line 213 of file `PointEmitterModel.cpp`.

References `mappel::PointEmitterModel::bounds_epsilon`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

9.25.4.43 `void mappel::PointEmitterModel::set_hyperparam_names (const StringVecT & desc)` `[inline],[inherited]`

Definition at line 260 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

9.25.4.44 `void mappel::PointEmitterModel::set_hyperparam_value (const std::string & name, double value)` `[inline],[inherited]`

Definition at line 240 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

9.25.4.45 `void mappel::PointEmitterModel::set_hyperparams (const VecT & hyperparams)` `[inline],[inherited]`

Definition at line 220 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

Referenced by `mappel::Gauss2DModel::set_hyperparams()`, and `mappel::Gauss2DsModel::set_hyperparams()`.

9.25.4.46 `void mappel::PointEmitterModel::set_lbound (const ParamT & lbound)` [inherited]

Definition at line 226 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::bounds_epsilon`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::Gauss1DsModel::set_min_sigma()`.

9.25.4.47 `void mappel::PointEmitterModel::set_param_names (const StringVecT & desc)` [inline],[inherited]

Definition at line 252 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.25.4.48 `void mappel::PointEmitterModel::set_prior (CompositeDist && prior_)` [inherited]

Definition at line 158 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_hyperparams`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::Gauss2DModel::set_prior()`, and `mappel::Gauss2DsModel::set_prior()`.

9.25.4.49 `void mappel::PointEmitterModel::set_prior (const CompositeDist & prior_)` [inherited]

Definition at line 149 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_hyperparams`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

9.25.4.50 `void mappel::PointEmitterModel::set_rng_seed (RngSeedT seed)` [static],[inherited]

Definition at line 110 of file PointEmitterModel.cpp.

References `mappel::rng_manager`.

9.25.4.51 `void mappel::PointEmitterModel::set_ubound (const ParamT & ubound)` [inherited]

Definition at line 237 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::bounds_epsilon`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::Gauss1DsModel::set_max_sigma()`, and `mappel::Gauss2DsModel::set_max_sigma_ratio()`.

9.25.4.52 `bool mappel::PointEmitterModel::theta_in_bounds (const ParamT & theta) const` [inherited]

Definition at line 257 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsModel::initial_theta_estimate()`, `mappel::Gauss1DModel::make_stencil()`, `mappel::Gauss1DsModel::make_stencil()`, `mappel::Gauss2DModel::make_stencil()`, `mappel::Gauss2DsxModel::make_stencil()`, `mappel::Gauss2DsModel::make_stencil()`, and `mappel::PointEmitterModel::theta_stack_in_bounds()`.

9.25.4.53 `BoolVecT mappel::PointEmitterModel::theta_stack_in_bounds (const ParamVecT & theta) const` [inherited]

Definition at line 296 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, and `mappel::PointEmitterModel::theta_in_bounds()`.

9.25.5 Member Data Documentation

9.25.5.1 `const double mappel::PointEmitterModel::bounds_epsilon = 1.0E-6` [static], [inherited]

Distance from the boundary to constrain in `bound_theta` and `bounded_theta` methods

Definition at line 52 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::Gauss2DsModel::set_max_sigma_ratio()`, and `mappel::PointEmitterModel::set_ubound()`.

9.25.5.2 `const double mappel::PointEmitterModel::default_alpha_sigma = 2` [static], [inherited]

Default per-pixel background gamma distribution shape

Definition at line 62 of file PointEmitterModel.h.

9.25.5.3 `const double mappel::PointEmitterModel::default_beta_pos = 3` [static], [inherited]

Default position parameter in symmetric beta-distributions

Definition at line 56 of file PointEmitterModel.h.

9.25.5.4 `const double mappel::PointEmitterModel::default_intensity_kappa = 2` [static], [inherited]

Default shape for intensity gamma distributions

Definition at line 60 of file PointEmitterModel.h.

9.25.5.5 `const double mappel::PointEmitterModel::default_max_l = INFINITY` `[static], [inherited]`

Default maximum emitter intensity

Definition at line 59 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::make_prior_component_intensity()`.

9.25.5.6 `const double mappel::PointEmitterModel::default_mean_l = 300` `[static], [inherited]`

Default emitter intensity mean

Definition at line 58 of file PointEmitterModel.h.

Referenced by `mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling()`.

9.25.5.7 `const double mappel::PointEmitterModel::default_pixel_mean_bg = 4` `[static], [inherited]`

Default per-pixel mean background counts

Definition at line 61 of file PointEmitterModel.h.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_beta_position()`, `mappel::Gauss1DModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_default_prior_normal_position()`, `mappel::Gauss1DModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, and `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`.

9.25.5.8 `const double mappel::PointEmitterModel::default_sigma_pos = 1` `[static], [inherited]`

Default position parameter in symmetric beta-distributions

Definition at line 57 of file PointEmitterModel.h.

9.25.5.9 `const std::string mappel::PointEmitterModel::DefaultSeperableInitEstimator = "TrustRegion"` `[static], [inherited]`

Estimator name to use in 1D separable initializations

Definition at line 49 of file PointEmitterModel.h.

Referenced by `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsxyModel::initial_theta_estimate()`, and `mappel::Gauss2DsModel::initial_theta_estimate()`.

9.25.5.10 `const double mappel::PointEmitterModel::global_max_psf_sigma = 1E2` `[static], [inherited]`

Global maximum for any `psf_sigma`. Sizes above this value are invalid, and nowhere near useful for practical point emitter localization

Definition at line 54 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::check_psf_sigma()`.

9.25.5.11 `const double mappel::PointEmitterModel::global_min_psf_sigma = 1E-1` `[static]`, `[inherited]`

Global minimum for any `psf_sigma`. Sizes below this value are invalid, and nowhere near useful for practical point emitter localization

Definition at line 53 of file `PointEmitterModel.h`.

Referenced by `mappel::PointEmitterModel::check_psf_sigma()`.

9.25.5.12 `ParamT mappel::PointEmitterModel::lbound` `[protected]`, `[inherited]`

Definition at line 148 of file `PointEmitterModel.h`.

Referenced by `mappel::PointEmitterModel::bound_theta()`, `mappel::PointEmitterModel::bounded_theta()`, `mappel::PointEmitterModel::get_lbound()`, `mappel::PointEmitterModel::get_stats()`, `mappel::Gauss1DsModel::initial_theta_estimate()`, `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsModel::initial_theta_estimate()`, `mappel::PointEmitterModel::operator=()`, `mappel::PointEmitterModel::reflected_theta()`, `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::PointEmitterModel::set_prior()`, `mappel::PointEmitterModel::set_ubound()`, and `mappel::PointEmitterModel::theta_in_bounds()`.

9.25.5.13 `IdxT mappel::PointEmitterModel::num_hyperparams` `[protected]`, `[inherited]`

Definition at line 147 of file `PointEmitterModel.h`.

Referenced by `mappel::PointEmitterModel::get_num_hyperparams()`, `mappel::PointEmitterModel::get_stats()`, `mappel::PointEmitterModel::operator=()`, and `mappel::PointEmitterModel::set_prior()`.

9.25.5.14 `IdxT mappel::PointEmitterModel::num_params` `[protected]`, `[inherited]`

Definition at line 146 of file `PointEmitterModel.h`.

Referenced by `mappel::PointEmitterModel::bound_theta()`, `mappel::PointEmitterModel::bounded_theta()`, `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::get_num_params()`, `mappel::PointEmitterModel::get_stats()`, `mappel::Gauss1DModel::initial_theta_estimate()`, `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsModel::initial_theta_estimate()`, `mappel::PointEmitterModel::make_param()`, `mappel::PointEmitterModel::make_param_mat()`, `mappel::PointEmitterModel::make_param_mat_stack()`, `mappel::PointEmitterModel::make_param_stack()`, `mappel::PointEmitterModel::operator=()`, `mappel::PointEmitterModel::reflected_theta()`, `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::PointEmitterModel::set_prior()`, `mappel::PointEmitterModel::set_ubound()`, and `mappel::PointEmitterModel::theta_in_bounds()`.

9.25.5.15 `CompositeDist mappel::PointEmitterModel::prior` `[protected]`, `[inherited]`

Definition at line 145 of file `PointEmitterModel.h`.

Referenced by `mappel::Gauss2DModel::debug_internal_sum_model_y()`, `mappel::Gauss2DsModel::debug_internal_sum_model_y()`, `mappel::Gauss2DModel::Gauss2DModel()`, `mappel::Gauss2DsModel::Gauss2DsModel()`, `mappel::PointEmitterModel::get_hyperparam_index()`, `mappel::PointEmitterModel::get_hyperparam_names()`, `mappel::PointEmitterModel::get_hyperparam_value()`, `mappel::PointEmitterModel::get_hyperparams()`, `mappel::Gauss1DsModel::get_max_sigma()`, `mappel::Gauss1DsModel::get_min_sigma()`, `mappel::PointEmitterModel::get_param_names()`, `mappel::PointEmitterModel::get_prior()`, `mappel::PointEmitterModel::get_stats()`, `mappel::PointEmitterModel::has_hyperparam()`, `mappel::PointEmitterModel::operator=()`, `mappel::PointEmitterModel::PointEmitterModel()`, `mappel::PointEmitterModel::rename_hyperparam()`, `mappel::PointEmitterModel::sample_prior()`, `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_hyperparam_names()`, `mappel::PointEmitterModel::set_hyperparam_value()`, `mappel::PointEmitterModel::set_hyperparams()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::Gauss1DsModel::set_max_sigma()`, `mappel::Gauss1DsModel::set_min_sigma()`, `mappel::PointEmitterModel::set_param_names()`, `mappel::PointEmitterModel::set_prior()`, and `mappel::PointEmitterModel::set_ubound()`.

9.25.5.16 ParamT mappel::PointEmitterModel::ubound [protected],[inherited]

Definition at line 148 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::bound_theta(), mappel::PointEmitterModel::bounded_theta(), mappel::PointEmitterModel::get_stats(), mappel::PointEmitterModel::get_ubound(), mappel::Gauss1DsModel::initial_theta_estimate(), mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::PointEmitterModel::operator=(), mappel::PointEmitterModel::reflected_theta(), mappel::PointEmitterModel::set_bounds(), mappel::PointEmitterModel::set_lbound(), mappel::PointEmitterModel::set_prior(), mappel::PointEmitterModel::set_ubound(), and mappel::PointEmitterModel::theta_in_bounds().

The documentation for this class was generated from the following file:

- [MAPEstimator.h](#)

9.26 mappel::estimator::IterativeMaximizer< Model >::MaximizerData Class Reference

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/estimator.h>
```

Public Member Functions

- [MaximizerData](#) (const Model &model, const [ModelDataT](#)< Model > &im, const [StencilT](#)< Model > &s, bool save_seq=false)
- [MaximizerData](#) (const Model &model, const [ModelDataT](#)< Model > &im, const [StencilT](#)< Model > &s, double rllh, bool save_seq=false)
- void [record_iteration](#) ()
- void [record_iteration](#) (const [ParamT](#)< Model > &accepted_theta)
Record an iteration point (derivatives computed)
- void [record_backtrack](#) (double rejected_rllh)
Record a backtracked point (no derivative computations performed) Using the saved theta as the default.
- void [record_backtrack](#) (const [ParamT](#)< Model > &rejected_theta, double rejected_rllh)
Record a backtracked point (no derivative computations performed)
- bool [has_theta_sequence](#) () const
Return the saved theta sequence.
- [IdxT](#) [get_sequence_len](#) () const
- [ParamVecT](#)< Model > [get_theta_sequence](#) () const
- [IdxVecT](#) [get_backtrack_idx](#) () const
- [VecT](#) [get_theta_sequence_rllh](#) () const
- [StencilT](#)< Model > & [stencil](#) ()
Get the current stencil.
- void [set_stencil](#) (const [StencilT](#)< Model > &s)
- void [save_stencil](#) ()
Save the current stencil to the single reserve spot. Overwrites any previously saved stencil. This is used to save a stencil when backtracking.
- void [restore_stencil](#) ()
Restore the single reserved stencil to the current stencil spot. Overwrites any previously saved stencil. This is used to restore a last good iterate (and associated stencil data) when backtracking.
- const [StencilT](#)< Model > & [saved_stencil](#) () const

- *Get the saved stencil.*
- const ParamT< Model > & theta () const
- *Get the current stencil's theta.*
- const ParamT< Model > & saved_theta () const
- *Get the saved stencil's theta.*
- void set_fixed_parameters (const IdxVecT &fixed_parameters_idxes)
- bool has_fixed_parameters () const
- IdxT num_fixed_parameters () const

Public Attributes

- const ModelDataT< Model > & im
- ParamT< Model > grad
- ParamT< Model > step
- double rllh
- int nBacktracks =0
- int nIterations =0
- IdxVecT fixed_idxes
- IdxVecT free_idxes

Protected Member Functions

- void expand_max_seq_len ()

Protected Attributes

- const IdxT num_params
- StencilT< Model > s0
- StencilT< Model > s1
- bool current_stencil
- int max_seq_len =0
- int seq_len =0
- ParamVecT< Model > theta_seq
- VecT seq_rllh
- IdxVecT backtrack_idxes

Static Protected Attributes

- static const int DefaultMaxSeqLength = 50
- Default maximum length of sequence to perpare to save if debugging.*

9.26.1 Detailed Description

```
template<class Model>
class mappel::estimator::IterativeMaximizer< Model >::MaximizerData
```

Definition at line 477 of file estimator.h.

9.26.2 Constructor & Destructor Documentation

9.26.2.1 `template<class Model > mappel::estimator::IterativeMaximizer< Model >::MaximizerData::MaximizerData (const Model & model, const ModelDataT< Model > & im, const StencilT< Model > & s, bool save_seq = false)`

Definition at line 738 of file estimator_impl.h.

9.26.2.2 `template<class Model > mappel::estimator::IterativeMaximizer< Model >::MaximizerData::MaximizerData (const Model & model, const ModelDataT< Model > & im, const StencilT< Model > & s, double rllh, bool save_seq = false)`

Definition at line 744 of file estimator_impl.h.

References `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::backtrack_idx`s, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::DefaultMaxSeqLength`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::max_seq_len`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::record_iteration()`, `mappel::methods::objective::rllh()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::rllh`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::seq_rllh`, and `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::theta_seq`.

9.26.3 Member Function Documentation

9.26.3.1 `template<class Model > void mappel::estimator::IterativeMaximizer< Model >::MaximizerData::expand_max_seq_len () [protected]`

Definition at line 766 of file estimator_impl.h.

References `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::backtrack_idx`s, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::max_seq_len`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::seq_rllh`, and `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::theta_seq`.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::record_backtrack()`, and `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::record_iteration()`.

9.26.3.2 `template<class Model > IdxVecT mappel::estimator::IterativeMaximizer< Model >::MaximizerData::get_backtrack_idx () const [inline]`

Definition at line 504 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::record_run_statistics()`.

9.26.3.3 `template<class Model > IdxT mappel::estimator::IterativeMaximizer< Model >::MaximizerData::get_sequence_len () const [inline]`

Definition at line 502 of file estimator.h.

9.26.3.4 `template<class Model > ParamVecT<Model> mappel::estimator::IterativeMaximizer< Model >::MaximizerData::get_theta_sequence () const [inline]`

Definition at line 503 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::compute_estimate_debug()`, `mappel::estimator::IterativeMaximizer< Model >::local_maximize()`, and `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.26.3.5 `template<class Model > VecT mappel::estimator::IterativeMaximizer< Model >::MaximizerData::get_theta_sequence_rllh () const [inline]`

Definition at line 505 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::compute_estimate_debug()`, `mappel::estimator::IterativeMaximizer< Model >::local_maximize()`, and `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.26.3.6 `template<class Model > bool mappel::estimator::IterativeMaximizer< Model >::MaximizerData::has_fixed_parameters () const [inline]`

Definition at line 528 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.26.3.7 `template<class Model > bool mappel::estimator::IterativeMaximizer< Model >::MaximizerData::has_theta_sequence () const [inline]`

Return the saved theta sequence.

Definition at line 501 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::record_run_statistics()`.

9.26.3.8 `template<class Model > IdxT mappel::estimator::IterativeMaximizer< Model >::MaximizerData::num_fixed_parameters () const [inline]`

Definition at line 529 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.26.3.9 `template<class Model > void mappel::estimator::IterativeMaximizer< Model >::MaximizerData::record_backtrack (double rejected_rllh) [inline]`

Record a backtracked point (no derivative computations performed) Using the saved theta as the default.

Definition at line 496 of file estimator.h.

References `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::record_backtrack()`, and `mappel::estimator::MLEData::theta`.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::backtrack()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, `mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack()`, and `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::record_backtrack()`.

9.26.3.10 `template<class Model > void mappel::estimator::IterativeMaximizer< Model >::MaximizerData::record_backtrack (const ParamT< Model > & rejected_theta, double rejected_rllh)`

Record a backtracked point (no derivative computations performed)

Definition at line 787 of file estimator_impl.h.

References `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::backtrack_idx`s, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::expand_max_seq_len()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::max_seq_len`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::nBacktracks`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::seq_len`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::seq_rllh`, and `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::theta_seq`.

9.26.3.11 `template<class Model > void mappel::estimator::IterativeMaximizer< Model >::MaximizerData::record_iteration () [inline]`

Definition at line 492 of file estimator.h.

References `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::record_iteration()`, and `mappel::estimator::MLEData::theta`.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::backtrack()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::MaximizerData()`, `mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack()`, and `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::record_iteration()`.

9.26.3.12 `template<class Model > void mappel::estimator::IterativeMaximizer< Model >::MaximizerData::record_iteration (const ParamT< Model > & accepted_theta)`

Record an iteration point (derivatives computed)

Definition at line 775 of file estimator_impl.h.

References `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::expand_max_seq_len()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::max_seq_len`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::nIterations`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::rllh`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::seq_len`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::seq_rllh`, and `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::theta_seq`.

9.26.3.13 `template<class Model > void mappel::estimator::IterativeMaximizer< Model >::MaximizerData::restore_stencil () [inline]`

Restore the single reserved stencil to the current stencil spot. Overwrites any previously saved stencil. This is used to restore a last good iterate (and associated stencil data) when backtracking.

Definition at line 519 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::backtrack()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, and `mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack()`.

9.26.3.14 `template<class Model > void mappel::estimator::IterativeMaximizer< Model >::MaximizerData::save_stencil ()`
`[inline]`

Save the current stencil to the single reserve spot. Overwrites any previously saved stencil. This is used to save a stencil when backtracking.

Definition at line 514 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::backtrack()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, and `mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack()`.

9.26.3.15 `template<class Model > const StencilT<Model>& mappel::estimator::IterativeMaximizer< Model >::MaximizerData::saved_stencil () const`
`[inline]`

Get the saved stencil.

Definition at line 521 of file estimator.h.

9.26.3.16 `template<class Model > const ParamT<Model>& mappel::estimator::IterativeMaximizer< Model >::MaximizerData::saved_theta () const`
`[inline]`

Get the saved stencil's theta.

Definition at line 525 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::backtrack()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, and `mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack()`.

9.26.3.17 `template<class Model > void mappel::estimator::IterativeMaximizer< Model >::MaximizerData::set_fixed_parameters (const IdxVecT & fixed_parameters_idxxs)`

Definition at line 800 of file estimator_impl.h.

References `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::fixed_idxxs`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::free_idxxs`, and `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::num_params`.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::compute_profile_estimate()`, and `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.26.3.18 `template<class Model > void mappel::estimator::IterativeMaximizer< Model >::MaximizerData::set_stencil (const StencilT< Model > & s)`
`[inline]`

Definition at line 509 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::backtrack()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, and `mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack()`.

9.26.3.19 `template<class Model > StencilT<Model>& mappel::estimator::IterativeMaximizer< Model >::MaximizerData::stencil () [inline]`

Get the current stencil.

Definition at line 508 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::backtrack()`, `mappel::estimator::IterativeMaximizer< Model >::compute_estimate()`, `mappel::estimator::IterativeMaximizer< Model >::compute_estimate_debug()`, `mappel::estimator::IterativeMaximizer< Model >::compute_profile_estimate()`, `mappel::estimator::IterativeMaximizer< Model >::local_maximize()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, and `mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack()`.

9.26.3.20 `template<class Model > const ParamT<Model>& mappel::estimator::IterativeMaximizer< Model >::MaximizerData::theta () const [inline]`

Get the current stencil's theta.

Definition at line 523 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::backtrack()`, `mappel::estimator::IterativeMaximizer< Model >::compute_estimate()`, `mappel::estimator::IterativeMaximizer< Model >::compute_estimate_debug()`, `mappel::estimator::IterativeMaximizer< Model >::local_maximize()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, and `mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack()`.

9.26.4 Member Data Documentation

9.26.4.1 `template<class Model > IdxVecT mappel::estimator::IterativeMaximizer< Model >::MaximizerData::backtrack_idx [protected]`

Definition at line 540 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::expand_max_seq_len()`, `mappel::estimator::IterativeMaximizer< Model >::get_debug_stats()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::MaximizerData()`, and `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::record_backtrack()`.

9.26.4.2 `template<class Model > bool mappel::estimator::IterativeMaximizer< Model >::MaximizerData::current_stencil [protected]`

Definition at line 534 of file estimator.h.

9.26.4.3 `template<class Model > const int mappel::estimator::IterativeMaximizer< Model >::MaximizerData::DefaultMaxSeqLength = 50 [static], [protected]`

Default maximum length of sequence to prepare to save if debugging.

Definition at line 531 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::MaximizerData()`.

9.26.4.4 `template<class Model > IdxVecT mappel::estimator::IterativeMaximizer< Model >::MaximizerData::fixed_idx`

Definition at line 487 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, and `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::set_fixed_parameters()`.

9.26.4.5 `template<class Model > IdxVecT mappel::estimator::IterativeMaximizer< Model >::MaximizerData::free_idx`

Definition at line 487 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, and `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::set_fixed_parameters()`.

9.26.4.6 `template<class Model > ParamT<Model> mappel::estimator::IterativeMaximizer< Model >::MaximizerData::grad`

Definition at line 480 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::backtrack()`, and `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.26.4.7 `template<class Model > const ModelDataT<Model>& mappel::estimator::IterativeMaximizer< Model >::MaximizerData::im`

Definition at line 479 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::backtrack()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, and `mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack()`.

9.26.4.8 `template<class Model > int mappel::estimator::IterativeMaximizer< Model >::MaximizerData::max_seq_len = 0` `[protected]`

Definition at line 536 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::expand_max_seq_len()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::MaximizerData()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::record_backtrack()`, and `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::record_iteration()`.

9.26.4.9 `template<class Model > int mappel::estimator::IterativeMaximizer< Model >::MaximizerData::nBacktracks = 0`

Definition at line 484 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::record_backtrack()`, and `mappel::estimator::IterativeMaximizer< Model >::record_run_statistics()`.

9.26.4.10 `template<class Model > int mappel::estimator::IterativeMaximizer< Model >::MaximizerData::nIterations =0`

Definition at line 485 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::record_iteration()`, and `mappel::estimator::IterativeMaximizer< Model >::record_run_statistics()`.

9.26.4.11 `template<class Model > const IdxT mappel::estimator::IterativeMaximizer< Model >::MaximizerData::num_params [protected]`

Definition at line 532 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::set_fixed_parameters()`.

9.26.4.12 `template<class Model > double mappel::estimator::IterativeMaximizer< Model >::MaximizerData::rllh`

Definition at line 482 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::backtrack()`, `mappel::estimator::IterativeMaximizer< Model >::compute_estimate()`, `mappel::estimator::IterativeMaximizer< Model >::compute_estimate_debug()`, `mappel::estimator::IterativeMaximizer< Model >::compute_profile_estimate()`, `mappel::estimator::IterativeMaximizer< Model >::local_maximize()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::MaximizerData()`, `mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack()`, and `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::record_iteration()`.

9.26.4.13 `template<class Model > StencilT<Model> mappel::estimator::IterativeMaximizer< Model >::MaximizerData::s0 [protected]`

Definition at line 533 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.26.4.14 `template<class Model > StencilT<Model> mappel::estimator::IterativeMaximizer< Model >::MaximizerData::s1 [protected]`

Definition at line 533 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.26.4.15 `template<class Model > int mappel::estimator::IterativeMaximizer< Model >::MaximizerData::seq_len =0 [protected]`

Definition at line 537 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::record_backtrack()`, and `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::record_iteration()`.

9.26.4.16 `template<class Model> VecT mappel::estimator::IterativeMaximizer< Model>::MaximizerData::seq_rllh`
`[protected]`

Definition at line 539 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::expand_max_seq_len()`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::MaximizerData()`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::record_backtrack()`, and `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::record_iteration()`.

9.26.4.17 `template<class Model> ParamT<Model> mappel::estimator::IterativeMaximizer< Model>::MaximizerData::step`

Definition at line 481 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model>::backtrack()`, `mappel::estimator::IterativeMaximizer< Model>::compute_profile_bound_debug()`, `mappel::estimator::IterativeMaximizer< Model>::local_profile_maximize()`, and `mappel::estimator::IterativeMaximizer< Model>::profile_bound_backtrack()`.

9.26.4.18 `template<class Model> ParamVecT<Model> mappel::estimator::IterativeMaximizer< Model>::MaximizerData::theta_seq` `[protected]`

Definition at line 538 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::expand_max_seq_len()`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::MaximizerData()`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::record_backtrack()`, and `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::record_iteration()`.


The documentation for this class was generated from the following files:

- [estimator.h](#)
- [estimator_impl.h](#)

9.27 mappel::MCMCAdaptor1D Class Reference

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/MCMCAdaptor1D.h>
```

Inheritance diagram for `mappel::MCMCAdaptor1D`:

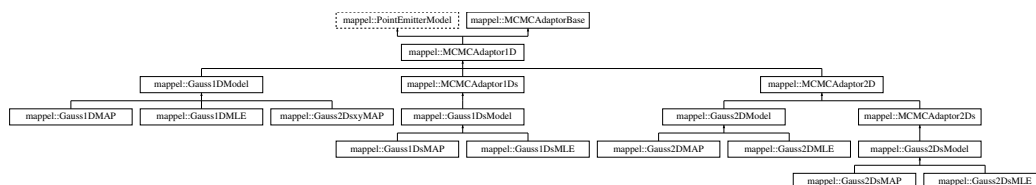

Public Types

- using [ParamT](#) = arma::vec
- using [ParamVecT](#) = arma::mat

Public Member Functions

- void [sample_mcmc_candidate](#) (IdxT sample_index, [ParamT](#) &candidate, double step_scale=1.0) const
- void [sample_mcmc_candidate](#) (IdxT sample_index, [ParamT](#) &candidate, const [IdxVecT](#) &fixed_parameters_↵ mask, double step_scale=1.0) const
- void [set_intensity_mcmc_sampling](#) (double eta_l=-1)
- void [set_background_mcmc_sampling](#) (double eta_bg=-1)
- [IdxT](#) [get_num_params](#) () const
- void [check_param_shape](#) (const [ParamT](#) &theta) const
- void [check_param_shape](#) (const [ParamVecT](#) &theta) const
- void [check_psf_sigma](#) (double psf_sigma) const
- void [check_psf_sigma](#) (const [VecT](#) &psf_sigma) const
- [ParamT](#) [make_param](#) () const
- template<class FillT >
 [ParamT](#) [make_param](#) (FillT fill) const
- [ParamVecT](#) [make_param_stack](#) (IdxT n) const
- template<class FillT >
 [ParamVecT](#) [make_param_stack](#) (IdxT n, FillT fill) const
- [MatT](#) [make_param_mat](#) () const
- template<class FillT >
 [MatT](#) [make_param_mat](#) (FillT fill) const
- [CubeT](#) [make_param_mat_stack](#) (IdxT n) const
- template<class FillT >
 [CubeT](#) [make_param_mat_stack](#) (IdxT n, FillT fill) const
- CompositeDist & [get_prior](#) ()
- const CompositeDist & [get_prior](#) () const
- void [set_prior](#) (CompositeDist &&prior_)
- void [set_prior](#) (const CompositeDist &prior_)
- [IdxT](#) [get_num_hyperparams](#) () const
- void [set_hyperparams](#) (const [VecT](#) &hyperparams)
- [VecT](#) [get_hyperparams](#) () const
- bool [has_hyperparam](#) (const std::string &name) const
- double [get_hyperparam_value](#) (const std::string &name) const
- int [get_hyperparam_index](#) (const std::string &name) const
- void [set_hyperparam_value](#) (const std::string &name, double value)
- void [rename_hyperparam](#) (const std::string &old_name, const std::string &new_name)
- [StringVecT](#) [get_param_names](#) () const
- void [set_param_names](#) (const [StringVecT](#) &desc)
- [StringVecT](#) [get_hyperparam_names](#) () const
- void [set_hyperparam_names](#) (const [StringVecT](#) &desc)
- template<class RngT >
 [ParamT](#) [sample_prior](#) (RngT &rng) const
- [ParamT](#) [sample_prior](#) () const
- void [set_bounds](#) (const [ParamT](#) &lbound, const [ParamT](#) &ubound)
- void [set_lbound](#) (const [ParamT](#) &lbound)

- void `set_ubound` (const `ParamT` &`ubound`)
- const `ParamT` & `get_lbound` () const
- const `ParamT` & `get_ubound` () const
- bool `theta_in_bounds` (const `ParamT` &`theta`) const
- void `bound_theta` (`ParamT` &`theta`, double `epsilon=bounds_epsilon`) const
- `ParamT` `bounded_theta` (const `ParamT` &`theta`, double `epsilon=bounds_epsilon`) const
- `ParamT` `reflected_theta` (const `ParamT` &`theta`) const
- `BoolVecT` `theta_stack_in_bounds` (const `ParamVecT` &`theta`) const
- `ParamVecT` `bounded_theta_stack` (const `ParamVecT` &`theta`, double `epsilon=bounds_epsilon`) const
- `ParamVecT` `reflected_theta_stack` (const `ParamVecT` &`theta`) const
- void `set_mcmc_sigma_scale` (double `scale`)
- double `get_mcmc_sigma_scale` () const
- `IdxT` `get_mcmc_num_phases` () const

Static Public Member Functions

- static `prior_hessian::TruncatedNormalDist` `make_prior_component_position_normal` (`IdxT` `size`, double `pos_↵` `sigma=default_sigma_pos`)
- static `prior_hessian::ScaledSymmetricBetaDist` `make_prior_component_position_beta` (`IdxT` `size`, double `pos_↵` `beta=default_beta_pos`)
- static `prior_hessian::TruncatedGammaDist` `make_prior_component_intensity` (double `mean=default_mean_↵` `l`, double `kappa=default_intensity_kappa`)
- static `prior_hessian::TruncatedParetoDist` `make_prior_component_sigma` (double `min_sigma`, double `max_↵` `sigma`, double `alpha=default_alpha_sigma`)
- static void `set_rng_seed` (`RngSeedT` `seed`)
- static `ParallelRngManagerT` & `get_rng_manager` ()
- static `ParallelRngGeneratorT` & `get_rng_generator` ()

Static Public Attributes

- static const std::string `DefaultSeperableInitEstimator` = "TrustRegion"
- static const double `bounds_epsilon` = 1.0E-6
- static const double `global_min_psf_sigma` = 1E-1
- static const double `global_max_psf_sigma` = 1E2
- static const double `default_beta_pos` = 3
- static const double `default_sigma_pos` = 1
- static const double `default_mean_l` = 300
- static const double `default_max_l` = INFINITY
- static const double `default_intensity_kappa` = 2
- static const double `default_pixel_mean_bg` = 4
- static const double `default_alpha_sigma` = 2
- static const double `global_default_mcmc_sigma_scale` = 0.05
- static const double `global_max_mcmc_sigma_scale` = 0.5

Protected Member Functions

- [MCMCAdaptor1D](#) ()
- [MCMCAdaptor1D](#) (double [sigma_scale](#))
- [MCMCAdaptor1D](#) (const [MCMCAdaptor1D](#) &o)
- [MCMCAdaptor1D](#) ([MCMCAdaptor1D](#) &&o)
- [MCMCAdaptor1D](#) & [operator=](#) (const [MCMCAdaptor1D](#) &o)
- [MCMCAdaptor1D](#) & [operator=](#) ([MCMCAdaptor1D](#) &&o)
- [StatsT](#) [get_stats](#) () const
- void [set_mcmc_num_phases](#) ([IdxT](#) [num_phases](#))

Protected Attributes

- double [eta_x](#) =0
- double [eta_l](#) =0
- double [eta_bg](#) =0
- CompositeDist [prior](#)
- [IdxT](#) [num_params](#)
- [IdxT](#) [num_hyperparams](#)
- [ParamT](#) [lbound](#)
- [ParamT](#) [ubound](#)
- [IdxT](#) [num_phases](#)
- double [sigma_scale](#)

9.27.1 Detailed Description

Definition at line 15 of file [MCMCAdaptor1D.h](#).

9.27.2 Member Typedef Documentation

9.27.2.1 `using mappel::PointEmitterModel::ParamT = arma::vec` [inherited]

Parameter vector

Definition at line 47 of file [PointEmitterModel.h](#).

9.27.2.2 `using mappel::PointEmitterModel::ParamVecT = arma::mat` [inherited]

Vector of parameter vectors

Definition at line 48 of file [PointEmitterModel.h](#).

9.27.3 Constructor & Destructor Documentation

9.27.3.1 `mappel::MCMCAdaptor1D::MCMCAdaptor1D ()` [protected]

Definition at line 11 of file [MCMCAdaptor1D.cpp](#).

9.27.3.2 mappel::MCMCAdaptor1D::MCMCAdaptor1D (double *sigma_scale*) [explicit], [protected]

Definition at line 14 of file MCMCAdaptor1D.cpp.

References `eta_x`, `mappel::PointEmitterModel::get_lbound()`, `mappel::PointEmitterModel::get_ubound()`, `set_↔background_mcmc_sampling()`, `set_intensity_mcmc_sampling()`, and `mappel::MCMCAdaptorBase::sigma_scale`.

9.27.3.3 mappel::MCMCAdaptor1D::MCMCAdaptor1D (const MCMCAdaptor1D & o) [protected]

Definition at line 24 of file MCMCAdaptor1D.cpp.

References `eta_bg`, `eta_l`, and `eta_x`.

9.27.3.4 mappel::MCMCAdaptor1D::MCMCAdaptor1D (MCMCAdaptor1D && o) [protected]

Definition at line 33 of file MCMCAdaptor1D.cpp.

References `eta_bg`, `eta_l`, and `eta_x`.

9.27.4 Member Function Documentation

9.27.4.1 void mappel::PointEmitterModel::bound_theta (ParamT & *theta*, double *epsilon* = bounds_epsilon) const [inherited]

Definition at line 248 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::Point↔EmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

9.27.4.2 PointEmitterModel::ParamT mappel::PointEmitterModel::bounded_theta (const ParamT & *theta*, double *epsilon* = bounds_epsilon) const [inherited]

Definition at line 265 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::Point↔EmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::PointEmitterModel::bounded_theta_stack()`.

9.27.4.3 PointEmitterModel::ParamVecT mappel::PointEmitterModel::bounded_theta_stack (const ParamVecT & *theta*, double *epsilon* = bounds_epsilon) const [inherited]

Definition at line 306 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::bounded_theta()`, `mappel::PointEmitterModel::check_param_shape()`, and `mappel::PointEmitterModel::make_param_stack()`.

9.27.4.4 `void mappel::PointEmitterModel::check_param_shape (const ParamT & theta) const` [inherited]

Definition at line 167 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::num_params.

Referenced by mappel::PointEmitterModel::bound_theta(), mappel::PointEmitterModel::bounded_theta(), mappel::PointEmitterModel::bounded_theta_stack(), mappel::PointEmitterModel::reflected_theta(), mappel::PointEmitterModel::reflected_theta_stack(), mappel::PointEmitterModel::theta_in_bounds(), and mappel::PointEmitterModel::theta_stack_in_bounds().

9.27.4.5 `void mappel::PointEmitterModel::check_param_shape (const ParamVecT & theta) const` [inherited]

Definition at line 176 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::num_params.

9.27.4.6 `void mappel::PointEmitterModel::check_psf_sigma (double psf_sigma) const` [inherited]

Definition at line 185 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::global_max_psf_sigma, and mappel::PointEmitterModel::global_min_psf_sigma.

Referenced by mappel::Gauss1DModel::Gauss1DModel(), mappel::Gauss2DModel::Gauss2DModel(), mappel::Gauss2DsModel::Gauss2DsModel(), mappel::Gauss1DsModel::set_max_sigma(), mappel::Gauss2DsModel::set_max_sigma(), mappel::Gauss1DsModel::set_min_sigma(), mappel::Gauss2DsModel::set_min_sigma(), mappel::Gauss1DModel::set_psf_sigma(), and mappel::Gauss2DModel::set_psf_sigma().

9.27.4.7 `void mappel::PointEmitterModel::check_psf_sigma (const VecT & psf_sigma) const` [inherited]

Definition at line 197 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::global_max_psf_sigma, and mappel::PointEmitterModel::global_min_psf_sigma.

9.27.4.8 `int mappel::PointEmitterModel::get_hyperparam_index (const std::string & name) const` [inline], [inherited]

Definition at line 236 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.27.4.9 `StringVecT mappel::PointEmitterModel::get_hyperparam_names () const` [inline], [inherited]

Definition at line 256 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.27.4.10 `double mappel::PointEmitterModel::get_hyperparam_value (const std::string & name) const` `[inline]`,
`[inherited]`

Definition at line 232 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

Referenced by set_background_mcmc_sampling(), and set_intensity_mcmc_sampling().

9.27.4.11 `PointEmitterModel::ParamT mappel::PointEmitterModel::get_hyperparams () const` `[inline]`,
`[inherited]`

Definition at line 224 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.27.4.12 `const PointEmitterModel::ParamT & mappel::PointEmitterModel::get_lbound () const` `[inline]`,
`[inherited]`

Definition at line 212 of file PointEmitterModel.h.

References mappel::PointEmitterModel::lbound.

Referenced by MCMCAdaptor1D(), mappel::MCMCAdaptor2D::MCMCAdaptor2D(), and set_background_mcmc_sampling().

9.27.4.13 `IdxT mappel::MCMCAdaptorBase::get_mcmc_num_phases () const` `[inherited]`

Definition at line 56 of file MCMCAdaptorBase.cpp.

References mappel::MCMCAdaptorBase::num_phases.

9.27.4.14 `double mappel::MCMCAdaptorBase::get_mcmc_sigma_scale () const` `[inherited]`

Definition at line 53 of file MCMCAdaptorBase.cpp.

References mappel::MCMCAdaptorBase::sigma_scale.

9.27.4.15 `IdxT mappel::PointEmitterModel::get_num_hyperparams () const` `[inline]`, `[inherited]`

Definition at line 208 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_hyperparams.

9.27.4.16 `IdxT mappel::PointEmitterModel::get_num_params () const` `[inline]`, `[inherited]`

Definition at line 160 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.27.4.17 `StringVecT mappel::PointEmitterModel::get_param_names () const [inline],[inherited]`

Definition at line 248 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

9.27.4.18 `CompositeDist & mappel::PointEmitterModel::get_prior () [inline],[inherited]`

Definition at line 200 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

Referenced by `mappel::Gauss2DModel::update_internal_1Dsum_estimators()`, and `mappel::Gauss2DsModel::update_internal_1Dsum_estimators()`.

9.27.4.19 `const CompositeDist & mappel::PointEmitterModel::get_prior () const [inline],[inherited]`

Definition at line 204 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

9.27.4.20 `ParallelRngGeneratorT & mappel::PointEmitterModel::get_rng_generator () [static],[inherited]`

Definition at line 120 of file `PointEmitterModel.cpp`.

References `mappel::rng_manager`.

9.27.4.21 `ParallelRngManagerT & mappel::PointEmitterModel::get_rng_manager () [static],[inherited]`

Definition at line 115 of file `PointEmitterModel.cpp`.

References `mappel::rng_manager`.

9.27.4.22 `StatsT mappel::MCMCAdaptor1D::get_stats () const [protected]`

Definition at line 98 of file `MCMCAdaptor1D.cpp`.

References `eta_bg`, `eta_l`, `eta_x`, and `mappel::MCMCAdaptorBase::get_stats()`.

Referenced by `mappel::MCMCAdaptor1Ds::get_stats()`, `mappel::MCMCAdaptor2D::get_stats()`, and `mappel::Gauss1DModel::get_stats()`.

9.27.4.23 `const PointEmitterModel::ParamT & mappel::PointEmitterModel::get_ubound () const [inline],[inherited]`

Definition at line 216 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::Gauss2DsxyModel::get_max_sigma_ratio()`, `mappel::Gauss2DsModel::get_max_sigma_ratio()`, `MCMCAdaptor1D()`, `mappel::MCMCAdaptor2D::MCMCAdaptor2D()`, `set_background_mcmc_sampling()`, and `mappel::Gauss2DsModel::set_max_sigma_ratio()`.

9.27.4.24 `bool mappel::PointEmitterModel::has_hyperparam (const std::string & name) const` `[inline],[inherited]`

Definition at line 228 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.27.4.25 `PointEmitterModel::ParamT mappel::PointEmitterModel::make_param () const` `[inline],[inherited]`

Definition at line 164 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

Referenced by mappel::Gauss1DModel::initial_theta_estimate(), mappel::Gauss1DsModel::initial_theta_estimate(), mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsxyModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::Gauss1DModel::pixel_hess_update(), mappel::Gauss1DsModel::pixel_hess_update(), mappel::Gauss2DModel::pixel_hess_update(), and mappel::Gauss2DsModel::pixel_hess_update().

9.27.4.26 `template<class FillT > PointEmitterModel::ParamT mappel::PointEmitterModel::make_param (FillT fill) const` `[inherited]`

Definition at line 181 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.27.4.27 `MatT mappel::PointEmitterModel::make_param_mat () const` `[inline],[inherited]`

Definition at line 172 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.27.4.28 `template<class FillT > MatT mappel::PointEmitterModel::make_param_mat (FillT fill) const` `[inherited]`

Definition at line 191 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.27.4.29 `CubeT mappel::PointEmitterModel::make_param_mat_stack (IdxT n) const` `[inline],[inherited]`

Definition at line 176 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.27.4.30 `template<class FillT > CubeT mappel::PointEmitterModel::make_param_mat_stack (IdxT n, FillT fill) const` `[inherited]`

Definition at line 196 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.27.4.31 `PointEmitterModel::ParamVecT mappel::PointEmitterModel::make_param_stack (IdxT n) const` `[inline]`,
`[inherited]`

Definition at line 168 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::num_params`.

Referenced by `mappel::PointEmitterModel::bounded_theta_stack()`, and `mappel::PointEmitterModel::reflected_theta_stack()`.

9.27.4.32 `template<class FillT > PointEmitterModel::ParamVecT mappel::PointEmitterModel::make_param_stack (IdxT n, FillT fill) const` `[inherited]`

Definition at line 186 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::num_params`.

9.27.4.33 `prior_hessian::TruncatedGammaDist mappel::PointEmitterModel::make_prior_component_intensity (double mean = default_mean_I, double kappa = default_intensity_kappa)` `[static]`, `[inherited]`

Definition at line 98 of file `PointEmitterModel.cpp`.

References `mappel::PointEmitterModel::default_max_I`.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_beta_position()`, `mappel::Gauss1DModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss1DModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_prior_beta_position()`, `mappel::Gauss1DsModel::make_prior_beta_position()`, `mappel::Gauss1DModel::make_prior_beta_position()`, `mappel::Gauss2DsModel::make_prior_beta_position()`, `mappel::Gauss2DModel::make_prior_normal_position()`, `mappel::Gauss1DsModel::make_prior_normal_position()`, `mappel::Gauss1DModel::make_prior_normal_position()`, and `mappel::Gauss2DsModel::make_prior_normal_position()`.

9.27.4.34 `prior_hessian::ScaledSymmetricBetaDist mappel::PointEmitterModel::make_prior_component_position_beta (IdxT size, double pos_beta = default_beta_pos)` `[static]`, `[inherited]`

Definition at line 92 of file `PointEmitterModel.cpp`.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_beta_position()`, `mappel::Gauss1DModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss1DsModel::make_prior_beta_position()`, `mappel::Gauss2DsModel::make_prior_beta_position()`, `mappel::Gauss1DModel::make_prior_beta_position()`, and `mappel::Gauss2DsModel::make_prior_beta_position()`.

9.27.4.35 `prior_hessian::TruncatedNormalDist mappel::PointEmitterModel::make_prior_component_position_normal (IdxT size, double pos_sigma = default_sigma_pos)` `[static]`, `[inherited]`

Definition at line 85 of file `PointEmitterModel.cpp`.

Referenced by `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_default_prior_normal_position()`, `mappel::Gauss1DModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, `mappel::Gauss1DsModel::make_prior_normal_position()`, `mappel::Gauss1DModel::make_prior_normal_position()`, and `mappel::Gauss2DsModel::make_prior_normal_position()`.

9.27.4.36 `prior_hessian::TruncatedParetoDist mappel::PointEmitterModel::make_prior_component_sigma (double min_sigma, double max_sigma, double alpha = default_alpha_sigma)` `[static], [inherited]`

Definition at line 104 of file PointEmitterModel.cpp.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, `mappel::Gauss1DsModel::make_prior_beta_position()`, `mappel::Gauss2DsModel::make_prior_beta_position()`, `mappel::Gauss1DsModel::make_prior_normal_position()`, and `mappel::Gauss2DsModel::make_prior_normal_position()`.

9.27.4.37 `MCMCAdaptor1D & mappel::MCMCAdaptor1D::operator= (const MCMCAdaptor1D & o)` `[protected]`

Definition at line 42 of file MCMCAdaptor1D.cpp.

References `eta_bg`, `eta_l`, and `eta_x`.

Referenced by `mappel::MCMCAdaptor1Ds::operator=()`, `mappel::MCMCAdaptor2D::operator=()`, and `mappel::Gauss1DModel::operator=()`.

9.27.4.38 `MCMCAdaptor1D & mappel::MCMCAdaptor1D::operator= (MCMCAdaptor1D && o)` `[protected]`

Definition at line 53 of file MCMCAdaptor1D.cpp.

References `eta_bg`, `eta_l`, and `eta_x`.

9.27.4.39 `PointEmitterModel::ParamT mappel::PointEmitterModel::reflected_theta (const ParamT & theta) const` `[inherited]`

Definition at line 276 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::PointEmitterModel::reflected_theta_stack()`.

9.27.4.40 `PointEmitterModel::ParamVecT mappel::PointEmitterModel::reflected_theta_stack (const ParamVecT & theta) const` `[inherited]`

Definition at line 316 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::make_param_stack()`, and `mappel::PointEmitterModel::reflected_theta()`.

9.27.4.41 `void mappel::PointEmitterModel::rename_hyperparam (const std::string & old_name, const std::string & new_name)` `[inline], [inherited]`

Definition at line 244 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.27.4.42 `void mappel::MCMCAdaptor1D::sample_mcmc_candidate (IdxT sample_index, ParamT & candidate, double step_scale = 1.0) const`

Definition at line 108 of file MCMCAdaptor1D.cpp.

References `eta_bg`, `eta_l`, `eta_x`, `mappel::MCMCAdaptorBase::num_phases`, and `mappel::rng_manager`.

9.27.4.43 `void mappel::MCMCAdaptor1D::sample_mcmc_candidate (IdxT sample_index, ParamT & candidate, const IdxVecT & fixed_parameters_mask, double step_scale = 1.0) const`

Definition at line 122 of file MCMCAdaptor1D.cpp.

References `eta_bg`, `eta_l`, `eta_x`, `mappel::MCMCAdaptorBase::num_phases`, and `mappel::rng_manager`.

9.27.4.44 `template<class RngT > PointEmitterModel::ParamT mappel::PointEmitterModel::sample_prior (RngT & rng) const`
[*inherited*]

Definition at line 264 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.27.4.45 `PointEmitterModel::ParamT mappel::PointEmitterModel::sample_prior () const` [*inline*], [*inherited*]

Definition at line 268 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`, and `mappel::rng_manager`.

9.27.4.46 `void mappel::MCMCAdaptor1D::set_background_mcmc_sampling (double eta_bg = -1)`

Definition at line 81 of file MCMCAdaptor1D.cpp.

References `mappel::PointEmitterModel::default_pixel_mean_bg`, `eta_bg`, `mappel::PointEmitterModel::get_hyperparam_value()`, `mappel::PointEmitterModel::get_lbound()`, `mappel::PointEmitterModel::get_ubound()`, and `mappel::MCMCAdaptorBase::sigma_scale`.

Referenced by `MCMCAdaptor1D()`.

9.27.4.47 `void mappel::PointEmitterModel::set_bounds (const ParamT & lbound, const ParamT & ubound)`
[*inherited*]

Box-type parameter bounds

Modifies the prior bounds to prevent sampling outside the valid box-constraints.

Definition at line 213 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::bounds_epsilon`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

9.27.4.48 `void mappel::PointEmitterModel::set_hyperparam_names (const StringVecT & desc) [inline], [inherited]`

Definition at line 260 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.27.4.49 `void mappel::PointEmitterModel::set_hyperparam_value (const std::string & name, double value) [inline], [inherited]`

Definition at line 240 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.27.4.50 `void mappel::PointEmitterModel::set_hyperparams (const VecT & hyperparams) [inline], [inherited]`

Definition at line 220 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

Referenced by mappel::Gauss2DModel::set_hyperparams(), and mappel::Gauss2DsModel::set_hyperparams().

9.27.4.51 `void mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling (double eta_I = -1)`

Definition at line 65 of file MCMCAdaptor1D.cpp.

References mappel::PointEmitterModel::default_mean_I, eta_I, mappel::PointEmitterModel::get_hyperparam_value(), and mappel::MCMCAdaptorBase::sigma_scale.

Referenced by MCMCAdaptor1D().

9.27.4.52 `void mappel::PointEmitterModel::set_lbound (const ParamT & lbound) [inherited]`

Definition at line 226 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::bounds_epsilon, mappel::PointEmitterModel::lbound, mappel::PointEmitterModel::num_params, mappel::PointEmitterModel::prior, and mappel::PointEmitterModel::ubound.

Referenced by mappel::Gauss1DsModel::set_min_sigma().

9.27.4.53 `void mappel::MCMCAdaptorBase::set_mcmc_num_phases (IdxT num_phases) [protected], [inherited]`

Definition at line 59 of file MCMCAdaptorBase.cpp.

References mappel::MCMCAdaptorBase::num_phases.

Referenced by mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds(), and mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds().

9.27.4.54 `void mappel::MCMCAdaptorBase::set_mcmc_sigma_scale (double scale)` `[inherited]`

Definition at line 39 of file `MCMCAdaptorBase.cpp`.

References `mappel::MCMCAdaptorBase::global_max_mcmc_sigma_scale`, and `mappel::MCMCAdaptorBase::sigma_←_scale`.

9.27.4.55 `void mappel::PointEmitterModel::set_param_names (const StringVecT & desc)` `[inline],[inherited]`

Definition at line 252 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

9.27.4.56 `void mappel::PointEmitterModel::set_prior (CompositeDist && prior_)` `[inherited]`

Definition at line 158 of file `PointEmitterModel.cpp`.

References `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_hyperparams`, `mappel::Point←EmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::Gauss2DModel::set_prior()`, and `mappel::Gauss2DsModel::set_prior()`.

9.27.4.57 `void mappel::PointEmitterModel::set_prior (const CompositeDist & prior_)` `[inherited]`

Definition at line 149 of file `PointEmitterModel.cpp`.

References `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_hyperparams`, `mappel::Point←EmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

9.27.4.58 `void mappel::PointEmitterModel::set_rng_seed (RngSeedT seed)` `[static],[inherited]`

Definition at line 110 of file `PointEmitterModel.cpp`.

References `mappel::rng_manager`.

9.27.4.59 `void mappel::PointEmitterModel::set_ubound (const ParamT & ubound)` `[inherited]`

Definition at line 237 of file `PointEmitterModel.cpp`.

References `mappel::PointEmitterModel::bounds_epsilon`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitter←Model::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::Gauss1DsModel::set_max_sigma()`, and `mappel::Gauss2DsModel::set_max_sigma_ratio()`.

9.27.4.60 `bool mappel::PointEmitterModel::theta_in_bounds (const ParamT & theta) const` [inherited]

Definition at line 257 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsModel::initial_theta_estimate()`, `mappel::Gauss1DModel::make_stencil()`, `mappel::Gauss1DsModel::make_stencil()`, `mappel::Gauss2DModel::make_stencil()`, `mappel::Gauss2DsxModel::make_stencil()`, `mappel::Gauss2DsModel::make_stencil()`, and `mappel::PointEmitterModel::theta_stack_in_bounds()`.

9.27.4.61 `BoolVecT mappel::PointEmitterModel::theta_stack_in_bounds (const ParamVecT & theta) const` [inherited]

Definition at line 296 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, and `mappel::PointEmitterModel::theta_in_bounds()`.

9.27.5 Member Data Documentation

9.27.5.1 `const double mappel::PointEmitterModel::bounds_epsilon = 1.0E-6` [static], [inherited]

Distance from the boundary to constrain in `bound_theta` and `bounded_theta` methods

Definition at line 52 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::Gauss2DsModel::set_max_sigma_ratio()`, and `mappel::PointEmitterModel::set_ubound()`.

9.27.5.2 `const double mappel::PointEmitterModel::default_alpha_sigma = 2` [static], [inherited]

Default per-pixel background gamma distribution shape

Definition at line 62 of file PointEmitterModel.h.

9.27.5.3 `const double mappel::PointEmitterModel::default_beta_pos = 3` [static], [inherited]

Default position parameter in symmetric beta-distributions

Definition at line 56 of file PointEmitterModel.h.

9.27.5.4 `const double mappel::PointEmitterModel::default_intensity_kappa = 2` [static], [inherited]

Default shape for intensity gamma distributions

Definition at line 60 of file PointEmitterModel.h.

9.27.5.5 `const double mappel::PointEmitterModel::default_max_l = INFINITY` `[static], [inherited]`

Default maximum emitter intensity

Definition at line 59 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::make_prior_component_intensity()`.

9.27.5.6 `const double mappel::PointEmitterModel::default_mean_l = 300` `[static], [inherited]`

Default emitter intensity mean

Definition at line 58 of file PointEmitterModel.h.

Referenced by `set_intensity_mcmc_sampling()`.

9.27.5.7 `const double mappel::PointEmitterModel::default_pixel_mean_bg = 4` `[static], [inherited]`

Default per-pixel mean background counts

Definition at line 61 of file PointEmitterModel.h.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_beta_position()`, `mappel::Gauss1DModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_default_prior_normal_position()`, `mappel::Gauss1DModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, and `set_background_mcmc_sampling()`.

9.27.5.8 `const double mappel::PointEmitterModel::default_sigma_pos = 1` `[static], [inherited]`

Default position parameter in symmetric beta-distributions

Definition at line 57 of file PointEmitterModel.h.

9.27.5.9 `const std::string mappel::PointEmitterModel::DefaultSeperableInitEstimator = "TrustRegion"` `[static], [inherited]`

Estimator name to use in 1D separable initializations

Definition at line 49 of file PointEmitterModel.h.

Referenced by `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsxyModel::initial_theta_estimate()`, and `mappel::Gauss2DsModel::initial_theta_estimate()`.

9.27.5.10 `double mappel::MCMCAdaptor1D::eta_bg = 0` `[protected]`

The standard deviation for the normally distributed perturbation to `theta_bg` in the random walk MCMC sampling

Definition at line 33 of file MCMCAdaptor1D.h.

Referenced by `get_stats()`, `MCMCAdaptor1D()`, `operator=()`, `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `sample_mcmc_candidate()`, and `set_background_mcmc_sampling()`.

9.27.5.11 double mappel::MCMCAdaptor1D::eta_l=0 [protected]

The standard deviation for the normally distributed perturbation to theta_l in the random walk MCMC sampling

Definition at line 32 of file MCMCAdaptor1D.h.

Referenced by get_stats(), MCMCAdaptor1D(), operator=(), mappel::MCMCAdaptor2D::sample_mcmc_candidate(), mappel::MCMCAdaptor2Ds::sample_mcmc_candidate(), mappel::MCMCAdaptor1Ds::sample_mcmc_candidate(), sample_mcmc_candidate(), and set_intensity_mcmc_sampling().

9.27.5.12 double mappel::MCMCAdaptor1D::eta_x=0 [protected]

The standard deviation for the normally distributed perturbation to theta_x in the random walk MCMC sampling

Definition at line 31 of file MCMCAdaptor1D.h.

Referenced by get_stats(), MCMCAdaptor1D(), operator=(), mappel::MCMCAdaptor2D::sample_mcmc_candidate(), mappel::MCMCAdaptor1Ds::sample_mcmc_candidate(), mappel::MCMCAdaptor2Ds::sample_mcmc_candidate(), and sample_mcmc_candidate().

9.27.5.13 const double mappel::MCMCAdaptorBase::global_default_mcmc_sigma_scale = 0.05 [static],[inherited]

Definition at line 16 of file MCMCAdaptorBase.h.

Referenced by mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds(), mappel::MCMCAdaptor2D::MCMCAdaptor2D(), and mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds().

9.27.5.14 const double mappel::MCMCAdaptorBase::global_max_mcmc_sigma_scale = 0.5 [static],[inherited]

Definition at line 17 of file MCMCAdaptorBase.h.

Referenced by mappel::MCMCAdaptorBase::MCMCAdaptorBase(), and mappel::MCMCAdaptorBase::set_mcmc_sigma_scale().

9.27.5.15 const double mappel::PointEmitterModel::global_max_psf_sigma = 1E2 [static],[inherited]

Global maximum for any psf_sigma. Sizes above this value are invalid, and nowhere near useful for practical point emitter localization

Definition at line 54 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::check_psf_sigma().

9.27.5.16 const double mappel::PointEmitterModel::global_min_psf_sigma = 1E-1 [static],[inherited]

Global minimum for any psf_sigma. Sizes below this value are invalid, and nowhere near useful for practical point emitter localization

Definition at line 53 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::check_psf_sigma().

9.27.5.17 ParamT mappel::PointEmitterModel::lbound [protected],[inherited]

Definition at line 148 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::bound_theta(), mappel::PointEmitterModel::bounded_theta(), mappel::PointEmitterModel::get_lbound(), mappel::PointEmitterModel::get_stats(), mappel::Gauss1DsModel::initial_theta_estimate(), mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::PointEmitterModel::operator=(), mappel::PointEmitterModel::reflected_theta(), mappel::PointEmitterModel::set_bounds(), mappel::PointEmitterModel::set_lbound(), mappel::PointEmitterModel::set_prior(), mappel::PointEmitterModel::set_ubound(), and mappel::PointEmitterModel::theta_in_bounds().

9.27.5.18 IdxT mappel::PointEmitterModel::num_hyperparams [protected],[inherited]

Definition at line 147 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::get_num_hyperparams(), mappel::PointEmitterModel::get_stats(), mappel::PointEmitterModel::operator=(), and mappel::PointEmitterModel::set_prior().

9.27.5.19 IdxT mappel::PointEmitterModel::num_params [protected],[inherited]

Definition at line 146 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::bound_theta(), mappel::PointEmitterModel::bounded_theta(), mappel::PointEmitterModel::check_param_shape(), mappel::PointEmitterModel::get_num_params(), mappel::PointEmitterModel::get_stats(), mappel::Gauss1DModel::initial_theta_estimate(), mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::PointEmitterModel::make_param(), mappel::PointEmitterModel::make_param_mat(), mappel::PointEmitterModel::make_param_mat_stack(), mappel::PointEmitterModel::make_param_stack(), mappel::PointEmitterModel::operator=(), mappel::PointEmitterModel::reflected_theta(), mappel::PointEmitterModel::set_bounds(), mappel::PointEmitterModel::set_lbound(), mappel::PointEmitterModel::set_prior(), mappel::PointEmitterModel::set_ubound(), and mappel::PointEmitterModel::theta_in_bounds().

9.27.5.20 IdxT mappel::MCMCAdaptorBase::num_phases [protected],[inherited]

The number of different sampling phases for candidate selection MCMC. Each phase changes a different subset of variables.

Definition at line 29 of file MCMCAdaptorBase.h.

Referenced by mappel::MCMCAdaptorBase::get_mcmc_num_phases(), mappel::MCMCAdaptorBase::get_stats(), mappel::MCMCAdaptor2Ds::sample_mcmc_candidate(), mappel::MCMCAdaptor2D::sample_mcmc_candidate(), mappel::MCMCAdaptor1Ds::sample_mcmc_candidate(), sample_mcmc_candidate(), and mappel::MCMCAdaptorBase::set_mcmc_num_phases().

9.27.5.21 CompositeDist mappel::PointEmitterModel::prior [protected],[inherited]

Definition at line 145 of file PointEmitterModel.h.

Referenced by mappel::Gauss2DModel::debug_internal_sum_model_y(), mappel::Gauss2DsModel::debug_internal_sum_model_y(), mappel::Gauss2DModel::Gauss2DModel(), mappel::Gauss2DsModel::Gauss2DsModel(), mappel::PointEmitterModel::get_hyperparam_index(), mappel::PointEmitterModel::get_hyperparam_names(), mappel::PointEmitterModel::get_hyperparam_value(), mappel::PointEmitterModel::get_hyperparams(), mappel::Gauss1DsModel::get_max_sigma(), mappel::Gauss1DsModel::get_min_sigma(), mappel::PointEmitterModel::get_param_names(), mappel::PointEmitterModel::get_prior(), mappel::PointEmitterModel::get_stats(), mappel::PointEmitterModel::has_hyperparam(), mappel::PointEmitterModel::operator=(), mappel::PointEmitterModel::PointEmitterModel(), mappel::PointEmitterModel::rename_hyperparam(), mappel::PointEmitterModel::sample_prior(), mappel::PointEmitterModel::set_bounds(), mappel::PointEmitterModel::set_hyperparam_names(), mappel::PointEmitterModel::set_hyperparam_value(), mappel::PointEmitterModel::set_hyperparams(), mappel::PointEmitterModel::set_lbound(), mappel::Gauss1DsModel::set_max_sigma(), mappel::Gauss1DsModel::set_min_sigma(), mappel::PointEmitterModel::set_param_names(), mappel::PointEmitterModel::set_prior(), and mappel::PointEmitterModel::set_ubound().

9.27.5.22 `double mappel::MCMCAdaptorBase::sigma_scale` [protected],[inherited]

A scaling factor for step sizes as a fraction of the size of the domain dimension we are walking in. (0.05 default)

Definition at line 30 of file MCMCAdaptorBase.h.

Referenced by `mappel::MCMCAdaptorBase::get_mcmc_sigma_scale()`, `mappel::MCMCAdaptorBase::get_stats()`, `MCMCAdaptor1D()`, `mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds()`, `mappel::MCMCAdaptor2D::MCMCAdaptor2D()`, `mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds()`, `set_background_mcmc_sampling()`, `set_intensity_mcmc_sampling()`, and `mappel::MCMCAdaptorBase::set_mcmc_sigma_scale()`.

9.27.5.23 `ParamT mappel::PointEmitterModel::ubound` [protected],[inherited]

Definition at line 148 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::bound_theta()`, `mappel::PointEmitterModel::bounded_theta()`, `mappel::PointEmitterModel::get_stats()`, `mappel::PointEmitterModel::get_ubound()`, `mappel::Gauss1DsModel::initial_theta_estimate()`, `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsModel::initial_theta_estimate()`, `mappel::PointEmitterModel::operator=()`, `mappel::PointEmitterModel::reflected_theta()`, `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::PointEmitterModel::set_prior()`, `mappel::PointEmitterModel::set_ubound()`, and `mappel::PointEmitterModel::theta_in_bounds()`.


The documentation for this class was generated from the following files:

- [MCMCAdaptor1D.h](#)
- [MCMCAdaptor1D.cpp](#)

9.28 mappel::MCMCAdaptor1Ds Class Reference

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/MCMCAdaptor1Ds.h>
```

Inheritance diagram for `mappel::MCMCAdaptor1Ds`:

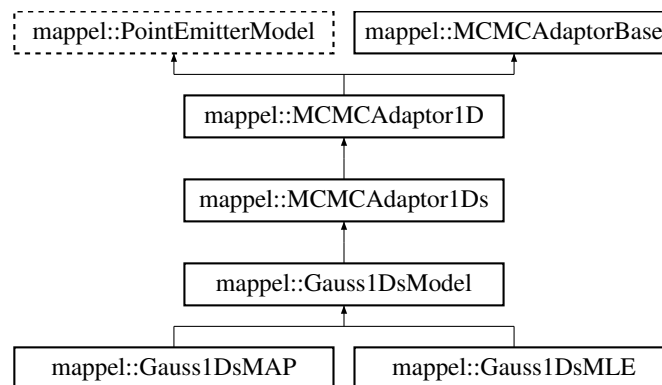

Public Types

- using `ParamT` = `arma::vec`
- using `ParamVecT` = `arma::mat`

Public Member Functions

- void [sample_mcmc_candidate](#) ([IdxT](#) sample_index, [ParamT](#) &candidate, double step_scale=1.0) const
- void [sample_mcmc_candidate](#) ([IdxT](#) sample_index, [ParamT](#) &candidate, const [IdxVecT](#) &fixed_parameters_↔ mask, double step_scale=1.0) const
- void [set_intensity_mcmc_sampling](#) (double eta_l=-1)
- void [set_background_mcmc_sampling](#) (double eta_bg=-1)
- [IdxT](#) [get_num_params](#) () const
- void [check_param_shape](#) (const [ParamT](#) &theta) const
- void [check_param_shape](#) (const [ParamVecT](#) &theta) const
- void [check_psf_sigma](#) (double psf_sigma) const
- void [check_psf_sigma](#) (const [VecT](#) &psf_sigma) const
- [ParamT](#) [make_param](#) () const
- template<class FillT >
 [ParamT](#) [make_param](#) (FillT fill) const
- [ParamVecT](#) [make_param_stack](#) ([IdxT](#) n) const
- template<class FillT >
 [ParamVecT](#) [make_param_stack](#) ([IdxT](#) n, FillT fill) const
- [MatT](#) [make_param_mat](#) () const
- template<class FillT >
 [MatT](#) [make_param_mat](#) (FillT fill) const
- [CubeT](#) [make_param_mat_stack](#) ([IdxT](#) n) const
- template<class FillT >
 [CubeT](#) [make_param_mat_stack](#) ([IdxT](#) n, FillT fill) const
- CompositeDist & [get_prior](#) ()
- const CompositeDist & [get_prior](#) () const
- void [set_prior](#) (CompositeDist &&prior_)
- void [set_prior](#) (const CompositeDist &prior_)
- [IdxT](#) [get_num_hyperparams](#) () const
- void [set_hyperparams](#) (const [VecT](#) &hyperparams)
- [VecT](#) [get_hyperparams](#) () const
- bool [has_hyperparam](#) (const std::string &name) const
- double [get_hyperparam_value](#) (const std::string &name) const
- int [get_hyperparam_index](#) (const std::string &name) const
- void [set_hyperparam_value](#) (const std::string &name, double value)
- void [rename_hyperparam](#) (const std::string &old_name, const std::string &new_name)
- [StringVecT](#) [get_param_names](#) () const
- void [set_param_names](#) (const [StringVecT](#) &desc)
- [StringVecT](#) [get_hyperparam_names](#) () const
- void [set_hyperparam_names](#) (const [StringVecT](#) &desc)
- template<class RngT >
 [ParamT](#) [sample_prior](#) (RngT &rng) const
- [ParamT](#) [sample_prior](#) () const
- void [set_bounds](#) (const [ParamT](#) &lbound, const [ParamT](#) &ubound)
- void [set_lbound](#) (const [ParamT](#) &lbound)
- void [set_ubound](#) (const [ParamT](#) &ubound)
- const [ParamT](#) & [get_lbound](#) () const
- const [ParamT](#) & [get_ubound](#) () const
- bool [theta_in_bounds](#) (const [ParamT](#) &theta) const
- void [bound_theta](#) ([ParamT](#) &theta, double epsilon=[bounds_epsilon](#)) const
- [ParamT](#) [bounded_theta](#) (const [ParamT](#) &theta, double epsilon=[bounds_epsilon](#)) const

- [ParamT](#) [reflected_theta](#) (const [ParamT](#) &theta) const
- [BoolVecT](#) [theta_stack_in_bounds](#) (const [ParamVecT](#) &theta) const
- [ParamVecT](#) [bounded_theta_stack](#) (const [ParamVecT](#) &theta, double epsilon=[bounds_epsilon](#)) const
- [ParamVecT](#) [reflected_theta_stack](#) (const [ParamVecT](#) &theta) const
- void [set_mcmc_sigma_scale](#) (double scale)
- double [get_mcmc_sigma_scale](#) () const
- [IdxT](#) [get_mcmc_num_phases](#) () const

Static Public Member Functions

- static [prior_hessian::TruncatedNormalDist](#) [make_prior_component_position_normal](#) ([IdxT](#) size, double pos_↵ sigma=[default_sigma_pos](#))
- static [prior_hessian::ScaledSymmetricBetaDist](#) [make_prior_component_position_beta](#) ([IdxT](#) size, double pos_↵ beta=[default_beta_pos](#))
- static [prior_hessian::TruncatedGammaDist](#) [make_prior_component_intensity](#) (double mean=[default_mean_↵ I](#), double kappa=[default_intensity_kappa](#))
- static [prior_hessian::TruncatedParetoDist](#) [make_prior_component_sigma](#) (double min_sigma, double max_↵ sigma, double alpha=[default_alpha_sigma](#))
- static void [set_rng_seed](#) ([RngSeedT](#) seed)
- static [ParallelRngManagerT](#) & [get_rng_manager](#) ()
- static [ParallelRngGeneratorT](#) & [get_rng_generator](#) ()

Static Public Attributes

- static const std::string [DefaultSeperableInitEstimator](#) = "TrustRegion"
- static const double [bounds_epsilon](#) = 1.0E-6
- static const double [global_min_psf_sigma](#) = 1E-1
- static const double [global_max_psf_sigma](#) = 1E2
- static const double [default_beta_pos](#) = 3
- static const double [default_sigma_pos](#) = 1
- static const double [default_mean_I](#) = 300
- static const double [default_max_I](#) = INFINITY
- static const double [default_intensity_kappa](#) = 2
- static const double [default_pixel_mean_bg](#) = 4
- static const double [default_alpha_sigma](#) = 2
- static const double [global_default_mcmc_sigma_scale](#) = 0.05
- static const double [global_max_mcmc_sigma_scale](#) = 0.5

Protected Member Functions

- [MCMCAdaptor1Ds](#) ()
- [MCMCAdaptor1Ds](#) (double [sigma_scale](#))
- [MCMCAdaptor1Ds](#) (const [MCMCAdaptor1Ds](#) &o)
- [MCMCAdaptor1Ds](#) ([MCMCAdaptor1Ds](#) &&o)
- [MCMCAdaptor1Ds](#) & [operator=](#) (const [MCMCAdaptor1Ds](#) &o)
- [MCMCAdaptor1Ds](#) & [operator=](#) ([MCMCAdaptor1Ds](#) &&o)
- [StatsT](#) [get_stats](#) () const
- void [set_mcmc_num_phases](#) ([IdxT](#) num_phases)

Protected Attributes

- double `eta_sigma` = -1
- double `eta_x` = 0
- double `eta_l` = 0
- double `eta_bg` = 0
- CompositeDist `prior`
- `IdxT` `num_params`
- `IdxT` `num_hyperparams`
- `ParamT` `lbound`
- `ParamT` `ubound`
- `IdxT` `num_phases`
- double `sigma_scale`

9.28.1 Detailed Description

Definition at line 14 of file `MCMCAdaptor1Ds.h`.

9.28.2 Member Typedef Documentation

9.28.2.1 `using mappel::PointEmitterModel::ParamT = arma::vec` [inherited]

Parameter vector

Definition at line 47 of file `PointEmitterModel.h`.

9.28.2.2 `using mappel::PointEmitterModel::ParamVecT = arma::mat` [inherited]

Vector of parameter vectors

Definition at line 48 of file `PointEmitterModel.h`.

9.28.3 Constructor & Destructor Documentation

9.28.3.1 `mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds ()` [protected]

Definition at line 11 of file `MCMCAdaptor1Ds.cpp`.

References `mappel::MCMCAdaptorBase::global_default_mcmc_sigma_scale`.

9.28.3.2 `mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds (double sigma_scale)` [explicit],[protected]

Definition at line 14 of file `MCMCAdaptor1Ds.cpp`.

References `eta_sigma`, `mappel::MCMCAdaptorBase::set_mcmc_num_phases()`, and `mappel::MCMCAdaptorBase::sigma_scale`.

9.28.3.3 mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds (const MCMCAdaptor1Ds & o) [protected]

Definition at line 21 of file MCMCAdaptor1Ds.cpp.

References eta_sigma.

9.28.3.4 mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds (MCMCAdaptor1Ds && o) [protected]

Definition at line 28 of file MCMCAdaptor1Ds.cpp.

References eta_sigma.

9.28.4 Member Function Documentation

9.28.4.1 void mappel::PointEmitterModel::bound_theta (ParamT & theta, double epsilon = bounds_epsilon) const [inherited]

Definition at line 248 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::check_param_shape(), mappel::PointEmitterModel::lbound, mappel::PointEmitterModel::num_params, and mappel::PointEmitterModel::ubound.

9.28.4.2 PointEmitterModel::ParamT mappel::PointEmitterModel::bounded_theta (const ParamT & theta, double epsilon = bounds_epsilon) const [inherited]

Definition at line 265 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::check_param_shape(), mappel::PointEmitterModel::lbound, mappel::PointEmitterModel::num_params, and mappel::PointEmitterModel::ubound.

Referenced by mappel::PointEmitterModel::bounded_theta_stack().

9.28.4.3 PointEmitterModel::ParamVecT mappel::PointEmitterModel::bounded_theta_stack (const ParamVecT & theta, double epsilon = bounds_epsilon) const [inherited]

Definition at line 306 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::bounded_theta(), mappel::PointEmitterModel::check_param_shape(), and mappel::PointEmitterModel::make_param_stack().

9.28.4.4 void mappel::PointEmitterModel::check_param_shape (const ParamT & theta) const [inherited]

Definition at line 167 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::num_params.

Referenced by mappel::PointEmitterModel::bound_theta(), mappel::PointEmitterModel::bounded_theta(), mappel::PointEmitterModel::bounded_theta_stack(), mappel::PointEmitterModel::reflected_theta(), mappel::PointEmitterModel::reflected_theta_stack(), mappel::PointEmitterModel::theta_in_bounds(), and mappel::PointEmitterModel::theta_stack_in_bounds().

9.28.4.5 `void mappel::PointEmitterModel::check_param_shape (const ParamVecT & theta) const` [inherited]

Definition at line 176 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::num_params.

9.28.4.6 `void mappel::PointEmitterModel::check_psf_sigma (double psf_sigma) const` [inherited]

Definition at line 185 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::global_max_psf_sigma, and mappel::PointEmitterModel::global_min_psf_sigma.

Referenced by mappel::Gauss1DModel::Gauss1DModel(), mappel::Gauss2DModel::Gauss2DModel(), mappel::Gauss2DsModel::Gauss2DsModel(), mappel::Gauss1DsModel::set_max_sigma(), mappel::Gauss2DsModel::set_max_sigma(), mappel::Gauss1DsModel::set_min_sigma(), mappel::Gauss2DsModel::set_min_sigma(), mappel::Gauss1DModel::set_psf_sigma(), and mappel::Gauss2DModel::set_psf_sigma().

9.28.4.7 `void mappel::PointEmitterModel::check_psf_sigma (const VecT & psf_sigma) const` [inherited]

Definition at line 197 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::global_max_psf_sigma, and mappel::PointEmitterModel::global_min_psf_sigma.

9.28.4.8 `int mappel::PointEmitterModel::get_hyperparam_index (const std::string & name) const` [inline], [inherited]

Definition at line 236 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.28.4.9 `StringVecT mappel::PointEmitterModel::get_hyperparam_names () const` [inline], [inherited]

Definition at line 256 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.28.4.10 `double mappel::PointEmitterModel::get_hyperparam_value (const std::string & name) const` [inline], [inherited]

Definition at line 232 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

Referenced by mappel::MCMCAdaptor1D::set_background_mcmc_sampling(), and mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling().

9.28.4.11 `PointEmitterModel::ParamT mappel::PointEmitterModel::get_hyperparams () const` `[inline]`,
`[inherited]`

Definition at line 224 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.28.4.12 `const PointEmitterModel::ParamT & mappel::PointEmitterModel::get_lbound () const` `[inline]`,
`[inherited]`

Definition at line 212 of file PointEmitterModel.h.

References mappel::PointEmitterModel::lbound.

Referenced by mappel::MCMCAdaptor1D::MCMCAdaptor1D(), mappel::MCMCAdaptor2D::MCMCAdaptor2D(), and mappel::MCMCAdaptor1D::set_background_mcmc_sampling().

9.28.4.13 `IdxT mappel::MCMCAdaptorBase::get_mcmc_num_phases () const` `[inherited]`

Definition at line 56 of file MCMCAdaptorBase.cpp.

References mappel::MCMCAdaptorBase::num_phases.

9.28.4.14 `double mappel::MCMCAdaptorBase::get_mcmc_sigma_scale () const` `[inherited]`

Definition at line 53 of file MCMCAdaptorBase.cpp.

References mappel::MCMCAdaptorBase::sigma_scale.

9.28.4.15 `IdxT mappel::PointEmitterModel::get_num_hyperparams () const` `[inline]`, `[inherited]`

Definition at line 208 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_hyperparams.

9.28.4.16 `IdxT mappel::PointEmitterModel::get_num_params () const` `[inline]`, `[inherited]`

Definition at line 160 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.28.4.17 `StringVecT mappel::PointEmitterModel::get_param_names () const` `[inline]`, `[inherited]`

Definition at line 248 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.28.4.18 CompositeDist & mappel::PointEmitterModel::get_prior () [inline],[inherited]

Definition at line 200 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

Referenced by mappel::Gauss2DModel::update_internal_1Dsum_estimators(), and mappel::Gauss2DsModel::update_internal_1Dsum_estimators().

9.28.4.19 const CompositeDist & mappel::PointEmitterModel::get_prior () const [inline],[inherited]

Definition at line 204 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.28.4.20 ParallelRngGeneratorT & mappel::PointEmitterModel::get_rng_generator () [static],[inherited]

Definition at line 120 of file PointEmitterModel.cpp.

References mappel::rng_manager.

9.28.4.21 ParallelRngManagerT & mappel::PointEmitterModel::get_rng_manager () [static],[inherited]

Definition at line 115 of file PointEmitterModel.cpp.

References mappel::rng_manager.

9.28.4.22 StatsT mappel::MCMCAdaptor1Ds::get_stats () const [protected]

Definition at line 51 of file MCMCAdaptor1Ds.cpp.

References eta_sigma, and mappel::MCMCAdaptor1D::get_stats().

Referenced by mappel::Gauss1DsModel::get_stats().

9.28.4.23 const PointEmitterModel::ParamT & mappel::PointEmitterModel::get_ubound () const [inline],[inherited]

Definition at line 216 of file PointEmitterModel.h.

References mappel::PointEmitterModel::ubound.

Referenced by mappel::Gauss2DsxModel::get_max_sigma_ratio(), mappel::Gauss2DsModel::get_max_sigma_ratio(), mappel::MCMCAdaptor1D::MCMCAdaptor1D(), mappel::MCMCAdaptor2D::MCMCAdaptor2D(), mappel::MCMCAdaptor1D::set_background_mcmc_sampling(), and mappel::Gauss2DsModel::set_max_sigma_ratio().

9.28.4.24 bool mappel::PointEmitterModel::has_hyperparam (const std::string & name) const [inline],[inherited]

Definition at line 228 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.28.4.25 `PointEmitterModel::ParamT mappel::PointEmitterModel::make_param () const [inline],[inherited]`

Definition at line 164 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

Referenced by mappel::Gauss1DModel::initial_theta_estimate(), mappel::Gauss1DsModel::initial_theta_estimate(), mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsxModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::Gauss1DModel::pixel_hess_update(), mappel::Gauss1DsModel::pixel_hess_update(), mappel::Gauss2DModel::pixel_hess_update(), and mappel::Gauss2DsModel::pixel_hess_update().

9.28.4.26 `template<class FillT > PointEmitterModel::ParamT mappel::PointEmitterModel::make_param (FillT fill) const [inherited]`

Definition at line 181 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.28.4.27 `MatT mappel::PointEmitterModel::make_param_mat () const [inline],[inherited]`

Definition at line 172 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.28.4.28 `template<class FillT > MatT mappel::PointEmitterModel::make_param_mat (FillT fill) const [inherited]`

Definition at line 191 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.28.4.29 `CubeT mappel::PointEmitterModel::make_param_mat_stack (IdxT n) const [inline],[inherited]`

Definition at line 176 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.28.4.30 `template<class FillT > CubeT mappel::PointEmitterModel::make_param_mat_stack (IdxT n, FillT fill) const [inherited]`

Definition at line 196 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.28.4.31 `PointEmitterModel::ParamVecT mappel::PointEmitterModel::make_param_stack (IdxT n) const [inline],[inherited]`

Definition at line 168 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

Referenced by mappel::PointEmitterModel::bounded_theta_stack(), and mappel::PointEmitterModel::reflected_theta_stack().

9.28.4.32 `template<class FillT > PointEmitterModel::ParamVecT mappel::PointEmitterModel::make_param_stack (IdxT n, FillT fill) const [inherited]`

Definition at line 186 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.28.4.33 `prior_hessian::TruncatedGammaDist mappel::PointEmitterModel::make_prior_component_intensity (double mean = default_mean_I, double kappa = default_intensity_kappa) [static],[inherited]`

Definition at line 98 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::default_max_I.

Referenced by mappel::Gauss1DsModel::make_default_prior_beta_position(), mappel::Gauss2DModel::make_default_prior_beta_position(), mappel::Gauss1DModel::make_default_prior_beta_position(), mappel::Gauss2DsModel::make_default_prior_beta_position(), mappel::Gauss2DModel::make_default_prior_normal_position(), mappel::Gauss1DsModel::make_default_prior_normal_position(), mappel::Gauss1DModel::make_default_prior_normal_position(), mappel::Gauss2DsModel::make_default_prior_normal_position(), mappel::Gauss2DModel::make_prior_beta_position(), mappel::Gauss1DsModel::make_prior_beta_position(), mappel::Gauss1DModel::make_prior_beta_position(), mappel::Gauss2DsModel::make_prior_beta_position(), mappel::Gauss2DModel::make_prior_normal_position(), mappel::Gauss1DsModel::make_prior_normal_position(), mappel::Gauss1DModel::make_prior_normal_position(), and mappel::Gauss2DsModel::make_prior_normal_position().

9.28.4.34 `prior_hessian::ScaledSymmetricBetaDist mappel::PointEmitterModel::make_prior_component_position_beta (IdxT size, double pos_beta = default_beta_pos) [static],[inherited]`

Definition at line 92 of file PointEmitterModel.cpp.

Referenced by mappel::Gauss1DsModel::make_default_prior_beta_position(), mappel::Gauss2DModel::make_default_prior_beta_position(), mappel::Gauss1DModel::make_default_prior_beta_position(), mappel::Gauss2DsModel::make_default_prior_beta_position(), mappel::Gauss1DsModel::make_prior_beta_position(), mappel::Gauss2DModel::make_prior_beta_position(), and mappel::Gauss2DsModel::make_prior_beta_position().

9.28.4.35 `prior_hessian::TruncatedNormalDist mappel::PointEmitterModel::make_prior_component_position_normal (IdxT size, double pos_sigma = default_sigma_pos) [static],[inherited]`

Definition at line 85 of file PointEmitterModel.cpp.

Referenced by mappel::Gauss1DsModel::make_default_prior_normal_position(), mappel::Gauss2DModel::make_default_prior_normal_position(), mappel::Gauss1DModel::make_default_prior_normal_position(), mappel::Gauss2DsModel::make_default_prior_normal_position(), mappel::Gauss2DModel::make_prior_normal_position(), mappel::Gauss1DsModel::make_prior_normal_position(), mappel::Gauss1DModel::make_prior_normal_position(), and mappel::Gauss2DsModel::make_prior_normal_position().

9.28.4.36 `prior_hessian::TruncatedParetoDist mappel::PointEmitterModel::make_prior_component_sigma (double min_sigma, double max_sigma, double alpha = default_alpha_sigma) [static],[inherited]`

Definition at line 104 of file PointEmitterModel.cpp.

Referenced by mappel::Gauss1DsModel::make_default_prior_beta_position(), mappel::Gauss2DsModel::make_default_prior_beta_position(), mappel::Gauss1DsModel::make_default_prior_normal_position(), mappel::Gauss2DsModel::make_default_prior_normal_position(), mappel::Gauss1DsModel::make_prior_beta_position(), mappel::Gauss2DsModel::make_prior_beta_position(), mappel::Gauss1DsModel::make_prior_normal_position(), and mappel::Gauss2DsModel::make_prior_normal_position().

9.28.4.37 MCMCAdaptor1Ds & mappel::MCMCAdaptor1Ds::operator= (const MCMCAdaptor1Ds & o) [protected]

Definition at line 35 of file MCMCAdaptor1Ds.cpp.

References `eta_sigma`, and `mappel::MCMCAdaptor1D::operator=()`.

Referenced by `mappel::Gauss1DsModel::operator=()`.

9.28.4.38 MCMCAdaptor1Ds & mappel::MCMCAdaptor1Ds::operator= (MCMCAdaptor1Ds && o) [protected]

Definition at line 43 of file MCMCAdaptor1Ds.cpp.

References `eta_sigma`, and `mappel::MCMCAdaptor1D::operator=()`.

9.28.4.39 PointEmitterModel::ParamT mappel::PointEmitterModel::reflected_theta (const ParamT & theta) const
[inherited]

Definition at line 276 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::PointEmitterModel::reflected_theta_stack()`.

9.28.4.40 PointEmitterModel::ParamVecT mappel::PointEmitterModel::reflected_theta_stack (const ParamVecT & theta) const [inherited]

Definition at line 316 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::make_param_stack()`, and `mappel::PointEmitterModel::reflected_theta()`.

9.28.4.41 void mappel::PointEmitterModel::rename_hyperparam (const std::string & old_name, const std::string & new_name)
[inline], [inherited]

Definition at line 244 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.28.4.42 void mappel::MCMCAdaptor1Ds::sample_mcmc_candidate (IdxT sample_index, ParamT & candidate, double step_scale = 1.0) const

Definition at line 59 of file MCMCAdaptor1Ds.cpp.

References `mappel::MCMCAdaptor1D::eta_bg`, `mappel::MCMCAdaptor1D::eta_l`, `eta_sigma`, `mappel::MCMCAdaptor1D::eta_x`, `mappel::MCMCAdaptorBase::num_phases`, and `mappel::rng_manager`.

9.28.4.43 `void mappel::MCMCAdaptor1Ds::sample_mcmc_candidate (IdxT sample_index, ParamT & candidate, const IdxVecT & fixed_parameters_mask, double step_scale = 1.0) const`

Definition at line 77 of file MCMCAdaptor1Ds.cpp.

References `mappel::MCMCAdaptor1D::eta_bg`, `mappel::MCMCAdaptor1D::eta_l`, `eta_sigma`, `mappel::MCMCAdaptor1D::eta_x`, `mappel::MCMCAdaptorBase::num_phases`, and `mappel::rng_manager`.

9.28.4.44 `template<class RngT > PointEmitterModel::ParamT mappel::PointEmitterModel::sample_prior (RngT & rng) const` `[inherited]`

Definition at line 264 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.28.4.45 `PointEmitterModel::ParamT mappel::PointEmitterModel::sample_prior () const` `[inline]`, `[inherited]`

Definition at line 268 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`, and `mappel::rng_manager`.

9.28.4.46 `void mappel::MCMCAdaptor1D::set_background_mcmc_sampling (double eta_bg = -1)` `[inherited]`

Definition at line 81 of file MCMCAdaptor1D.cpp.

References `mappel::PointEmitterModel::default_pixel_mean_bg`, `mappel::MCMCAdaptor1D::eta_bg`, `mappel::PointEmitterModel::get_hyperparam_value()`, `mappel::PointEmitterModel::get_lbound()`, `mappel::PointEmitterModel::get_ubound()`, and `mappel::MCMCAdaptorBase::sigma_scale`.

Referenced by `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`.

9.28.4.47 `void mappel::PointEmitterModel::set_bounds (const ParamT & lbound_, const ParamT & ubound_)` `[inherited]`

Box-type parameter bounds

Modifies the prior bounds to prevent sampling outside the valid box-constraints.

Definition at line 213 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::bounds_epsilon`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

9.28.4.48 `void mappel::PointEmitterModel::set_hyperparam_names (const StringVecT & desc)` `[inline]`, `[inherited]`

Definition at line 260 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.28.4.49 `void mappel::PointEmitterModel::set_hyperparam_value (const std::string & name, double value) [inline], [inherited]`

Definition at line 240 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.28.4.50 `void mappel::PointEmitterModel::set_hyperparams (const VecT & hyperparams) [inline], [inherited]`

Definition at line 220 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

Referenced by `mappel::Gauss2DModel::set_hyperparams()`, and `mappel::Gauss2DsModel::set_hyperparams()`.

9.28.4.51 `void mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling (double eta_l = -1) [inherited]`

Definition at line 65 of file MCMCAdaptor1D.cpp.

References `mappel::PointEmitterModel::default_mean_l`, `mappel::MCMCAdaptor1D::eta_l`, `mappel::PointEmitterModel::get_hyperparam_value()`, and `mappel::MCMCAdaptorBase::sigma_scale`.

Referenced by `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`.

9.28.4.52 `void mappel::PointEmitterModel::set_lbound (const ParamT & lbound) [inherited]`

Definition at line 226 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::bounds_epsilon`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::Gauss1DsModel::set_min_sigma()`.

9.28.4.53 `void mappel::MCMCAdaptorBase::set_mcmc_num_phases (IdxT num_phases) [protected], [inherited]`

Definition at line 59 of file MCMCAdaptorBase.cpp.

References `mappel::MCMCAdaptorBase::num_phases`.

Referenced by `MCMCAdaptor1Ds()`, and `mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds()`.

9.28.4.54 `void mappel::MCMCAdaptorBase::set_mcmc_sigma_scale (double scale) [inherited]`

Definition at line 39 of file MCMCAdaptorBase.cpp.

References `mappel::MCMCAdaptorBase::global_max_mcmc_sigma_scale`, and `mappel::MCMCAdaptorBase::sigma_scale`.

9.28.4.55 `void mappel::PointEmitterModel::set_param_names (const StringVecT & desc) [inline],[inherited]`

Definition at line 252 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.28.4.56 `void mappel::PointEmitterModel::set_prior (CompositeDist && prior_) [inherited]`

Definition at line 158 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_hyperparams`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::Gauss2DModel::set_prior()`, and `mappel::Gauss2DsModel::set_prior()`.

9.28.4.57 `void mappel::PointEmitterModel::set_prior (const CompositeDist & prior_) [inherited]`

Definition at line 149 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_hyperparams`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

9.28.4.58 `void mappel::PointEmitterModel::set_rng_seed (RngSeedT seed) [static],[inherited]`

Definition at line 110 of file PointEmitterModel.cpp.

References `mappel::rng_manager`.

9.28.4.59 `void mappel::PointEmitterModel::set_ubound (const ParamT & ubound) [inherited]`

Definition at line 237 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::bounds_epsilon`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::Gauss1DsModel::set_max_sigma()`, and `mappel::Gauss2DsModel::set_max_sigma_ratio()`.

9.28.4.60 `bool mappel::PointEmitterModel::theta_in_bounds (const ParamT & theta) const [inherited]`

Definition at line 257 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsModel::initial_theta_estimate()`, `mappel::Gauss1DModel::make_stencil()`, `mappel::Gauss1DsModel::make_stencil()`, `mappel::Gauss2DModel::make_stencil()`, `mappel::Gauss2DsxyModel::make_stencil()`, `mappel::Gauss2DsModel::make_stencil()`, and `mappel::PointEmitterModel::theta_stack_in_bounds()`.

9.28.4.61 **BoolVecT** mappel::PointEmitterModel::theta_stack_in_bounds (const ParamVecT & *theta*) const [inherited]

Definition at line 296 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::check_param_shape(), and mappel::PointEmitterModel::theta_in_bounds().

9.28.5 Member Data Documentation

9.28.5.1 **const double** mappel::PointEmitterModel::bounds_epsilon = 1.0E-6 [static],[inherited]

Distance from the boundary to constrain in bound_theta and bounded_theta methods

Definition at line 52 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::set_bounds(), mappel::PointEmitterModel::set_lbound(), mappel::Gauss2↔DsModel::set_max_sigma_ratio(), and mappel::PointEmitterModel::set_ubound().

9.28.5.2 **const double** mappel::PointEmitterModel::default_alpha_sigma = 2 [static],[inherited]

Default per-pixel background gamma distribution shape

Definition at line 62 of file PointEmitterModel.h.

9.28.5.3 **const double** mappel::PointEmitterModel::default_beta_pos = 3 [static],[inherited]

Default position parameter in symmetric beta-distributions

Definition at line 56 of file PointEmitterModel.h.

9.28.5.4 **const double** mappel::PointEmitterModel::default_intensity_kappa = 2 [static],[inherited]

Default shape for intensity gamma distributions

Definition at line 60 of file PointEmitterModel.h.

9.28.5.5 **const double** mappel::PointEmitterModel::default_max_l = INFINITY [static],[inherited]

Default maximum emitter intensity

Definition at line 59 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::make_prior_component_intensity().

9.28.5.6 **const double** mappel::PointEmitterModel::default_mean_l = 300 [static],[inherited]

Default emitter intensity mean

Definition at line 58 of file PointEmitterModel.h.

Referenced by mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling().

9.28.5.7 `const double mappel::PointEmitterModel::default_pixel_mean_bg = 4` `[static], [inherited]`

Default per-pixel mean background counts

Definition at line 61 of file PointEmitterModel.h.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_beta_position()`, `mappel::Gauss1DModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_default_prior_normal_position()`, `mappel::Gauss1DModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, and `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`.

9.28.5.8 `const double mappel::PointEmitterModel::default_sigma_pos = 1` `[static], [inherited]`

Default position parameter in symmetric beta-distributions

Definition at line 57 of file PointEmitterModel.h.

9.28.5.9 `const std::string mappel::PointEmitterModel::DefaultSeperableInitEstimator = "TrustRegion"` `[static], [inherited]`

Estimator name to use in 1D separable initializations

Definition at line 49 of file PointEmitterModel.h.

Referenced by `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsxyModel::initial_theta_estimate()`, and `mappel::Gauss2DsModel::initial_theta_estimate()`.

9.28.5.10 `double mappel::MCMCAdaptor1D::eta_bg = 0` `[protected], [inherited]`

The standard deviation for the normally distributed perturbation to `theta_bg` in the random walk MCMC sampling

Definition at line 33 of file MCMCAdaptor1D.h.

Referenced by `mappel::MCMCAdaptor1D::get_stats()`, `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor1D::operator=()`, `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, `sample_mcmc_candidate()`, `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`, and `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`.

9.28.5.11 `double mappel::MCMCAdaptor1D::eta_l = 0` `[protected], [inherited]`

The standard deviation for the normally distributed perturbation to `theta_l` in the random walk MCMC sampling

Definition at line 32 of file MCMCAdaptor1D.h.

Referenced by `mappel::MCMCAdaptor1D::get_stats()`, `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor1D::operator=()`, `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, `sample_mcmc_candidate()`, `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`, and `mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling()`.

9.28.5.12 double mappel::MCMCAdaptor1Ds::eta_sigma = -1 [protected]

The standard deviation for the normally distributed perturbation to theta_bg in the random walk MCMC sampling

Definition at line 28 of file MCMCAdaptor1Ds.h.

Referenced by get_stats(), MCMCAdaptor1Ds(), operator=(), and sample_mcmc_candidate().

9.28.5.13 double mappel::MCMCAdaptor1D::eta_x = 0 [protected], [inherited]

The standard deviation for the normally distributed perturbation to theta_x in the random walk MCMC sampling

Definition at line 31 of file MCMCAdaptor1D.h.

Referenced by mappel::MCMCAdaptor1D::get_stats(), mappel::MCMCAdaptor1D::MCMCAdaptor1D(), mappel::MCMCAdaptor1D::operator=(), sample_mcmc_candidate(), mappel::MCMCAdaptor2D::sample_mcmc_candidate(), mappel::MCMCAdaptor2Ds::sample_mcmc_candidate(), and mappel::MCMCAdaptor1D::sample_mcmc_candidate().

9.28.5.14 const double mappel::MCMCAdaptorBase::global_default_mcmc_sigma_scale = 0.05 [static], [inherited]

Definition at line 16 of file MCMCAdaptorBase.h.

Referenced by MCMCAdaptor1Ds(), mappel::MCMCAdaptor2D::MCMCAdaptor2D(), and mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds().

9.28.5.15 const double mappel::MCMCAdaptorBase::global_max_mcmc_sigma_scale = 0.5 [static], [inherited]

Definition at line 17 of file MCMCAdaptorBase.h.

Referenced by mappel::MCMCAdaptorBase::MCMCAdaptorBase(), and mappel::MCMCAdaptorBase::set_mcmc_sigma_scale().

9.28.5.16 const double mappel::PointEmitterModel::global_max_psf_sigma = 1E2 [static], [inherited]

Global maximum for any psf_sigma. Sizes above this value are invalid, and nowhere near useful for practical point emitter localization

Definition at line 54 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::check_psf_sigma().

9.28.5.17 const double mappel::PointEmitterModel::global_min_psf_sigma = 1E-1 [static], [inherited]

Global minimum for any psf_sigma. Sizes below this value are invalid, and nowhere near useful for practical point emitter localization

Definition at line 53 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::check_psf_sigma().

9.28.5.18 ParamT mappel::PointEmitterModel::lbound [protected],[inherited]

Definition at line 148 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::bound_theta(), mappel::PointEmitterModel::bounded_theta(), mappel::PointEmitterModel::get_lbound(), mappel::PointEmitterModel::get_stats(), mappel::Gauss1DsModel::initial_theta_estimate(), mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::PointEmitterModel::operator=(), mappel::PointEmitterModel::reflected_theta(), mappel::PointEmitterModel::set_bounds(), mappel::PointEmitterModel::set_lbound(), mappel::PointEmitterModel::set_prior(), mappel::PointEmitterModel::set_ubound(), and mappel::PointEmitterModel::theta_in_bounds().

9.28.5.19 IdxT mappel::PointEmitterModel::num_hyperparams [protected],[inherited]

Definition at line 147 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::get_num_hyperparams(), mappel::PointEmitterModel::get_stats(), mappel::PointEmitterModel::operator=(), and mappel::PointEmitterModel::set_prior().

9.28.5.20 IdxT mappel::PointEmitterModel::num_params [protected],[inherited]

Definition at line 146 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::bound_theta(), mappel::PointEmitterModel::bounded_theta(), mappel::PointEmitterModel::check_param_shape(), mappel::PointEmitterModel::get_num_params(), mappel::PointEmitterModel::get_stats(), mappel::Gauss1DModel::initial_theta_estimate(), mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::PointEmitterModel::make_param(), mappel::PointEmitterModel::make_param_mat(), mappel::PointEmitterModel::make_param_mat_stack(), mappel::PointEmitterModel::make_param_stack(), mappel::PointEmitterModel::operator=(), mappel::PointEmitterModel::reflected_theta(), mappel::PointEmitterModel::set_bounds(), mappel::PointEmitterModel::set_lbound(), mappel::PointEmitterModel::set_prior(), mappel::PointEmitterModel::set_ubound(), and mappel::PointEmitterModel::theta_in_bounds().

9.28.5.21 IdxT mappel::MCMCAdaptorBase::num_phases [protected],[inherited]

The number of different sampling phases for candidate selection MCMC. Each phase changes a different subset of variables.

Definition at line 29 of file MCMCAdaptorBase.h.

Referenced by mappel::MCMCAdaptorBase::get_mcmc_num_phases(), mappel::MCMCAdaptorBase::get_stats(), mappel::MCMCAdaptor2D::sample_mcmc_candidate(), sample_mcmc_candidate(), mappel::MCMCAdaptor2Ds::sample_mcmc_candidate(), mappel::MCMCAdaptor1D::sample_mcmc_candidate(), and mappel::MCMCAdaptorBase::set_mcmc_num_phases().

9.28.5.22 CompositeDist mappel::PointEmitterModel::prior [protected],[inherited]

Definition at line 145 of file PointEmitterModel.h.

Referenced by mappel::Gauss2DModel::debug_internal_sum_model_y(), mappel::Gauss2DsModel::debug_internal_sum_model_y(), mappel::Gauss2DModel::Gauss2DModel(), mappel::Gauss2DsModel::Gauss2DsModel(), mappel::PointEmitterModel::get_hyperparam_index(), mappel::PointEmitterModel::get_hyperparam_names(), mappel::PointEmitterModel::get_hyperparam_value(), mappel::PointEmitterModel::get_hyperparams(), mappel::Gauss1DsModel::get_max_sigma(), mappel::Gauss1DsModel::get_min_sigma(), mappel::PointEmitterModel::get_param_names(), mappel::PointEmitterModel::get_prior(), mappel::PointEmitterModel::get_stats(), mappel::PointEmitterModel::has_hyperparam(), mappel::PointEmitterModel::operator=(), mappel::PointEmitterModel::PointEmitterModel(), mappel::PointEmitterModel::rename_hyperparam(), mappel::PointEmitterModel::sample_prior(), mappel::PointEmitterModel::set_bounds(), mappel::PointEmitterModel::set_hyperparam_names(), mappel::PointEmitterModel::set_hyperparam_value(), mappel::PointEmitterModel::set_hyperparams(), mappel::PointEmitterModel::set_lbound(), mappel::Gauss1DsModel::set_max_sigma(), mappel::Gauss1DsModel::set_min_sigma(), mappel::PointEmitterModel::set_param_names(), mappel::PointEmitterModel::set_prior(), and mappel::PointEmitterModel::set_ubound().

9.28.5.23 double mappel::MCMCAdaptorBase::sigma_scale [protected],[inherited]

A scaling factor for step sizes as a fraction of the size of the domain dimension we are walking in. (0.05 default)

Definition at line 30 of file MCMCAdaptorBase.h.

Referenced by mappel::MCMCAdaptorBase::get_mcmc_sigma_scale(), mappel::MCMCAdaptorBase::get_stats(), mappel::MCMCAdaptor1D::MCMCAdaptor1D(), MCMCAdaptor1Ds(), mappel::MCMCAdaptor2D::MCMCAdaptor2D(), mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds(), mappel::MCMCAdaptor1D::set_background_mcmc_sampling(), mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling(), and mappel::MCMCAdaptorBase::set_mcmc_sigma_scale().

9.28.5.24 ParamT mappel::PointEmitterModel::ubound [protected],[inherited]

Definition at line 148 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::bound_theta(), mappel::PointEmitterModel::bounded_theta(), mappel::PointEmitterModel::get_stats(), mappel::PointEmitterModel::get_ubound(), mappel::Gauss1DsModel::initial_theta_estimate(), mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::PointEmitterModel::operator=(), mappel::PointEmitterModel::reflected_theta(), mappel::PointEmitterModel::set_bounds(), mappel::PointEmitterModel::set_lbound(), mappel::PointEmitterModel::set_prior(), mappel::PointEmitterModel::set_ubound(), and mappel::PointEmitterModel::theta_in_bounds().


The documentation for this class was generated from the following files:

- [MCMCAdaptor1Ds.h](#)
- [MCMCAdaptor1Ds.cpp](#)

9.29 mappel::MCMCAdaptor2D Class Reference

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/MCMCAdaptor2D.h>
```

Inheritance diagram for mappel::MCMCAdaptor2D:

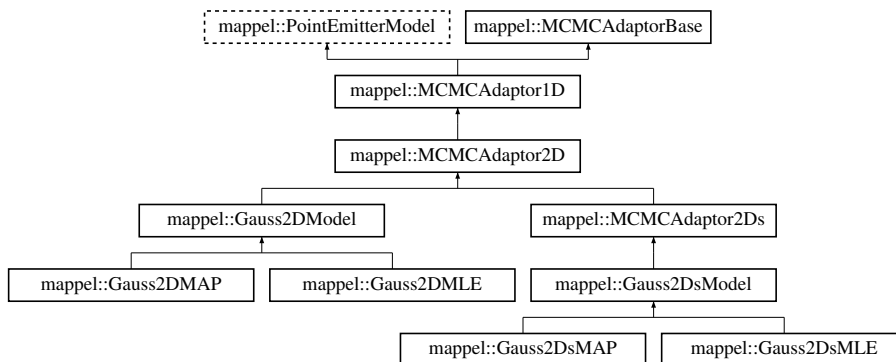

Public Types

- using [ParamT](#) = arma::vec
- using [ParamVecT](#) = arma::mat

Public Member Functions

- void [sample_mcmc_candidate](#) ([IdxT](#) sample_index, [ParamT](#) &candidate, double step_scale=1.0) const
- void [sample_mcmc_candidate](#) ([IdxT](#) sample_index, [ParamT](#) &candidate, const [IdxVecT](#) &fixed_parameters_↔ mask, double step_scale=1.0) const
- void [set_intensity_mcmc_sampling](#) (double eta_l=-1)
- void [set_background_mcmc_sampling](#) (double eta_bg=-1)
- [IdxT](#) [get_num_params](#) () const
- void [check_param_shape](#) (const [ParamT](#) &theta) const
- void [check_param_shape](#) (const [ParamVecT](#) &theta) const
- void [check_psf_sigma](#) (double psf_sigma) const
- void [check_psf_sigma](#) (const [VecT](#) &psf_sigma) const
- [ParamT](#) [make_param](#) () const
- template<class FillT >
 [ParamT](#) [make_param](#) (FillT fill) const
- [ParamVecT](#) [make_param_stack](#) ([IdxT](#) n) const
- template<class FillT >
 [ParamVecT](#) [make_param_stack](#) ([IdxT](#) n, FillT fill) const
- [MatT](#) [make_param_mat](#) () const
- template<class FillT >
 [MatT](#) [make_param_mat](#) (FillT fill) const
- [CubeT](#) [make_param_mat_stack](#) ([IdxT](#) n) const
- template<class FillT >
 [CubeT](#) [make_param_mat_stack](#) ([IdxT](#) n, FillT fill) const
- CompositeDist & [get_prior](#) ()
- const CompositeDist & [get_prior](#) () const
- void [set_prior](#) (CompositeDist &&prior_)
- void [set_prior](#) (const CompositeDist &prior_)
- [IdxT](#) [get_num_hyperparams](#) () const
- void [set_hyperparams](#) (const [VecT](#) &hyperparams)
- [VecT](#) [get_hyperparams](#) () const
- bool [has_hyperparam](#) (const std::string &name) const
- double [get_hyperparam_value](#) (const std::string &name) const
- int [get_hyperparam_index](#) (const std::string &name) const
- void [set_hyperparam_value](#) (const std::string &name, double value)
- void [rename_hyperparam](#) (const std::string &old_name, const std::string &new_name)
- [StringVecT](#) [get_param_names](#) () const
- void [set_param_names](#) (const [StringVecT](#) &desc)
- [StringVecT](#) [get_hyperparam_names](#) () const
- void [set_hyperparam_names](#) (const [StringVecT](#) &desc)
- template<class RngT >
 [ParamT](#) [sample_prior](#) (RngT &rng) const
- [ParamT](#) [sample_prior](#) () const
- void [set_bounds](#) (const [ParamT](#) &lbound, const [ParamT](#) &ubound)
- void [set_lbound](#) (const [ParamT](#) &lbound)
- void [set_ubound](#) (const [ParamT](#) &ubound)
- const [ParamT](#) & [get_lbound](#) () const
- const [ParamT](#) & [get_ubound](#) () const
- bool [theta_in_bounds](#) (const [ParamT](#) &theta) const
- void [bound_theta](#) ([ParamT](#) &theta, double epsilon=[bounds_epsilon](#)) const
- [ParamT](#) [bounded_theta](#) (const [ParamT](#) &theta, double epsilon=[bounds_epsilon](#)) const

- [ParamT](#) [reflected_theta](#) (const [ParamT](#) &theta) const
- [BoolVecT](#) [theta_stack_in_bounds](#) (const [ParamVecT](#) &theta) const
- [ParamVecT](#) [bounded_theta_stack](#) (const [ParamVecT](#) &theta, double epsilon=[bounds_epsilon](#)) const
- [ParamVecT](#) [reflected_theta_stack](#) (const [ParamVecT](#) &theta) const
- void [set_mcmc_sigma_scale](#) (double scale)
- double [get_mcmc_sigma_scale](#) () const
- [IdxT](#) [get_mcmc_num_phases](#) () const

Static Public Member Functions

- static [prior_hessian::TruncatedNormalDist](#) [make_prior_component_position_normal](#) ([IdxT](#) size, double pos_↵, double sigma=[default_sigma_pos](#))
- static [prior_hessian::ScaledSymmetricBetaDist](#) [make_prior_component_position_beta](#) ([IdxT](#) size, double pos_↵, double beta=[default_beta_pos](#))
- static [prior_hessian::TruncatedGammaDist](#) [make_prior_component_intensity](#) (double mean=[default_mean_l](#)↵, double kappa=[default_intensity_kappa](#))
- static [prior_hessian::TruncatedParetoDist](#) [make_prior_component_sigma](#) (double min_sigma, double max_↵, double sigma, double alpha=[default_alpha_sigma](#))
- static void [set_rng_seed](#) ([RngSeedT](#) seed)
- static [ParallelRngManagerT](#) & [get_rng_manager](#) ()
- static [ParallelRngGeneratorT](#) & [get_rng_generator](#) ()

Static Public Attributes

- static const std::string [DefaultSeperableInitEstimator](#) = "TrustRegion"
- static const double [bounds_epsilon](#) = 1.0E-6
- static const double [global_min_psf_sigma](#) = 1E-1
- static const double [global_max_psf_sigma](#) = 1E2
- static const double [default_beta_pos](#) = 3
- static const double [default_sigma_pos](#) = 1
- static const double [default_mean_l](#) = 300
- static const double [default_max_l](#) = INFINITY
- static const double [default_intensity_kappa](#) = 2
- static const double [default_pixel_mean_bg](#) = 4
- static const double [default_alpha_sigma](#) = 2
- static const double [global_default_mcmc_sigma_scale](#) = 0.05
- static const double [global_max_mcmc_sigma_scale](#) = 0.5

Protected Member Functions

- [MCMCAdaptor2D](#) ()
- [MCMCAdaptor2D](#) (double [sigma_scale](#))
- [MCMCAdaptor2D](#) (const [MCMCAdaptor2D](#) &o)
- [MCMCAdaptor2D](#) ([MCMCAdaptor2D](#) &&o)
- [MCMCAdaptor2D](#) & [operator=](#) (const [MCMCAdaptor2D](#) &o)
- [MCMCAdaptor2D](#) & [operator=](#) ([MCMCAdaptor2D](#) &&o)
- [StatsT](#) [get_stats](#) () const
- void [set_mcmc_num_phases](#) ([IdxT](#) num_phases)

Protected Attributes

- double `eta_y` =0
- double `eta_x` =0
- double `eta_l` =0
- double `eta_bg` =0
- CompositeDist `prior`
- `IdxT` `num_params`
- `IdxT` `num_hyperparams`
- `ParamT` `lbound`
- `ParamT` `ubound`
- `IdxT` `num_phases`
- double `sigma_scale`

9.29.1 Detailed Description

Definition at line 14 of file `MCMCAdaptor2D.h`.

9.29.2 Member Typedef Documentation

9.29.2.1 `using mappel::PointEmitterModel::ParamT = arma::vec` `[inherited]`

Parameter vector

Definition at line 47 of file `PointEmitterModel.h`.

9.29.2.2 `using mappel::PointEmitterModel::ParamVecT = arma::mat` `[inherited]`

Vector of parameter vectors

Definition at line 48 of file `PointEmitterModel.h`.

9.29.3 Constructor & Destructor Documentation

9.29.3.1 `mappel::MCMCAdaptor2D::MCMCAdaptor2D ()` `[protected]`

Definition at line 11 of file `MCMCAdaptor2D.cpp`.

References `mappel::MCMCAdaptorBase::global_default_mcmc_sigma_scale`.

9.29.3.2 `mappel::MCMCAdaptor2D::MCMCAdaptor2D (double sigma_scale)` `[explicit], [protected]`

Definition at line 14 of file `MCMCAdaptor2D.cpp`.

References `eta_y`, `mappel::PointEmitterModel::get_lbound()`, `mappel::PointEmitterModel::get_ubound()`, and `mappel::MCMCAdaptorBase::sigma_scale`.

9.29.3.3 mappel::MCMCAdaptor2D::MCMCAdaptor2D (const MCMCAdaptor2D & o) [protected]

Definition at line 22 of file MCMCAdaptor2D.cpp.

References [eta_y](#).

9.29.3.4 mappel::MCMCAdaptor2D::MCMCAdaptor2D (MCMCAdaptor2D && o) [protected]

Definition at line 27 of file MCMCAdaptor2D.cpp.

References [eta_y](#).

9.29.4 Member Function Documentation

9.29.4.1 void mappel::PointEmitterModel::bound_theta (ParamT & theta, double epsilon = bounds_epsilon) const [inherited]

Definition at line 248 of file PointEmitterModel.cpp.

References [mappel::PointEmitterModel::check_param_shape\(\)](#), [mappel::PointEmitterModel::lbound](#), [mappel::PointEmitterModel::num_params](#), and [mappel::PointEmitterModel::ubound](#).

9.29.4.2 PointEmitterModel::ParamT mappel::PointEmitterModel::bounded_theta (const ParamT & theta, double epsilon = bounds_epsilon) const [inherited]

Definition at line 265 of file PointEmitterModel.cpp.

References [mappel::PointEmitterModel::check_param_shape\(\)](#), [mappel::PointEmitterModel::lbound](#), [mappel::PointEmitterModel::num_params](#), and [mappel::PointEmitterModel::ubound](#).

Referenced by [mappel::PointEmitterModel::bounded_theta_stack\(\)](#).

9.29.4.3 PointEmitterModel::ParamVecT mappel::PointEmitterModel::bounded_theta_stack (const ParamVecT & theta, double epsilon = bounds_epsilon) const [inherited]

Definition at line 306 of file PointEmitterModel.cpp.

References [mappel::PointEmitterModel::bounded_theta\(\)](#), [mappel::PointEmitterModel::check_param_shape\(\)](#), and [mappel::PointEmitterModel::make_param_stack\(\)](#).

9.29.4.4 void mappel::PointEmitterModel::check_param_shape (const ParamT & theta) const [inherited]

Definition at line 167 of file PointEmitterModel.cpp.

References [mappel::PointEmitterModel::num_params](#).

Referenced by [mappel::PointEmitterModel::bound_theta\(\)](#), [mappel::PointEmitterModel::bounded_theta\(\)](#), [mappel::PointEmitterModel::bounded_theta_stack\(\)](#), [mappel::PointEmitterModel::reflected_theta\(\)](#), [mappel::PointEmitterModel::reflected_theta_stack\(\)](#), [mappel::PointEmitterModel::theta_in_bounds\(\)](#), and [mappel::PointEmitterModel::theta_stack_in_bounds\(\)](#).

9.29.4.5 `void mappel::PointEmitterModel::check_param_shape (const ParamVecT & theta) const` [inherited]

Definition at line 176 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::num_params.

9.29.4.6 `void mappel::PointEmitterModel::check_psf_sigma (double psf_sigma) const` [inherited]

Definition at line 185 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::global_max_psf_sigma, and mappel::PointEmitterModel::global_min_psf_sigma.

Referenced by mappel::Gauss1DModel::Gauss1DModel(), mappel::Gauss2DModel::Gauss2DModel(), mappel::Gauss2DsModel::Gauss2DsModel(), mappel::Gauss1DsModel::set_max_sigma(), mappel::Gauss2DsModel::set_max_sigma(), mappel::Gauss1DsModel::set_min_sigma(), mappel::Gauss2DsModel::set_min_sigma(), mappel::Gauss1DModel::set_psf_sigma(), and mappel::Gauss2DModel::set_psf_sigma().

9.29.4.7 `void mappel::PointEmitterModel::check_psf_sigma (const VecT & psf_sigma) const` [inherited]

Definition at line 197 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::global_max_psf_sigma, and mappel::PointEmitterModel::global_min_psf_sigma.

9.29.4.8 `int mappel::PointEmitterModel::get_hyperparam_index (const std::string & name) const` [inline], [inherited]

Definition at line 236 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.29.4.9 `StringVecT mappel::PointEmitterModel::get_hyperparam_names () const` [inline], [inherited]

Definition at line 256 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.29.4.10 `double mappel::PointEmitterModel::get_hyperparam_value (const std::string & name) const` [inline], [inherited]

Definition at line 232 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

Referenced by mappel::MCMCAdaptor1D::set_background_mcmc_sampling(), and mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling().

9.29.4.11 `PointEmitterModel::ParamT mappel::PointEmitterModel::get_hyperparams () const` `[inline]`,
`[inherited]`

Definition at line 224 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.29.4.12 `const PointEmitterModel::ParamT & mappel::PointEmitterModel::get_lbound () const` `[inline]`,
`[inherited]`

Definition at line 212 of file PointEmitterModel.h.

References mappel::PointEmitterModel::lbound.

Referenced by mappel::MCMCAdaptor1D::MCMCAdaptor1D(), MCMCAdaptor2D(), and mappel::MCMCAdaptor1D::set_background_mcmc_sampling().

9.29.4.13 `IdxT mappel::MCMCAdaptorBase::get_mcmc_num_phases () const` `[inherited]`

Definition at line 56 of file MCMCAdaptorBase.cpp.

References mappel::MCMCAdaptorBase::num_phases.

9.29.4.14 `double mappel::MCMCAdaptorBase::get_mcmc_sigma_scale () const` `[inherited]`

Definition at line 53 of file MCMCAdaptorBase.cpp.

References mappel::MCMCAdaptorBase::sigma_scale.

9.29.4.15 `IdxT mappel::PointEmitterModel::get_num_hyperparams () const` `[inline]`, `[inherited]`

Definition at line 208 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_hyperparams.

9.29.4.16 `IdxT mappel::PointEmitterModel::get_num_params () const` `[inline]`, `[inherited]`

Definition at line 160 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.29.4.17 `StringVecT mappel::PointEmitterModel::get_param_names () const` `[inline]`, `[inherited]`

Definition at line 248 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.29.4.18 CompositeDist & mappel::PointEmitterModel::get_prior () [inline],[inherited]

Definition at line 200 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

Referenced by mappel::Gauss2DModel::update_internal_1Dsum_estimators(), and mappel::Gauss2DsModel::update_internal_1Dsum_estimators().

9.29.4.19 const CompositeDist & mappel::PointEmitterModel::get_prior () const [inline],[inherited]

Definition at line 204 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.29.4.20 ParallelRngGeneratorT & mappel::PointEmitterModel::get_rng_generator () [static],[inherited]

Definition at line 120 of file PointEmitterModel.cpp.

References mappel::rng_manager.

9.29.4.21 ParallelRngManagerT & mappel::PointEmitterModel::get_rng_manager () [static],[inherited]

Definition at line 115 of file PointEmitterModel.cpp.

References mappel::rng_manager.

9.29.4.22 StatsT mappel::MCMCAdaptor2D::get_stats () const [protected]

Definition at line 51 of file MCMCAdaptor2D.cpp.

References eta_y, and mappel::MCMCAdaptor1D::get_stats().

Referenced by mappel::MCMCAdaptor2Ds::get_stats(), and mappel::Gauss2DModel::get_stats().

9.29.4.23 const PointEmitterModel::ParamT & mappel::PointEmitterModel::get_ubound () const [inline],[inherited]

Definition at line 216 of file PointEmitterModel.h.

References mappel::PointEmitterModel::ubound.

Referenced by mappel::Gauss2DsxyModel::get_max_sigma_ratio(), mappel::Gauss2DsModel::get_max_sigma_ratio(), mappel::MCMCAdaptor1D::MCMCAdaptor1D(), MCMCAdaptor2D(), mappel::MCMCAdaptor1D::set_background_mcmc_sampling(), and mappel::Gauss2DsModel::set_max_sigma_ratio().

9.29.4.24 bool mappel::PointEmitterModel::has_hyperparam (const std::string & name) const [inline],[inherited]

Definition at line 228 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.29.4.25 `PointEmitterModel::ParamT mappel::PointEmitterModel::make_param () const` `[inline],[inherited]`

Definition at line 164 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

Referenced by mappel::Gauss1DModel::initial_theta_estimate(), mappel::Gauss1DsModel::initial_theta_estimate(), mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsxyModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::Gauss1DModel::pixel_hess_update(), mappel::Gauss1DsModel::pixel_hess_update(), mappel::Gauss2DModel::pixel_hess_update(), and mappel::Gauss2DsModel::pixel_hess_update().

9.29.4.26 `template<class FillT > PointEmitterModel::ParamT mappel::PointEmitterModel::make_param (FillT fill) const` `[inherited]`

Definition at line 181 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.29.4.27 `MatT mappel::PointEmitterModel::make_param_mat () const` `[inline],[inherited]`

Definition at line 172 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.29.4.28 `template<class FillT > MatT mappel::PointEmitterModel::make_param_mat (FillT fill) const` `[inherited]`

Definition at line 191 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.29.4.29 `CubeT mappel::PointEmitterModel::make_param_mat_stack (IdxT n) const` `[inline],[inherited]`

Definition at line 176 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.29.4.30 `template<class FillT > CubeT mappel::PointEmitterModel::make_param_mat_stack (IdxT n, FillT fill) const` `[inherited]`

Definition at line 196 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.29.4.31 `PointEmitterModel::ParamVecT mappel::PointEmitterModel::make_param_stack (IdxT n) const` `[inline],[inherited]`

Definition at line 168 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

Referenced by mappel::PointEmitterModel::bounded_theta_stack(), and mappel::PointEmitterModel::reflected_theta_stack().

9.29.4.32 `template<class FillT > PointEmitterModel::ParamVecT mappel::PointEmitterModel::make_param_stack (IdxT n, FillT fill) const [inherited]`

Definition at line 186 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::num_params`.

9.29.4.33 `prior_hessian::TruncatedGammaDist mappel::PointEmitterModel::make_prior_component_intensity (double mean = default_mean_I, double kappa = default_intensity_kappa) [static],[inherited]`

Definition at line 98 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::default_max_I`.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_beta_position()`, `mappel::Gauss1DModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_normal_position()`, `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss1DModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_prior_beta_position()`, `mappel::Gauss1DsModel::make_prior_beta_position()`, `mappel::Gauss1DModel::make_prior_beta_position()`, `mappel::Gauss2DsModel::make_prior_beta_position()`, `mappel::Gauss2DModel::make_prior_normal_position()`, `mappel::Gauss1DsModel::make_prior_normal_position()`, `mappel::Gauss1DModel::make_prior_normal_position()`, and `mappel::Gauss2DsModel::make_prior_normal_position()`.

9.29.4.34 `prior_hessian::ScaledSymmetricBetaDist mappel::PointEmitterModel::make_prior_component_position_beta (IdxT size, double pos_beta = default_beta_pos) [static],[inherited]`

Definition at line 92 of file PointEmitterModel.cpp.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_beta_position()`, `mappel::Gauss1DModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss1DsModel::make_prior_beta_position()`, `mappel::Gauss2DModel::make_prior_beta_position()`, `mappel::Gauss1DModel::make_prior_beta_position()`, and `mappel::Gauss2DsModel::make_prior_beta_position()`.

9.29.4.35 `prior_hessian::TruncatedNormalDist mappel::PointEmitterModel::make_prior_component_position_normal (IdxT size, double pos_sigma = default_sigma_pos) [static],[inherited]`

Definition at line 85 of file PointEmitterModel.cpp.

Referenced by `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_default_prior_normal_position()`, `mappel::Gauss1DModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_prior_normal_position()`, `mappel::Gauss1DsModel::make_prior_normal_position()`, `mappel::Gauss1DModel::make_prior_normal_position()`, and `mappel::Gauss2DsModel::make_prior_normal_position()`.

9.29.4.36 `prior_hessian::TruncatedParetoDist mappel::PointEmitterModel::make_prior_component_sigma (double min_sigma, double max_sigma, double alpha = default_alpha_sigma) [static],[inherited]`

Definition at line 104 of file PointEmitterModel.cpp.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, `mappel::Gauss1DsModel::make_prior_beta_position()`, `mappel::Gauss2DsModel::make_prior_beta_position()`, `mappel::Gauss1DsModel::make_prior_normal_position()`, and `mappel::Gauss2DsModel::make_prior_normal_position()`.

9.29.4.37 MCMCAdaptor2D & mappel::MCMCAdaptor2D::operator= (const MCMCAdaptor2D & o) [protected]

Definition at line 32 of file MCMCAdaptor2D.cpp.

References eta_y, and mappel::MCMCAdaptor1D::operator=().

Referenced by mappel::MCMCAdaptor2Ds::operator=(), and mappel::Gauss2DModel::operator=().

9.29.4.38 MCMCAdaptor2D & mappel::MCMCAdaptor2D::operator= (MCMCAdaptor2D && o) [protected]

Definition at line 41 of file MCMCAdaptor2D.cpp.

References eta_y, and mappel::MCMCAdaptor1D::operator=().

9.29.4.39 PointEmitterModel::ParamT mappel::PointEmitterModel::reflected_theta (const ParamT & theta) const [inherited]

Definition at line 276 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::check_param_shape(), mappel::PointEmitterModel::lbound, mappel::PointEmitterModel::num_params, and mappel::PointEmitterModel::ubound.

Referenced by mappel::PointEmitterModel::reflected_theta_stack().

9.29.4.40 PointEmitterModel::ParamVecT mappel::PointEmitterModel::reflected_theta_stack (const ParamVecT & theta) const [inherited]

Definition at line 316 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::check_param_shape(), mappel::PointEmitterModel::make_param_stack(), and mappel::PointEmitterModel::reflected_theta().

9.29.4.41 void mappel::PointEmitterModel::rename_hyperparam (const std::string & old_name, const std::string & new_name) [inline], [inherited]

Definition at line 244 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.29.4.42 void mappel::MCMCAdaptor2D::sample_mcmc_candidate (IdxT sample_index, ParamT & candidate, double step_scale = 1.0) const

Definition at line 59 of file MCMCAdaptor2D.cpp.

References mappel::MCMCAdaptor1D::eta_bg, mappel::MCMCAdaptor1D::eta_l, mappel::MCMCAdaptor1D::eta_x, eta_y, mappel::MCMCAdaptorBase::num_phases, and mappel::rng_manager.

9.29.4.43 `void mappel::MCMCAdaptor2D::sample_mcmc_candidate (IdxT sample_index, ParamT & candidate, const IdxVecT & fixed_parameters_mask, double step_scale = 1.0) const`

Definition at line 74 of file MCMCAdaptor2D.cpp.

References `mappel::MCMCAdaptor1D::eta_bg`, `mappel::MCMCAdaptor1D::eta_l`, `mappel::MCMCAdaptor1D::eta_x`, `eta_y`, `mappel::MCMCAdaptorBase::num_phases`, and `mappel::rng_manager`.

9.29.4.44 `template<class RngT > PointEmitterModel::ParamT mappel::PointEmitterModel::sample_prior (RngT & rng) const` `[inherited]`

Definition at line 264 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.29.4.45 `PointEmitterModel::ParamT mappel::PointEmitterModel::sample_prior () const` `[inline],[inherited]`

Definition at line 268 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`, and `mappel::rng_manager`.

9.29.4.46 `void mappel::MCMCAdaptor1D::set_background_mcmc_sampling (double eta_bg = -1)` `[inherited]`

Definition at line 81 of file MCMCAdaptor1D.cpp.

References `mappel::PointEmitterModel::default_pixel_mean_bg`, `mappel::MCMCAdaptor1D::eta_bg`, `mappel::PointEmitterModel::get_hyperparam_value()`, `mappel::PointEmitterModel::get_lbound()`, `mappel::PointEmitterModel::get_ubound()`, and `mappel::MCMCAdaptorBase::sigma_scale`.

Referenced by `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`.

9.29.4.47 `void mappel::PointEmitterModel::set_bounds (const ParamT & lbound_, const ParamT & ubound_)` `[inherited]`

Box-type parameter bounds

Modifies the prior bounds to prevent sampling outside the valid box-constraints.

Definition at line 213 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::bounds_epsilon`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

9.29.4.48 `void mappel::PointEmitterModel::set_hyperparam_names (const StringVecT & desc)` `[inline],[inherited]`

Definition at line 260 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.29.4.49 `void mappel::PointEmitterModel::set_hyperparam_value (const std::string & name, double value) [inline], [inherited]`

Definition at line 240 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.29.4.50 `void mappel::PointEmitterModel::set_hyperparams (const VecT & hyperparams) [inline], [inherited]`

Definition at line 220 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

Referenced by mappel::Gauss2DModel::set_hyperparams(), and mappel::Gauss2DsModel::set_hyperparams().

9.29.4.51 `void mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling (double eta_I = -1) [inherited]`

Definition at line 65 of file MCMCAdaptor1D.cpp.

References mappel::PointEmitterModel::default_mean_I, mappel::MCMCAdaptor1D::eta_I, mappel::PointEmitterModel::get_hyperparam_value(), and mappel::MCMCAdaptorBase::sigma_scale.

Referenced by mappel::MCMCAdaptor1D::MCMCAdaptor1D().

9.29.4.52 `void mappel::PointEmitterModel::set_lbound (const ParamT & lbound) [inherited]`

Definition at line 226 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::bounds_epsilon, mappel::PointEmitterModel::lbound, mappel::PointEmitterModel::num_params, mappel::PointEmitterModel::prior, and mappel::PointEmitterModel::ubound.

Referenced by mappel::Gauss1DsModel::set_min_sigma().

9.29.4.53 `void mappel::MCMCAdaptorBase::set_mcmc_num_phases (IdxT num_phases) [protected], [inherited]`

Definition at line 59 of file MCMCAdaptorBase.cpp.

References mappel::MCMCAdaptorBase::num_phases.

Referenced by mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds(), and mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds().

9.29.4.54 `void mappel::MCMCAdaptorBase::set_mcmc_sigma_scale (double scale) [inherited]`

Definition at line 39 of file MCMCAdaptorBase.cpp.

References mappel::MCMCAdaptorBase::global_max_mcmc_sigma_scale, and mappel::MCMCAdaptorBase::sigma_scale.

9.29.4.55 `void mappel::PointEmitterModel::set_param_names (const StringVecT & desc) [inline],[inherited]`

Definition at line 252 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.29.4.56 `void mappel::PointEmitterModel::set_prior (CompositeDist && prior_) [inherited]`

Definition at line 158 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::lbound, mappel::PointEmitterModel::num_hyperparams, mappel::PointEmitterModel::num_params, mappel::PointEmitterModel::prior, and mappel::PointEmitterModel::ubound.

Referenced by mappel::Gauss2DModel::set_prior(), and mappel::Gauss2DsModel::set_prior().

9.29.4.57 `void mappel::PointEmitterModel::set_prior (const CompositeDist & prior_) [inherited]`

Definition at line 149 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::lbound, mappel::PointEmitterModel::num_hyperparams, mappel::PointEmitterModel::num_params, mappel::PointEmitterModel::prior, and mappel::PointEmitterModel::ubound.

9.29.4.58 `void mappel::PointEmitterModel::set_rng_seed (RngSeedT seed) [static],[inherited]`

Definition at line 110 of file PointEmitterModel.cpp.

References mappel::rng_manager.

9.29.4.59 `void mappel::PointEmitterModel::set_ubound (const ParamT & ubound) [inherited]`

Definition at line 237 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::bounds_epsilon, mappel::PointEmitterModel::lbound, mappel::PointEmitterModel::num_params, mappel::PointEmitterModel::prior, and mappel::PointEmitterModel::ubound.

Referenced by mappel::Gauss1DsModel::set_max_sigma(), and mappel::Gauss2DsModel::set_max_sigma_ratio().

9.29.4.60 `bool mappel::PointEmitterModel::theta_in_bounds (const ParamT & theta) const [inherited]`

Definition at line 257 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::check_param_shape(), mappel::PointEmitterModel::lbound, mappel::PointEmitterModel::num_params, and mappel::PointEmitterModel::ubound.

Referenced by mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::Gauss1DModel::make_stencil(), mappel::Gauss1DsModel::make_stencil(), mappel::Gauss2DModel::make_stencil(), mappel::Gauss2DsxyModel::make_stencil(), mappel::Gauss2DsModel::make_stencil(), and mappel::PointEmitterModel::theta_stack_in_bounds().

9.29.4.61 **BoolVecT** mappel::PointEmitterModel::theta_stack_in_bounds (const ParamVecT & *theta*) const [inherited]

Definition at line 296 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::check_param_shape(), and mappel::PointEmitterModel::theta_in_bounds().

9.29.5 Member Data Documentation

9.29.5.1 **const double** mappel::PointEmitterModel::bounds_epsilon = 1.0E-6 [static], [inherited]

Distance from the boundary to constrain in bound_theta and bounded_theta methods

Definition at line 52 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::set_bounds(), mappel::PointEmitterModel::set_lbound(), mappel::Gauss2D↔DsModel::set_max_sigma_ratio(), and mappel::PointEmitterModel::set_ubound().

9.29.5.2 **const double** mappel::PointEmitterModel::default_alpha_sigma = 2 [static], [inherited]

Default per-pixel background gamma distribution shape

Definition at line 62 of file PointEmitterModel.h.

9.29.5.3 **const double** mappel::PointEmitterModel::default_beta_pos = 3 [static], [inherited]

Default position parameter in symmetric beta-distributions

Definition at line 56 of file PointEmitterModel.h.

9.29.5.4 **const double** mappel::PointEmitterModel::default_intensity_kappa = 2 [static], [inherited]

Default shape for intensity gamma distributions

Definition at line 60 of file PointEmitterModel.h.

9.29.5.5 **const double** mappel::PointEmitterModel::default_max_l = INFINITY [static], [inherited]

Default maximum emitter intensity

Definition at line 59 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::make_prior_component_intensity().

9.29.5.6 **const double** mappel::PointEmitterModel::default_mean_l = 300 [static], [inherited]

Default emitter intensity mean

Definition at line 58 of file PointEmitterModel.h.

Referenced by mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling().

9.29.5.7 `const double mappel::PointEmitterModel::default_pixel_mean_bg = 4` `[static], [inherited]`

Default per-pixel mean background counts

Definition at line 61 of file PointEmitterModel.h.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_beta_position()`, `mappel::Gauss1DModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_default_prior_normal_position()`, `mappel::Gauss1DModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, and `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`.

9.29.5.8 `const double mappel::PointEmitterModel::default_sigma_pos = 1` `[static], [inherited]`

Default position parameter in symmetric beta-distributions

Definition at line 57 of file PointEmitterModel.h.

9.29.5.9 `const std::string mappel::PointEmitterModel::DefaultSeperableInitEstimator = "TrustRegion"` `[static], [inherited]`

Estimator name to use in 1D separable initializations

Definition at line 49 of file PointEmitterModel.h.

Referenced by `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsxyModel::initial_theta_estimate()`, and `mappel::Gauss2DsModel::initial_theta_estimate()`.

9.29.5.10 `double mappel::MCMCAdaptor1D::eta_bg = 0` `[protected], [inherited]`

The standard deviation for the normally distributed perturbation to `theta_bg` in the random walk MCMC sampling

Definition at line 33 of file MCMCAdaptor1D.h.

Referenced by `mappel::MCMCAdaptor1D::get_stats()`, `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor1D::operator=()`, `sample_mcmc_candidate()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`, and `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`.

9.29.5.11 `double mappel::MCMCAdaptor1D::eta_l = 0` `[protected], [inherited]`

The standard deviation for the normally distributed perturbation to `theta_l` in the random walk MCMC sampling

Definition at line 32 of file MCMCAdaptor1D.h.

Referenced by `mappel::MCMCAdaptor1D::get_stats()`, `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor1D::operator=()`, `sample_mcmc_candidate()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`, and `mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling()`.

9.29.5.12 `double mappel::MCMCAdaptor1D::eta_x=0` `[protected]`, `[inherited]`

The standard deviation for the normally distributed perturbation to `theta_x` in the random walk MCMC sampling

Definition at line 31 of file `MCMCAdaptor1D.h`.

Referenced by `mappel::MCMCAdaptor1D::get_stats()`, `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor1D::operator=()`, `sample_mcmc_candidate()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, and `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`.

9.29.5.13 `double mappel::MCMCAdaptor2D::eta_y=0` `[protected]`

The standard deviation for the normally distributed perturbation to `theta_y` in the random walk MCMC sampling

Definition at line 28 of file `MCMCAdaptor2D.h`.

Referenced by `get_stats()`, `MCMCAdaptor2D()`, `operator=()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, and `sample_mcmc_candidate()`.

9.29.5.14 `const double mappel::MCMCAdaptorBase::global_default_mcmc_sigma_scale = 0.05` `[static]`, `[inherited]`

Definition at line 16 of file `MCMCAdaptorBase.h`.

Referenced by `mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds()`, `MCMCAdaptor2D()`, and `mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds()`.

9.29.5.15 `const double mappel::MCMCAdaptorBase::global_max_mcmc_sigma_scale = 0.5` `[static]`, `[inherited]`

Definition at line 17 of file `MCMCAdaptorBase.h`.

Referenced by `mappel::MCMCAdaptorBase::MCMCAdaptorBase()`, and `mappel::MCMCAdaptorBase::set_mcmc_sigma_scale()`.

9.29.5.16 `const double mappel::PointEmitterModel::global_max_psf_sigma = 1E2` `[static]`, `[inherited]`

Global maximum for any `psf_sigma`. Sizes above this value are invalid, and nowhere near useful for practical point emitter localization

Definition at line 54 of file `PointEmitterModel.h`.

Referenced by `mappel::PointEmitterModel::check_psf_sigma()`.

9.29.5.17 `const double mappel::PointEmitterModel::global_min_psf_sigma = 1E-1` `[static]`, `[inherited]`

Global minimum for any `psf_sigma`. Sizes below this value are invalid, and nowhere near useful for practical point emitter localization

Definition at line 53 of file `PointEmitterModel.h`.

Referenced by `mappel::PointEmitterModel::check_psf_sigma()`.

9.29.5.18 ParamT mappel::PointEmitterModel::lbound [protected],[inherited]

Definition at line 148 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::bound_theta(), mappel::PointEmitterModel::bounded_theta(), mappel::PointEmitterModel::get_lbound(), mappel::PointEmitterModel::get_stats(), mappel::Gauss1DsModel::initial_theta_estimate(), mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::PointEmitterModel::operator=(), mappel::PointEmitterModel::reflected_theta(), mappel::PointEmitterModel::set_bounds(), mappel::PointEmitterModel::set_lbound(), mappel::PointEmitterModel::set_prior(), mappel::PointEmitterModel::set_ubound(), and mappel::PointEmitterModel::theta_in_bounds().

9.29.5.19 IdxT mappel::PointEmitterModel::num_hyperparams [protected],[inherited]

Definition at line 147 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::get_num_hyperparams(), mappel::PointEmitterModel::get_stats(), mappel::PointEmitterModel::operator=(), and mappel::PointEmitterModel::set_prior().

9.29.5.20 IdxT mappel::PointEmitterModel::num_params [protected],[inherited]

Definition at line 146 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::bound_theta(), mappel::PointEmitterModel::bounded_theta(), mappel::PointEmitterModel::check_param_shape(), mappel::PointEmitterModel::get_num_params(), mappel::PointEmitterModel::get_stats(), mappel::Gauss1DModel::initial_theta_estimate(), mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::PointEmitterModel::make_param(), mappel::PointEmitterModel::make_param_mat(), mappel::PointEmitterModel::make_param_mat_stack(), mappel::PointEmitterModel::make_param_stack(), mappel::PointEmitterModel::operator=(), mappel::PointEmitterModel::reflected_theta(), mappel::PointEmitterModel::set_bounds(), mappel::PointEmitterModel::set_lbound(), mappel::PointEmitterModel::set_prior(), mappel::PointEmitterModel::set_ubound(), and mappel::PointEmitterModel::theta_in_bounds().

9.29.5.21 IdxT mappel::MCMCAdaptorBase::num_phases [protected],[inherited]

The number of different sampling phases for candidate selection MCMC. Each phase changes a different subset of variables.

Definition at line 29 of file MCMCAdaptorBase.h.

Referenced by mappel::MCMCAdaptorBase::get_mcmc_num_phases(), mappel::MCMCAdaptorBase::get_stats(), mappel::MCMCAdaptor1Ds::sample_mcmc_candidate(), mappel::MCMCAdaptor2Ds::sample_mcmc_candidate(), sample_mcmc_candidate(), mappel::MCMCAdaptor1D::sample_mcmc_candidate(), and mappel::MCMCAdaptorBase::set_mcmc_num_phases().

9.29.5.22 CompositeDist mappel::PointEmitterModel::prior [protected],[inherited]

Definition at line 145 of file PointEmitterModel.h.

Referenced by mappel::Gauss2DModel::debug_internal_sum_model_y(), mappel::Gauss2DsModel::debug_internal_sum_model_y(), mappel::Gauss2DModel::Gauss2DModel(), mappel::Gauss2DsModel::Gauss2DsModel(), mappel::PointEmitterModel::get_hyperparam_index(), mappel::PointEmitterModel::get_hyperparam_names(), mappel::PointEmitterModel::get_hyperparam_value(), mappel::PointEmitterModel::get_hyperparams(), mappel::Gauss1DsModel::get_max_sigma(), mappel::Gauss1DsModel::get_min_sigma(), mappel::PointEmitterModel::get_param_names(), mappel::PointEmitterModel::get_prior(), mappel::PointEmitterModel::get_stats(), mappel::PointEmitterModel::has_hyperparam(), mappel::PointEmitterModel::operator=(), mappel::PointEmitterModel::PointEmitterModel(), mappel::PointEmitterModel::rename_hyperparam(), mappel::PointEmitterModel::sample_prior(), mappel::PointEmitterModel::set_bounds(), mappel::PointEmitterModel::set_hyperparam_names(), mappel::PointEmitterModel::set_hyperparam_value(), mappel::PointEmitterModel::set_hyperparams(), mappel::PointEmitterModel::set_lbound(), mappel::Gauss1DsModel::set_max_sigma(), mappel::Gauss1DsModel::set_min_sigma(), mappel::PointEmitterModel::set_param_names(), mappel::PointEmitterModel::set_prior(), and mappel::PointEmitterModel::set_ubound().

9.29.5.23 double mappel::MCMCAdaptorBase::sigma_scale [protected],[inherited]

A scaling factor for step sizes as a fraction of the size of the domain dimension we are walking in. (0.05 default)

Definition at line 30 of file MCMCAdaptorBase.h.

Referenced by mappel::MCMCAdaptorBase::get_mcmc_sigma_scale(), mappel::MCMCAdaptorBase::get_stats(), mappel::MCMCAdaptor1D::MCMCAdaptor1D(), mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds(), MCMCAdaptor2D::D(), mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds(), mappel::MCMCAdaptor1D::set_background_mcmc_sampling(), mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling(), and mappel::MCMCAdaptorBase::set_mcmc_sigma_scale().

9.29.5.24 ParamT mappel::PointEmitterModel::ubound [protected],[inherited]

Definition at line 148 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::bound_theta(), mappel::PointEmitterModel::bounded_theta(), mappel::PointEmitterModel::get_stats(), mappel::PointEmitterModel::get_ubound(), mappel::Gauss1DsModel::initial_theta_estimate(), mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::PointEmitterModel::operator=(), mappel::PointEmitterModel::reflected_theta(), mappel::PointEmitterModel::set_bounds(), mappel::PointEmitterModel::set_lbound(), mappel::PointEmitterModel::set_prior(), mappel::PointEmitterModel::set_ubound(), and mappel::PointEmitterModel::theta_in_bounds().


The documentation for this class was generated from the following files:

- [MCMCAdaptor2D.h](#)
- [MCMCAdaptor2D.cpp](#)

9.30 mappel::MCMCAdaptor2Ds Class Reference

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/MCMCAdaptor2Ds.h>
```

Inheritance diagram for mappel::MCMCAdaptor2Ds:

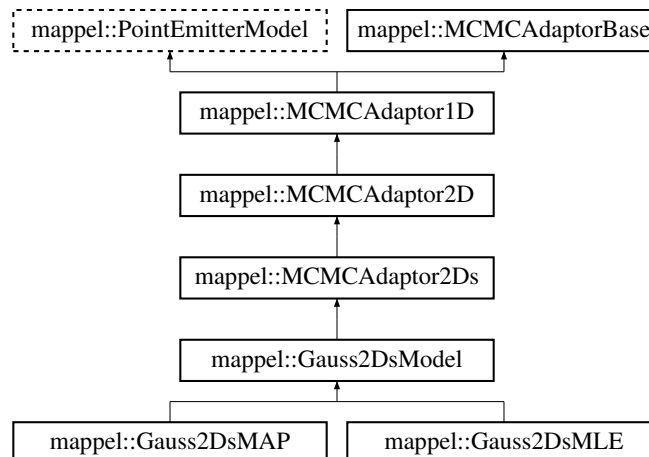

Public Types

- using [ParamT](#) = arma::vec
- using [ParamVecT](#) = arma::mat

Public Member Functions

- void [sample_mcmc_candidate](#) ([IdxT](#) sample_index, [ParamT](#) &candidate, double step_scale=1.0) const
- void [sample_mcmc_candidate](#) ([IdxT](#) sample_index, [ParamT](#) &candidate, const [IdxVecT](#) &fixed_parameters_↵ mask, double step_scale=1.0) const
- void [set_intensity_mcmc_sampling](#) (double eta_l=-1)
- void [set_background_mcmc_sampling](#) (double eta_bg=-1)
- [IdxT](#) [get_num_params](#) () const
- void [check_param_shape](#) (const [ParamT](#) &theta) const
- void [check_param_shape](#) (const [ParamVecT](#) &theta) const
- void [check_psf_sigma](#) (double psf_sigma) const
- void [check_psf_sigma](#) (const [VecT](#) &psf_sigma) const
- [ParamT](#) [make_param](#) () const
- template<class FillT >
 [ParamT](#) [make_param](#) (FillT fill) const
- [ParamVecT](#) [make_param_stack](#) ([IdxT](#) n) const
- template<class FillT >
 [ParamVecT](#) [make_param_stack](#) ([IdxT](#) n, FillT fill) const
- [MatT](#) [make_param_mat](#) () const
- template<class FillT >
 [MatT](#) [make_param_mat](#) (FillT fill) const
- [CubeT](#) [make_param_mat_stack](#) ([IdxT](#) n) const
- template<class FillT >
 [CubeT](#) [make_param_mat_stack](#) ([IdxT](#) n, FillT fill) const
- CompositeDist & [get_prior](#) ()
- const CompositeDist & [get_prior](#) () const
- void [set_prior](#) (CompositeDist &&prior_)
- void [set_prior](#) (const CompositeDist &prior_)
- [IdxT](#) [get_num_hyperparams](#) () const
- void [set_hyperparams](#) (const [VecT](#) &hyperparams)
- [VecT](#) [get_hyperparams](#) () const
- bool [has_hyperparam](#) (const std::string &name) const
- double [get_hyperparam_value](#) (const std::string &name) const
- int [get_hyperparam_index](#) (const std::string &name) const
- void [set_hyperparam_value](#) (const std::string &name, double value)
- void [rename_hyperparam](#) (const std::string &old_name, const std::string &new_name)
- [StringVecT](#) [get_param_names](#) () const
- void [set_param_names](#) (const [StringVecT](#) &desc)
- [StringVecT](#) [get_hyperparam_names](#) () const
- void [set_hyperparam_names](#) (const [StringVecT](#) &desc)
- template<class RngT >
 [ParamT](#) [sample_prior](#) (RngT &rng) const
- [ParamT](#) [sample_prior](#) () const
- void [set_bounds](#) (const [ParamT](#) &lbound, const [ParamT](#) &ubound)
- void [set_lbound](#) (const [ParamT](#) &lbound)

- void `set_ubound` (const `ParamT` &`ubound`)
- const `ParamT` & `get_lbound` () const
- const `ParamT` & `get_ubound` () const
- bool `theta_in_bounds` (const `ParamT` &`theta`) const
- void `bound_theta` (`ParamT` &`theta`, double `epsilon=bounds_epsilon`) const
- `ParamT` `bounded_theta` (const `ParamT` &`theta`, double `epsilon=bounds_epsilon`) const
- `ParamT` `reflected_theta` (const `ParamT` &`theta`) const
- `BoolVecT` `theta_stack_in_bounds` (const `ParamVecT` &`theta`) const
- `ParamVecT` `bounded_theta_stack` (const `ParamVecT` &`theta`, double `epsilon=bounds_epsilon`) const
- `ParamVecT` `reflected_theta_stack` (const `ParamVecT` &`theta`) const
- void `set_mcmc_sigma_scale` (double `scale`)
- double `get_mcmc_sigma_scale` () const
- `IdxT` `get_mcmc_num_phases` () const

Static Public Member Functions

- static `prior_hessian::TruncatedNormalDist` `make_prior_component_position_normal` (`IdxT` `size`, double `pos_↵` `sigma=default_sigma_pos`)
- static `prior_hessian::ScaledSymmetricBetaDist` `make_prior_component_position_beta` (`IdxT` `size`, double `pos_↵` `beta=default_beta_pos`)
- static `prior_hessian::TruncatedGammaDist` `make_prior_component_intensity` (double `mean=default_mean_↵` `l`, double `kappa=default_intensity_kappa`)
- static `prior_hessian::TruncatedParetoDist` `make_prior_component_sigma` (double `min_sigma`, double `max_↵` `sigma`, double `alpha=default_alpha_sigma`)
- static void `set_rng_seed` (`RngSeedT` `seed`)
- static `ParallelRngManagerT` & `get_rng_manager` ()
- static `ParallelRngGeneratorT` & `get_rng_generator` ()

Static Public Attributes

- static const std::string `DefaultSeperableInitEstimator` = "TrustRegion"
- static const double `bounds_epsilon` = 1.0E-6
- static const double `global_min_psf_sigma` = 1E-1
- static const double `global_max_psf_sigma` = 1E2
- static const double `default_beta_pos` = 3
- static const double `default_sigma_pos` = 1
- static const double `default_mean_l` = 300
- static const double `default_max_l` = INFINITY
- static const double `default_intensity_kappa` = 2
- static const double `default_pixel_mean_bg` = 4
- static const double `default_alpha_sigma` = 2
- static const double `global_default_mcmc_sigma_scale` = 0.05
- static const double `global_max_mcmc_sigma_scale` = 0.5

Protected Member Functions

- [MCMCAdaptor2Ds \(\)](#)
- [MCMCAdaptor2Ds \(double \[sigma_scale\]\(#\)\)](#)
- [MCMCAdaptor2Ds \(const \[MCMCAdaptor2Ds\]\(#\) &o\)](#)
- [MCMCAdaptor2Ds \(\[MCMCAdaptor2Ds\]\(#\) &&o\)](#)
- [MCMCAdaptor2Ds & operator= \(const \[MCMCAdaptor2Ds\]\(#\) &o\)](#)
- [MCMCAdaptor2Ds & operator= \(\[MCMCAdaptor2Ds\]\(#\) &&o\)](#)
- [StatsT \[get_stats\]\(#\) \(\) const](#)
- [void \[set_mcmc_num_phases\]\(#\) \(\[IdxT\]\(#\) \[num_phases\]\(#\)\)](#)

Protected Attributes

- double [eta_sigma](#) =0
- double [eta_y](#) =0
- double [eta_x](#) =0
- double [eta_l](#) =0
- double [eta_bg](#) =0
- CompositeDist [prior](#)
- [IdxT](#) [num_params](#)
- [IdxT](#) [num_hyperparams](#)
- [ParamT](#) [lbound](#)
- [ParamT](#) [ubound](#)
- [IdxT](#) [num_phases](#)
- double [sigma_scale](#)

9.30.1 Detailed Description

Definition at line 14 of file [MCMCAdaptor2Ds.h](#).

9.30.2 Member Typedef Documentation

9.30.2.1 `using mappel::PointEmitterModel::ParamT = arma::vec` [\[inherited\]](#)

Parameter vector

Definition at line 47 of file [PointEmitterModel.h](#).

9.30.2.2 `using mappel::PointEmitterModel::ParamVecT = arma::mat` [\[inherited\]](#)

Vector of parameter vectors

Definition at line 48 of file [PointEmitterModel.h](#).

9.30.3 Constructor & Destructor Documentation

9.30.3.1 mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds () [protected]

Definition at line 11 of file MCMCAdaptor2Ds.cpp.

References mappel::MCMCAdaptorBase::global_default_mcmc_sigma_scale.

9.30.3.2 mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds (double *sigma_scale*) [explicit],[protected]

Definition at line 14 of file MCMCAdaptor2Ds.cpp.

References eta_sigma, mappel::MCMCAdaptorBase::set_mcmc_num_phases(), and mappel::MCMCAdaptorBase::sigma_scale.

9.30.3.3 mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds (const MCMCAdaptor2Ds & o) [protected]

Definition at line 22 of file MCMCAdaptor2Ds.cpp.

References eta_sigma.

9.30.3.4 mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds (MCMCAdaptor2Ds && o) [protected]

Definition at line 27 of file MCMCAdaptor2Ds.cpp.

References eta_sigma.

9.30.4 Member Function Documentation

9.30.4.1 void mappel::PointEmitterModel::bound_theta (ParamT & *theta*, double *epsilon* = bounds_epsilon) const [inherited]

Definition at line 248 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::check_param_shape(), mappel::PointEmitterModel::lbound, mappel::PointEmitterModel::num_params, and mappel::PointEmitterModel::ubound.

9.30.4.2 PointEmitterModel::ParamT mappel::PointEmitterModel::bounded_theta (const ParamT & *theta*, double *epsilon* = bounds_epsilon) const [inherited]

Definition at line 265 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::check_param_shape(), mappel::PointEmitterModel::lbound, mappel::PointEmitterModel::num_params, and mappel::PointEmitterModel::ubound.

Referenced by mappel::PointEmitterModel::bounded_theta_stack().

9.30.4.3 `PointEmitterModel::ParamVecT mappel::PointEmitterModel::bounded_theta_stack (const ParamVecT & theta, double epsilon = bounds_epsilon) const` [inherited]

Definition at line 306 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::bounded_theta()`, `mappel::PointEmitterModel::check_param_shape()`, and `mappel::PointEmitterModel::make_param_stack()`.

9.30.4.4 `void mappel::PointEmitterModel::check_param_shape (const ParamT & theta) const` [inherited]

Definition at line 167 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::num_params`.

Referenced by `mappel::PointEmitterModel::bound_theta()`, `mappel::PointEmitterModel::bounded_theta()`, `mappel::PointEmitterModel::bounded_theta_stack()`, `mappel::PointEmitterModel::reflected_theta()`, `mappel::PointEmitterModel::reflected_theta_stack()`, `mappel::PointEmitterModel::theta_in_bounds()`, and `mappel::PointEmitterModel::theta_stack_in_bounds()`.

9.30.4.5 `void mappel::PointEmitterModel::check_param_shape (const ParamVecT & theta) const` [inherited]

Definition at line 176 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::num_params`.

9.30.4.6 `void mappel::PointEmitterModel::check_psf_sigma (double psf_sigma) const` [inherited]

Definition at line 185 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::global_max_psf_sigma`, and `mappel::PointEmitterModel::global_min_psf_sigma`.

Referenced by `mappel::Gauss1DModel::Gauss1DModel()`, `mappel::Gauss2DModel::Gauss2DModel()`, `mappel::Gauss2DsModel::Gauss2DsModel()`, `mappel::Gauss1DsModel::set_max_sigma()`, `mappel::Gauss2DsModel::set_max_sigma()`, `mappel::Gauss1DsModel::set_min_sigma()`, `mappel::Gauss2DsModel::set_min_sigma()`, `mappel::Gauss1DModel::set_psf_sigma()`, and `mappel::Gauss2DModel::set_psf_sigma()`.

9.30.4.7 `void mappel::PointEmitterModel::check_psf_sigma (const VecT & psf_sigma) const` [inherited]

Definition at line 197 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::global_max_psf_sigma`, and `mappel::PointEmitterModel::global_min_psf_sigma`.

9.30.4.8 `int mappel::PointEmitterModel::get_hyperparam_index (const std::string & name) const` [inline], [inherited]

Definition at line 236 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.30.4.9 **StringVecT** mappel::PointEmitterModel::get_hyperparam_names () const [inline],[inherited]

Definition at line 256 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.30.4.10 **double** mappel::PointEmitterModel::get_hyperparam_value (const std::string & name) const [inline],[inherited]

Definition at line 232 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

Referenced by mappel::MCMCAdaptor1D::set_background_mcmc_sampling(), and mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling().

9.30.4.11 **PointEmitterModel::ParamT** mappel::PointEmitterModel::get_hyperparams () const [inline],[inherited]

Definition at line 224 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.30.4.12 **const PointEmitterModel::ParamT &** mappel::PointEmitterModel::get_lbound () const [inline],[inherited]

Definition at line 212 of file PointEmitterModel.h.

References mappel::PointEmitterModel::lbound.

Referenced by mappel::MCMCAdaptor1D::MCMCAdaptor1D(), mappel::MCMCAdaptor2D::MCMCAdaptor2D(), and mappel::MCMCAdaptor1D::set_background_mcmc_sampling().

9.30.4.13 **IdxT** mappel::MCMCAdaptorBase::get_mcmc_num_phases () const [inherited]

Definition at line 56 of file MCMCAdaptorBase.cpp.

References mappel::MCMCAdaptorBase::num_phases.

9.30.4.14 **double** mappel::MCMCAdaptorBase::get_mcmc_sigma_scale () const [inherited]

Definition at line 53 of file MCMCAdaptorBase.cpp.

References mappel::MCMCAdaptorBase::sigma_scale.

9.30.4.15 **IdxT** mappel::PointEmitterModel::get_num_hyperparams () const [inline],[inherited]

Definition at line 208 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_hyperparams.

9.30.4.16 `IdxT mappel::PointEmitterModel::get_num_params () const [inline],[inherited]`

Definition at line 160 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.30.4.17 `StringVecT mappel::PointEmitterModel::get_param_names () const [inline],[inherited]`

Definition at line 248 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.30.4.18 `CompositeDist & mappel::PointEmitterModel::get_prior () [inline],[inherited]`

Definition at line 200 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

Referenced by mappel::Gauss2DModel::update_internal_1Dsum_estimators(), and mappel::Gauss2DsModel::update_internal_1Dsum_estimators().

9.30.4.19 `const CompositeDist & mappel::PointEmitterModel::get_prior () const [inline],[inherited]`

Definition at line 204 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.30.4.20 `ParallelRngGeneratorT & mappel::PointEmitterModel::get_rng_generator () [static],[inherited]`

Definition at line 120 of file PointEmitterModel.cpp.

References mappel::rng_manager.

9.30.4.21 `ParallelRngManagerT & mappel::PointEmitterModel::get_rng_manager () [static],[inherited]`

Definition at line 115 of file PointEmitterModel.cpp.

References mappel::rng_manager.

9.30.4.22 `StatsT mappel::MCMCAdaptor2Ds::get_stats () const [protected]`

Definition at line 48 of file MCMCAdaptor2Ds.cpp.

References eta_sigma, and mappel::MCMCAdaptor2D::get_stats().

Referenced by mappel::Gauss2DsModel::get_stats().

9.30.4.23 `const PointEmitterModel::ParamT & mappel::PointEmitterModel::get_ubound () const` `[inline]`,
`[inherited]`

Definition at line 216 of file PointEmitterModel.h.

References mappel::PointEmitterModel::ubound.

Referenced by mappel::Gauss2DsxyModel::get_max_sigma_ratio(), mappel::Gauss2DsModel::get_max_sigma_ratio(), mappel::MCMCAdaptor1D::MCMCAdaptor1D(), mappel::MCMCAdaptor2D::MCMCAdaptor2D(), mappel::MCMCAdaptor1D::set_background_mcmc_sampling(), and mappel::Gauss2DsModel::set_max_sigma_ratio().

9.30.4.24 `bool mappel::PointEmitterModel::has_hyperparam (const std::string & name) const` `[inline]`,`[inherited]`

Definition at line 228 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.30.4.25 `PointEmitterModel::ParamT mappel::PointEmitterModel::make_param () const` `[inline]`,`[inherited]`

Definition at line 164 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

Referenced by mappel::Gauss1DModel::initial_theta_estimate(), mappel::Gauss1DsModel::initial_theta_estimate(), mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsxyModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::Gauss1DModel::pixel_hess_update(), mappel::Gauss1DsModel::pixel_hess_update(), mappel::Gauss2DModel::pixel_hess_update(), and mappel::Gauss2DsModel::pixel_hess_update().

9.30.4.26 `template<class FillT > PointEmitterModel::ParamT mappel::PointEmitterModel::make_param (FillT fill) const`
`[inherited]`

Definition at line 181 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.30.4.27 `MatT mappel::PointEmitterModel::make_param_mat () const` `[inline]`,`[inherited]`

Definition at line 172 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.30.4.28 `template<class FillT > MatT mappel::PointEmitterModel::make_param_mat (FillT fill) const` `[inherited]`

Definition at line 191 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.30.4.29 **CubeT** mappel::PointEmitterModel::make_param_mat_stack (IdxT *n*) const [inline],[inherited]

Definition at line 176 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.30.4.30 **template<class FillT > CubeT** mappel::PointEmitterModel::make_param_mat_stack (IdxT *n*, FillT *fill*) const [inherited]

Definition at line 196 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.30.4.31 **PointEmitterModel::ParamVecT** mappel::PointEmitterModel::make_param_stack (IdxT *n*) const [inline],[inherited]

Definition at line 168 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

Referenced by mappel::PointEmitterModel::bounded_theta_stack(), and mappel::PointEmitterModel::reflected_theta_stack().

9.30.4.32 **template<class FillT > PointEmitterModel::ParamVecT** mappel::PointEmitterModel::make_param_stack (IdxT *n*, FillT *fill*) const [inherited]

Definition at line 186 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.30.4.33 **prior_hessian::TruncatedGammaDist** mappel::PointEmitterModel::make_prior_component_intensity (double *mean* = default_mean_l, double *kappa* = default_intensity_kappa) [static],[inherited]

Definition at line 98 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::default_max_l.

Referenced by mappel::Gauss1DsModel::make_default_prior_beta_position(), mappel::Gauss2DModel::make_default_prior_beta_position(), mappel::Gauss1DModel::make_default_prior_beta_position(), mappel::Gauss2DsModel::make_default_prior_beta_position(), mappel::Gauss2DModel::make_default_prior_normal_position(), mappel::Gauss1DsModel::make_default_prior_normal_position(), mappel::Gauss1DModel::make_default_prior_normal_position(), mappel::Gauss2DsModel::make_default_prior_normal_position(), mappel::Gauss2DModel::make_prior_beta_position(), mappel::Gauss1DsModel::make_prior_beta_position(), mappel::Gauss1DModel::make_prior_beta_position(), mappel::Gauss2DsModel::make_prior_beta_position(), mappel::Gauss2DModel::make_prior_normal_position(), mappel::Gauss1DsModel::make_prior_normal_position(), mappel::Gauss1DModel::make_prior_normal_position(), and mappel::Gauss2DsModel::make_prior_normal_position().

9.30.4.34 **prior_hessian::ScaledSymmetricBetaDist** mappel::PointEmitterModel::make_prior_component_position_beta (*IdxT size*, *double pos_beta = default_beta_pos*) [static],[inherited]

Definition at line 92 of file PointEmitterModel.cpp.

Referenced by mappel::Gauss1DsModel::make_default_prior_beta_position(), mappel::Gauss2DModel::make_default_prior_beta_position(), mappel::Gauss1DModel::make_default_prior_beta_position(), mappel::Gauss2DsModel::make_default_prior_beta_position(), mappel::Gauss1DsModel::make_prior_beta_position(), mappel::Gauss2DModel::make_prior_beta_position(), mappel::Gauss1DModel::make_prior_beta_position(), and mappel::Gauss2DsModel::make_prior_beta_position().

9.30.4.35 **prior_hessian::TruncatedNormalDist** mappel::PointEmitterModel::make_prior_component_position_normal (*IdxT size*, *double pos_sigma = default_sigma_pos*) [static],[inherited]

Definition at line 85 of file PointEmitterModel.cpp.

Referenced by mappel::Gauss1DsModel::make_default_prior_normal_position(), mappel::Gauss2DModel::make_default_prior_normal_position(), mappel::Gauss1DModel::make_default_prior_normal_position(), mappel::Gauss2DsModel::make_default_prior_normal_position(), mappel::Gauss1DsModel::make_prior_normal_position(), mappel::Gauss1DModel::make_prior_normal_position(), and mappel::Gauss2DsModel::make_prior_normal_position().

9.30.4.36 **prior_hessian::TruncatedParetoDist** mappel::PointEmitterModel::make_prior_component_sigma (*double min_sigma*, *double max_sigma*, *double alpha = default_alpha_sigma*) [static],[inherited]

Definition at line 104 of file PointEmitterModel.cpp.

Referenced by mappel::Gauss1DsModel::make_default_prior_beta_position(), mappel::Gauss2DsModel::make_default_prior_beta_position(), mappel::Gauss1DsModel::make_default_prior_normal_position(), mappel::Gauss2DsModel::make_default_prior_normal_position(), mappel::Gauss1DsModel::make_prior_beta_position(), mappel::Gauss2DsModel::make_prior_beta_position(), mappel::Gauss1DsModel::make_prior_normal_position(), and mappel::Gauss2DsModel::make_prior_normal_position().

9.30.4.37 **MCMCAdaptor2Ds & mappel::MCMCAdaptor2Ds::operator=** (*const MCMCAdaptor2Ds & o*) [protected]

Definition at line 32 of file MCMCAdaptor2Ds.cpp.

References eta_sigma, and mappel::MCMCAdaptor2D::operator=().

Referenced by mappel::Gauss2DsModel::operator=().

9.30.4.38 **MCMCAdaptor2Ds & mappel::MCMCAdaptor2Ds::operator=** (*MCMCAdaptor2Ds && o*) [protected]

Definition at line 40 of file MCMCAdaptor2Ds.cpp.

References eta_sigma, and mappel::MCMCAdaptor2D::operator=().

9.30.4.39 `PointEmitterModel::ParamT mappel::PointEmitterModel::reflected_theta (const ParamT & theta) const`
`[inherited]`

Definition at line 276 of file `PointEmitterModel.cpp`.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::PointEmitterModel::reflected_theta_stack()`.

9.30.4.40 `PointEmitterModel::ParamVecT mappel::PointEmitterModel::reflected_theta_stack (const ParamVecT & theta) const`
`[inherited]`

Definition at line 316 of file `PointEmitterModel.cpp`.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::make_param_stack()`, and `mappel::PointEmitterModel::reflected_theta()`.

9.30.4.41 `void mappel::PointEmitterModel::rename_hyperparam (const std::string & old_name, const std::string & new_name)`
`[inline], [inherited]`

Definition at line 244 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

9.30.4.42 `void mappel::MCMCAdaptor2Ds::sample_mcmc_candidate (IdxT sample_index, ParamT & candidate, double step_scale = 1.0) const`

Definition at line 56 of file `MCMCAdaptor2Ds.cpp`.

References `mappel::MCMCAdaptor1D::eta_bg`, `mappel::MCMCAdaptor1D::eta_l`, `eta_sigma`, `mappel::MCMCAdaptor1D::eta_x`, `mappel::MCMCAdaptor2D::eta_y`, `mappel::MCMCAdaptorBase::num_phases`, and `mappel::rng_manager`.

9.30.4.43 `void mappel::MCMCAdaptor2Ds::sample_mcmc_candidate (IdxT sample_index, ParamT & candidate, const IdxVecT & fixed_parameters_mask, double step_scale = 1.0) const`

Definition at line 75 of file `MCMCAdaptor2Ds.cpp`.

References `mappel::MCMCAdaptor1D::eta_bg`, `mappel::MCMCAdaptor1D::eta_l`, `eta_sigma`, `mappel::MCMCAdaptor1D::eta_x`, `mappel::MCMCAdaptor2D::eta_y`, `mappel::MCMCAdaptorBase::num_phases`, and `mappel::rng_manager`.

9.30.4.44 `template<class RngT> PointEmitterModel::ParamT mappel::PointEmitterModel::sample_prior (RngT & rng) const`
`[inherited]`

Definition at line 264 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

9.30.4.45 **PointEmitterModel::ParamT** mappel::PointEmitterModel::sample_prior () const [inline],[inherited]

Definition at line 268 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior, and mappel::rng_manager.

9.30.4.46 **void** mappel::MCMCAdaptor1D::set_background_mcmc_sampling (double *eta_bg* = -1) [inherited]

Definition at line 81 of file MCMCAdaptor1D.cpp.

References mappel::PointEmitterModel::default_pixel_mean_bg, mappel::MCMCAdaptor1D::eta_bg, mappel::PointEmitterModel::get_hyperparam_value(), mappel::PointEmitterModel::get_lbound(), mappel::PointEmitterModel::get_ubound(), and mappel::MCMCAdaptorBase::sigma_scale.

Referenced by mappel::MCMCAdaptor1D::MCMCAdaptor1D().

9.30.4.47 **void** mappel::PointEmitterModel::set_bounds (const ParamT & *lbound_*, const ParamT & *ubound_*) [inherited]

Box-type parameter bounds

Modifies the prior bounds to prevent sampling outside the valid box-constraints.

Definition at line 213 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::bounds_epsilon, mappel::PointEmitterModel::lbound, mappel::PointEmitterModel::num_params, mappel::PointEmitterModel::prior, and mappel::PointEmitterModel::ubound.

9.30.4.48 **void** mappel::PointEmitterModel::set_hyperparam_names (const StringVecT & *desc*) [inline],[inherited]

Definition at line 260 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.30.4.49 **void** mappel::PointEmitterModel::set_hyperparam_value (const std::string & *name*, double *value*) [inline],[inherited]

Definition at line 240 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.30.4.50 **void** mappel::PointEmitterModel::set_hyperparams (const VecT & *hyperparams*) [inline],[inherited]

Definition at line 220 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

Referenced by mappel::Gauss2DModel::set_hyperparams(), and mappel::Gauss2DsModel::set_hyperparams().

9.30.4.51 `void mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling (double eta_l = -1)` [inherited]

Definition at line 65 of file MCMCAdaptor1D.cpp.

References `mappel::PointEmitterModel::default_mean_l`, `mappel::MCMCAdaptor1D::eta_l`, `mappel::PointEmitterModel::get_hyperparam_value()`, and `mappel::MCMCAdaptorBase::sigma_scale`.

Referenced by `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`.

9.30.4.52 `void mappel::PointEmitterModel::set_lbound (const ParamT & lbound)` [inherited]

Definition at line 226 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::bounds_epsilon`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::Gauss1DsModel::set_min_sigma()`.

9.30.4.53 `void mappel::MCMCAdaptorBase::set_mcmc_num_phases (IdxT num_phases)` [protected],[inherited]

Definition at line 59 of file MCMCAdaptorBase.cpp.

References `mappel::MCMCAdaptorBase::num_phases`.

Referenced by `mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds()`, and `MCMCAdaptor2Ds()`.

9.30.4.54 `void mappel::MCMCAdaptorBase::set_mcmc_sigma_scale (double scale)` [inherited]

Definition at line 39 of file MCMCAdaptorBase.cpp.

References `mappel::MCMCAdaptorBase::global_max_mcmc_sigma_scale`, and `mappel::MCMCAdaptorBase::sigma_scale`.

9.30.4.55 `void mappel::PointEmitterModel::set_param_names (const StringVecT & desc)` [inline],[inherited]

Definition at line 252 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.30.4.56 `void mappel::PointEmitterModel::set_prior (CompositeDist && prior_)` [inherited]

Definition at line 158 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_hyperparams`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::Gauss2DModel::set_prior()`, and `mappel::Gauss2DsModel::set_prior()`.

9.30.4.57 `void mappel::PointEmitterModel::set_prior (const CompositeDist & prior_) [inherited]`

Definition at line 149 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_hyperparams`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

9.30.4.58 `void mappel::PointEmitterModel::set_rng_seed (RngSeedT seed) [static],[inherited]`

Definition at line 110 of file PointEmitterModel.cpp.

References `mappel::rng_manager`.

9.30.4.59 `void mappel::PointEmitterModel::set_ubound (const ParamT & ubound) [inherited]`

Definition at line 237 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::bounds_epsilon`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::Gauss1DsModel::set_max_sigma()`, and `mappel::Gauss2DsModel::set_max_sigma_ratio()`.

9.30.4.60 `bool mappel::PointEmitterModel::theta_in_bounds (const ParamT & theta) const [inherited]`

Definition at line 257 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsModel::initial_theta_estimate()`, `mappel::Gauss1DModel::make_stencil()`, `mappel::Gauss1DsModel::make_stencil()`, `mappel::Gauss2DModel::make_stencil()`, `mappel::Gauss2DsxyModel::make_stencil()`, `mappel::Gauss2DsModel::make_stencil()`, and `mappel::PointEmitterModel::theta_stack_in_bounds()`.

9.30.4.61 `BoolVecT mappel::PointEmitterModel::theta_stack_in_bounds (const ParamVecT & theta) const [inherited]`

Definition at line 296 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, and `mappel::PointEmitterModel::theta_in_bounds()`.

9.30.5 Member Data Documentation

9.30.5.1 `const double mappel::PointEmitterModel::bounds_epsilon = 1.0E-6 [static],[inherited]`

Distance from the boundary to constrain in `bound_theta` and `bounded_theta` methods

Definition at line 52 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::Gauss2DsModel::set_max_sigma_ratio()`, and `mappel::PointEmitterModel::set_ubound()`.

9.30.5.2 `const double mappel::PointEmitterModel::default_alpha_sigma = 2` [static],[inherited]

Default per-pixel background gamma distribution shape

Definition at line 62 of file PointEmitterModel.h.

9.30.5.3 `const double mappel::PointEmitterModel::default_beta_pos = 3` [static],[inherited]

Default position parameter in symmetric beta-distributions

Definition at line 56 of file PointEmitterModel.h.

9.30.5.4 `const double mappel::PointEmitterModel::default_intensity_kappa = 2` [static],[inherited]

Default shape for intensity gamma distributions

Definition at line 60 of file PointEmitterModel.h.

9.30.5.5 `const double mappel::PointEmitterModel::default_max_I = INFINITY` [static],[inherited]

Default maximum emitter intensity

Definition at line 59 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::make_prior_component_intensity()`.

9.30.5.6 `const double mappel::PointEmitterModel::default_mean_I = 300` [static],[inherited]

Default emitter intensity mean

Definition at line 58 of file PointEmitterModel.h.

Referenced by `mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling()`.

9.30.5.7 `const double mappel::PointEmitterModel::default_pixel_mean_bg = 4` [static],[inherited]

Default per-pixel mean background counts

Definition at line 61 of file PointEmitterModel.h.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_beta_position()`, `mappel::Gauss1DModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_default_prior_normal_position()`, `mappel::Gauss1DModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, and `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`.

9.30.5.8 `const double mappel::PointEmitterModel::default_sigma_pos = 1` `[static], [inherited]`

Default position parameter in symmetric beta-distributions

Definition at line 57 of file PointEmitterModel.h.

9.30.5.9 `const std::string mappel::PointEmitterModel::DefaultSeperableInitEstimator = "TrustRegion"` `[static], [inherited]`

Estimator name to use in 1D separable initializations

Definition at line 49 of file PointEmitterModel.h.

Referenced by `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsxyModel::initial_theta_estimate()`, and `mappel::Gauss2DsModel::initial_theta_estimate()`.

9.30.5.10 `double mappel::MCMCAdaptor1D::eta_bg = 0` `[protected], [inherited]`

The standard deviation for the normally distributed perturbation to `theta_bg` in the random walk MCMC sampling

Definition at line 33 of file MCMCAdaptor1D.h.

Referenced by `mappel::MCMCAdaptor1D::get_stats()`, `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor1D::operator=()`, `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`, `sample_mcmc_candidate()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`, and `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`.

9.30.5.11 `double mappel::MCMCAdaptor1D::eta_l = 0` `[protected], [inherited]`

The standard deviation for the normally distributed perturbation to `theta_l` in the random walk MCMC sampling

Definition at line 32 of file MCMCAdaptor1D.h.

Referenced by `mappel::MCMCAdaptor1D::get_stats()`, `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor1D::operator=()`, `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`, `sample_mcmc_candidate()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`, and `mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling()`.

9.30.5.12 `double mappel::MCMCAdaptor2Ds::eta_sigma = 0` `[protected]`

The standard deviation for the normally distributed perturbation to `theta_bg` in the random walk MCMC sampling

Definition at line 27 of file MCMCAdaptor2Ds.h.

Referenced by `get_stats()`, `MCMCAdaptor2Ds()`, `operator=()`, and `sample_mcmc_candidate()`.

9.30.5.13 `double mappel::MCMCAdaptor1D::eta_x=0` `[protected],[inherited]`

The standard deviation for the normally distributed perturbation to `theta_x` in the random walk MCMC sampling

Definition at line 31 of file `MCMCAdaptor1D.h`.

Referenced by `mappel::MCMCAdaptor1D::get_stats()`, `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor1D::operator=()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`, `sample_mcmc_candidate()`, and `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`.

9.30.5.14 `double mappel::MCMCAdaptor2D::eta_y=0` `[protected],[inherited]`

The standard deviation for the normally distributed perturbation to `theta_y` in the random walk MCMC sampling

Definition at line 28 of file `MCMCAdaptor2D.h`.

Referenced by `mappel::MCMCAdaptor2D::get_stats()`, `mappel::MCMCAdaptor2D::MCMCAdaptor2D()`, `mappel::MCMCAdaptor2D::operator=()`, `sample_mcmc_candidate()`, and `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`.

9.30.5.15 `const double mappel::MCMCAdaptorBase::global_default_mcmc_sigma_scale = 0.05` `[static],[inherited]`

Definition at line 16 of file `MCMCAdaptorBase.h`.

Referenced by `mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds()`, `mappel::MCMCAdaptor2D::MCMCAdaptor2D()`, and `MCMCAdaptor2Ds()`.

9.30.5.16 `const double mappel::MCMCAdaptorBase::global_max_mcmc_sigma_scale = 0.5` `[static],[inherited]`

Definition at line 17 of file `MCMCAdaptorBase.h`.

Referenced by `mappel::MCMCAdaptorBase::MCMCAdaptorBase()`, and `mappel::MCMCAdaptorBase::set_mcmc_sigma_scale()`.

9.30.5.17 `const double mappel::PointEmitterModel::global_max_psf_sigma = 1E2` `[static],[inherited]`

Global maximum for any `psf_sigma`. Sizes above this value are invalid, and nowhere near useful for practical point emitter localization

Definition at line 54 of file `PointEmitterModel.h`.

Referenced by `mappel::PointEmitterModel::check_psf_sigma()`.

9.30.5.18 `const double mappel::PointEmitterModel::global_min_psf_sigma = 1E-1` `[static],[inherited]`

Global minimum for any `psf_sigma`. Sizes below this value are invalid, and nowhere near useful for practical point emitter localization

Definition at line 53 of file `PointEmitterModel.h`.

Referenced by `mappel::PointEmitterModel::check_psf_sigma()`.

9.30.5.19 ParamT mappel::PointEmitterModel::lbound [protected],[inherited]

Definition at line 148 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::bound_theta(), mappel::PointEmitterModel::bounded_theta(), mappel::PointEmitterModel::get_lbound(), mappel::PointEmitterModel::get_stats(), mappel::Gauss1DsModel::initial_theta_estimate(), mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::PointEmitterModel::operator=(), mappel::PointEmitterModel::reflected_theta(), mappel::PointEmitterModel::set_bounds(), mappel::PointEmitterModel::set_lbound(), mappel::PointEmitterModel::set_prior(), mappel::PointEmitterModel::set_ubound(), and mappel::PointEmitterModel::theta_in_bounds().

9.30.5.20 IdxT mappel::PointEmitterModel::num_hyperparams [protected],[inherited]

Definition at line 147 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::get_num_hyperparams(), mappel::PointEmitterModel::get_stats(), mappel::PointEmitterModel::operator=(), and mappel::PointEmitterModel::set_prior().

9.30.5.21 IdxT mappel::PointEmitterModel::num_params [protected],[inherited]

Definition at line 146 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::bound_theta(), mappel::PointEmitterModel::bounded_theta(), mappel::PointEmitterModel::check_param_shape(), mappel::PointEmitterModel::get_num_params(), mappel::PointEmitterModel::get_stats(), mappel::Gauss1DModel::initial_theta_estimate(), mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::PointEmitterModel::make_param(), mappel::PointEmitterModel::make_param_mat(), mappel::PointEmitterModel::make_param_mat_stack(), mappel::PointEmitterModel::make_param_stack(), mappel::PointEmitterModel::operator=(), mappel::PointEmitterModel::reflected_theta(), mappel::PointEmitterModel::set_bounds(), mappel::PointEmitterModel::set_lbound(), mappel::PointEmitterModel::set_prior(), mappel::PointEmitterModel::set_ubound(), and mappel::PointEmitterModel::theta_in_bounds().

9.30.5.22 IdxT mappel::MCMCAdaptorBase::num_phases [protected],[inherited]

The number of different sampling phases for candidate selection MCMC. Each phase changes a different subset of variables.

Definition at line 29 of file MCMCAdaptorBase.h.

Referenced by mappel::MCMCAdaptorBase::get_mcmc_num_phases(), mappel::MCMCAdaptorBase::get_stats(), sample_mcmc_candidate(), mappel::MCMCAdaptor2D::sample_mcmc_candidate(), mappel::MCMCAdaptor1D::sample_mcmc_candidate(), mappel::MCMCAdaptor1D::sample_mcmc_candidate(), and mappel::MCMCAdaptorBase::set_mcmc_num_phases().

9.30.5.23 CompositeDist mappel::PointEmitterModel::prior [protected],[inherited]

Definition at line 145 of file PointEmitterModel.h.

Referenced by mappel::Gauss2DModel::debug_internal_sum_model_y(), mappel::Gauss2DsModel::debug_internal_sum_model_y(), mappel::Gauss2DModel::Gauss2DModel(), mappel::Gauss2DsModel::Gauss2DsModel(), mappel::PointEmitterModel::get_hyperparam_index(), mappel::PointEmitterModel::get_hyperparam_names(), mappel::PointEmitterModel::get_hyperparam_value(), mappel::PointEmitterModel::get_hyperparams(), mappel::Gauss1DsModel::get_max_sigma(), mappel::Gauss1DsModel::get_min_sigma(), mappel::PointEmitterModel::get_param_names(), mappel::PointEmitterModel::get_prior(), mappel::PointEmitterModel::get_stats(), mappel::PointEmitterModel::has_hyperparam(), mappel::PointEmitterModel::operator=(), mappel::PointEmitterModel::PointEmitterModel(), mappel::PointEmitterModel::rename_hyperparam(), mappel::PointEmitterModel::sample_prior(), mappel::PointEmitterModel::set_bounds(), mappel::PointEmitterModel::set_hyperparam_names(), mappel::PointEmitterModel::set_hyperparam_value(), mappel::PointEmitterModel::set_hyperparams(), mappel::PointEmitterModel::set_lbound(), mappel::Gauss1DsModel::set_max_sigma(), mappel::Gauss1DsModel::set_min_sigma(), mappel::PointEmitterModel::set_param_names(), mappel::PointEmitterModel::set_prior(), and mappel::PointEmitterModel::set_ubound().

9.30.5.24 `double mappel::MCMCAdaptorBase::sigma_scale` [protected],[inherited]

A scaling factor for step sizes as a fraction of the size of the domain dimension we are walking in. (0.05 default)

Definition at line 30 of file MCMCAdaptorBase.h.

Referenced by `mappel::MCMCAdaptorBase::get_mcmc_sigma_scale()`, `mappel::MCMCAdaptorBase::get_stats()`, `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds()`, `mappel::MCMCAdaptor2D::MCMCAdaptor2D()`, `MCMCAdaptor2Ds()`, `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`, `mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling()`, and `mappel::MCMCAdaptorBase::set_mcmc_sigma_scale()`.

9.30.5.25 `ParamT mappel::PointEmitterModel::ubound` [protected],[inherited]

Definition at line 148 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::bound_theta()`, `mappel::PointEmitterModel::bounded_theta()`, `mappel::PointEmitterModel::get_stats()`, `mappel::PointEmitterModel::get_ubound()`, `mappel::Gauss1DsModel::initial_theta_estimate()`, `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsModel::initial_theta_estimate()`, `mappel::PointEmitterModel::operator=()`, `mappel::PointEmitterModel::reflected_theta()`, `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::PointEmitterModel::set_prior()`, `mappel::PointEmitterModel::set_ubound()`, and `mappel::PointEmitterModel::theta_in_bounds()`.


The documentation for this class was generated from the following files:

- [MCMCAdaptor2Ds.h](#)
- [MCMCAdaptor2Ds.cpp](#)

9.31 mappel::MCMCAdaptorBase Class Reference

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/MCMCAdaptorBase.h>
```

Inheritance diagram for `mappel::MCMCAdaptorBase`:

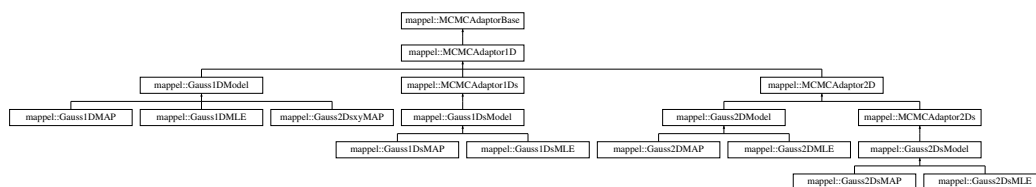

Public Member Functions

- `void set_mcmc_sigma_scale` (double scale)
- `double get_mcmc_sigma_scale` () const
- `IdxT get_mcmc_num_phases` () const

Static Public Attributes

- static const double [global_default_mcmc_sigma_scale](#) = 0.05
- static const double [global_max_mcmc_sigma_scale](#) = 0.5

Protected Member Functions

- [MCMCAdaptorBase](#) ([IdxT num_phases](#))
- [MCMCAdaptorBase](#) ([IdxT num_phases](#), double [sigma_scale](#))
- void [set_mcmc_num_phases](#) ([IdxT num_phases](#))
- [StatsT get_stats](#) () const

Protected Attributes

- [IdxT num_phases](#)
- double [sigma_scale](#)

9.31.1 Detailed Description

Definition at line 13 of file [MCMCAdaptorBase.h](#).

9.31.2 Constructor & Destructor Documentation

9.31.2.1 mappel::MCMCAdaptorBase::MCMCAdaptorBase ([IdxT num_phases](#)) [protected]

Definition at line 14 of file [MCMCAdaptorBase.cpp](#).

9.31.2.2 mappel::MCMCAdaptorBase::MCMCAdaptorBase ([IdxT num_phases](#), double [sigma_scale](#)) [protected]

Definition at line 18 of file [MCMCAdaptorBase.cpp](#).

References [global_max_mcmc_sigma_scale](#).

9.31.3 Member Function Documentation

9.31.3.1 [IdxT](#) mappel::MCMCAdaptorBase::get_mcmc_num_phases () const

Definition at line 56 of file [MCMCAdaptorBase.cpp](#).

References [num_phases](#).

9.31.3.2 `double mappel::MCMCAdaptorBase::get_mcmc_sigma_scale () const`

Definition at line 53 of file MCMCAdaptorBase.cpp.

References `sigma_scale`.

9.31.3.3 `StatsT mappel::MCMCAdaptorBase::get_stats () const` `[protected]`

Definition at line 70 of file MCMCAdaptorBase.cpp.

References `num_phases`, and `sigma_scale`.

Referenced by `mappel::MCMCAdaptor1D::get_stats()`.

9.31.3.4 `void mappel::MCMCAdaptorBase::set_mcmc_num_phases (IdxT num_phases)` `[protected]`

Definition at line 59 of file MCMCAdaptorBase.cpp.

References `num_phases`.

Referenced by `mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds()`, and `mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds()`.

9.31.3.5 `void mappel::MCMCAdaptorBase::set_mcmc_sigma_scale (double scale)`

Definition at line 39 of file MCMCAdaptorBase.cpp.

References `global_max_mcmc_sigma_scale`, and `sigma_scale`.

9.31.4 Member Data Documentation

9.31.4.1 `const double mappel::MCMCAdaptorBase::global_default_mcmc_sigma_scale = 0.05` `[static]`

Definition at line 16 of file MCMCAdaptorBase.h.

Referenced by `mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds()`, `mappel::MCMCAdaptor2D::MCMCAdaptor2D()`, and `mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds()`.

9.31.4.2 `const double mappel::MCMCAdaptorBase::global_max_mcmc_sigma_scale = 0.5` `[static]`

Definition at line 17 of file MCMCAdaptorBase.h.

Referenced by `MCMCAdaptorBase()`, and `set_mcmc_sigma_scale()`.

9.31.4.3 `IdxT mappel::MCMCAdaptorBase::num_phases` `[protected]`

The number of different sampling phases for candidate selection MCMC. Each phase changes a different subset of variables.

Definition at line 29 of file MCMCAdaptorBase.h.

Referenced by `get_mcmc_num_phases()`, `get_stats()`, `mappel::MCMCAdaptor2D::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor2Ds::sample_mcmc_candidate()`, `mappel::MCMCAdaptor1D::sample_mcmc_candidate()`, and `set_mcmc_num_phases()`.

9.31.4.4 `double mappel::MCMCAdaptorBase::sigma_scale` `[protected]`

A scaling factor for step sizes as a fraction of the size of the domain dimension we are walking in. (0.05 default)

Definition at line 30 of file MCMCAdaptorBase.h.

Referenced by `get_mcmc_sigma_scale()`, `get_stats()`, `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor1Ds::MCMCAdaptor1Ds()`, `mappel::MCMCAdaptor2D::MCMCAdaptor2D()`, `mappel::MCMCAdaptor2Ds::MCMCAdaptor2Ds()`, `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`, `mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling()`, and `set_mcmc_sigma_scale()`.

The documentation for this class was generated from the following files:

- [MCMCAdaptorBase.h](#)
- [MCMCAdaptorBase.cpp](#)

9.32 mappel::mcmc::MCMCData Struct Reference

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/mcmc_data.h>
```

Public Member Functions

- void [initialize_arrays](#) ([IdxT](#) Nparams)

Public Attributes

- [IdxT](#) Nsample =0
- [IdxT](#) Nburnin =0
- [IdxT](#) thin =0
- double [confidence](#) =-INFINITY
- [VecT](#) [sample_mean](#)
- [MatT](#) [sample_cov](#)
- [VecT](#) [credible_lb](#)
- [VecT](#) [credible_ub](#)
- [MatT](#) [sample](#)
- [VecT](#) [sample_rllh](#)

9.32.1 Detailed Description

Structures for reporting MCMC resultsData and controlling parameters for an MCMC posterior sampling for a single data.

Definition at line 21 of file mcmc_data.h.

9.32.2 Member Function Documentation

9.32.2.1 void mappel::mcmc::MCMCData::initialize_arrays (IdxT Nparams)

Definition at line 12 of file mcmc.cpp.

References credible_lb, credible_ub, Nsample, sample, sample_cov, sample_mean, and sample_rllh.

9.32.3 Member Data Documentation

9.32.3.1 double mappel::mcmc::MCMCData::confidence =-INFINITY

Definition at line 26 of file mcmc_data.h.

Referenced by mappel::methods::estimate_posterior().

9.32.3.2 VecT mappel::mcmc::MCMCData::credible_lb

Definition at line 30 of file mcmc_data.h.

Referenced by mappel::methods::estimate_posterior(), initialize_arrays(), and mappel::mcmc::MCMCDataStack↵::initialize_arrays().

9.32.3.3 VecT mappel::mcmc::MCMCData::credible_ub

Definition at line 31 of file mcmc_data.h.

Referenced by mappel::methods::estimate_posterior(), initialize_arrays(), and mappel::mcmc::MCMCDataStack↵::initialize_arrays().

9.32.3.4 IdxT mappel::mcmc::MCMCData::Nburnin =0

Definition at line 24 of file mcmc_data.h.

Referenced by mappel::methods::estimate_posterior().

9.32.3.5 IdxT mappel::mcmc::MCMCData::Nsample =0

Definition at line 23 of file mcmc_data.h.

Referenced by mappel::methods::estimate_posterior(), initialize_arrays(), mappel::mcmc::MCMCDebugData↵::initialize_arrays(), and mappel::mcmc::MCMCDataStack::initialize_arrays().

9.32.3.6 MatT mappel::mcmc::MCMCData::sample

Definition at line 32 of file mcmc_data.h.

Referenced by mappel::methods::estimate_posterior(), initialize_arrays(), mappel::mcmc::MCMCDebugData::initialize_arrays(), and mappel::mcmc::MCMCDataStack::initialize_arrays().

9.32.3.7 MatT mappel::mcmc::MCMCData::sample_cov

Definition at line 29 of file mcmc_data.h.

Referenced by mappel::methods::estimate_posterior(), initialize_arrays(), and mappel::mcmc::MCMCDataStack::initialize_arrays().

9.32.3.8 VecT mappel::mcmc::MCMCData::sample_mean

Definition at line 28 of file mcmc_data.h.

Referenced by mappel::methods::estimate_posterior(), initialize_arrays(), and mappel::mcmc::MCMCDataStack::initialize_arrays().

9.32.3.9 VecT mappel::mcmc::MCMCData::sample_rlh

Definition at line 33 of file mcmc_data.h.

Referenced by mappel::methods::estimate_posterior(), initialize_arrays(), mappel::mcmc::MCMCDebugData::initialize_arrays(), mappel::mcmc::MCMCDataStack::initialize_arrays(), and mappel::mcmc::thin_sample().

9.32.3.10 IdxT mappel::mcmc::MCMCData::thin =0

Definition at line 25 of file mcmc_data.h.

Referenced by mappel::methods::estimate_posterior(), and mappel::mcmc::thin_sample().

The documentation for this struct was generated from the following files:

- [mcmc_data.h](#)
- [mcmc.cpp](#)

9.33 mappel::mcmc::MCMCDataStack Struct Reference

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/mcmc_data.h>
```

Public Member Functions

- void [initialize_arrays](#) (IdxT Nparams)

Public Attributes

- `IdxT Nsample` =0
- `IdxT Nburnin` =0
- `IdxT thin` =0
- `double confidence` =-INFINITY
- `IdxT Ndata` =0
- `MatT sample_mean`
- `CubeT sample_cov`
- `MatT credible_lb`
- `MatT credible_ub`
- `CubeT sample`
- `MatT sample_rllh`

9.33.1 Detailed Description

Data and controlling parameters for an MCMC posterior sampling for stack of single data.

Definition at line 53 of file `mcmc_data.h`.

9.33.2 Member Function Documentation

9.33.2.1 `void mappel::mcmc::MCMCDataStack::initialize_arrays (IdxT Nparams)`

Definition at line 30 of file `mcmc.cpp`.

References `mappel::mcmc::MCMCData::credible_lb`, `mappel::mcmc::MCMCData::credible_ub`, `mappel::mcmc::MCMCData::Nsample`, `mappel::mcmc::MCMCData::sample`, `mappel::mcmc::MCMCData::sample_cov`, `mappel::mcmc::MCMCData::sample_mean`, and `mappel::mcmc::MCMCData::sample_rllh`.

Referenced by `mappel::methods::openmp::estimate_posterior_stack()`.

9.33.3 Member Data Documentation

9.33.3.1 `double mappel::mcmc::MCMCDataStack::confidence` =-INFINITY

Definition at line 58 of file `mcmc_data.h`.

9.33.3.2 `MatT mappel::mcmc::MCMCDataStack::credible_lb`

Definition at line 64 of file `mcmc_data.h`.

9.33.3.3 `MatT mappel::mcmc::MCMCDataStack::credible_ub`

Definition at line 65 of file `mcmc_data.h`.

9.33.3.4 `IdxT mappel::mcmc::MCMCDataStack::Nburnin =0`

Definition at line 56 of file `mcmc_data.h`.

Referenced by `mappel::methods::openmp::estimate_posterior_stack()`.

9.33.3.5 `IdxT mappel::mcmc::MCMCDataStack::Ndata =0`

Definition at line 61 of file `mcmc_data.h`.

Referenced by `mappel::methods::openmp::estimate_posterior_stack()`.

9.33.3.6 `IdxT mappel::mcmc::MCMCDataStack::Nsample =0`

Definition at line 55 of file `mcmc_data.h`.

Referenced by `mappel::methods::openmp::estimate_posterior_stack()`.

9.33.3.7 `CubeT mappel::mcmc::MCMCDataStack::sample`

Definition at line 66 of file `mcmc_data.h`.

9.33.3.8 `CubeT mappel::mcmc::MCMCDataStack::sample_cov`

Definition at line 63 of file `mcmc_data.h`.

9.33.3.9 `MatT mappel::mcmc::MCMCDataStack::sample_mean`

Definition at line 62 of file `mcmc_data.h`.

9.33.3.10 `MatT mappel::mcmc::MCMCDataStack::sample_rllh`

Definition at line 67 of file `mcmc_data.h`.

9.33.3.11 `IdxT mappel::mcmc::MCMCDataStack::thin =0`

Definition at line 57 of file `mcmc_data.h`.

Referenced by `mappel::methods::openmp::estimate_posterior_stack()`.

The documentation for this struct was generated from the following files:

- [mcmc_data.h](#)
- [mcmc.cpp](#)

9.34 mappel::mcmc::MCMCDebugData Struct Reference

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/mcmc_data.h>
```

Public Member Functions

- void [initialize_arrays](#) ([IdxT](#) Nparams)

Public Attributes

- [IdxT](#) Nsample =0
- [MatT](#) sample
- [VecT](#) sample_rllh
- [MatT](#) candidate
- [VecT](#) candidate_rllh

9.34.1 Detailed Description

Debugging Data and controlling parameters for an MCMC posterior sampling for a single data. No burnin or thinning is performed when debugging

Definition at line 40 of file `mcmc_data.h`.

9.34.2 Member Function Documentation

9.34.2.1 void mappel::mcmc::MCMCDebugData::initialize_arrays ([IdxT](#) Nparams)

Definition at line 22 of file `mcmc.cpp`.

References `mappel::mcmc::MCMCData::Nsample`, `mappel::mcmc::MCMCData::sample`, and `mappel::mcmc::MCMCData::sample_rllh`.

Referenced by `mappel::methods::debug::estimate_posterior_debug()`.

9.34.3 Member Data Documentation

9.34.3.1 [MatT](#) mappel::mcmc::MCMCDebugData::candidate

Definition at line 46 of file `mcmc_data.h`.

Referenced by `mappel::methods::debug::estimate_posterior_debug()`.

9.34.3.2 VecT mappel::mcmc::MCMCDebugData::candidate_rllh

Definition at line 47 of file mcmc_data.h.

Referenced by mappel::methods::debug::estimate_posterior_debug().

9.34.3.3 IdxT mappel::mcmc::MCMCDebugData::Nsample =0

Definition at line 42 of file mcmc_data.h.

Referenced by mappel::methods::debug::estimate_posterior_debug().

9.34.3.4 MatT mappel::mcmc::MCMCDebugData::sample

Definition at line 44 of file mcmc_data.h.

Referenced by mappel::methods::debug::estimate_posterior_debug().

9.34.3.5 VecT mappel::mcmc::MCMCDebugData::sample_rllh

Definition at line 45 of file mcmc_data.h.

Referenced by mappel::methods::debug::estimate_posterior_debug().

The documentation for this struct was generated from the following files:


- [mcmc_data.h](#)
- [mcmc.cpp](#)

9.35 mappel::MLEstimator Class Reference

A Mixin class to configure a for MLE estimation (null prior).

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/MLEstimator.h>
```

Inheritance diagram for mappel::MLEstimator:

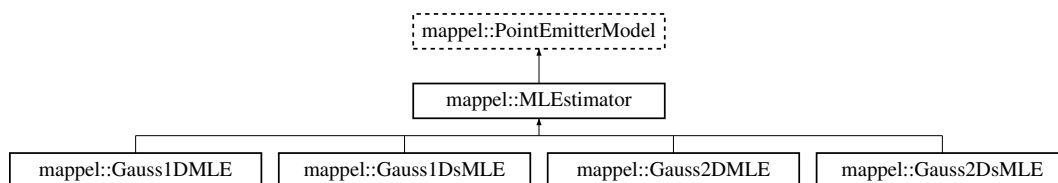

Public Types

- using [ParamT](#) = arma::vec
- using [ParamVecT](#) = arma::mat

Public Member Functions

- [StatsT get_stats](#) () const
- [IdxT get_num_params](#) () const
- void [check_param_shape](#) (const [ParamT](#) &theta) const
- void [check_param_shape](#) (const [ParamVecT](#) &theta) const
- void [check_psf_sigma](#) (double psf_sigma) const
- void [check_psf_sigma](#) (const [VecT](#) &psf_sigma) const
- [ParamT make_param](#) () const
- template<class FillT >
 [ParamT make_param](#) (FillT fill) const
- [ParamVecT make_param_stack](#) ([IdxT](#) n) const
- template<class FillT >
 [ParamVecT make_param_stack](#) ([IdxT](#) n, FillT fill) const
- [MatT make_param_mat](#) () const
- template<class FillT >
 [MatT make_param_mat](#) (FillT fill) const
- [CubeT make_param_mat_stack](#) ([IdxT](#) n) const
- template<class FillT >
 [CubeT make_param_mat_stack](#) ([IdxT](#) n, FillT fill) const
- CompositeDist & [get_prior](#) ()
- const CompositeDist & [get_prior](#) () const
- void [set_prior](#) (CompositeDist &&prior_)
- void [set_prior](#) (const CompositeDist &prior_)
- [IdxT get_num_hyperparams](#) () const
- void [set_hyperparams](#) (const [VecT](#) &hyperparams)
- [VecT get_hyperparams](#) () const
- bool [has_hyperparam](#) (const std::string &name) const
- double [get_hyperparam_value](#) (const std::string &name) const
- int [get_hyperparam_index](#) (const std::string &name) const
- void [set_hyperparam_value](#) (const std::string &name, double value)
- void [rename_hyperparam](#) (const std::string &old_name, const std::string &new_name)
- [StringVecT get_param_names](#) () const
- void [set_param_names](#) (const [StringVecT](#) &desc)
- [StringVecT get_hyperparam_names](#) () const
- void [set_hyperparam_names](#) (const [StringVecT](#) &desc)
- template<class RngT >
 [ParamT sample_prior](#) (RngT &rng) const
- [ParamT sample_prior](#) () const
- void [set_bounds](#) (const [ParamT](#) &lbound, const [ParamT](#) &ubound)
- void [set_lbound](#) (const [ParamT](#) &lbound)
- void [set_ubound](#) (const [ParamT](#) &ubound)
- const [ParamT](#) & [get_lbound](#) () const
- const [ParamT](#) & [get_ubound](#) () const
- bool [theta_in_bounds](#) (const [ParamT](#) &theta) const
- void [bound_theta](#) ([ParamT](#) &theta, double epsilon=[bounds_epsilon](#)) const
- [ParamT bounded_theta](#) (const [ParamT](#) &theta, double epsilon=[bounds_epsilon](#)) const
- [ParamT reflected_theta](#) (const [ParamT](#) &theta) const
- [BoolVecT theta_stack_in_bounds](#) (const [ParamVecT](#) &theta) const
- [ParamVecT bounded_theta_stack](#) (const [ParamVecT](#) &theta, double epsilon=[bounds_epsilon](#)) const
- [ParamVecT reflected_theta_stack](#) (const [ParamVecT](#) &theta) const

Static Public Member Functions

- static prior_hessian::TruncatedNormalDist [make_prior_component_position_normal](#) (IdxT size, double pos_↵, double sigma=[default_sigma_pos](#))
- static prior_hessian::ScaledSymmetricBetaDist [make_prior_component_position_beta](#) (IdxT size, double pos_↵, double beta=[default_beta_pos](#))
- static prior_hessian::TruncatedGammaDist [make_prior_component_intensity](#) (double mean=[default_mean_l](#), double kappa=[default_intensity_kappa](#))
- static prior_hessian::TruncatedParetoDist [make_prior_component_sigma](#) (double min_sigma, double max_↵, double sigma, double alpha=[default_alpha_sigma](#))
- static void [set_rng_seed](#) (RngSeedT seed)
- static [ParallelRngManagerT](#) & [get_rng_manager](#) ()
- static [ParallelRngGeneratorT](#) & [get_rng_generator](#) ()

Static Public Attributes

- static const std::string [DefaultSeperableInitEstimator](#) = "TrustRegion"
- static const double [bounds_epsilon](#) = 1.0E-6
- static const double [global_min_psf_sigma](#) = 1E-1
- static const double [global_max_psf_sigma](#) = 1E2
- static const double [default_beta_pos](#) = 3
- static const double [default_sigma_pos](#) = 1
- static const double [default_mean_l](#) = 300
- static const double [default_max_l](#) = INFINITY
- static const double [default_intensity_kappa](#) = 2
- static const double [default_pixel_mean_bg](#) = 4
- static const double [default_alpha_sigma](#) = 2

Protected Member Functions

- [MLEstimator](#) ()=default
- [MLEstimator](#) (const [MLEstimator](#) &o)
- [MLEstimator](#) ([MLEstimator](#) &&o)
- [MLEstimator](#) & [operator=](#) (const [MLEstimator](#) &o)
- [MLEstimator](#) & [operator=](#) ([MLEstimator](#) &&o)

Protected Attributes

- CompositeDist [prior](#)
- IdxT [num_params](#)
- IdxT [num_hyperparams](#)
- ParamT [lbound](#)
- ParamT [ubound](#)

9.35.1 Detailed Description

A Mixin class to configure a for MLE estimation (null prior).

Inheriting from this class modifies the objective function undergoing optimization to use a Null prior, by simply ignoring the effect of the prior on the objective. This which effectively turns the objective function into a pure likelihood function, and the estimator becomes an MLE estimator.

Definition at line 22 of file MLEstimator.h.

9.35.2 Member Typedef Documentation

9.35.2.1 `using mappel::PointEmitterModel::ParamT = arma::vec` `[inherited]`

Parameter vector

Definition at line 47 of file PointEmitterModel.h.

9.35.2.2 `using mappel::PointEmitterModel::ParamVecT = arma::mat` `[inherited]`

Vector of parameter vectors

Definition at line 48 of file PointEmitterModel.h.

9.35.3 Constructor & Destructor Documentation

9.35.3.1 `mappel::MLEstimator::MLEstimator ()` `[protected]`, `[default]`

9.35.3.2 `mappel::MLEstimator::MLEstimator (const MLEstimator & o)` `[inline]`, `[protected]`

Definition at line 25 of file MLEstimator.h.

9.35.3.3 `mappel::MLEstimator::MLEstimator (MLEstimator && o)` `[inline]`, `[protected]`

Definition at line 26 of file MLEstimator.h.

9.35.4 Member Function Documentation

9.35.4.1 `void mappel::PointEmitterModel::bound_theta (ParamT & theta, double epsilon = bounds_epsilon) const` `[inherited]`

Definition at line 248 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

9.35.4.2 PointEmitterModel::ParamT mappel::PointEmitterModel::bounded_theta (const ParamT & *theta*, double *epsilon* = bounds_epsilon) const [inherited]

Definition at line 265 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::check_param_shape(), mappel::PointEmitterModel::lbound, mappel::PointEmitterModel::num_params, and mappel::PointEmitterModel::ubound.

Referenced by mappel::PointEmitterModel::bounded_theta_stack().

9.35.4.3 PointEmitterModel::ParamVecT mappel::PointEmitterModel::bounded_theta_stack (const ParamVecT & *theta*, double *epsilon* = bounds_epsilon) const [inherited]

Definition at line 306 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::bounded_theta(), mappel::PointEmitterModel::check_param_shape(), and mappel::PointEmitterModel::make_param_stack().

9.35.4.4 void mappel::PointEmitterModel::check_param_shape (const ParamT & *theta*) const [inherited]

Definition at line 167 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::num_params.

Referenced by mappel::PointEmitterModel::bound_theta(), mappel::PointEmitterModel::bounded_theta(), mappel::PointEmitterModel::bounded_theta_stack(), mappel::PointEmitterModel::reflected_theta(), mappel::PointEmitterModel::reflected_theta_stack(), mappel::PointEmitterModel::theta_in_bounds(), and mappel::PointEmitterModel::theta_stack_in_bounds().

9.35.4.5 void mappel::PointEmitterModel::check_param_shape (const ParamVecT & *theta*) const [inherited]

Definition at line 176 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::num_params.

9.35.4.6 void mappel::PointEmitterModel::check_psf_sigma (double *psf_sigma*) const [inherited]

Definition at line 185 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::global_max_psf_sigma, and mappel::PointEmitterModel::global_min_psf_sigma.

Referenced by mappel::Gauss1DModel::Gauss1DModel(), mappel::Gauss2DModel::Gauss2DModel(), mappel::Gauss2DsModel::Gauss2DsModel(), mappel::Gauss1DsModel::set_max_sigma(), mappel::Gauss2DsModel::set_max_sigma(), mappel::Gauss1DsModel::set_min_sigma(), mappel::Gauss2DsModel::set_min_sigma(), mappel::Gauss1DModel::set_psf_sigma(), and mappel::Gauss2DModel::set_psf_sigma().

9.35.4.7 void mappel::PointEmitterModel::check_psf_sigma (const VecT & *psf_sigma*) const [inherited]

Definition at line 197 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::global_max_psf_sigma, and mappel::PointEmitterModel::global_min_psf_sigma.

9.35.4.8 `int mappel::PointEmitterModel::get_hyperparam_index (const std::string & name) const` `[inline]`,
`[inherited]`

Definition at line 236 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.35.4.9 `StringVecT mappel::PointEmitterModel::get_hyperparam_names () const` `[inline]`,`[inherited]`

Definition at line 256 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.35.4.10 `double mappel::PointEmitterModel::get_hyperparam_value (const std::string & name) const` `[inline]`,
`[inherited]`

Definition at line 232 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

Referenced by mappel::MCMCAdaptor1D::set_background_mcmc_sampling(), and mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling().

9.35.4.11 `PointEmitterModel::ParamT mappel::PointEmitterModel::get_hyperparams () const` `[inline]`,
`[inherited]`

Definition at line 224 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.35.4.12 `const PointEmitterModel::ParamT & mappel::PointEmitterModel::get_lbound () const` `[inline]`,
`[inherited]`

Definition at line 212 of file PointEmitterModel.h.

References mappel::PointEmitterModel::lbound.

Referenced by mappel::MCMCAdaptor1D::MCMCAdaptor1D(), mappel::MCMCAdaptor2D::MCMCAdaptor2D(), and mappel::MCMCAdaptor1D::set_background_mcmc_sampling().

9.35.4.13 `IdxT mappel::PointEmitterModel::get_num_hyperparams () const` `[inline]`,`[inherited]`

Definition at line 208 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_hyperparams.

9.35.4.14 `IdxT mappel::PointEmitterModel::get_num_params () const` `[inline]`,`[inherited]`

Definition at line 160 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.35.4.15 StringVecT mappel::PointEmitterModel::get_param_names () const [inline],[inherited]

Definition at line 248 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.35.4.16 CompositeDist & mappel::PointEmitterModel::get_prior () [inline],[inherited]

Definition at line 200 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

Referenced by mappel::Gauss2DModel::update_internal_1Dsum_estimators(), and mappel::Gauss2DsModel::update_internal_1Dsum_estimators().

9.35.4.17 const CompositeDist & mappel::PointEmitterModel::get_prior () const [inline],[inherited]

Definition at line 204 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.35.4.18 ParallelRngGeneratorT & mappel::PointEmitterModel::get_rng_generator () [static],[inherited]

Definition at line 120 of file PointEmitterModel.cpp.

References mappel::rng_manager.

9.35.4.19 ParallelRngManagerT & mappel::PointEmitterModel::get_rng_manager () [static],[inherited]

Definition at line 115 of file PointEmitterModel.cpp.

References mappel::rng_manager.

9.35.4.20 StatsT mappel::PointEmitterModel::get_stats () const [inherited]

Definition at line 125 of file PointEmitterModel.cpp.

References mappel::PointEmitterModel::lbound, mappel::PointEmitterModel::num_hyperparams, mappel::PointEmitterModel::num_params, mappel::PointEmitterModel::prior, mappel::rng_manager, and mappel::PointEmitterModel::ubound.

Referenced by mappel::Gauss1DModel::get_stats(), mappel::Gauss1DsModel::get_stats(), mappel::Gauss2DModel::get_stats(), and mappel::Gauss2DsModel::get_stats().

9.35.4.21 const PointEmitterModel::ParamT & mappel::PointEmitterModel::get_ubound () const [inline],[inherited]

Definition at line 216 of file PointEmitterModel.h.

References mappel::PointEmitterModel::ubound.

Referenced by mappel::Gauss2DsxxyModel::get_max_sigma_ratio(), mappel::Gauss2DsModel::get_max_sigma_ratio(), mappel::MCMCAdaptor1D::MCMCAdaptor1D(), mappel::MCMCAdaptor2D::MCMCAdaptor2D(), mappel::MCMCAdaptor1D::set_background_mcmc_sampling(), and mappel::Gauss2DsModel::set_max_sigma_ratio().

9.35.4.22 **bool** mappel::PointEmitterModel::has_hyperparam (const std::string & name) const [inline],[inherited]

Definition at line 228 of file PointEmitterModel.h.

References mappel::PointEmitterModel::prior.

9.35.4.23 **PointEmitterModel::ParamT** mappel::PointEmitterModel::make_param () const [inline],[inherited]

Definition at line 164 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

Referenced by mappel::Gauss1DModel::initial_theta_estimate(), mappel::Gauss1DsModel::initial_theta_estimate(), mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsxyModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::Gauss1DModel::pixel_hess_update(), mappel::Gauss1DsModel::pixel_hess_update(), mappel::Gauss2DModel::pixel_hess_update(), and mappel::Gauss2DsModel::pixel_hess_update().

9.35.4.24 **template<class FillT > PointEmitterModel::ParamT** mappel::PointEmitterModel::make_param (FillT fill) const [inherited]

Definition at line 181 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.35.4.25 **MatT** mappel::PointEmitterModel::make_param_mat () const [inline],[inherited]

Definition at line 172 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.35.4.26 **template<class FillT > MatT** mappel::PointEmitterModel::make_param_mat (FillT fill) const [inherited]

Definition at line 191 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.35.4.27 **CubeT** mappel::PointEmitterModel::make_param_mat_stack (IdxT n) const [inline],[inherited]

Definition at line 176 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.35.4.28 **template<class FillT > CubeT** mappel::PointEmitterModel::make_param_mat_stack (IdxT n, FillT fill) const [inherited]

Definition at line 196 of file PointEmitterModel.h.

References mappel::PointEmitterModel::num_params.

9.35.4.29 `PointEmitterModel::ParamVecT mappel::PointEmitterModel::make_param_stack (IdxT n) const` `[inline]`,
`[inherited]`

Definition at line 168 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::num_params`.

Referenced by `mappel::PointEmitterModel::bounded_theta_stack()`, and `mappel::PointEmitterModel::reflected_theta_stack()`.

9.35.4.30 `template<class FillT > PointEmitterModel::ParamVecT mappel::PointEmitterModel::make_param_stack (IdxT n, FillT fill) const` `[inherited]`

Definition at line 186 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::num_params`.

9.35.4.31 `prior_hessian::TruncatedGammaDist mappel::PointEmitterModel::make_prior_component_intensity (double mean = default_mean_I, double kappa = default_intensity_kappa)` `[static]`, `[inherited]`

Definition at line 98 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::default_max_I`.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_beta_position()`, `mappel::Gauss1DModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss1DModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_prior_beta_position()`, `mappel::Gauss1DsModel::make_prior_beta_position()`, `mappel::Gauss1DModel::make_prior_beta_position()`, `mappel::Gauss2DsModel::make_prior_beta_position()`, `mappel::Gauss2DModel::make_prior_normal_position()`, `mappel::Gauss1DsModel::make_prior_normal_position()`, `mappel::Gauss1DModel::make_prior_normal_position()`, and `mappel::Gauss2DsModel::make_prior_normal_position()`.

9.35.4.32 `prior_hessian::ScaledSymmetricBetaDist mappel::PointEmitterModel::make_prior_component_position_beta (IdxT size, double pos_beta = default_beta_pos)` `[static]`, `[inherited]`

Definition at line 92 of file PointEmitterModel.cpp.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_beta_position()`, `mappel::Gauss1DModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss1DsModel::make_prior_beta_position()`, `mappel::Gauss2DsModel::make_prior_beta_position()`, and `mappel::Gauss2DsModel::make_prior_beta_position()`.

9.35.4.33 `prior_hessian::TruncatedNormalDist mappel::PointEmitterModel::make_prior_component_position_normal (IdxT size, double pos_sigma = default_sigma_pos)` `[static]`, `[inherited]`

Definition at line 85 of file PointEmitterModel.cpp.

Referenced by `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_default_prior_normal_position()`, `mappel::Gauss1DModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, `mappel::Gauss1DsModel::make_prior_normal_position()`, `mappel::Gauss1DModel::make_prior_normal_position()`, and `mappel::Gauss2DsModel::make_prior_normal_position()`.

9.35.4.34 `prior_hessian::TruncatedParetoDist mappel::PointEmitterModel::make_prior_component_sigma (double min_sigma, double max_sigma, double alpha = default_alpha_sigma)` `[static],[inherited]`

Definition at line 104 of file `PointEmitterModel.cpp`.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, `mappel::Gauss1DsModel::make_prior_beta_position()`, `mappel::Gauss2DsModel::make_prior_beta_position()`, `mappel::Gauss1DsModel::make_prior_normal_position()`, and `mappel::Gauss2DsModel::make_prior_normal_position()`.

9.35.4.35 `MLEstimator& mappel::MLEstimator::operator= (const MLEstimator & o)` `[inline],[protected]`

Definition at line 27 of file `MLEstimator.h`.

Referenced by `mappel::Gauss1DMLE::operator=()`, `mappel::Gauss1DsMLE::operator=()`, `mappel::Gauss2DsMLE::operator=()`, and `mappel::Gauss2DMLE::operator=()`.

9.35.4.36 `MLEstimator& mappel::MLEstimator::operator= (MLEstimator && o)` `[inline],[protected]`

Definition at line 28 of file `MLEstimator.h`.

9.35.4.37 `PointEmitterModel::ParamT mappel::PointEmitterModel::reflected_theta (const ParamT & theta) const` `[inherited]`

Definition at line 276 of file `PointEmitterModel.cpp`.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::PointEmitterModel::reflected_theta_stack()`.

9.35.4.38 `PointEmitterModel::ParamVecT mappel::PointEmitterModel::reflected_theta_stack (const ParamVecT & theta) const` `[inherited]`

Definition at line 316 of file `PointEmitterModel.cpp`.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::make_param_stack()`, and `mappel::PointEmitterModel::reflected_theta()`.

9.35.4.39 `void mappel::PointEmitterModel::rename_hyperparam (const std::string & old_name, const std::string & new_name)` `[inline],[inherited]`

Definition at line 244 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

9.35.4.40 `template<class RngT > PointEmitterModel::ParamT mappel::PointEmitterModel::sample_prior (RngT & rng) const`
`[inherited]`

Definition at line 264 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

9.35.4.41 `PointEmitterModel::ParamT mappel::PointEmitterModel::sample_prior () const` `[inline],[inherited]`

Definition at line 268 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`, and `mappel::rng_manager`.

9.35.4.42 `void mappel::PointEmitterModel::set_bounds (const ParamT & lbound_, const ParamT & ubound_)`
`[inherited]`

Box-type parameter bounds

Modifies the prior bounds to prevent sampling outside the valid box-constraints.

Definition at line 213 of file `PointEmitterModel.cpp`.

References `mappel::PointEmitterModel::bounds_epsilon`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

9.35.4.43 `void mappel::PointEmitterModel::set_hyperparam_names (const StringVecT & desc)` `[inline],[inherited]`

Definition at line 260 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

9.35.4.44 `void mappel::PointEmitterModel::set_hyperparam_value (const std::string & name, double value)` `[inline],[inherited]`

Definition at line 240 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

9.35.4.45 `void mappel::PointEmitterModel::set_hyperparams (const VecT & hyperparams)` `[inline],[inherited]`

Definition at line 220 of file `PointEmitterModel.h`.

References `mappel::PointEmitterModel::prior`.

Referenced by `mappel::Gauss2DModel::set_hyperparams()`, and `mappel::Gauss2DsModel::set_hyperparams()`.

9.35.4.46 `void mappel::PointEmitterModel::set_lbound (const ParamT & lbound)` [inherited]

Definition at line 226 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::bounds_epsilon`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::Gauss1DsModel::set_min_sigma()`.

9.35.4.47 `void mappel::PointEmitterModel::set_param_names (const StringVecT & desc)` [inline],[inherited]

Definition at line 252 of file PointEmitterModel.h.

References `mappel::PointEmitterModel::prior`.

9.35.4.48 `void mappel::PointEmitterModel::set_prior (CompositeDist && prior_)` [inherited]

Definition at line 158 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_hyperparams`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::Gauss2DModel::set_prior()`, and `mappel::Gauss2DsModel::set_prior()`.

9.35.4.49 `void mappel::PointEmitterModel::set_prior (const CompositeDist & prior_)` [inherited]

Definition at line 149 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_hyperparams`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

9.35.4.50 `void mappel::PointEmitterModel::set_rng_seed (RngSeedT seed)` [static],[inherited]

Definition at line 110 of file PointEmitterModel.cpp.

References `mappel::rng_manager`.

9.35.4.51 `void mappel::PointEmitterModel::set_ubound (const ParamT & ubound)` [inherited]

Definition at line 237 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::bounds_epsilon`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, `mappel::PointEmitterModel::prior`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::Gauss1DsModel::set_max_sigma()`, and `mappel::Gauss2DsModel::set_max_sigma_ratio()`.

9.35.4.52 `bool mappel::PointEmitterModel::theta_in_bounds (const ParamT & theta) const` [inherited]

Definition at line 257 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::lbound`, `mappel::PointEmitterModel::num_params`, and `mappel::PointEmitterModel::ubound`.

Referenced by `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsModel::initial_theta_estimate()`, `mappel::Gauss1DModel::make_stencil()`, `mappel::Gauss1DsModel::make_stencil()`, `mappel::Gauss2DModel::make_stencil()`, `mappel::Gauss2DsxModel::make_stencil()`, `mappel::Gauss2DsModel::make_stencil()`, and `mappel::PointEmitterModel::theta_stack_in_bounds()`.

9.35.4.53 `BoolVecT mappel::PointEmitterModel::theta_stack_in_bounds (const ParamVecT & theta) const` [inherited]

Definition at line 296 of file PointEmitterModel.cpp.

References `mappel::PointEmitterModel::check_param_shape()`, and `mappel::PointEmitterModel::theta_in_bounds()`.

9.35.5 Member Data Documentation

9.35.5.1 `const double mappel::PointEmitterModel::bounds_epsilon = 1.0E-6` [static], [inherited]

Distance from the boundary to constrain in `bound_theta` and `bounded_theta` methods

Definition at line 52 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::Gauss2DsModel::set_max_sigma_ratio()`, and `mappel::PointEmitterModel::set_ubound()`.

9.35.5.2 `const double mappel::PointEmitterModel::default_alpha_sigma = 2` [static], [inherited]

Default per-pixel background gamma distribution shape

Definition at line 62 of file PointEmitterModel.h.

9.35.5.3 `const double mappel::PointEmitterModel::default_beta_pos = 3` [static], [inherited]

Default position parameter in symmetric beta-distributions

Definition at line 56 of file PointEmitterModel.h.

9.35.5.4 `const double mappel::PointEmitterModel::default_intensity_kappa = 2` [static], [inherited]

Default shape for intensity gamma distributions

Definition at line 60 of file PointEmitterModel.h.

9.35.5.5 `const double mappel::PointEmitterModel::default_max_l = INFINITY` `[static], [inherited]`

Default maximum emitter intensity

Definition at line 59 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::make_prior_component_intensity()`.

9.35.5.6 `const double mappel::PointEmitterModel::default_mean_l = 300` `[static], [inherited]`

Default emitter intensity mean

Definition at line 58 of file PointEmitterModel.h.

Referenced by `mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling()`.

9.35.5.7 `const double mappel::PointEmitterModel::default_pixel_mean_bg = 4` `[static], [inherited]`

Default per-pixel mean background counts

Definition at line 61 of file PointEmitterModel.h.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_beta_position()`, `mappel::Gauss1DModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_default_prior_normal_position()`, `mappel::Gauss1DModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, and `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`.

9.35.5.8 `const double mappel::PointEmitterModel::default_sigma_pos = 1` `[static], [inherited]`

Default position parameter in symmetric beta-distributions

Definition at line 57 of file PointEmitterModel.h.

9.35.5.9 `const std::string mappel::PointEmitterModel::DefaultSeperableInitEstimator = "TrustRegion"` `[static], [inherited]`

Estimator name to use in 1D separable initializations

Definition at line 49 of file PointEmitterModel.h.

Referenced by `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsxyModel::initial_theta_estimate()`, and `mappel::Gauss2DsModel::initial_theta_estimate()`.

9.35.5.10 `const double mappel::PointEmitterModel::global_max_psf_sigma = 1E2` `[static], [inherited]`

Global maximum for any `psf_sigma`. Sizes above this value are invalid, and nowhere near useful for practical point emitter localization

Definition at line 54 of file PointEmitterModel.h.

Referenced by `mappel::PointEmitterModel::check_psf_sigma()`.

9.35.5.11 `const double mappel::PointEmitterModel::global_min_psf_sigma = 1E-1` `[static]`, `[inherited]`

Global minimum for any `psf_sigma`. Sizes below this value are invalid, and nowhere near useful for practical point emitter localization

Definition at line 53 of file `PointEmitterModel.h`.

Referenced by `mappel::PointEmitterModel::check_psf_sigma()`.

9.35.5.12 `ParamT mappel::PointEmitterModel::lbound` `[protected]`, `[inherited]`

Definition at line 148 of file `PointEmitterModel.h`.

Referenced by `mappel::PointEmitterModel::bound_theta()`, `mappel::PointEmitterModel::bounded_theta()`, `mappel::PointEmitterModel::get_lbound()`, `mappel::PointEmitterModel::get_stats()`, `mappel::Gauss1DsModel::initial_theta_estimate()`, `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsModel::initial_theta_estimate()`, `mappel::PointEmitterModel::operator=()`, `mappel::PointEmitterModel::reflected_theta()`, `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::PointEmitterModel::set_prior()`, `mappel::PointEmitterModel::set_ubound()`, and `mappel::PointEmitterModel::theta_in_bounds()`.

9.35.5.13 `IdxT mappel::PointEmitterModel::num_hyperparams` `[protected]`, `[inherited]`

Definition at line 147 of file `PointEmitterModel.h`.

Referenced by `mappel::PointEmitterModel::get_num_hyperparams()`, `mappel::PointEmitterModel::get_stats()`, `mappel::PointEmitterModel::operator=()`, and `mappel::PointEmitterModel::set_prior()`.

9.35.5.14 `IdxT mappel::PointEmitterModel::num_params` `[protected]`, `[inherited]`

Definition at line 146 of file `PointEmitterModel.h`.

Referenced by `mappel::PointEmitterModel::bound_theta()`, `mappel::PointEmitterModel::bounded_theta()`, `mappel::PointEmitterModel::check_param_shape()`, `mappel::PointEmitterModel::get_num_params()`, `mappel::PointEmitterModel::get_stats()`, `mappel::Gauss1DModel::initial_theta_estimate()`, `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsModel::initial_theta_estimate()`, `mappel::PointEmitterModel::make_param()`, `mappel::PointEmitterModel::make_param_mat()`, `mappel::PointEmitterModel::make_param_mat_stack()`, `mappel::PointEmitterModel::make_param_stack()`, `mappel::PointEmitterModel::operator=()`, `mappel::PointEmitterModel::reflected_theta()`, `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::PointEmitterModel::set_prior()`, `mappel::PointEmitterModel::set_ubound()`, and `mappel::PointEmitterModel::theta_in_bounds()`.

9.35.5.15 `CompositeDist mappel::PointEmitterModel::prior` `[protected]`, `[inherited]`

Definition at line 145 of file `PointEmitterModel.h`.

Referenced by `mappel::Gauss2DModel::debug_internal_sum_model_y()`, `mappel::Gauss2DsModel::debug_internal_sum_model_y()`, `mappel::Gauss2DModel::Gauss2DModel()`, `mappel::Gauss2DsModel::Gauss2DsModel()`, `mappel::PointEmitterModel::get_hyperparam_index()`, `mappel::PointEmitterModel::get_hyperparam_names()`, `mappel::PointEmitterModel::get_hyperparam_value()`, `mappel::PointEmitterModel::get_hyperparams()`, `mappel::Gauss1DsModel::get_max_sigma()`, `mappel::Gauss1DsModel::get_min_sigma()`, `mappel::PointEmitterModel::get_param_names()`, `mappel::PointEmitterModel::get_prior()`, `mappel::PointEmitterModel::get_stats()`, `mappel::PointEmitterModel::has_hyperparam()`, `mappel::PointEmitterModel::operator=()`, `mappel::PointEmitterModel::PointEmitterModel()`, `mappel::PointEmitterModel::rename_hyperparam()`, `mappel::PointEmitterModel::sample_prior()`, `mappel::PointEmitterModel::set_bounds()`, `mappel::PointEmitterModel::set_hyperparam_names()`, `mappel::PointEmitterModel::set_hyperparam_value()`, `mappel::PointEmitterModel::set_hyperparams()`, `mappel::PointEmitterModel::set_lbound()`, `mappel::Gauss1DsModel::set_max_sigma()`, `mappel::Gauss1DsModel::set_min_sigma()`, `mappel::PointEmitterModel::set_param_names()`, `mappel::PointEmitterModel::set_prior()`, and `mappel::PointEmitterModel::set_ubound()`.

9.35.5.16 ParamT mappel::PointEmitterModel::ubound [protected],[inherited]

Definition at line 148 of file PointEmitterModel.h.

Referenced by mappel::PointEmitterModel::bound_theta(), mappel::PointEmitterModel::bounded_theta(), mappel::PointEmitterModel::get_stats(), mappel::PointEmitterModel::get_ubound(), mappel::Gauss1DsModel::initial_theta_estimate(), mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::PointEmitterModel::operator=(), mappel::PointEmitterModel::reflected_theta(), mappel::PointEmitterModel::set_bounds(), mappel::PointEmitterModel::set_lbound(), mappel::PointEmitterModel::set_prior(), mappel::PointEmitterModel::set_ubound(), and mappel::PointEmitterModel::theta_in_bounds().

The documentation for this class was generated from the following file:


- [MLEstimator.h](#)

9.36 mappel::ModelError Struct Reference

Access outside the model bounds is attempted.

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/util.h>
```

Inheritance diagram for mappel::ModelError:

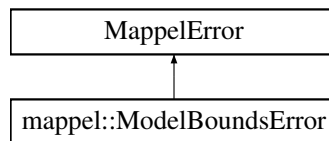

Public Member Functions

- [ModelError](#)(std::string message)

9.36.1 Detailed Description

Access outside the model bounds is attempted.

Definition at line 90 of file util.h.

9.36.2 Constructor & Destructor Documentation

9.36.2.1 mappel::ModelError::ModelError (std::string *message*) [inline]

Definition at line 92 of file util.h.


The documentation for this struct was generated from the following file:

- [util.h](#)

9.37 mappel::estimator::NewtonDiagonalMaximizer< Model > Class Template Reference

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/estimator.h>
```

Inheritance diagram for mappel::estimator::NewtonDiagonalMaximizer< Model >:

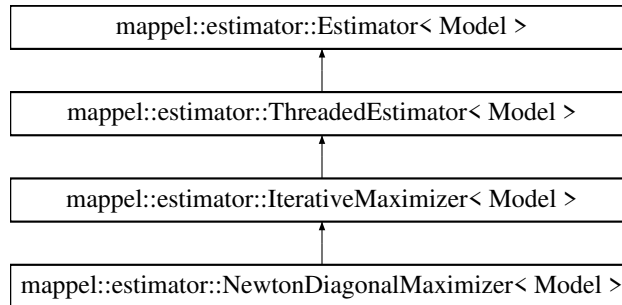

Public Types

- using [MaximizerData](#) = typename [IterativeMaximizer](#)< Model >::[MaximizerData](#)

Public Member Functions

- [NewtonDiagonalMaximizer](#) (const Model &model, int max_iterations=[IterativeMaximizer](#)< Model >::DefaultIterations)
- std::string name () const
- double mean_iterations ()
- double mean_backtracks ()
- double mean_fun_evals ()
- double mean_der_evals ()
- StatsT get_stats ()
- StatsT get_debug_stats ()
- void clear_stats ()
- int get_total_iterations () const
- int get_total_backtracks () const
- int get_total_fun_evals () const
- int get_total_der_evals () const
- void local_maximize (const [ModelDataT](#)< Model > &im, [StencilT](#)< Model > &stencil, [MLEData](#) &data)
Perform a local maximization to finish off a simulated annealing run.
- void local_maximize (const [ModelDataT](#)< Model > &im, [StencilT](#)< Model > &stencil, [MLEDebugData](#) &debug_data)
- void local_profile_maximize (const [ModelDataT](#)< Model > &im, const [IdxVecT](#) &fixed_param_idx, [StencilT](#)< Model > &stencil, [MLEDebugData](#) &mle)
- void estimate_max_stack (const [ModelDataStackT](#)< Model > &data, const [ParamVecT](#)< Model > &theta_init, [MLEDataStack](#) &mle_data_stack) override
- void estimate_profile_max (const [ModelDataT](#)< Model > &data, const [ParamVecT](#)< Model > &theta_init, [ProfileLikelihoodData](#) &profile) override
- void estimate_profile_bounds_parallel (const [ModelDataT](#)< Model > &data, [ProfileBoundsData](#) &bounds_est) override

- void `estimate_profile_bounds_stack` (const `ModelDataStackT`< `Model` > &data, `ProfileBoundsDataStack` &bounds_est_stack) override
- const `Model` & `get_model` ()
- void `estimate_max_stack` (const `ModelDataStackT`< `Model` > &data_stack, `MLEDDataStack` &mle_data_stack)
- void `estimate_max` (const `ModelDataT`< `Model` > &data, const `ParamT`< `Model` > &theta_init, `MLEDData` &mle_data, `StencilT`< `Model` > &mle_stencil)
- void `estimate_max` (const `ModelDataT`< `Model` > &data, const `ParamT`< `Model` > &theta_init, `MLEDData` &mle_data)
- void `estimate_max` (const `ModelDataT`< `Model` > &data, `MLEDData` &mle_data)
- void `estimate_max_debug` (const `ModelDataT`< `Model` > &data, const `ParamT`< `Model` > &theta_init, `MLEDData` &mle_data, `StencilT`< `Model` > &mle_stencil)
- void `estimate_max_debug` (const `ModelDataT`< `Model` > &data, const `ParamT`< `Model` > &theta_init, `MLEDData` &mle_data)
- double `estimate_profile_max` (const `ModelDataT`< `Model` > &data, const `IdxVecT` &fixed_idx, const `ParamT`< `Model` > &fixed_theta_init, `StencilT`< `Model` > &theta_max)
- void `estimate_profile_bounds` (const `ModelDataT`< `Model` > &data, `ProfileBoundsData` &bounds_est)
- void `estimate_profile_bounds_debug` (const `ModelDataT`< `Model` > &data, `ProfileBoundsDebugData` &bounds_est)
- `IdxVecT` `get_exit_counts` () const

Static Public Attributes

- static const int `DefaultIterations` =100

Protected Member Functions

- void `record_run_statistics` (const `MaximizerData` &data)
- void `compute_estimate` (const `ModelDataT`< `Model` > &data, const `ParamT`< `Model` > &theta_init, `MLEDData` &mle_data, `StencilT`< `Model` > &mle_stencil) override
- void `compute_estimate_debug` (const `ModelDataT`< `Model` > &data, const `ParamT`< `Model` > &theta_init, `MLEDData` &mle_data, `StencilT`< `Model` > &mle_stencil) override
- double `compute_profile_estimate` (const `ModelDataT`< `Model` > &data, const `ParamT`< `Model` > &theta_init, const `IdxVecT` &fixed_idx, `StencilT`< `Model` > &theta_max) override
- void `compute_profile_bound` (const `ModelDataT`< `Model` > &data, `ProfileBoundsData` &est, const `VecT` &init_step, `IdxT` param_idx, `IdxT` which_bound) override
- void `compute_profile_bound_debug` (const `ModelDataT`< `Model` > &data, `ProfileBoundsDebugData` &bounds) override
- bool `backtrack` (`MaximizerData` &data)
- bool `profile_bound_backtrack` (`MaximizerData` &data, `IdxT` fixed_idx, double target_rllh, double old_fval, const `VecT` &fgad)
- virtual void `maximize` (`MaximizerData` &data)=0
- virtual void `solve_profile_bound` (`MaximizerData` &data, `MLEDData` &mle, double llh_delta, `IdxT` fixed_idx, `IdxT` which_bound)
- bool `convergence_test_grad_ratio` (const `VecT` &grad, double fval)
- bool `convergence_test_step_size` (const `VecT` &new_theta, const `VecT` &old_theta)
- void `record_exit_code` (`ExitCode` code) override
- void `record_walltime` (`ClockT`::time_point start_walltime, int num_estimations)

Protected Attributes

- int [max_iterations](#)
- int [total_iterations](#) = 0
- int [total_backtracks](#) = 0
- int [total_fun_evals](#) = 0
- int [total_der_evals](#) = 0
- [IdxVecT](#) [last_backtrack_idx](#)s
Debugging: Stores last set of backtrack_idx when data.save_seq==true.
- int [max_threads](#)
- int [num_threads](#)
- std::mutex [mtx](#)
- const Model & [model](#)
- int [num_estimations](#) = 0
- double [total_walltime](#) = 0.
- [IdxVecT](#) [exit_counts](#)

Static Protected Attributes

- static const double [min_eigenvalue_correction_delta](#) = 1e-3
Ensure the minimum eigenvalue is at least this big when correcting indefinite matrix.
- static const double [convergence_min_function_change_ratio](#) = 1.0e-9
Convergence criteria: tolerance for function-value change.
- static const double [convergence_min_step_size_ratio](#) = 1.0e-9
Convergence criteria: tolerance of relative step size.
- static const double [backtrack_min_ratio](#) = 0.05
- static const double [backtrack_max_ratio](#) = 0.50
- static const double [backtrack_min_linear_step_ratio](#) = 1e-3
- static const int [max_backtracks](#) = 8
- static const double [min_profile_bound_residual](#) = 1e-4
Minimum residual in quadratic solutions of equation (8) to accept. Revert to newton step.

9.37.1 Detailed Description

```
template<class Model>
class mappel::estimator::NewtonDiagonalMaximizer< Model >
```

Definition at line 567 of file estimator.h.

9.37.2 Member Typedef Documentation

9.37.2.1 `template<class Model > using mappel::estimator::NewtonDiagonalMaximizer< Model >::MaximizerData = typename IterativeMaximizer<Model>::MaximizerData`

Definition at line 570 of file estimator.h.

9.37.3 Constructor & Destructor Documentation

9.37.3.1 `template<class Model> mappel::estimator::NewtonDiagonalMaximizer< Model>::NewtonDiagonalMaximizer (const Model & model, int max_iterations = IterativeMaximizer<Model>::DefaultIterations) [inline]`

Definition at line 572 of file estimator.h.

9.37.4 Member Function Documentation

9.37.4.1 `template<class Model> bool mappel::estimator::IterativeMaximizer< Model>::backtrack (MaximizerData & data) [protected], [inherited]`

Definition at line 870 of file estimator_impl.h.

References `mappel::estimator::IterativeMaximizer< Model>::backtrack_min_linear_step_ratio`, `mappel::clamp()`, `mappel::estimator::IterativeMaximizer< Model>::convergence_min_step_size_ratio`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::grad`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::im`, `mappel::estimator::IterativeMaximizer< Model>::max_backtracks`, `mappel::estimator::MaxBacktracks`, `mappel::estimator::Estimator< Model>::model`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::record_backtrack()`, `mappel::estimator::ThreadedEstimator< Model>::record_exit_code()`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::record_iteration()`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::restore_stencil()`, `mappel::methods::objective::rllh()`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::rllh`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::save_stencil()`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::saved_theta()`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::set_stencil()`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::stencil()`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::step`, `mappel::estimator::StepSize`, and `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::theta()`.

Referenced by `mappel::estimator::IterativeMaximizer< Model>::local_profile_maximize()`.

9.37.4.2 `template<class Model> void mappel::estimator::IterativeMaximizer< Model>::clear_stats () [virtual], [inherited]`

Run statistics.

Reimplemented from [mappel::estimator::ThreadedEstimator< Model>](#).

Definition at line 848 of file estimator_impl.h.

References `mappel::estimator::ThreadedEstimator< Model>::clear_stats()`, `mappel::estimator::ThreadedEstimator< Model>::mtx`, `mappel::estimator::IterativeMaximizer< Model>::total_backtracks`, `mappel::estimator::IterativeMaximizer< Model>::total_der_evals`, `mappel::estimator::IterativeMaximizer< Model>::total_fun_evals`, and `mappel::estimator::IterativeMaximizer< Model>::total_iterations`.

9.37.4.3 `template<class Model> void mappel::estimator::IterativeMaximizer< Model >::compute_estimate (const ModelDataT< Model > & data, const ParamT< Model > & theta_init, MLEData & mle_data, StencilT< Model > & mle_stencil)` [override], [protected], [virtual], [inherited]

Implements [mappel::estimator::Estimator< Model >](#).

Definition at line 1043 of file estimator_impl.h.

References [mappel::estimator::IterativeMaximizer< Model >::maximize\(\)](#), [mappel::estimator::Estimator< Model >::model](#), [mappel::methods::observed_information\(\)](#), [mappel::estimator::MLEData::obsI](#), [mappel::estimator::IterativeMaximizer< Model >::record_run_statistics\(\)](#), [mappel::estimator::MLEData::rllh](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::rllh](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::stencil\(\)](#), [mappel::estimator::MLEData::theta](#), and [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::theta\(\)](#).

9.37.4.4 `template<class Model> void mappel::estimator::IterativeMaximizer< Model >::compute_estimate_debug (const ModelDataT< Model > & im, const ParamT< Model > & theta_init, MLEDebugData & mle_debug, StencilT< Model > & mle_stencil)` [override], [protected], [virtual], [inherited]

Virtual `estimate_debug` interface

Estimators that produce a sequence of results (e.g. `IterativeEstimators`) can override this dummy debug implementation.

Reimplemented from [mappel::estimator::Estimator< Model >](#).

Definition at line 1057 of file estimator_impl.h.

References [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::get_theta_sequence\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::get_theta_sequence_rllh\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::maximize\(\)](#), [mappel::estimator::Estimator< Model >::model](#), [mappel::methods::observed_information\(\)](#), [mappel::estimator::MLEDebugData::obsI](#), [mappel::estimator::IterativeMaximizer< Model >::record_run_statistics\(\)](#), [mappel::estimator::MLEDebugData::rllh](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::rllh](#), [mappel::estimator::MLEDebugData::sequence](#), [mappel::estimator::MLEDebugData::sequence_rllh](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::stencil\(\)](#), [mappel::estimator::MLEDebugData::theta](#), and [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::theta\(\)](#).

9.37.4.5 `template<class Model> void mappel::estimator::IterativeMaximizer< Model >::compute_profile_bound (const ModelDataT< Model > & data, ProfileBoundsData & est, const VecT & init_step, IdxT param_idx, IdxT which_bound)` [override], [protected], [virtual], [inherited]

Reimplemented from [mappel::estimator::Estimator< Model >](#).

Definition at line 1088 of file estimator_impl.h.

References [mappel::estimator::ProfileBoundsData::estimated_idx](#), [mappel::estimator::ProfileBoundsData::mle](#), [mappel::estimator::Estimator< Model >::model](#), [mappel::estimator::ProfileBoundsData::profile_lb](#), [mappel::estimator::ProfileBoundsData::profile_points_lb](#), [mappel::estimator::ProfileBoundsData::profile_points_lb_rllh](#), [mappel::estimator::ProfileBoundsData::profile_points_ub](#), [mappel::estimator::ProfileBoundsData::profile_points_ub_rllh](#), [mappel::estimator::ProfileBoundsData::profile_ub](#), [mappel::estimator::IterativeMaximizer< Model >::record_run_statistics\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::solve_profile_bound\(\)](#), [mappel::estimator::ProfileBoundsData::target_rllh_delta](#), and [mappel::estimator::MLEData::theta](#).

9.37.4.6 `template<class Model> void mappel::estimator::IterativeMaximizer< Model >::compute_profile_bound_debug (const ModelDataT< Model > & data, ProfileBoundsDebugData & bounds) [override], [protected], [virtual], [inherited]`

Reimplemented from [mappel::estimator::Estimator< Model >](#).

Definition at line 1114 of file estimator_impl.h.

References `mappel::estimator::ProfileBoundsDebugData::estimated_idx`, `mappel::estimator::ProfileBoundsDebugData::mle`, `mappel::estimator::Estimator< Model >::model`, `mappel::estimator::ProfileBoundsDebugData::Nseq_lb`, `mappel::estimator::ProfileBoundsDebugData::Nseq_ub`, `mappel::estimator::MLEData::obs1`, `mappel::estimator::ProfileBoundsDebugData::profile_lb`, `mappel::estimator::ProfileBoundsDebugData::profile_ub`, `mappel::estimator::IterativeMaximizer< Model >::record_run_statistics()`, `mappel::estimator::ProfileBoundsDebugData::sequence_lb`, `mappel::estimator::ProfileBoundsDebugData::sequence_lb_rllh`, `mappel::estimator::ProfileBoundsDebugData::sequence_ub`, `mappel::estimator::ProfileBoundsDebugData::sequence_ub_rllh`, `mappel::estimator::IterativeMaximizer< Model >::solve_profile_bound()`, `mappel::estimator::subroutine::solve_profile_initial_step()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::step`, `mappel::estimator::ProfileBoundsDebugData::target_rllh_delta`, and `mappel::estimator::MLEData::theta`.

9.37.4.7 `template<class Model> double mappel::estimator::IterativeMaximizer< Model >::compute_profile_estimate (const ModelDataT< Model > & data, const ParamT< Model > & theta_init, const IdxVecT & fixed_idxs, StencilT< Model > & theta_max) [override], [protected], [virtual], [inherited]`

Reimplemented from [mappel::estimator::Estimator< Model >](#).

Definition at line 1074 of file estimator_impl.h.

References `mappel::estimator::IterativeMaximizer< Model >::maximize()`, `mappel::estimator::Estimator< Model >::model`, `mappel::estimator::IterativeMaximizer< Model >::record_run_statistics()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::rllh`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::set_fixed_parameters()`, and `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::stencil()`.

9.37.4.8 `template<class Model> bool mappel::estimator::IterativeMaximizer< Model >::convergence_test_grad_ratio (const VecT & grad, double fval) [protected], [inherited]`

Definition at line 1015 of file estimator_impl.h.

References `mappel::estimator::IterativeMaximizer< Model >::convergence_min_function_change_ratio`, `mappel::estimator::GradRatio`, `mappel::norm_sq()`, `mappel::estimator::ThreadedEstimator< Model >::record_exit_code()`, and `mappel::square()`.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.37.4.9 `template<class Model> bool mappel::estimator::IterativeMaximizer< Model >::convergence_test_step_size (const VecT & new_theta, const VecT & old_theta) [protected], [inherited]`

Definition at line 1027 of file estimator_impl.h.

References `mappel::estimator::IterativeMaximizer< Model >::convergence_min_step_size_ratio`, `mappel::norm_sq()`, `mappel::estimator::ThreadedEstimator< Model >::record_exit_code()`, and `mappel::estimator::StepSize`.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.37.4.10 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max (const ModelDataT< Model > & data, const ParamT< Model > & theta_init, MLEData & mle_data, StencilT< Model > & mle_stencil)`
`[inherited]`

Maximum likelihood point estimators Estimate for a single data starting at theta_init, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with theta_init, theta_init is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of theta_init will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 128 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model >::compute_estimate()`, `mappel::estimator::Error`, `mappel::estimator::MLEData::obsI`, `mappel::print_text_image()`, `mappel::estimator::Estimator< Model >::record_exit_code()`, `mappel::estimator::Estimator< Model >::record_walltime()`, `mappel::estimator::MLEData::rllh`, and `mappel::estimator::MLEData::theta`.

Referenced by `mappel::estimator::Estimator< Model >::estimate_max()`.

9.37.4.11 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max (const ModelDataT< Model > & data, const ParamT< Model > & theta_init, MLEData & mle_data)` `[inherited]`

Maximum likelihood point estimators Estimate for a single data starting at theta_init, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with theta_init, theta_init is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of theta_init will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 121 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model >::estimate_max()`.

9.37.4.12 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max (const ModelDataT< Model > & data, MLEData & mle_data) [inherited]`

Maximum likelihood point estimators Estimate for a single data starting at `theta_init`, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with `theta_init`, `theta_init` is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of `theta_init` will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 112 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::estimate_max()`, and `mappel::estimator::Estimator< Model >::model`.

9.37.4.13 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max_debug (const ModelDataT< Model > & data, const ParamT< Model > & theta_init, MLEDebugData & mle_data, StencilT< Model > & mle_stencil) [inherited]`

Debug estimation for a single data starting at `theta_init`, fill in the [MLEDebugData](#) struct with data including the sequence of evaluated points. Estimation is initialized with `theta_init`, `theta_init` is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of `theta_init` will not be modified in the initialization process.

The sequence and `sequence_rllh` parameters of the [MLEDebugData](#) struct record the entire sequence of evaluated points including `theta_init` and `theta_mle`, which should be first and last respectively.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	Initial theta value.
out	<i>mle_data</i>	MLEDebugData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

9.37.4.14 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max_debug (const ModelDataT< Model > & data, const ParamT< Model > & theta_init, MLEDebugData & mle_data)`
`[inherited]`

Maximum likelihood point estimators Estimate for a single data starting at `theta_init`, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with `theta_init`, `theta_init` is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of `theta_init` will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 157 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::compute_estimate_debug()`, `mappel::estimator::Error`, `mappel::estimator::MLEDebugData::obsI`, `mappel::print_text_image()`, `mappel::estimator::Estimator< Model >::record_exit_code()`, `mappel::estimator::Estimator< Model >::record_walltime()`, `mappel::estimator::MLEDebugData::rllh`, and `mappel::estimator::MLEDebugData::theta`.

9.37.4.15 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max_stack (const ModelDataStackT< Model > & data_stack, MLEDataStack & mle_data_stack)` `[inherited]`

Maximum likelihood point estimators Estimate for a single data starting at `theta_init`, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with `theta_init`, `theta_init` is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of `theta_init` will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 183 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::estimate_max_stack()`, and `mappel::estimator::Estimator< Model >::model`.

9.37.4.16 `template<class Model > void mappel::estimator::ThreadedEstimator< Model >::estimate_max_stack (const ModelDataStackT< Model > & data_stack, const ParamVecT< Model > & theta_init_stack, MLEDataStack & mle_data_stack)` [override],[virtual],[inherited]

Estimate for a stack of data and fill in the [MLEDataStack](#) struct with the estimated parameter, RLLH, and observed information for each data in parallel. Estimation is initialized with `theta_init`, `theta_init` is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of `theta_init` will not be modified in the initialization process.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[optional] Initial theta value for each image.
out	<i>mle</i>	MLEStackData records the maximum likelihood estimate, RLLH, and Observed information for each data

Implements [mappel::estimator::Estimator< Model >](#).

Definition at line 377 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::compute_estimate()`, `mappel::estimator::Error`, `mappel::estimator::Estimator< Model >::model`, `mappel::estimator::MLEDataStack::Ndata`, `mappel::estimator::ThreadedEstimator< Model >::num_threads`, `mappel::estimator::MLEData::obsI`, `mappel::estimator::MLEDataStack::obsI`, `mappel::print_text_image()`, `mappel::estimator::ThreadedEstimator< Model >::record_exit_code()`, `mappel::estimator::Estimator< Model >::record_walltime()`, `mappel::estimator::MLEData::rllh`, `mappel::estimator::MLEDataStack::rllh`, `mappel::estimator::MLEData::theta`, and `mappel::estimator::MLEDataStack::theta`.

9.37.4.17 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_profile_bounds (const ModelDataT< Model > & data, ProfileBoundsData & bounds_est)` [inherited]

Profile likelihood bounds computations with VM algorithm

Definition at line 220 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::compute_profile_bound()`, `mappel::estimator::Error`, `mappel::estimator::ProfileBoundsData::estimated_idx`, `mappel::estimator::ProfileBoundsData::initialize_arrays()`, `mappel::estimator::ProfileBoundsData::mle`, `mappel::estimator::Estimator< Model >::model`, `mappel::estimator::ProfileBoundsData::Nparams_est`, `mappel::estimator::MLEData::obsI`, `mappel::print_text_image()`, `mappel::estimator::ProfileBoundsData::profile_lb`, `mappel::estimator::ProfileBoundsData::profile_points_lb`, `mappel::estimator::ProfileBoundsData::profile_points_lb_rllh`, `mappel::estimator::ProfileBoundsData::profile_points_ub`, `mappel::estimator::ProfileBoundsData::profile_ub`, `mappel::estimator::Estimator< Model >::record_exit_code()`, `mappel::estimator::Estimator< Model >::record_walltime()`, `mappel::estimator::subroutine::solve_profile_initial_step()`, `mappel::estimator::ProfileBoundsData::target_rllh_delta`, and `mappel::estimator::MLEData::theta`.

Referenced by `mappel::methods::error_bounds_profile_likelihood()`.

9.37.4.18 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_profile_bounds_debug (const ModelDataT< Model > & data, ProfileBoundsDebugData & bounds_est)` [inherited]

Profile likelihood bounds computations with VM algorithm

Definition at line 258 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model >::compute_profile_bound_debug()`, `mappel::estimator::Error`, `mappel::estimator::ProfileBoundsDebugData::estimated_idx`, `mappel::estimator::ProfileBoundsDebugData::mle`, `mappel::print_text_image()`, `mappel::estimator::Estimator< Model >::record_exit_code()`, `mappel::estimator::Estimator< Model >::record_walltime()`, `mappel::estimator::ProfileBoundsDebugData::target_rllh_delta`, and `mappel::estimator::MLEData::theta`.

Referenced by `mappel::methods::debug::error_bounds_profile_likelihood_debug()`.

9.37.4.19 `template<class Model > void mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel (const ModelDataT< Model > & data, ProfileBoundsData & bounds_est)` [override], [virtual], [inherited]

Profile likelihood bounds computations with VM algorithm

Implements [mappel::estimator::Estimator< Model >](#).

Definition at line 464 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model >::compute_profile_bound()`, `mappel::estimator::Error`, `mappel::estimator::ProfileBoundsData::estimated_idx`s, `mappel::estimator::ProfileBoundsData::initialize_arrays()`, `mappel::estimator::ProfileBoundsData::mle`, `mappel::estimator::Estimator< Model >::model`, `mappel::estimator::ProfileBoundsData::Nparams_est`, `mappel::estimator::ThreadedEstimator< Model >::num_threads`, `mappel::estimator::MLEData::obs`, `mappel::print_text_image()`, `mappel::estimator::ThreadedEstimator< Model >::record_exit_code()`, `mappel::estimator::Estimator< Model >::record_walltime()`, `mappel::estimator::subroutine::solve_profile_initial_step()`, `mappel::estimator::ProfileBoundsData::target_rllh_delta`, and `mappel::estimator::MLEData::theta`.

Referenced by `mappel::methods::openmp::error_bounds_profile_likelihood_parallel()`.

9.37.4.20 `template<class Model > void mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack (const ModelDataStackT< Model > & data_stack, ProfileBoundsDataStack & bounds_est)` [override], [virtual], [inherited]

Profile likelihood bounds computations with VM algorithm

Implements [mappel::estimator::Estimator< Model >](#).

Definition at line 500 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model >::compute_profile_bound()`, `mappel::estimator::Error`, `mappel::estimator::ProfileBoundsData::estimated_idx`s, `mappel::estimator::ProfileBoundsDataStack::estimated_idx`s, `mappel::estimator::ProfileBoundsData::initialize_arrays()`, and `mappel::estimator::ProfileBoundsDataStack::initialize_arrays()`.

mappel::estimator::ProfileBoundsData::mle, mappel::estimator::ProfileBoundsDataStack::mle, mappel::estimator::Estimator< Model >::model, mappel::estimator::ProfileBoundsDataStack::Ndata, mappel::estimator::ProfileBoundsDataStack::Nparams_est, mappel::estimator::ThreadedEstimator< Model >::num_threads, mappel::estimator::MLEData::obsI, mappel::estimator::MLEDataStack::obsI, mappel::print_text_image(), mappel::estimator::ProfileBoundsData::profile_lb, mappel::estimator::ProfileBoundsDataStack::profile_lb, mappel::estimator::ProfileBoundsData::profile_points_lb, mappel::estimator::ProfileBoundsDataStack::profile_points_lb, mappel::estimator::ProfileBoundsData::profile_points_lb_rllh, mappel::estimator::ProfileBoundsDataStack::profile_points_lb_rllh, mappel::estimator::ProfileBoundsData::profile_points_ub, mappel::estimator::ProfileBoundsDataStack::profile_points_ub, mappel::estimator::ProfileBoundsData::profile_points_ub_rllh, mappel::estimator::ProfileBoundsDataStack::profile_points_ub_rllh, mappel::estimator::ProfileBoundsData::profile_ub, mappel::estimator::ProfileBoundsDataStack::profile_ub, mappel::estimator::ThreadedEstimator< Model >::record_exit_code(), mappel::estimator::Estimator< Model >::record_walltime(), mappel::estimator::MLEData::rllh, mappel::estimator::MLEDataStack::rllh, mappel::estimator::subroutine::solve_profile_initial_step(), mappel::estimator::ProfileBoundsData::target_rllh_delta, mappel::estimator::ProfileBoundsDataStack::target_rllh_delta, mappel::estimator::MLEData::theta, and mappel::estimator::MLEDataStack::theta.

Referenced by mappel::methods::openmp::error_bounds_profile_likelihood_stack().

9.37.4.21 `template<class Model> double mappel::estimator::Estimator< Model >::estimate_profile_max (const ModelDataT< Model > & data, const IdxVecT & fixed_idx, const ParamT< Model > & fixed_theta_init, StencilT< Model > & theta_max) [inherited]`

Profile likelihood estimation methods

Definition at line 190 of file estimator_impl.h.

References mappel::estimator::Estimator< Model >::compute_profile_estimate(), mappel::estimator::Error, mappel::print_text_image(), mappel::estimator::Estimator< Model >::record_exit_code(), mappel::estimator::Estimator< Model >::record_walltime(), and mappel::methods::objective::rllh().

9.37.4.22 `template<class Model> void mappel::estimator::ThreadedEstimator< Model >::estimate_profile_max (const ModelDataT< Model > & data, const ParamVecT< Model > & fixed_theta_init, ProfileLikelihoodData & profile) [override],[virtual],[inherited]`

Profile likelihood estimation methods

Implements [mappel::estimator::Estimator< Model >](#).

Definition at line 418 of file estimator_impl.h.

References mappel::estimator::Estimator< Model >::compute_profile_estimate(), mappel::estimator::Error, mappel::estimator::ProfileLikelihoodData::fixed_idx, mappel::estimator::ProfileLikelihoodData::fixed_values, mappel::estimator::Estimator< Model >::model, mappel::estimator::ProfileLikelihoodData::Nfixed, mappel::estimator::ThreadedEstimator< Model >::num_threads, mappel::estimator::ProfileLikelihoodData::Nvalues, mappel::print_text_image(), mappel::estimator::ProfileLikelihoodData::profile_likelihood, mappel::estimator::ProfileLikelihoodData::profile_parameters, mappel::estimator::ThreadedEstimator< Model >::record_exit_code(), and mappel::estimator::Estimator< Model >::record_walltime().

9.37.4.23 `template<class Model > StatsT mappel::estimator::IterativeMaximizer< Model >::get_debug_stats ()`
`[virtual], [inherited]`

Run statistics.

Reimplemented from [mappel::estimator::ThreadedEstimator< Model >](#).

Definition at line 832 of file `estimator_impl.h`.

References `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::backtrack_idx`s, `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, and `mappel::estimator::IterativeMaximizer< Model >::last_backtrack_idx`s.

9.37.4.24 `template<class Model > IdxVecT mappel::estimator::Estimator< Model >::get_exit_counts () const`
`[inline], [inherited]`

Run statistics.

Definition at line 274 of file `estimator.h`.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.37.4.25 `template<class Model > const Model & mappel::estimator::Estimator< Model >::get_model ()`
`[inherited]`

Definition at line 108 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::model`.

9.37.4.26 `template<class Model > StatsT mappel::estimator::IterativeMaximizer< Model >::get_stats ()`
`[virtual], [inherited]`

Run statistics.

Reimplemented from [mappel::estimator::ThreadedEstimator< Model >](#).

Definition at line 811 of file `estimator_impl.h`.

References `mappel::estimator::IterativeMaximizer< Model >::convergence_min_function_change_ratio`, `mappel::estimator::IterativeMaximizer< Model >::convergence_min_step_size_ratio`, `mappel::estimator::ThreadedEstimator< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::max_backtracks`, `mappel::estimator::IterativeMaximizer< Model >::max_iterations`, `mappel::estimator::ThreadedEstimator< Model >::mtx`, `mappel::estimator::Estimator< Model >::num_estimations`, `mappel::estimator::IterativeMaximizer< Model >::total_backtracks`, `mappel::estimator::IterativeMaximizer< Model >::total_der_evals`, `mappel::estimator::IterativeMaximizer< Model >::total_fun_evals`, and `mappel::estimator::IterativeMaximizer< Model >::total_iterations`.

Referenced by `mappel::methods::error_bounds_profile_likelihood()`, `mappel::methods::debug::error_bounds_profile_likelihood_debug()`, `mappel::methods::openmp::error_bounds_profile_likelihood_parallel()`, `mappel::methods::openmp::error_bounds_profile_likelihood_stack()`, `mappel::estimator::SimulatedAnnealingMaximizer< Model >::get_debug_stats()`, and `mappel::estimator::IterativeMaximizer< Model >::get_debug_stats()`.

9.37.4.27 `template<class Model> int mappel::estimator::IterativeMaximizer< Model>::get_total_backtracks () const`
`[inline],[inherited]`

Definition at line 441 of file estimator.h.

9.37.4.28 `template<class Model> int mappel::estimator::IterativeMaximizer< Model>::get_total_der_evals () const`
`[inline],[inherited]`

Definition at line 443 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model>::local_profile_maximize()`.

9.37.4.29 `template<class Model> int mappel::estimator::IterativeMaximizer< Model>::get_total_fun_evals () const`
`[inline],[inherited]`

Definition at line 442 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model>::local_profile_maximize()`.

9.37.4.30 `template<class Model> int mappel::estimator::IterativeMaximizer< Model>::get_total_iterations () const`
`[inline],[inherited]`

Definition at line 440 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model>::local_profile_maximize()`.

9.37.4.31 `template<class Model> void mappel::estimator::IterativeMaximizer< Model>::local_maximize (const`
`ModelDataT< Model> & im, StencilT< Model> & stencil, MLEData & data) [inherited]`

Perform a local maximization to finish off a simulated annealing run.

Definition at line 1145 of file estimator_impl.h.

References `mappel::estimator::IterativeMaximizer< Model>::maximize()`, `mappel::estimator::Estimator< Model>::model`, `mappel::methods::observed_information()`, `mappel::estimator::MLEData::obsI`, `mappel::estimator::IterativeMaximizer< Model>::record_run_statistics()`, `mappel::estimator::MLEData::rllh`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::rllh`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::stencil()`, `mappel::estimator::MLEData::theta`, and `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::theta()`.

Referenced by `mappel::estimator::IterativeMaximizer< Model>::local_profile_maximize()`.

9.37.4.32 `template<class Model> void mappel::estimator::IterativeMaximizer< Model>::local_maximize (const`
`ModelDataT< Model> & im, StencilT< Model> & stencil, MLEDebugData & debug_data) [inherited]`

Definition at line 1158 of file estimator_impl.h.

References `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::get_theta_sequence()`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::get_theta_sequence_rllh()`, `mappel::estimator::IterativeMaximizer< Model>::maximize()`, `mappel::estimator::Estimator< Model>::model`, `mappel::methods::observed_information()`, `mappel::estimator::MLEDebugData::obsI`, `mappel::estimator::IterativeMaximizer< Model>::record_run_statistics()`, `mappel::estimator::MLEDebugData::rllh`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::rllh`, `mappel::estimator::MLEDebugData::sequence`, `mappel::estimator::MLEDebugData::sequence_rllh`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::stencil()`, `mappel::estimator::MLEDebugData::theta`, and `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::theta()`.

9.37.4.33 `template<class Model> void mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize (const ModelDataT< Model > & im, const IdxVecT & fixed_param_idx, StencilT< Model > & stencil, MLEDebugData & mle) [inherited]`

Definition at line 1173 of file estimator_impl.h.

References `mappel::estimator::IterativeMaximizer< Model >::backtrack()`, `mappel::estimator::subroutine::bound_step()`, `mappel::clamp()`, `mappel::estimator::subroutine::compute_bound_scaling_vec()`, `mappel::estimator::subroutine::compute_cauchy_point()`, `mappel::estimator::subroutine::compute_initial_trust_radius()`, `mappel::estimator::subroutine::compute_quadratic_model_value()`, `mappel::estimator::subroutine::compute_scaled_problem()`, `mappel::estimator::IterativeMaximizer< Model >::convergence_test_grad_ratio()`, `mappel::estimator::IterativeMaximizer< Model >::convergence_test_step_size()`, `mappel::estimator::Estimator< Model >::exit_counts`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::fixed_idx`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::free_idx`, `mappel::estimator::Estimator< Model >::get_exit_counts()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::get_theta_sequence()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::get_theta_sequence_rllh()`, `mappel::estimator::IterativeMaximizer< Model >::get_total_der_evals()`, `mappel::estimator::IterativeMaximizer< Model >::get_total_fun_evals()`, `mappel::estimator::IterativeMaximizer< Model >::get_total_iterations()`, `mappel::methods::objective::grad()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::grad`, `mappel::methods::objective::grad2()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::has_fixed_parameters()`, `mappel::methods::objective::hessian()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::im`, `mappel::is_positive_definite()`, `mappel::estimator::IterativeMaximizer< Model >::local_maximize()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, `mappel::estimator::IterativeMaximizer< Model >::max_iterations`, `mappel::estimator::IterativeMaximizer< Model >::maximize()`, `mappel::estimator::MaxIter`, `mappel::estimator::IterativeMaximizer< Model >::min_profile_bound_residual`, `mappel::estimator::Estimator< Model >::model`, `mappel::estimator::ThreadedEstimator< Model >::mtx`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::num_fixed_parameters()`, `mappel::methods::observed_information()`, `mappel::estimator::MLEData::obs`, `mappel::estimator::MLEDebugData::obs`, `mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::record_backtrack()`, `mappel::estimator::ThreadedEstimator< Model >::record_exit_code()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::record_iteration()`, `mappel::estimator::IterativeMaximizer< Model >::record_run_statistics()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::restore_stencil()`, `mappel::estimator::MLEData::rllh`, `mappel::methods::objective::rllh()`, `mappel::estimator::MLEDebugData::rllh`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::rllh`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::s0`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::s1`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::save_stencil()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::saved_theta()`, `mappel::estimator::MLEDebugData::sequence`, `mappel::estimator::MLEDebugData::sequence_rllh`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::set_fixed_parameters()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::set_stencil()`, `mappel::estimator::subroutine::solve_TR_subproblem()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::stencil()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::step`, `mappel::estimator::MLEData::theta`, `mappel::estimator::MLEDebugData::theta`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::theta()`, `mappel::estimator::IterativeMaximizer< Model >::total_der_evals`, `mappel::estimator::IterativeMaximizer< Model >::total_fun_evals`, `mappel::estimator::IterativeMaximizer< Model >::total_iterations`, and `mappel::estimator::TrustRegionRadius`.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.37.4.34 `template<class Model> virtual void mappel::estimator::IterativeMaximizer< Model >::maximize (MaximizerData & data) [protected],[pure virtual],[inherited]`

Referenced by `mappel::estimator::IterativeMaximizer< Model >::compute_estimate()`, `mappel::estimator::IterativeMaximizer< Model >::compute_estimate_debug()`, `mappel::estimator::IterativeMaximizer< Model >::compute_profile_estimate()`, `mappel::estimator::IterativeMaximizer< Model >::local_maximize()`, and `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.37.4.35 `template<class Model > double mappel::estimator::IterativeMaximizer< Model >::mean_backtracks ()`
[inherited]

9.37.4.36 `template<class Model > double mappel::estimator::IterativeMaximizer< Model >::mean_der_evals ()`
[inherited]

9.37.4.37 `template<class Model > double mappel::estimator::IterativeMaximizer< Model >::mean_fun_evals ()`
[inherited]

9.37.4.38 `template<class Model > double mappel::estimator::IterativeMaximizer< Model >::mean_iterations ()`
[inherited]

9.37.4.39 `template<class Model > std::string mappel::estimator::NewtonDiagonalMaximizer< Model >::name () const`
[inline],[virtual]

Implements [mappel::estimator::Estimator< Model >](#).

Definition at line 575 of file estimator.h.

9.37.4.40 `template<class Model > bool mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack (`
`MaximizerData & data, IdxT fixed_idx, double target_rllh, double old_fval, const VecT & fgrad)` [protected],
[inherited]

Definition at line 943 of file estimator_impl.h.

References [mappel::estimator::IterativeMaximizer< Model >::backtrack_max_ratio](#), [mappel::estimator::IterativeMaximizer< Model >::backtrack_min_linear_step_ratio](#), [mappel::estimator::IterativeMaximizer< Model >::backtrack_min_ratio](#), [mappel::clamp\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::convergence_min_step_size_ratio](#), [mappel::methods::objective::grad\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::im](#), [mappel::estimator::IterativeMaximizer< Model >::max_backtracks](#), [mappel::estimator::MaxBacktracks](#), [mappel::estimator::Estimator< Model >::model](#), [mappel::norm_sq\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::record_backtrack\(\)](#), [mappel::estimator::ThreadedEstimator< Model >::record_exit_code\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::record_iteration\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::restore_stencil\(\)](#), [mappel::methods::objective::rllh\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::rllh](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::save_stencil\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::saved_theta\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::set_stencil\(\)](#), [mappel::square\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::stencil\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::step](#), [mappel::estimator::StepSize](#), and [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::theta\(\)](#).

Referenced by [mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize\(\)](#).

9.37.4.41 `template<class Model> void mappel::estimator::ThreadedEstimator< Model >::record_exit_code (ExitCode code)` [override], [protected], [virtual], [inherited]

Implements [mappel::estimator::Estimator< Model >](#).

Definition at line 578 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::exit_counts`, `mappel::estimator::Estimator< Model >::model`, `mappel::estimator::ThreadedEstimator< Model >::mtx`, `mappel::methods::observed_information()`, `mappel::estimator::MLEData::obsI`, `mappel::estimator::MLEData::rllh`, `mappel::methods::objective::rllh()`, `mappel::estimator::Success`, and `mappel::estimator::MLEData::theta`.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::backtrack()`, `mappel::estimator::IterativeMaximizer< Model >::convergence_test_grad_ratio()`, `mappel::estimator::IterativeMaximizer< Model >::convergence_test_step_size()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_max_stack()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_max()`, `mappel::estimator::HeuristicEstimator< Model >::get_debug_stats()`, `mappel::estimator::CGaussMLE< Model >::get_debug_stats()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, and `mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack()`.

9.37.4.42 `template<class Model> void mappel::estimator::IterativeMaximizer< Model >::record_run_statistics (const MaximizerData & data)` [protected], [inherited]

Definition at line 859 of file `estimator_impl.h`.

References `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::get_backtrack_idxes()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::has_theta_sequence()`, `mappel::estimator::IterativeMaximizer< Model >::last_backtrack_idxes`, `mappel::estimator::ThreadedEstimator< Model >::mtx`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::nBacktracks`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::nIterations`, `mappel::estimator::IterativeMaximizer< Model >::total_backtracks`, `mappel::estimator::IterativeMaximizer< Model >::total_der_evals`, `mappel::estimator::IterativeMaximizer< Model >::total_fun_evals`, and `mappel::estimator::IterativeMaximizer< Model >::total_iterations`.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::compute_estimate()`, `mappel::estimator::IterativeMaximizer< Model >::compute_estimate_debug()`, `mappel::estimator::IterativeMaximizer< Model >::compute_profile_bound()`, `mappel::estimator::IterativeMaximizer< Model >::compute_profile_bound_debug()`, `mappel::estimator::IterativeMaximizer< Model >::compute_profile_estimate()`, `mappel::estimator::IterativeMaximizer< Model >::local_maximize()`, and `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.37.4.43 `template<class Model> void mappel::estimator::Estimator< Model >::record_walltime (ClockT::time_point start_walltime, int num_estimations)` [protected], [inherited]

Definition at line 360 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::num_estimations`, and `mappel::estimator::Estimator< Model >::total_walltime`.

Referenced by `mappel::estimator::Estimator< Model >::estimate_max()`, `mappel::estimator::Estimator< Model >::estimate_max_debug()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_max_stack()`, `mappel::estimator::Estimator< Model >::estimate_profile_bounds()`, `mappel::estimator::Estimator< Model >::estimate_profile_bounds_debug()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack()`, `mappel::estimator::Estimator< Model >::estimate_profile_max()`, and `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_max()`.

9.37.4.44 `template<class Model > void mappel::estimator::IterativeMaximizer< Model >::solve_profile_bound (MaximizerData & data, MLEData & mle, double llh_delta, IdxT fixed_idx, IdxT which_bound) [protected], [virtual], [inherited]`

Definition at line 1137 of file estimator_impl.h.

References mappel::estimator::Estimator< Model >::name().

Referenced by mappel::estimator::IterativeMaximizer< Model >::compute_profile_bound(), and mappel::estimator::IterativeMaximizer< Model >::compute_profile_bound_debug().

9.37.5 Member Data Documentation

9.37.5.1 `template<class Model > const double mappel::estimator::IterativeMaximizer< Model >::backtrack_max_ratio = 0.50 [static], [protected], [inherited]`

Definition at line 460 of file estimator.h.

Referenced by mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack().

9.37.5.2 `template<class Model > const double mappel::estimator::IterativeMaximizer< Model >::backtrack_min_linear_step_ratio = 1e-3 [static], [protected], [inherited]`

Definition at line 461 of file estimator.h.

Referenced by mappel::estimator::IterativeMaximizer< Model >::backtrack(), and mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack().

9.37.5.3 `template<class Model > const double mappel::estimator::IterativeMaximizer< Model >::backtrack_min_ratio = 0.05 [static], [protected], [inherited]`

Definition at line 459 of file estimator.h.

Referenced by mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack().

9.37.5.4 `template<class Model > const double mappel::estimator::IterativeMaximizer< Model >::convergence_min_function_change_ratio = 1.0e-9 [static], [protected], [inherited]`

Convergence criteria: tolerance for function-value change.

Definition at line 456 of file estimator.h.

Referenced by mappel::estimator::IterativeMaximizer< Model >::convergence_test_grad_ratio(), and mappel::estimator::IterativeMaximizer< Model >::get_stats().

9.37.5.5 `template<class Model > const double mappel::estimator::IterativeMaximizer< Model >::convergence_min_step_size_ratio = 1.0e-9` [static], [protected], [inherited]

Convergence criteria: tolerance of relative step size.

Definition at line 457 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::backtrack()`, `mappel::estimator::IterativeMaximizer< Model >::convergence_test_step_size()`, `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, and `mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack()`.

9.37.5.6 `template<class Model > const int mappel::estimator::IterativeMaximizer< Model >::DefaultIterations = 100` [static], [inherited]

Definition at line 428 of file estimator.h.

9.37.5.7 `template<class Model > IdxVecT mappel::estimator::Estimator< Model >::exit_counts` [protected], [inherited]

Definition at line 299 of file estimator.h.

Referenced by `mappel::estimator::Estimator< Model >::clear_stats()`, `mappel::estimator::Estimator< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, and `mappel::estimator::ThreadedEstimator< Model >::record_exit_code()`.

9.37.5.8 `template<class Model > IdxVecT mappel::estimator::IterativeMaximizer< Model >::last_backtrack_idx` [protected], [inherited]

Debugging: Stores last set of `backtrack_idx`s when `data.save_seq==true`.

Definition at line 475 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::get_debug_stats()`, and `mappel::estimator::IterativeMaximizer< Model >::record_run_statistics()`.

9.37.5.9 `template<class Model > const int mappel::estimator::IterativeMaximizer< Model >::max_backtracks = 8` [static], [protected], [inherited]

Definition at line 462 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::backtrack()`, `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, and `mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack()`.

9.37.5.10 `template<class Model > int mappel::estimator::IterativeMaximizer< Model >::max_iterations` [protected], [inherited]

Definition at line 466 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, and `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.37.5.11 `template<class Model > int mappel::estimator::ThreadedEstimator< Model >::max_threads`
`[protected], [inherited]`

Definition at line 324 of file estimator.h.

9.37.5.12 `template<class Model > const double mappel::estimator::IterativeMaximizer< Model`
`>::min_eigenvalue_correction_delta = 1e-3 [static], [protected], [inherited]`

Ensure the minimum eigenvalue is at least this big when correcting indefinite matrix.

Definition at line 454 of file estimator.h.

9.37.5.13 `template<class Model > const double mappel::estimator::IterativeMaximizer< Model`
`>::min_profile_bound_residual = 1e-4 [static], [protected], [inherited]`

Minimum residual in quadratic solutions of equation (8) to accept. Revert to newton step.

Definition at line 464 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.37.5.14 `template<class Model > const Model& mappel::estimator::Estimator< Model >::model [protected],`
`[inherited]`

Definition at line 294 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::backtrack()`, `mappel::estimator::IterativeMaximizer< Model >::compute_estimate()`, `mappel::estimator::Estimator< Model >::compute_estimate_debug()`, `mappel::estimator::IterativeMaximizer< Model >::compute_estimate_debug()`, `mappel::estimator::Estimator< Model >::compute_profile_bound()`, `mappel::estimator::IterativeMaximizer< Model >::compute_profile_bound()`, `mappel::estimator::Estimator< Model >::compute_profile_bound_debug()`, `mappel::estimator::IterativeMaximizer< Model >::compute_profile_bound_debug()`, `mappel::estimator::Estimator< Model >::compute_profile_estimate()`, `mappel::estimator::IterativeMaximizer< Model >::compute_profile_estimate()`, `mappel::estimator::Estimator< Model >::estimate_max()`, `mappel::estimator::Estimator< Model >::estimate_max_stack()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_max_stack()`, `mappel::estimator::Estimator< Model >::estimate_profile_bounds()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_max()`, `mappel::estimator::HeuristicEstimator< Model >::get_debug_stats()`, `mappel::estimator::CGaussMLE< Model >::get_debug_stats()`, `mappel::estimator::Estimator< Model >::get_model()`, `mappel::estimator::IterativeMaximizer< Model >::local_maximize()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, `mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack()`, and `mappel::estimator::ThreadedEstimator< Model >::record_exit_code()`.

9.37.5.15 `template<class Model > std::mutex mappel::estimator::ThreadedEstimator< Model >::mtx [protected],`
`[inherited]`

Definition at line 326 of file estimator.h.

Referenced by `mappel::estimator::ThreadedEstimator< Model >::clear_stats()`, `mappel::estimator::IterativeMaximizer< Model >::clear_stats()`, `mappel::estimator::ThreadedEstimator< Model >::get_stats()`, `mappel::estimator::HeuristicEstimator< Model >::get_stats()`, `mappel::estimator::CGaussHeuristicEstimator< Model >::get_stats()`, `mappel::estimator::CGaussMLE< Model >::get_stats()`, `mappel::estimator::SimulatedAnnealingMaximizer< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, `mappel::estimator::ThreadedEstimator< Model >::record_exit_code()`, and `mappel::estimator::IterativeMaximizer< Model >::record_run_statistics()`.

9.37.5.16 `template<class Model> int mappel::estimator::Estimator< Model >::num_estimations = 0` [protected], [inherited]

Definition at line 297 of file estimator.h.

Referenced by `mappel::estimator::Estimator< Model >::clear_stats()`, `mappel::estimator::Estimator< Model >::get_stats()`, `mappel::estimator::ThreadedEstimator< Model >::get_stats()`, `mappel::estimator::HeuristicEstimator< Model >::get_stats()`, `mappel::estimator::CGaussHeuristicEstimator< Model >::get_stats()`, `mappel::estimator::CGaussMLE< Model >::get_stats()`, `mappel::estimator::SimulatedAnnealingMaximizer< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, and `mappel::estimator::Estimator< Model >::record_walltime()`.

9.37.5.17 `template<class Model> int mappel::estimator::ThreadedEstimator< Model >::num_threads` [protected], [inherited]

Definition at line 325 of file estimator.h.

Referenced by `mappel::estimator::ThreadedEstimator< Model >::clear_stats()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_max_stack()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_max()`, and `mappel::estimator::ThreadedEstimator< Model >::get_stats()`.

9.37.5.18 `template<class Model> int mappel::estimator::IterativeMaximizer< Model >::total_backtracks = 0` [protected], [inherited]

Definition at line 470 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::clear_stats()`, `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, and `mappel::estimator::IterativeMaximizer< Model >::record_run_statistics()`.

9.37.5.19 `template<class Model> int mappel::estimator::IterativeMaximizer< Model >::total_der_evals = 0` [protected], [inherited]

Definition at line 472 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::clear_stats()`, `mappel::estimator::SimulatedAnnealingMaximizer< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, and `mappel::estimator::IterativeMaximizer< Model >::record_run_statistics()`.

9.37.5.20 `template<class Model> int mappel::estimator::IterativeMaximizer< Model >::total_fun_evals = 0` [protected], [inherited]

Definition at line 471 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::clear_stats()`, `mappel::estimator::SimulatedAnnealingMaximizer< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, and `mappel::estimator::IterativeMaximizer< Model >::record_run_statistics()`.

9.37.5.21 `template<class Model > int mappel::estimator::IterativeMaximizer< Model >::total_iterations = 0`
`[protected], [inherited]`

Definition at line 469 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::clear_stats()`, `mappel::estimator::SimulatedAnnealingMaximizer< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, and `mappel::estimator::IterativeMaximizer< Model >::record_run_statistics()`.

9.37.5.22 `template<class Model > double mappel::estimator::Estimator< Model >::total_walltime = 0.` `[protected], [inherited]`

Definition at line 298 of file estimator.h.

Referenced by `mappel::estimator::Estimator< Model >::clear_stats()`, `mappel::estimator::Estimator< Model >::get_stats()`, `mappel::estimator::ThreadedEstimator< Model >::get_stats()`, and `mappel::estimator::Estimator< Model >::record_walltime()`.


The documentation for this class was generated from the following files:

- [estimator.h](#)
- [estimator_impl.h](#)

9.38 mappel::estimator::NewtonMaximizer< Model > Class Template Reference

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/estimator.h>
```

Inheritance diagram for `mappel::estimator::NewtonMaximizer< Model >`:

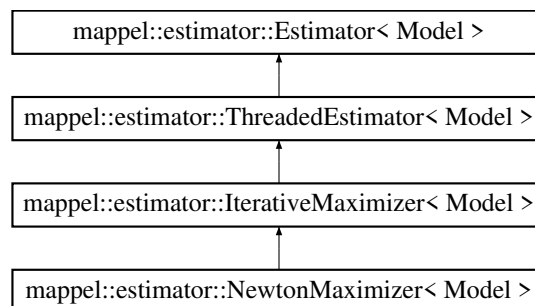

Public Types

- using `MaximizerData` = typename `IterativeMaximizer< Model >::MaximizerData`

Public Member Functions

- [NewtonMaximizer](#) (const Model &model, int max_iterations=IterativeMaximizer< Model >::DefaultIterations)
- std::string name () const
- double mean_iterations ()
- double mean_backtracks ()
- double mean_fun_evals ()
- double mean_der_evals ()
- StatsT get_stats ()
- StatsT get_debug_stats ()
- void clear_stats ()
- int get_total_iterations () const
- int get_total_backtracks () const
- int get_total_fun_evals () const
- int get_total_der_evals () const
- void local_maximize (const ModelDataT< Model > &im, StencilT< Model > &stencil, MLEData &data)

Perform a local maximization to finish off a simulated annealing run.
- void local_maximize (const ModelDataT< Model > &im, StencilT< Model > &stencil, MLEDebugData &debug←_data)
- void local_profile_maximize (const ModelDataT< Model > &im, const IdxVecT &fixed_param_idx, StencilT< Model > &stencil, MLEDebugData &mle)
- void estimate_max_stack (const ModelDataStackT< Model > &data, const ParamVecT< Model > &theta_init←_stack, MLEDataStack &mle_data_stack) override
- void estimate_profile_max (const ModelDataT< Model > &data, const ParamVecT< Model > &theta_init, ProfileLikelihoodData &profile) override
- void estimate_profile_bounds_parallel (const ModelDataT< Model > &data, ProfileBoundsData &bounds_est) override
- void estimate_profile_bounds_stack (const ModelDataStackT< Model > &data, ProfileBoundsDataStack &bounds_est_stack) override
- const Model & get_model ()

- void estimate_max_stack (const ModelDataStackT< Model > &data_stack, MLEDataStack &mle_data_stack)
- void estimate_max (const ModelDataT< Model > &data, const ParamT< Model > &theta_init, MLEData &mle←_data, StencilT< Model > &mle_stencil)
- void estimate_max (const ModelDataT< Model > &data, const ParamT< Model > &theta_init, MLEData &mle←_data)
- void estimate_max (const ModelDataT< Model > &data, MLEData &mle_data)
- void estimate_max_debug (const ModelDataT< Model > &data, const ParamT< Model > &theta_init, MLE←_DebugData &mle_data, StencilT< Model > &mle_stencil)
- void estimate_max_debug (const ModelDataT< Model > &data, const ParamT< Model > &theta_init, MLE←_DebugData &mle_data)

- double estimate_profile_max (const ModelDataT< Model > &data, const IdxVecT &fixed_idx, const ParamT< Model > &fixed_theta_init, StencilT< Model > &theta_max)

- void estimate_profile_bounds (const ModelDataT< Model > &data, ProfileBoundsData &bounds_est)
- void estimate_profile_bounds_debug (const ModelDataT< Model > &data, ProfileBoundsDebugData &bounds←_est)

- IdxVecT get_exit_counts () const

Static Public Attributes

- static const int `DefaultIterations` =100

Protected Member Functions

- void `record_run_statistics` (const `MaximizerData` &data)
- void `compute_estimate` (const `ModelDataT`< Model > &data, const `ParamT`< Model > &theta_init, `MLEDData` &mle_data, `StencilT`< Model > &mle_stencil) override
- void `compute_estimate_debug` (const `ModelDataT`< Model > &data, const `ParamT`< Model > &theta_init, `MLEDData` &mle_data, `StencilT`< Model > &mle_stencil) override
- double `compute_profile_estimate` (const `ModelDataT`< Model > &data, const `ParamT`< Model > &theta_init, const `IdxVecT` &fixed_idx, `StencilT`< Model > &theta_max) override
- void `compute_profile_bound` (const `ModelDataT`< Model > &data, `ProfileBoundsData` &est, const `VecT` &init_← step, `IdxT` param_idx, `IdxT` which_bound) override
- void `compute_profile_bound_debug` (const `ModelDataT`< Model > &data, `ProfileBoundsDebugData` &bounds) override
- bool `backtrack` (`MaximizerData` &data)
- bool `profile_bound_backtrack` (`MaximizerData` &data, `IdxT` fixed_idx, double target_rllh, double old_fval, const `VecT` &fgrad)
- virtual void `maximize` (`MaximizerData` &data)=0
- virtual void `solve_profile_bound` (`MaximizerData` &data, `MLEDData` &mle, double llh_delta, `IdxT` fixed_idx, `IdxT` which_bound)
- bool `convergence_test_grad_ratio` (const `VecT` &grad, double fval)
- bool `convergence_test_step_size` (const `VecT` &new_theta, const `VecT` &old_theta)
- void `record_exit_code` (`ExitCode` code) override
- void `record_walltime` (`ClockT`::time_point start_walltime, int num_estimations)

Protected Attributes

- int `max_iterations`
- int `total_iterations` = 0
- int `total_backtracks` = 0
- int `total_fun_evals` = 0
- int `total_der_evals` = 0
- `IdxVecT` `last_backtrack_idx`

Debugging: Stores last set of backtrack_idx when data.save_seq==true.

- int `max_threads`
- int `num_threads`
- std::mutex `mtx`
- const Model & `model`
- int `num_estimations` = 0
- double `total_walltime` = 0.
- `IdxVecT` `exit_counts`

Static Protected Attributes

- static const double `min_eigenvalue_correction_delta` = 1e-3
Ensure the minimum eigenvalue is at least this big when correcting indefinite matrix.
- static const double `convergence_min_function_change_ratio` = 1.0e-9
Convergence criteria: tolerance for function-value change.
- static const double `convergence_min_step_size_ratio` = 1.0e-9
Convergence criteria: tolerance of relative step size.
- static const double `backtrack_min_ratio` = 0.05
- static const double `backtrack_max_ratio` = 0.50
- static const double `backtrack_min_linear_step_ratio` = 1e-3
- static const int `max_backtracks` = 8
- static const double `min_profile_bound_residual` = 1e-4
Minimum residual in quadratic solutions of equation (8) to accept. Revert to newton step.

9.38.1 Detailed Description

```
template<class Model>
class mappel::estimator::NewtonMaximizer< Model >
```

Definition at line 582 of file estimator.h.

9.38.2 Member Typedef Documentation

9.38.2.1 `template<class Model> using mappel::estimator::NewtonMaximizer< Model >::MaximizerData = typename IterativeMaximizer<Model>::MaximizerData`

Definition at line 585 of file estimator.h.

9.38.3 Constructor & Destructor Documentation

9.38.3.1 `template<class Model> mappel::estimator::NewtonMaximizer< Model >::NewtonMaximizer (const Model & model, int max_iterations = IterativeMaximizer<Model>::DefaultIterations) [inline]`

Definition at line 587 of file estimator.h.

9.38.4 Member Function Documentation

9.38.4.1 `template<class Model> bool mappel::estimator::IterativeMaximizer< Model >::backtrack (MaximizerData & data)` `[protected]`, `[inherited]`

Definition at line 870 of file `estimator_impl.h`.

References `mappel::estimator::IterativeMaximizer< Model >::backtrack_min_linear_step_ratio`, `mappel::clamp()`, `mappel::estimator::IterativeMaximizer< Model >::convergence_min_step_size_ratio`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::grad`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::im`, `mappel::estimator::IterativeMaximizer< Model >::max_backtracks`, `mappel::estimator::MaxBacktracks`, `mappel::estimator::Estimator< Model >::model`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::record_backtrack()`, `mappel::estimator::ThreadedEstimator< Model >::record_exit_code()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::record_iteration()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::restore_stencil()`, `mappel::methods::objective::rllh()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::rllh`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::save_stencil()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::saved_theta()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::set_stencil()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::stencil()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::step`, `mappel::estimator::StepSize`, and `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::theta()`.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.38.4.2 `template<class Model> void mappel::estimator::IterativeMaximizer< Model >::clear_stats ()` `[virtual]`, `[inherited]`

Run statistics.

Reimplemented from [mappel::estimator::ThreadedEstimator< Model >](#).

Definition at line 848 of file `estimator_impl.h`.

References `mappel::estimator::ThreadedEstimator< Model >::clear_stats()`, `mappel::estimator::ThreadedEstimator< Model >::mtx`, `mappel::estimator::IterativeMaximizer< Model >::total_backtracks`, `mappel::estimator::IterativeMaximizer< Model >::total_der_evals`, `mappel::estimator::IterativeMaximizer< Model >::total_fun_evals`, and `mappel::estimator::IterativeMaximizer< Model >::total_iterations`.

9.38.4.3 `template<class Model> void mappel::estimator::IterativeMaximizer< Model >::compute_estimate (const ModelDataT< Model > & data, const ParamT< Model > & theta_init, MLEData & mle_data, StencilT< Model > & mle_stencil)` `[override]`, `[protected]`, `[virtual]`, `[inherited]`

Implements [mappel::estimator::Estimator< Model >](#).

Definition at line 1043 of file `estimator_impl.h`.

References `mappel::estimator::IterativeMaximizer< Model >::maximize()`, `mappel::estimator::Estimator< Model >::model`, `mappel::methods::observed_information()`, `mappel::estimator::MLEData::obsI`, `mappel::estimator::IterativeMaximizer< Model >::record_run_statistics()`, `mappel::estimator::MLEData::rllh`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::rllh`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::stencil()`, `mappel::estimator::MLEData::theta`, and `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::theta()`.

```
9.38.4.4  template<class Model > void mappel::estimator::IterativeMaximizer< Model >::compute_estimate_debug ( const
        ModelDataT< Model > & im, const ParamT< Model > & theta_init, MLEDebugData & mle_debug, StencilT<
        Model > & mle_stencil )  [override], [protected], [virtual], [inherited]
```

Virtual estimate_debug interface

Estimators that produce a sequence of results (e.g. IterativeEstimators) can override this dummy debug implementation.

Reimplemented from [mappel::estimator::Estimator< Model >](#).

Definition at line 1057 of file estimator_impl.h.

References mappel::estimator::IterativeMaximizer< Model >::MaximizerData::get_theta_sequence(), mappel::estimator::IterativeMaximizer< Model >::MaximizerData::get_theta_sequence_rllh(), mappel::estimator::IterativeMaximizer< Model >::maximize(), mappel::estimator::Estimator< Model >::model, mappel::methods::observed_information(), mappel::estimator::MLEDebugData::obsI, mappel::estimator::IterativeMaximizer< Model >::record_run_statistics(), mappel::estimator::MLEDebugData::rllh, mappel::estimator::IterativeMaximizer< Model >::MaximizerData::rllh, mappel::estimator::MLEDebugData::sequence, mappel::estimator::MLEDebugData::sequence_rllh, mappel::estimator::IterativeMaximizer< Model >::MaximizerData::stencil(), mappel::estimator::MLEDebugData::theta, and mappel::estimator::IterativeMaximizer< Model >::MaximizerData::theta().

```
9.38.4.5  template<class Model > void mappel::estimator::IterativeMaximizer< Model >::compute_profile_bound ( const
        ModelDataT< Model > & data, ProfileBoundsData & est, const VecT & init_step, IdxT param_idx, IdxT
        which_bound )  [override], [protected], [virtual], [inherited]
```

Reimplemented from [mappel::estimator::Estimator< Model >](#).

Definition at line 1088 of file estimator_impl.h.

References mappel::estimator::ProfileBoundsData::estimated_idx, mappel::estimator::ProfileBoundsData::mle, mappel::estimator::Estimator< Model >::model, mappel::estimator::ProfileBoundsData::profile_lb, mappel::estimator::ProfileBoundsData::profile_points_lb, mappel::estimator::ProfileBoundsData::profile_points_lb_rllh, mappel::estimator::ProfileBoundsData::profile_points_ub, mappel::estimator::ProfileBoundsData::profile_points_ub_rllh, mappel::estimator::ProfileBoundsData::profile_ub, mappel::estimator::IterativeMaximizer< Model >::record_run_statistics(), mappel::estimator::IterativeMaximizer< Model >::solve_profile_bound(), mappel::estimator::ProfileBoundsData::target_rllh_delta, and mappel::estimator::MLEData::theta.

```
9.38.4.6  template<class Model > void mappel::estimator::IterativeMaximizer< Model >::compute_profile_bound_debug (
        const ModelDataT< Model > & data, ProfileBoundsDebugData & bounds )  [override], [protected],
        [virtual], [inherited]
```

Reimplemented from [mappel::estimator::Estimator< Model >](#).

Definition at line 1114 of file estimator_impl.h.

References mappel::estimator::ProfileBoundsDebugData::estimated_idx, mappel::estimator::ProfileBoundsDebugData::mle, mappel::estimator::Estimator< Model >::model, mappel::estimator::ProfileBoundsDebugData::Nseq_lb, mappel::estimator::ProfileBoundsDebugData::Nseq_ub, mappel::estimator::MLEData::obsI, mappel::estimator::ProfileBoundsDebugData::profile_lb, mappel::estimator::ProfileBoundsDebugData::profile_ub, mappel::estimator::IterativeMaximizer< Model >::record_run_statistics(), mappel::estimator::ProfileBoundsDebugData::sequence_lb, mappel::estimator::ProfileBoundsDebugData::sequence_lb_rllh, mappel::estimator::ProfileBoundsDebugData::sequence_ub, mappel::estimator::ProfileBoundsDebugData::sequence_ub_rllh, mappel::estimator::IterativeMaximizer< Model >::solve_profile_bound(), mappel::estimator::subroutine::solve_profile_initial_step(), mappel::estimator::IterativeMaximizer< Model >::MaximizerData::step, mappel::estimator::ProfileBoundsDebugData::target_rllh_delta, and mappel::estimator::MLEData::theta.

9.38.4.7 `template<class Model> double mappel::estimator::IterativeMaximizer< Model >::compute_profile_estimate (const ModelDataT< Model> & data, const ParamT< Model> & theta_init, const IdxVecT & fixed_idx, StencilT< Model> & theta_max) [override], [protected], [virtual], [inherited]`

Reimplemented from [mappel::estimator::Estimator< Model>](#).

Definition at line 1074 of file estimator_impl.h.

References [mappel::estimator::IterativeMaximizer< Model>::maximize\(\)](#), [mappel::estimator::Estimator< Model>::model](#), [mappel::estimator::IterativeMaximizer< Model>::record_run_statistics\(\)](#), [mappel::estimator::IterativeMaximizer< Model>::MaximizerData::rllh](#), [mappel::estimator::IterativeMaximizer< Model>::MaximizerData::set_fixed_parameters\(\)](#), and [mappel::estimator::IterativeMaximizer< Model>::MaximizerData::stencil\(\)](#).

9.38.4.8 `template<class Model> bool mappel::estimator::IterativeMaximizer< Model>::convergence_test_grad_ratio (const VecT & grad, double fval) [protected], [inherited]`

Definition at line 1015 of file estimator_impl.h.

References [mappel::estimator::IterativeMaximizer< Model>::convergence_min_function_change_ratio](#), [mappel::estimator::GradRatio](#), [mappel::norm_sq\(\)](#), [mappel::estimator::ThreadedEstimator< Model>::record_exit_code\(\)](#), and [mappel::square\(\)](#).

Referenced by [mappel::estimator::IterativeMaximizer< Model>::local_profile_maximize\(\)](#).

9.38.4.9 `template<class Model> bool mappel::estimator::IterativeMaximizer< Model>::convergence_test_step_size (const VecT & new_theta, const VecT & old_theta) [protected], [inherited]`

Definition at line 1027 of file estimator_impl.h.

References [mappel::estimator::IterativeMaximizer< Model>::convergence_min_step_size_ratio](#), [mappel::norm_sq\(\)](#), [mappel::estimator::ThreadedEstimator< Model>::record_exit_code\(\)](#), and [mappel::estimator::StepSize](#).

Referenced by [mappel::estimator::IterativeMaximizer< Model>::local_profile_maximize\(\)](#).

9.38.4.10 `template<class Model> void mappel::estimator::Estimator< Model>::estimate_max (const ModelDataT< Model> & data, const ParamT< Model> & theta_init, MLEData & mle_data, StencilT< Model> & mle_stencil) [inherited]`

Maximum likelihood point estimators Estimate for a single data starting at `theta_init`, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with `theta_init`, `theta_init` is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of `theta_init` will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 128 of file estimator_impl.h.

References mappel::estimator::Estimator< Model >::compute_estimate(), mappel::estimator::Error, mappel::estimator::MLEData::obsI, mappel::print_text_image(), mappel::estimator::Estimator< Model >::record_exit_code(), mappel::estimator::Estimator< Model >::record_walltime(), mappel::estimator::MLEData::rllh, and mappel::estimator::MLEData::theta.

Referenced by mappel::estimator::Estimator< Model >::estimate_max().

9.38.4.11 `template<class Model> void mappel::estimator::Estimator< Model >::estimate_max (const ModelIDataT< Model> & data, const ParamT< Model> & theta_init, MLEData & mle_data) [inherited]`

Maximum likelihood point estimators Estimate for a single data starting at theta_init, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with theta_init, theta_init is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of theta_init will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 121 of file estimator_impl.h.

References mappel::estimator::Estimator< Model >::estimate_max().

9.38.4.12 `template<class Model> void mappel::estimator::Estimator< Model >::estimate_max (const ModelIDataT< Model> & data, MLEData & mle_data) [inherited]`

Maximum likelihood point estimators Estimate for a single data starting at theta_init, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with theta_init, theta_init is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of theta_init will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 112 of file estimator_impl.h.

References mappel::estimator::Estimator< Model >::estimate_max(), and mappel::estimator::Estimator< Model >::model.

9.38.4.13 **template<class Model > void mappel::estimator::Estimator< Model >::estimate_max_debug (const ModelDataT< Model > & data, const ParamT< Model > & theta_init, MLEDebugData & mle_data, StencilT< Model > & mle_stencil) [inherited]**

Debug estimation for a single data starting at theta_init, fill in the [MLEDebugData](#) struct with data including the sequence of evaluated points. Estimation is initialized with theta_init, theta_init is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of theta_init will not be modified in the initialization process.

The sequence and sequence_rllh parameters of the [MLEDebugData](#) struct record the entire sequence of evaluated points including theta_init and theta_mle, which should be first and last respectively.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	Initial theta value.
out	<i>mle_data</i>	MLEDebugData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

9.38.4.14 **template<class Model > void mappel::estimator::Estimator< Model >::estimate_max_debug (const ModelDataT< Model > & data, const ParamT< Model > & theta_init, MLEDebugData & mle_data) [inherited]**

Maximum likelihood point estimators Estimate for a single data starting at theta_init, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with theta_init, theta_init is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of theta_init will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 157 of file estimator_impl.h.

References mappel::estimator::Estimator< Model >::compute_estimate_debug(), mappel::estimator::Error, mappel::estimator::MLEDebugData::obsI, mappel::print_text_image(), mappel::estimator::Estimator< Model >::record_

exit_code(), mappel::estimator::Estimator< Model >::record_walltime(), mappel::estimator::MLEDebugData::rllh, and mappel::estimator::MLEDebugData::theta.

9.38.4.15 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max_stack (const ModelDataStackT< Model > & data_stack, MLEDataStack & mle_data_stack) [inherited]`

Maximum likelihood point estimators Estimate for a single data starting at theta_init, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with theta_init, theta_init is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of theta_init will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 183 of file estimator_impl.h.

References [mappel::estimator::Estimator< Model >::estimate_max_stack\(\)](#), and [mappel::estimator::Estimator< Model >::model](#).

9.38.4.16 `template<class Model > void mappel::estimator::ThreadedEstimator< Model >::estimate_max_stack (const ModelDataStackT< Model > & data_stack, const ParamVecT< Model > & theta_init_stack, MLEDataStack & mle_data_stack) [override],[virtual],[inherited]`

Estimate for a stack of data and fill in the [MLEDataStack](#) struct with the estimated parameter, RLLH, and observed information for each data in parallel. Estimation is initialized with theta_init, theta_init is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of theta_init will not be modified in the initialization process.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[optional] Initial theta value for each image.
out	<i>mle</i>	MLEStackData records the maximum likelihood estimate, RLLH, and Observed information for each data

Implements [mappel::estimator::Estimator< Model >](#).

Definition at line 377 of file estimator_impl.h.

References [mappel::estimator::Estimator< Model >::compute_estimate\(\)](#), [mappel::estimator::Error](#), [mappel::estimator::Estimator< Model >::model](#), [mappel::estimator::MLEDataStack::Ndata](#), [mappel::estimator::ThreadedEstimator< Model >::num_threads](#), [mappel::estimator::MLEData::obsI](#), [mappel::estimator::MLEDataStack::obsI](#),

mappel::print_text_image(), mappel::estimator::ThreadedEstimator< Model >::record_exit_code(), mappel::estimator::Estimator< Model >::record_walltime(), mappel::estimator::MLEData::rllh, mappel::estimator::MLEDataStack::rllh, mappel::estimator::MLEData::theta, and mappel::estimator::MLEDataStack::theta.

9.38.4.17 `template<class Model> void mappel::estimator::Estimator< Model >::estimate_profile_bounds (const ModelDataT< Model > & data, ProfileBoundsData & bounds_est) [inherited]`

Profile likelihood bounds computations with VM algorithm

Definition at line 220 of file estimator_impl.h.

References mappel::estimator::Estimator< Model >::compute_profile_bound(), mappel::estimator::Error, mappel::estimator::ProfileBoundsData::estimated_idx, mappel::estimator::ProfileBoundsData::initialize_arrays(), mappel::estimator::ProfileBoundsData::mle, mappel::estimator::Estimator< Model >::model, mappel::estimator::ProfileBoundsData::Nparams_est, mappel::estimator::MLEData::obs, mappel::print_text_image(), mappel::estimator::ProfileBoundsData::profile_lb, mappel::estimator::ProfileBoundsData::profile_points_lb, mappel::estimator::ProfileBoundsData::profile_points_lb_rllh, mappel::estimator::ProfileBoundsData::profile_points_ub, mappel::estimator::ProfileBoundsData::profile_ub, mappel::estimator::Estimator< Model >::record_exit_code(), mappel::estimator::Estimator< Model >::record_walltime(), mappel::estimator::subroutine::solve_profile_initial_step(), mappel::estimator::ProfileBoundsData::target_rllh_delta, and mappel::estimator::MLEData::theta.

Referenced by mappel::methods::error_bounds_profile_likelihood().

9.38.4.18 `template<class Model> void mappel::estimator::Estimator< Model >::estimate_profile_bounds_debug (const ModelDataT< Model > & data, ProfileBoundsDebugData & bounds_est) [inherited]`

Profile likelihood bounds computations with VM algorithm

Definition at line 258 of file estimator_impl.h.

References mappel::estimator::Estimator< Model >::compute_profile_bound_debug(), mappel::estimator::Error, mappel::estimator::ProfileBoundsDebugData::estimated_idx, mappel::estimator::ProfileBoundsDebugData::mle, mappel::print_text_image(), mappel::estimator::Estimator< Model >::record_exit_code(), mappel::estimator::Estimator< Model >::record_walltime(), mappel::estimator::ProfileBoundsDebugData::target_rllh_delta, and mappel::estimator::MLEData::theta.

Referenced by mappel::methods::debug::error_bounds_profile_likelihood_debug().

9.38.4.19 `template<class Model> void mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel (const ModelDataT< Model > & data, ProfileBoundsData & bounds_est) [override], [virtual], [inherited]`

Profile likelihood bounds computations with VM algorithm

Implements [mappel::estimator::Estimator< Model >](#).

Definition at line 464 of file estimator_impl.h.

References mappel::estimator::Estimator< Model >::compute_profile_bound(), mappel::estimator::Error, mappel::estimator::ProfileBoundsData::estimated_idx, mappel::estimator::ProfileBoundsData::initialize_arrays(), mappel::estimator::ProfileBoundsData::mle, mappel::estimator::Estimator< Model >::model, mappel::estimator::ProfileBoundsData::Nparams_est, mappel::estimator::ThreadedEstimator< Model >::num_threads, mappel::estimator::MLEData::obs, mappel::print_text_image(), mappel::estimator::ThreadedEstimator< Model >::record_exit_code(), mappel::estimator::Estimator< Model >::record_walltime(), mappel::estimator::subroutine::solve_profile_initial_step(), mappel::estimator::ProfileBoundsData::target_rllh_delta, and mappel::estimator::MLEData::theta.

Referenced by mappel::methods::openmp::error_bounds_profile_likelihood_parallel().

9.38.4.20 `template<class Model> void mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack (const ModelDataStackT< Model > & data_stack, ProfileBoundsDataStack & bounds_est) [override], [virtual], [inherited]`

Profile likelihood bounds computations with VM algorithm

Implements [mappel::estimator::Estimator< Model >](#).

Definition at line 500 of file estimator_impl.h.

References [mappel::estimator::Estimator< Model >::compute_profile_bound\(\)](#), [mappel::estimator::Error](#), [mappel::estimator::ProfileBoundsData::estimated_idx](#)s, [mappel::estimator::ProfileBoundsDataStack::estimated_idx](#)s, [mappel::estimator::ProfileBoundsData::initialize_arrays\(\)](#), [mappel::estimator::ProfileBoundsDataStack::initialize_arrays\(\)](#), [mappel::estimator::ProfileBoundsData::mle](#), [mappel::estimator::ProfileBoundsDataStack::mle](#), [mappel::estimator::Estimator< Model >::model](#), [mappel::estimator::ProfileBoundsDataStack::Ndata](#), [mappel::estimator::ProfileBoundsDataStack::Nparams_est](#), [mappel::estimator::ThreadedEstimator< Model >::num_threads](#), [mappel::estimator::MLEData::obs](#), [mappel::estimator::MLEDataStack::obs](#), [mappel::print_text_image\(\)](#), [mappel::estimator::ProfileBoundsData::profile_lb](#), [mappel::estimator::ProfileBoundsDataStack::profile_lb](#), [mappel::estimator::ProfileBoundsData::profile_points_lb](#), [mappel::estimator::ProfileBoundsDataStack::profile_points_lb](#), [mappel::estimator::ProfileBoundsData::profile_points_lb_rllh](#), [mappel::estimator::ProfileBoundsDataStack::profile_points_lb_rllh](#), [mappel::estimator::ProfileBoundsData::profile_points_ub](#), [mappel::estimator::ProfileBoundsDataStack::profile_points_ub](#), [mappel::estimator::ProfileBoundsData::profile_points_ub_rllh](#), [mappel::estimator::ProfileBoundsDataStack::profile_points_ub_rllh](#), [mappel::estimator::ProfileBoundsData::profile_ub](#), [mappel::estimator::ProfileBoundsDataStack::profile_ub](#), [mappel::estimator::ThreadedEstimator< Model >::record_exit_code\(\)](#), [mappel::estimator::Estimator< Model >::record_walltime\(\)](#), [mappel::estimator::MLEData::rllh](#), [mappel::estimator::MLEDataStack::rllh](#), [mappel::estimator::subroutine::solve_profile_initial_step\(\)](#), [mappel::estimator::ProfileBoundsData::target_rllh_delta](#), [mappel::estimator::ProfileBoundsDataStack::target_rllh_delta](#), [mappel::estimator::MLEData::theta](#), and [mappel::estimator::MLEDataStack::theta](#).

Referenced by [mappel::methods::openmp::error_bounds_profile_likelihood_stack\(\)](#).

9.38.4.21 `template<class Model> double mappel::estimator::Estimator< Model >::estimate_profile_max (const ModelDataT< Model > & data, const IdxVecT & fixed_idx, const ParamT< Model > & fixed_theta_init, StencilT< Model > & theta_max) [inherited]`

Profile likelihood estimation methods

Definition at line 190 of file estimator_impl.h.

References [mappel::estimator::Estimator< Model >::compute_profile_estimate\(\)](#), [mappel::estimator::Error](#), [mappel::print_text_image\(\)](#), [mappel::estimator::Estimator< Model >::record_exit_code\(\)](#), [mappel::estimator::Estimator< Model >::record_walltime\(\)](#), and [mappel::methods::objective::rllh\(\)](#).

9.38.4.22 `template<class Model> void mappel::estimator::ThreadedEstimator< Model >::estimate_profile_max (const ModelDataT< Model > & data, const ParamVecT< Model > & fixed_theta_init, ProfileLikelihoodData & profile) [override], [virtual], [inherited]`

Profile likelihood estimation methods

Implements [mappel::estimator::Estimator< Model >](#).

Definition at line 418 of file estimator_impl.h.

References [mappel::estimator::Estimator< Model >::compute_profile_estimate\(\)](#), [mappel::estimator::Error](#), [mappel::estimator::ProfileLikelihoodData::fixed_idx](#)s, [mappel::estimator::ProfileLikelihoodData::fixed_values](#), [mappel::estimator::Estimator< Model >::model](#), [mappel::estimator::ProfileLikelihoodData::Nfixed](#), [mappel::estimator::ThreadedEstimator< Model >::num_threads](#), [mappel::estimator::ProfileLikelihoodData::Nvalues](#), [mappel::print_text_image\(\)](#), [mappel::estimator::ProfileLikelihoodData::profile_likelihood](#), [mappel::estimator::ProfileLikelihoodData::profile_parameters](#), [mappel::estimator::ThreadedEstimator< Model >::record_exit_code\(\)](#), and [mappel::estimator::Estimator< Model >::record_walltime\(\)](#).

9.38.4.23 `template<class Model > StatsT mappel::estimator::IterativeMaximizer< Model >::get_debug_stats ()`
`[virtual], [inherited]`

Run statistics.

Reimplemented from [mappel::estimator::ThreadedEstimator< Model >](#).

Definition at line 832 of file `estimator_impl.h`.

References `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::backtrack_idx`s, `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, and `mappel::estimator::IterativeMaximizer< Model >::last_backtrack_idx`s.

9.38.4.24 `template<class Model > IdxVecT mappel::estimator::Estimator< Model >::get_exit_counts () const`
`[inline], [inherited]`

Run statistics.

Definition at line 274 of file `estimator.h`.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.38.4.25 `template<class Model > const Model & mappel::estimator::Estimator< Model >::get_model ()`
`[inherited]`

Definition at line 108 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::model`.

9.38.4.26 `template<class Model > StatsT mappel::estimator::IterativeMaximizer< Model >::get_stats ()`
`[virtual], [inherited]`

Run statistics.

Reimplemented from [mappel::estimator::ThreadedEstimator< Model >](#).

Definition at line 811 of file `estimator_impl.h`.

References `mappel::estimator::IterativeMaximizer< Model >::convergence_min_function_change_ratio`, `mappel::estimator::IterativeMaximizer< Model >::convergence_min_step_size_ratio`, `mappel::estimator::ThreadedEstimator< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::max_backtracks`, `mappel::estimator::IterativeMaximizer< Model >::max_iterations`, `mappel::estimator::ThreadedEstimator< Model >::mtx`, `mappel::estimator::Estimator< Model >::num_estimations`, `mappel::estimator::IterativeMaximizer< Model >::total_backtracks`, `mappel::estimator::IterativeMaximizer< Model >::total_der_evals`, `mappel::estimator::IterativeMaximizer< Model >::total_fun_evals`, and `mappel::estimator::IterativeMaximizer< Model >::total_iterations`.

Referenced by `mappel::methods::error_bounds_profile_likelihood()`, `mappel::methods::debug::error_bounds_profile_likelihood_debug()`, `mappel::methods::openmp::error_bounds_profile_likelihood_parallel()`, `mappel::methods::openmp::error_bounds_profile_likelihood_stack()`, `mappel::estimator::SimulatedAnnealingMaximizer< Model >::get_debug_stats()`, and `mappel::estimator::IterativeMaximizer< Model >::get_debug_stats()`.

9.38.4.27 `template<class Model > int mappel::estimator::IterativeMaximizer< Model >::get_total_backtracks () const`
`[inline], [inherited]`

Definition at line 441 of file estimator.h.

9.38.4.28 `template<class Model > int mappel::estimator::IterativeMaximizer< Model >::get_total_der_evals () const`
`[inline], [inherited]`

Definition at line 443 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.38.4.29 `template<class Model > int mappel::estimator::IterativeMaximizer< Model >::get_total_fun_evals () const`
`[inline], [inherited]`

Definition at line 442 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.38.4.30 `template<class Model > int mappel::estimator::IterativeMaximizer< Model >::get_total_iterations () const`
`[inline], [inherited]`

Definition at line 440 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.38.4.31 `template<class Model > void mappel::estimator::IterativeMaximizer< Model >::local_maximize (const`
`ModelDataT< Model > & im, StencilT< Model > & stencil, MLEData & data) [inherited]`

Perform a local maximization to finish off a simulated annealing run.

Definition at line 1145 of file estimator_impl.h.

References `mappel::estimator::IterativeMaximizer< Model >::maximize()`, `mappel::estimator::Estimator< Model >::model`, `mappel::methods::observed_information()`, `mappel::estimator::MLEData::obsI`, `mappel::estimator::IterativeMaximizer< Model >::record_run_statistics()`, `mappel::estimator::MLEData::rllh`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::rllh`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::stencil()`, `mappel::estimator::MLEData::theta`, and `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::theta()`.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.38.4.32 `template<class Model > void mappel::estimator::IterativeMaximizer< Model >::local_maximize (const`
`ModelDataT< Model > & im, StencilT< Model > & stencil, MLEDebugData & debug_data) [inherited]`

Definition at line 1158 of file estimator_impl.h.

References `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::get_theta_sequence()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::get_theta_sequence_rllh()`, `mappel::estimator::IterativeMaximizer< Model >::maximize()`, `mappel::estimator::Estimator< Model >::model`, `mappel::methods::observed_information()`, `mappel::estimator::MLEDebugData::obsI`, `mappel::estimator::IterativeMaximizer< Model >::record_run_statistics()`, `mappel::estimator::MLEDebugData::rllh`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::rllh`, `mappel::estimator::MLEDebugData::sequence`, `mappel::estimator::MLEDebugData::sequence_rllh`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::stencil()`, `mappel::estimator::MLEDebugData::theta`, and `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::theta()`.

9.38.4.33 `template<class Model > void mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize (const ModelDataT< Model > & im, const IdxVecT & fixed_param_idx, StencilT< Model > & stencil, MLEDebugData & mle) [inherited]`

Definition at line 1173 of file estimator_impl.h.

References `mappel::estimator::IterativeMaximizer< Model >::backtrack()`, `mappel::estimator::subroutine::bound_step()`, `mappel::clamp()`, `mappel::estimator::subroutine::compute_bound_scaling_vec()`, `mappel::estimator::subroutine::compute_cauchy_point()`, `mappel::estimator::subroutine::compute_initial_trust_radius()`, `mappel::estimator::subroutine::compute_quadratic_model_value()`, `mappel::estimator::subroutine::compute_scaled_problem()`, `mappel::estimator::IterativeMaximizer< Model >::convergence_test_grad_ratio()`, `mappel::estimator::IterativeMaximizer< Model >::convergence_test_step_size()`, `mappel::estimator::Estimator< Model >::exit_counts`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::fixed_idx`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::free_idx`, `mappel::estimator::Estimator< Model >::get_exit_counts()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::get_theta_sequence()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::get_theta_sequence_rllh()`, `mappel::estimator::IterativeMaximizer< Model >::get_total_der_evals()`, `mappel::estimator::IterativeMaximizer< Model >::get_total_fun_evals()`, `mappel::estimator::IterativeMaximizer< Model >::get_total_iterations()`, `mappel::methods::objective::grad()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::grad`, `mappel::methods::objective::grad2()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::has_fixed_parameters()`, `mappel::methods::objective::hessian()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::im`, `mappel::is_positive_definite()`, `mappel::estimator::IterativeMaximizer< Model >::local_maximize()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, `mappel::estimator::IterativeMaximizer< Model >::max_iterations`, `mappel::estimator::IterativeMaximizer< Model >::maximize()`, `mappel::estimator::MaxIter`, `mappel::estimator::IterativeMaximizer< Model >::min_profile_bound_residual`, `mappel::estimator::Estimator< Model >::model`, `mappel::estimator::ThreadedEstimator< Model >::mtx`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::num_fixed_parameters()`, `mappel::methods::observed_information()`, `mappel::estimator::MLEData::obs`, `mappel::estimator::MLEDebugData::obs`, `mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::record_backtrack()`, `mappel::estimator::ThreadedEstimator< Model >::record_exit_code()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::record_iteration()`, `mappel::estimator::IterativeMaximizer< Model >::record_run_statistics()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::restore_stencil()`, `mappel::estimator::MLEData::rllh`, `mappel::methods::objective::rllh()`, `mappel::estimator::MLEDebugData::rllh`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::rllh`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::s0`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::s1`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::save_stencil()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::saved_theta()`, `mappel::estimator::MLEDebugData::sequence`, `mappel::estimator::MLEDebugData::sequence_rllh`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::set_fixed_parameters()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::set_stencil()`, `mappel::estimator::subroutine::solve_TR_subproblem()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::stencil()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::step`, `mappel::estimator::MLEData::theta`, `mappel::estimator::MLEDebugData::theta`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::theta()`, `mappel::estimator::IterativeMaximizer< Model >::total_der_evals`, `mappel::estimator::IterativeMaximizer< Model >::total_fun_evals`, `mappel::estimator::IterativeMaximizer< Model >::total_iterations`, and `mappel::estimator::TrustRegionRadius`.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.38.4.34 `template<class Model > virtual void mappel::estimator::IterativeMaximizer< Model >::maximize (MaximizerData & data) [protected],[pure virtual],[inherited]`

Referenced by `mappel::estimator::IterativeMaximizer< Model >::compute_estimate()`, `mappel::estimator::IterativeMaximizer< Model >::compute_estimate_debug()`, `mappel::estimator::IterativeMaximizer< Model >::compute_profile_estimate()`, `mappel::estimator::IterativeMaximizer< Model >::local_maximize()`, and `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.38.4.35 `template<class Model > double mappel::estimator::IterativeMaximizer< Model >::mean_backtracks ()`
[inherited]

9.38.4.36 `template<class Model > double mappel::estimator::IterativeMaximizer< Model >::mean_der_evals ()`
[inherited]

9.38.4.37 `template<class Model > double mappel::estimator::IterativeMaximizer< Model >::mean_fun_evals ()`
[inherited]

9.38.4.38 `template<class Model > double mappel::estimator::IterativeMaximizer< Model >::mean_iterations ()`
[inherited]

9.38.4.39 `template<class Model> std::string mappel::estimator::NewtonMaximizer< Model >::name () const`
[inline],[virtual]

Implements [mappel::estimator::Estimator< Model >](#).

Definition at line 590 of file estimator.h.

9.38.4.40 `template<class Model > bool mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack (`
`MaximizerData & data, IdxT fixed_idx, double target_rllh, double old_fval, const VecT & fgrad)` [protected],
[inherited]

Definition at line 943 of file estimator_impl.h.

References [mappel::estimator::IterativeMaximizer< Model >::backtrack_max_ratio](#), [mappel::estimator::IterativeMaximizer< Model >::backtrack_min_linear_step_ratio](#), [mappel::estimator::IterativeMaximizer< Model >::backtrack_min_ratio](#), [mappel::clamp\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::convergence_min_step_size_ratio](#), [mappel::methods::objective::grad\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::im](#), [mappel::estimator::IterativeMaximizer< Model >::max_backtracks](#), [mappel::estimator::MaxBacktracks](#), [mappel::estimator::Estimator< Model >::model](#), [mappel::norm_sq\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::record_backtrack\(\)](#), [mappel::estimator::ThreadedEstimator< Model >::record_exit_code\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::record_iteration\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::restore_stencil\(\)](#), [mappel::methods::objective::rllh\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::rllh](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::save_stencil\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::saved_theta\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::set_stencil\(\)](#), [mappel::square\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::stencil\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::step](#), [mappel::estimator::StepSize](#), and [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::theta\(\)](#).

Referenced by [mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize\(\)](#).

9.38.4.41 `template<class Model > void mappel::estimator::ThreadedEstimator< Model >::record_exit_code (ExitCode code)` [override], [protected], [virtual], [inherited]

Implements [mappel::estimator::Estimator< Model >](#).

Definition at line 578 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::exit_counts`, `mappel::estimator::Estimator< Model >::model`, `mappel::estimator::ThreadedEstimator< Model >::mtx`, `mappel::methods::observed_information()`, `mappel::estimator::MLEData::obsI`, `mappel::estimator::MLEData::rllh`, `mappel::methods::objective::rllh()`, `mappel::estimator::Success`, and `mappel::estimator::MLEData::theta`.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::backtrack()`, `mappel::estimator::IterativeMaximizer< Model >::convergence_test_grad_ratio()`, `mappel::estimator::IterativeMaximizer< Model >::convergence_test_step_size()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_max_stack()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_max()`, `mappel::estimator::HeuristicEstimator< Model >::get_debug_stats()`, `mappel::estimator::CGaussMLE< Model >::get_debug_stats()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, and `mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack()`.

9.38.4.42 `template<class Model > void mappel::estimator::IterativeMaximizer< Model >::record_run_statistics (const MaximizerData & data)` [protected], [inherited]

Definition at line 859 of file `estimator_impl.h`.

References `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::get_backtrack_idxes()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::has_theta_sequence()`, `mappel::estimator::IterativeMaximizer< Model >::last_backtrack_idxes`, `mappel::estimator::ThreadedEstimator< Model >::mtx`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::nBacktracks`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::nIterations`, `mappel::estimator::IterativeMaximizer< Model >::total_backtracks`, `mappel::estimator::IterativeMaximizer< Model >::total_der_evals`, `mappel::estimator::IterativeMaximizer< Model >::total_fun_evals`, and `mappel::estimator::IterativeMaximizer< Model >::total_iterations`.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::compute_estimate()`, `mappel::estimator::IterativeMaximizer< Model >::compute_estimate_debug()`, `mappel::estimator::IterativeMaximizer< Model >::compute_profile_bound()`, `mappel::estimator::IterativeMaximizer< Model >::compute_profile_bound_debug()`, `mappel::estimator::IterativeMaximizer< Model >::compute_profile_estimate()`, `mappel::estimator::IterativeMaximizer< Model >::local_maximize()`, and `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.38.4.43 `template<class Model > void mappel::estimator::Estimator< Model >::record_walltime (ClockT::time_point start_walltime, int num_estimations)` [protected], [inherited]

Definition at line 360 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::num_estimations`, and `mappel::estimator::Estimator< Model >::total_walltime`.

Referenced by `mappel::estimator::Estimator< Model >::estimate_max()`, `mappel::estimator::Estimator< Model >::estimate_max_debug()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_max_stack()`, `mappel::estimator::Estimator< Model >::estimate_profile_bounds()`, `mappel::estimator::Estimator< Model >::estimate_profile_bounds_debug()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack()`, `mappel::estimator::Estimator< Model >::estimate_profile_max()`, and `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_max()`.

9.38.4.44 `template<class Model > void mappel::estimator::IterativeMaximizer< Model >::solve_profile_bound (MaximizerData & data, MLEData & mle, double llh_delta, IdxT fixed_idx, IdxT which_bound)` [protected], [virtual], [inherited]

Definition at line 1137 of file estimator_impl.h.

References mappel::estimator::Estimator< Model >::name().

Referenced by mappel::estimator::IterativeMaximizer< Model >::compute_profile_bound(), and mappel::estimator::IterativeMaximizer< Model >::compute_profile_bound_debug().

9.38.5 Member Data Documentation

9.38.5.1 `template<class Model > const double mappel::estimator::IterativeMaximizer< Model >::backtrack_max_ratio = 0.50` [static], [protected], [inherited]

Definition at line 460 of file estimator.h.

Referenced by mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack().

9.38.5.2 `template<class Model > const double mappel::estimator::IterativeMaximizer< Model >::backtrack_min_linear_step_ratio = 1e-3` [static], [protected], [inherited]

Definition at line 461 of file estimator.h.

Referenced by mappel::estimator::IterativeMaximizer< Model >::backtrack(), and mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack().

9.38.5.3 `template<class Model > const double mappel::estimator::IterativeMaximizer< Model >::backtrack_min_ratio = 0.05` [static], [protected], [inherited]

Definition at line 459 of file estimator.h.

Referenced by mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack().

9.38.5.4 `template<class Model > const double mappel::estimator::IterativeMaximizer< Model >::convergence_min_function_change_ratio = 1.0e-9` [static], [protected], [inherited]

Convergence criteria: tolerance for function-value change.

Definition at line 456 of file estimator.h.

Referenced by mappel::estimator::IterativeMaximizer< Model >::convergence_test_grad_ratio(), and mappel::estimator::IterativeMaximizer< Model >::get_stats().

9.38.5.5 `template<class Model > const double mappel::estimator::IterativeMaximizer< Model >::convergence_min_step_size_ratio = 1.0e-9` [static], [protected], [inherited]

Convergence criteria: tolerance of relative step size.

Definition at line 457 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::backtrack()`, `mappel::estimator::IterativeMaximizer< Model >::convergence_test_step_size()`, `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, and `mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack()`.

9.38.5.6 `template<class Model > const int mappel::estimator::IterativeMaximizer< Model >::DefaultIterations = 100` [static], [inherited]

Definition at line 428 of file estimator.h.

9.38.5.7 `template<class Model > IdxVecT mappel::estimator::Estimator< Model >::exit_counts` [protected], [inherited]

Definition at line 299 of file estimator.h.

Referenced by `mappel::estimator::Estimator< Model >::clear_stats()`, `mappel::estimator::Estimator< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, and `mappel::estimator::ThreadedEstimator< Model >::record_exit_code()`.

9.38.5.8 `template<class Model > IdxVecT mappel::estimator::IterativeMaximizer< Model >::last_backtrack_idx` [protected], [inherited]

Debugging: Stores last set of `backtrack_idx`s when `data.save_seq==true`.

Definition at line 475 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::get_debug_stats()`, and `mappel::estimator::IterativeMaximizer< Model >::record_run_statistics()`.

9.38.5.9 `template<class Model > const int mappel::estimator::IterativeMaximizer< Model >::max_backtracks = 8` [static], [protected], [inherited]

Definition at line 462 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::backtrack()`, `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, and `mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack()`.

9.38.5.10 `template<class Model > int mappel::estimator::IterativeMaximizer< Model >::max_iterations` [protected], [inherited]

Definition at line 466 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, and `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.38.5.11 `template<class Model > int mappel::estimator::ThreadedEstimator< Model >::max_threads`
`[protected], [inherited]`

Definition at line 324 of file estimator.h.

9.38.5.12 `template<class Model > const double mappel::estimator::IterativeMaximizer< Model`
`>::min_eigenvalue_correction_delta = 1e-3 [static], [protected], [inherited]`

Ensure the minimum eigenvalue is at least this big when correcting indefinite matrix.

Definition at line 454 of file estimator.h.

9.38.5.13 `template<class Model > const double mappel::estimator::IterativeMaximizer< Model`
`>::min_profile_bound_residual = 1e-4 [static], [protected], [inherited]`

Minimum residual in quadratic solutions of equation (8) to accept. Revert to newton step.

Definition at line 464 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.38.5.14 `template<class Model > const Model& mappel::estimator::Estimator< Model >::model` `[protected],`
`[inherited]`

Definition at line 294 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::backtrack()`, `mappel::estimator::IterativeMaximizer< Model >::compute_estimate()`, `mappel::estimator::Estimator< Model >::compute_estimate_debug()`, `mappel::estimator::IterativeMaximizer< Model >::compute_estimate_debug()`, `mappel::estimator::Estimator< Model >::compute_profile_bound()`, `mappel::estimator::IterativeMaximizer< Model >::compute_profile_bound()`, `mappel::estimator::Estimator< Model >::compute_profile_bound_debug()`, `mappel::estimator::IterativeMaximizer< Model >::compute_profile_bound_debug()`, `mappel::estimator::Estimator< Model >::compute_profile_estimate()`, `mappel::estimator::IterativeMaximizer< Model >::compute_profile_estimate()`, `mappel::estimator::Estimator< Model >::estimate_max()`, `mappel::estimator::Estimator< Model >::estimate_max_stack()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_max_stack()`, `mappel::estimator::Estimator< Model >::estimate_profile_bounds()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_max()`, `mappel::estimator::HeuristicEstimator< Model >::get_debug_stats()`, `mappel::estimator::CGaussMLE< Model >::get_debug_stats()`, `mappel::estimator::Estimator< Model >::get_model()`, `mappel::estimator::IterativeMaximizer< Model >::local_maximize()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, `mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack()`, and `mappel::estimator::ThreadedEstimator< Model >::record_exit_code()`.

9.38.5.15 `template<class Model > std::mutex mappel::estimator::ThreadedEstimator< Model >::mtx` `[protected],`
`[inherited]`

Definition at line 326 of file estimator.h.

Referenced by `mappel::estimator::ThreadedEstimator< Model >::clear_stats()`, `mappel::estimator::IterativeMaximizer< Model >::clear_stats()`, `mappel::estimator::ThreadedEstimator< Model >::get_stats()`, `mappel::estimator::HeuristicEstimator< Model >::get_stats()`, `mappel::estimator::CGaussHeuristicEstimator< Model >::get_stats()`, `mappel::estimator::CGaussMLE< Model >::get_stats()`, `mappel::estimator::SimulatedAnnealingMaximizer< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, `mappel::estimator::ThreadedEstimator< Model >::record_exit_code()`, and `mappel::estimator::IterativeMaximizer< Model >::record_run_statistics()`.

9.38.5.16 `template<class Model > int mappel::estimator::Estimator< Model >::num_estimations = 0` [protected], [inherited]

Definition at line 297 of file estimator.h.

Referenced by `mappel::estimator::Estimator< Model >::clear_stats()`, `mappel::estimator::Estimator< Model >::get_stats()`, `mappel::estimator::ThreadedEstimator< Model >::get_stats()`, `mappel::estimator::HeuristicEstimator< Model >::get_stats()`, `mappel::estimator::CGaussHeuristicEstimator< Model >::get_stats()`, `mappel::estimator::CGaussMLE< Model >::get_stats()`, `mappel::estimator::SimulatedAnnealingMaximizer< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, and `mappel::estimator::Estimator< Model >::record_walltime()`.

9.38.5.17 `template<class Model > int mappel::estimator::ThreadedEstimator< Model >::num_threads` [protected], [inherited]

Definition at line 325 of file estimator.h.

Referenced by `mappel::estimator::ThreadedEstimator< Model >::clear_stats()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_max_stack()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_max()`, and `mappel::estimator::ThreadedEstimator< Model >::get_stats()`.

9.38.5.18 `template<class Model > int mappel::estimator::IterativeMaximizer< Model >::total_backtracks = 0` [protected], [inherited]

Definition at line 470 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::clear_stats()`, `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, and `mappel::estimator::IterativeMaximizer< Model >::record_run_statistics()`.

9.38.5.19 `template<class Model > int mappel::estimator::IterativeMaximizer< Model >::total_der_evals = 0` [protected], [inherited]

Definition at line 472 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::clear_stats()`, `mappel::estimator::SimulatedAnnealingMaximizer< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, and `mappel::estimator::IterativeMaximizer< Model >::record_run_statistics()`.

9.38.5.20 `template<class Model > int mappel::estimator::IterativeMaximizer< Model >::total_fun_evals = 0` [protected], [inherited]

Definition at line 471 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::clear_stats()`, `mappel::estimator::SimulatedAnnealingMaximizer< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, and `mappel::estimator::IterativeMaximizer< Model >::record_run_statistics()`.

9.38.5.21 `template<class Model > int mappel::estimator::IterativeMaximizer< Model >::total_iterations = 0`
`[protected], [inherited]`

Definition at line 469 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::clear_stats()`, `mappel::estimator::SimulatedAnnealingMaximizer< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, and `mappel::estimator::IterativeMaximizer< Model >::record_run_statistics()`.

9.38.5.22 `template<class Model > double mappel::estimator::Estimator< Model >::total_walltime = 0.` `[protected], [inherited]`

Definition at line 298 of file estimator.h.

Referenced by `mappel::estimator::Estimator< Model >::clear_stats()`, `mappel::estimator::Estimator< Model >::get_stats()`, `mappel::estimator::ThreadedEstimator< Model >::get_stats()`, and `mappel::estimator::Estimator< Model >::record_walltime()`.

The documentation for this class was generated from the following files:


- [estimator.h](#)
- [estimator_impl.h](#)

9.39 mappel::NotImplementedError Struct Reference

Feature not yet implemented.

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/util.h>
```

Inheritance diagram for `mappel::NotImplementedError`:



Public Member Functions

- [NotImplementedError](#) (std::string message)

9.39.1 Detailed Description

Feature not yet implemented.

Definition at line 111 of file util.h.

9.39.2 Constructor & Destructor Documentation

9.39.2.1 mappel::NotImplementedError::NotImplementedError (std::string *message*) [inline]

Definition at line 113 of file util.h.

The documentation for this struct was generated from the following file:


- [util.h](#)

9.40 mappel::NumericalError Struct Reference

Expected numerical condition does not hold.

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/util.h>
```

Inheritance diagram for mappel::NumericalError:

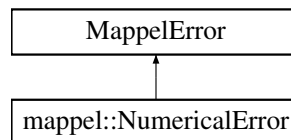

Public Member Functions

- [NumericalError](#) (std::string message)

9.40.1 Detailed Description

Expected numerical condition does not hold.

Definition at line 97 of file util.h.

9.40.2 Constructor & Destructor Documentation

9.40.2.1 mappel::NumericalError::NumericalError (std::string *message*) [inline]

Definition at line 99 of file util.h.

The documentation for this struct was generated from the following file:

- [util.h](#)

9.41 `omp_exception_catcher::impl_::OMPEXceptionCatcher<_dummy>` Class Template Reference

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/OMPEXceptionCatcher/OMPEXceptionCatcher.h>
```

Public Member Functions

- [OMPEXceptionCatcher](#) ()
- [OMPEXceptionCatcher](#) ([Strategy](#) strategy_)
- void [rethrow](#) () const
- template<class Function, class... Parameters>
void [run](#) (Function func, Parameters...params)

Static Public Member Functions

- static void [setGlobalDefaultStrategy](#) ([Strategy](#) s)

9.41.1 Detailed Description

```
template<class _dummy = void>  
class omp_exception_catcher::impl_::OMPEXceptionCatcher<_dummy>
```

Implementation of [OMPEXceptionCatcher](#)

Note: The template variable is a dummy. It exists solely to allow this class to be a template, which makes it header-only and allows static member initialization to be defined in the header file.

Definition at line 47 of file `OMPEXceptionCatcher.h`.

9.41.2 Constructor & Destructor Documentation

9.41.2.1 `template<class _dummy = void> omp_exception_catcher::impl_::OMPEXceptionCatcher<_dummy>::OMPEXceptionCatcher () [inline]`

Construct a new [OMPEXceptionCatcher](#) using the `GlobalDefaultStrategy`

Definition at line 55 of file `OMPEXceptionCatcher.h`.

9.41.2.2 `template<class _dummy = void> omp_exception_catcher::impl_::OMPEXceptionCatcher<_dummy>::OMPEXceptionCatcher (Strategy strategy_) [inline]`

Construct a new [OMPEXceptionCatcher](#) using the given strategy

Definition at line 59 of file `OMPEXceptionCatcher.h`.

9.41.3 Member Function Documentation

9.41.3.1 `template<class _dummy = void> void omp_exception_catcher::impl_::OMPExceptionCatcher< _dummy >::rethrow () const [inline]`

Rethrow any stored exceptions Should only be called from single-threaded blocks of code

Definition at line 64 of file OMPExceptionCatcher.h.

References `omp_exception_catcher::RethrowFirst`.

Referenced by `mappel::methods::openmp::cr_lower_bound_stack()`, `mappel::methods::openmp::error_bounds_expected_stack()`, `mappel::methods::openmp::estimate_posterior_stack()`, `mappel::methods::openmp::expected_information_stack()`, `mappel::methods::objective::openmp::grad_stack()`, `mappel::methods::objective::openmp::hessian_stack()`, `mappel::methods::objective::openmp::llh_stack()`, `mappel::methods::openmp::model_image_stack()`, `mappel::methods::objective::openmp::negative_definite_hessian_stack()`, `mappel::methods::objective::openmp::rllh_stack()`, `mappel::methods::openmp::sample_prior_stack()`, and `mappel::methods::openmp::simulate_image_stack()`.

9.41.3.2 `template<class _dummy = void> template<class Function , class... Parameters> void omp_exception_catcher::impl_::OMPExceptionCatcher< _dummy >::run (Function func, Parameters... params) [inline]`

Run a function in parallel code and prevent exceptions escaping.

Runs any function with any set of parameters and applies the chosen exception catching Strategy to prevent any exceptions escaping. This function is thread-safe designed to be called in parallel code blocks.

Parameters

in	<i>func</i>	function to call
in	<i>params...</i>	Possibly empty variadic set of parameters to call.

Definition at line 76 of file OMPExceptionCatcher.h.

References `omp_exception_catcher::Abort`, `omp_exception_catcher::Continue`, `omp_exception_catcher::DoNotTry`, and `omp_exception_catcher::RethrowFirst`.

Referenced by `mappel::methods::openmp::cr_lower_bound_stack()`, `mappel::methods::openmp::error_bounds_expected_stack()`, `mappel::methods::openmp::error_bounds_observed_stack()`, `mappel::methods::openmp::estimate_posterior_stack()`, `mappel::methods::openmp::expected_information_stack()`, `mappel::methods::objective::openmp::grad_stack()`, `mappel::methods::objective::openmp::hessian_stack()`, `mappel::methods::objective::openmp::llh_stack()`, `mappel::methods::openmp::model_image_stack()`, `mappel::methods::objective::openmp::negative_definite_hessian_stack()`, `mappel::methods::objective::openmp::rllh_stack()`, `mappel::methods::openmp::sample_prior_stack()`, and `mappel::methods::openmp::simulate_image_stack()`.

9.41.3.3 `template<class _dummy = void> static void omp_exception_catcher::impl_::OMPExceptionCatcher< _dummy >::setGlobalDefaultStrategy (Strategy s) [inline], [static]`

Definition at line 51 of file OMPExceptionCatcher.h.

The documentation for this class was generated from the following file:


- [OMPExceptionCatcher.h](#)

9.42 mappel::ParameterValueError Struct Reference

Parameter value is not valid.

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/util.h>
```

Inheritance diagram for mappel::ParameterValueError:



Public Member Functions

- [ParameterValueError](#) (std::string message)

9.42.1 Detailed Description

Parameter value is not valid.

Definition at line 69 of file util.h.

9.42.2 Constructor & Destructor Documentation

9.42.2.1 mappel::ParameterValueError::ParameterValueError (std::string *message*) `[inline]`

Definition at line 71 of file util.h.

The documentation for this struct was generated from the following file:


- [util.h](#)

9.43 mappel::PointEmitterModel Class Reference

A virtual Base type for point emitter localization models.

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/PointEmitterModel.h>
```

Inheritance diagram for mappel::PointEmitterModel:

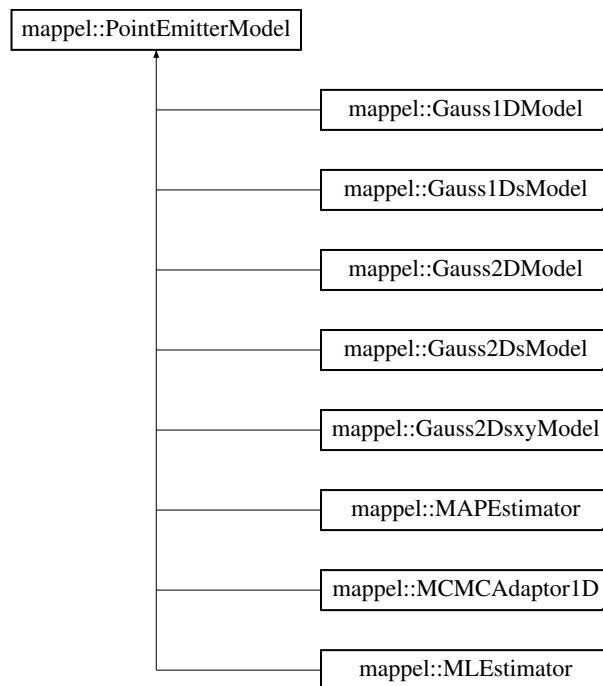

Public Types

- using [ParamT](#) = arma::vec
- using [ParamVecT](#) = arma::mat

Public Member Functions

- [StatsT get_stats](#) () const
- [IdxT get_num_params](#) () const
- void [check_param_shape](#) (const [ParamT](#) &theta) const
- void [check_param_shape](#) (const [ParamVecT](#) &theta) const
- void [check_psf_sigma](#) (double psf_sigma) const
- void [check_psf_sigma](#) (const [VecT](#) &psf_sigma) const
- [ParamT make_param](#) () const
- [ParamVecT make_param_stack](#) ([IdxT](#) n) const
- [MatT make_param_mat](#) () const
- [CubeT make_param_mat_stack](#) ([IdxT](#) n) const

- `template<class FillT >`
`ParamT make_param (FillT fill) const`
- `template<class FillT >`
`ParamVecT make_param_stack (IdxT n, FillT fill) const`
- `template<class FillT >`
`MatT make_param_mat (FillT fill) const`
- `template<class FillT >`
`CubeT make_param_mat_stack (IdxT n, FillT fill) const`
- `CompositeDist & get_prior ()`
- `const CompositeDist & get_prior () const`
- `void set_prior (CompositeDist &&prior_)`
- `void set_prior (const CompositeDist &prior_)`
- `IdxT get_num_hyperparams () const`
- `void set_hyperparams (const VecT &hyperparams)`
- `VecT get_hyperparams () const`
- `bool has_hyperparam (const std::string &name) const`
- `double get_hyperparam_value (const std::string &name) const`
- `int get_hyperparam_index (const std::string &name) const`
- `void set_hyperparam_value (const std::string &name, double value)`
- `void rename_hyperparam (const std::string &old_name, const std::string &new_name)`
- `StringVecT get_param_names () const`
- `void set_param_names (const StringVecT &desc)`
- `StringVecT get_hyperparam_names () const`
- `void set_hyperparam_names (const StringVecT &desc)`
- `template<class RngT >`
`ParamT sample_prior (RngT &rng) const`
- `ParamT sample_prior () const`
- `void set_bounds (const ParamT &lbound, const ParamT &ubound)`
- `void set_lbound (const ParamT &lbound)`
- `void set_ubound (const ParamT &ubound)`
- `const ParamT & get_lbound () const`
- `const ParamT & get_ubound () const`
- `bool theta_in_bounds (const ParamT &theta) const`
- `void bound_theta (ParamT &theta, double epsilon=bounds_epsilon) const`
- `ParamT bounded_theta (const ParamT &theta, double epsilon=bounds_epsilon) const`
- `ParamT reflected_theta (const ParamT &theta) const`
- `BoolVecT theta_stack_in_bounds (const ParamVecT &theta) const`
- `ParamVecT bounded_theta_stack (const ParamVecT &theta, double epsilon=bounds_epsilon) const`
- `ParamVecT reflected_theta_stack (const ParamVecT &theta) const`

Static Public Member Functions

- `static prior_hessian::TruncatedNormalDist make_prior_component_position_normal (IdxT size, double pos_↵, double sigma=default_sigma_pos)`
- `static prior_hessian::ScaledSymmetricBetaDist make_prior_component_position_beta (IdxT size, double pos_↵, double beta=default_beta_pos)`
- `static prior_hessian::TruncatedGammaDist make_prior_component_intensity (double mean=default_mean_↵, double kappa=default_intensity_kappa)`
- `static prior_hessian::TruncatedParetoDist make_prior_component_sigma (double min_sigma, double max_↵, double sigma, double alpha=default_alpha_sigma)`
- `static void set_rng_seed (RngSeedT seed)`
- `static ParallelRngManagerT & get_rng_manager ()`
- `static ParallelRngGeneratorT & get_rng_generator ()`

Static Public Attributes

- static const std::string [DefaultSeperableInitEstimator](#) = "TrustRegion"
- static const double [bounds_epsilon](#) = 1.0E-6
- static const double [global_min_psf_sigma](#) = 1E-1
- static const double [global_max_psf_sigma](#) = 1E2
- static const double [default_beta_pos](#) = 3
- static const double [default_sigma_pos](#) = 1
- static const double [default_mean_l](#) = 300
- static const double [default_max_l](#) = INFINITY
- static const double [default_intensity_kappa](#) = 2
- static const double [default_pixel_mean_bg](#) = 4
- static const double [default_alpha_sigma](#) = 2

Protected Member Functions

- [PointEmitterModel](#) ()
- [PointEmitterModel](#) (const CompositeDist &prior_)
- [PointEmitterModel](#) (CompositeDist &&prior_)
- [PointEmitterModel](#) (const [PointEmitterModel](#) &)
- [PointEmitterModel](#) ([PointEmitterModel](#) &&)
- [PointEmitterModel](#) & operator= (const [PointEmitterModel](#) &)
- [PointEmitterModel](#) & operator= ([PointEmitterModel](#) &&)

Protected Attributes

- CompositeDist [prior](#)
- [IdxT](#) [num_params](#)
- [IdxT](#) [num_hyperparams](#)
- [ParamT](#) [lbound](#)
- [ParamT](#) [ubound](#)

9.43.1 Detailed Description

A virtual Base type for point emitter localization models.

<Composite distribution from [prior_hessian::](#) for representing priorsInitialized with a prior as a [PriorHessian::](#)← CompositeDist object, this sets the dimensionality ([num_params](#)) and [num_hyperparams](#), and the associated descriptions.

Box-type bounding constraints are controlled with the [set_bounds\(\)](#) method.

Of note some of the common MCMC variables are rooted here in the inheritance tree.

Definition at line 44 of file [PointEmitterModel.h](#).

9.43.2 Member Typedef Documentation

9.43.2.1 using mappel::PointEmitterModel::ParamT = arma::vec

Parameter vector

Definition at line 47 of file PointEmitterModel.h.

9.43.2.2 using mappel::PointEmitterModel::ParamVecT = arma::mat

Vector of parameter vectors

Definition at line 48 of file PointEmitterModel.h.

9.43.3 Constructor & Destructor Documentation

9.43.3.1 mappel::PointEmitterModel::PointEmitterModel () [protected]

Definition at line 31 of file PointEmitterModel.cpp.

9.43.3.2 mappel::PointEmitterModel::PointEmitterModel (const CompositeDist & *prior_*) [explicit], [protected]

Definition at line 43 of file PointEmitterModel.cpp.

9.43.3.3 mappel::PointEmitterModel::PointEmitterModel (CompositeDist && *prior_*) [explicit], [protected]

Definition at line 37 of file PointEmitterModel.cpp.

9.43.3.4 mappel::PointEmitterModel::PointEmitterModel (const PointEmitterModel & *o*) [protected]

Definition at line 49 of file PointEmitterModel.cpp.

References `prior`.

9.43.3.5 mappel::PointEmitterModel::PointEmitterModel (PointEmitterModel && *o*) [protected]

Definition at line 55 of file PointEmitterModel.cpp.

9.43.4 Member Function Documentation

9.43.4.1 void mappel::PointEmitterModel::bound_theta (ParamT & *theta*, double *epsilon* = `bounds_epsilon`) const

Definition at line 248 of file PointEmitterModel.cpp.

References `check_param_shape()`, `lbound`, `num_params`, and `ubound`.

9.43.4.2 PointEmitterModel::ParamT mappel::PointEmitterModel::bounded_theta (const ParamT & *theta*, double *epsilon* = bounds_epsilon) const

Definition at line 265 of file PointEmitterModel.cpp.

References check_param_shape(), lbound, num_params, and ubound.

Referenced by bounded_theta_stack().

9.43.4.3 PointEmitterModel::ParamVecT mappel::PointEmitterModel::bounded_theta_stack (const ParamVecT & *theta*, double *epsilon* = bounds_epsilon) const

Definition at line 306 of file PointEmitterModel.cpp.

References bounded_theta(), check_param_shape(), and make_param_stack().

9.43.4.4 void mappel::PointEmitterModel::check_param_shape (const ParamT & *theta*) const

Definition at line 167 of file PointEmitterModel.cpp.

References num_params.

Referenced by bound_theta(), bounded_theta(), bounded_theta_stack(), reflected_theta(), reflected_theta_stack(), theta_in_bounds(), and theta_stack_in_bounds().

9.43.4.5 void mappel::PointEmitterModel::check_param_shape (const ParamVecT & *theta*) const

Definition at line 176 of file PointEmitterModel.cpp.

References num_params.

9.43.4.6 void mappel::PointEmitterModel::check_psf_sigma (double *psf_sigma*) const

Definition at line 185 of file PointEmitterModel.cpp.

References global_max_psf_sigma, and global_min_psf_sigma.

Referenced by mappel::Gauss1DModel::Gauss1DModel(), mappel::Gauss2DModel::Gauss2DModel(), mappel::Gauss2DsModel::Gauss2DsModel(), mappel::Gauss1DsModel::set_max_sigma(), mappel::Gauss2DsModel::set_max_sigma(), mappel::Gauss1DsModel::set_min_sigma(), mappel::Gauss2DsModel::set_min_sigma(), mappel::Gauss1DModel::set_psf_sigma(), and mappel::Gauss2DModel::set_psf_sigma().

9.43.4.7 void mappel::PointEmitterModel::check_psf_sigma (const VecT & *psf_sigma*) const

Definition at line 197 of file PointEmitterModel.cpp.

References global_max_psf_sigma, and global_min_psf_sigma.

9.43.4.8 `int mappel::PointEmitterModel::get_hyperparam_index (const std::string & name) const` `[inline]`

Definition at line 236 of file PointEmitterModel.h.

References prior.

9.43.4.9 `StringVecT mappel::PointEmitterModel::get_hyperparam_names () const` `[inline]`

Definition at line 256 of file PointEmitterModel.h.

References prior.

9.43.4.10 `double mappel::PointEmitterModel::get_hyperparam_value (const std::string & name) const` `[inline]`

Definition at line 232 of file PointEmitterModel.h.

References prior.

Referenced by `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`, and `mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling()`.

9.43.4.11 `PointEmitterModel::ParamT mappel::PointEmitterModel::get_hyperparams () const` `[inline]`

Definition at line 224 of file PointEmitterModel.h.

References prior.

9.43.4.12 `const PointEmitterModel::ParamT & mappel::PointEmitterModel::get_lbound () const` `[inline]`

Definition at line 212 of file PointEmitterModel.h.

References lbound.

Referenced by `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor2D::MCMCAdaptor2D()`, and `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`.

9.43.4.13 `IdxT mappel::PointEmitterModel::get_num_hyperparams () const` `[inline]`

Definition at line 208 of file PointEmitterModel.h.

References num_hyperparams.

9.43.4.14 `IdxT mappel::PointEmitterModel::get_num_params () const` `[inline]`

Definition at line 160 of file PointEmitterModel.h.

References num_params.

9.43.4.15 `StringVecT mappel::PointEmitterModel::get_param_names () const [inline]`

Definition at line 248 of file `PointEmitterModel.h`.

References prior.

9.43.4.16 `CompositeDist & mappel::PointEmitterModel::get_prior () [inline]`

Definition at line 200 of file `PointEmitterModel.h`.

References prior.

Referenced by `mappel::Gauss2DModel::update_internal_1Dsum_estimators()`, and `mappel::Gauss2DsModel::update_internal_1Dsum_estimators()`.

9.43.4.17 `const CompositeDist & mappel::PointEmitterModel::get_prior () const [inline]`

Definition at line 204 of file `PointEmitterModel.h`.

References prior.

9.43.4.18 `ParallelRngGeneratorT & mappel::PointEmitterModel::get_rng_generator () [static]`

Definition at line 120 of file `PointEmitterModel.cpp`.

References `mappel::rng_manager`.

9.43.4.19 `ParallelRngManagerT & mappel::PointEmitterModel::get_rng_manager () [static]`

Definition at line 115 of file `PointEmitterModel.cpp`.

References `mappel::rng_manager`.

9.43.4.20 `StatsT mappel::PointEmitterModel::get_stats () const`

Definition at line 125 of file `PointEmitterModel.cpp`.

References `lbound`, `num_hyperparams`, `num_params`, `prior`, `mappel::rng_manager`, and `ubound`.

Referenced by `mappel::Gauss1DModel::get_stats()`, `mappel::Gauss1DsModel::get_stats()`, `mappel::Gauss2DModel::get_stats()`, and `mappel::Gauss2DsModel::get_stats()`.

9.43.4.21 `const PointEmitterModel::ParamT & mappel::PointEmitterModel::get_ubound () const [inline]`

Definition at line 216 of file `PointEmitterModel.h`.

References `ubound`.

Referenced by `mappel::Gauss2DsxyModel::get_max_sigma_ratio()`, `mappel::Gauss2DsModel::get_max_sigma_ratio()`, `mappel::MCMCAdaptor1D::MCMCAdaptor1D()`, `mappel::MCMCAdaptor2D::MCMCAdaptor2D()`, `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`, and `mappel::Gauss2DsModel::set_max_sigma_ratio()`.

9.43.4.22 `bool mappel::PointEmitterModel::has_hyperparam (const std::string & name) const [inline]`

Definition at line 228 of file PointEmitterModel.h.

References prior.

9.43.4.23 `PointEmitterModel::ParamT mappel::PointEmitterModel::make_param () const [inline]`

Definition at line 164 of file PointEmitterModel.h.

References num_params.

Referenced by mappel::Gauss1DModel::initial_theta_estimate(), mappel::Gauss1DsModel::initial_theta_estimate(), mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsxyModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::Gauss1DModel::pixel_hess_update(), mappel::Gauss1DsModel::pixel_hess_update(), mappel::Gauss2DModel::pixel_hess_update(), and mappel::Gauss2DsModel::pixel_hess_update().

9.43.4.24 `template<class FillT > PointEmitterModel::ParamT mappel::PointEmitterModel::make_param (FillT fill) const`

Definition at line 181 of file PointEmitterModel.h.

References num_params.

9.43.4.25 `MatT mappel::PointEmitterModel::make_param_mat () const [inline]`

Definition at line 172 of file PointEmitterModel.h.

References num_params.

9.43.4.26 `template<class FillT > MatT mappel::PointEmitterModel::make_param_mat (FillT fill) const`

Definition at line 191 of file PointEmitterModel.h.

References num_params.

9.43.4.27 `CubeT mappel::PointEmitterModel::make_param_mat_stack (IdxT n) const [inline]`

Definition at line 176 of file PointEmitterModel.h.

References num_params.

9.43.4.28 `template<class FillT > CubeT mappel::PointEmitterModel::make_param_mat_stack (IdxT n, FillT fill) const`

Definition at line 196 of file PointEmitterModel.h.

References num_params.

9.43.4.29 `PointEmitterModel::ParamVecT mappel::PointEmitterModel::make_param_stack (IdxT n) const` `[inline]`

Definition at line 168 of file `PointEmitterModel.h`.

References `num_params`.

Referenced by `bounded_theta_stack()`, and `reflected_theta_stack()`.

9.43.4.30 `template<class FillT > PointEmitterModel::ParamVecT mappel::PointEmitterModel::make_param_stack (IdxT n, FillT fill) const`

Definition at line 186 of file `PointEmitterModel.h`.

References `num_params`.

9.43.4.31 `prior_hessian::TruncatedGammaDist mappel::PointEmitterModel::make_prior_component_intensity (double mean = default_mean_I, double kappa = default_intensity_kappa)` `[static]`

Definition at line 98 of file `PointEmitterModel.cpp`.

References `default_max_I`.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_beta_position()`, `mappel::Gauss1DModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss1DModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_prior_beta_position()`, `mappel::Gauss1DsModel::make_prior_beta_position()`, `mappel::Gauss1DModel::make_prior_beta_position()`, `mappel::Gauss2DsModel::make_prior_beta_position()`, `mappel::Gauss2DModel::make_prior_normal_position()`, `mappel::Gauss1DsModel::make_prior_normal_position()`, `mappel::Gauss1DModel::make_prior_normal_position()`, and `mappel::Gauss2DsModel::make_prior_normal_position()`.

9.43.4.32 `prior_hessian::ScaledSymmetricBetaDist mappel::PointEmitterModel::make_prior_component_position_beta (IdxT size, double pos_beta = default_beta_pos)` `[static]`

Definition at line 92 of file `PointEmitterModel.cpp`.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_beta_position()`, `mappel::Gauss1DModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss1DsModel::make_prior_beta_position()`, `mappel::Gauss2DsModel::make_prior_beta_position()`, `mappel::Gauss1DModel::make_prior_beta_position()`, and `mappel::Gauss2DsModel::make_prior_beta_position()`.

9.43.4.33 `prior_hessian::TruncatedNormalDist mappel::PointEmitterModel::make_prior_component_position_normal (IdxT size, double pos_sigma = default_sigma_pos)` `[static]`

Definition at line 85 of file `PointEmitterModel.cpp`.

Referenced by `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_default_prior_normal_position()`, `mappel::Gauss1DModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_prior_normal_position()`, `mappel::Gauss1DsModel::make_prior_normal_position()`, `mappel::Gauss1DModel::make_prior_normal_position()`, and `mappel::Gauss2DsModel::make_prior_normal_position()`.

9.43.4.34 `prior_hessian::TruncatedParetoDist mappel::PointEmitterModel::make_prior_component_sigma (double min_sigma, double max_sigma, double alpha = default_alpha_sigma) [static]`

Definition at line 104 of file PointEmitterModel.cpp.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, `mappel::Gauss1DsModel::make_prior_beta_position()`, `mappel::Gauss2DsModel::make_prior_beta_position()`, `mappel::Gauss1DsModel::make_prior_normal_position()`, and `mappel::Gauss2DsModel::make_prior_normal_position()`.

9.43.4.35 `PointEmitterModel & mappel::PointEmitterModel::operator= (const PointEmitterModel & o) [protected]`

Definition at line 61 of file PointEmitterModel.cpp.

References `prior`.

Referenced by `mappel::Gauss1DMAP::operator=()`, `mappel::Gauss1DMLE::operator=()`, `mappel::Gauss1DsMLE::operator=()`, `mappel::Gauss1DsMAP::operator=()`, `mappel::Gauss2DsMAP::operator=()`, `mappel::Gauss2DsMLE::operator=()`, `mappel::Gauss2DMLE::operator=()`, and `mappel::Gauss2DMAP::operator=()`.

9.43.4.36 `PointEmitterModel & mappel::PointEmitterModel::operator= (PointEmitterModel && o) [protected]`

Definition at line 68 of file PointEmitterModel.cpp.

References `lbound`, `num_hyperparams`, `num_params`, `prior`, and `ubound`.

9.43.4.37 `PointEmitterModel::ParamT mappel::PointEmitterModel::reflected_theta (const ParamT & theta) const`

Definition at line 276 of file PointEmitterModel.cpp.

References `check_param_shape()`, `lbound`, `num_params`, and `ubound`.

Referenced by `reflected_theta_stack()`.

9.43.4.38 `PointEmitterModel::ParamVecT mappel::PointEmitterModel::reflected_theta_stack (const ParamVecT & theta) const`

Definition at line 316 of file PointEmitterModel.cpp.

References `check_param_shape()`, `make_param_stack()`, and `reflected_theta()`.

9.43.4.39 `void mappel::PointEmitterModel::rename_hyperparam (const std::string & old_name, const std::string & new_name) [inline]`

Definition at line 244 of file PointEmitterModel.h.

References `prior`.

9.43.4.40 `template<class RngT > PointEmitterModel::ParamT mappel::PointEmitterModel::sample_prior (RngT & rng) const`

Definition at line 264 of file PointEmitterModel.h.

References prior.

9.43.4.41 `PointEmitterModel::ParamT mappel::PointEmitterModel::sample_prior () const [inline]`

Definition at line 268 of file PointEmitterModel.h.

References prior, and mappel::rng_manager.

9.43.4.42 `void mappel::PointEmitterModel::set_bounds (const ParamT & lbound_, const ParamT & ubound_)`

Box-type parameter bounds

Modifies the prior bounds to prevent sampling outside the valid box-constraints.

Definition at line 213 of file PointEmitterModel.cpp.

References bounds_epsilon, lbound, num_params, prior, and ubound.

9.43.4.43 `void mappel::PointEmitterModel::set_hyperparam_names (const StringVecT & desc) [inline]`

Definition at line 260 of file PointEmitterModel.h.

References prior.

9.43.4.44 `void mappel::PointEmitterModel::set_hyperparam_value (const std::string & name, double value) [inline]`

Definition at line 240 of file PointEmitterModel.h.

References prior.

9.43.4.45 `void mappel::PointEmitterModel::set_hyperparams (const VecT & hyperparams) [inline]`

Definition at line 220 of file PointEmitterModel.h.

References prior.

Referenced by mappel::Gauss2DModel::set_hyperparams(), and mappel::Gauss2DsModel::set_hyperparams().

9.43.4.46 `void mappel::PointEmitterModel::set_lbound (const ParamT & lbound)`

Definition at line 226 of file PointEmitterModel.cpp.

References bounds_epsilon, lbound, num_params, prior, and ubound.

Referenced by mappel::Gauss1DsModel::set_min_sigma().

9.43.4.47 `void mappel::PointEmitterModel::set_param_names (const StringVecT & desc) [inline]`

Definition at line 252 of file PointEmitterModel.h.

References prior.

9.43.4.48 `void mappel::PointEmitterModel::set_prior (CompositeDist && prior_)`

Definition at line 158 of file PointEmitterModel.cpp.

References lbound, num_hyperparams, num_params, prior, and ubound.

Referenced by mappel::Gauss2DModel::set_prior(), and mappel::Gauss2DsModel::set_prior().

9.43.4.49 `void mappel::PointEmitterModel::set_prior (const CompositeDist & prior_)`

Definition at line 149 of file PointEmitterModel.cpp.

References lbound, num_hyperparams, num_params, prior, and ubound.

9.43.4.50 `void mappel::PointEmitterModel::set_rng_seed (RngSeedT seed) [static]`

Definition at line 110 of file PointEmitterModel.cpp.

References mappel::rng_manager.

9.43.4.51 `void mappel::PointEmitterModel::set_ubound (const ParamT & ubound)`

Definition at line 237 of file PointEmitterModel.cpp.

References bounds_epsilon, lbound, num_params, prior, and ubound.

Referenced by mappel::Gauss1DsModel::set_max_sigma(), and mappel::Gauss2DsModel::set_max_sigma_ratio().

9.43.4.52 `bool mappel::PointEmitterModel::theta_in_bounds (const ParamT & theta) const`

Definition at line 257 of file PointEmitterModel.cpp.

References check_param_shape(), lbound, num_params, and ubound.

Referenced by mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), mappel::Gauss1DModel::make_stencil(), mappel::Gauss1DsModel::make_stencil(), mappel::Gauss2DModel::make_stencil(), mappel::Gauss2DsxyModel::make_stencil(), mappel::Gauss2DsModel::make_stencil(), and theta_stack_in_bounds().

9.43.4.53 `BoolVecT mappel::PointEmitterModel::theta_stack_in_bounds (const ParamVecT & theta) const`

Definition at line 296 of file PointEmitterModel.cpp.

References check_param_shape(), and theta_in_bounds().

9.43.5 Member Data Documentation

9.43.5.1 `const double mappel::PointEmitterModel::bounds_epsilon = 1.0E-6` `[static]`

Distance from the boundary to constrain in `bound_theta` and `bounded_theta` methods

Definition at line 52 of file `PointEmitterModel.h`.

Referenced by `set_bounds()`, `set_lbound()`, `mappel::Gauss2DsModel::set_max_sigma_ratio()`, and `set_ubound()`.

9.43.5.2 `const double mappel::PointEmitterModel::default_alpha_sigma = 2` `[static]`

Default per-pixel background gamma distribution shape

Definition at line 62 of file `PointEmitterModel.h`.

9.43.5.3 `const double mappel::PointEmitterModel::default_beta_pos = 3` `[static]`

Default position parameter in symmetric beta-distributions

Definition at line 56 of file `PointEmitterModel.h`.

9.43.5.4 `const double mappel::PointEmitterModel::default_intensity_kappa = 2` `[static]`

Default shape for intensity gamma distributions

Definition at line 60 of file `PointEmitterModel.h`.

9.43.5.5 `const double mappel::PointEmitterModel::default_max_l = INFINITY` `[static]`

Default maximum emitter intensity

Definition at line 59 of file `PointEmitterModel.h`.

Referenced by `make_prior_component_intensity()`.

9.43.5.6 `const double mappel::PointEmitterModel::default_mean_l = 300` `[static]`

Default emitter intensity mean

Definition at line 58 of file `PointEmitterModel.h`.

Referenced by `mappel::MCMCAdaptor1D::set_intensity_mcmc_sampling()`.

9.43.5.7 `const double mappel::PointEmitterModel::default_pixel_mean_bg = 4` `[static]`

Default per-pixel mean background counts

Definition at line 61 of file PointEmitterModel.h.

Referenced by `mappel::Gauss1DsModel::make_default_prior_beta_position()`, `mappel::Gauss2DModel::make_default_prior_beta_position()`, `mappel::Gauss1DModel::make_default_prior_beta_position()`, `mappel::Gauss2DsModel::make_default_prior_beta_position()`, `mappel::Gauss1DsModel::make_default_prior_normal_position()`, `mappel::Gauss2DModel::make_default_prior_normal_position()`, `mappel::Gauss1DModel::make_default_prior_normal_position()`, `mappel::Gauss2DsModel::make_default_prior_normal_position()`, and `mappel::MCMCAdaptor1D::set_background_mcmc_sampling()`.

9.43.5.8 `const double mappel::PointEmitterModel::default_sigma_pos = 1` `[static]`

Default position parameter in symmetric beta-distributions

Definition at line 57 of file PointEmitterModel.h.

9.43.5.9 `const std::string mappel::PointEmitterModel::DefaultSeperableInitEstimator = "TrustRegion"` `[static]`

Estimator name to use in 1D separable initializations

Definition at line 49 of file PointEmitterModel.h.

Referenced by `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsxyModel::initial_theta_estimate()`, and `mappel::Gauss2DsModel::initial_theta_estimate()`.

9.43.5.10 `const double mappel::PointEmitterModel::global_max_psf_sigma = 1E2` `[static]`

Global maximum for any `psf_sigma`. Sizes above this value are invalid, and nowhere near useful for practical point emitter localization

Definition at line 54 of file PointEmitterModel.h.

Referenced by `check_psf_sigma()`.

9.43.5.11 `const double mappel::PointEmitterModel::global_min_psf_sigma = 1E-1` `[static]`

Global minimum for any `psf_sigma`. Sizes below this value are invalid, and nowhere near useful for practical point emitter localization

Definition at line 53 of file PointEmitterModel.h.

Referenced by `check_psf_sigma()`.

9.43.5.12 `ParamT mappel::PointEmitterModel::lbound` `[protected]`

Definition at line 148 of file PointEmitterModel.h.

Referenced by `bound_theta()`, `bounded_theta()`, `get_lbound()`, `get_stats()`, `mappel::Gauss1DsModel::initial_theta_estimate()`, `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsModel::initial_theta_estimate()`, `operator=()`, `reflected_theta()`, `set_bounds()`, `set_lbound()`, `set_prior()`, `set_ubound()`, and `theta_in_bounds()`.

9.43.5.13 IdxT mappel::PointEmitterModel::num_hyperparams [protected]

Definition at line 147 of file PointEmitterModel.h.

Referenced by get_num_hyperparams(), get_stats(), operator=(), and set_prior().

9.43.5.14 IdxT mappel::PointEmitterModel::num_params [protected]

Definition at line 146 of file PointEmitterModel.h.

Referenced by bound_theta(), bounded_theta(), check_param_shape(), get_num_params(), get_stats(), mappel::Gauss1DModel::initial_theta_estimate(), mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), make_param(), make_param_mat(), make_param_mat_stack(), make_param_stack(), operator=(), reflected_theta(), set_bounds(), set_lbound(), set_prior(), set_ubound(), and theta_in_bounds().

9.43.5.15 CompositeDist mappel::PointEmitterModel::prior [protected]

Definition at line 145 of file PointEmitterModel.h.

Referenced by mappel::Gauss2DModel::debug_internal_sum_model_y(), mappel::Gauss2DsModel::debug_internal_sum_model_y(), mappel::Gauss2DModel::Gauss2DModel(), mappel::Gauss2DsModel::Gauss2DsModel(), get_hyperparam_index(), get_hyperparam_names(), get_hyperparam_value(), get_hyperparams(), mappel::Gauss1DsModel::get_max_sigma(), mappel::Gauss1DsModel::get_min_sigma(), get_param_names(), get_prior(), get_stats(), has_hyperparam(), operator=(), PointEmitterModel(), rename_hyperparam(), sample_prior(), set_bounds(), set_hyperparam_names(), set_hyperparam_value(), set_hyperparams(), set_lbound(), mappel::Gauss1DsModel::set_max_sigma(), mappel::Gauss1DsModel::set_min_sigma(), set_param_names(), set_prior(), and set_ubound().

9.43.5.16 ParamT mappel::PointEmitterModel::ubound [protected]

Definition at line 148 of file PointEmitterModel.h.

Referenced by bound_theta(), bounded_theta(), get_stats(), get_ubound(), mappel::Gauss1DsModel::initial_theta_estimate(), mappel::Gauss2DModel::initial_theta_estimate(), mappel::Gauss2DsModel::initial_theta_estimate(), operator=(), reflected_theta(), set_bounds(), set_lbound(), set_prior(), set_ubound(), and theta_in_bounds().

The documentation for this class was generated from the following files:


- [PointEmitterModel.h](#)
- [PointEmitterModel.cpp](#)

9.44 PoissonGaussianNoise2DObjective< ModelBase > Class Template Reference

A Base type for point emitter localization models that use 2d images.

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/PoissonGaussianNoise2DObjective.h>
```

Inheritance diagram for PoissonGaussianNoise2DObjective< ModelBase >:

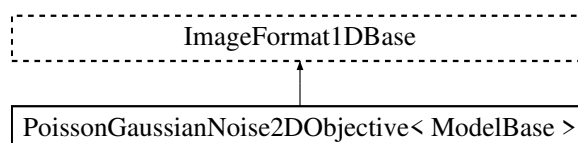

Public Types

- using [CoordIdxT](#) = uint32_t
- using [CoordT](#) = arma::vec< uint32_t >
- using [CoordStackT](#) = arma::mat< uint32_t >
- using [ModelDataT](#) = std::pair< ImageT, [CoordT](#) >
- using [ModelDataStackT](#) = std::pair< ImageStackT, [CoordStackT](#) >

Public Member Functions

- [PoissonGaussianNoise2DObjective](#) (const ImageSizeVecT &size, const ImageT &[sensor_gain_map](#), const ImageT &[sensor_bg_map](#))

Public Attributes

- ImageT [sensor_gain_map](#)
- ImageT [sensor_bg_map](#)

Static Public Attributes

- static const StringVecT [estimator_names](#)

9.44.1 Detailed Description

```
template<typename ModelBase>
class PoissonGaussianNoise2DObjective< ModelBase >
```

A Base type for point emitter localization models that use 2d images.

We don't assume much here, so that it is possible to have a wide range of 2D models

Definition at line 23 of file PoissonGaussianNoise2DObjective.h.

9.44.2 Member Typedef Documentation

9.44.2.1 `template<typename ModelBase > using PoissonGaussianNoise2DObjective< ModelBase >::CoordIdxT = uint32_t`

Definition at line 26 of file PoissonGaussianNoise2DObjective.h.

9.44.2.2 `template<typename ModelBase > using PoissonGaussianNoise2DObjective< ModelBase >::CoordStackT = arma::mat<uint32_t>`

Definition at line 28 of file PoissonGaussianNoise2DObjective.h.

9.44.2.3 `template<typename ModelBase > using PoissonGaussianNoise2DObjective< ModelBase >::CoordT = arma::vec<uint32_t>`

Definition at line 27 of file PoissonGaussianNoise2DObjective.h.

9.44.2.4 `template<typename ModelBase > using PoissonGaussianNoise2DObjective< ModelBase >::ModelDataStackT = std::pair<ImageStackT,CoordStackT>`

Objective function data stack type: 2D double precision image stack, of images gain-corrected to approximate photons counts

Definition at line 30 of file PoissonGaussianNoise2DObjective.h.

9.44.2.5 `template<typename ModelBase > using PoissonGaussianNoise2DObjective< ModelBase >::ModelDataT = std::pair<ImageT, CoordT>`

Objective function data type: 2D double precision image, gain-corrected to approximate photons counts

Definition at line 29 of file PoissonGaussianNoise2DObjective.h.

9.44.3 Constructor & Destructor Documentation

9.44.3.1 `template<typename ModelBase > PoissonGaussianNoise2DObjective< ModelBase >::PoissonGaussianNoise2DObjective (const ImageSizeVecT & size, const ImageT & sensor_gain_map, const ImageT & sensor_bg_map)`

9.44.4 Member Data Documentation

9.44.4.1 `template<typename ModelBase > const std::vector< std::string > PoissonGaussianNoise2DObjective< ModelBase >::estimator_names [static]`

Definition at line 25 of file PoissonGaussianNoise2DObjective.h.

9.44.4.2 `template<typename ModelBase > ImageT PoissonGaussianNoise2DObjective< ModelBase >::sensor_bg_map`

Definition at line 34 of file PoissonGaussianNoise2DObjective.h.

9.44.4.3 `template<typename ModelBase > ImageT PoissonGaussianNoise2DObjective< ModelBase >::sensor_gain_map`

Definition at line 33 of file PoissonGaussianNoise2DObjective.h.

The documentation for this class was generated from the following files:


- [PoissonGaussianNoise2DObjective.h](#)
- [PoissonGaussianNoise2DObjective.cpp](#)

9.45 mappel::PoissonNoise1DObjective Class Reference

A base class for 1D objectives with Poisson read noise. This objective function and its subclasses are for models where the only source of noise is the "shot" or "counting" or Poisson noise inherent to a discrete capture of photons given a certain mean rate of incidence on each pixel.

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/PoissonNoise1DObjective.h>
```

Inheritance diagram for mappel::PoissonNoise1DObjective:

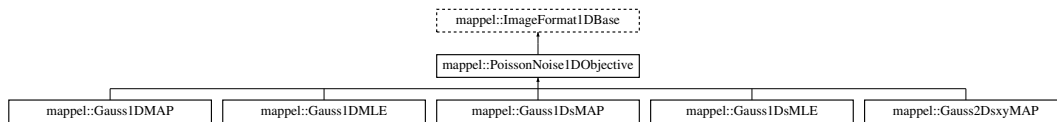

Public Types

- using [ModelDataT](#) = [ImageT](#)
- using [ModelDataStackT](#) = [ImageStackT](#)
- using [ImageCoordT](#) = [uint32_t](#)
- using [ImagePixelT](#) = [double](#)
- template<class CoordT >
using [ImageSizeShapeT](#) = [CoordT](#)
- template<class CoordT >
using [ImageSizeVecShapeT](#) = [arma::Col< CoordT >](#)
- using [ImageSizeT](#) = [ImageSizeShapeT< ImageCoordT >](#)
- using [ImageSizeVecT](#) = [ImageSizeVecShapeT< ImageCoordT >](#)
- template<class PixelT >
using [ImageShapeT](#) = [arma::Col< PixelT >](#)
- template<class PixelT >
using [ImageStackShapeT](#) = [arma::Mat< PixelT >](#)
- using [ImageT](#) = [ImageShapeT< ImagePixelT >](#)
- using [ImageStackT](#) = [ImageStackShapeT< ImagePixelT >](#)

Public Member Functions

- [StatsT](#) [get_stats](#) () const
- [ImageT](#) [make_image](#) () const
- [ImageStackT](#) [make_image_stack](#) ([ImageCoordT](#) n) const
- [ImageCoordT](#) [get_size_image_stack](#) (const [ImageStackT](#) &stack) const
- [ImageT](#) [get_image_from_stack](#) (const [ImageStackT](#) &stack, [ImageCoordT](#) n) const
- template<class ImT >
void [set_image_in_stack](#) ([ImageStackT](#) &stack, [ImageCoordT](#) n, const ImT &im) const
- [ImageSizeT](#) [get_size](#) () const
- [ImageCoordT](#) [get_size](#) ([IdxT](#) idx) const
- [ImageCoordT](#) [get_num_pixels](#) () const
- void [set_size](#) (const [ImageSizeT](#) &size_)
- void [set_size](#) (const [arma::Col< ImageCoordT >](#) &sz)
- void [check_image_shape](#) (const [ImageT](#) &im) const
Check the shape of a single images is correct for model size.
- void [check_image_shape](#) (const [ImageStackT](#) &ims) const
Check the shape of a stack of images is correct for model size.

Static Public Member Functions

- static void `check_size` (const `ImageSizeT` &size_)
Check the size argument for the model.

Static Public Attributes

- static const std::vector< std::string > `estimator_names`
- static const `ImageCoordT` `num_dim` = 1
- static const `ImageCoordT` `global_min_size` = 3
- static const `ImageCoordT` `global_max_size` = 512

Protected Member Functions

- `PoissonNoise1DObjective` ()
- `PoissonNoise1DObjective` (const `PoissonNoise1DObjective` &o)
- `PoissonNoise1DObjective` (`PoissonNoise1DObjective` &&o)
- `PoissonNoise1DObjective` & operator= (const `PoissonNoise1DObjective` &o)
- `PoissonNoise1DObjective` & operator= (`PoissonNoise1DObjective` &&o)

Protected Attributes

- `ImageSizeT` `size`

9.45.1 Detailed Description

A base class for 1D objectives with Poisson read noise. This objective function and its subclasses are for models where the only source of noise is the "shot" or "counting" or Poisson noise inherent to a discrete capture of photons given a certain mean rate of incidence on each pixel.

Definition at line 22 of file `PoissonNoise1DObjective.h`.

9.45.2 Member Typedef Documentation

9.45.2.1 using `mappel::ImageFormat1DBase::ImageCoordT = uint32_t` [inherited]

Image size coordinate storage type

Definition at line 25 of file `ImageFormat1DBase.h`.

9.45.2.2 using `mappel::ImageFormat1DBase::ImagePixelT = double` [inherited]

Image pixel storage type

Definition at line 26 of file `ImageFormat1DBase.h`.

9.45.2.3 `template<class PixelT > using mappel::ImageFormat1DBase::ImageShapeT = arma::Col<PixelT>`
[inherited]

Shape of the data type for a single image

Definition at line 33 of file ImageFormat1DBase.h.

9.45.2.4 `template<class CoordT > using mappel::ImageFormat1DBase::ImageSizeShapeT = CoordT` [inherited]

Shape of the data type to store 1-image's coordinates

Definition at line 28 of file ImageFormat1DBase.h.

9.45.2.5 `using mappel::ImageFormat1DBase::ImageSizeT = ImageSizeShapeT<ImageCoordT>`
[inherited]

Data type for a single image size

Definition at line 30 of file ImageFormat1DBase.h.

9.45.2.6 `template<class CoordT > using mappel::ImageFormat1DBase::ImageSizeVecShapeT = arma::Col<CoordT>`
[inherited]

Shape of the data type to store a vector of image's coordinates

Definition at line 29 of file ImageFormat1DBase.h.

9.45.2.7 `using mappel::ImageFormat1DBase::ImageSizeVecT = ImageSizeVecShapeT<ImageCoordT>`
[inherited]

Data type for a sequence of image sizes

Definition at line 31 of file ImageFormat1DBase.h.

9.45.2.8 `template<class PixelT > using mappel::ImageFormat1DBase::ImageStackShapeT = arma::Mat<PixelT>`
[inherited]

Shape of the data type for a sequence of images

Definition at line 34 of file ImageFormat1DBase.h.

9.45.2.9 `using mappel::ImageFormat1DBase::ImageStackT = ImageStackShapeT<ImagePixelT>`
[inherited]

Data type to represent a sequence of images

Definition at line 36 of file ImageFormat1DBase.h.

9.45.2.10 **using mappel::ImageFormat1DBase::ImageT = ImageShapeT<ImagePixelT>** [inherited]

Data type to represent single image

Definition at line 35 of file ImageFormat1DBase.h.

9.45.2.11 **using mappel::PoissonNoise1DObjective::ModelDataStackT = ImageStackT**

Objective function data stack type: 1D double precision image stack, of images gain-corrected to approximate photons counts

Definition at line 26 of file PoissonNoise1DObjective.h.

9.45.2.12 **using mappel::PoissonNoise1DObjective::ModelDataT = ImageT**

Objective function data type: 1D double precision image, gain-corrected to approximate photons counts

Definition at line 25 of file PoissonNoise1DObjective.h.

9.45.3 Constructor & Destructor Documentation

9.45.3.1 **mappel::PoissonNoise1DObjective::PoissonNoise1DObjective ()** [protected]

Definition at line 14 of file PoissonNoise1DObjective.cpp.

9.45.3.2 **mappel::PoissonNoise1DObjective::PoissonNoise1DObjective (const PoissonNoise1DObjective & o)**
[protected]

Definition at line 18 of file PoissonNoise1DObjective.cpp.

9.45.3.3 **mappel::PoissonNoise1DObjective::PoissonNoise1DObjective (PoissonNoise1DObjective && o)**
[protected]

Definition at line 22 of file PoissonNoise1DObjective.cpp.

9.45.4 Member Function Documentation

9.45.4.1 **void ImageFormat1DBase::check_image_shape (const ImageT & im) const** [inherited]

Check the shape of a single images is correct for model size.

Definition at line 59 of file ImageFormat1DBase.cpp.

References mappel::ImageFormat1DBase::size.

9.45.4.2 `void ImageFormat1DBase::check_image_shape (const ImageStackT & ims) const` `[inherited]`

Check the shape of a stack of images is correct for model size.

Definition at line 71 of file ImageFormat1DBase.cpp.

References mappel::ImageFormat1DBase::size.

9.45.4.3 `void ImageFormat1DBase::check_size (const ImageSizeT & size_)` `[static], [inherited]`

Check the size argument for the model.

Definition at line 39 of file ImageFormat1DBase.cpp.

References mappel::ImageFormat1DBase::global_max_size, and mappel::ImageFormat1DBase::global_min_size.

Referenced by mappel::ImageFormat1DBase::ImageFormat1DBase(), and mappel::ImageFormat1DBase::set_size().

9.45.4.4 `ImageFormat1DBase::ImageT ImageFormat1DBase::get_image_from_stack (const ImageStackT & stack, ImageCoordT n) const` `[inline], [inherited]`

Definition at line 108 of file ImageFormat1DBase.h.

9.45.4.5 `ImageFormat1DBase::ImageCoordT ImageFormat1DBase::get_num_pixels () const` `[inline], [inherited]`

Definition at line 82 of file ImageFormat1DBase.h.

References mappel::ImageFormat1DBase::size.

Referenced by mappel::ImageFormat1DBase::get_stats().

9.45.4.6 `ImageFormat1DBase::ImageSizeT ImageFormat1DBase::get_size () const` `[inline], [inherited]`

Definition at line 71 of file ImageFormat1DBase.h.

References mappel::ImageFormat1DBase::size.

Referenced by mappel::ImageFormat1DBase::get_stats().

9.45.4.7 `ImageFormat1DBase::ImageCoordT ImageFormat1DBase::get_size (IdxT idx) const` `[inherited]`

Definition at line 20 of file ImageFormat1DBase.cpp.

References mappel::ImageFormat1DBase::size.

9.45.4.8 `ImageFormat1DBase::ImageCoordT ImageFormat1DBase::get_size_image_stack (const ImageStackT & stack) const` `[inline], [inherited]`

Definition at line 101 of file ImageFormat1DBase.h.

9.45.4.9 StatsT ImageFormat1DBase::get_stats () const [inherited]

Definition at line 81 of file ImageFormat1DBase.cpp.

References mappel::ImageFormat1DBase::get_num_pixels(), mappel::ImageFormat1DBase::get_size(), and mappel::ImageFormat1DBase::num_dim.

Referenced by mappel::Gauss1DModel::get_stats(), and mappel::Gauss1DsModel::get_stats().

9.45.4.10 ImageFormat1DBase::ImageT ImageFormat1DBase::make_image () const [inline],[inherited]

Definition at line 87 of file ImageFormat1DBase.h.

References mappel::ImageFormat1DBase::size.

9.45.4.11 ImageFormat1DBase::ImageStackT ImageFormat1DBase::make_image_stack (ImageCoordT n) const [inline],[inherited]

Definition at line 94 of file ImageFormat1DBase.h.

References mappel::ImageFormat1DBase::size.

9.45.4.12 PoissonNoise1DObjective & mappel::PoissonNoise1DObjective::operator= (const PoissonNoise1DObjective & o) [protected]

Definition at line 26 of file PoissonNoise1DObjective.cpp.

Referenced by mappel::Gauss1DMap::operator=(), mappel::Gauss1DMLE::operator=(), mappel::Gauss1DsMap::operator=(), and mappel::Gauss1DsMLE::operator=().

9.45.4.13 PoissonNoise1DObjective & mappel::PoissonNoise1DObjective::operator= (PoissonNoise1DObjective && o) [protected]

Definition at line 31 of file PoissonNoise1DObjective.cpp.

9.45.4.14 template<class ImT > void ImageFormat1DBase::set_image_in_stack (ImageStackT & stack, ImageCoordT n, const ImT & im) const [inherited]

Definition at line 115 of file ImageFormat1DBase.h.

9.45.4.15 void ImageFormat1DBase::set_size (const ImageSizeT & size_) [inherited]

Definition at line 30 of file ImageFormat1DBase.cpp.

References mappel::ImageFormat1DBase::check_size(), and mappel::ImageFormat1DBase::size.

Referenced by mappel::ImageFormat1DBase::set_size(), mappel::Gauss2DModel::set_size(), and mappel::Gauss2DsModel::set_size().

9.45.4.16 `void ImageFormat1DBase::set_size (const arma::Col< ImageCoordT > & sz)` `[inline]`, `[inherited]`

Definition at line 75 of file ImageFormat1DBase.h.

References `mappel::ImageFormat1DBase::set_size()`.

9.45.5 Member Data Documentation

9.45.5.1 `const std::vector< std::string > mappel::PoissonNoise1DObjective::estimator_names` `[static]`

Definition at line 24 of file PoissonNoise1DObjective.h.

9.45.5.2 `const ImageFormat1DBase::ImageCoordT ImageFormat1DBase::global_max_size = 512` `[static]`, `[inherited]`

Maximum size along any dimension of the image. This is insanely big to catch obvious errors

Definition at line 40 of file ImageFormat1DBase.h.

Referenced by `mappel::ImageFormat1DBase::check_size()`.

9.45.5.3 `const ImageFormat1DBase::ImageCoordT ImageFormat1DBase::global_min_size = 3` `[static]`, `[inherited]`

Minimum size along any dimension of the image.

Definition at line 39 of file ImageFormat1DBase.h.

Referenced by `mappel::ImageFormat1DBase::check_size()`.

9.45.5.4 `const ImageFormat1DBase::ImageCoordT ImageFormat1DBase::num_dim = 1` `[static]`, `[inherited]`

Number of image dimensions.

Definition at line 38 of file ImageFormat1DBase.h.

Referenced by `mappel::ImageFormat1DBase::get_stats()`.

9.45.5.5 `ImageSizeT mappel::ImageFormat1DBase::size` `[protected]`, `[inherited]`

Number of pixels in X dimension for 1D image

Definition at line 65 of file ImageFormat1DBase.h.

Referenced by `mappel::ImageFormat1DBase::check_image_shape()`, `mappel::Gauss1DsModel::Stencil::compute_derivatives()`, `mappel::Gauss1DModel::Stencil::compute_derivatives()`, `mappel::ImageFormat1DBase::get_num_pixels()`, `mappel::ImageFormat1DBase::get_size()`, `mappel::Gauss1DModel::initial_theta_estimate()`, `mappel::Gauss1DsModel::initial_theta_estimate()`, `mappel::ImageFormat1DBase::make_image()`, `mappel::ImageFormat1DBase::make_image_stack()`, `mappel::ImageFormat1DBase::set_size()`, `mappel::Gauss1DsModel::Stencil::Stencil()`, and `mappel::Gauss1DModel::Stencil::Stencil()`.

The documentation for this class was generated from the following files:


- [PoissonNoise1DObjective.h](#)
- [PoissonNoise1DObjective.cpp](#)

9.46 mappel::PoissonNoise2DObjective Class Reference

A base class for 2D objectives with Poisson read noise. This objective function and its subclasses are for models where the only source of noise is the "shot" or "counting" or Poisson noise inherent to a discrete capture of photons given a certain mean rate of incidence on each pixel.

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/PoissonNoise2DObjective.h>
```

Inheritance diagram for mappel::PoissonNoise2DObjective:

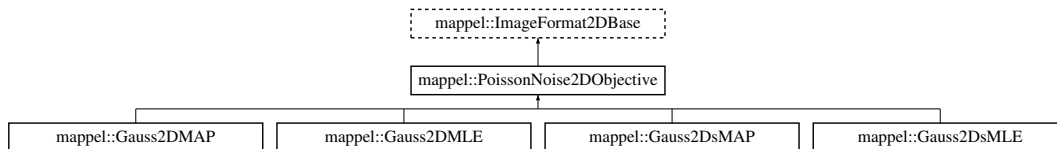

Public Types

- using `ModelDataT` = `ImageT`
- using `ModelDataStackT` = `ImageStackT`
- using `ImageCoordT` = `uint32_t`
- using `ImagePixelT` = `double`
- template<class `CoordT` >
using `ImageSizeShapeT` = `arma::Col< CoordT >`
- template<class `CoordT` >
using `ImageSizeVecShapeT` = `arma::Mat< CoordT >`
- using `ImageSizeT` = `ImageSizeShapeT< ImageCoordT >`
- using `ImageSizeVecT` = `ImageSizeVecShapeT< ImageCoordT >`
- template<class `PixelT` >
using `ImageShapeT` = `arma::Mat< PixelT >`
- template<class `PixelT` >
using `ImageStackShapeT` = `arma::Cube< PixelT >`
- using `ImageT` = `ImageShapeT< ImagePixelT >`
- using `ImageStackT` = `ImageStackShapeT< ImagePixelT >`

Public Member Functions

- `StatsT get_stats ()` const
- `ImageT make_image ()` const
- `ImageStackT make_image_stack (ImageCoordT n)` const
- `ImageCoordT get_size_image_stack (const ImageStackT &stack)` const
- `ImageT get_image_from_stack (const ImageStackT &stack, ImageCoordT n)` const
- template<class `ImT` >
void `set_image_in_stack (ImageStackT &stack, ImageCoordT n, const ImT &im)` const
- const `ImageSizeT` & `get_size ()` const
- `ImageCoordT get_size (IdxT idx)` const
- `ImageCoordT get_num_pixels ()` const
- void `set_size (const ImageSizeT &size_)`
- void `check_image_shape (const ImageT &im)` const
Check the shape of a single images is correct for model size.
- void `check_image_shape (const ImageStackT &ims)` const
Check the shape of a stack of images is correct for model size.

Static Public Member Functions

- static void [check_size](#) (const [ImageSizeT](#) &size_)
Check the size argument for the model.

Static Public Attributes

- static const std::vector< std::string > [estimator_names](#)
- static const [ImageCoordT](#) [num_dim](#) =2
- static const [ImageCoordT](#) [global_min_size](#) =3
- static const [ImageCoordT](#) [global_max_size](#) =512

Protected Member Functions

- [PoissonNoise2DObjective](#) ()
- [PoissonNoise2DObjective](#) (const [PoissonNoise2DObjective](#) &o)
- [PoissonNoise2DObjective](#) ([PoissonNoise2DObjective](#) &&o)
- [PoissonNoise2DObjective](#) & operator= (const [PoissonNoise2DObjective](#) &o)
- [PoissonNoise2DObjective](#) & operator= ([PoissonNoise2DObjective](#) &&o)

Protected Attributes

- [ImageSizeT](#) [size](#)

9.46.1 Detailed Description

A base class for 2D objectives with Poisson read noise. This objective function and its subclasses are for models where the only source of noise is the "shot" or "counting" or Poisson noise inherent to a discrete capture of photons given a certain mean rate of incidence on each pixel.

Definition at line 21 of file [PoissonNoise2DObjective.h](#).

9.46.2 Member Typedef Documentation

9.46.2.1 using mappel::ImageFormat2DBase::ImageCoordT = uint32_t [inherited]

Image size coordinate storage type

Definition at line 24 of file [ImageFormat2DBase.h](#).

9.46.2.2 using mappel::ImageFormat2DBase::ImagePixelT = double [inherited]

Image pixel storage type

Definition at line 25 of file [ImageFormat2DBase.h](#).

9.46.2.3 `template<class PixelT > using mappel::ImageFormat2DBase::ImageShapeT = arma::Mat<PixelT>`
[inherited]

Shape of the data type for a single image

Definition at line 32 of file ImageFormat2DBase.h.

9.46.2.4 `template<class CoordT > using mappel::ImageFormat2DBase::ImageSizeShapeT = arma::Col<CoordT>`
[inherited]

Shape of the data type to store a single image's coordinates

Definition at line 27 of file ImageFormat2DBase.h.

9.46.2.5 `using mappel::ImageFormat2DBase::ImageSizeT = ImageSizeShapeT<ImageCoordT>`
[inherited]

Data type for a single image size

Definition at line 29 of file ImageFormat2DBase.h.

9.46.2.6 `template<class CoordT > using mappel::ImageFormat2DBase::ImageSizeVecShapeT = arma::Mat<CoordT>`
[inherited]

Shape of the data type to store a vector of image's coordinates

Definition at line 28 of file ImageFormat2DBase.h.

9.46.2.7 `using mappel::ImageFormat2DBase::ImageSizeVecT = ImageSizeVecShapeT<ImageCoordT>`
[inherited]

Data type for a sequence of image sizes

Definition at line 30 of file ImageFormat2DBase.h.

9.46.2.8 `template<class PixelT > using mappel::ImageFormat2DBase::ImageStackShapeT = arma::Cube<PixelT>`
[inherited]

Shape of the data type for a sequence of images

Definition at line 33 of file ImageFormat2DBase.h.

9.46.2.9 `using mappel::ImageFormat2DBase::ImageStackT = ImageStackShapeT<ImagePixelT>`
[inherited]

Data type to represent a sequence of images

Definition at line 35 of file ImageFormat2DBase.h.

9.46.2.10 using mappel::ImageFormat2DBase::ImageT = ImageShapeT<ImagePixelT> [inherited]

Data type to represent single image

Definition at line 34 of file ImageFormat2DBase.h.

9.46.2.11 using mappel::PoissonNoise2DObjective::ModelDataStackT = ImageStackT

Objective function data stack type: 2D double precision image stack, of images gain-corrected to approximate photons counts

Definition at line 25 of file PoissonNoise2DObjective.h.

9.46.2.12 using mappel::PoissonNoise2DObjective::ModelDataT = ImageT

Objective function data type: 2D double precision image, gain-corrected to approximate photons counts

Definition at line 24 of file PoissonNoise2DObjective.h.

9.46.3 Constructor & Destructor Documentation

9.46.3.1 mappel::PoissonNoise2DObjective::PoissonNoise2DObjective () [protected]

Definition at line 15 of file PoissonNoise2DObjective.cpp.

9.46.3.2 mappel::PoissonNoise2DObjective::PoissonNoise2DObjective (const PoissonNoise2DObjective & o) [protected]

Definition at line 19 of file PoissonNoise2DObjective.cpp.

9.46.3.3 mappel::PoissonNoise2DObjective::PoissonNoise2DObjective (PoissonNoise2DObjective && o) [protected]

Definition at line 23 of file PoissonNoise2DObjective.cpp.

9.46.4 Member Function Documentation

9.46.4.1 void mappel::ImageFormat2DBase::check_image_shape (const ImageT & im) const [inherited]

Check the shape of a single images is correct for model size.

Definition at line 80 of file ImageFormat2DBase.cpp.

References mappel::ImageFormat2DBase::size.

9.46.4.2 `void mappel::ImageFormat2DBase::check_image_shape (const ImageStackT & ims) const` `[inherited]`

Check the shape of a stack of images is correct for model size.

Definition at line 93 of file ImageFormat2DBase.cpp.

References mappel::ImageFormat2DBase::size.

9.46.4.3 `void mappel::ImageFormat2DBase::check_size (const ImageSizeT & size_)` `[static]`, `[inherited]`

Check the size argument for the model.

Definition at line 60 of file ImageFormat2DBase.cpp.

References mappel::ImageFormat2DBase::global_max_size, and mappel::ImageFormat2DBase::global_min_size.

Referenced by mappel::ImageFormat2DBase::ImageFormat2DBase(), and mappel::ImageFormat2DBase::set_size().

9.46.4.4 `ImageFormat2DBase::ImageT mappel::ImageFormat2DBase::get_image_from_stack (const ImageStackT & stack, ImageCoordT n) const` `[inline]`, `[inherited]`

Definition at line 106 of file ImageFormat2DBase.h.

9.46.4.5 `ImageFormat2DBase::ImageCoordT mappel::ImageFormat2DBase::get_num_pixels () const` `[inline]`, `[inherited]`

Definition at line 79 of file ImageFormat2DBase.h.

References mappel::ImageFormat2DBase::size.

Referenced by mappel::ImageFormat2DBase::get_stats().

9.46.4.6 `const ImageFormat2DBase::ImageSizeT & mappel::ImageFormat2DBase::get_size () const` `[inline]`, `[inherited]`

Definition at line 74 of file ImageFormat2DBase.h.

References mappel::ImageFormat2DBase::size.

9.46.4.7 `ImageFormat2DBase::ImageCoordT mappel::ImageFormat2DBase::get_size (IdxT idx) const` `[inherited]`

Definition at line 41 of file ImageFormat2DBase.cpp.

References mappel::ImageFormat2DBase::size.

9.46.4.8 `ImageFormat2DBase::ImageCoordT mappel::ImageFormat2DBase::get_size_image_stack (const ImageStackT & stack) const` `[inline]`, `[inherited]`

Definition at line 99 of file ImageFormat2DBase.h.

9.46.4.9 StatsT mappel::ImageFormat2DBase::get_stats () const [inherited]

Definition at line 103 of file ImageFormat2DBase.cpp.

References mappel::ImageFormat2DBase::get_num_pixels(), mappel::ImageFormat2DBase::num_dim, and mappel::ImageFormat2DBase::size.

Referenced by mappel::Gauss2DModel::get_stats(), and mappel::Gauss2DsModel::get_stats().

9.46.4.10 ImageFormat2DBase::ImageT mappel::ImageFormat2DBase::make_image () const [inline], [inherited]

Definition at line 85 of file ImageFormat2DBase.h.

References mappel::ImageFormat2DBase::size.

9.46.4.11 ImageFormat2DBase::ImageStackT mappel::ImageFormat2DBase::make_image_stack (ImageCoordT *n*) const [inline], [inherited]

Definition at line 92 of file ImageFormat2DBase.h.

References mappel::ImageFormat2DBase::size.

9.46.4.12 PoissonNoise2DObjective & mappel::PoissonNoise2DObjective::operator= (const PoissonNoise2DObjective & *o*) [protected]

Definition at line 27 of file PoissonNoise2DObjective.cpp.

Referenced by mappel::Gauss2DsMAP::operator=(), mappel::Gauss2DsMLE::operator=(), mappel::Gauss2DMAP::operator=(), and mappel::Gauss2DMLE::operator=().

9.46.4.13 PoissonNoise2DObjective & mappel::PoissonNoise2DObjective::operator= (PoissonNoise2DObjective && *o*) [protected]

Definition at line 32 of file PoissonNoise2DObjective.cpp.

9.46.4.14 template<class ImT > void mappel::ImageFormat2DBase::set_image_in_stack (ImageStackT & *stack*, ImageCoordT *n*, const ImT & *im*) const [inherited]

Definition at line 113 of file ImageFormat2DBase.h.

9.46.4.15 void mappel::ImageFormat2DBase::set_size (const ImageSizeT & *size*) [inherited]

Definition at line 51 of file ImageFormat2DBase.cpp.

References mappel::ImageFormat2DBase::check_size(), and mappel::ImageFormat2DBase::size.

Referenced by mappel::Gauss2DModel::set_size(), and mappel::Gauss2DsModel::set_size().

9.46.5 Member Data Documentation

9.46.5.1 `const std::vector< std::string > mappel::PoissonNoise2DObjective::estimator_names` `[static]`

Definition at line 23 of file PoissonNoise2DObjective.h.

9.46.5.2 `const ImageFormat2DBase::ImageCoordT mappel::ImageFormat2DBase::global_max_size =512` `[static]`,
`[inherited]`

Maximum size along any dimension of the image. This is insanely big to catch obvious errors

Definition at line 39 of file ImageFormat2DBase.h.

Referenced by `mappel::ImageFormat2DBase::check_size()`.

9.46.5.3 `const ImageFormat2DBase::ImageCoordT mappel::ImageFormat2DBase::global_min_size =3` `[static]`,
`[inherited]`

Minimum size along any dimension of the image.

Definition at line 38 of file ImageFormat2DBase.h.

Referenced by `mappel::ImageFormat2DBase::check_size()`.

9.46.5.4 `const ImageFormat2DBase::ImageCoordT mappel::ImageFormat2DBase::num_dim =2` `[static]`,
`[inherited]`

Number of image dimensions.

Definition at line 37 of file ImageFormat2DBase.h.

Referenced by `mappel::ImageFormat2DBase::get_stats()`.

9.46.5.5 `ImageSizeT mappel::ImageFormat2DBase::size` `[protected]`, `[inherited]`

Number of pixels in X dimension for 1D image

Definition at line 67 of file ImageFormat2DBase.h.

Referenced by `mappel::cgauss_compute_estimate()`, `mappel::cgauss_compute_estimate_debug()`, `mappel::cgauss_←
_heuristic_compute_estimate()`, `mappel::ImageFormat2DBase::check_image_shape()`, `mappel::Gauss2DModel::←
Stencil::compute_derivatives()`, `mappel::Gauss2DsModel::Stencil::compute_derivatives()`, `mappel::Gauss2DModel::←
::debug_internal_sum_model_y()`, `mappel::Gauss2DsModel::debug_internal_sum_model_y()`, `mappel::methods::←
::expected_information()`, `mappel::Gauss2DModel::Gauss2DModel()`, `mappel::Gauss2DsMAP::Gauss2DsMA←
P()`, `mappel::Gauss2DsMLE::Gauss2DsMLE()`, `mappel::Gauss2DsModel::Gauss2DsModel()`, `mappel::Image←
Format2DBase::get_num_pixels()`, `mappel::ImageFormat2DBase::get_size()`, `mappel::ImageFormat2DBase::get←
_stats()`, `mappel::methods::likelihood::grad()`, `mappel::methods::likelihood::grad2()`, `mappel::methods::likelihood←
::debug::grad_components()`, `mappel::methods::likelihood::hessian()`, `mappel::methods::likelihood::debug::hessian←
_components()`, `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DsModel::initial_theta_estimate()`,

mappel::methods::likelihood::llh(), mappel::methods::likelihood::debug::llh_components(), mappel::Gauss2DModel::make_default_prior_beta_position(), mappel::Gauss2DsModel::make_default_prior_beta_position(), mappel::Gauss2DModel::make_default_prior_normal_position(), mappel::Gauss2DsModel::make_default_prior_normal_position(), mappel::ImageFormat2DBase::make_image(), mappel::ImageFormat2DBase::make_image_stack(), mappel::Gauss2DModel::make_internal_1Dsum_estimator(), mappel::Gauss2DsModel::make_internal_1Dsum_estimator(), mappel::Gauss2DModel::make_prior_beta_position(), mappel::Gauss2DsModel::make_prior_beta_position(), mappel::Gauss2DModel::make_prior_normal_position(), mappel::Gauss2DsModel::make_prior_normal_position(), mappel::methods::model_image(), mappel::ImageFormat2DBase::operator=(), mappel::methods::likelihood::rllh(), mappel::methods::likelihood::debug::rllh_components(), mappel::ImageFormat2DBase::set_size(), mappel::Gauss2DModel::set_size(), mappel::Gauss2DsModel::set_size(), mappel::methods::simulate_image(), mappel::methods::simulate_image_from_model(), mappel::Gauss2DModel::Stencil::Stencil(), mappel::Gauss2DsModel::Stencil::Stencil(), mappel::Gauss2DModel::update_internal_1Dsum_estimators(), and mappel::Gauss2DsModel::update_internal_1Dsum_estimators().

The documentation for this class was generated from the following files:

- [PoissonNoise2DObjective.h](#)
- [PoissonNoise2DObjective.cpp](#)

9.47 mappel::estimator::ProfileBoundsData Struct Reference

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/estimator.h>
```

Public Member Functions

- void [initialize_arrays](#) (IdxT Nparams)

Public Attributes

- [IdxVecT estimated_idx](#)
List of indexes for computed parameters. Empty to compute all parameters.
- double [confidence](#) = -1
Confidence level. If invalid, use default value.
- [MLEData mle](#)
Theta maximum-likelihood estimate, rllh, and Obsl.
- double [target_rllh_delta](#) = INFINITY
Targeted rllh change in value from MLE ($-\chi^2_{inv}(confidence, 1)/2$)
- [IdxT Nparams_est](#) = 0
number of parameters estimated = estimated_param_idx.n_elem.
- [VecT profile_lb](#)
size:[Nparams_est] Lower bound estimated at each estimated_idx.
- [VecT profile_ub](#)
size:[Nparams_est] Upper bound estimated at each estimated_idx.
- [MatT profile_points_lb](#)
size:[NumParams, Nparams_est] Optimal theta found at each lower bound estimate for each estimated_idx.
- [MatT profile_points_ub](#)
size:[NumParams, Nparams_est] Optimal theta found at each upper bound estimate for each estimated_idx.
- [VecT profile_points_lb_rllh](#)
size:[Nparams_est] RLLH at each of the profile_points_lb
- [VecT profile_points_ub_rllh](#)
size:[Nparams_est] RLLH at each of the profile_points_lb

9.47.1 Detailed Description

Data related to a profile bounds estimation for a single image Includes both controlling (input) parameters as well as reporting (output) parameters to give output parameters context.

Definition at line 90 of file estimator.h.

9.47.2 Member Function Documentation

9.47.2.1 void mappel::estimator::ProfileBoundsData::initialize_arrays (IdxT Nparams)

Definition at line 18 of file estimator.cpp.

References estimated_idxxs, Nparams_est, profile_lb, profile_points_lb, profile_points_lb_rllh, profile_points_ub, profile_points_ub_rllh, and profile_ub.

Referenced by mappel::estimator::Estimator< Model >::estimate_profile_bounds(), mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel(), and mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack().

9.47.3 Member Data Documentation

9.47.3.1 double mappel::estimator::ProfileBoundsData::confidence =-1

Confidence level. If invalid, use default value.

Definition at line 94 of file estimator.h.

Referenced by mappel::methods::error_bounds_profile_likelihood(), and mappel::methods::openmp::error_bounds_profile_likelihood_parallel().

9.47.3.2 IdxVecT mappel::estimator::ProfileBoundsData::estimated_idxxs

List of indexes for computed parameters. Empty to compute all parameters.

Definition at line 93 of file estimator.h.

Referenced by mappel::estimator::IterativeMaximizer< Model >::compute_profile_bound(), mappel::methods::error_bounds_profile_likelihood(), mappel::methods::openmp::error_bounds_profile_likelihood_parallel(), mappel::estimator::Estimator< Model >::estimate_profile_bounds(), mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel(), mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack(), initialize_arrays(), and mappel::estimator::ProfileBoundsDataStack::initialize_arrays().

9.47.3.3 MLEData mappel::estimator::ProfileBoundsData::mle

Theta maximum-likelihood estimate, rllh, and Obsl.

Definition at line 95 of file estimator.h.

Referenced by mappel::estimator::IterativeMaximizer< Model >::compute_profile_bound(), mappel::estimator::Estimator< Model >::estimate_profile_bounds(), mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel(), and mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack().

9.47.3.4 IdxT mappel::estimator::ProfileBoundsData::Nparams_est =0

number of parameters estimated =estimated_param_idx.n_elem.

Definition at line 99 of file estimator.h.

Referenced by mappel::estimator::Estimator< Model >::estimate_profile_bounds(), mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel(), initialize_arrays(), and mappel::estimator::ProfileBoundsDataStack::initialize_arrays().

9.47.3.5 VecT mappel::estimator::ProfileBoundsData::profile_lb

size:[Nparams_est] Lower bound estimated at each estimated_idx.

Definition at line 100 of file estimator.h.

Referenced by mappel::estimator::IterativeMaximizer< Model >::compute_profile_bound(), mappel::estimator::Estimator< Model >::estimate_profile_bounds(), mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack(), initialize_arrays(), and mappel::estimator::ProfileBoundsDataStack::initialize_arrays().

9.47.3.6 MatT mappel::estimator::ProfileBoundsData::profile_points_lb

size:[NumParams,Nparams_est] Optimal theta found at each lower bound estimate for each estimated_idx.

Definition at line 102 of file estimator.h.

Referenced by mappel::estimator::IterativeMaximizer< Model >::compute_profile_bound(), mappel::estimator::Estimator< Model >::estimate_profile_bounds(), mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack(), initialize_arrays(), and mappel::estimator::ProfileBoundsDataStack::initialize_arrays().

9.47.3.7 VecT mappel::estimator::ProfileBoundsData::profile_points_lb_rllh

size:[Nparams_est] RLLH at each of the profile_points_lb

Definition at line 104 of file estimator.h.

Referenced by mappel::estimator::IterativeMaximizer< Model >::compute_profile_bound(), mappel::estimator::Estimator< Model >::estimate_profile_bounds(), mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack(), initialize_arrays(), and mappel::estimator::ProfileBoundsDataStack::initialize_arrays().

9.47.3.8 MatT mappel::estimator::ProfileBoundsData::profile_points_ub

size:[NumParams,Nparams_est] Optimal theta found at each upper bound estimate for each estimated_idx.

Definition at line 103 of file estimator.h.

Referenced by mappel::estimator::IterativeMaximizer< Model >::compute_profile_bound(), mappel::estimator::Estimator< Model >::estimate_profile_bounds(), mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack(), initialize_arrays(), and mappel::estimator::ProfileBoundsDataStack::initialize_arrays().

9.47.3.9 VecT mappel::estimator::ProfileBoundsData::profile_points_ub_rllh

size:[Nparams_est] RLLH at each of the profile_points_lb

Definition at line 105 of file estimator.h.

Referenced by mappel::estimator::IterativeMaximizer< Model >::compute_profile_bound(), mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack(), initialize_arrays(), and mappel::estimator::ProfileBoundsDataStack::initialize_arrays().

9.47.3.10 VecT mappel::estimator::ProfileBoundsData::profile_ub

size:[Nparams_est] Upper bound estimated at each estimated_idx.

Definition at line 101 of file estimator.h.

Referenced by mappel::estimator::IterativeMaximizer< Model >::compute_profile_bound(), mappel::estimator::Estimator< Model >::estimate_profile_bounds(), mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack(), initialize_arrays(), and mappel::estimator::ProfileBoundsDataStack::initialize_arrays().

9.47.3.11 double mappel::estimator::ProfileBoundsData::target_rllh_delta =-INFINITY

Targeted rllh change in value from MLE ($-\chi^2_{inv}(\text{confidence}, 1)/2$)

Definition at line 98 of file estimator.h.

Referenced by mappel::estimator::IterativeMaximizer< Model >::compute_profile_bound(), mappel::methods::error_bounds_profile_likelihood(), mappel::methods::openmp::error_bounds_profile_likelihood_parallel(), mappel::estimator::Estimator< Model >::estimate_profile_bounds(), mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel(), and mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack().

The documentation for this struct was generated from the following files:

- [estimator.h](#)
- [estimator.cpp](#)

9.48 mappel::estimator::ProfileBoundsDataStack Struct Reference

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/estimator.h>
```

Public Member Functions

- void [initialize_arrays](#) (IdxT Nparams)

Public Attributes

- [IdxVecT estimated_idx](#)s
List of indexes for computed parameters. Empty to compute all parameters.
- double [confidence](#) = -1
Confidence level. If invalid, use default value.
- [MLEDataStack mle](#)
Theta maximum-likelihood estimate, rllh, and Obsl stack.
- [IdxT Nparams_est](#) = 0
number of parameters estimated = estimated_param_idx.n_elem.
- [IdxT Ndata](#) = 0
size of the data stack estimated. (number of individual problem data estimates performed.)
- double [target_rllh_delta](#) = -INFINITY
Targeted rllh change in value from MLE ($-\chi^2_{inv}(\text{confidence}, 1)/2$)
- [MatT profile_lb](#)
size:[Nparams_est, Ndata] Lower bound estimated at each estimated_idx.
- [MatT profile_ub](#)
size:[Nparams_est, Ndata] Upper bound estimated at each estimated_idx.
- [CubeT profile_points_lb](#)
size:[Nparams, Nparams_est, Ndata] Optimal theta found at each lower bound estimate for each estimated_idx.
- [CubeT profile_points_ub](#)
size:[Nparams, Nparams_est, Ndata] Optimal theta found at each upper bound estimate for each estimated_idx.
- [MatT profile_points_lb_rllh](#)
size:[Nparams_est, Ndata] RLLH at each of the profile_points_lb
- [MatT profile_points_ub_rllh](#)
size:[Nparams_est, Ndata] RLLH at each of the profile_points_ub

9.48.1 Detailed Description

Data related to a profile bounds estimation for a stack of images Includes both controlling (input) parameters as well as reporting (ouput) parameters to give output parameters context.

Definition at line 134 of file estimator.h.

9.48.2 Member Function Documentation

9.48.2.1 void mappel::estimator::ProfileBoundsDataStack::initialize_arrays ([IdxT Nparams](#))

Definition at line 29 of file estimator.cpp.

References [mappel::estimator::ProfileBoundsData::estimated_idx](#)s, [mappel::estimator::ProfileBoundsData::Nparams_est](#), [mappel::estimator::ProfileBoundsData::profile_lb](#), [mappel::estimator::ProfileBoundsData::profile_points_lb](#), [mappel::estimator::ProfileBoundsData::profile_points_lb_rllh](#), [mappel::estimator::ProfileBoundsData::profile_points_ub](#), [mappel::estimator::ProfileBoundsData::profile_points_ub_rllh](#), and [mappel::estimator::ProfileBoundsData::profile_ub](#).

Referenced by [mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack\(\)](#).

9.48.3 Member Data Documentation

9.48.3.1 `double mappel::estimator::ProfileBoundsDataStack::confidence = 1`

Confidence level. If invalid, use default value.

Definition at line 137 of file estimator.h.

Referenced by `mappel::methods::openmp::error_bounds_profile_likelihood_stack()`.

9.48.3.2 `IdxVecT mappel::estimator::ProfileBoundsDataStack::estimated_idx`

List of indexes for computed parameters. Empty to compute all parameters.

Definition at line 136 of file estimator.h.

Referenced by `mappel::methods::openmp::error_bounds_profile_likelihood_stack()`, and `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack()`.

9.48.3.3 `MLEDataStack mappel::estimator::ProfileBoundsDataStack::mle`

Theta maximum-likelihood estimate, rllh, and Obsl stack.

Definition at line 138 of file estimator.h.

Referenced by `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack()`.

9.48.3.4 `IdxT mappel::estimator::ProfileBoundsDataStack::Ndata = 0`

size of the data stack estimated. (number of individual problem data estimates performed.)

Definition at line 142 of file estimator.h.

Referenced by `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack()`.

9.48.3.5 `IdxT mappel::estimator::ProfileBoundsDataStack::Nparams_est = 0`

number of parameters estimated = `estimated_param_idx.n_elem`.

Definition at line 141 of file estimator.h.

Referenced by `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack()`.

9.48.3.6 `MatT mappel::estimator::ProfileBoundsDataStack::profile_lb`

size:[Nparams_est,Ndata] Lower bound estimated at each `estimated_idx`.

Definition at line 144 of file estimator.h.

Referenced by `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack()`.

9.48.3.7 CubeT mappel::estimator::ProfileBoundsDataStack::profile_points_lb

size:[Nparams,Nparams_est,Ndata] Optimal theta found at each lower bound estimate for each estimated_idx.

Definition at line 146 of file estimator.h.

Referenced by mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack().

9.48.3.8 MatT mappel::estimator::ProfileBoundsDataStack::profile_points_lb_rllh

size:[Nparams_est,Ndata] RLLH at each of the profile_points_lb

Definition at line 148 of file estimator.h.

Referenced by mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack().

9.48.3.9 CubeT mappel::estimator::ProfileBoundsDataStack::profile_points_ub

size:[Nparams,Nparams_est,Ndata] Optimal theta found at each upper bound estimate for each estimated_idx.

Definition at line 147 of file estimator.h.

Referenced by mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack().

9.48.3.10 MatT mappel::estimator::ProfileBoundsDataStack::profile_points_ub_rllh

size:[Nparams_est,Ndata] RLLH at each of the profile_points_ub

Definition at line 149 of file estimator.h.

Referenced by mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack().

9.48.3.11 MatT mappel::estimator::ProfileBoundsDataStack::profile_ub

size:[Nparams_est,Ndata] Upper bound estimated at each estimated_idx.

Definition at line 145 of file estimator.h.

Referenced by mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack().

9.48.3.12 double mappel::estimator::ProfileBoundsDataStack::target_rllh_delta =-INFINITY

Targeted rllh change in value from MLE ($-\chi^2_{\text{inv}}(\text{confidence},1)/2$)

Definition at line 143 of file estimator.h.

Referenced by mappel::methods::openmp::error_bounds_profile_likelihood_stack(), and mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack().


The documentation for this struct was generated from the following files:

- [estimator.h](#)
- [estimator.cpp](#)

9.49 mappel::estimator::QuasiNewtonMaximizer< Model > Class Template Reference

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/estimator.h>
```

Inheritance diagram for mappel::estimator::QuasiNewtonMaximizer< Model >:

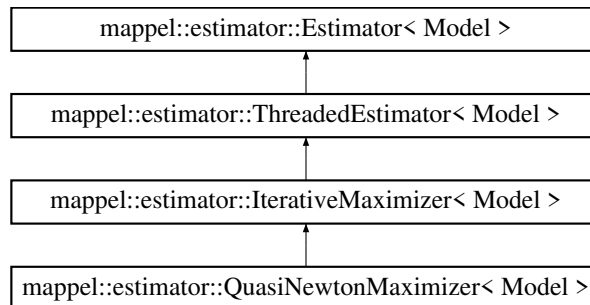

Public Types

- using [MaximizerData](#) = typename [IterativeMaximizer](#)< Model >::MaximizerData

Public Member Functions

- [QuasiNewtonMaximizer](#) (const Model &model, int max_iterations=IterativeMaximizer< Model >::DefaultIterations)
- std::string name () const
- double mean_iterations ()
- double mean_backtracks ()
- double mean_fun_evals ()
- double mean_der_evals ()
- StatsT get_stats ()
- StatsT get_debug_stats ()
- void clear_stats ()
- int get_total_iterations () const
- int get_total_backtracks () const
- int get_total_fun_evals () const
- int get_total_der_evals () const
- void local_maximize (const ModelDataT< Model > &im, StencilT< Model > &stencil, MLEData &data)
Perform a local maximization to finish off a simulated annealing run.
- void local_maximize (const ModelDataT< Model > &im, StencilT< Model > &stencil, MLEDebugData &debug_data)
- void local_profile_maximize (const ModelDataT< Model > &im, const IdxVecT &fixed_param_idx, StencilT< Model > &stencil, MLEDebugData &mle)
- void estimate_max_stack (const ModelDataStackT< Model > &data, const ParamVecT< Model > &theta_init, MLEDataStack &mle_data_stack) override
- void estimate_profile_max (const ModelDataT< Model > &data, const ParamVecT< Model > &theta_init, ProfileLikelihoodData &profile) override
- void estimate_profile_bounds_parallel (const ModelDataT< Model > &data, ProfileBoundsData &bounds_est) override

- void `estimate_profile_bounds_stack` (const `ModelDataStackT`< Model > &data, `ProfileBoundsDataStack` &bounds_est_stack) override
- const Model & `get_model` ()
- void `estimate_max_stack` (const `ModelDataStackT`< Model > &data_stack, `MLEDDataStack` &mle_data_stack)
- void `estimate_max` (const `ModelDataT`< Model > &data, const `ParamT`< Model > &theta_init, `MLEDData` &mle_data, `StencilT`< Model > &mle_stencil)
- void `estimate_max` (const `ModelDataT`< Model > &data, const `ParamT`< Model > &theta_init, `MLEDData` &mle_data, `StencilT`< Model > &mle_stencil)
- void `estimate_max` (const `ModelDataT`< Model > &data, `MLEDData` &mle_data)
- void `estimate_max_debug` (const `ModelDataT`< Model > &data, const `ParamT`< Model > &theta_init, `MLEDData` &mle_data, `StencilT`< Model > &mle_stencil)
- void `estimate_max_debug` (const `ModelDataT`< Model > &data, const `ParamT`< Model > &theta_init, `MLEDData` &mle_data)
- double `estimate_profile_max` (const `ModelDataT`< Model > &data, const `IdxVecT` &fixed_idx, const `ParamT`< Model > &fixed_theta_init, `StencilT`< Model > &theta_max)
- void `estimate_profile_bounds` (const `ModelDataT`< Model > &data, `ProfileBoundsData` &bounds_est)
- void `estimate_profile_bounds_debug` (const `ModelDataT`< Model > &data, `ProfileBoundsDebugData` &bounds_est)
- `IdxVecT` `get_exit_counts` () const

Static Public Attributes

- static const int `DefaultIterations` =100

Protected Member Functions

- void `record_run_statistics` (const `MaximizerData` &data)
- void `compute_estimate` (const `ModelDataT`< Model > &data, const `ParamT`< Model > &theta_init, `MLEDData` &mle_data, `StencilT`< Model > &mle_stencil) override
- void `compute_estimate_debug` (const `ModelDataT`< Model > &data, const `ParamT`< Model > &theta_init, `MLEDData` &mle_data, `StencilT`< Model > &mle_stencil) override
- double `compute_profile_estimate` (const `ModelDataT`< Model > &data, const `ParamT`< Model > &theta_init, const `IdxVecT` &fixed_idx, `StencilT`< Model > &theta_max) override
- void `compute_profile_bound` (const `ModelDataT`< Model > &data, `ProfileBoundsData` &est, const `VecT` &init_val, `IdxT` param_idx, `IdxT` which_bound) override
- void `compute_profile_bound_debug` (const `ModelDataT`< Model > &data, `ProfileBoundsDebugData` &bounds) override
- bool `backtrack` (`MaximizerData` &data)
- bool `profile_bound_backtrack` (`MaximizerData` &data, `IdxT` fixed_idx, double target_llh, double old_fval, const `VecT` &fggrad)
- virtual void `maximize` (`MaximizerData` &data)=0
- virtual void `solve_profile_bound` (`MaximizerData` &data, `MLEDData` &mle, double llh_delta, `IdxT` fixed_idx, `IdxT` which_bound)
- bool `convergence_test_grad_ratio` (const `VecT` &grad, double fval)
- bool `convergence_test_step_size` (const `VecT` &new_theta, const `VecT` &old_theta)
- void `record_exit_code` (`ExitCode` code) override
- void `record_walltime` (`ClockT`::time_point start_walltime, int num_estimations)

Protected Attributes

- int `max_iterations`
- int `total_iterations` = 0
- int `total_backtracks` = 0
- int `total_fun_evals` = 0
- int `total_der_evals` = 0
- `IdxVecT` `last_backtrack_idxxs`

Debugging: Stores last set of backtrack_idxxs when data.save_seq==true.

- int `max_threads`
- int `num_threads`
- `std::mutex` `mtx`
- const Model & `model`
- int `num_estimations` = 0
- double `total_walltime` = 0.
- `IdxVecT` `exit_counts`

Static Protected Attributes

- static const double `min_eigenvalue_correction_delta` = 1e-3

Ensure the minimum eigenvalue is at least this big when correcting indefinite matrix.

- static const double `convergence_min_function_change_ratio` = 1.0e-9

Convergence criteria: tolerance for function-value change.

- static const double `convergence_min_step_size_ratio` = 1.0e-9

Convergence criteria: tolerance of relative step size.

- static const double `backtrack_min_ratio` = 0.05
- static const double `backtrack_max_ratio` = 0.50
- static const double `backtrack_min_linear_step_ratio` = 1e-3
- static const int `max_backtracks` = 8
- static const double `min_profile_bound_residual` = 1e-4

Minimum residual in quadratic solutions of equation (8) to accept. Revert to newton step.

9.49.1 Detailed Description

```
template<class Model>
class mappel::estimator::QuasiNewtonMaximizer< Model >
```

Definition at line 599 of file estimator.h.

9.49.2 Member Typedef Documentation

9.49.2.1 `template<class Model > using mappel::estimator::QuasiNewtonMaximizer< Model >::MaximizerData = typename IterativeMaximizer<Model>::MaximizerData`

Definition at line 602 of file estimator.h.

9.49.3 Constructor & Destructor Documentation

9.49.3.1 `template<class Model> mappel::estimator::QuasiNewtonMaximizer< Model >::QuasiNewtonMaximizer (const Model & model, int max_iterations = IterativeMaximizer<Model>::DefaultIterations) [inline]`

Definition at line 604 of file estimator.h.

9.49.4 Member Function Documentation

9.49.4.1 `template<class Model> bool mappel::estimator::IterativeMaximizer< Model >::backtrack (MaximizerData & data) [protected],[inherited]`

Definition at line 870 of file estimator_impl.h.

References `mappel::estimator::IterativeMaximizer< Model >::backtrack_min_linear_step_ratio`, `mappel::clamp()`, `mappel::estimator::IterativeMaximizer< Model >::convergence_min_step_size_ratio`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::grad`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::im`, `mappel::estimator::IterativeMaximizer< Model >::max_backtracks`, `mappel::estimator::MaxBacktracks`, `mappel::estimator::Estimator< Model >::model`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::record_backtrack()`, `mappel::estimator::ThreadedEstimator< Model >::record_exit_code()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::record_iteration()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::restore_stencil()`, `mappel::methods::objective::rllh()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::rllh`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::save_stencil()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::saved_theta()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::set_stencil()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::stencil()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::step`, `mappel::estimator::StepSize`, and `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::theta()`.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.49.4.2 `template<class Model> void mappel::estimator::IterativeMaximizer< Model >::clear_stats () [virtual],[inherited]`

Run statistics.

Reimplemented from [mappel::estimator::ThreadedEstimator< Model >](#).

Definition at line 848 of file estimator_impl.h.

References `mappel::estimator::ThreadedEstimator< Model >::clear_stats()`, `mappel::estimator::ThreadedEstimator< Model >::mtx`, `mappel::estimator::IterativeMaximizer< Model >::total_backtracks`, `mappel::estimator::IterativeMaximizer< Model >::total_der_evals`, `mappel::estimator::IterativeMaximizer< Model >::total_fun_evals`, and `mappel::estimator::IterativeMaximizer< Model >::total_iterations`.

9.49.4.3 `template<class Model> void mappel::estimator::IterativeMaximizer< Model>::compute_estimate (const ModelDataT< Model> & data, const ParamT< Model> & theta_init, MLEData & mle_data, StencilT< Model> & mle_stencil) [override], [protected], [virtual], [inherited]`

Implements [mappel::estimator::Estimator< Model>](#).

Definition at line 1043 of file estimator_impl.h.

References [mappel::estimator::IterativeMaximizer< Model>::maximize\(\)](#), [mappel::estimator::Estimator< Model>::model](#), [mappel::methods::observed_information\(\)](#), [mappel::estimator::MLEData::obsI](#), [mappel::estimator::IterativeMaximizer< Model>::record_run_statistics\(\)](#), [mappel::estimator::MLEData::rllh](#), [mappel::estimator::IterativeMaximizer< Model>::MaximizerData::rllh](#), [mappel::estimator::IterativeMaximizer< Model>::MaximizerData::stencil\(\)](#), [mappel::estimator::MLEData::theta](#), and [mappel::estimator::IterativeMaximizer< Model>::MaximizerData::theta\(\)](#).

9.49.4.4 `template<class Model> void mappel::estimator::IterativeMaximizer< Model>::compute_estimate_debug (const ModelDataT< Model> & im, const ParamT< Model> & theta_init, MLEDebugData & mle_debug, StencilT< Model> & mle_stencil) [override], [protected], [virtual], [inherited]`

Virtual `estimate_debug` interface

Estimators that produce a sequence of results (e.g. `IterativeEstimators`) can override this dummy debug implementation.

Reimplemented from [mappel::estimator::Estimator< Model>](#).

Definition at line 1057 of file estimator_impl.h.

References [mappel::estimator::IterativeMaximizer< Model>::MaximizerData::get_theta_sequence\(\)](#), [mappel::estimator::IterativeMaximizer< Model>::MaximizerData::get_theta_sequence_rllh\(\)](#), [mappel::estimator::IterativeMaximizer< Model>::maximize\(\)](#), [mappel::estimator::Estimator< Model>::model](#), [mappel::methods::observed_information\(\)](#), [mappel::estimator::MLEDebugData::obsI](#), [mappel::estimator::IterativeMaximizer< Model>::record_run_statistics\(\)](#), [mappel::estimator::MLEDebugData::rllh](#), [mappel::estimator::IterativeMaximizer< Model>::MaximizerData::rllh](#), [mappel::estimator::MLEDebugData::sequence](#), [mappel::estimator::MLEDebugData::sequence_rllh](#), [mappel::estimator::IterativeMaximizer< Model>::MaximizerData::stencil\(\)](#), [mappel::estimator::MLEDebugData::theta](#), and [mappel::estimator::IterativeMaximizer< Model>::MaximizerData::theta\(\)](#).

9.49.4.5 `template<class Model> void mappel::estimator::IterativeMaximizer< Model>::compute_profile_bound (const ModelDataT< Model> & data, ProfileBoundsData & est, const VecT & init_step, IdxT param_idx, IdxT which_bound) [override], [protected], [virtual], [inherited]`

Reimplemented from [mappel::estimator::Estimator< Model>](#).

Definition at line 1088 of file estimator_impl.h.

References [mappel::estimator::ProfileBoundsData::estimated_idx](#), [mappel::estimator::ProfileBoundsData::mle](#), [mappel::estimator::Estimator< Model>::model](#), [mappel::estimator::ProfileBoundsData::profile_lb](#), [mappel::estimator::ProfileBoundsData::profile_points_lb](#), [mappel::estimator::ProfileBoundsData::profile_points_lb_rllh](#), [mappel::estimator::ProfileBoundsData::profile_points_ub](#), [mappel::estimator::ProfileBoundsData::profile_points_ub_rllh](#), [mappel::estimator::ProfileBoundsData::profile_ub](#), [mappel::estimator::IterativeMaximizer< Model>::record_run_statistics\(\)](#), [mappel::estimator::IterativeMaximizer< Model>::solve_profile_bound\(\)](#), [mappel::estimator::ProfileBoundsData::target_rllh_delta](#), and [mappel::estimator::MLEData::theta](#).

9.49.4.6 `template<class Model> void mappel::estimator::IterativeMaximizer< Model >::compute_profile_bound_debug (const ModelDataT< Model > & data, ProfileBoundsDebugData & bounds) [override], [protected], [virtual], [inherited]`

Reimplemented from [mappel::estimator::Estimator< Model >](#).

Definition at line 1114 of file estimator_impl.h.

References [mappel::estimator::ProfileBoundsDebugData::estimated_idx](#), [mappel::estimator::ProfileBoundsDebugData::mle](#), [mappel::estimator::Estimator< Model >::model](#), [mappel::estimator::ProfileBoundsDebugData::Nseq_lb](#), [mappel::estimator::ProfileBoundsDebugData::Nseq_ub](#), [mappel::estimator::MLEData::obsl](#), [mappel::estimator::ProfileBoundsDebugData::profile_lb](#), [mappel::estimator::ProfileBoundsDebugData::profile_ub](#), [mappel::estimator::IterativeMaximizer< Model >::record_run_statistics\(\)](#), [mappel::estimator::ProfileBoundsDebugData::sequence_lb](#), [mappel::estimator::ProfileBoundsDebugData::sequence_lb_rllh](#), [mappel::estimator::ProfileBoundsDebugData::sequence_ub](#), [mappel::estimator::ProfileBoundsDebugData::sequence_ub_rllh](#), [mappel::estimator::IterativeMaximizer< Model >::solve_profile_bound\(\)](#), [mappel::estimator::subroutine::solve_profile_initial_step\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::step](#), [mappel::estimator::ProfileBoundsDebugData::target_rllh_delta](#), and [mappel::estimator::MLEData::theta](#).

9.49.4.7 `template<class Model> double mappel::estimator::IterativeMaximizer< Model >::compute_profile_estimate (const ModelDataT< Model > & data, const ParamT< Model > & theta_init, const IdxVecT & fixed_idxs, StencilT< Model > & theta_max) [override], [protected], [virtual], [inherited]`

Reimplemented from [mappel::estimator::Estimator< Model >](#).

Definition at line 1074 of file estimator_impl.h.

References [mappel::estimator::IterativeMaximizer< Model >::maximize\(\)](#), [mappel::estimator::Estimator< Model >::model](#), [mappel::estimator::IterativeMaximizer< Model >::record_run_statistics\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::rllh](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::set_fixed_parameters\(\)](#), and [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::stencil\(\)](#).

9.49.4.8 `template<class Model> bool mappel::estimator::IterativeMaximizer< Model >::convergence_test_grad_ratio (const VecT & grad, double fval) [protected], [inherited]`

Definition at line 1015 of file estimator_impl.h.

References [mappel::estimator::IterativeMaximizer< Model >::convergence_min_function_change_ratio](#), [mappel::estimator::GradRatio](#), [mappel::norm_sq\(\)](#), [mappel::estimator::ThreadedEstimator< Model >::record_exit_code\(\)](#), and [mappel::square\(\)](#).

Referenced by [mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize\(\)](#).

9.49.4.9 `template<class Model> bool mappel::estimator::IterativeMaximizer< Model >::convergence_test_step_size (const VecT & new_theta, const VecT & old_theta) [protected], [inherited]`

Definition at line 1027 of file estimator_impl.h.

References [mappel::estimator::IterativeMaximizer< Model >::convergence_min_step_size_ratio](#), [mappel::norm_sq\(\)](#), [mappel::estimator::ThreadedEstimator< Model >::record_exit_code\(\)](#), and [mappel::estimator::StepSize](#).

Referenced by [mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize\(\)](#).

9.49.4.10 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max (const ModelDataT< Model > & data, const ParamT< Model > & theta_init, MLEData & mle_data, StencilT< Model > & mle_stencil)`
`[inherited]`

Maximum likelihood point estimators Estimate for a single data starting at theta_init, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with theta_init, theta_init is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of theta_init will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 128 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model >::compute_estimate()`, `mappel::estimator::Error`, `mappel::estimator::MLEData::obsI`, `mappel::print_text_image()`, `mappel::estimator::Estimator< Model >::record_exit_code()`, `mappel::estimator::Estimator< Model >::record_walltime()`, `mappel::estimator::MLEData::rllh`, and `mappel::estimator::MLEData::theta`.

Referenced by `mappel::estimator::Estimator< Model >::estimate_max()`.

9.49.4.11 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max (const ModelDataT< Model > & data, const ParamT< Model > & theta_init, MLEData & mle_data)` `[inherited]`

Maximum likelihood point estimators Estimate for a single data starting at theta_init, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with theta_init, theta_init is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of theta_init will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 121 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model >::estimate_max()`.

9.49.4.12 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max (const ModelDataT< Model > & data, MLEData & mle_data) [inherited]`

Maximum likelihood point estimators Estimate for a single data starting at `theta_init`, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with `theta_init`, `theta_init` is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of `theta_init` will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 112 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::estimate_max()`, and `mappel::estimator::Estimator< Model >::model`.

9.49.4.13 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max_debug (const ModelDataT< Model > & data, const ParamT< Model > & theta_init, MLEDebugData & mle_data, StencilT< Model > & mle_stencil) [inherited]`

Debug estimation for a single data starting at `theta_init`, fill in the [MLEDebugData](#) struct with data including the sequence of evaluated points. Estimation is initialized with `theta_init`, `theta_init` is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of `theta_init` will not be modified in the initialization process.

The sequence and `sequence_rllh` parameters of the [MLEDebugData](#) struct record the entire sequence of evaluated points including `theta_init` and `theta_mle`, which should be first and last respectively.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	Initial theta value.
out	<i>mle_data</i>	MLEDebugData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

9.49.4.14 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max_debug (const ModelDataT< Model > & data, const ParamT< Model > & theta_init, MLEDebugData & mle_data)`
`[inherited]`

Maximum likelihood point estimators Estimate for a single data starting at `theta_init`, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with `theta_init`, `theta_init` is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of `theta_init` will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 157 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::compute_estimate_debug()`, `mappel::estimator::Error`, `mappel::estimator::MLEDebugData::obsI`, `mappel::print_text_image()`, `mappel::estimator::Estimator< Model >::record_exit_code()`, `mappel::estimator::Estimator< Model >::record_walltime()`, `mappel::estimator::MLEDebugData::rllh`, and `mappel::estimator::MLEDebugData::theta`.

9.49.4.15 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max_stack (const ModelDataStackT< Model > & data_stack, MLEDataStack & mle_data_stack)` `[inherited]`

Maximum likelihood point estimators Estimate for a single data starting at `theta_init`, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with `theta_init`, `theta_init` is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of `theta_init` will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 183 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::estimate_max_stack()`, and `mappel::estimator::Estimator< Model >::model`.

9.49.4.16 `template<class Model > void mappel::estimator::ThreadedEstimator< Model >::estimate_max_stack (const ModelDataStackT< Model > & data_stack, const ParamVecT< Model > & theta_init_stack, MLEDataStack & mle_data_stack)` [override],[virtual],[inherited]

Estimate for a stack of data and fill in the [MLEDataStack](#) struct with the estimated parameter, RLLH, and observed information for each data in parallel. Estimation is initialized with `theta_init`, `theta_init` is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of `theta_init` will not be modified in the initialization process.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[optional] Initial theta value for each image.
out	<i>mle</i>	MLEStackData records the maximum likelihood estimate, RLLH, and Observed information for each data

Implements [mappel::estimator::Estimator< Model >](#).

Definition at line 377 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::compute_estimate()`, `mappel::estimator::Error`, `mappel::estimator::Estimator< Model >::model`, `mappel::estimator::MLEDataStack::Ndata`, `mappel::estimator::ThreadedEstimator< Model >::num_threads`, `mappel::estimator::MLEData::obsI`, `mappel::estimator::MLEDataStack::obsI`, `mappel::print_text_image()`, `mappel::estimator::ThreadedEstimator< Model >::record_exit_code()`, `mappel::estimator::Estimator< Model >::record_walltime()`, `mappel::estimator::MLEData::rllh`, `mappel::estimator::MLEDataStack::rllh`, `mappel::estimator::MLEData::theta`, and `mappel::estimator::MLEDataStack::theta`.

9.49.4.17 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_profile_bounds (const ModelDataT< Model > & data, ProfileBoundsData & bounds_est)` [inherited]

Profile likelihood bounds computations with VM algorithm

Definition at line 220 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::compute_profile_bound()`, `mappel::estimator::Error`, `mappel::estimator::ProfileBoundsData::estimated_idx`s, `mappel::estimator::ProfileBoundsData::initialize_arrays()`, `mappel::estimator::ProfileBoundsData::mle`, `mappel::estimator::Estimator< Model >::model`, `mappel::estimator::ProfileBoundsData::Nparams_est`, `mappel::estimator::MLEData::obsI`, `mappel::print_text_image()`, `mappel::estimator::ProfileBoundsData::profile_lb`, `mappel::estimator::ProfileBoundsData::profile_points_lb`, `mappel::estimator::ProfileBoundsData::profile_points_lb_rllh`, `mappel::estimator::ProfileBoundsData::profile_points_ub`, `mappel::estimator::ProfileBoundsData::profile_ub`, `mappel::estimator::Estimator< Model >::record_exit_code()`, `mappel::estimator::Estimator< Model >::record_walltime()`, `mappel::estimator::subroutine::solve_profile_initial_step()`, `mappel::estimator::ProfileBoundsData::target_rllh_delta`, and `mappel::estimator::MLEData::theta`.

Referenced by `mappel::methods::error_bounds_profile_likelihood()`.

9.49.4.18 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_profile_bounds_debug (const ModelDataT< Model > & data, ProfileBoundsDebugData & bounds_est) [inherited]`

Profile likelihood bounds computations with VM algorithm

Definition at line 258 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model >::compute_profile_bound_debug()`, `mappel::estimator::Error`, `mappel::estimator::ProfileBoundsDebugData::estimated_idx`, `mappel::estimator::ProfileBoundsDebugData::mle`, `mappel::print_text_image()`, `mappel::estimator::Estimator< Model >::record_exit_code()`, `mappel::estimator::Estimator< Model >::record_walltime()`, `mappel::estimator::ProfileBoundsDebugData::target_rllh_delta`, and `mappel::estimator::MLEData::theta`.

Referenced by `mappel::methods::debug::error_bounds_profile_likelihood_debug()`.

9.49.4.19 `template<class Model > void mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel (const ModelDataT< Model > & data, ProfileBoundsData & bounds_est) [override], [virtual], [inherited]`

Profile likelihood bounds computations with VM algorithm

Implements [mappel::estimator::Estimator< Model >](#).

Definition at line 464 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model >::compute_profile_bound()`, `mappel::estimator::Error`, `mappel::estimator::ProfileBoundsData::estimated_idx`, `mappel::estimator::ProfileBoundsData::initialize_arrays()`, `mappel::estimator::ProfileBoundsData::mle`, `mappel::estimator::Estimator< Model >::model`, `mappel::estimator::ProfileBoundsData::Nparams_est`, `mappel::estimator::ThreadedEstimator< Model >::num_threads`, `mappel::estimator::MLEData::obs`, `mappel::print_text_image()`, `mappel::estimator::ThreadedEstimator< Model >::record_exit_code()`, `mappel::estimator::Estimator< Model >::record_walltime()`, `mappel::estimator::subroutine::solve_profile_initial_step()`, `mappel::estimator::ProfileBoundsData::target_rllh_delta`, and `mappel::estimator::MLEData::theta`.

Referenced by `mappel::methods::openmp::error_bounds_profile_likelihood_parallel()`.

9.49.4.20 `template<class Model > void mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack (const ModelDataStackT< Model > & data_stack, ProfileBoundsDataStack & bounds_est) [override], [virtual], [inherited]`

Profile likelihood bounds computations with VM algorithm

Implements [mappel::estimator::Estimator< Model >](#).

Definition at line 500 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model >::compute_profile_bound()`, `mappel::estimator::Error`, `mappel::estimator::ProfileBoundsData::estimated_idx`, `mappel::estimator::ProfileBoundsDataStack::estimated_idx`, `mappel::estimator::ProfileBoundsData::initialize_arrays()`, and `mappel::estimator::ProfileBoundsDataStack::initialize_arrays()`.

mappel::estimator::ProfileBoundsData::mle, mappel::estimator::ProfileBoundsDataStack::mle, mappel::estimator::Estimator< Model >::model, mappel::estimator::ProfileBoundsDataStack::Ndata, mappel::estimator::ProfileBoundsDataStack::Nparams_est, mappel::estimator::ThreadedEstimator< Model >::num_threads, mappel::estimator::MLEData::obsI, mappel::estimator::MLEDataStack::obsI, mappel::print_text_image(), mappel::estimator::ProfileBoundsData::profile_lb, mappel::estimator::ProfileBoundsDataStack::profile_lb, mappel::estimator::ProfileBoundsData::profile_points_lb, mappel::estimator::ProfileBoundsDataStack::profile_points_lb, mappel::estimator::ProfileBoundsData::profile_points_lb_rllh, mappel::estimator::ProfileBoundsDataStack::profile_points_lb_rllh, mappel::estimator::ProfileBoundsData::profile_points_ub, mappel::estimator::ProfileBoundsDataStack::profile_points_ub, mappel::estimator::ProfileBoundsData::profile_points_ub_rllh, mappel::estimator::ProfileBoundsDataStack::profile_points_ub_rllh, mappel::estimator::ProfileBoundsData::profile_ub, mappel::estimator::ProfileBoundsDataStack::profile_ub, mappel::estimator::ThreadedEstimator< Model >::record_exit_code(), mappel::estimator::Estimator< Model >::record_walltime(), mappel::estimator::MLEData::rllh, mappel::estimator::MLEDataStack::rllh, mappel::estimator::subroutine::solve_profile_initial_step(), mappel::estimator::ProfileBoundsData::target_rllh_delta, mappel::estimator::ProfileBoundsDataStack::target_rllh_delta, mappel::estimator::MLEData::theta, and mappel::estimator::MLEDataStack::theta.

Referenced by mappel::methods::openmp::error_bounds_profile_likelihood_stack().

9.49.4.21 `template<class Model> double mappel::estimator::Estimator< Model >::estimate_profile_max (const ModelDataT< Model > & data, const IdxVecT & fixed_idx, const ParamT< Model > & fixed_theta_init, StencilT< Model > & theta_max) [inherited]`

Profile likelihood estimation methods

Definition at line 190 of file estimator_impl.h.

References mappel::estimator::Estimator< Model >::compute_profile_estimate(), mappel::estimator::Error, mappel::print_text_image(), mappel::estimator::Estimator< Model >::record_exit_code(), mappel::estimator::Estimator< Model >::record_walltime(), and mappel::methods::objective::rllh().

9.49.4.22 `template<class Model> void mappel::estimator::ThreadedEstimator< Model >::estimate_profile_max (const ModelDataT< Model > & data, const ParamVecT< Model > & fixed_theta_init, ProfileLikelihoodData & profile) [override],[virtual],[inherited]`

Profile likelihood estimation methods

Implements [mappel::estimator::Estimator< Model >](#).

Definition at line 418 of file estimator_impl.h.

References mappel::estimator::Estimator< Model >::compute_profile_estimate(), mappel::estimator::Error, mappel::estimator::ProfileLikelihoodData::fixed_idx, mappel::estimator::ProfileLikelihoodData::fixed_values, mappel::estimator::Estimator< Model >::model, mappel::estimator::ProfileLikelihoodData::Nfixed, mappel::estimator::ThreadedEstimator< Model >::num_threads, mappel::estimator::ProfileLikelihoodData::Nvalues, mappel::print_text_image(), mappel::estimator::ProfileLikelihoodData::profile_likelihood, mappel::estimator::ProfileLikelihoodData::profile_parameters, mappel::estimator::ThreadedEstimator< Model >::record_exit_code(), and mappel::estimator::Estimator< Model >::record_walltime().

9.49.4.23 `template<class Model > StatsT mappel::estimator::IterativeMaximizer< Model >::get_debug_stats ()`
`[virtual], [inherited]`

Run statistics.

Reimplemented from [mappel::estimator::ThreadedEstimator< Model >](#).

Definition at line 832 of file `estimator_impl.h`.

References `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::backtrack_idx`s, `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, and `mappel::estimator::IterativeMaximizer< Model >::last_backtrack_idx`s.

9.49.4.24 `template<class Model > IdxVecT mappel::estimator::Estimator< Model >::get_exit_counts () const`
`[inline], [inherited]`

Run statistics.

Definition at line 274 of file `estimator.h`.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.49.4.25 `template<class Model > const Model & mappel::estimator::Estimator< Model >::get_model ()`
`[inherited]`

Definition at line 108 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::model`.

9.49.4.26 `template<class Model > StatsT mappel::estimator::IterativeMaximizer< Model >::get_stats ()`
`[virtual], [inherited]`

Run statistics.

Reimplemented from [mappel::estimator::ThreadedEstimator< Model >](#).

Definition at line 811 of file `estimator_impl.h`.

References `mappel::estimator::IterativeMaximizer< Model >::convergence_min_function_change_ratio`, `mappel::estimator::IterativeMaximizer< Model >::convergence_min_step_size_ratio`, `mappel::estimator::ThreadedEstimator< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::max_backtracks`, `mappel::estimator::IterativeMaximizer< Model >::max_iterations`, `mappel::estimator::ThreadedEstimator< Model >::mtx`, `mappel::estimator::Estimator< Model >::num_estimations`, `mappel::estimator::IterativeMaximizer< Model >::total_backtracks`, `mappel::estimator::IterativeMaximizer< Model >::total_der_evals`, `mappel::estimator::IterativeMaximizer< Model >::total_fun_evals`, and `mappel::estimator::IterativeMaximizer< Model >::total_iterations`.

Referenced by `mappel::methods::error_bounds_profile_likelihood()`, `mappel::methods::debug::error_bounds_profile_likelihood_debug()`, `mappel::methods::openmp::error_bounds_profile_likelihood_parallel()`, `mappel::methods::openmp::error_bounds_profile_likelihood_stack()`, `mappel::estimator::SimulatedAnnealingMaximizer< Model >::get_debug_stats()`, and `mappel::estimator::IterativeMaximizer< Model >::get_debug_stats()`.

9.49.4.27 `template<class Model> int mappel::estimator::IterativeMaximizer< Model >::get_total_backtracks () const`
`[inline], [inherited]`

Definition at line 441 of file estimator.h.

9.49.4.28 `template<class Model> int mappel::estimator::IterativeMaximizer< Model >::get_total_der_evals () const`
`[inline], [inherited]`

Definition at line 443 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.49.4.29 `template<class Model> int mappel::estimator::IterativeMaximizer< Model >::get_total_fun_evals () const`
`[inline], [inherited]`

Definition at line 442 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.49.4.30 `template<class Model> int mappel::estimator::IterativeMaximizer< Model >::get_total_iterations () const`
`[inline], [inherited]`

Definition at line 440 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.49.4.31 `template<class Model> void mappel::estimator::IterativeMaximizer< Model >::local_maximize (const`
`ModelDataT< Model> & im, StencilT< Model> & stencil, MLEData & data) [inherited]`

Perform a local maximization to finish off a simulated annealing run.

Definition at line 1145 of file estimator_impl.h.

References `mappel::estimator::IterativeMaximizer< Model >::maximize()`, `mappel::estimator::Estimator< Model>::model`, `mappel::methods::observed_information()`, `mappel::estimator::MLEData::obsI`, `mappel::estimator::IterativeMaximizer< Model>::record_run_statistics()`, `mappel::estimator::MLEData::rllh`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::rllh`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::stencil()`, `mappel::estimator::MLEData::theta`, and `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::theta()`.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.49.4.32 `template<class Model> void mappel::estimator::IterativeMaximizer< Model >::local_maximize (const`
`ModelDataT< Model> & im, StencilT< Model> & stencil, MLEDebugData & debug_data) [inherited]`

Definition at line 1158 of file estimator_impl.h.

References `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::get_theta_sequence()`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::get_theta_sequence_rllh()`, `mappel::estimator::IterativeMaximizer< Model>::maximize()`, `mappel::estimator::Estimator< Model>::model`, `mappel::methods::observed_information()`, `mappel::estimator::MLEDebugData::obsI`, `mappel::estimator::IterativeMaximizer< Model>::record_run_statistics()`, `mappel::estimator::MLEDebugData::rllh`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::rllh`, `mappel::estimator::MLEDebugData::sequence`, `mappel::estimator::MLEDebugData::sequence_rllh`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::stencil()`, `mappel::estimator::MLEDebugData::theta`, and `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::theta()`.

9.49.4.33 `template<class Model > void mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize (const ModelDataT< Model > & im, const IdxVecT & fixed_param_idx, StencilT< Model > & stencil, MLEDebugData & mle) [inherited]`

Definition at line 1173 of file estimator_impl.h.

References `mappel::estimator::IterativeMaximizer< Model >::backtrack()`, `mappel::estimator::subroutine::bound_step()`, `mappel::clamp()`, `mappel::estimator::subroutine::compute_bound_scaling_vec()`, `mappel::estimator::subroutine::compute_cauchy_point()`, `mappel::estimator::subroutine::compute_initial_trust_radius()`, `mappel::estimator::subroutine::compute_quadratic_model_value()`, `mappel::estimator::subroutine::compute_scaled_problem()`, `mappel::estimator::IterativeMaximizer< Model >::convergence_test_grad_ratio()`, `mappel::estimator::IterativeMaximizer< Model >::convergence_test_step_size()`, `mappel::estimator::Estimator< Model >::exit_counts`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::fixed_idx`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::free_idx`, `mappel::estimator::Estimator< Model >::get_exit_counts()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::get_theta_sequence()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::get_theta_sequence_rllh()`, `mappel::estimator::IterativeMaximizer< Model >::get_total_der_evals()`, `mappel::estimator::IterativeMaximizer< Model >::get_total_fun_evals()`, `mappel::estimator::IterativeMaximizer< Model >::get_total_iterations()`, `mappel::methods::objective::grad()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::grad`, `mappel::methods::objective::grad2()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::has_fixed_parameters()`, `mappel::methods::objective::hessian()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::im`, `mappel::is_positive_definite()`, `mappel::estimator::IterativeMaximizer< Model >::local_maximize()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, `mappel::estimator::IterativeMaximizer< Model >::max_iterations`, `mappel::estimator::IterativeMaximizer< Model >::maximize()`, `mappel::estimator::MaxIter`, `mappel::estimator::IterativeMaximizer< Model >::min_profile_bound_residual`, `mappel::estimator::Estimator< Model >::model`, `mappel::estimator::ThreadedEstimator< Model >::mtx`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::num_fixed_parameters()`, `mappel::methods::observed_information()`, `mappel::estimator::MLEData::obs`, `mappel::estimator::MLEDebugData::obs`, `mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::record_backtrack()`, `mappel::estimator::ThreadedEstimator< Model >::record_exit_code()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::record_iteration()`, `mappel::estimator::IterativeMaximizer< Model >::record_run_statistics()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::restore_stencil()`, `mappel::estimator::MLEData::rllh`, `mappel::methods::objective::rllh()`, `mappel::estimator::MLEDebugData::rllh`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::rllh`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::s0`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::s1`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::save_stencil()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::saved_theta()`, `mappel::estimator::MLEDebugData::sequence`, `mappel::estimator::MLEDebugData::sequence_rllh`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::set_fixed_parameters()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::set_stencil()`, `mappel::estimator::subroutine::solve_TR_subproblem()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::stencil()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::step`, `mappel::estimator::MLEData::theta`, `mappel::estimator::MLEDebugData::theta`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::theta()`, `mappel::estimator::IterativeMaximizer< Model >::total_der_evals`, `mappel::estimator::IterativeMaximizer< Model >::total_fun_evals`, `mappel::estimator::IterativeMaximizer< Model >::total_iterations`, and `mappel::estimator::TrustRegionRadius`.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.49.4.34 `template<class Model > virtual void mappel::estimator::IterativeMaximizer< Model >::maximize (MaximizerData & data) [protected],[pure virtual],[inherited]`

Referenced by `mappel::estimator::IterativeMaximizer< Model >::compute_estimate()`, `mappel::estimator::IterativeMaximizer< Model >::compute_estimate_debug()`, `mappel::estimator::IterativeMaximizer< Model >::compute_profile_estimate()`, `mappel::estimator::IterativeMaximizer< Model >::local_maximize()`, and `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.49.4.35 `template<class Model > double mappel::estimator::IterativeMaximizer< Model >::mean_backtracks ()`
[inherited]

9.49.4.36 `template<class Model > double mappel::estimator::IterativeMaximizer< Model >::mean_der_evals ()`
[inherited]

9.49.4.37 `template<class Model > double mappel::estimator::IterativeMaximizer< Model >::mean_fun_evals ()`
[inherited]

9.49.4.38 `template<class Model > double mappel::estimator::IterativeMaximizer< Model >::mean_iterations ()`
[inherited]

9.49.4.39 `template<class Model > std::string mappel::estimator::QuasiNewtonMaximizer< Model >::name () const`
[inline],[virtual]

Implements [mappel::estimator::Estimator< Model >](#).

Definition at line 607 of file estimator.h.

9.49.4.40 `template<class Model > bool mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack (MaximizerData & data, IdxT fixed_idx, double target_rllh, double old_fval, const VecT & fgrad)` [protected],
[inherited]

Definition at line 943 of file estimator_impl.h.

References [mappel::estimator::IterativeMaximizer< Model >::backtrack_max_ratio](#), [mappel::estimator::IterativeMaximizer< Model >::backtrack_min_linear_step_ratio](#), [mappel::estimator::IterativeMaximizer< Model >::backtrack_min_ratio](#), [mappel::clamp\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::convergence_min_step_size_ratio](#), [mappel::methods::objective::grad\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::im](#), [mappel::estimator::IterativeMaximizer< Model >::max_backtracks](#), [mappel::estimator::MaxBacktracks](#), [mappel::estimator::Estimator< Model >::model](#), [mappel::norm_sq\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::record_backtrack\(\)](#), [mappel::estimator::ThreadedEstimator< Model >::record_exit_code\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::record_iteration\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::restore_stencil\(\)](#), [mappel::methods::objective::rllh\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::rllh](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::save_stencil\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::saved_theta\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::set_stencil\(\)](#), [mappel::square\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::stencil\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::step](#), [mappel::estimator::StepSize](#), and [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::theta\(\)](#).

Referenced by [mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize\(\)](#).

9.49.4.41 `template<class Model > void mappel::estimator::ThreadedEstimator< Model >::record_exit_code (ExitCode code)` [override], [protected], [virtual], [inherited]

Implements [mappel::estimator::Estimator< Model >](#).

Definition at line 578 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::exit_counts`, `mappel::estimator::Estimator< Model >::model`, `mappel::estimator::ThreadedEstimator< Model >::mtx`, `mappel::methods::observed_information()`, `mappel::estimator::MLEData::obsI`, `mappel::estimator::MLEData::rllh`, `mappel::methods::objective::rllh()`, `mappel::estimator::Success`, and `mappel::estimator::MLEData::theta`.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::backtrack()`, `mappel::estimator::IterativeMaximizer< Model >::convergence_test_grad_ratio()`, `mappel::estimator::IterativeMaximizer< Model >::convergence_test_step_size()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_max_stack()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_max()`, `mappel::estimator::HeuristicEstimator< Model >::get_debug_stats()`, `mappel::estimator::CGaussMLE< Model >::get_debug_stats()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, and `mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack()`.

9.49.4.42 `template<class Model > void mappel::estimator::IterativeMaximizer< Model >::record_run_statistics (const MaximizerData & data)` [protected], [inherited]

Definition at line 859 of file `estimator_impl.h`.

References `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::get_backtrack_idxes()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::has_theta_sequence()`, `mappel::estimator::IterativeMaximizer< Model >::last_backtrack_idxes`, `mappel::estimator::ThreadedEstimator< Model >::mtx`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::nBacktracks`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::nIterations`, `mappel::estimator::IterativeMaximizer< Model >::total_backtracks`, `mappel::estimator::IterativeMaximizer< Model >::total_der_evals`, `mappel::estimator::IterativeMaximizer< Model >::total_fun_evals`, and `mappel::estimator::IterativeMaximizer< Model >::total_iterations`.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::compute_estimate()`, `mappel::estimator::IterativeMaximizer< Model >::compute_estimate_debug()`, `mappel::estimator::IterativeMaximizer< Model >::compute_profile_bound()`, `mappel::estimator::IterativeMaximizer< Model >::compute_profile_bound_debug()`, `mappel::estimator::IterativeMaximizer< Model >::compute_profile_estimate()`, `mappel::estimator::IterativeMaximizer< Model >::local_maximize()`, and `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.49.4.43 `template<class Model > void mappel::estimator::Estimator< Model >::record_walltime (ClockT::time_point start_walltime, int num_estimations)` [protected], [inherited]

Definition at line 360 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::num_estimations`, and `mappel::estimator::Estimator< Model >::total_walltime`.

Referenced by `mappel::estimator::Estimator< Model >::estimate_max()`, `mappel::estimator::Estimator< Model >::estimate_max_debug()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_max_stack()`, `mappel::estimator::Estimator< Model >::estimate_profile_bounds()`, `mappel::estimator::Estimator< Model >::estimate_profile_bounds_debug()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack()`, `mappel::estimator::Estimator< Model >::estimate_profile_max()`, and `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_max()`.

9.49.4.44 `template<class Model > void mappel::estimator::IterativeMaximizer< Model >::solve_profile_bound (MaximizerData & data, MLEData & mle, double llh_delta, IdxT fixed_idx, IdxT which_bound)` [protected], [virtual], [inherited]

Definition at line 1137 of file estimator_impl.h.

References mappel::estimator::Estimator< Model >::name().

Referenced by mappel::estimator::IterativeMaximizer< Model >::compute_profile_bound(), and mappel::estimator::IterativeMaximizer< Model >::compute_profile_bound_debug().

9.49.5 Member Data Documentation

9.49.5.1 `template<class Model > const double mappel::estimator::IterativeMaximizer< Model >::backtrack_max_ratio = 0.50` [static], [protected], [inherited]

Definition at line 460 of file estimator.h.

Referenced by mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack().

9.49.5.2 `template<class Model > const double mappel::estimator::IterativeMaximizer< Model >::backtrack_min_linear_step_ratio = 1e-3` [static], [protected], [inherited]

Definition at line 461 of file estimator.h.

Referenced by mappel::estimator::IterativeMaximizer< Model >::backtrack(), and mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack().

9.49.5.3 `template<class Model > const double mappel::estimator::IterativeMaximizer< Model >::backtrack_min_ratio = 0.05` [static], [protected], [inherited]

Definition at line 459 of file estimator.h.

Referenced by mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack().

9.49.5.4 `template<class Model > const double mappel::estimator::IterativeMaximizer< Model >::convergence_min_function_change_ratio = 1.0e-9` [static], [protected], [inherited]

Convergence criteria: tolerance for function-value change.

Definition at line 456 of file estimator.h.

Referenced by mappel::estimator::IterativeMaximizer< Model >::convergence_test_grad_ratio(), and mappel::estimator::IterativeMaximizer< Model >::get_stats().

9.49.5.5 `template<class Model > const double mappel::estimator::IterativeMaximizer< Model >::convergence_min_step_size_ratio = 1.0e-9` [static], [protected], [inherited]

Convergence criteria: tolerance of relative step size.

Definition at line 457 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::backtrack()`, `mappel::estimator::IterativeMaximizer< Model >::convergence_test_step_size()`, `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, and `mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack()`.

9.49.5.6 `template<class Model > const int mappel::estimator::IterativeMaximizer< Model >::DefaultIterations = 100` [static], [inherited]

Definition at line 428 of file estimator.h.

9.49.5.7 `template<class Model > IdxVecT mappel::estimator::Estimator< Model >::exit_counts` [protected], [inherited]

Definition at line 299 of file estimator.h.

Referenced by `mappel::estimator::Estimator< Model >::clear_stats()`, `mappel::estimator::Estimator< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, and `mappel::estimator::ThreadedEstimator< Model >::record_exit_code()`.

9.49.5.8 `template<class Model > IdxVecT mappel::estimator::IterativeMaximizer< Model >::last_backtrack_idx` [protected], [inherited]

Debugging: Stores last set of `backtrack_idx`s when `data.save_seq==true`.

Definition at line 475 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::get_debug_stats()`, and `mappel::estimator::IterativeMaximizer< Model >::record_run_statistics()`.

9.49.5.9 `template<class Model > const int mappel::estimator::IterativeMaximizer< Model >::max_backtracks = 8` [static], [protected], [inherited]

Definition at line 462 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::backtrack()`, `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, and `mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack()`.

9.49.5.10 `template<class Model > int mappel::estimator::IterativeMaximizer< Model >::max_iterations` [protected], [inherited]

Definition at line 466 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, and `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.49.5.11 `template<class Model > int mappel::estimator::ThreadedEstimator< Model >::max_threads`
`[protected], [inherited]`

Definition at line 324 of file estimator.h.

9.49.5.12 `template<class Model > const double mappel::estimator::IterativeMaximizer< Model`
`>::min_eigenvalue_correction_delta = 1e-3 [static], [protected], [inherited]`

Ensure the minimum eigenvalue is at least this big when correcting indefinite matrix.

Definition at line 454 of file estimator.h.

9.49.5.13 `template<class Model > const double mappel::estimator::IterativeMaximizer< Model`
`>::min_profile_bound_residual = 1e-4 [static], [protected], [inherited]`

Minimum residual in quadratic solutions of equation (8) to accept. Revert to newton step.

Definition at line 464 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.49.5.14 `template<class Model > const Model& mappel::estimator::Estimator< Model >::model` `[protected],`
`[inherited]`

Definition at line 294 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::backtrack()`, `mappel::estimator::IterativeMaximizer< Model >::compute_estimate()`, `mappel::estimator::Estimator< Model >::compute_estimate_debug()`, `mappel::estimator::IterativeMaximizer< Model >::compute_estimate_debug()`, `mappel::estimator::Estimator< Model >::compute_profile_bound()`, `mappel::estimator::IterativeMaximizer< Model >::compute_profile_bound()`, `mappel::estimator::Estimator< Model >::compute_profile_bound_debug()`, `mappel::estimator::IterativeMaximizer< Model >::compute_profile_bound_debug()`, `mappel::estimator::Estimator< Model >::compute_profile_estimate()`, `mappel::estimator::IterativeMaximizer< Model >::compute_profile_estimate()`, `mappel::estimator::Estimator< Model >::estimate_max()`, `mappel::estimator::Estimator< Model >::estimate_max_stack()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_max_stack()`, `mappel::estimator::Estimator< Model >::estimate_profile_bounds()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_max()`, `mappel::estimator::HeuristicEstimator< Model >::get_debug_stats()`, `mappel::estimator::CGaussMLE< Model >::get_debug_stats()`, `mappel::estimator::Estimator< Model >::get_model()`, `mappel::estimator::IterativeMaximizer< Model >::local_maximize()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, `mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack()`, and `mappel::estimator::ThreadedEstimator< Model >::record_exit_code()`.

9.49.5.15 `template<class Model > std::mutex mappel::estimator::ThreadedEstimator< Model >::mtx` `[protected],`
`[inherited]`

Definition at line 326 of file estimator.h.

Referenced by `mappel::estimator::ThreadedEstimator< Model >::clear_stats()`, `mappel::estimator::IterativeMaximizer< Model >::clear_stats()`, `mappel::estimator::ThreadedEstimator< Model >::get_stats()`, `mappel::estimator::HeuristicEstimator< Model >::get_stats()`, `mappel::estimator::CGaussHeuristicEstimator< Model >::get_stats()`, `mappel::estimator::CGaussMLE< Model >::get_stats()`, `mappel::estimator::SimulatedAnnealingMaximizer< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, `mappel::estimator::ThreadedEstimator< Model >::record_exit_code()`, and `mappel::estimator::IterativeMaximizer< Model >::record_run_statistics()`.

9.49.5.16 `template<class Model > int mappel::estimator::Estimator< Model >::num_estimations = 0` [protected], [inherited]

Definition at line 297 of file estimator.h.

Referenced by `mappel::estimator::Estimator< Model >::clear_stats()`, `mappel::estimator::Estimator< Model >::get_stats()`, `mappel::estimator::ThreadedEstimator< Model >::get_stats()`, `mappel::estimator::HeuristicEstimator< Model >::get_stats()`, `mappel::estimator::CGaussHeuristicEstimator< Model >::get_stats()`, `mappel::estimator::CGaussMLE< Model >::get_stats()`, `mappel::estimator::SimulatedAnnealingMaximizer< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, and `mappel::estimator::Estimator< Model >::record_walltime()`.

9.49.5.17 `template<class Model > int mappel::estimator::ThreadedEstimator< Model >::num_threads` [protected], [inherited]

Definition at line 325 of file estimator.h.

Referenced by `mappel::estimator::ThreadedEstimator< Model >::clear_stats()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_max_stack()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_max()`, and `mappel::estimator::ThreadedEstimator< Model >::get_stats()`.

9.49.5.18 `template<class Model > int mappel::estimator::IterativeMaximizer< Model >::total_backtracks = 0` [protected], [inherited]

Definition at line 470 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::clear_stats()`, `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, and `mappel::estimator::IterativeMaximizer< Model >::record_run_statistics()`.

9.49.5.19 `template<class Model > int mappel::estimator::IterativeMaximizer< Model >::total_der_evals = 0` [protected], [inherited]

Definition at line 472 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::clear_stats()`, `mappel::estimator::SimulatedAnnealingMaximizer< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, and `mappel::estimator::IterativeMaximizer< Model >::record_run_statistics()`.

9.49.5.20 `template<class Model > int mappel::estimator::IterativeMaximizer< Model >::total_fun_evals = 0` [protected], [inherited]

Definition at line 471 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::clear_stats()`, `mappel::estimator::SimulatedAnnealingMaximizer< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, and `mappel::estimator::IterativeMaximizer< Model >::record_run_statistics()`.

9.49.5.21 `template<class Model > int mappel::estimator::IterativeMaximizer< Model >::total_iterations = 0`
`[protected], [inherited]`

Definition at line 469 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::clear_stats()`, `mappel::estimator::SimulatedAnnealingMaximizer< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, and `mappel::estimator::IterativeMaximizer< Model >::record_run_statistics()`.

9.49.5.22 `template<class Model > double mappel::estimator::Estimator< Model >::total_walltime = 0.` `[protected], [inherited]`

Definition at line 298 of file estimator.h.

Referenced by `mappel::estimator::Estimator< Model >::clear_stats()`, `mappel::estimator::Estimator< Model >::get_stats()`, `mappel::estimator::ThreadedEstimator< Model >::get_stats()`, and `mappel::estimator::Estimator< Model >::record_walltime()`.


The documentation for this class was generated from the following files:

- [estimator.h](#)
- [estimator_impl.h](#)

9.50 mappel::estimator::SimulatedAnnealingMaximizer< Model > Class Template Reference

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/estimator.h>
```

Inheritance diagram for `mappel::estimator::SimulatedAnnealingMaximizer< Model >`:

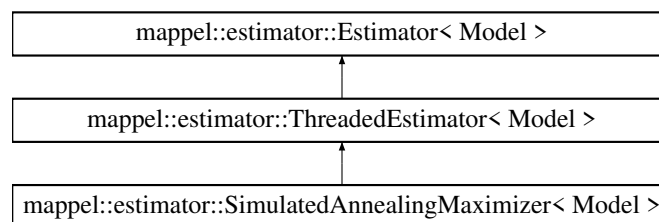

Public Member Functions

- [SimulatedAnnealingMaximizer](#) (const Model &[model](#), int num_iterations_[_DefaultNumIterations](#), double T_init_[_Default_T_Init](#), double cooling_rate_[_DefaultCoolingRate](#))
- [StatsT get_stats](#) ()
- [StatsT get_debug_stats](#) ()
- [std::string name](#) () const
- void [estimate_max_stack](#) (const [ModelDataStackT](#)< Model > &[data](#), const [ParamVecT](#)< Model > &[theta_init](#), [_stack](#), [MLEDataStack](#) &[mle_data_stack](#)) override

- void `estimate_profile_max` (const `ModelDataT`< `Model` > &data, const `ParamVecT`< `Model` > &theta_init, `ProfileLikelihoodData` &profile) override
 - void `estimate_profile_bounds_parallel` (const `ModelDataT`< `Model` > &data, `ProfileBoundsData` &bounds_est) override
 - void `estimate_profile_bounds_stack` (const `ModelDataStackT`< `Model` > &data, `ProfileBoundsDataStack` &bounds_est_stack) override
 - void `clear_stats` ()
 - const `Model` & `get_model` ()
-
- void `estimate_max_stack` (const `ModelDataStackT`< `Model` > &data_stack, `MLEDDataStack` &mle_data_stack)
 - void `estimate_max` (const `ModelDataT`< `Model` > &data, const `ParamT`< `Model` > &theta_init, `MLEDData` &mle_data, `StencilT`< `Model` > &mle_stencil)
 - void `estimate_max` (const `ModelDataT`< `Model` > &data, const `ParamT`< `Model` > &theta_init, `MLEDData` &mle_data)
 - void `estimate_max` (const `ModelDataT`< `Model` > &data, `MLEDData` &mle_data)
 - void `estimate_max_debug` (const `ModelDataT`< `Model` > &data, const `ParamT`< `Model` > &theta_init, `MLEDData` &mle_data, `StencilT`< `Model` > &mle_stencil)
 - void `estimate_max_debug` (const `ModelDataT`< `Model` > &data, const `ParamT`< `Model` > &theta_init, `MLEDData` &mle_data)
-
- double `estimate_profile_max` (const `ModelDataT`< `Model` > &data, const `IdxVecT` &fixed_idxes, const `ParamT`< `Model` > &fixed_theta_init, `StencilT`< `Model` > &theta_max)
-
- void `estimate_profile_bounds` (const `ModelDataT`< `Model` > &data, `ProfileBoundsData` &bounds_est)
 - void `estimate_profile_bounds_debug` (const `ModelDataT`< `Model` > &data, `ProfileBoundsDebugData` &bounds_est)
-
- `IdxVecT` `get_exit_counts` () const

Static Public Attributes

- static const int `DefaultNumIterations` = 500
Default number of SA iterations.
- static const double `Default_T_Init` = 100.
Default SA initial temperature.
- static const double `DefaultCoolingRate` = 1.02
Default SA cooling rate.

Protected Member Functions

- void `record_exit_code` (`ExitCode` code) override
- virtual void `compute_profile_bound` (const `ModelDataT`< `Model` > &data, `ProfileBoundsData` &est, const `VecT` &init_step, `IdxT` param_idx, `IdxT` which_bound)
- virtual void `compute_profile_bound_debug` (const `ModelDataT`< `Model` > &data, `ProfileBoundsDebugData` &est)
- void `record_walltime` (`ClockT`::time_point start_walltime, int num_estimations)

Protected Attributes

- int [max_threads](#)
- int [num_threads](#)
- std::mutex [mtx](#)
- const Model & [model](#)
- int [num_estimations](#) = 0
- double [total_walltime](#) = 0.
- [IdxVecT](#) [exit_counts](#)

9.50.1 Detailed Description

```
template<class Model>
class mappel::estimator::SimulatedAnnealingMaximizer< Model >
```

Definition at line 384 of file estimator.h.

9.50.2 Constructor & Destructor Documentation

9.50.2.1 `template<class Model > mappel::estimator::SimulatedAnnealingMaximizer< Model >::SimulatedAnnealingMaximizer (const Model & model, int num_iterations = DefaultNumIterations, double T_init = Default_T_Init, double cooling_rate = DefaultCoolingRate) [inline]`

Definition at line 392 of file estimator.h.

9.50.3 Member Function Documentation

9.50.3.1 `template<class Model > void mappel::estimator::ThreadedEstimator< Model >::clear_stats () [virtual], [inherited]`

Run statistics.

Reimplemented from [mappel::estimator::Estimator< Model >](#).

Reimplemented in [mappel::estimator::IterativeMaximizer< Model >](#).

Definition at line 570 of file estimator_impl.h.

References [mappel::estimator::Estimator< Model >::clear_stats\(\)](#), [mappel::estimator::ThreadedEstimator< Model >::mtx](#), and [mappel::estimator::ThreadedEstimator< Model >::num_threads](#).

Referenced by [mappel::estimator::IterativeMaximizer< Model >::clear_stats\(\)](#).

9.50.3.2 `template<class Model > void mappel::estimator::Estimator< Model >::compute_profile_bound (const ModelDataT< Model > & data, ProfileBoundsData & est, const VecT & init_step, IdxT param_idx, IdxT which_bound)` [protected], [virtual], [inherited]

Reimplemented in [mappel::estimator::IterativeMaximizer< Model >](#).

Definition at line 309 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::model`.

Referenced by `mappel::estimator::Estimator< Model >::estimate_profile_bounds()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel()`, and `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack()`.

9.50.3.3 `template<class Model > void mappel::estimator::Estimator< Model >::compute_profile_bound_debug (const ModelDataT< Model > & data, ProfileBoundsDebugData & est)` [protected], [virtual], [inherited]

Reimplemented in [mappel::estimator::IterativeMaximizer< Model >](#).

Definition at line 318 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::model`.

Referenced by `mappel::estimator::Estimator< Model >::estimate_profile_bounds_debug()`.

9.50.3.4 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max (const ModelDataT< Model > & data, const ParamT< Model > & theta_init, MLEData & mle_data, StencilT< Model > & mle_stencil)` [inherited]

Maximum likelihood point estimators Estimate for a single data starting at `theta_init`, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with `theta_init`, `theta_init` is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of `theta_init` will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 128 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::compute_estimate()`, `mappel::estimator::Error`, `mappel::estimator::MLEData::obsI`, `mappel::print_text_image()`, `mappel::estimator::Estimator< Model >::record_exit_code()`,

mappel::estimator::Estimator< Model >::record_walltime(), mappel::estimator::MLEData::rllh, and mappel::estimator::MLEData::theta.

Referenced by mappel::estimator::Estimator< Model >::estimate_max().

9.50.3.5 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max (const ModelDataT< Model > & data, const ParamT< Model > & theta_init, MLEData & mle_data)` [inherited]

Maximum likelihood point estimators Estimate for a single data starting at theta_init, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with theta_init, theta_init is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of theta_init will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 121 of file estimator_impl.h.

References mappel::estimator::Estimator< Model >::estimate_max().

9.50.3.6 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max (const ModelDataT< Model > & data, MLEData & mle_data)` [inherited]

Maximum likelihood point estimators Estimate for a single data starting at theta_init, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with theta_init, theta_init is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of theta_init will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 112 of file estimator_impl.h.

References mappel::estimator::Estimator< Model >::estimate_max(), and mappel::estimator::Estimator< Model >::model.

9.50.3.7 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max_debug (const ModelDataT< Model > & data, const ParamT< Model > & theta_init, MLEDebugData & mle_data, StencilT< Model > & mle_stencil) [inherited]`

Debug estimation for a single data starting at `theta_init`, fill in the [MLEDebugData](#) struct with data including the sequence of evaluated points. Estimation is initialized with `theta_init`, `theta_init` is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of `theta_init` will not be modified in the initialization process.

The sequence and `sequence_rllh` parameters of the [MLEDebugData](#) struct record the entire sequence of evaluated points including `theta_init` and `theta_mle`, which should be first and last respectively.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	Initial theta value.
out	<i>mle_data</i>	MLEDebugData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

9.50.3.8 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max_debug (const ModelDataT< Model > & data, const ParamT< Model > & theta_init, MLEDebugData & mle_data) [inherited]`

Maximum likelihood point estimators Estimate for a single data starting at `theta_init`, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with `theta_init`, `theta_init` is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of `theta_init` will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 157 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::compute_estimate_debug()`, `mappel::estimator::Error`, `mappel::estimator::MLEDebugData::obsI`, `mappel::print_text_image()`, `mappel::estimator::Estimator< Model >::record_exit_code()`, `mappel::estimator::Estimator< Model >::record_walltime()`, `mappel::estimator::MLEDebugData::rllh`, and `mappel::estimator::MLEDebugData::theta`.

9.50.3.9 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max_stack (const ModelDataStackT< Model > & data_stack, MLEDataStack & mle_data_stack) [inherited]`

Maximum likelihood point estimators Estimate for a single data starting at theta_init, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with theta_init, theta_init is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of theta_init will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 183 of file estimator_impl.h.

References [mappel::estimator::Estimator< Model >::estimate_max_stack\(\)](#), and [mappel::estimator::Estimator< Model >::model](#).

9.50.3.10 `template<class Model > void mappel::estimator::ThreadedEstimator< Model >::estimate_max_stack (const ModelDataStackT< Model > & data_stack, const ParamVecT< Model > & theta_init_stack, MLEDataStack & mle_data_stack) [override],[virtual],[inherited]`

Estimate for a stack of data and fill in the [MLEDataStack](#) struct with the estimated parameter, RLLH, and observed information for each data in parallel. Estimation is initialized with theta_init, theta_init is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of theta_init will not be modified in the initialization process.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[optional] Initial theta value for each image.
out	<i>mle</i>	MLEStackData records the maximum likelihood estimate, RLLH, and Observed information for each data

Implements [mappel::estimator::Estimator< Model >](#).

Definition at line 377 of file estimator_impl.h.

References [mappel::estimator::Estimator< Model >::compute_estimate\(\)](#), [mappel::estimator::Error](#), [mappel::estimator::Estimator< Model >::model](#), [mappel::estimator::MLEDataStack::Ndata](#), [mappel::estimator::ThreadedEstimator< Model >::num_threads](#), [mappel::estimator::MLEData::obsI](#), [mappel::estimator::MLEDataStack::obsI](#), [mappel::print_text_image\(\)](#), [mappel::estimator::ThreadedEstimator< Model >::record_exit_code\(\)](#), [mappel::estimator::Estimator< Model >::record_walltime\(\)](#), [mappel::estimator::MLEData::rllh](#), [mappel::estimator::MLEDataStack::rllh](#), [mappel::estimator::MLEData::theta](#), and [mappel::estimator::MLEDataStack::theta](#).

9.50.3.11 `template<class Model> void mappel::estimator::Estimator< Model>::estimate_profile_bounds (const ModelDataT< Model> & data, ProfileBoundsData & bounds_est) [inherited]`

Profile likelihood bounds computations with VM algorithm

Definition at line 220 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model>::compute_profile_bound()`, `mappel::estimator::Error`, `mappel::estimator::ProfileBoundsData::estimated_idx`s, `mappel::estimator::ProfileBoundsData::initialize_arrays()`, `mappel::estimator::ProfileBoundsData::mle`, `mappel::estimator::Estimator< Model>::model`, `mappel::estimator::ProfileBoundsData::Nparams_est`, `mappel::estimator::MLEData::obs`, `mappel::print_text_image()`, `mappel::estimator::ProfileBoundsData::profile_lb`, `mappel::estimator::ProfileBoundsData::profile_points_lb`, `mappel::estimator::ProfileBoundsData::profile_points_lb_rllh`, `mappel::estimator::ProfileBoundsData::profile_points_ub`, `mappel::estimator::ProfileBoundsData::profile_ub`, `mappel::estimator::Estimator< Model>::record_exit_code()`, `mappel::estimator::Estimator< Model>::record_walltime()`, `mappel::estimator::subroutine::solve_profile_initial_step()`, `mappel::estimator::ProfileBoundsData::target_rllh_delta`, and `mappel::estimator::MLEData::theta`.

Referenced by `mappel::methods::error_bounds_profile_likelihood()`.

9.50.3.12 `template<class Model> void mappel::estimator::Estimator< Model>::estimate_profile_bounds_debug (const ModelDataT< Model> & data, ProfileBoundsDebugData & bounds_est) [inherited]`

Profile likelihood bounds computations with VM algorithm

Definition at line 258 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model>::compute_profile_bound_debug()`, `mappel::estimator::Error`, `mappel::estimator::ProfileBoundsDebugData::estimated_idx`, `mappel::estimator::ProfileBoundsDebugData::mle`, `mappel::print_text_image()`, `mappel::estimator::Estimator< Model>::record_exit_code()`, `mappel::estimator::Estimator< Model>::record_walltime()`, `mappel::estimator::ProfileBoundsDebugData::target_rllh_delta`, and `mappel::estimator::MLEData::theta`.

Referenced by `mappel::methods::debug::error_bounds_profile_likelihood_debug()`.

9.50.3.13 `template<class Model> void mappel::estimator::ThreadedEstimator< Model>::estimate_profile_bounds_parallel (const ModelDataT< Model> & data, ProfileBoundsData & bounds_est) [override], [virtual], [inherited]`

Profile likelihood bounds computations with VM algorithm

Implements [mappel::estimator::Estimator< Model>](#).

Definition at line 464 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model>::compute_profile_bound()`, `mappel::estimator::Error`, `mappel::estimator::ProfileBoundsData::estimated_idx`s, `mappel::estimator::ProfileBoundsData::initialize_arrays()`, `mappel::estimator::ProfileBoundsData::mle`, `mappel::estimator::Estimator< Model>::model`, `mappel::estimator::ProfileBoundsData::Nparams_est`, `mappel::estimator::ThreadedEstimator< Model>::num_threads`, `mappel::estimator::MLEData::obs`, `mappel::print_text_image()`, `mappel::estimator::ThreadedEstimator< Model>::record_exit_code()`, `mappel::estimator::Estimator< Model>::record_walltime()`, `mappel::estimator::subroutine::solve_profile_initial_step()`, `mappel::estimator::ProfileBoundsData::target_rllh_delta`, and `mappel::estimator::MLEData::theta`.

Referenced by `mappel::methods::openmp::error_bounds_profile_likelihood_parallel()`.

9.50.3.14 `template<class Model> void mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack (const ModelDataStackT< Model > & data_stack, ProfileBoundsDataStack & bounds_est) [override], [virtual], [inherited]`

Profile likelihood bounds computations with VM algorithm

Implements [mappel::estimator::Estimator< Model >](#).

Definition at line 500 of file estimator_impl.h.

References [mappel::estimator::Estimator< Model >::compute_profile_bound\(\)](#), [mappel::estimator::Error](#), [mappel::estimator::ProfileBoundsData::estimated_idx](#)s, [mappel::estimator::ProfileBoundsDataStack::estimated_idx](#)s, [mappel::estimator::ProfileBoundsData::initialize_arrays\(\)](#), [mappel::estimator::ProfileBoundsDataStack::initialize_arrays\(\)](#), [mappel::estimator::ProfileBoundsData::mle](#), [mappel::estimator::ProfileBoundsDataStack::mle](#), [mappel::estimator::Estimator< Model >::model](#), [mappel::estimator::ProfileBoundsDataStack::Ndata](#), [mappel::estimator::ProfileBoundsDataStack::Nparams_est](#), [mappel::estimator::ThreadedEstimator< Model >::num_threads](#), [mappel::estimator::MLEData::obs](#), [mappel::estimator::MLEDataStack::obs](#), [mappel::print_text_image\(\)](#), [mappel::estimator::ProfileBoundsData::profile_lb](#), [mappel::estimator::ProfileBoundsDataStack::profile_lb](#), [mappel::estimator::ProfileBoundsData::profile_points_lb](#), [mappel::estimator::ProfileBoundsDataStack::profile_points_lb](#), [mappel::estimator::ProfileBoundsData::profile_points_lb_rllh](#), [mappel::estimator::ProfileBoundsDataStack::profile_points_lb_rllh](#), [mappel::estimator::ProfileBoundsData::profile_points_ub](#), [mappel::estimator::ProfileBoundsDataStack::profile_points_ub](#), [mappel::estimator::ProfileBoundsData::profile_points_ub_rllh](#), [mappel::estimator::ProfileBoundsDataStack::profile_points_ub_rllh](#), [mappel::estimator::ProfileBoundsData::profile_ub](#), [mappel::estimator::ProfileBoundsDataStack::profile_ub](#), [mappel::estimator::ThreadedEstimator< Model >::record_exit_code\(\)](#), [mappel::estimator::Estimator< Model >::record_walltime\(\)](#), [mappel::estimator::MLEData::rllh](#), [mappel::estimator::MLEDataStack::rllh](#), [mappel::estimator::subroutine::solve_profile_initial_step\(\)](#), [mappel::estimator::ProfileBoundsData::target_rllh_delta](#), [mappel::estimator::ProfileBoundsDataStack::target_rllh_delta](#), [mappel::estimator::MLEData::theta](#), and [mappel::estimator::MLEDataStack::theta](#).

Referenced by [mappel::methods::openmp::error_bounds_profile_likelihood_stack\(\)](#).

9.50.3.15 `template<class Model> double mappel::estimator::Estimator< Model >::estimate_profile_max (const ModelDataT< Model > & data, const IdxVecT & fixed_idx, const ParamT< Model > & fixed_theta_init, StencilT< Model > & theta_max) [inherited]`

Profile likelihood estimation methods

Definition at line 190 of file estimator_impl.h.

References [mappel::estimator::Estimator< Model >::compute_profile_estimate\(\)](#), [mappel::estimator::Error](#), [mappel::print_text_image\(\)](#), [mappel::estimator::Estimator< Model >::record_exit_code\(\)](#), [mappel::estimator::Estimator< Model >::record_walltime\(\)](#), and [mappel::methods::objective::rllh\(\)](#).

9.50.3.16 `template<class Model> void mappel::estimator::ThreadedEstimator< Model >::estimate_profile_max (const ModelDataT< Model > & data, const ParamVecT< Model > & fixed_theta_init, ProfileLikelihoodData & profile) [override], [virtual], [inherited]`

Profile likelihood estimation methods

Implements [mappel::estimator::Estimator< Model >](#).

Definition at line 418 of file estimator_impl.h.

References [mappel::estimator::Estimator< Model >::compute_profile_estimate\(\)](#), [mappel::estimator::Error](#), [mappel::estimator::ProfileLikelihoodData::fixed_idx](#)s, [mappel::estimator::ProfileLikelihoodData::fixed_values](#), [mappel::estimator::Estimator< Model >::model](#), [mappel::estimator::ProfileLikelihoodData::Nfixed](#), [mappel::estimator::ThreadedEstimator< Model >::num_threads](#), [mappel::estimator::ProfileLikelihoodData::Nvalues](#), [mappel::print_text_image\(\)](#), [mappel::estimator::ProfileLikelihoodData::profile_likelihood](#), [mappel::estimator::ProfileLikelihoodData::profile_parameters](#), [mappel::estimator::ThreadedEstimator< Model >::record_exit_code\(\)](#), and [mappel::estimator::Estimator< Model >::record_walltime\(\)](#).

9.50.3.17 `template<class Model> StatsT mappel::estimator::SimulatedAnnealingMaximizer< Model>::get_debug_stats () [virtual]`

Run statistics.

Reimplemented from [mappel::estimator::ThreadedEstimator< Model>](#).

Definition at line 1764 of file `estimator_impl.h`.

References `mappel::estimator::IterativeMaximizer< Model>::get_stats()`.

9.50.3.18 `template<class Model> IdxVecT mappel::estimator::Estimator< Model>::get_exit_counts () const [inline],[inherited]`

Run statistics.

Definition at line 274 of file `estimator.h`.

Referenced by `mappel::estimator::IterativeMaximizer< Model>::local_profile_maximize()`.

9.50.3.19 `template<class Model> const Model & mappel::estimator::Estimator< Model>::get_model () [inherited]`

Definition at line 108 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model>::model`.

9.50.3.20 `template<class Model> StatsT mappel::estimator::SimulatedAnnealingMaximizer< Model>::get_stats () [virtual]`

Run statistics.

Reimplemented from [mappel::estimator::ThreadedEstimator< Model>](#).

Definition at line 1744 of file `estimator_impl.h`.

References `mappel::estimator::ThreadedEstimator< Model>::get_stats()`, `mappel::estimator::ThreadedEstimator< Model>::mtx`, `mappel::estimator::Estimator< Model>::num_estimations`, `mappel::estimator::IterativeMaximizer< Model>::total_der_evals`, `mappel::estimator::IterativeMaximizer< Model>::total_fun_evals`, and `mappel::estimator::IterativeMaximizer< Model>::total_iterations`.

9.50.3.21 `template<class Model> std::string mappel::estimator::SimulatedAnnealingMaximizer< Model>::name () const [inline],[virtual]`

Implements [mappel::estimator::Estimator< Model>](#).

Definition at line 401 of file `estimator.h`.

References `mappel::estimator::MLEData::rllh`.

9.50.3.22 `template<class Model > void mappel::estimator::ThreadedEstimator< Model >::record_exit_code (ExitCode code)` [override], [protected], [virtual], [inherited]

Implements [mappel::estimator::Estimator< Model >](#).

Definition at line 578 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::exit_counts`, `mappel::estimator::Estimator< Model >::model`, `mappel::estimator::ThreadedEstimator< Model >::mtx`, `mappel::methods::observed_information()`, `mappel::estimator::MLEData::obsI`, `mappel::estimator::MLEData::rllh`, `mappel::methods::objective::rllh()`, `mappel::estimator::Success`, and `mappel::estimator::MLEData::theta`.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::backtrack()`, `mappel::estimator::IterativeMaximizer< Model >::convergence_test_grad_ratio()`, `mappel::estimator::IterativeMaximizer< Model >::convergence_test_step_size()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_max_stack()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_max()`, `mappel::estimator::HeuristicEstimator< Model >::get_debug_stats()`, `mappel::estimator::CGaussMLE< Model >::get_debug_stats()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, and `mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack()`.

9.50.3.23 `template<class Model > void mappel::estimator::Estimator< Model >::record_walltime (ClockT::time_point start_walltime, int num_estimations)` [protected], [inherited]

Definition at line 360 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::num_estimations`, and `mappel::estimator::Estimator< Model >::total_walltime`.

Referenced by `mappel::estimator::Estimator< Model >::estimate_max()`, `mappel::estimator::Estimator< Model >::estimate_max_debug()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_max_stack()`, `mappel::estimator::Estimator< Model >::estimate_profile_bounds()`, `mappel::estimator::Estimator< Model >::estimate_profile_bounds_debug()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack()`, `mappel::estimator::Estimator< Model >::estimate_profile_max()`, and `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_max()`.

9.50.4 Member Data Documentation

9.50.4.1 `template<class Model > const double mappel::estimator::SimulatedAnnealingMaximizer< Model >::Default_T_Init = 100.` [static]

Default SA initial temperature.

Definition at line 389 of file `estimator.h`.

9.50.4.2 `template<class Model > const double mappel::estimator::SimulatedAnnealingMaximizer< Model >::DefaultCoolingRate = 1.02` [static]

Default SA cooling rate.

Definition at line 390 of file `estimator.h`.

9.50.4.3 `template<class Model> const int mappel::estimator::SimulatedAnnealingMaximizer< Model >::DefaultNumIterations = 500 [static]`

Default number of SA iterations.

Definition at line 388 of file estimator.h.

9.50.4.4 `template<class Model> IdxVecT mappel::estimator::Estimator< Model>::exit_counts [protected], [inherited]`

Definition at line 299 of file estimator.h.

Referenced by `mappel::estimator::Estimator< Model>::clear_stats()`, `mappel::estimator::Estimator< Model>::get_stats()`, `mappel::estimator::IterativeMaximizer< Model>::local_profile_maximize()`, and `mappel::estimator::ThreadedEstimator< Model>::record_exit_code()`.

9.50.4.5 `template<class Model> int mappel::estimator::ThreadedEstimator< Model>::max_threads [protected], [inherited]`

Definition at line 324 of file estimator.h.

9.50.4.6 `template<class Model> const Model& mappel::estimator::Estimator< Model>::model [protected], [inherited]`

Definition at line 294 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model>::backtrack()`, `mappel::estimator::IterativeMaximizer< Model>::compute_estimate()`, `mappel::estimator::Estimator< Model>::compute_estimate_debug()`, `mappel::estimator::IterativeMaximizer< Model>::compute_estimate_debug()`, `mappel::estimator::Estimator< Model>::compute_profile_bound()`, `mappel::estimator::IterativeMaximizer< Model>::compute_profile_bound()`, `mappel::estimator::Estimator< Model>::compute_profile_bound_debug()`, `mappel::estimator::IterativeMaximizer< Model>::compute_profile_bound_debug()`, `mappel::estimator::Estimator< Model>::compute_profile_estimate()`, `mappel::estimator::IterativeMaximizer< Model>::compute_profile_estimate()`, `mappel::estimator::Estimator< Model>::estimate_max()`, `mappel::estimator::Estimator< Model>::estimate_max_stack()`, `mappel::estimator::ThreadedEstimator< Model>::estimate_max_stack()`, `mappel::estimator::Estimator< Model>::estimate_profile_bounds()`, `mappel::estimator::ThreadedEstimator< Model>::estimate_profile_bounds_parallel()`, `mappel::estimator::ThreadedEstimator< Model>::estimate_profile_bounds_stack()`, `mappel::estimator::ThreadedEstimator< Model>::estimate_profile_max()`, `mappel::estimator::HeuristicEstimator< Model>::get_debug_stats()`, `mappel::estimator::CGaussMLE< Model>::get_debug_stats()`, `mappel::estimator::Estimator< Model>::get_model()`, `mappel::estimator::IterativeMaximizer< Model>::local_maximize()`, `mappel::estimator::IterativeMaximizer< Model>::local_profile_maximize()`, `mappel::estimator::IterativeMaximizer< Model>::profile_bound_backtrack()`, and `mappel::estimator::ThreadedEstimator< Model>::record_exit_code()`.

9.50.4.7 `template<class Model> std::mutex mappel::estimator::ThreadedEstimator< Model>::mtx [protected], [inherited]`

Definition at line 326 of file estimator.h.

Referenced by `mappel::estimator::ThreadedEstimator< Model>::clear_stats()`, `mappel::estimator::IterativeMaximizer< Model>::clear_stats()`, `mappel::estimator::ThreadedEstimator< Model>::get_stats()`, `mappel::estimator::HeuristicEstimator< Model>::get_stats()`, `mappel::estimator::CGaussHeuristicEstimator< Model>::get_stats()`, `mappel::estimator::CGaussMLE< Model>::get_stats()`, `mappel::estimator::SimulatedAnnealingMaximizer< Model>::get_stats()`, `mappel::estimator::IterativeMaximizer< Model>::get_stats()`, `mappel::estimator::IterativeMaximizer< Model>::local_profile_maximize()`, `mappel::estimator::ThreadedEstimator< Model>::record_exit_code()`, and `mappel::estimator::IterativeMaximizer< Model>::record_run_statistics()`.

9.50.4.8 `template<class Model> int mappel::estimator::Estimator< Model>::num_estimations = 0` [protected],
[inherited]

Definition at line 297 of file estimator.h.

Referenced by `mappel::estimator::Estimator< Model>::clear_stats()`, `mappel::estimator::Estimator< Model>::get_stats()`, `mappel::estimator::ThreadedEstimator< Model>::get_stats()`, `mappel::estimator::HeuristicEstimator< Model>::get_stats()`, `mappel::estimator::CGaussHeuristicEstimator< Model>::get_stats()`, `mappel::estimator::CGaussMLE< Model>::get_stats()`, `mappel::estimator::SimulatedAnnealingMaximizer< Model>::get_stats()`, `mappel::estimator::IterativeMaximizer< Model>::get_stats()`, and `mappel::estimator::Estimator< Model>::record_walltime()`.

9.50.4.9 `template<class Model> int mappel::estimator::ThreadedEstimator< Model>::num_threads` [protected],
[inherited]

Definition at line 325 of file estimator.h.

Referenced by `mappel::estimator::ThreadedEstimator< Model>::clear_stats()`, `mappel::estimator::ThreadedEstimator< Model>::estimate_max_stack()`, `mappel::estimator::ThreadedEstimator< Model>::estimate_profile_bounds_parallel()`, `mappel::estimator::ThreadedEstimator< Model>::estimate_profile_bounds_stack()`, `mappel::estimator::ThreadedEstimator< Model>::estimate_profile_max()`, and `mappel::estimator::ThreadedEstimator< Model>::get_stats()`.

9.50.4.10 `template<class Model> double mappel::estimator::Estimator< Model>::total_walltime = 0.` [protected],
[inherited]

Definition at line 298 of file estimator.h.

Referenced by `mappel::estimator::Estimator< Model>::clear_stats()`, `mappel::estimator::Estimator< Model>::get_stats()`, `mappel::estimator::ThreadedEstimator< Model>::get_stats()`, and `mappel::estimator::Estimator< Model>::record_walltime()`.

The documentation for this class was generated from the following files:

- [estimator.h](#)
- [estimator_impl.h](#)

9.51 mappel::Gauss2DsxyModel::Stencil Class Reference

[Stencil](#) for 2D free-sigma (astigmatic) models.

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/Gauss2DsxyModel.h>
```

Public Types

- `typedef Gauss2DsxyModel::ParamT` [ParamT](#)

Public Member Functions

- [Stencil](#) ()
- [Stencil](#) (const [Gauss2DsxxyModel](#) &[model](#), const [ParamT](#) &[theta](#), bool [_compute_derivatives](#)=true)
- void [compute_derivatives](#) ()
- double [x](#) () const
- double [y](#) () const
- double [l](#) () const
- double [bg](#) () const
- double [sigmaX](#) () const
- double [sigmaY](#) () const

Public Attributes

- bool [derivatives_computed](#) =false
- [Gauss2DsxxyModel](#) const * [model](#)
- [ParamT](#) [theta](#)
- [VecT](#) [dx](#)
- [VecT](#) [dy](#)
- [VecT](#) [Gx](#)
- [VecT](#) [Gy](#)
- [VecT](#) [X](#)
- [VecT](#) [Y](#)
- [VecT](#) [DX](#)
- [VecT](#) [DY](#)
- [VecT](#) [DXSX](#)
- [VecT](#) [DYSX](#)
- [VecT](#) [DXS](#)
- [VecT](#) [DYS](#)
- [VecT](#) [DXS2](#)
- [VecT](#) [DYS2](#)
- [VecT](#) [DYSY](#)

Friends

- std::ostream & [operator<<](#) (std::ostream &out, const [Gauss2DsxxyModel::Stencil](#) &s)

9.51.1 Detailed Description

[Stencil](#) for 2D free-sigma (astigmatic) models.

Definition at line 32 of file [Gauss2DsxxyModel.h](#).

9.51.2 Member Typedef Documentation**9.51.2.1 typedef [Gauss2DsxxyModel::ParamT](#) [mappel::Gauss2DsxxyModel::Stencil::ParamT](#)**

Definition at line 35 of file [Gauss2DsxxyModel.h](#).

9.51.3 Constructor & Destructor Documentation

9.51.3.1 mappel::Gauss2DsxxyModel::Stencil () [inline]

Definition at line 47 of file Gauss2DsxxyModel.h.

References `compute_derivatives()`.

Referenced by `mappel::Gauss2DsxxyModel::make_stencil()`.

9.51.3.2 mappel::Gauss2DsxxyModel::Stencil (const Gauss2DsxxyModel & model, const ParamT & theta, bool _compute_derivatives = true)

9.51.4 Member Function Documentation

9.51.4.1 double mappel::Gauss2DsxxyModel::Stencil::bg () const [inline]

Definition at line 53 of file Gauss2DsxxyModel.h.

References `theta`.

Referenced by `mappel::Gauss2DsxxyModel::pixel_model_value()`.

9.51.4.2 void mappel::Gauss2DsxxyModel::Stencil::compute_derivatives ()

Referenced by `Stencil()`.

9.51.4.3 double mappel::Gauss2DsxxyModel::Stencil::l () const [inline]

Definition at line 52 of file Gauss2DsxxyModel.h.

References `theta`.

Referenced by `mappel::Gauss2DsxxyModel::pixel_grad()`, `mappel::Gauss2DsxxyModel::pixel_grad2()`, `mappel::Gauss2DsxxyModel::pixel_hess()`, and `mappel::Gauss2DsxxyModel::pixel_model_value()`.

9.51.4.4 double mappel::Gauss2DsxxyModel::Stencil::sigmaX () const [inline]

Definition at line 54 of file Gauss2DsxxyModel.h.

References `theta`.

Referenced by `mappel::Gauss2DsxxyModel::pixel_grad2()`, and `mappel::Gauss2DsxxyModel::pixel_hess()`.

9.51.4.5 double mappel::Gauss2DsxxyModel::Stencil::sigmaY () const [inline]

Definition at line 55 of file Gauss2DsxxyModel.h.

References `operator<<`, and `theta`.

Referenced by `mappel::Gauss2DsxxyModel::pixel_grad2()`, and `mappel::Gauss2DsxxyModel::pixel_hess()`.

9.51.4.6 `double mappel::Gauss2DsxyModel::Stencil::x () const [inline]`

Definition at line 50 of file Gauss2DsxyModel.h.

References `theta`.

9.51.4.7 `double mappel::Gauss2DsxyModel::Stencil::y () const [inline]`

Definition at line 51 of file Gauss2DsxyModel.h.

References `theta`.

9.51.5 Friends And Related Function Documentation

9.51.5.1 `std::ostream& operator<< (std::ostream & out, const Gauss2DsxyModel::Stencil & s) [friend]`

Referenced by `sigmaY()`.

9.51.6 Member Data Documentation

9.51.6.1 `bool mappel::Gauss2DsxyModel::Stencil::derivatives_computed =false`

Definition at line 34 of file Gauss2DsxyModel.h.

9.51.6.2 `VecT mappel::Gauss2DsxyModel::Stencil::dx`

Definition at line 39 of file Gauss2DsxyModel.h.

9.51.6.3 `VecT mappel::Gauss2DsxyModel::Stencil::DX`

Definition at line 42 of file Gauss2DsxyModel.h.

Referenced by `mappel::Gauss2DsxyModel::pixel_grad()`, and `mappel::Gauss2DsxyModel::pixel_hess()`.

9.51.6.4 `VecT mappel::Gauss2DsxyModel::Stencil::DXS`

Definition at line 44 of file Gauss2DsxyModel.h.

Referenced by `mappel::Gauss2DsxyModel::pixel_grad()`, `mappel::Gauss2DsxyModel::pixel_grad2()`, and `mappel::Gauss2DsxyModel::pixel_hess()`.

9.51.6.5 `VecT mappel::Gauss2DsxyModel::Stencil::DXS2`

Definition at line 45 of file Gauss2DsxyModel.h.

Referenced by `mappel::Gauss2DsxyModel::pixel_grad2()`, and `mappel::Gauss2DsxyModel::pixel_hess()`.

9.51.6.6 VecT mappel::Gauss2DsxxyModel::Stencil::DXSX

Definition at line 43 of file Gauss2DsxxyModel.h.

Referenced by mappel::Gauss2DsxxyModel::pixel_hess().

9.51.6.7 VecT mappel::Gauss2DsxxyModel::Stencil::dy

Definition at line 39 of file Gauss2DsxxyModel.h.

9.51.6.8 VecT mappel::Gauss2DsxxyModel::Stencil::DY

Definition at line 42 of file Gauss2DsxxyModel.h.

Referenced by mappel::Gauss2DsxxyModel::pixel_grad(), and mappel::Gauss2DsxxyModel::pixel_hess().

9.51.6.9 VecT mappel::Gauss2DsxxyModel::Stencil::DYS

Definition at line 44 of file Gauss2DsxxyModel.h.

Referenced by mappel::Gauss2DsxxyModel::pixel_grad(), mappel::Gauss2DsxxyModel::pixel_grad2(), and mappel::Gauss2DsxxyModel::pixel_hess().

9.51.6.10 VecT mappel::Gauss2DsxxyModel::Stencil::DYS2

Definition at line 45 of file Gauss2DsxxyModel.h.

Referenced by mappel::Gauss2DsxxyModel::pixel_grad2(), and mappel::Gauss2DsxxyModel::pixel_hess().

9.51.6.11 VecT mappel::Gauss2DsxxyModel::Stencil::DYSX

Definition at line 43 of file Gauss2DsxxyModel.h.

9.51.6.12 VecT mappel::Gauss2DsxxyModel::Stencil::DYSY

Definition at line 46 of file Gauss2DsxxyModel.h.

Referenced by mappel::Gauss2DsxxyModel::pixel_hess().

9.51.6.13 VecT mappel::Gauss2DsxxyModel::Stencil::Gx

Definition at line 40 of file Gauss2DsxxyModel.h.

9.51.6.14 VecT mappel::Gauss2DsxxyModel::Stencil::Gy

Definition at line 40 of file Gauss2DsxxyModel.h.

9.51.6.15 **Gauss2DsxxyModel** const* mappel::Gauss2DsxxyModel::Stencil::model

Definition at line 36 of file Gauss2DsxxyModel.h.

9.51.6.16 **ParamT** mappel::Gauss2DsxxyModel::Stencil::theta

Definition at line 38 of file Gauss2DsxxyModel.h.

Referenced by `bg()`, `l()`, `sigmaX()`, `sigmaY()`, `x()`, and `y()`.

9.51.6.17 **VecT** mappel::Gauss2DsxxyModel::Stencil::X

Definition at line 41 of file Gauss2DsxxyModel.h.

Referenced by `mappel::Gauss2DsxxyModel::pixel_grad()`, `mappel::Gauss2DsxxyModel::pixel_grad2()`, `mappel::Gauss2DsxxyModel::pixel_hess()`, and `mappel::Gauss2DsxxyModel::pixel_model_value()`.

9.51.6.18 **VecT** mappel::Gauss2DsxxyModel::Stencil::Y

Definition at line 41 of file Gauss2DsxxyModel.h.

Referenced by `mappel::Gauss2DsxxyModel::pixel_grad()`, `mappel::Gauss2DsxxyModel::pixel_grad2()`, `mappel::Gauss2DsxxyModel::pixel_hess()`, and `mappel::Gauss2DsxxyModel::pixel_model_value()`.

The documentation for this class was generated from the following file:

- [Gauss2DsxxyModel.h](#)

9.52 mappel::Gauss1DsModel::Stencil Class Reference

[Stencil](#) for 1D variable-sigma models.

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/Gauss1DsModel.h>
```

Public Types

- using [ParamT](#) = Gauss1DsModel::ParamT

Public Member Functions

- [Stencil](#) ()
- [Stencil](#) (const [Gauss1DsModel](#) &model, const [ParamT](#) &theta, bool _compute_derivatives=true)
- void [compute_derivatives](#) ()
- double [x](#) () const
- double [l](#) () const
- double [bg](#) () const
- double [sigma](#) () const

Public Attributes

- bool [derivatives_computed](#) = false
- [Gauss1DsModel](#) const * [model](#)
- [ParamT](#) [theta](#)
- [VecT](#) [dx](#)
- [VecT](#) [Gx](#)
- [VecT](#) [X](#)
- [VecT](#) [DX](#)
- [VecT](#) [DXS](#)
- [VecT](#) [DXS2](#)
- [VecT](#) [DXSX](#)

Friends

- std::ostream & [operator<<](#) (std::ostream &out, const [Gauss1DsModel::Stencil](#) &s)

9.52.1 Detailed Description

[Stencil](#) for 1D variable-sigma models.

Definition at line 24 of file [Gauss1DsModel.h](#).

9.52.2 Member Typedef Documentation

9.52.2.1 using mappel::Gauss1DsModel::Stencil::ParamT = Gauss1DsModel::ParamT

Definition at line 27 of file [Gauss1DsModel.h](#).

9.52.3 Constructor & Destructor Documentation

9.52.3.1 mappel::Gauss1DsModel::Stencil::Stencil () [inline]

Definition at line 38 of file [Gauss1DsModel.h](#).

References [compute_derivatives\(\)](#).

Referenced by [mappel::Gauss1DsModel::make_stencil\(\)](#).

9.52.3.2 mappel::Gauss1DsModel::Stencil::Stencil (const Gauss1DsModel & model, const ParamT & theta, bool _compute_derivatives = true)

Definition at line 159 of file [Gauss1DsModel.cpp](#).

References [compute_derivatives\(\)](#), [dx](#), [mappel::make_d_stencil\(\)](#), [mappel::make_X_stencil\(\)](#), [model](#), [sigma\(\)](#), [mappel::ImageFormat1DBase::size](#), [X](#), and [x\(\)](#).

9.52.4 Member Function Documentation

9.52.4.1 `double mappel::Gauss1DsModel::Stencil::bg () const [inline]`

Definition at line 43 of file Gauss1DsModel.h.

References theta.

Referenced by `mappel::Gauss1DsModel::initial_theta_estimate()`, and `mappel::Gauss1DsModel::pixel_model_value()`.

9.52.4.2 `void mappel::Gauss1DsModel::Stencil::compute_derivatives ()`

Definition at line 170 of file Gauss1DsModel.cpp.

References `derivatives_computed`, `dx`, `DX`, `DXS`, `DXS2`, `DXSX`, `Gx`, `mappel::make_DX_stencil()`, `mappel::make_DX←S2_stencil()`, `mappel::make_DXS_stencil()`, `mappel::make_DXSX_stencil()`, `mappel::make_G_stencil()`, `model`, `sigma()`, and `mappel::ImageFormat1DBase::size`.

Referenced by `Stencil()`.

9.52.4.3 `double mappel::Gauss1DsModel::Stencil::l () const [inline]`

Definition at line 42 of file Gauss1DsModel.h.

References theta.

Referenced by `mappel::Gauss1DsModel::initial_theta_estimate()`, `mappel::Gauss1DsModel::pixel_grad()`, `mappel←::Gauss1DsModel::pixel_grad2()`, `mappel::Gauss1DsModel::pixel_hess()`, `mappel::Gauss1DsModel::pixel_hess←update()`, and `mappel::Gauss1DsModel::pixel_model_value()`.

9.52.4.4 `double mappel::Gauss1DsModel::Stencil::sigma () const [inline]`

Definition at line 44 of file Gauss1DsModel.h.

References operator<<, and theta.

Referenced by `compute_derivatives()`, `mappel::Gauss1DsModel::initial_theta_estimate()`, `mappel::Gauss1DsModel←::pixel_grad2()`, `mappel::Gauss1DsModel::pixel_hess()`, `mappel::Gauss1DsModel::pixel_hess_update()`, and `Stencil()`.

9.52.4.5 `double mappel::Gauss1DsModel::Stencil::x () const [inline]`

Definition at line 41 of file Gauss1DsModel.h.

References theta.

Referenced by `Stencil()`.

9.52.5 Friends And Related Function Documentation

9.52.5.1 `std::ostream& operator<< (std::ostream & out, const Gauss1DsModel::Stencil & s)` [friend]

Definition at line 182 of file Gauss1DsModel.cpp.

Referenced by `sigma()`.

9.52.6 Member Data Documentation

9.52.6.1 `bool mappel::Gauss1DsModel::Stencil::derivatives_computed = false`

Definition at line 26 of file Gauss1DsModel.h.

Referenced by `compute_derivatives()`, and `mappel::operator<<()`.

9.52.6.2 `VecT mappel::Gauss1DsModel::Stencil::dx`

Definition at line 31 of file Gauss1DsModel.h.

Referenced by `compute_derivatives()`, `mappel::operator<<()`, and `Stencil()`.

9.52.6.3 `VecT mappel::Gauss1DsModel::Stencil::DX`

Definition at line 34 of file Gauss1DsModel.h.

Referenced by `compute_derivatives()`, `mappel::operator<<()`, `mappel::Gauss1DsModel::pixel_grad()`, `mappel::Gauss1DsModel::pixel_hess()`, and `mappel::Gauss1DsModel::pixel_hess_update()`.

9.52.6.4 `VecT mappel::Gauss1DsModel::Stencil::DXS`

Definition at line 35 of file Gauss1DsModel.h.

Referenced by `compute_derivatives()`, `mappel::operator<<()`, `mappel::Gauss1DsModel::pixel_grad()`, `mappel::Gauss1DsModel::pixel_grad2()`, `mappel::Gauss1DsModel::pixel_hess()`, and `mappel::Gauss1DsModel::pixel_hess_update()`.

9.52.6.5 `VecT mappel::Gauss1DsModel::Stencil::DXS2`

Definition at line 36 of file Gauss1DsModel.h.

Referenced by `compute_derivatives()`, `mappel::operator<<()`, `mappel::Gauss1DsModel::pixel_grad2()`, `mappel::Gauss1DsModel::pixel_hess()`, and `mappel::Gauss1DsModel::pixel_hess_update()`.

9.52.6.6 `VecT mappel::Gauss1DsModel::Stencil::DXSX`

Definition at line 37 of file Gauss1DsModel.h.

Referenced by `compute_derivatives()`, `mappel::operator<<()`, `mappel::Gauss1DsModel::pixel_hess()`, and `mappel::Gauss1DsModel::pixel_hess_update()`.

9.52.6.7 **VecT** mappel::Gauss1DsModel::Stencil::Gx

Definition at line 32 of file Gauss1DsModel.h.

Referenced by compute_derivatives(), and mappel::operator<<().

9.52.6.8 **Gauss1DsModel** const* mappel::Gauss1DsModel::Stencil::model

Definition at line 28 of file Gauss1DsModel.h.

Referenced by compute_derivatives(), and Stencil().

9.52.6.9 **ParamT** mappel::Gauss1DsModel::Stencil::theta

Definition at line 30 of file Gauss1DsModel.h.

Referenced by bg(), l(), mappel::operator<<(), sigma(), and x().

9.52.6.10 **VecT** mappel::Gauss1DsModel::Stencil::X

Definition at line 33 of file Gauss1DsModel.h.

Referenced by mappel::operator<<(), mappel::Gauss1DsModel::pixel_grad(), mappel::Gauss1DsModel::pixel_↵ model_value(), and Stencil().

The documentation for this class was generated from the following files:

- [Gauss1DsModel.h](#)
- [Gauss1DsModel.cpp](#)

9.53 mappel::Gauss2DModel::Stencil Class Reference

[Stencil](#) for 2D fixed-sigma models.

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/Gauss2DModel.h>
```

Public Types

- using [ParamT](#) = [Gauss2DModel::ParamT](#)

Public Member Functions

- [Stencil](#) ()
- [Stencil](#) (const [Gauss2DModel](#) &model, const [ParamT](#) &theta, bool compute_derivatives=true)
- void [compute_derivatives](#) ()
- double [x](#) () const
- double [y](#) () const
- double [l](#) () const
- double [bg](#) () const

Public Attributes

- bool [derivatives_computed](#) =false
- [Gauss2DModel](#) const * [model](#)
- [ParamT](#) [theta](#)
- [VecT](#) [dx](#)
- [VecT](#) [dy](#)
- [VecT](#) [Gx](#)
- [VecT](#) [Gy](#)
- [VecT](#) [X](#)
- [VecT](#) [Y](#)
- [VecT](#) [DX](#)
- [VecT](#) [DY](#)
- [VecT](#) [DXS](#)
- [VecT](#) [DYS](#)

Friends

- std::ostream & [operator<<](#) (std::ostream &out, const [Gauss2DModel::Stencil](#) &s)

9.53.1 Detailed Description

[Stencil](#) for 2D fixed-sigma models.

Definition at line 26 of file [Gauss2DModel.h](#).

9.53.2 Member Typedef Documentation

9.53.2.1 using mappel::Gauss2DModel::Stencil::ParamT = Gauss2DModel::ParamT

Definition at line 29 of file [Gauss2DModel.h](#).

9.53.3 Constructor & Destructor Documentation

9.53.3.1 mappel::Gauss2DModel::Stencil::Stencil () [inline]

Definition at line 38 of file [Gauss2DModel.h](#).

References [compute_derivatives\(\)](#).

Referenced by [mappel::Gauss2DModel::make_stencil\(\)](#).

9.53.3.2 `mappel::Gauss2DModel::Stencil::Stencil (const Gauss2DModel & model, const ParamT & theta, bool compute_derivatives = true)`

Definition at line 218 of file Gauss2DModel.cpp.

References `compute_derivatives()`, `dx`, `dy`, `mappel::make_d_stencil()`, `mappel::make_X_stencil()`, `model`, `mappel::Gauss2DModel::psf_sigma`, `mappel::ImageFormat2DBase::size`, `X`, `x()`, `Y`, and `y()`.

9.53.4 Member Function Documentation

9.53.4.1 `double mappel::Gauss2DModel::Stencil::bg () const [inline]`

Definition at line 44 of file Gauss2DModel.h.

References `operator<<`, and `theta`.

Referenced by `mappel::Gauss2DModel::initial_theta_estimate()`, and `mappel::Gauss2DModel::pixel_model_value()`.

9.53.4.2 `void mappel::Gauss2DModel::Stencil::compute_derivatives ()`

Definition at line 232 of file Gauss2DModel.cpp.

References `derivatives_computed`, `dx`, `DX`, `DXS`, `dy`, `DY`, `DYS`, `Gx`, `Gy`, `mappel::make_DX_stencil()`, `mappel::make_DXS_stencil()`, `mappel::make_G_stencil()`, `model`, `mappel::Gauss2DModel::psf_sigma`, and `mappel::ImageFormat2DBase::size`.

Referenced by `Stencil()`.

9.53.4.3 `double mappel::Gauss2DModel::Stencil::l () const [inline]`

Definition at line 43 of file Gauss2DModel.h.

References `theta`.

Referenced by `mappel::Gauss2DModel::initial_theta_estimate()`, `mappel::Gauss2DModel::pixel_grad()`, `mappel::Gauss2DModel::pixel_grad2()`, `mappel::Gauss2DModel::pixel_hess()`, `mappel::Gauss2DModel::pixel_hess_update()`, and `mappel::Gauss2DModel::pixel_model_value()`.

9.53.4.4 `double mappel::Gauss2DModel::Stencil::x () const [inline]`

Definition at line 41 of file Gauss2DModel.h.

References `theta`.

Referenced by `Stencil()`.

9.53.4.5 `double mappel::Gauss2DModel::Stencil::y () const [inline]`

Definition at line 42 of file Gauss2DModel.h.

References `theta`.

Referenced by `Stencil()`.

9.53.5 Friends And Related Function Documentation

9.53.5.1 `std::ostream& operator<< (std::ostream & out, const Gauss2DModel::Stencil & s) [friend]`

Definition at line 249 of file Gauss2DModel.cpp.

Referenced by `bg()`.

9.53.6 Member Data Documentation

9.53.6.1 `bool mappel::Gauss2DModel::Stencil::derivatives_computed =false`

Definition at line 28 of file Gauss2DModel.h.

Referenced by `compute_derivatives()`, and `mappel::operator<<()`.

9.53.6.2 `VecT mappel::Gauss2DModel::Stencil::dx`

Definition at line 33 of file Gauss2DModel.h.

Referenced by `compute_derivatives()`, `mappel::operator<<()`, and `Stencil()`.

9.53.6.3 `VecT mappel::Gauss2DModel::Stencil::DX`

Definition at line 36 of file Gauss2DModel.h.

Referenced by `compute_derivatives()`, `mappel::operator<<()`, `mappel::Gauss2DModel::pixel_grad()`, `mappel::Gauss2DModel::pixel_hess()`, and `mappel::Gauss2DModel::pixel_hess_update()`.

9.53.6.4 `VecT mappel::Gauss2DModel::Stencil::DXS`

Definition at line 37 of file Gauss2DModel.h.

Referenced by `compute_derivatives()`, `mappel::operator<<()`, `mappel::Gauss2DModel::pixel_grad2()`, `mappel::Gauss2DModel::pixel_hess()`, and `mappel::Gauss2DModel::pixel_hess_update()`.

9.53.6.5 VecT mappel::Gauss2DModel::Stencil::dy

Definition at line 33 of file Gauss2DModel.h.

Referenced by compute_derivatives(), mappel::operator<<(), and Stencil().

9.53.6.6 VecT mappel::Gauss2DModel::Stencil::DY

Definition at line 36 of file Gauss2DModel.h.

Referenced by compute_derivatives(), mappel::operator<<(), mappel::Gauss2DModel::pixel_grad(), mappel::Gauss2DModel::pixel_hess(), and mappel::Gauss2DModel::pixel_hess_update().

9.53.6.7 VecT mappel::Gauss2DModel::Stencil::DYS

Definition at line 37 of file Gauss2DModel.h.

Referenced by compute_derivatives(), mappel::operator<<(), mappel::Gauss2DModel::pixel_grad2(), mappel::Gauss2DModel::pixel_hess(), and mappel::Gauss2DModel::pixel_hess_update().

9.53.6.8 VecT mappel::Gauss2DModel::Stencil::Gx

Definition at line 34 of file Gauss2DModel.h.

Referenced by compute_derivatives(), and mappel::operator<<().

9.53.6.9 VecT mappel::Gauss2DModel::Stencil::Gy

Definition at line 34 of file Gauss2DModel.h.

Referenced by compute_derivatives(), and mappel::operator<<().

9.53.6.10 Gauss2DModel const* mappel::Gauss2DModel::Stencil::model

Definition at line 30 of file Gauss2DModel.h.

Referenced by compute_derivatives(), and Stencil().

9.53.6.11 ParamT mappel::Gauss2DModel::Stencil::theta

Definition at line 32 of file Gauss2DModel.h.

Referenced by bg(), l(), mappel::operator<<(), x(), and y().

9.53.6.12 VecT mappel::Gauss2DModel::Stencil::X

Definition at line 35 of file Gauss2DModel.h.

Referenced by mappel::operator<<(), mappel::Gauss2DModel::pixel_grad(), mappel::Gauss2DModel::pixel_grad2(), mappel::Gauss2DModel::pixel_hess(), mappel::Gauss2DModel::pixel_hess_update(), mappel::Gauss2DModel::pixel_model_value(), and Stencil().

9.53.6.13 VecT mappel::Gauss2DModel::Stencil::Y

Definition at line 35 of file Gauss2DModel.h.

Referenced by mappel::operator<<(), mappel::Gauss2DModel::pixel_grad(), mappel::Gauss2DModel::pixel_grad2(), mappel::Gauss2DModel::pixel_hess(), mappel::Gauss2DModel::pixel_hess_update(), mappel::Gauss2DModel::pixel_model_value(), and Stencil().

The documentation for this class was generated from the following files:

- [Gauss2DModel.h](#)
- [Gauss2DModel.cpp](#)

9.54 mappel::Gauss2DsModel::Stencil Class Reference

[Stencil](#) for 2D scalar-sigma models.

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/Gauss2DsModel.h>
```

Public Types

- typedef [Gauss2DsModel::ParamT](#) ParamT

Public Member Functions

- [Stencil](#) ()
- [Stencil](#) (const [Gauss2DsModel](#) &model, const [ParamT](#) &theta, bool _compute_derivatives=true)
- void [compute_derivatives](#) ()
- double [x](#) () const
- double [y](#) () const
- double [l](#) () const
- double [bg](#) () const
- double [sigma_ratio](#) () const
- double [sigmaX](#) () const
- double [sigmaY](#) () const

Public Attributes

- bool [derivatives_computed](#) =false
- [Gauss2DsModel](#) const * [model](#)
- [ParamT](#) [theta](#)
- [VecT](#) [dx](#)
- [VecT](#) [dy](#)
- [VecT](#) [Gx](#)
- [VecT](#) [Gy](#)
- [VecT](#) [X](#)
- [VecT](#) [Y](#)
- [VecT](#) [DX](#)
- [VecT](#) [DY](#)
- [VecT](#) [DXS](#)
- [VecT](#) [DYS](#)
- [VecT](#) [DXS2](#)
- [VecT](#) [DYS2](#)
- [VecT](#) [DXSX](#)
- [VecT](#) [DYSY](#)

Friends

- `std::ostream & operator<< (std::ostream &out, const Gauss2DsModel::Stencil &s)`

9.54.1 Detailed Description

[Stencil](#) for 2D scalar-sigma models.

Definition at line 29 of file Gauss2DsModel.h.

9.54.2 Member Typedef Documentation

9.54.2.1 `typedef Gauss2DsModel::ParamT mappel::Gauss2DsModel::Stencil::ParamT`

Definition at line 32 of file Gauss2DsModel.h.

9.54.3 Constructor & Destructor Documentation

9.54.3.1 `mappel::Gauss2DsModel::Stencil::Stencil () [inline]`

Definition at line 43 of file Gauss2DsModel.h.

References `compute_derivatives()`.

Referenced by `mappel::Gauss2DsModel::make_stencil()`.

9.54.3.2 `mappel::Gauss2DsModel::Stencil::Stencil (const Gauss2DsModel & model, const ParamT & theta, bool _compute_derivatives = true)`

Definition at line 282 of file Gauss2DsModel.cpp.

References `compute_derivatives()`, `dx`, `dy`, `mappel::make_d_stencil()`, `mappel::make_X_stencil()`, `model`, `sigmaX()`, `sigmaY()`, `mappel::ImageFormat2DBase::size`, `X`, `x()`, `Y`, and `y()`.

9.54.4 Member Function Documentation

9.54.4.1 `double mappel::Gauss2DsModel::Stencil::bg () const [inline]`

Definition at line 49 of file Gauss2DsModel.h.

References `theta`.

Referenced by `mappel::Gauss2DsModel::initial_theta_estimate()`, and `mappel::Gauss2DsModel::pixel_model_value()`.

9.54.4.2 void mappel::Gauss2DsModel::Stencil::compute_derivatives ()

Definition at line 296 of file Gauss2DsModel.cpp.

References derivatives_computed, dx, DX, DXS, DXS2, DXSX, dy, DY, DYS, DYS2, DYSY, Gx, Gy, mappel::make_←_DX_stencil(), mappel::make_DXS2_stencil(), mappel::make_DXS_stencil(), mappel::make_DXSX_stencil(), mappel::←make_G_stencil(), model, sigmaX(), sigmaY(), and mappel::ImageFormat2DBase::size.

Referenced by Stencil().

9.54.4.3 double mappel::Gauss2DsModel::Stencil::l () const [inline]

Definition at line 48 of file Gauss2DsModel.h.

References theta.

Referenced by mappel::Gauss2DsModel::initial_theta_estimate(), mappel::Gauss2DsModel::pixel_grad(), mappel::←Gauss2DsModel::pixel_grad2(), mappel::Gauss2DsModel::pixel_hess(), mappel::Gauss2DsModel::pixel_hess_←update(), and mappel::Gauss2DsModel::pixel_model_value().

9.54.4.4 double mappel::Gauss2DsModel::Stencil::sigma_ratio () const [inline]

Definition at line 50 of file Gauss2DsModel.h.

References theta.

Referenced by mappel::Gauss2DsModel::initial_theta_estimate(), sigmaX(), and sigmaY().

9.54.4.5 double mappel::Gauss2DsModel::Stencil::sigmaX () const [inline]

Definition at line 51 of file Gauss2DsModel.h.

References mappel::Gauss2DsModel::min_sigma, and sigma_ratio().

Referenced by compute_derivatives(), mappel::Gauss2DsModel::pixel_grad2(), mappel::Gauss2DsModel::pixel_hess(), mappel::Gauss2DsModel::pixel_hess_update(), and Stencil().

9.54.4.6 double mappel::Gauss2DsModel::Stencil::sigmaY () const [inline]

Definition at line 52 of file Gauss2DsModel.h.

References mappel::Gauss2DsModel::min_sigma, operator<<, and sigma_ratio().

Referenced by compute_derivatives(), mappel::Gauss2DsModel::pixel_grad2(), mappel::Gauss2DsModel::pixel_hess(), mappel::Gauss2DsModel::pixel_hess_update(), and Stencil().

9.54.4.7 double mappel::Gauss2DsModel::Stencil::x () const [inline]

Definition at line 46 of file Gauss2DsModel.h.

References theta.

Referenced by Stencil().

9.54.4.8 `double mappel::Gauss2DsModel::Stencil::y () const [inline]`

Definition at line 47 of file Gauss2DsModel.h.

References theta.

Referenced by Stencil().

9.54.5 Friends And Related Function Documentation

9.54.5.1 `std::ostream& operator<< (std::ostream & out, const Gauss2DsModel::Stencil & s) [friend]`

Definition at line 314 of file Gauss2DsModel.cpp.

Referenced by sigmaY().

9.54.6 Member Data Documentation

9.54.6.1 `bool mappel::Gauss2DsModel::Stencil::derivatives_computed =false`

Definition at line 31 of file Gauss2DsModel.h.

Referenced by compute_derivatives(), and mappel::operator<<().

9.54.6.2 `VecT mappel::Gauss2DsModel::Stencil::dx`

Definition at line 36 of file Gauss2DsModel.h.

Referenced by compute_derivatives(), mappel::operator<<(), and Stencil().

9.54.6.3 `VecT mappel::Gauss2DsModel::Stencil::DX`

Definition at line 39 of file Gauss2DsModel.h.

Referenced by compute_derivatives(), mappel::operator<<(), mappel::Gauss2DsModel::pixel_grad(), mappel::Gauss2DsModel::pixel_hess(), and mappel::Gauss2DsModel::pixel_hess_update().

9.54.6.4 `VecT mappel::Gauss2DsModel::Stencil::DXS`

Definition at line 40 of file Gauss2DsModel.h.

Referenced by compute_derivatives(), mappel::operator<<(), mappel::Gauss2DsModel::pixel_grad(), mappel::Gauss2DsModel::pixel_grad2(), mappel::Gauss2DsModel::pixel_hess(), and mappel::Gauss2DsModel::pixel_hess_update().

9.54.6.5 VecT mappel::Gauss2DsModel::Stencil::DXS2

Definition at line 41 of file Gauss2DsModel.h.

Referenced by compute_derivatives(), mappel::operator<<(), mappel::Gauss2DsModel::pixel_grad2(), mappel::Gauss2DsModel::pixel_hess(), and mappel::Gauss2DsModel::pixel_hess_update().

9.54.6.6 VecT mappel::Gauss2DsModel::Stencil::DXSX

Definition at line 42 of file Gauss2DsModel.h.

Referenced by compute_derivatives(), mappel::operator<<(), mappel::Gauss2DsModel::pixel_hess(), and mappel::Gauss2DsModel::pixel_hess_update().

9.54.6.7 VecT mappel::Gauss2DsModel::Stencil::dy

Definition at line 36 of file Gauss2DsModel.h.

Referenced by compute_derivatives(), mappel::operator<<(), and Stencil().

9.54.6.8 VecT mappel::Gauss2DsModel::Stencil::DY

Definition at line 39 of file Gauss2DsModel.h.

Referenced by compute_derivatives(), mappel::operator<<(), mappel::Gauss2DsModel::pixel_grad(), mappel::Gauss2DsModel::pixel_hess(), and mappel::Gauss2DsModel::pixel_hess_update().

9.54.6.9 VecT mappel::Gauss2DsModel::Stencil::DYS

Definition at line 40 of file Gauss2DsModel.h.

Referenced by compute_derivatives(), mappel::operator<<(), mappel::Gauss2DsModel::pixel_grad(), mappel::Gauss2DsModel::pixel_grad2(), mappel::Gauss2DsModel::pixel_hess(), and mappel::Gauss2DsModel::pixel_hess_update().

9.54.6.10 VecT mappel::Gauss2DsModel::Stencil::DYS2

Definition at line 41 of file Gauss2DsModel.h.

Referenced by compute_derivatives(), mappel::operator<<(), mappel::Gauss2DsModel::pixel_grad2(), mappel::Gauss2DsModel::pixel_hess(), and mappel::Gauss2DsModel::pixel_hess_update().

9.54.6.11 VecT mappel::Gauss2DsModel::Stencil::DYSY

Definition at line 42 of file Gauss2DsModel.h.

Referenced by compute_derivatives(), mappel::operator<<(), mappel::Gauss2DsModel::pixel_hess(), and mappel::Gauss2DsModel::pixel_hess_update().

9.54.6.12 VecT mappel::Gauss2DsModel::Stencil::Gx

Definition at line 37 of file Gauss2DsModel.h.

Referenced by compute_derivatives(), and mappel::operator<<().

9.54.6.13 VecT mappel::Gauss2DsModel::Stencil::Gy

Definition at line 37 of file Gauss2DsModel.h.

Referenced by compute_derivatives(), and mappel::operator<<().

9.54.6.14 Gauss2DsModel const* mappel::Gauss2DsModel::Stencil::model

Definition at line 33 of file Gauss2DsModel.h.

Referenced by compute_derivatives(), and Stencil().

9.54.6.15 ParamT mappel::Gauss2DsModel::Stencil::theta

Definition at line 35 of file Gauss2DsModel.h.

Referenced by bg(), l(), mappel::operator<<(), sigma_ratio(), x(), and y().

9.54.6.16 VecT mappel::Gauss2DsModel::Stencil::X

Definition at line 38 of file Gauss2DsModel.h.

Referenced by mappel::operator<<(), mappel::Gauss2DsModel::pixel_grad(), mappel::Gauss2DsModel::pixel_grad2(), mappel::Gauss2DsModel::pixel_hess(), mappel::Gauss2DsModel::pixel_hess_update(), mappel::Gauss2DsModel::pixel_model_value(), and Stencil().

9.54.6.17 VecT mappel::Gauss2DsModel::Stencil::Y

Definition at line 38 of file Gauss2DsModel.h.

Referenced by mappel::operator<<(), mappel::Gauss2DsModel::pixel_grad(), mappel::Gauss2DsModel::pixel_grad2(), mappel::Gauss2DsModel::pixel_hess(), mappel::Gauss2DsModel::pixel_hess_update(), mappel::Gauss2DsModel::pixel_model_value(), and Stencil().

The documentation for this class was generated from the following files:

- [Gauss2DsModel.h](#)
- [Gauss2DsModel.cpp](#)

9.55 mappel::Gauss1DModel::Stencil Class Reference

[Stencil](#) for 1D fixed-sigma models.

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/Gauss1DModel.h>
```

Public Types

- using [ParamT](#) = [Gauss1DModel::ParamT](#)

Public Member Functions

- [Stencil](#) ()
- [Stencil](#) (const [Gauss1DModel](#) &[model](#), const [ParamT](#) &[theta](#), bool [compute_derivatives](#)=true)
- void [compute_derivatives](#) ()
- double [x](#) () const
- double [l](#) () const
- double [bg](#) () const

Public Attributes

- bool [derivatives_computed](#) = false
- [Gauss1DModel](#) const * [model](#)
- [ParamT](#) [theta](#)
- [VecT](#) [dx](#)
- [VecT](#) [Gx](#)
- [VecT](#) [X](#)
- [VecT](#) [DX](#)
- [VecT](#) [DXS](#)

Friends

- std::ostream & [operator<<](#) (std::ostream &out, const [Gauss1DModel::Stencil](#) &s)

9.55.1 Detailed Description

[Stencil](#) for 1D fixed-sigma models.

Definition at line 29 of file [Gauss1DModel.h](#).

9.55.2 Member Typedef Documentation

9.55.2.1 using mappel::Gauss1DModel::Stencil::ParamT = Gauss1DModel::ParamT

Definition at line 32 of file [Gauss1DModel.h](#).

9.55.3 Constructor & Destructor Documentation

9.55.3.1 `mappel::Gauss1DModel::Stencil::Stencil () [inline]`

Definition at line 41 of file Gauss1DModel.h.

References `compute_derivatives()`.

Referenced by `mappel::Gauss1DModel::make_stencil()`.

9.55.3.2 `mappel::Gauss1DModel::Stencil::Stencil (const Gauss1DModel & model, const ParamT & theta, bool compute_derivatives = true)`

Definition at line 142 of file Gauss1DModel.cpp.

References `compute_derivatives()`, `dx`, `mappel::make_d_stencil()`, `mappel::make_X_stencil()`, `model`, `mappel::Gauss1DModel::psf_sigma`, `mappel::ImageFormat1DBase::size`, `X`, and `x()`.

9.55.4 Member Function Documentation

9.55.4.1 `double mappel::Gauss1DModel::Stencil::bg () const [inline]`

Definition at line 46 of file Gauss1DModel.h.

References `operator<<`, and `theta`.

Referenced by `mappel::Gauss1DModel::initial_theta_estimate()`, and `mappel::Gauss1DModel::pixel_model_value()`.

9.55.4.2 `void mappel::Gauss1DModel::Stencil::compute_derivatives ()`

Definition at line 153 of file Gauss1DModel.cpp.

References `derivatives_computed`, `dx`, `DX`, `DXS`, `Gx`, `mappel::make_DX_stencil()`, `mappel::make_DXS_stencil()`, `mappel::make_G_stencil()`, `model`, `mappel::Gauss1DModel::psf_sigma`, and `mappel::ImageFormat1DBase::size`.

Referenced by `Stencil()`.

9.55.4.3 `double mappel::Gauss1DModel::Stencil::l () const [inline]`

Definition at line 45 of file Gauss1DModel.h.

References `theta`.

Referenced by `mappel::Gauss1DModel::initial_theta_estimate()`, `mappel::Gauss1DModel::pixel_grad()`, `mappel::Gauss1DModel::pixel_grad2()`, `mappel::Gauss1DModel::pixel_hess()`, `mappel::Gauss1DModel::pixel_hess_update()`, and `mappel::Gauss1DModel::pixel_model_value()`.

9.55.4.4 double mappel::Gauss1DModel::Stencil::x () const [inline]

Definition at line 44 of file Gauss1DModel.h.

References theta.

Referenced by Stencil().

9.55.5 Friends And Related Function Documentation

9.55.5.1 std::ostream& operator<< (std::ostream & out, const Gauss1DModel::Stencil & s) [friend]

Definition at line 164 of file Gauss1DModel.cpp.

Referenced by bg().

9.55.6 Member Data Documentation

9.55.6.1 bool mappel::Gauss1DModel::Stencil::derivatives_computed = false

Definition at line 31 of file Gauss1DModel.h.

Referenced by compute_derivatives(), and mappel::operator<<().

9.55.6.2 VecT mappel::Gauss1DModel::Stencil::dx

Definition at line 36 of file Gauss1DModel.h.

Referenced by compute_derivatives(), mappel::operator<<(), and Stencil().

9.55.6.3 VecT mappel::Gauss1DModel::Stencil::DX

Definition at line 39 of file Gauss1DModel.h.

Referenced by compute_derivatives(), mappel::operator<<(), mappel::Gauss1DModel::pixel_grad(), and mappel::Gauss1DModel::pixel_hess().

9.55.6.4 VecT mappel::Gauss1DModel::Stencil::DXS

Definition at line 40 of file Gauss1DModel.h.

Referenced by compute_derivatives(), mappel::operator<<(), mappel::Gauss1DModel::pixel_grad2(), mappel::Gauss1DModel::pixel_hess(), and mappel::Gauss1DModel::pixel_hess_update().

Public Member Functions

- [ThreadedEstimator](#) (const Model &model)
- void [estimate_max_stack](#) (const [ModelDataStackT](#)< Model > &data, const [ParamVecT](#)< Model > &theta_init, [MLEDataStack](#) &mle_data_stack) override
- void [estimate_profile_max](#) (const [ModelDataT](#)< Model > &data, const [ParamVecT](#)< Model > &theta_init, [ProfileLikelihoodData](#) &profile) override
- void [estimate_profile_bounds_parallel](#) (const [ModelDataT](#)< Model > &data, [ProfileBoundsData](#) &bounds_est) override
- void [estimate_profile_bounds_stack](#) (const [ModelDataStackT](#)< Model > &data, [ProfileBoundsDataStack](#) &bounds_est_stack) override
- [StatsT](#) [get_stats](#) ()
- [StatsT](#) [get_debug_stats](#) ()
- void [clear_stats](#) ()
- virtual std::string [name](#) () const =0
- const Model & [get_model](#) ()
- void [estimate_max](#) (const [ModelDataT](#)< Model > &data, const [ParamT](#)< Model > &theta_init, [MLEData](#) &mle_data, [StencilT](#)< Model > &mle_stencil)
- void [estimate_max](#) (const [ModelDataT](#)< Model > &data, const [ParamT](#)< Model > &theta_init, [MLEData](#) &mle_data)
- void [estimate_max](#) (const [ModelDataT](#)< Model > &data, [MLEData](#) &mle_data)
- void [estimate_max_debug](#) (const [ModelDataT](#)< Model > &data, const [ParamT](#)< Model > &theta_init, [MLEDebugData](#) &mle_data, [StencilT](#)< Model > &mle_stencil)
- void [estimate_max_debug](#) (const [ModelDataT](#)< Model > &data, const [ParamT](#)< Model > &theta_init, [MLEDebugData](#) &mle_data)
- void [estimate_max_stack](#) (const [ModelDataStackT](#)< Model > &data_stack, [MLEDataStack](#) &mle_data_stack)
- double [estimate_profile_max](#) (const [ModelDataT](#)< Model > &data, const [IdxVecT](#) &fixed_idx, const [ParamT](#)< Model > &fixed_theta_init, [StencilT](#)< Model > &theta_max)
- void [estimate_profile_bounds](#) (const [ModelDataT](#)< Model > &data, [ProfileBoundsData](#) &bounds_est)
- void [estimate_profile_bounds_debug](#) (const [ModelDataT](#)< Model > &data, [ProfileBoundsDebugData](#) &bounds_est)
- [IdxVecT](#) [get_exit_counts](#) () const

Protected Member Functions

- void [record_exit_code](#) (ExitCode code) override
- virtual void [compute_estimate](#) (const [ModelDataT](#)< Model > &data, const [ParamT](#)< Model > &theta_init, [MLEData](#) &mle_data, [StencilT](#)< Model > &mle_stencil)=0
- virtual void [compute_estimate_debug](#) (const [ModelDataT](#)< Model > &data, const [ParamT](#)< Model > &theta_init, [MLEDebugData](#) &mle_data, [StencilT](#)< Model > &mle_stencil)
- virtual double [compute_profile_estimate](#) (const [ModelDataT](#)< Model > &data, const [ParamT](#)< Model > &theta_init, const [IdxVecT](#) &fixed_idx, [StencilT](#)< Model > &max_stencil)
- virtual void [compute_profile_bound](#) (const [ModelDataT](#)< Model > &data, [ProfileBoundsData](#) &est, const [VecT](#) &init_step, [IdxT](#) param_idx, [IdxT](#) which_bound)
- virtual void [compute_profile_bound_debug](#) (const [ModelDataT](#)< Model > &data, [ProfileBoundsDebugData](#) &est)
- void [record_walltime](#) (ClockT::time_point start_walltime, int num_estimations)

Protected Attributes

- int [max_threads](#)
- int [num_threads](#)
- std::mutex [mtx](#)
- const Model & [model](#)
- int [num_estimations](#) = 0
- double [total_walltime](#) = 0.
- [IdxVecT](#) [exit_counts](#)

9.56.1 Detailed Description

```
template<class Model>
class mappel::estimator::ThreadedEstimator< Model >
```

We avoid combining [Estimator](#) and [ThreadedEstimator](#) classes so that a future GPU implementation can inherit directly from [Estimator](#) as it will present a different method for `estimate_stack` pure virtual member function. For now all other (CPU) estimators inherit from [ThreadedEstimator](#).

Definition at line 309 of file `estimator.h`.

9.56.2 Constructor & Destructor Documentation

9.56.2.1 `template<class Model > mappel::estimator::ThreadedEstimator< Model >::ThreadedEstimator (const Model & model)`

Definition at line 370 of file `estimator_impl.h`.

9.56.3 Member Function Documentation

9.56.3.1 `template<class Model > void mappel::estimator::ThreadedEstimator< Model >::clear_stats () [virtual]`

Run statistics.

Reimplemented from [mappel::estimator::Estimator< Model >](#).

Reimplemented in [mappel::estimator::IterativeMaximizer< Model >](#).

Definition at line 570 of file `estimator_impl.h`.

References [mappel::estimator::Estimator< Model >::clear_stats\(\)](#), [mappel::estimator::ThreadedEstimator< Model >::mtx](#), and [mappel::estimator::ThreadedEstimator< Model >::num_threads](#).

Referenced by [mappel::estimator::IterativeMaximizer< Model >::clear_stats\(\)](#).

9.56.3.2 `template<class Model > virtual void mappel::estimator::Estimator< Model >::compute_estimate (const ModelDataT< Model > & data, const ParamT< Model > & theta_init, MLEData & mle_data, StencilT< Model > & mle_stencil)` [protected], [pure virtual], [inherited]

Implemented in [mappel::estimator::IterativeMaximizer< Model >](#).

Referenced by `mappel::estimator::Estimator< Model >::compute_estimate_debug()`, `mappel::estimator::Estimator< Model >::estimate_max()`, and `mappel::estimator::ThreadedEstimator< Model >::estimate_max_stack()`.

9.56.3.3 `template<class Model > void mappel::estimator::Estimator< Model >::compute_estimate_debug (const ModelDataT< Model > & im, const ParamT< Model > & theta_init, MLEDebugData & mle_debug, StencilT< Model > & mle_stencil)` [protected], [virtual], [inherited]

Virtual `estimate_debug` interface

Estimators that produce a sequence of results (e.g. `IterativeEstimators`) can override this dummy debug implementation.

Reimplemented in [mappel::estimator::IterativeMaximizer< Model >](#).

Definition at line 285 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::compute_estimate()`, `mappel::estimator::Estimator< Model >::model`, `mappel::estimator::MLEData::obsI`, `mappel::estimator::MLEDebugData::obsI`, `mappel::estimator::MLEData::rllh`, `mappel::estimator::MLEDebugData::rllh`, `mappel::estimator::MLEDebugData::sequence`, `mappel::estimator::MLEDebugData::sequence_rllh`, `mappel::estimator::MLEData::theta`, and `mappel::estimator::MLEDebugData::theta`.

Referenced by `mappel::estimator::Estimator< Model >::estimate_max_debug()`.

9.56.3.4 `template<class Model > void mappel::estimator::Estimator< Model >::compute_profile_bound (const ModelDataT< Model > & data, ProfileBoundsData & est, const VecT & init_step, IdxT param_idx, IdxT which_bound)` [protected], [virtual], [inherited]

Reimplemented in [mappel::estimator::IterativeMaximizer< Model >](#).

Definition at line 309 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::model`.

Referenced by `mappel::estimator::Estimator< Model >::estimate_profile_bounds()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel()`, and `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack()`.

9.56.3.5 `template<class Model > void mappel::estimator::Estimator< Model >::compute_profile_bound_debug (const ModelDataT< Model > & data, ProfileBoundsDebugData & est)` [protected], [virtual], [inherited]

Reimplemented in [mappel::estimator::IterativeMaximizer< Model >](#).

Definition at line 318 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::model`.

Referenced by `mappel::estimator::Estimator< Model >::estimate_profile_bounds_debug()`.

9.56.3.6 `template<class Model> double mappel::estimator::Estimator< Model>::compute_profile_estimate (const ModelDataT< Model> & data, const ParamT< Model> & theta_init, const IdxVecT & fixed_idx, StencilT< Model> & max_stencil)` [protected], [virtual], [inherited]

Reimplemented in [mappel::estimator::IterativeMaximizer< Model>](#).

Definition at line 300 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model>::model`.

Referenced by `mappel::estimator::Estimator< Model>::estimate_profile_max()`, and `mappel::estimator::ThreadedEstimator< Model>::estimate_profile_max()`.

9.56.3.7 `template<class Model> void mappel::estimator::Estimator< Model>::estimate_max (const ModelDataT< Model> & data, const ParamT< Model> & theta_init, MLEData & mle_data, StencilT< Model> & mle_stencil)` [inherited]

Maximum likelihood point estimators Estimate for a single data starting at `theta_init`, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with `theta_init`, `theta_init` is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of `theta_init` will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 128 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model>::compute_estimate()`, `mappel::estimator::Error`, `mappel::estimator::MLEData::obsI`, `mappel::print_text_image()`, `mappel::estimator::Estimator< Model>::record_exit_code()`, `mappel::estimator::Estimator< Model>::record_walltime()`, `mappel::estimator::MLEData::rllh`, and `mappel::estimator::MLEData::theta`.

Referenced by `mappel::estimator::Estimator< Model>::estimate_max()`.

9.56.3.8 `template<class Model> void mappel::estimator::Estimator< Model>::estimate_max (const ModelDataT< Model> & data, const ParamT< Model> & theta_init, MLEData & mle_data)` [inherited]

Maximum likelihood point estimators Estimate for a single data starting at `theta_init`, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with `theta_init`, `theta_init` is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of `theta_init` will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 121 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model >::estimate_max()`.

9.56.3.9 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max (const ModelDataT< Model > & data, MLEData & mle_data) [inherited]`

Maximum likelihood point estimators Estimate for a single data starting at `theta_init`, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with `theta_init`, `theta_init` is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of `theta_init` will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 112 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model >::estimate_max()`, and `mappel::estimator::Estimator< Model >::model`.

9.56.3.10 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max_debug (const ModelDataT< Model > & data, const ParamT< Model > & theta_init, MLEDebugData & mle_data, StencilT< Model > & mle_stencil) [inherited]`

Debug estimation for a single data starting at `theta_init`, fill in the [MLEDebugData](#) struct with data including the sequence of evaluated points. Estimation is initialized with `theta_init`, `theta_init` is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of `theta_init` will not be modified in the initialization process.

The sequence and `sequence_rllh` parameters of the [MLEDebugData](#) struct record the entire sequence of evaluated points including `theta_init` and `theta_mle`, which should be first and last respectively.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	Initial theta value.
out	<i>mle_data</i>	MLEDebugData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

9.56.3.11 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max_debug (const ModelDataT< Model > & data, const ParamT< Model > & theta_init, MLEDebugData & mle_data) [inherited]`

Maximum likelihood point estimators Estimate for a single data starting at *theta_init*, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with *theta_init*, *theta_init* is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of *theta_init* will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 157 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::compute_estimate_debug()`, `mappel::estimator::Error`, `mappel::estimator::MLEDebugData::obsI`, `mappel::print_text_image()`, `mappel::estimator::Estimator< Model >::record_exit_code()`, `mappel::estimator::Estimator< Model >::record_walltime()`, `mappel::estimator::MLEDebugData::rllh`, and `mappel::estimator::MLEDebugData::theta`.

9.56.3.12 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max_stack (const ModelDataStackT< Model > & data_stack, MLEDataStack & mle_data_stack) [inherited]`

Maximum likelihood point estimators Estimate for a single data starting at *theta_init*, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with *theta_init*, *theta_init* is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of *theta_init* will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 183 of file estimator_impl.h.

References [mappel::estimator::Estimator< Model >::estimate_max_stack\(\)](#), and [mappel::estimator::Estimator< Model >::model](#).

9.56.3.13 `template<class Model > void mappel::estimator::ThreadedEstimator< Model >::estimate_max_stack (const ModelDataStackT< Model > & data_stack, const ParamVecT< Model > & theta_init_stack, MLEDataStack & mle_data_stack) [override], [virtual]`

Estimate for a stack of data and fill in the [MLEDataStack](#) struct with the estimated parameter, RLLH, and observed information for each data in parallel. Estimation is initialized with `theta_init`, `theta_init` is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of `theta_init` will not be modified in the initialization process.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[optional] Initial theta value for each image.
out	<i>mle</i>	MLEStackData records the maximum likelihood estimate, RLLH, and Observed information for each data

Implements [mappel::estimator::Estimator< Model >](#).

Definition at line 377 of file estimator_impl.h.

References [mappel::estimator::Estimator< Model >::compute_estimate\(\)](#), [mappel::estimator::Error](#), [mappel::estimator::Estimator< Model >::model](#), [mappel::estimator::MLEDataStack::Ndata](#), [mappel::estimator::ThreadedEstimator< Model >::num_threads](#), [mappel::estimator::MLEData::obsI](#), [mappel::estimator::MLEDataStack::obsI](#), [mappel::print_text_image\(\)](#), [mappel::estimator::ThreadedEstimator< Model >::record_exit_code\(\)](#), [mappel::estimator::Estimator< Model >::record_walltime\(\)](#), [mappel::estimator::MLEData::rllh](#), [mappel::estimator::MLEDataStack::rllh](#), [mappel::estimator::MLEData::theta](#), and [mappel::estimator::MLEDataStack::theta](#).

9.56.3.14 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_profile_bounds (const ModelDataT< Model > & data, ProfileBoundsData & bounds_est) [inherited]`

Profile likelihood bounds computations with VM algorithm

Definition at line 220 of file estimator_impl.h.

References [mappel::estimator::Estimator< Model >::compute_profile_bound\(\)](#), [mappel::estimator::Error](#), [mappel::estimator::ProfileBoundsData::estimated_idxxs](#), [mappel::estimator::ProfileBoundsData::initialize_arrays\(\)](#), [mappel::estimator::ProfileBoundsData::mle](#), [mappel::estimator::Estimator< Model >::model](#), [mappel::estimator::ProfileBoundsData::Nparams_est](#), [mappel::estimator::MLEData::obsI](#), [mappel::print_text_image\(\)](#), [mappel::estimator::ProfileBoundsData::profile_lb](#), [mappel::estimator::ProfileBoundsData::profile_points_lb](#), [mappel::estimator::ProfileBoundsData::profile_points_lb_rllh](#), [mappel::estimator::ProfileBoundsData::profile_points_ub](#), [mappel::estimator::ProfileBoundsData::profile_ub](#), [mappel::estimator::Estimator< Model >::record_exit_code\(\)](#), [mappel::estimator::Estimator< Model >::record_walltime\(\)](#), [mappel::estimator::subroutine::solve_profile_initial_step\(\)](#), [mappel::estimator::ProfileBoundsData::target_rllh_delta](#), and [mappel::estimator::MLEData::theta](#).

Referenced by [mappel::methods::error_bounds_profile_likelihood\(\)](#).

9.56.3.15 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_profile_bounds_debug (const ModelDataT< Model > & data, ProfileBoundsDebugData & bounds_est)` [inherited]

Profile likelihood bounds computations with VM algorithm

Definition at line 258 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model >::compute_profile_bound_debug()`, `mappel::estimator::Error`, `mappel::estimator::ProfileBoundsDebugData::estimated_idx`, `mappel::estimator::ProfileBoundsDebugData::mle`, `mappel::print_text_image()`, `mappel::estimator::Estimator< Model >::record_exit_code()`, `mappel::estimator::Estimator< Model >::record_walltime()`, `mappel::estimator::ProfileBoundsDebugData::target_rllh_delta`, and `mappel::estimator::MLEData::theta`.

Referenced by `mappel::methods::debug::error_bounds_profile_likelihood_debug()`.

9.56.3.16 `template<class Model > void mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel (const ModelDataT< Model > & data, ProfileBoundsData & bounds_est)` [override], [virtual]

Profile likelihood bounds computations with VM algorithm

Implements [mappel::estimator::Estimator< Model >](#).

Definition at line 464 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model >::compute_profile_bound()`, `mappel::estimator::Error`, `mappel::estimator::ProfileBoundsData::estimated_idx`s, `mappel::estimator::ProfileBoundsData::initialize_arrays()`, `mappel::estimator::ProfileBoundsData::mle`, `mappel::estimator::Estimator< Model >::model`, `mappel::estimator::ProfileBoundsData::Nparams_est`, `mappel::estimator::ThreadedEstimator< Model >::num_threads`, `mappel::estimator::MLEData::obs`, `mappel::print_text_image()`, `mappel::estimator::ThreadedEstimator< Model >::record_exit_code()`, `mappel::estimator::Estimator< Model >::record_walltime()`, `mappel::estimator::subroutine::solve_profile_initial_step()`, `mappel::estimator::ProfileBoundsData::target_rllh_delta`, and `mappel::estimator::MLEData::theta`.

Referenced by `mappel::methods::openmp::error_bounds_profile_likelihood_parallel()`.

9.56.3.17 `template<class Model > void mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack (const ModelDataStackT< Model > & data_stack, ProfileBoundsDataStack & bounds_est)` [override], [virtual]

Profile likelihood bounds computations with VM algorithm

Implements [mappel::estimator::Estimator< Model >](#).

Definition at line 500 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model >::compute_profile_bound()`, `mappel::estimator::Error`, `mappel::estimator::ProfileBoundsData::estimated_idx`s, `mappel::estimator::ProfileBoundsDataStack::estimated_idx`s, `mappel::estimator::ProfileBoundsData::initialize_arrays()`, and `mappel::estimator::ProfileBoundsDataStack::initialize_arrays()`.

mappel::estimator::ProfileBoundsData::mle, mappel::estimator::ProfileBoundsDataStack::mle, mappel::estimator::Estimator< Model >::model, mappel::estimator::ProfileBoundsDataStack::Ndata, mappel::estimator::ProfileBoundsDataStack::Nparams_est, mappel::estimator::ThreadedEstimator< Model >::num_threads, mappel::estimator::MLEData::obsI, mappel::estimator::MLEDataStack::obsI, mappel::print_text_image(), mappel::estimator::ProfileBoundsData::profile_lb, mappel::estimator::ProfileBoundsDataStack::profile_lb, mappel::estimator::ProfileBoundsData::profile_points_lb, mappel::estimator::ProfileBoundsDataStack::profile_points_lb, mappel::estimator::ProfileBoundsData::profile_points_lb_rllh, mappel::estimator::ProfileBoundsDataStack::profile_points_lb_rllh, mappel::estimator::ProfileBoundsData::profile_points_ub, mappel::estimator::ProfileBoundsDataStack::profile_points_ub, mappel::estimator::ProfileBoundsData::profile_points_ub_rllh, mappel::estimator::ProfileBoundsDataStack::profile_points_ub_rllh, mappel::estimator::ProfileBoundsData::profile_ub, mappel::estimator::ProfileBoundsDataStack::profile_ub, mappel::estimator::ThreadedEstimator< Model >::record_exit_code(), mappel::estimator::Estimator< Model >::record_walltime(), mappel::estimator::MLEData::rllh, mappel::estimator::MLEDataStack::rllh, mappel::estimator::subroutine::solve_profile_initial_step(), mappel::estimator::ProfileBoundsData::target_rllh_delta, mappel::estimator::ProfileBoundsDataStack::target_rllh_delta, mappel::estimator::MLEData::theta, and mappel::estimator::MLEDataStack::theta.

Referenced by mappel::methods::openmp::error_bounds_profile_likelihood_stack().

9.56.3.18 `template<class Model> double mappel::estimator::Estimator< Model >::estimate_profile_max (const ModelDataT< Model > & data, const IdxVecT & fixed_idx, const ParamT< Model > & fixed_theta_init, StencilT< Model > & theta_max) [inherited]`

Profile likelihood estimation methods

Definition at line 190 of file estimator_impl.h.

References mappel::estimator::Estimator< Model >::compute_profile_estimate(), mappel::estimator::Error, mappel::print_text_image(), mappel::estimator::Estimator< Model >::record_exit_code(), mappel::estimator::Estimator< Model >::record_walltime(), and mappel::methods::objective::rllh().

9.56.3.19 `template<class Model> void mappel::estimator::ThreadedEstimator< Model >::estimate_profile_max (const ModelDataT< Model > & data, const ParamVecT< Model > & fixed_theta_init, ProfileLikelihoodData & profile) [override],[virtual]`

Profile likelihood estimation methods

Implements [mappel::estimator::Estimator< Model >](#).

Definition at line 418 of file estimator_impl.h.

References mappel::estimator::Estimator< Model >::compute_profile_estimate(), mappel::estimator::Error, mappel::estimator::ProfileLikelihoodData::fixed_idx, mappel::estimator::ProfileLikelihoodData::fixed_values, mappel::estimator::Estimator< Model >::model, mappel::estimator::ProfileLikelihoodData::Nfixed, mappel::estimator::ThreadedEstimator< Model >::num_threads, mappel::estimator::ProfileLikelihoodData::Nvalues, mappel::print_text_image(), mappel::estimator::ProfileLikelihoodData::profile_likelihood, mappel::estimator::ProfileLikelihoodData::profile_parameters, mappel::estimator::ThreadedEstimator< Model >::record_exit_code(), and mappel::estimator::Estimator< Model >::record_walltime().

9.56.3.20 `template<class Model> StatsT mappel::estimator::ThreadedEstimator< Model>::get_debug_stats ()`
`[virtual]`

Run statistics.

Implements [mappel::estimator::Estimator< Model>](#).

Reimplemented in [mappel::estimator::IterativeMaximizer< Model>](#), [mappel::estimator::SimulatedAnnealingMaximizer< Model>](#), [mappel::estimator::CGaussMLE< Model>](#), [mappel::estimator::CGaussHeuristicEstimator< Model>](#), and [mappel::estimator::HeuristicEstimator< Model>](#).

Definition at line 564 of file `estimator_impl.h`.

References [mappel::estimator::ThreadedEstimator< Model>::get_stats\(\)](#).

9.56.3.21 `template<class Model> IdxVecT mappel::estimator::Estimator< Model>::get_exit_counts () const`
`[inline],[inherited]`

Run statistics.

Definition at line 274 of file `estimator.h`.

Referenced by [mappel::estimator::IterativeMaximizer< Model>::local_profile_maximize\(\)](#).

9.56.3.22 `template<class Model> const Model & mappel::estimator::Estimator< Model>::get_model ()`
`[inherited]`

Definition at line 108 of file `estimator_impl.h`.

References [mappel::estimator::Estimator< Model>::model](#).

9.56.3.23 `template<class Model> StatsT mappel::estimator::ThreadedEstimator< Model>::get_stats ()`
`[virtual]`

Run statistics.

Reimplemented from [mappel::estimator::Estimator< Model>](#).

Reimplemented in [mappel::estimator::IterativeMaximizer< Model>](#), [mappel::estimator::SimulatedAnnealingMaximizer< Model>](#), [mappel::estimator::CGaussMLE< Model>](#), [mappel::estimator::CGaussHeuristicEstimator< Model>](#), and [mappel::estimator::HeuristicEstimator< Model>](#).

Definition at line 553 of file `estimator_impl.h`.

References [mappel::estimator::Estimator< Model>::get_stats\(\)](#), [mappel::estimator::ThreadedEstimator< Model>::mtx](#), [mappel::estimator::Estimator< Model>::num_estimations](#), [mappel::estimator::ThreadedEstimator< Model>::num_threads](#), and [mappel::estimator::Estimator< Model>::total_walltime](#).

Referenced by [mappel::estimator::ThreadedEstimator< Model>::get_debug_stats\(\)](#), [mappel::estimator::HeuristicEstimator< Model>::get_debug_stats\(\)](#), [mappel::estimator::CGaussHeuristicEstimator< Model>::get_debug_stats\(\)](#), [mappel::estimator::CGaussMLE< Model>::get_debug_stats\(\)](#), [mappel::estimator::HeuristicEstimator< Model>::get_stats\(\)](#), [mappel::estimator::CGaussHeuristicEstimator< Model>::get_stats\(\)](#), [mappel::estimator::CGaussMLE< Model>::get_stats\(\)](#), [mappel::estimator::SimulatedAnnealingMaximizer< Model>::get_stats\(\)](#), and [mappel::estimator::IterativeMaximizer< Model>::get_stats\(\)](#).

9.56.3.24 `template<class Model > virtual std::string mappel::estimator::Estimator< Model >::name () const` [pure virtual],[inherited]

Implemented in [mappel::estimator::TrustRegionMaximizer< Model >](#), [mappel::estimator::QuasiNewtonMaximizer< Model >](#), [mappel::estimator::NewtonMaximizer< Model >](#), [mappel::estimator::NewtonDiagonalMaximizer< Model >](#), [mappel::estimator::SimulatedAnnealingMaximizer< Model >](#), [mappel::estimator::CGaussMLE< Model >](#), [mappel::estimator::CGaussHeuristicEstimator< Model >](#), and [mappel::estimator::HeuristicEstimator< Model >](#).

Referenced by [mappel::estimator::IterativeMaximizer< Model >::solve_profile_bound\(\)](#).

9.56.3.25 `template<class Model > void mappel::estimator::ThreadedEstimator< Model >::record_exit_code (ExitCode code)` [override],[protected],[virtual]

Implements [mappel::estimator::Estimator< Model >](#).

Definition at line 578 of file `estimator_impl.h`.

References [mappel::estimator::Estimator< Model >::exit_counts](#), [mappel::estimator::Estimator< Model >::model](#), [mappel::estimator::ThreadedEstimator< Model >::mtx](#), [mappel::methods::observed_information\(\)](#), [mappel::estimator::MLEData::obsI](#), [mappel::estimator::MLEData::rllh](#), [mappel::methods::objective::rllh\(\)](#), [mappel::estimator::Success](#), and [mappel::estimator::MLEData::theta](#).

Referenced by [mappel::estimator::IterativeMaximizer< Model >::backtrack\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::convergence_test_grad_ratio\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::convergence_test_step_size\(\)](#), [mappel::estimator::ThreadedEstimator< Model >::estimate_max_stack\(\)](#), [mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel\(\)](#), [mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack\(\)](#), [mappel::estimator::ThreadedEstimator< Model >::estimate_profile_max\(\)](#), [mappel::estimator::HeuristicEstimator< Model >::get_debug_stats\(\)](#), [mappel::estimator::CGaussMLE< Model >::get_debug_stats\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize\(\)](#), and [mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack\(\)](#).

9.56.3.26 `template<class Model > void mappel::estimator::Estimator< Model >::record_walltime (ClockT::time_point start_walltime, int num_estimations)` [protected],[inherited]

Definition at line 360 of file `estimator_impl.h`.

References [mappel::estimator::Estimator< Model >::num_estimations](#), and [mappel::estimator::Estimator< Model >::total_walltime](#).

Referenced by [mappel::estimator::Estimator< Model >::estimate_max\(\)](#), [mappel::estimator::Estimator< Model >::estimate_max_debug\(\)](#), [mappel::estimator::ThreadedEstimator< Model >::estimate_max_stack\(\)](#), [mappel::estimator::Estimator< Model >::estimate_profile_bounds\(\)](#), [mappel::estimator::Estimator< Model >::estimate_profile_bounds_debug\(\)](#), [mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel\(\)](#), [mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack\(\)](#), [mappel::estimator::Estimator< Model >::estimate_profile_max\(\)](#), and [mappel::estimator::ThreadedEstimator< Model >::estimate_profile_max\(\)](#).

9.56.4 Member Data Documentation

9.56.4.1 `template<class Model > IdxVecT mappel::estimator::Estimator< Model >::exit_counts` [protected],[inherited]

Definition at line 299 of file `estimator.h`.

Referenced by [mappel::estimator::Estimator< Model >::clear_stats\(\)](#), [mappel::estimator::Estimator< Model >::get_stats\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize\(\)](#), and [mappel::estimator::ThreadedEstimator< Model >::record_exit_code\(\)](#).

9.56.4.2 `template<class Model> int mappel::estimator::ThreadedEstimator< Model>::max_threads` [protected]

Definition at line 324 of file estimator.h.

9.56.4.3 `template<class Model> const Model& mappel::estimator::Estimator< Model>::model` [protected],
[inherited]

Definition at line 294 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model>::backtrack()`, `mappel::estimator::IterativeMaximizer< Model>::compute_estimate()`, `mappel::estimator::Estimator< Model>::compute_estimate_debug()`, `mappel::estimator::IterativeMaximizer< Model>::compute_estimate_debug()`, `mappel::estimator::Estimator< Model>::compute_profile_bound()`, `mappel::estimator::IterativeMaximizer< Model>::compute_profile_bound()`, `mappel::estimator::Estimator< Model>::compute_profile_bound_debug()`, `mappel::estimator::IterativeMaximizer< Model>::compute_profile_bound_debug()`, `mappel::estimator::Estimator< Model>::compute_profile_estimate()`, `mappel::estimator::IterativeMaximizer< Model>::compute_profile_estimate()`, `mappel::estimator::Estimator< Model>::estimate_max()`, `mappel::estimator::Estimator< Model>::estimate_max_stack()`, `mappel::estimator::ThreadedEstimator< Model>::estimate_max_stack()`, `mappel::estimator::Estimator< Model>::estimate_profile_bounds()`, `mappel::estimator::ThreadedEstimator< Model>::estimate_profile_bounds_parallel()`, `mappel::estimator::ThreadedEstimator< Model>::estimate_profile_bounds_stack()`, `mappel::estimator::ThreadedEstimator< Model>::estimate_profile_max()`, `mappel::estimator::HeuristicEstimator< Model>::get_debug_stats()`, `mappel::estimator::CGaussMLE< Model>::get_debug_stats()`, `mappel::estimator::Estimator< Model>::get_model()`, `mappel::estimator::IterativeMaximizer< Model>::local_maximize()`, `mappel::estimator::IterativeMaximizer< Model>::local_profile_maximize()`, `mappel::estimator::IterativeMaximizer< Model>::profile_bound_backtrack()`, and `mappel::estimator::ThreadedEstimator< Model>::record_exit_code()`.

9.56.4.4 `template<class Model> std::mutex mappel::estimator::ThreadedEstimator< Model>::mtx` [protected]

Definition at line 326 of file estimator.h.

Referenced by `mappel::estimator::ThreadedEstimator< Model>::clear_stats()`, `mappel::estimator::IterativeMaximizer< Model>::clear_stats()`, `mappel::estimator::ThreadedEstimator< Model>::get_stats()`, `mappel::estimator::HeuristicEstimator< Model>::get_stats()`, `mappel::estimator::CGaussHeuristicEstimator< Model>::get_stats()`, `mappel::estimator::CGaussMLE< Model>::get_stats()`, `mappel::estimator::SimulatedAnnealingMaximizer< Model>::get_stats()`, `mappel::estimator::IterativeMaximizer< Model>::get_stats()`, `mappel::estimator::IterativeMaximizer< Model>::local_profile_maximize()`, `mappel::estimator::ThreadedEstimator< Model>::record_exit_code()`, and `mappel::estimator::IterativeMaximizer< Model>::record_run_statistics()`.

9.56.4.5 `template<class Model> int mappel::estimator::Estimator< Model>::num_estimations = 0` [protected],
[inherited]

Definition at line 297 of file estimator.h.

Referenced by `mappel::estimator::Estimator< Model>::clear_stats()`, `mappel::estimator::Estimator< Model>::get_stats()`, `mappel::estimator::ThreadedEstimator< Model>::get_stats()`, `mappel::estimator::HeuristicEstimator< Model>::get_stats()`, `mappel::estimator::CGaussHeuristicEstimator< Model>::get_stats()`, `mappel::estimator::CGaussMLE< Model>::get_stats()`, `mappel::estimator::SimulatedAnnealingMaximizer< Model>::get_stats()`, `mappel::estimator::IterativeMaximizer< Model>::get_stats()`, and `mappel::estimator::Estimator< Model>::record_walltime()`.

9.56.4.6 `template<class Model> int mappel::estimator::ThreadedEstimator< Model >::num_threads` `[protected]`

Definition at line 325 of file estimator.h.

Referenced by `mappel::estimator::ThreadedEstimator< Model >::clear_stats()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_max_stack()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_max()`, and `mappel::estimator::ThreadedEstimator< Model >::get_stats()`.

9.56.4.7 `template<class Model> double mappel::estimator::Estimator< Model >::total_walltime = 0.` `[protected]`, `[inherited]`

Definition at line 298 of file estimator.h.

Referenced by `mappel::estimator::Estimator< Model >::clear_stats()`, `mappel::estimator::Estimator< Model >::get_stats()`, `mappel::estimator::ThreadedEstimator< Model >::get_stats()`, and `mappel::estimator::Estimator< Model >::record_walltime()`.


The documentation for this class was generated from the following files:

- [estimator.h](#)
- [estimator_impl.h](#)

9.57 mappel::estimator::TrustRegionMaximizer< Model > Class Template Reference

```
#include </home/travis/build/markjolah/Mappel/include/Mappel/estimator.h>
```

Inheritance diagram for `mappel::estimator::TrustRegionMaximizer< Model >`:

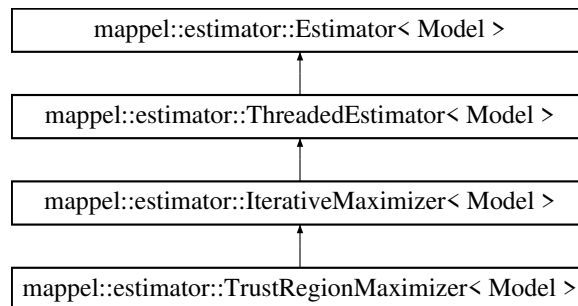

Public Types

- using `MaximizerData` = typename `IterativeMaximizer< Model >::MaximizerData`

Public Member Functions

- [TrustRegionMaximizer](#) (const Model &model, int max_iterations=IterativeMaximizer< Model >::DefaultIterations)
 - std::string name () const
 - double mean_iterations ()
 - double mean_backtracks ()
 - double mean_fun_evals ()
 - double mean_der_evals ()
 - StatsT get_stats ()
 - StatsT get_debug_stats ()
 - void clear_stats ()
 - int get_total_iterations () const
 - int get_total_backtracks () const
 - int get_total_fun_evals () const
 - int get_total_der_evals () const
 - void local_maximize (const ModelDataT< Model > &im, StencilT< Model > &stencil, MLEData &data)
 - Perform a local maximization to finish off a simulated annealing run.*
 - void local_maximize (const ModelDataT< Model > &im, StencilT< Model > &stencil, MLEDebugData &debug←_data)
 - void local_profile_maximize (const ModelDataT< Model > &im, const IdxVecT &fixed_param_idx, StencilT< Model > &stencil, MLEDebugData &mle)
 - void estimate_max_stack (const ModelDataStackT< Model > &data, const ParamVecT< Model > &theta_init←_stack, MLEDataStack &mle_data_stack) override
 - void estimate_profile_max (const ModelDataT< Model > &data, const ParamVecT< Model > &theta_init, ProfileLikelihoodData &profile) override
 - void estimate_profile_bounds_parallel (const ModelDataT< Model > &data, ProfileBoundsData &bounds_est) override
 - void estimate_profile_bounds_stack (const ModelDataStackT< Model > &data, ProfileBoundsDataStack &bounds_est_stack) override
 - const Model & get_model ()
-
- void estimate_max_stack (const ModelDataStackT< Model > &data_stack, MLEDataStack &mle_data_stack)
 - void estimate_max (const ModelDataT< Model > &data, const ParamT< Model > &theta_init, MLEData &mle←_data, StencilT< Model > &mle_stencil)
 - void estimate_max (const ModelDataT< Model > &data, const ParamT< Model > &theta_init, MLEData &mle←_data)
 - void estimate_max (const ModelDataT< Model > &data, MLEData &mle_data)
 - void estimate_max_debug (const ModelDataT< Model > &data, const ParamT< Model > &theta_init, MLE←_DebugData &mle_data, StencilT< Model > &mle_stencil)
 - void estimate_max_debug (const ModelDataT< Model > &data, const ParamT< Model > &theta_init, MLE←_DebugData &mle_data)
-
- double estimate_profile_max (const ModelDataT< Model > &data, const IdxVecT &fixed_idx, const ParamT< Model > &fixed_theta_init, StencilT< Model > &theta_max)
-
- void estimate_profile_bounds (const ModelDataT< Model > &data, ProfileBoundsData &bounds_est)
 - void estimate_profile_bounds_debug (const ModelDataT< Model > &data, ProfileBoundsDebugData &bounds←_est)
-
- IdxVecT get_exit_counts () const

Static Public Attributes

- static const double [rho_cauchy_min](#) = 0.1
Minimum acceptable rho for cauchy point: Coleman beta / Bellavia beta_1.
- static const double [rho_obj_min](#) = 0.25
Minimum acceptable rho: Coleman mu / Bellavia beta_2.
- static const double [rho_obj_opt](#) = 0.75
Optimal step rho: Coleman eta / Bellavia beta_2.
- static const double [trust_radius_decrease_min](#) = 0.125
Smallest allowable trust radius decrease ratio: Coleman gamma_0 / Bellavia alpha_1.
- static const double [trust_radius_decrease](#) = 0.25
Trust radius decrease ratio to step size: Coleman gamma_1 / Bellavia alpha_2.
- static const double [trust_radius_increase](#) = 2
Trust radius increase ratio: Coleman gamma_2 / Bellavia alpha_3.
- static const double [convergence_min_trust_radius](#) = 1.0e-8
Convergence criteria: Minimum trust region radius.
- static const int [DefaultIterations](#) = 100

Protected Member Functions

- void [record_run_statistics](#) (const [MaximizerData](#) &data)
- void [compute_estimate](#) (const [ModelDataT](#)< Model > &data, const [ParamT](#)< Model > &theta_init, [MLEData](#) &mle_data, [StencilT](#)< Model > &mle_stencil) override
- void [compute_estimate_debug](#) (const [ModelDataT](#)< Model > &data, const [ParamT](#)< Model > &theta_init, [MLEDebugData](#) &mle_data, [StencilT](#)< Model > &mle_stencil) override
- double [compute_profile_estimate](#) (const [ModelDataT](#)< Model > &data, const [ParamT](#)< Model > &theta_init, const [IdxVecT](#) &fixed_idx, [StencilT](#)< Model > &theta_max) override
- void [compute_profile_bound](#) (const [ModelDataT](#)< Model > &data, [ProfileBoundsData](#) &est, const [VecT](#) &init_← step, [IdxT](#) param_idx, [IdxT](#) which_bound) override
- void [compute_profile_bound_debug](#) (const [ModelDataT](#)< Model > &data, [ProfileBoundsDebugData](#) &bounds) override
- bool [backtrack](#) ([MaximizerData](#) &data)
- bool [profile_bound_backtrack](#) ([MaximizerData](#) &data, [IdxT](#) fixed_idx, double target_rllh, double old_fval, const [VecT](#) &fgrad)
- virtual void [maximize](#) ([MaximizerData](#) &data)=0
- virtual void [solve_profile_bound](#) ([MaximizerData](#) &data, [MLEData](#) &mle, double llh_delta, [IdxT](#) fixed_idx, [IdxT](#) which_bound)
- bool [convergence_test_grad_ratio](#) (const [VecT](#) &grad, double fval)
- bool [convergence_test_step_size](#) (const [VecT](#) &new_theta, const [VecT](#) &old_theta)
- void [record_exit_code](#) ([ExitCode](#) code) override
- void [record_walltime](#) ([ClockT](#)::time_point start_walltime, int [num_estimations](#))

Protected Attributes

- int `max_iterations`
- int `total_iterations` = 0
- int `total_backtracks` = 0
- int `total_fun_evals` = 0
- int `total_der_evals` = 0
- `IdxVecT` `last_backtrack_idxxs`

Debugging: Stores last set of backtrack_idxxs when data.save_seq==true.

- int `max_threads`
- int `num_threads`
- `std::mutex` `mtx`
- const Model & `model`
- int `num_estimations` = 0
- double `total_walltime` = 0.
- `IdxVecT` `exit_counts`

Static Protected Attributes

- static const double `min_eigenvalue_correction_delta` = 1e-3

Ensure the minimum eigenvalue is at least this big when correcting indefinite matrix.

- static const double `convergence_min_function_change_ratio` = 1.0e-9

Convergence criteria: tolerance for function-value change.

- static const double `convergence_min_step_size_ratio` = 1.0e-9

Convergence criteria: tolerance of relative step size.

- static const double `backtrack_min_ratio` = 0.05
- static const double `backtrack_max_ratio` = 0.50
- static const double `backtrack_min_linear_step_ratio` = 1e-3
- static const int `max_backtracks` = 8
- static const double `min_profile_bound_residual` = 1e-4

Minimum residual in quadratic solutions of equation (8) to accept. Revert to newton step.

9.57.1 Detailed Description

```
template<class Model>
class mappel::estimator::TrustRegionMaximizer< Model >
```

Definition at line 614 of file estimator.h.

9.57.2 Member Typedef Documentation

9.57.2.1 `template<class Model> using mappel::estimator::TrustRegionMaximizer< Model >::MaximizerData = typename IterativeMaximizer<Model>::MaximizerData`

Definition at line 617 of file estimator.h.

9.57.3 Constructor & Destructor Documentation

9.57.3.1 `template<class Model> mappel::estimator::TrustRegionMaximizer< Model >::TrustRegionMaximizer (const Model & model, int max_iterations = IterativeMaximizer<Model>::DefaultIterations) [inline]`

Definition at line 627 of file estimator.h.

9.57.4 Member Function Documentation

9.57.4.1 `template<class Model> bool mappel::estimator::IterativeMaximizer< Model >::backtrack (MaximizerData & data) [protected],[inherited]`

Definition at line 870 of file estimator_impl.h.

References `mappel::estimator::IterativeMaximizer< Model >::backtrack_min_linear_step_ratio`, `mappel::clamp()`, `mappel::estimator::IterativeMaximizer< Model >::convergence_min_step_size_ratio`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::grad`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::im`, `mappel::estimator::IterativeMaximizer< Model >::max_backtracks`, `mappel::estimator::MaxBacktracks`, `mappel::estimator::Estimator< Model >::model`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::record_backtrack()`, `mappel::estimator::ThreadedEstimator< Model >::record_exit_code()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::record_iteration()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::restore_stencil()`, `mappel::methods::objective::rllh()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::rllh`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::save_stencil()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::saved_theta()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::set_stencil()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::stencil()`, `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::step`, `mappel::estimator::StepSize`, and `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::theta()`.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.57.4.2 `template<class Model> void mappel::estimator::IterativeMaximizer< Model >::clear_stats () [virtual],[inherited]`

Run statistics.

Reimplemented from [mappel::estimator::ThreadedEstimator< Model >](#).

Definition at line 848 of file estimator_impl.h.

References `mappel::estimator::ThreadedEstimator< Model >::clear_stats()`, `mappel::estimator::ThreadedEstimator< Model >::mtx`, `mappel::estimator::IterativeMaximizer< Model >::total_backtracks`, `mappel::estimator::IterativeMaximizer< Model >::total_der_evals`, `mappel::estimator::IterativeMaximizer< Model >::total_fun_evals`, and `mappel::estimator::IterativeMaximizer< Model >::total_iterations`.

9.57.4.3 `template<class Model> void mappel::estimator::IterativeMaximizer< Model>::compute_estimate (const ModelDataT< Model> & data, const ParamT< Model> & theta_init, MLEData & mle_data, StencilT< Model> & mle_stencil) [override], [protected], [virtual], [inherited]`

Implements [mappel::estimator::Estimator< Model>](#).

Definition at line 1043 of file estimator_impl.h.

References [mappel::estimator::IterativeMaximizer< Model>::maximize\(\)](#), [mappel::estimator::Estimator< Model>::model](#), [mappel::methods::observed_information\(\)](#), [mappel::estimator::MLEData::obsI](#), [mappel::estimator::IterativeMaximizer< Model>::record_run_statistics\(\)](#), [mappel::estimator::MLEData::rllh](#), [mappel::estimator::IterativeMaximizer< Model>::MaximizerData::rllh](#), [mappel::estimator::IterativeMaximizer< Model>::MaximizerData::stencil\(\)](#), [mappel::estimator::MLEData::theta](#), and [mappel::estimator::IterativeMaximizer< Model>::MaximizerData::theta\(\)](#).

9.57.4.4 `template<class Model> void mappel::estimator::IterativeMaximizer< Model>::compute_estimate_debug (const ModelDataT< Model> & im, const ParamT< Model> & theta_init, MLEDebugData & mle_debug, StencilT< Model> & mle_stencil) [override], [protected], [virtual], [inherited]`

Virtual `estimate_debug` interface

Estimators that produce a sequence of results (e.g. `IterativeEstimators`) can override this dummy debug implementation.

Reimplemented from [mappel::estimator::Estimator< Model>](#).

Definition at line 1057 of file estimator_impl.h.

References [mappel::estimator::IterativeMaximizer< Model>::MaximizerData::get_theta_sequence\(\)](#), [mappel::estimator::IterativeMaximizer< Model>::MaximizerData::get_theta_sequence_rllh\(\)](#), [mappel::estimator::IterativeMaximizer< Model>::maximize\(\)](#), [mappel::estimator::Estimator< Model>::model](#), [mappel::methods::observed_information\(\)](#), [mappel::estimator::MLEDebugData::obsI](#), [mappel::estimator::IterativeMaximizer< Model>::record_run_statistics\(\)](#), [mappel::estimator::MLEDebugData::rllh](#), [mappel::estimator::IterativeMaximizer< Model>::MaximizerData::rllh](#), [mappel::estimator::MLEDebugData::sequence](#), [mappel::estimator::MLEDebugData::sequence_rllh](#), [mappel::estimator::IterativeMaximizer< Model>::MaximizerData::stencil\(\)](#), [mappel::estimator::MLEDebugData::theta](#), and [mappel::estimator::IterativeMaximizer< Model>::MaximizerData::theta\(\)](#).

9.57.4.5 `template<class Model> void mappel::estimator::IterativeMaximizer< Model>::compute_profile_bound (const ModelDataT< Model> & data, ProfileBoundsData & est, const VecT & init_step, IdxT param_idx, IdxT which_bound) [override], [protected], [virtual], [inherited]`

Reimplemented from [mappel::estimator::Estimator< Model>](#).

Definition at line 1088 of file estimator_impl.h.

References [mappel::estimator::ProfileBoundsData::estimated_idx](#), [mappel::estimator::ProfileBoundsData::mle](#), [mappel::estimator::Estimator< Model>::model](#), [mappel::estimator::ProfileBoundsData::profile_lb](#), [mappel::estimator::ProfileBoundsData::profile_points_lb](#), [mappel::estimator::ProfileBoundsData::profile_points_lb_rllh](#), [mappel::estimator::ProfileBoundsData::profile_points_ub](#), [mappel::estimator::ProfileBoundsData::profile_points_ub_rllh](#), [mappel::estimator::ProfileBoundsData::profile_ub](#), [mappel::estimator::IterativeMaximizer< Model>::record_run_statistics\(\)](#), [mappel::estimator::IterativeMaximizer< Model>::solve_profile_bound\(\)](#), [mappel::estimator::ProfileBoundsData::target_rllh_delta](#), and [mappel::estimator::MLEData::theta](#).

9.57.4.6 `template<class Model> void mappel::estimator::IterativeMaximizer< Model >::compute_profile_bound_debug (const ModelDataT< Model > & data, ProfileBoundsDebugData & bounds)` [override], [protected], [virtual], [inherited]

Reimplemented from [mappel::estimator::Estimator< Model >](#).

Definition at line 1114 of file estimator_impl.h.

References [mappel::estimator::ProfileBoundsDebugData::estimated_idx](#), [mappel::estimator::ProfileBoundsDebugData::mle](#), [mappel::estimator::Estimator< Model >::model](#), [mappel::estimator::ProfileBoundsDebugData::Nseq_lb](#), [mappel::estimator::ProfileBoundsDebugData::Nseq_ub](#), [mappel::estimator::MLEData::obsl](#), [mappel::estimator::ProfileBoundsDebugData::profile_lb](#), [mappel::estimator::ProfileBoundsDebugData::profile_ub](#), [mappel::estimator::IterativeMaximizer< Model >::record_run_statistics\(\)](#), [mappel::estimator::ProfileBoundsDebugData::sequence_lb](#), [mappel::estimator::ProfileBoundsDebugData::sequence_lb_rllh](#), [mappel::estimator::ProfileBoundsDebugData::sequence_ub](#), [mappel::estimator::ProfileBoundsDebugData::sequence_ub_rllh](#), [mappel::estimator::IterativeMaximizer< Model >::solve_profile_bound\(\)](#), [mappel::estimator::subroutine::solve_profile_initial_step\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::step](#), [mappel::estimator::ProfileBoundsDebugData::target_rllh_delta](#), and [mappel::estimator::MLEData::theta](#).

9.57.4.7 `template<class Model> double mappel::estimator::IterativeMaximizer< Model >::compute_profile_estimate (const ModelDataT< Model > & data, const ParamT< Model > & theta_init, const IdxVecT & fixed_idxs, StencilT< Model > & theta_max)` [override], [protected], [virtual], [inherited]

Reimplemented from [mappel::estimator::Estimator< Model >](#).

Definition at line 1074 of file estimator_impl.h.

References [mappel::estimator::IterativeMaximizer< Model >::maximize\(\)](#), [mappel::estimator::Estimator< Model >::model](#), [mappel::estimator::IterativeMaximizer< Model >::record_run_statistics\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::rllh](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::set_fixed_parameters\(\)](#), and [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::stencil\(\)](#).

9.57.4.8 `template<class Model> bool mappel::estimator::IterativeMaximizer< Model >::convergence_test_grad_ratio (const VecT & grad, double fval)` [protected], [inherited]

Definition at line 1015 of file estimator_impl.h.

References [mappel::estimator::IterativeMaximizer< Model >::convergence_min_function_change_ratio](#), [mappel::estimator::GradRatio](#), [mappel::norm_sq\(\)](#), [mappel::estimator::ThreadedEstimator< Model >::record_exit_code\(\)](#), and [mappel::square\(\)](#).

Referenced by [mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize\(\)](#).

9.57.4.9 `template<class Model> bool mappel::estimator::IterativeMaximizer< Model >::convergence_test_step_size (const VecT & new_theta, const VecT & old_theta)` [protected], [inherited]

Definition at line 1027 of file estimator_impl.h.

References [mappel::estimator::IterativeMaximizer< Model >::convergence_min_step_size_ratio](#), [mappel::norm_sq\(\)](#), [mappel::estimator::ThreadedEstimator< Model >::record_exit_code\(\)](#), and [mappel::estimator::StepSize](#).

Referenced by [mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize\(\)](#).

9.57.4.10 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max (const ModelDataT< Model > & data, const ParamT< Model > & theta_init, MLEData & mle_data, StencilT< Model > & mle_stencil) [inherited]`

Maximum likelihood point estimators Estimate for a single data starting at theta_init, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with theta_init, theta_init is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of theta_init will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 128 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model >::compute_estimate()`, `mappel::estimator::Error`, `mappel::estimator::MLEData::obsI`, `mappel::print_text_image()`, `mappel::estimator::Estimator< Model >::record_exit_code()`, `mappel::estimator::Estimator< Model >::record_walltime()`, `mappel::estimator::MLEData::rllh`, and `mappel::estimator::MLEData::theta`.

Referenced by `mappel::estimator::Estimator< Model >::estimate_max()`.

9.57.4.11 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max (const ModelDataT< Model > & data, const ParamT< Model > & theta_init, MLEData & mle_data) [inherited]`

Maximum likelihood point estimators Estimate for a single data starting at theta_init, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with theta_init, theta_init is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of theta_init will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 121 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model >::estimate_max()`.

9.57.4.12 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max (const ModelDataT< Model > & data, MLEData & mle_data) [inherited]`

Maximum likelihood point estimators Estimate for a single data starting at `theta_init`, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with `theta_init`, `theta_init` is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of `theta_init` will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 112 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::estimate_max()`, and `mappel::estimator::Estimator< Model >::model`.

9.57.4.13 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max_debug (const ModelDataT< Model > & data, const ParamT< Model > & theta_init, MLEDebugData & mle_data, StencilT< Model > & mle_stencil) [inherited]`

Debug estimation for a single data starting at `theta_init`, fill in the [MLEDebugData](#) struct with data including the sequence of evaluated points. Estimation is initialized with `theta_init`, `theta_init` is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of `theta_init` will not be modified in the initialization process.

The sequence and `sequence_rllh` parameters of the [MLEDebugData](#) struct record the entire sequence of evaluated points including `theta_init` and `theta_mle`, which should be first and last respectively.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	Initial theta value.
out	<i>mle_data</i>	MLEDebugData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

9.57.4.14 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max_debug (const ModelDataT< Model > & data, const ParamT< Model > & theta_init, MLEDebugData & mle_data)`
`[inherited]`

Maximum likelihood point estimators Estimate for a single data starting at `theta_init`, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with `theta_init`, `theta_init` is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of `theta_init` will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 157 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::compute_estimate_debug()`, `mappel::estimator::Error`, `mappel::estimator::MLEDebugData::obsI`, `mappel::print_text_image()`, `mappel::estimator::Estimator< Model >::record_exit_code()`, `mappel::estimator::Estimator< Model >::record_walltime()`, `mappel::estimator::MLEDebugData::rllh`, and `mappel::estimator::MLEDebugData::theta`.

9.57.4.15 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_max_stack (const ModelDataStackT< Model > & data_stack, MLEDataStack & mle_data_stack)` `[inherited]`

Maximum likelihood point estimators Estimate for a single data starting at `theta_init`, fill in the [MLEData](#) struct with the estimated parameter, RLLH, and observed information. Estimation is initialized with `theta_init`, `theta_init` is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of `theta_init` will not be modified in the initialization process.

The stencil at the MLE is also returned but can be ignored if not needed as it is available at no extra cost.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[Optional] Initial theta value.
out	<i>mle_data</i>	MLEData recording the maximum likelihood estimate and relevant data.
out	<i>stencil</i>	[Optional] StencilT at the MLE value.

Definition at line 183 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::estimate_max_stack()`, and `mappel::estimator::Estimator< Model >::model`.

9.57.4.16 `template<class Model > void mappel::estimator::ThreadedEstimator< Model >::estimate_max_stack (const ModelDataStackT< Model > & data_stack, const ParamVecT< Model > & theta_init_stack, MLEDataStack & mle_data_stack)` [override],[virtual],[inherited]

Estimate for a stack of data and fill in the [MLEDataStack](#) struct with the estimated parameter, RLLH, and observed information for each data in parallel. Estimation is initialized with `theta_init`, `theta_init` is empty, it is estimated with the Heuristic estimator. If any individual parameters are infinite or are not in the interior of the feasible region, they will be estimated with the Heuristic method. Valid parameters of `theta_init` will not be modified in the initialization process.

Parameters

in	<i>data</i>	Model data to estimate for
in	<i>theta_init</i>	[optional] Initial theta value for each image.
out	<i>mle</i>	MLEStackData records the maximum likelihood estimate, RLLH, and Observed information for each data

Implements [mappel::estimator::Estimator< Model >](#).

Definition at line 377 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::compute_estimate()`, `mappel::estimator::Error`, `mappel::estimator::Estimator< Model >::model`, `mappel::estimator::MLEDataStack::Ndata`, `mappel::estimator::ThreadedEstimator< Model >::num_threads`, `mappel::estimator::MLEData::obsI`, `mappel::estimator::MLEDataStack::obsI`, `mappel::print_text_image()`, `mappel::estimator::ThreadedEstimator< Model >::record_exit_code()`, `mappel::estimator::Estimator< Model >::record_walltime()`, `mappel::estimator::MLEData::rllh`, `mappel::estimator::MLEDataStack::rllh`, `mappel::estimator::MLEData::theta`, and `mappel::estimator::MLEDataStack::theta`.

9.57.4.17 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_profile_bounds (const ModelDataT< Model > & data, ProfileBoundsData & bounds_est)` [inherited]

Profile likelihood bounds computations with VM algorithm

Definition at line 220 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::compute_profile_bound()`, `mappel::estimator::Error`, `mappel::estimator::ProfileBoundsData::estimated_idx`s, `mappel::estimator::ProfileBoundsData::initialize_arrays()`, `mappel::estimator::ProfileBoundsData::mle`, `mappel::estimator::Estimator< Model >::model`, `mappel::estimator::ProfileBoundsData::Nparams_est`, `mappel::estimator::MLEData::obsI`, `mappel::print_text_image()`, `mappel::estimator::ProfileBoundsData::profile_lb`, `mappel::estimator::ProfileBoundsData::profile_points_lb`, `mappel::estimator::ProfileBoundsData::profile_points_lb_rllh`, `mappel::estimator::ProfileBoundsData::profile_points_ub`, `mappel::estimator::ProfileBoundsData::profile_ub`, `mappel::estimator::Estimator< Model >::record_exit_code()`, `mappel::estimator::Estimator< Model >::record_walltime()`, `mappel::estimator::subroutine::solve_profile_initial_step()`, `mappel::estimator::ProfileBoundsData::target_rllh_delta`, and `mappel::estimator::MLEData::theta`.

Referenced by `mappel::methods::error_bounds_profile_likelihood()`.

9.57.4.18 `template<class Model > void mappel::estimator::Estimator< Model >::estimate_profile_bounds_debug (const ModelDataT< Model > & data, ProfileBoundsDebugData & bounds_est)` [inherited]

Profile likelihood bounds computations with VM algorithm

Definition at line 258 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model >::compute_profile_bound_debug()`, `mappel::estimator::Error`, `mappel::estimator::ProfileBoundsDebugData::estimated_idx`, `mappel::estimator::ProfileBoundsDebugData::mle`, `mappel::print_text_image()`, `mappel::estimator::Estimator< Model >::record_exit_code()`, `mappel::estimator::Estimator< Model >::record_walltime()`, `mappel::estimator::ProfileBoundsDebugData::target_rllh_delta`, and `mappel::estimator::MLEData::theta`.

Referenced by `mappel::methods::debug::error_bounds_profile_likelihood_debug()`.

9.57.4.19 `template<class Model > void mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel (const ModelDataT< Model > & data, ProfileBoundsData & bounds_est)` [override], [virtual], [inherited]

Profile likelihood bounds computations with VM algorithm

Implements [mappel::estimator::Estimator< Model >](#).

Definition at line 464 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model >::compute_profile_bound()`, `mappel::estimator::Error`, `mappel::estimator::ProfileBoundsData::estimated_idx`s, `mappel::estimator::ProfileBoundsData::initialize_arrays()`, `mappel::estimator::ProfileBoundsData::mle`, `mappel::estimator::Estimator< Model >::model`, `mappel::estimator::ProfileBoundsData::Nparams_est`, `mappel::estimator::ThreadedEstimator< Model >::num_threads`, `mappel::estimator::MLEData::obs`, `mappel::print_text_image()`, `mappel::estimator::ThreadedEstimator< Model >::record_exit_code()`, `mappel::estimator::Estimator< Model >::record_walltime()`, `mappel::estimator::subroutine::solve_profile_initial_step()`, `mappel::estimator::ProfileBoundsData::target_rllh_delta`, and `mappel::estimator::MLEData::theta`.

Referenced by `mappel::methods::openmp::error_bounds_profile_likelihood_parallel()`.

9.57.4.20 `template<class Model > void mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack (const ModelDataStackT< Model > & data_stack, ProfileBoundsDataStack & bounds_est)` [override], [virtual], [inherited]

Profile likelihood bounds computations with VM algorithm

Implements [mappel::estimator::Estimator< Model >](#).

Definition at line 500 of file estimator_impl.h.

References `mappel::estimator::Estimator< Model >::compute_profile_bound()`, `mappel::estimator::Error`, `mappel::estimator::ProfileBoundsData::estimated_idx`s, `mappel::estimator::ProfileBoundsDataStack::estimated_idx`s, `mappel::estimator::ProfileBoundsData::initialize_arrays()`, and `mappel::estimator::ProfileBoundsDataStack::initialize_arrays()`.

mappel::estimator::ProfileBoundsData::mle, mappel::estimator::ProfileBoundsDataStack::mle, mappel::estimator::Estimator< Model >::model, mappel::estimator::ProfileBoundsDataStack::Ndata, mappel::estimator::ProfileBoundsDataStack::Nparams_est, mappel::estimator::ThreadedEstimator< Model >::num_threads, mappel::estimator::MLEData::obsI, mappel::estimator::MLEDataStack::obsI, mappel::print_text_image(), mappel::estimator::ProfileBoundsData::profile_lb, mappel::estimator::ProfileBoundsDataStack::profile_lb, mappel::estimator::ProfileBoundsData::profile_points_lb, mappel::estimator::ProfileBoundsDataStack::profile_points_lb, mappel::estimator::ProfileBoundsData::profile_points_lb_rllh, mappel::estimator::ProfileBoundsDataStack::profile_points_lb_rllh, mappel::estimator::ProfileBoundsData::profile_points_ub, mappel::estimator::ProfileBoundsDataStack::profile_points_ub, mappel::estimator::ProfileBoundsData::profile_points_ub_rllh, mappel::estimator::ProfileBoundsDataStack::profile_points_ub_rllh, mappel::estimator::ProfileBoundsData::profile_ub, mappel::estimator::ProfileBoundsDataStack::profile_ub, mappel::estimator::ThreadedEstimator< Model >::record_exit_code(), mappel::estimator::Estimator< Model >::record_walltime(), mappel::estimator::MLEData::rllh, mappel::estimator::MLEDataStack::rllh, mappel::estimator::subroutine::solve_profile_initial_step(), mappel::estimator::ProfileBoundsData::target_rllh_delta, mappel::estimator::ProfileBoundsDataStack::target_rllh_delta, mappel::estimator::MLEData::theta, and mappel::estimator::MLEDataStack::theta.

Referenced by mappel::methods::openmp::error_bounds_profile_likelihood_stack().

9.57.4.21 `template<class Model> double mappel::estimator::Estimator< Model >::estimate_profile_max (const ModelDataT< Model > & data, const IdxVecT & fixed_idx, const ParamT< Model > & fixed_theta_init, StencilT< Model > & theta_max) [inherited]`

Profile likelihood estimation methods

Definition at line 190 of file estimator_impl.h.

References mappel::estimator::Estimator< Model >::compute_profile_estimate(), mappel::estimator::Error, mappel::print_text_image(), mappel::estimator::Estimator< Model >::record_exit_code(), mappel::estimator::Estimator< Model >::record_walltime(), and mappel::methods::objective::rllh().

9.57.4.22 `template<class Model> void mappel::estimator::ThreadedEstimator< Model >::estimate_profile_max (const ModelDataT< Model > & data, const ParamVecT< Model > & fixed_theta_init, ProfileLikelihoodData & profile) [override],[virtual],[inherited]`

Profile likelihood estimation methods

Implements [mappel::estimator::Estimator< Model >](#).

Definition at line 418 of file estimator_impl.h.

References mappel::estimator::Estimator< Model >::compute_profile_estimate(), mappel::estimator::Error, mappel::estimator::ProfileLikelihoodData::fixed_idx, mappel::estimator::ProfileLikelihoodData::fixed_values, mappel::estimator::Estimator< Model >::model, mappel::estimator::ProfileLikelihoodData::Nfixed, mappel::estimator::ThreadedEstimator< Model >::num_threads, mappel::estimator::ProfileLikelihoodData::Nvalues, mappel::print_text_image(), mappel::estimator::ProfileLikelihoodData::profile_likelihood, mappel::estimator::ProfileLikelihoodData::profile_parameters, mappel::estimator::ThreadedEstimator< Model >::record_exit_code(), and mappel::estimator::Estimator< Model >::record_walltime().

9.57.4.23 `template<class Model > StatsT mappel::estimator::IterativeMaximizer< Model >::get_debug_stats ()`
`[virtual], [inherited]`

Run statistics.

Reimplemented from [mappel::estimator::ThreadedEstimator< Model >](#).

Definition at line 832 of file `estimator_impl.h`.

References `mappel::estimator::IterativeMaximizer< Model >::MaximizerData::backtrack_idx`s, `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, and `mappel::estimator::IterativeMaximizer< Model >::last_backtrack_idx`s.

9.57.4.24 `template<class Model > IdxVecT mappel::estimator::Estimator< Model >::get_exit_counts () const`
`[inline], [inherited]`

Run statistics.

Definition at line 274 of file `estimator.h`.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.57.4.25 `template<class Model > const Model & mappel::estimator::Estimator< Model >::get_model ()`
`[inherited]`

Definition at line 108 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model >::model`.

9.57.4.26 `template<class Model > StatsT mappel::estimator::IterativeMaximizer< Model >::get_stats ()`
`[virtual], [inherited]`

Run statistics.

Reimplemented from [mappel::estimator::ThreadedEstimator< Model >](#).

Definition at line 811 of file `estimator_impl.h`.

References `mappel::estimator::IterativeMaximizer< Model >::convergence_min_function_change_ratio`, `mappel::estimator::IterativeMaximizer< Model >::convergence_min_step_size_ratio`, `mappel::estimator::ThreadedEstimator< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::max_backtracks`, `mappel::estimator::IterativeMaximizer< Model >::max_iterations`, `mappel::estimator::ThreadedEstimator< Model >::mtx`, `mappel::estimator::Estimator< Model >::num_estimations`, `mappel::estimator::IterativeMaximizer< Model >::total_backtracks`, `mappel::estimator::IterativeMaximizer< Model >::total_der_evals`, `mappel::estimator::IterativeMaximizer< Model >::total_fun_evals`, and `mappel::estimator::IterativeMaximizer< Model >::total_iterations`.

Referenced by `mappel::methods::error_bounds_profile_likelihood()`, `mappel::methods::debug::error_bounds_profile_likelihood_debug()`, `mappel::methods::openmp::error_bounds_profile_likelihood_parallel()`, `mappel::methods::openmp::error_bounds_profile_likelihood_stack()`, `mappel::estimator::SimulatedAnnealingMaximizer< Model >::get_debug_stats()`, and `mappel::estimator::IterativeMaximizer< Model >::get_debug_stats()`.

9.57.4.27 `template<class Model> int mappel::estimator::IterativeMaximizer< Model >::get_total_backtracks () const`
`[inline], [inherited]`

Definition at line 441 of file estimator.h.

9.57.4.28 `template<class Model> int mappel::estimator::IterativeMaximizer< Model >::get_total_der_evals () const`
`[inline], [inherited]`

Definition at line 443 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.57.4.29 `template<class Model> int mappel::estimator::IterativeMaximizer< Model >::get_total_fun_evals () const`
`[inline], [inherited]`

Definition at line 442 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.57.4.30 `template<class Model> int mappel::estimator::IterativeMaximizer< Model >::get_total_iterations () const`
`[inline], [inherited]`

Definition at line 440 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.57.4.31 `template<class Model> void mappel::estimator::IterativeMaximizer< Model >::local_maximize (const`
`ModelDataT< Model> & im, StencilT< Model> & stencil, MLEData & data) [inherited]`

Perform a local maximization to finish off a simulated annealing run.

Definition at line 1145 of file estimator_impl.h.

References `mappel::estimator::IterativeMaximizer< Model >::maximize()`, `mappel::estimator::Estimator< Model>::model`, `mappel::methods::observed_information()`, `mappel::estimator::MLEData::obsI`, `mappel::estimator::IterativeMaximizer< Model>::record_run_statistics()`, `mappel::estimator::MLEData::rllh`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::rllh`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::stencil()`, `mappel::estimator::MLEData::theta`, and `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::theta()`.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.57.4.32 `template<class Model> void mappel::estimator::IterativeMaximizer< Model >::local_maximize (const`
`ModelDataT< Model> & im, StencilT< Model> & stencil, MLEDebugData & debug_data) [inherited]`

Definition at line 1158 of file estimator_impl.h.

References `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::get_theta_sequence()`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::get_theta_sequence_rllh()`, `mappel::estimator::IterativeMaximizer< Model>::maximize()`, `mappel::estimator::Estimator< Model>::model`, `mappel::methods::observed_information()`, `mappel::estimator::MLEDebugData::obsI`, `mappel::estimator::IterativeMaximizer< Model>::record_run_statistics()`, `mappel::estimator::MLEDebugData::rllh`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::rllh`, `mappel::estimator::MLEDebugData::sequence`, `mappel::estimator::MLEDebugData::sequence_rllh`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::stencil()`, `mappel::estimator::MLEDebugData::theta`, and `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::theta()`.

9.57.4.33 `template<class Model> void mappel::estimator::IterativeMaximizer< Model>::local_profile_maximize (const ModelDataT< Model> & im, const IdxVecT & fixed_param_idx, StencilT< Model> & stencil, MLEDebugData & mle) [inherited]`

Definition at line 1173 of file estimator_impl.h.

References `mappel::estimator::IterativeMaximizer< Model>::backtrack()`, `mappel::estimator::subroutine::bound_step()`, `mappel::clamp()`, `mappel::estimator::subroutine::compute_bound_scaling_vec()`, `mappel::estimator::subroutine::compute_cauchy_point()`, `mappel::estimator::subroutine::compute_initial_trust_radius()`, `mappel::estimator::subroutine::compute_quadratic_model_value()`, `mappel::estimator::subroutine::compute_scaled_problem()`, `mappel::estimator::IterativeMaximizer< Model>::convergence_test_grad_ratio()`, `mappel::estimator::IterativeMaximizer< Model>::convergence_test_step_size()`, `mappel::estimator::Estimator< Model>::exit_counts`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::fixed_idx`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::free_idx`, `mappel::estimator::Estimator< Model>::get_exit_counts()`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::get_theta_sequence()`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::get_theta_sequence_rllh()`, `mappel::estimator::IterativeMaximizer< Model>::get_total_der_evals()`, `mappel::estimator::IterativeMaximizer< Model>::get_total_fun_evals()`, `mappel::estimator::IterativeMaximizer< Model>::get_total_iterations()`, `mappel::methods::objective::grad()`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::grad`, `mappel::methods::objective::grad2()`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::has_fixed_parameters()`, `mappel::methods::objective::hessian()`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::im`, `mappel::is_positive_definite()`, `mappel::estimator::IterativeMaximizer< Model>::local_maximize()`, `mappel::estimator::IterativeMaximizer< Model>::local_profile_maximize()`, `mappel::estimator::IterativeMaximizer< Model>::max_iterations`, `mappel::estimator::IterativeMaximizer< Model>::maximize()`, `mappel::estimator::MaxIter`, `mappel::estimator::IterativeMaximizer< Model>::min_profile_bound_residual`, `mappel::estimator::Estimator< Model>::model`, `mappel::estimator::ThreadedEstimator< Model>::mtx`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::num_fixed_parameters()`, `mappel::methods::observed_information()`, `mappel::estimator::MLEData::obs`, `mappel::estimator::MLEDebugData::obs`, `mappel::estimator::IterativeMaximizer< Model>::profile_bound_backtrack()`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::record_backtrack()`, `mappel::estimator::ThreadedEstimator< Model>::record_exit_code()`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::record_iteration()`, `mappel::estimator::IterativeMaximizer< Model>::record_run_statistics()`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::restore_stencil()`, `mappel::estimator::MLEData::rllh`, `mappel::methods::objective::rllh()`, `mappel::estimator::MLEDebugData::rllh`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::rllh`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::s0`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::s1`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::save_stencil()`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::saved_theta()`, `mappel::estimator::MLEDebugData::sequence`, `mappel::estimator::MLEDebugData::sequence_rllh`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::set_fixed_parameters()`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::set_stencil()`, `mappel::estimator::subroutine::solve_TR_subproblem()`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::stencil()`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::step`, `mappel::estimator::MLEData::theta`, `mappel::estimator::MLEDebugData::theta`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::theta()`, `mappel::estimator::IterativeMaximizer< Model>::total_der_evals`, `mappel::estimator::IterativeMaximizer< Model>::total_fun_evals`, `mappel::estimator::IterativeMaximizer< Model>::total_iterations`, and `mappel::estimator::TrustRegionRadius`.

Referenced by `mappel::estimator::IterativeMaximizer< Model>::local_profile_maximize()`.

9.57.4.34 `template<class Model> virtual void mappel::estimator::IterativeMaximizer< Model>::maximize (MaximizerData & data) [protected],[pure virtual],[inherited]`

Referenced by `mappel::estimator::IterativeMaximizer< Model>::compute_estimate()`, `mappel::estimator::IterativeMaximizer< Model>::compute_estimate_debug()`, `mappel::estimator::IterativeMaximizer< Model>::compute_profile_estimate()`, `mappel::estimator::IterativeMaximizer< Model>::local_maximize()`, and `mappel::estimator::IterativeMaximizer< Model>::local_profile_maximize()`.

9.57.4.35 `template<class Model > double mappel::estimator::IterativeMaximizer< Model >::mean_backtracks ()`
[inherited]

9.57.4.36 `template<class Model > double mappel::estimator::IterativeMaximizer< Model >::mean_der_evals ()`
[inherited]

9.57.4.37 `template<class Model > double mappel::estimator::IterativeMaximizer< Model >::mean_fun_evals ()`
[inherited]

9.57.4.38 `template<class Model > double mappel::estimator::IterativeMaximizer< Model >::mean_iterations ()`
[inherited]

9.57.4.39 `template<class Model> std::string mappel::estimator::TrustRegionMaximizer< Model >::name () const`
[inline],[virtual]

Implements [mappel::estimator::Estimator< Model >](#).

Definition at line 630 of file estimator.h.

9.57.4.40 `template<class Model > bool mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack (`
`MaximizerData & data, IdxT fixed_idx, double target_rllh, double old_fval, const VecT & fgrad)` [protected],
[inherited]

Definition at line 943 of file estimator_impl.h.

References [mappel::estimator::IterativeMaximizer< Model >::backtrack_max_ratio](#), [mappel::estimator::IterativeMaximizer< Model >::backtrack_min_linear_step_ratio](#), [mappel::estimator::IterativeMaximizer< Model >::backtrack_min_ratio](#), [mappel::clamp\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::convergence_min_step_size_ratio](#), [mappel::methods::objective::grad\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::im](#), [mappel::estimator::IterativeMaximizer< Model >::max_backtracks](#), [mappel::estimator::MaxBacktracks](#), [mappel::estimator::Estimator< Model >::model](#), [mappel::norm_sq\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::record_backtrack\(\)](#), [mappel::estimator::ThreadedEstimator< Model >::record_exit_code\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::record_iteration\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::restore_stencil\(\)](#), [mappel::methods::objective::rllh\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::rllh](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::save_stencil\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::saved_theta\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::set_stencil\(\)](#), [mappel::square\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::stencil\(\)](#), [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::step](#), [mappel::estimator::StepSize](#), and [mappel::estimator::IterativeMaximizer< Model >::MaximizerData::theta\(\)](#).

Referenced by [mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize\(\)](#).

9.57.4.41 `template<class Model> void mappel::estimator::ThreadedEstimator< Model>::record_exit_code (ExitCode code) [override], [protected], [virtual], [inherited]`

Implements [mappel::estimator::Estimator< Model>](#).

Definition at line 578 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model>::exit_counts`, `mappel::estimator::Estimator< Model>::model`, `mappel::estimator::ThreadedEstimator< Model>::mtx`, `mappel::methods::observed_information()`, `mappel::estimator::MLEData::obsI`, `mappel::estimator::MLEData::rllh`, `mappel::methods::objective::rllh()`, `mappel::estimator::Success`, and `mappel::estimator::MLEData::theta`.

Referenced by `mappel::estimator::IterativeMaximizer< Model>::backtrack()`, `mappel::estimator::IterativeMaximizer< Model>::convergence_test_grad_ratio()`, `mappel::estimator::IterativeMaximizer< Model>::convergence_test_step_size()`, `mappel::estimator::ThreadedEstimator< Model>::estimate_max_stack()`, `mappel::estimator::ThreadedEstimator< Model>::estimate_profile_bounds_parallel()`, `mappel::estimator::ThreadedEstimator< Model>::estimate_profile_bounds_stack()`, `mappel::estimator::ThreadedEstimator< Model>::estimate_profile_max()`, `mappel::estimator::HeuristicEstimator< Model>::get_debug_stats()`, `mappel::estimator::CGaussMLE< Model>::get_debug_stats()`, `mappel::estimator::IterativeMaximizer< Model>::local_profile_maximize()`, and `mappel::estimator::IterativeMaximizer< Model>::profile_bound_backtrack()`.

9.57.4.42 `template<class Model> void mappel::estimator::IterativeMaximizer< Model>::record_run_statistics (const MaximizerData & data) [protected], [inherited]`

Definition at line 859 of file `estimator_impl.h`.

References `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::get_backtrack_idxs()`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::has_theta_sequence()`, `mappel::estimator::IterativeMaximizer< Model>::last_backtrack_idxs`, `mappel::estimator::ThreadedEstimator< Model>::mtx`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::nBacktracks`, `mappel::estimator::IterativeMaximizer< Model>::MaximizerData::nIterations`, `mappel::estimator::IterativeMaximizer< Model>::total_backtracks`, `mappel::estimator::IterativeMaximizer< Model>::total_der_evals`, `mappel::estimator::IterativeMaximizer< Model>::total_fun_evals`, and `mappel::estimator::IterativeMaximizer< Model>::total_iterations`.

Referenced by `mappel::estimator::IterativeMaximizer< Model>::compute_estimate()`, `mappel::estimator::IterativeMaximizer< Model>::compute_estimate_debug()`, `mappel::estimator::IterativeMaximizer< Model>::compute_profile_bound()`, `mappel::estimator::IterativeMaximizer< Model>::compute_profile_bound_debug()`, `mappel::estimator::IterativeMaximizer< Model>::compute_profile_estimate()`, `mappel::estimator::IterativeMaximizer< Model>::local_maximize()`, and `mappel::estimator::IterativeMaximizer< Model>::local_profile_maximize()`.

9.57.4.43 `template<class Model> void mappel::estimator::Estimator< Model>::record_walltime (ClockT::time_point start_walltime, int num_estimations) [protected], [inherited]`

Definition at line 360 of file `estimator_impl.h`.

References `mappel::estimator::Estimator< Model>::num_estimations`, and `mappel::estimator::Estimator< Model>::total_walltime`.

Referenced by `mappel::estimator::Estimator< Model>::estimate_max()`, `mappel::estimator::Estimator< Model>::estimate_max_debug()`, `mappel::estimator::ThreadedEstimator< Model>::estimate_max_stack()`, `mappel::estimator::Estimator< Model>::estimate_profile_bounds()`, `mappel::estimator::Estimator< Model>::estimate_profile_bounds_debug()`, `mappel::estimator::ThreadedEstimator< Model>::estimate_profile_bounds_parallel()`, `mappel::estimator::ThreadedEstimator< Model>::estimate_profile_bounds_stack()`, `mappel::estimator::Estimator< Model>::estimate_profile_max()`, and `mappel::estimator::ThreadedEstimator< Model>::estimate_profile_max()`.

9.57.4.44 `template<class Model > void mappel::estimator::IterativeMaximizer< Model >::solve_profile_bound (MaximizerData & data, MLEData & mle, double llh_delta, IdxT fixed_idx, IdxT which_bound)` [protected], [virtual], [inherited]

Definition at line 1137 of file estimator_impl.h.

References mappel::estimator::Estimator< Model >::name().

Referenced by mappel::estimator::IterativeMaximizer< Model >::compute_profile_bound(), and mappel::estimator::IterativeMaximizer< Model >::compute_profile_bound_debug().

9.57.5 Member Data Documentation

9.57.5.1 `template<class Model > const double mappel::estimator::IterativeMaximizer< Model >::backtrack_max_ratio = 0.50` [static], [protected], [inherited]

Definition at line 460 of file estimator.h.

Referenced by mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack().

9.57.5.2 `template<class Model > const double mappel::estimator::IterativeMaximizer< Model >::backtrack_min_linear_step_ratio = 1e-3` [static], [protected], [inherited]

Definition at line 461 of file estimator.h.

Referenced by mappel::estimator::IterativeMaximizer< Model >::backtrack(), and mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack().

9.57.5.3 `template<class Model > const double mappel::estimator::IterativeMaximizer< Model >::backtrack_min_ratio = 0.05` [static], [protected], [inherited]

Definition at line 459 of file estimator.h.

Referenced by mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack().

9.57.5.4 `template<class Model > const double mappel::estimator::IterativeMaximizer< Model >::convergence_min_function_change_ratio = 1.0e-9` [static], [protected], [inherited]

Convergence criteria: tolerance for function-value change.

Definition at line 456 of file estimator.h.

Referenced by mappel::estimator::IterativeMaximizer< Model >::convergence_test_grad_ratio(), and mappel::estimator::IterativeMaximizer< Model >::get_stats().

9.57.5.5 `template<class Model > const double mappel::estimator::IterativeMaximizer< Model >::convergence_min_step_size_ratio = 1.0e-9` [static], [protected], [inherited]

Convergence criteria: tolerance of relative step size.

Definition at line 457 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::backtrack()`, `mappel::estimator::IterativeMaximizer< Model >::convergence_test_step_size()`, `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, and `mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack()`.

9.57.5.6 `template<class Model> const double mappel::estimator::TrustRegionMaximizer< Model >::convergence_min_trust_radius = 1.0e-8` [static]

Convergence criteria: Minimum trust region radius.

Definition at line 625 of file estimator.h.

9.57.5.7 `template<class Model > const int mappel::estimator::IterativeMaximizer< Model >::DefaultIterations = 100` [static], [inherited]

Definition at line 428 of file estimator.h.

9.57.5.8 `template<class Model > IdxVecT mappel::estimator::Estimator< Model >::exit_counts` [protected], [inherited]

Definition at line 299 of file estimator.h.

Referenced by `mappel::estimator::Estimator< Model >::clear_stats()`, `mappel::estimator::Estimator< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, and `mappel::estimator::ThreadedEstimator< Model >::record_exit_code()`.

9.57.5.9 `template<class Model > IdxVecT mappel::estimator::IterativeMaximizer< Model >::last_backtrack_idx`s [protected], [inherited]

Debugging: Stores last set of `backtrack_idx`s when `data.save_seq==true`.

Definition at line 475 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::get_debug_stats()`, and `mappel::estimator::IterativeMaximizer< Model >::record_run_statistics()`.

9.57.5.10 `template<class Model > const int mappel::estimator::IterativeMaximizer< Model >::max_backtracks = 8` [static], [protected], [inherited]

Definition at line 462 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::backtrack()`, `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, and `mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack()`.

9.57.5.11 `template<class Model > int mappel::estimator::IterativeMaximizer< Model >::max_iterations`
`[protected], [inherited]`

Definition at line 466 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, and `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.57.5.12 `template<class Model > int mappel::estimator::ThreadedEstimator< Model >::max_threads`
`[protected], [inherited]`

Definition at line 324 of file estimator.h.

9.57.5.13 `template<class Model > const double mappel::estimator::IterativeMaximizer< Model`
`>::min_eigenvalue_correction_delta = 1e-3 [static], [protected], [inherited]`

Ensure the minimum eigenvalue is at least this big when correcting indefinite matrix.

Definition at line 454 of file estimator.h.

9.57.5.14 `template<class Model > const double mappel::estimator::IterativeMaximizer< Model`
`>::min_profile_bound_residual = 1e-4 [static], [protected], [inherited]`

Minimum residual in quadratic solutions of equation (8) to accept. Revert to newton step.

Definition at line 464 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`.

9.57.5.15 `template<class Model > const Model& mappel::estimator::Estimator< Model >::model [protected],`
`[inherited]`

Definition at line 294 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::backtrack()`, `mappel::estimator::IterativeMaximizer< Model >::compute_estimate()`, `mappel::estimator::Estimator< Model >::compute_estimate_debug()`, `mappel::estimator::IterativeMaximizer< Model >::compute_estimate_debug()`, `mappel::estimator::Estimator< Model >::compute_profile_bound()`, `mappel::estimator::IterativeMaximizer< Model >::compute_profile_bound()`, `mappel::estimator::Estimator< Model >::compute_profile_bound_debug()`, `mappel::estimator::IterativeMaximizer< Model >::compute_profile_bound_debug()`, `mappel::estimator::Estimator< Model >::compute_profile_estimate()`, `mappel::estimator::IterativeMaximizer< Model >::compute_profile_estimate()`, `mappel::estimator::Estimator< Model >::estimate_max()`, `mappel::estimator::Estimator< Model >::estimate_max_stack()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_max_stack()`, `mappel::estimator::Estimator< Model >::estimate_profile_bounds()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_max()`, `mappel::estimator::HeuristicEstimator< Model >::get_debug_stats()`, `mappel::estimator::CGaussMLE< Model >::get_debug_stats()`, `mappel::estimator::Estimator< Model >::get_model()`, `mappel::estimator::IterativeMaximizer< Model >::local_maximize()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, `mappel::estimator::IterativeMaximizer< Model >::profile_bound_backtrack()`, and `mappel::estimator::ThreadedEstimator< Model >::record_exit_code()`.

9.57.5.16 `template<class Model > std::mutex mappel::estimator::ThreadedEstimator< Model >::mtx` [protected],
[inherited]

Definition at line 326 of file estimator.h.

Referenced by `mappel::estimator::ThreadedEstimator< Model >::clear_stats()`, `mappel::estimator::IterativeMaximizer< Model >::clear_stats()`, `mappel::estimator::ThreadedEstimator< Model >::get_stats()`, `mappel::estimator::HeuristicEstimator< Model >::get_stats()`, `mappel::estimator::CGaussHeuristicEstimator< Model >::get_stats()`, `mappel::estimator::CGaussMLE< Model >::get_stats()`, `mappel::estimator::SimulatedAnnealingMaximizer< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, `mappel::estimator::ThreadedEstimator< Model >::record_exit_code()`, and `mappel::estimator::IterativeMaximizer< Model >::record_run_statistics()`.

9.57.5.17 `template<class Model > int mappel::estimator::Estimator< Model >::num_estimations = 0` [protected],
[inherited]

Definition at line 297 of file estimator.h.

Referenced by `mappel::estimator::Estimator< Model >::clear_stats()`, `mappel::estimator::Estimator< Model >::get_stats()`, `mappel::estimator::ThreadedEstimator< Model >::get_stats()`, `mappel::estimator::HeuristicEstimator< Model >::get_stats()`, `mappel::estimator::CGaussHeuristicEstimator< Model >::get_stats()`, `mappel::estimator::CGaussMLE< Model >::get_stats()`, `mappel::estimator::SimulatedAnnealingMaximizer< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, and `mappel::estimator::Estimator< Model >::record_walltime()`.

9.57.5.18 `template<class Model > int mappel::estimator::ThreadedEstimator< Model >::num_threads`
[protected], [inherited]

Definition at line 325 of file estimator.h.

Referenced by `mappel::estimator::ThreadedEstimator< Model >::clear_stats()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_max_stack()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_parallel()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_bounds_stack()`, `mappel::estimator::ThreadedEstimator< Model >::estimate_profile_max()`, and `mappel::estimator::ThreadedEstimator< Model >::get_stats()`.

9.57.5.19 `template<class Model> const double mappel::estimator::TrustRegionMaximizer< Model >::rho_cauchy_min = 0.1` [static]

Minimum acceptable rho for cauchy point: Coleman beta / Bellavia beta_1.

Definition at line 619 of file estimator.h.

9.57.5.20 `template<class Model> const double mappel::estimator::TrustRegionMaximizer< Model >::rho_obj_min = 0.25`
[static]

Minimum acceptable rho: Coleman mu / Bellavia beta_2.

Definition at line 620 of file estimator.h.

9.57.5.21 `template<class Model> const double mappel::estimator::TrustRegionMaximizer< Model >::rho_obj_opt = 0.75`
`[static]`

Optimal step rho: Coleman eta / Bellavia beta_2.

Definition at line 621 of file estimator.h.

9.57.5.22 `template<class Model > int mappel::estimator::IterativeMaximizer< Model >::total_backtracks = 0`
`[protected], [inherited]`

Definition at line 470 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::clear_stats()`, `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, and `mappel::estimator::IterativeMaximizer< Model >::record_run_statistics()`.

9.57.5.23 `template<class Model > int mappel::estimator::IterativeMaximizer< Model >::total_der_evals = 0`
`[protected], [inherited]`

Definition at line 472 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::clear_stats()`, `mappel::estimator::Simulated↵AnnealingMaximizer< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, `mappel↵::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, and `mappel::estimator::IterativeMaximizer< Model >::record_run_statistics()`.

9.57.5.24 `template<class Model > int mappel::estimator::IterativeMaximizer< Model >::total_fun_evals = 0`
`[protected], [inherited]`

Definition at line 471 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::clear_stats()`, `mappel::estimator::Simulated↵AnnealingMaximizer< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, `mappel↵::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, and `mappel::estimator::IterativeMaximizer< Model >::record_run_statistics()`.

9.57.5.25 `template<class Model > int mappel::estimator::IterativeMaximizer< Model >::total_iterations = 0`
`[protected], [inherited]`

Definition at line 469 of file estimator.h.

Referenced by `mappel::estimator::IterativeMaximizer< Model >::clear_stats()`, `mappel::estimator::Simulated↵AnnealingMaximizer< Model >::get_stats()`, `mappel::estimator::IterativeMaximizer< Model >::get_stats()`, `mappel↵::estimator::IterativeMaximizer< Model >::local_profile_maximize()`, and `mappel::estimator::IterativeMaximizer< Model >::record_run_statistics()`.

9.57.5.26 `template<class Model > double mappel::estimator::Estimator< Model >::total_walltime = 0.` `[protected], [inherited]`

Definition at line 298 of file estimator.h.

Referenced by `mappel::estimator::Estimator< Model >::clear_stats()`, `mappel::estimator::Estimator< Model >::get↵stats()`, `mappel::estimator::ThreadedEstimator< Model >::get_stats()`, and `mappel::estimator::Estimator< Model >↵::record_walltime()`.

9.57.5.27 `template<class Model> const double mappel::estimator::TrustRegionMaximizer< Model
>::trust_radius_decrease = 0.25 [static]`

Trust radius decrease ratio to step size: Coleman gamma_1 / Bellavia alpha_2.

Definition at line 623 of file estimator.h.

9.57.5.28 `template<class Model> const double mappel::estimator::TrustRegionMaximizer< Model
>::trust_radius_decrease_min = 0.125 [static]`

Smallest allowable trust radius decrease ratio: Coleman gamma_0 / Bellavia alpha_1.

Definition at line 622 of file estimator.h.

9.57.5.29 `template<class Model> const double mappel::estimator::TrustRegionMaximizer< Model
>::trust_radius_increase = 2 [static]`

Trust radius increase ratio: Coleman gamma_2 / Bellavia alpha_3.

Definition at line 624 of file estimator.h.

The documentation for this class was generated from the following files:

- [estimator.h](#)
- [estimator_impl.h](#)

10 File Documentation

10.1 display.cpp File Reference

```
#include "Mappel/display.h"
```

Namespaces

- [mappel](#)

Functions

- `const char * mappel::lambda_term_color (int size, int Lidx)`
- `ostream & mappel::print_centered_title (ostream &out, char fill, int width, const char *title=NULLPTR)`
- `ostream & mappel::print_labeled_image (ostream &out, const arma::mat &im, const char *title, const char *color)`
- `template<>
std::ostream & mappel::print_image (std::ostream &out, const arma::vec &im)`
- `template<>
std::ostream & mappel::print_image (std::ostream &out, const arma::mat &im)`
- `template<>
std::ostream & mappel::print_text_image (std::ostream &out, const arma::vec &im)`
- `template<>
std::ostream & mappel::print_text_image (std::ostream &out, const arma::mat &im)`
- `template<>
std::ostream & mappel::print_image (std::ostream &out, const arma::cube &im)`

Variables

- const char * [mappel::TERM_BLACK](#) ="1;30"
- const char * [mappel::TERM_RED](#) ="1;31"
- const char * [mappel::TERM_GREEN](#) ="1;32"
- const char * [mappel::TERM_YELLOW](#) ="1;33"
- const char * [mappel::TERM_BLUE](#) ="1;34"
- const char * [mappel::TERM_MAGENTA](#) ="1;35"
- const char * [mappel::TERM_CYAN](#) ="1;36"
- const char * [mappel::TERM_WHITE](#) ="1;37"
- const char * [mappel::TERM_DIM_BLACK](#) ="0;30"
- const char * [mappel::TERM_DIM_RED](#) ="0;31"
- const char * [mappel::TERM_DIM_GREEN](#) ="0;32"
- const char * [mappel::TERM_DIM_YELLOW](#) ="0;33"
- const char * [mappel::TERM_DIM_BLUE](#) ="0;34"
- const char * [mappel::TERM_DIM_MAGENTA](#) ="0;35"
- const char * [mappel::TERM_DIM_CYAN](#) ="0;36"
- const char * [mappel::TERM_DIM_WHITE](#) ="0;37"

10.1.1 Detailed Description

Author

Mark J. Olah (mjo@cs.unm.edu)

Date

2014-2019

10.2 display.h File Reference

Textual image display with colors.

```
#include <iostream>
#include <iomanip>
#include <armadillo>
```

Namespaces

- [mappel](#)

Functions

- template<class ImageT >
std::ostream & [mappel::print_image](#) (std::ostream &out, const ImageT &im)
- template<class ImageT >
std::ostream & [mappel::print_text_image](#) (std::ostream &out, const ImageT &im)
- template<class Vec >
std::ostream & [mappel::print_vec_row](#) (std::ostream &out, const Vec &vec, const char *header, int header_width, const char *color=nullptr)

10.2.1 Detailed Description

Textual image display with colors.

Author

Mark J. Olah (mjo@cs.unm.edu)

Date

2014-2019

10.3 estimator.cpp File Reference

Non-templated estimator helper routines and static constants.

```
#include <cmath>
#include <iomanip>
#include <armadillo>
#include "Mappel/util.h"
#include "Mappel/numerical.h"
#include "Mappel/estimator.h"
#include "Mappel/estimator_helpers.h"
```

Namespaces

- [mappel](#)
- [mappel::estimator](#)
- [mappel::estimator::subroutine](#)

Functions

- [VecT mappel::estimator::subroutine::solve_profile_initial_step](#) (const MatT &obsI, IdxT fixed_idx, double llh_delta)
- [VecT mappel::estimator::subroutine::bound_step](#) (const VecT &step, const VecT &theta, const VecT &lbound, const VecT &ubound)
- [void mappel::estimator::subroutine::compute_bound_scaling_vec](#) (const VecT &theta, const VecT &g, const VecT &lbound, const VecT &ubound, VecT &v, VecT &Jv)
- [VecT mappel::estimator::subroutine::compute_D_scale](#) (const VecT &oldDscale, const VecT &grad2)
- [void mappel::estimator::subroutine::compute_scaled_problem](#) (const MatT &H, const VecT &g, const VecT &Dinv, const VecT &Jv, MatT &Hhat, VecT &ghat)
- [double mappel::estimator::subroutine::compute_initial_trust_radius](#) (const VecT &ghat)
- [VecT mappel::estimator::subroutine::compute_cauchy_point](#) (const VecT &g, const MatT &H, double delta)
- [double mappel::estimator::subroutine::compute_quadratic_model_value](#) (const VecT &s, const VecT &g, const MatT &H)
Quadratic model value at given step Compute a quadratic model.
- [VecT mappel::estimator::subroutine::solve_TR_subproblem](#) (const VecT &g, const MatT &H, double delta)
Exact solver the TR sub-problem even for non-positive definite H.
- [VecT mappel::estimator::subroutine::solve_restricted_step_length_newton](#) (const VecT &g, const MatT &H, double delta, double lambda_lb, double lambda_ub)

10.3.1 Detailed Description

Non-templated estimator helper routines and static constants.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2014-2019

10.4 estimator.h File Reference

The class declaration and inline and templated functions for the Estimator class hierarchy.

```
#include <exception>
#include <fstream>
#include <string>
#include <limits>
#include <memory>
#include <mutex>
#include <map>
#include "Mappel/rng.h"
#include "cGaussMLE/cGaussMLE.h"
#include <chrono>
#include "Mappel/util.h"
```

Classes

- struct [mappel::estimator::MLEData](#)
- struct [mappel::estimator::MLEDebugData](#)
- struct [mappel::estimator::MLEDataStack](#)
- struct [mappel::estimator::ProfileLikelihoodData](#)
- struct [mappel::estimator::ProfileBoundsData](#)
- struct [mappel::estimator::ProfileBoundsDebugData](#)
- struct [mappel::estimator::ProfileBoundsDataStack](#)
- class [mappel::estimator::Estimator< Model >](#)
- class [mappel::estimator::ThreadedEstimator< Model >](#)
- class [mappel::estimator::HeuristicEstimator< Model >](#)
- class [mappel::estimator::CGaussHeuristicEstimator< Model >](#)
- class [mappel::estimator::CGaussMLE< Model >](#)
- class [mappel::estimator::SimulatedAnnealingMaximizer< Model >](#)
- class [mappel::estimator::IterativeMaximizer< Model >](#)
- class [mappel::estimator::IterativeMaximizer< Model >::MaximizerData](#)
- class [mappel::estimator::NewtonDiagonalMaximizer< Model >](#)
- class [mappel::estimator::NewtonMaximizer< Model >](#)
- class [mappel::estimator::QuasiNewtonMaximizer< Model >](#)
- class [mappel::estimator::TrustRegionMaximizer< Model >](#)

Namespaces

- [mappel](#)
- [mappel::estimator](#)

Typedefs

- typedef `std::chrono::high_resolution_clock` [ClockT](#)
- enum [mappel::estimator::ExitCode](#) : `IdxT` {
[mappel::estimator::ExitCode::TrustRegionRadius](#) = 9, [mappel::estimator::ExitCode::ModelImprovement](#) = 8,
[mappel::estimator::ExitCode::GradRatio](#) = 7, [mappel::estimator::ExitCode::FunctionValue](#) = 6,
[mappel::estimator::ExitCode::StepSize](#) = 5, [mappel::estimator::ExitCode::Success](#) = 4, [mappel::estimator::ExitCode::MaxBacktracks](#) = 3, [mappel::estimator::ExitCode::MaxIter](#) = 2,
[mappel::estimator::ExitCode::Unassigned](#) = 1, [mappel::estimator::ExitCode::Error](#) = 0 }

10.4.1 Detailed Description

The class declaration and inline and templated functions for the Estimator class hierarchy.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2014-2019

10.4.2 Class Documentation

10.4.2.1 struct `mappel::estimator::MLEData`

Data reporting structures A maximum-likelihood estimate for a single image. A container to group the necessary information at an MLEstimate

Definition at line 40 of file `estimator.h`.

Class Members

MatT	<code>obsI</code>	Observed Fisher information matrix at theta.
<code>double</code>	<code>rllh</code>	RLLH at theta.
VecT	<code>theta</code>	Theta estimate.

10.4.2.2 struct mappel::estimator::MLEDebugData

A maximum-likelihood estimate for a single image with debugging information. A container to group the necessary information at an MLEstimate

Definition at line 50 of file estimator.h.

Class Members

IdxT	Nseq	Number of points evaluated including theta_init and theta_mle.
MatT	obsI	Observed Fisher information matrix at theta.
double	rllh	RLLH at theta.
MatT	sequence	Sequence of evaluated points including theta_init and theta_mle.
VecT	sequence_rllh	RLLH at each point in sequence.
VecT	theta	Theta estimate.

10.4.2.3 struct mappel::estimator::MLEDataStack

A stack of maximum-likelihood estimates for a stack of images A container to group the necessary information at an MLEstimate

Definition at line 63 of file estimator.h.

Class Members

IdxT	Ndata	Number of data estimates.
CubeT	obsI	Observed Fisher information matrix stack. size:[Nparams,Nparams,Ndata].
VecT	rllh	RLLH stack. size:[Ndata].
MatT	theta	Theta estimate stack. size:[Nparams,Ndata].

10.4.2.4 struct mappel::estimator::ProfileLikelihoodData

Container for profile likelihood estimator data Includes both controlling (input) parameters as well as reporting (ouput) parameters to give output parameters context.

Definition at line 74 of file estimator.h.

Class Members

IdxVecT	fixed_idx	Indexes of fixed parameters.
MatT	fixed_values	Vector values for each fixed parameter size:[Nfixed,Nvalues];.
IdxT	Nfixed	Number of fixed parameters.
IdxT	Nvalues	Number of values of fixed parameters evaluated.
VecT	profile_likelihood	profile likelihood for each column of fixed parameter values
MatT	profile_parameters	Points at which the profile likelihood maximum was obtained.

10.4.2.5 struct mappel::estimator::ProfileBoundsDebugData

Data for debugging of estimation of profile bounds for a single parameter of a single image Includes both controlling (input) parameters as well as reporting (ouptut) parameters to give output parameters context.

Definition at line 113 of file estimator.h.

Class Members

IdxT	estimated_idx	Index of single parameter to estimate for.
MLEData	mle	Theta maximum-likelihood estimate, rllh, and Obsl.
IdxT	Nseq_lb	Number of points in sequence_lb.
IdxT	Nseq_ub	Number of points in sequence_ub.
double	profile_lb	size:[Nparams_est] Lower bound estimated for estimated_idx.
double	profile_ub	size:[Nparams_est] Upper bound estimated for estimated_idx.
MatT	sequence_lb	size:[NumParams,Nseq_lb] Sequence of evaluated points for lb estimate (including theta mle as initial point)
VecT	sequence_lb_rllh	size:[Nseq_lb] RLLH at each of the sequence_lb points
MatT	sequence_ub	size:[NumParams,Nseq_ub] Sequence of evaluated points for ub estimate (including theta mle as initial point)
VecT	sequence_ub_rllh	size:[Nseq_ub] RLLH at each of the sequence_ub points
double	target_rllh_delta	Targeted rllh change in value from MLE ($-\chi^2_{inv}(\text{confidence},1)/2$)

10.4.3 Typedef Documentation

10.4.3.1 typedef std::chrono::high_resolution_clock ClockT

Definition at line 25 of file estimator.h.

10.5 estimator_helpers.h File Reference

Estimator helper subroutines.

Namespaces

- [mappel](#)
- [mappel::estimator](#)
- [mappel::estimator::subroutine](#)

Functions

- VecT [mappel::estimator::subroutine::bound_step](#) (const VecT &step, const VecT &theta, const VecT &lbound, const VecT &ubound)
- void [mappel::estimator::subroutine::compute_bound_scaling_vec](#) (const VecT &theta, const VecT &g, const VecT &lbound, const VecT &ubound, VecT &v, VecT &Jv)
- VecT [mappel::estimator::subroutine::compute_D_scale](#) (const VecT &oldDscale, const VecT &grad2)
- void [mappel::estimator::subroutine::compute_scaled_problem](#) (const MatT &H, const VecT &g, const VecT &Dinv, const VecT &Jv, MatT &Hhat, VecT &ghat)
- VecT [mappel::estimator::subroutine::solve_profile_initial_step](#) (const MatT &obsI, IdxT fixed_idx, double llh_delta)
- double [mappel::estimator::subroutine::compute_initial_trust_radius](#) (const VecT &ghat)
- VecT [mappel::estimator::subroutine::compute_cauchy_point](#) (const VecT &g, const MatT &H, double delta)
- double [mappel::estimator::subroutine::compute_quadratic_model_value](#) (const VecT &s, const VecT &g, const MatT &H)
Quadratic model value at given step Compute a quadratic model.
- VecT [mappel::estimator::subroutine::solve_TR_subproblem](#) (const VecT &g, const MatT &H, double delta)
Exact solver the TR sub-problem even for non-positive definite H.
- VecT [mappel::estimator::subroutine::solve_restricted_step_length_newton](#) (const VecT &g, const MatT &H, double delta, double lambda_lb, double lambda_ub)

10.5.1 Detailed Description

Estimator helper subroutines.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2014-2019

10.6 estimator_impl.h File Reference

```
#include <thread>
#include <cmath>
#include <armadillo>
#include "Mappel/estimator.h"
#include "Mappel/estimator_helpers.h"
#include "Mappel/rng.h"
#include "Mappel/numerical.h"
#include "Mappel/display.h"
```

Namespaces

- [mappel](#)
- [mappel::estimator](#)

Functions

- `template<class Model >`
`std::ostream & mappel::estimator::operator<< (std::ostream &out, Estimator< Model > &estimator)`

10.6.1 Detailed Description

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2014-2019

10.7 estimator_statics.cpp File Reference

```
#include "Mappel/Gauss1DMAP.h"  
#include "Mappel/estimator_impl.h"
```

Namespaces

- [mappel](#)

10.7.1 Detailed Description

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

01-15-2014

10.8 Gauss1DMAP.cpp File Reference

The class definition and template Specializations for Gauss1DMAP.

```
#include "Mappel/Gauss1DMAP.h"
```

Namespaces

- [mappel](#)

10.8.1 Detailed Description

The class definition and template Specializations for Gauss1DMAP.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2014-2019

10.9 Gauss1DMAP.h File Reference

The class declaration and inline and templated functions for Gauss1DMAP.

```
#include "Mappel/Gauss1DModel.h"
#include "Mappel/PoissonNoise1DObjective.h"
#include "Mappel/MAPEstimator.h"
#include "Mappel/model_methods.h"
```

Classes

- class [mappel::Gauss1DMAP](#)
A 1D Gaussian with fixed PSF under an Poisson Read Noise assumption and MAP Objective.

Namespaces

- [mappel](#)

10.9.1 Detailed Description

The class declaration and inline and templated functions for Gauss1DMAP.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2014-2019

10.10 Gauss1DMLE.cpp File Reference

The class definition and template Specializations for Gauss1DMLE.

```
#include "Mappel/Gauss1DMLE.h"
```

Namespaces

- [mappel](#)

10.10.1 Detailed Description

The class definition and template Specializations for Gauss1DMLE.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2014-2019

10.11 Gauss1DMLE.h File Reference

The class declaration and inline and templated functions for Gauss1DMLE.

```
#include "Mappel/Gauss1DModel.h"  
#include "Mappel/PoissonNoise1DObjective.h"  
#include "Mappel/MLEstimator.h"  
#include "Mappel/model_methods.h"
```

Classes

- class [mappel::Gauss1DMLE](#)
A 1D Gaussian with fixed PSF under an Poisson noise assumption and maximum-likelihood objective.

Namespaces

- [mappel](#)

10.11.1 Detailed Description

The class declaration and inline and templated functions for Gauss1DMLE.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2014-2019

10.12 Gauss1DModel.cpp File Reference

The class definition and template Specializations for Gauss1DModel.

```
#include "Mappel/Gauss1DModel.h"
#include "Mappel/stencil.h"
```

Namespaces

- [mappel](#)

Functions

- `std::ostream & mappel::operator<< (std::ostream &out, const Gauss1DModel::Stencil &s)`

10.12.1 Detailed Description

The class definition and template Specializations for Gauss1DModel.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2014-2019

10.13 Gauss1DModel.h File Reference

The class declaration and inline and templated functions for Gauss1DModel.

```
#include "Mappel/PointEmitterModel.h"
#include "Mappel/ImageFormat1DBase.h"
#include "Mappel/MCMCA adaptor1D.h"
```

Classes

- class [mappel::Gauss1DModel](#)
A base class for 1D Gaussian PSF with a fixed sigma (standard dev.)
- class [mappel::Gauss1DModel::Stencil](#)
Stencil for 1D fixed-sigma models.

Namespaces

- [mappel](#)

10.13.1 Detailed Description

The class declaration and inline and templated functions for Gauss1DModel.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2014-2019

10.14 Gauss1DsMAP.cpp File Reference

The class definition and template Specializations for Gauss1DsMAP.

```
#include "Mappel/Gauss1DsMAP.h"
```

Namespaces

- [mappel](#)

10.14.1 Detailed Description

The class definition and template Specializations for Gauss1DsMAP.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2017

10.15 Gauss1DsMAP.h File Reference

The class declaration and inline and templated functions for Gauss1DsMAP.

```
#include "Mappel/Gauss1DsModel.h"  
#include "Mappel/PoissonNoise1DObjective.h"  
#include "Mappel/MAPEstimator.h"  
#include "Mappel/model_methods.h"
```

Classes

- class [mappel::Gauss1DsMAP](#)
A 1D Gaussian with variable PSF sigma under an Poisson read noise assumption and MAP Objective.

Namespaces

- [mappel](#)

10.15.1 Detailed Description

The class declaration and inline and templated functions for Gauss1DsMAP.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2014-2019

10.16 Gauss1DsMLE.cpp File Reference

The class definition and template Specializations for Gauss1DsMLE.

```
#include "Mappel/Gauss1DsMLE.h"
```

Namespaces

- [mappel](#)

10.16.1 Detailed Description

The class definition and template Specializations for Gauss1DsMLE.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2017

10.17 Gauss1DsMLE.h File Reference

The class declaration and inline and templated functions for Gauss1DsMLE.

```
#include "Mappel/Gauss1DsModel.h"
#include "Mappel/PoissonNoise1DObjective.h"
#include "Mappel/MLEstimator.h"
#include "Mappel/model_methods.h"
```

Classes

- class [mappel::Gauss1DsMLE](#)
A 1D Gaussian with variable PSF under an Poisson noise assumption and maximum-likelihood estimator.

Namespaces

- [mappel](#)

10.17.1 Detailed Description

The class declaration and inline and templated functions for Gauss1DsMLE.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2014-2019

10.18 Gauss1DsModel.cpp File Reference

The class definition and template Specializations for Gauss1DsModel.

```
#include "Mappel/Gauss1DsModel.h"
#include "Mappel/stencil.h"
```

Namespaces

- [mappel](#)

Functions

- `std::ostream & mappel::operator<< (std::ostream &out, const Gauss1DsModel::Stencil &s)`

10.18.1 Detailed Description

The class definition and template Specializations for Gauss1DsModel.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2014-2019

10.19 Gauss1DsModel.h File Reference

The class declaration and inline and templated functions for Gauss1DsModel.

```
#include "Mappel/PointEmitterModel.h"
#include "Mappel/ImageFormat1DBase.h"
#include "Mappel/MCMCA adaptor1Ds.h"
```

Classes

- class [mappel::Gauss1DsModel](#)
Base class for 1D Gaussian PSF with variable Gaussian sigma (standard deviation) measured in units of pixels.
- class [mappel::Gauss1DsModel::Stencil](#)
Stencil for 1D variable-sigma models.

Namespaces

- [mappel](#)

10.19.1 Detailed Description

The class declaration and inline and templated functions for Gauss1DsModel.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2014-2019

10.20 Gauss2DMAP.cpp File Reference

The class definition and template Specializations for Gauss2DMAP.

```
#include "Mappel/Gauss2DMAP.h"
```

Namespaces

- [mappel](#)

10.20.1 Detailed Description

The class definition and template Specializations for Gauss2DMAP.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2014-2019

10.21 Gauss2DMAP.h File Reference

The class declaration and inline and templated functions for Gauss2DMAP.

```
#include "Mappel/Gauss2DModel.h"  
#include "Mappel/PoissonNoise2DObjective.h"  
#include "Mappel/MAPEstimator.h"  
#include "Mappel/model_methods.h"
```

Classes

- class [mappel::Gauss2DMP](#)
A 2D Gaussian with fixed PSF under an Poisson Read Noise assumption and MAP Objective.

Namespaces

- [mappel](#)

10.21.1 Detailed Description

The class declaration and inline and templated functions for Gauss2DMP.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2014-2019

10.22 Gauss2DMLE.cpp File Reference

The class definition and template Specializations for Gauss2DMLE.

```
#include "Mappel/Gauss2DMLE.h"
```

Namespaces

- [mappel](#)

10.22.1 Detailed Description

The class definition and template Specializations for Gauss2DMLE.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2014-2019

10.23 Gauss2DMLE.h File Reference

The class declaration and inline and templated functions for Gauss2DMLE.

```
#include "Mappel/Gauss2DModel.h"
#include "Mappel/PoissonNoise2DObjective.h"
#include "Mappel/MLEstimator.h"
#include "Mappel/model_methods.h"
```

Classes

- class [mappel::Gauss2DMLE](#)
A 2D Gaussian with fixed PSF under an Poisson noise assumption and maximum-likelihood objective.

Namespaces

- [mappel](#)

10.23.1 Detailed Description

The class declaration and inline and templated functions for Gauss2DMLE.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2014-2019

10.24 Gauss2DModel.cpp File Reference

The class definition and template Specializations for Gauss2DModel.

```
#include "Mappel/Gauss2DModel.h"
#include "Mappel/stencil.h"
```

Namespaces

- [mappel](#)

Functions

- `std::ostream & mappel::operator<<` (`std::ostream &out, const Gauss2DModel::Stencil &s`)

10.24.1 Detailed Description

The class definition and template Specializations for Gauss2DModel.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2014-2019

10.25 Gauss2DModel.h File Reference

The class declaration and inline and templated functions for Gauss2DModel.

```
#include "Mappel/PointEmitterModel.h"
#include "Mappel/ImageFormat2DBase.h"
#include "Mappel/MCMCAdaptor2D.h"
#include "Mappel/Gauss1DMAP.h"
```

Classes

- class `mappel::Gauss2DModel`
A base class for 2D Gaussian PSF with fixed but possibly asymmetric sigma.
- class `mappel::Gauss2DModel::Stencil`
Stencil for 2D fixed-sigma models.

Namespaces

- `mappel`

Functions

- `template<class Model >`
`std::enable_if< std::is_base_of< Gauss2DModel, Model >::value, ParamT< Model > >::type mappel::cgauss←`
`_heuristic_compute_estimate` (`const Model &model, const ModelDataT< Model > &im, const ParamT< Model`
`> &theta_init`)
- `template<class Model >`
`std::enable_if< std::is_base_of< Gauss2DModel, Model >::value, ParamT< Model > >::type mappel::cgauss←`
`_compute_estimate` (`Model &model, const ModelDataT< Model > &im, const ParamT< Model > &theta_init, int`
`max_iterations`)
- `template<class Model >`
`std::enable_if< std::is_base_of< Gauss2DModel, Model >::value, ParamT< Model > >::type mappel::cgauss←`
`_compute_estimate_debug` (`const Model &model, const ModelDataT< Model > &im, const ParamT< Model >`
`&theta_init, int max_iterations, ParamVecT< Model > &sequence`)

10.25.1 Detailed Description

The class declaration and inline and templated functions for Gauss2DModel.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2014-2019

10.26 Gauss2DsMAP.cpp File Reference

The class definition and template Specializations for Gauss2DsMAP.

```
#include "Mappel/Gauss2DsMAP.h"
```

Namespaces

- [mappel](#)

10.26.1 Detailed Description

The class definition and template Specializations for Gauss2DsMAP.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2014-2019

10.27 Gauss2DsMAP.h File Reference

The class declaration and inline and templated functions for Gauss2DsMAP.

```
#include "Mappel/Gauss2DsModel.h"  
#include "Mappel/PoissonNoise2DObjective.h"  
#include "Mappel/MLEstimator.h"  
#include "Mappel/model_methods.h"
```

Classes

- class [mappel::Gauss2DsMAP](#)

A 2D Gaussian with a variable scalar PSF sigma under a Poisson noise assumption using a maximum a-posteriori objective.

Namespaces

- [mappel](#)

10.27.1 Detailed Description

The class declaration and inline and templated functions for Gauss2DsMAP.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2014-2019

10.28 Gauss2DsMLE.cpp File Reference

The class definition and template Specializations for Gauss2DsMLE.

```
#include "Mappel/Gauss2DsMLE.h"
```

Namespaces

- [mappel](#)

10.28.1 Detailed Description

The class definition and template Specializations for Gauss2DsMLE.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2014-2019

10.29 Gauss2DsMLE.h File Reference

The class declaration and inline and templated functions for Gauss2DsMLE.

```
#include "Mappel/Gauss2DsModel.h"
#include "Mappel/PoissonNoise2DObjective.h"
#include "Mappel/MLEstimator.h"
#include "Mappel/model_methods.h"
```

Classes

- class [mappel::Gauss2DsMLE](#)
A 2D Gaussian with a variable scalar PSF sigma under a Poisson noise assumption using a maximum-likelihood objective.

Namespaces

- [mappel](#)

10.29.1 Detailed Description

The class declaration and inline and templated functions for Gauss2DsMLE.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2014-2019

10.30 Gauss2DsModel.cpp File Reference

The class definition and template Specializations for Gauss2DsModel.

```
#include "Mappel/Gauss2DsModel.h"
#include "Mappel/stencil.h"
```

Namespaces

- [mappel](#)

Functions

- `std::ostream & mappel::operator<<` (`std::ostream &out`, `const Gauss2DsModel::Stencil &s`)

10.30.1 Detailed Description

The class definition and template Specializations for Gauss2DsModel.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2014-2019

10.31 Gauss2DsModel.h File Reference

The class declaration and inline and templated functions for Gauss2DsModel.

```
#include "Mappel/PointEmitterModel.h"
#include "Mappel/ImageFormat2DBase.h"
#include "Mappel/MCMCApaptor2Ds.h"
#include "Mappel/Gauss1DsMAP.h"
```

Classes

- class `mappel::Gauss2DsModel`
*A base class for 2D Gaussian PSF where the gaussian sigma is controlled by a single scalar parameter which is called `sigma_ratio`. The size of the gaussian psf is `sigma_ratio*psf_sigma`, where `psf_sigma` is considered as a vector [`psf_sigmaX`, `psf_sigmaY`].*
- class `mappel::Gauss2DsModel::Stencil`
Stencil for 2D scalar-sigma models.

Namespaces

- `mappel`

Functions

- `template<class Model >`
`std::enable_if< std::is_base_of< Gauss2DsModel, Model >::value, ParamT< Model > >::type mappel←`
`::cgauss_heuristic_compute_estimate (const Model &model, const ModelDataT< Model > &im, const ParamT<`
`Model > &theta_init)`
- `template<class Model >`
`std::enable_if< std::is_base_of< Gauss2DsModel, Model >::value, ParamT< Model > >::type mappel←`
`::cgauss_compute_estimate (Model &model, const ModelDataT< Model > &im, const ParamT< Model >`
`&theta_init, int max_iterations)`
- `template<class Model >`
`std::enable_if< std::is_base_of< Gauss2DsModel, Model >::value, ParamT< Model > >::type mappel←`
`::cgauss_compute_estimate_debug (const Model &model, const ModelDataT< Model > &im, const ParamT<`
`Model > &theta_init, int max_iterations, ParamVecT< Model > &sequence)`

10.31.1 Detailed Description

The class declaration and inline and templated functions for Gauss2DsModel.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2014-2019

10.32 Gauss2DsxMAP.h File Reference

The class declaration and inline and templated functions for Gauss2DsxMAP.

```
#include "Mappel/PoissonNoise2DObjective.h"
#include "Mappel/MAPEstimator.h"
#include "Mappel/Gauss1DModel.h"
#include "Mappel/model_methods.h"
```

Classes

- class `mappel::Gauss2DsxMAP`
A 1D Gaussian with fixed PSF under an Poisson Read Noise assumption and MAP Objective.

Namespaces

- `mappel`

10.32.1 Detailed Description

The class declaration and inline and templated functions for Gauss2DsxyMAP.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2017

10.33 Gauss2DsxyModel.h File Reference

The class declaration and inline and templated functions for Gauss2DsxyModel.

```
#include "Mappel/PointEmitterModel.h"
#include "Mappel/ImageFormat2DBase.h"
#include "Mappel/Gauss1DsMAP.h"
```

Classes

- class [mappel::Gauss2DsxyModel](#)
A base class for 2D Gaussian PSF with axis-aligned gaussian with free parameters for both σ_x and σ_y . Gaussian sigma parameters σ_x and σ_y are measured in units of pixels. The model has 6 parameters, $[x, y, l, b, \sigma_x, \sigma_y]$.
- class [mappel::Gauss2DsxyModel::Stencil](#)
Stencil for 2D free-sigma (astigmatic) models.

Namespaces

- [mappel](#)

Functions

- `template<class Model >`
`std::enable_if< std::is_base_of< Gauss2DsxyModel, Model >::value, ParamT< Model > >::type` [mappel::cgau](#)
`ss_heuristic_compute_estimate` (const Model &model, const ModelDataT< Model > &im, const ParamT< Model > &theta_init)
- `template<class Model >`
`std::enable_if< std::is_base_of< Gauss2DsxyModel, Model >::value, ParamT< Model > >::type` [mappel::cgau](#)
`ss_compute_estimate` (Model &model, const ModelDataT< Model > &im, const ParamT< Model > &theta_init, int max_iterations)
- `template<class Model >`
`std::enable_if< std::is_base_of< Gauss2DsxyModel, Model >::value, ParamT< Model > >::type` [mappel::cgau](#)
`ss_compute_estimate_debug` (const Model &model, const ModelDataT< Model > &im, const ParamT< Model > &theta_init, int max_iterations, ParamVecT< Model > &sequence)

10.33.1 Detailed Description

The class declaration and inline and templated functions for Gauss2DskyModel.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2014-2019

10.34 ImageFormat1DBase.cpp File Reference

The class definition and template Specializations for ImageFormat1DBase.

```
#include "Mappel/ImageFormat1DBase.h"
```

Namespaces

- [mappel](#)

10.34.1 Detailed Description

The class definition and template Specializations for ImageFormat1DBase.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2014-2019

10.35 ImageFormat1DBase.h File Reference

The class declaration and inline and templated functions for ImageFormat1DBase.

```
#include "Mappel/util.h"  
#include "Mappel/ImageFormat2DBase.h"
```


Classes

- class [mappel::ImageFormat1DBase](#)
A virtual base class for 2D image localization objectives.

Namespaces

- [mappel](#)
- [mappel::methods](#)
Templated functions for operating on a [PointEmitterModel](#).

Functions

- `template<class Model >`
`ReturnIfSubclassT< ImageT< Model >, Model, ImageFormat1DBase > mappel::methods::model_image (const`
`Model &model, const StencilT< Model > &s)`

10.35.1 Detailed Description

The class declaration and inline and templated functions for ImageFormat1DBase.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2014-2019 The virtual base class for all point 2D image based emitter Models and Objectives

10.36 ImageFormat2DBase.cpp File Reference

The class definition and template Specializations for ImageFormat2DBase.

```
#include "Mappel/ImageFormat2DBase.h"
```

Namespaces

- [mappel](#)

10.36.1 Detailed Description

The class definition and template Specializations for ImageFormat2DBase.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2014-2019

10.37 ImageFormat2DBase.h File Reference

The class declaration and inline and templated functions for ImageFormat2DBase.

```
#include "Mappel/util.h"
```

Classes

- class [mappel::ImageFormat2DBase](#)
A virtual base class for 2D image localization objectives.

Namespaces

- [mappel](#)
- [mappel::methods](#)
Templated functions for operating on a [PointEmitterModel](#).

Functions

- `template<class Model >`
`ReturnIfSubclassT< ImageT< Model >, Model, ImageFormat2DBase > mappel::methods::model_image (const Model &model, const typename Model::Stencil &s)`

10.37.1 Detailed Description

The class declaration and inline and templated functions for ImageFormat2DBase.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2014-2019 The virtual base class for all point 2D image based emitter Models and Objectives

10.38 Install.md File Reference

10.39 MAPEstimator.h File Reference

Class declaration and inline and templated functions for MAPEstimator.

```
#include "Mappel/PointEmitterModel.h"
#include "Mappel/MLEstimator.h"
```

Classes

- class [mappel::MAPEstimator](#)
A Mixin class to configure a for MLE estimation (null prior).

Namespaces

- [mappel](#)
- [mappel::methods](#)
Templated functions for operating on a [PointEmitterModel](#).
- [mappel::methods::objective](#)
- [mappel::methods::objective::debug](#)

Functions

- `template<class Model >`
`ReturnIfSubclassT< double, Model, MAPEstimator > mappel::methods::objective::llh (const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s)`
- `template<class Model >`
`ReturnIfSubclassT< double, Model, MAPEstimator > mappel::methods::objective::rllh (const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s)`
- `template<class Model >`
`ReturnIfSubclassT< ParamT< Model >, Model, MAPEstimator > mappel::methods::objective::grad (const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s)`
- `template<class Model >`
`ReturnIfSubclassT< void, Model, MAPEstimator > mappel::methods::objective::grad2 (const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s, ParamT< Model > &grad, ParamT< Model > &grad2)`
- `template<class Model >`
`ReturnIfSubclassT< void, Model, MAPEstimator > mappel::methods::objective::hessian (const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s, ParamT< Model > &grad, MatT &hess)`
- `template<class Model >`
`ReturnIfSubclassT< VecT, Model, MAPEstimator > mappel::methods::objective::debug::llh_components (const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s)`
- `template<class Model >`
`ReturnIfSubclassT< VecT, Model, MAPEstimator > mappel::methods::objective::debug::rllh_components (const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s)`
- `template<class Model >`
`ReturnIfSubclassT< MatT, Model, MAPEstimator > mappel::methods::objective::debug::grad_components (const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s)`
- `template<class Model >`
`ReturnIfSubclassT< CubeT, Model, MAPEstimator > mappel::methods::objective::debug::hessian_components (const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s)`

10.39.1 Detailed Description

Class declaration and inline and templated functions for MAPEstimator.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2017-2019

10.40 mcmc.cpp File Reference

MCMC helper functions.

```
#include "Mappel/util.h"
#include "Mappel/mcmc_data.h"
```

Namespaces

- [mappel](#)
- [mappel::mcmc](#)

Functions

- `IdxT mappel::mcmc::num_oversample (IdxT Nsample, IdxT Nburnin, IdxT thin)`
- `MatT mappel::mcmc::thin_sample (MatT &sample, IdxT Nburnin, IdxT thin)`
- `void mappel::mcmc::thin_sample (const MatT &sample, const VecT &sample_rllh, IdxT Nburnin, IdxT thin, MatT &subsample, VecT &subsample_rllh)`

10.40.1 Detailed Description

MCMC helper functions.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2014-2019

10.41 mcmc.h File Reference

Templated MCMC methods for posterior estimation.

```
#include <cmath>
#include "Mappel/mcmc_data.h"
#include "Mappel/util.h"
#include "Mappel/rng.h"
#include <trng/uniform01_dist.hpp>
```

Namespaces

- [mappel](#)
- [mappel::mcmc](#)

Functions

- [IdxT mappel::mcmc::num_oversample](#) (IdxT Nsample, IdxT Nburnin, IdxT thin)
- [MatT mappel::mcmc::thin_sample](#) (MatT &sample, IdxT Nburnin, IdxT thin)
- [void mappel::mcmc::thin_sample](#) (const MatT &sample, const VecT &sample_rllh, IdxT Nburnin, IdxT thin, MatT &subsample, VecT &subsample_rllh)
- [void mappel::mcmc::estimate_sample_posterior](#) (const MatT &sample, VecT &theta_posterior_mean, MatT &theta_posterior_cov)
- [template<class Mat, class Vec>](#)
[void mappel::mcmc::compute_posterior_credible](#) (const Mat &sample, double confidence, Vec &lb, Vec &ub)
- [template<class Model>](#)
[void mappel::mcmc::sample_posterior](#) (const Model &model, const ModelDataT< Model > &im, const StencilT< Model > &theta_init, MatT &sample, VecT &sample_rllh)
- [template<class Model>](#)
[void mappel::mcmc::sample_posterior_debug](#) (const Model &model, const ModelDataT< Model > &im, const StencilT< Model > &theta_init, MatT &sample, VecT &sample_rllh, MatT &candidate, VecT &candidate_rllh)

10.41.1 Detailed Description

Templated MCMC methods for posterior estimation.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2015-2019

10.42 mcmc_data.h File Reference

MCMC data storage types.

```
#include <armadillo>
```

Classes

- struct [mappel::mcmc::MCMCData](#)
- struct [mappel::mcmc::MCMCDebugData](#)
- struct [mappel::mcmc::MCMCDataStack](#)

Namespaces

- [mappel](#)
- [mappel::mcmc](#)

10.42.1 Detailed Description

MCMC data storage types.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2015-2019

10.43 MCMCAdaptor1D.cpp File Reference

The class definition and template Specializations for MCMCAdaptor1D.

```
#include "Mappel/MCMCAdaptor1D.h"
```

Namespaces

- [mappel](#)

10.43.1 Detailed Description

The class definition and template Specializations for MCMCAdaptor1D.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2018

10.44 MCMCAdaptor1D.h File Reference

The class declaration and inline and templated functions for MCMCAdaptor1D.

```
#include "Mappel/MCMCAdaptorBase.h"  
#include "Mappel/PointEmitterModel.h"
```

Classes

- class [mappel::MCMCAdaptor1D](#)

Namespaces

- [mappel](#)

10.44.1 Detailed Description

The class declaration and inline and templated functions for MCMCAdaptor1D.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2018-2019

10.45 MCMCAdaptor1Ds.cpp File Reference

The class definition and template Specializations for MCMCAdaptor1Ds.

```
#include "Mappel/MCMCAdaptor1Ds.h"
```

Namespaces

- [mappel](#)

10.45.1 Detailed Description

The class definition and template Specializations for MCMCAdaptor1Ds.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2018

10.46 MCMCAdaptor1Ds.h File Reference

The class declaration and inline and templated functions for MCMCAdaptor1Ds.

```
#include "Mappel/MCMCAdaptor1D.h"
```

Classes

- class [mappel::MCMCAdaptor1Ds](#)

Namespaces

- [mappel](#)

10.46.1 Detailed Description

The class declaration and inline and templated functions for MCMCAdaptor1Ds.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2018-2019

10.47 MCMCAdaptor2D.cpp File Reference

The class definition and template Specializations for MCMCAdaptor2D.

```
#include "Mappel/MCMCAdaptor2D.h"
```

Namespaces

- [mappel](#)

10.47.1 Detailed Description

The class definition and template Specializations for MCMCAdaptor2D.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2018

10.48 MCMCAdaptor2D.h File Reference

The class declaration and inline and templated functions for MCMCAdaptor2D.

```
#include "Mappel/MCMCAdaptor1D.h"
```

Classes

- class [mappel::MCMCAdaptor2D](#)

Namespaces

- [mappel](#)

10.48.1 Detailed Description

The class declaration and inline and templated functions for MCMCAdaptor2D.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2018-2019

10.49 MCMCAdaptor2Ds.cpp File Reference

The class definition and template Specializations for MCMCAdaptor2Ds.

```
#include "Mappel/MCMCAdaptor2Ds.h"
```

Namespaces

- [mappel](#)

10.49.1 Detailed Description

The class definition and template Specializations for MCMCAdaptor2Ds.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2018

10.50 MCMCAdaptor2Ds.h File Reference

The class declaration and inline and templated functions for MCMCAdaptor2Ds.

```
#include "Mappel/MCMCAdaptor2D.h"
```

Classes

- class [mappel::MCMCAdaptor2Ds](#)

Namespaces

- [mappel](#)

10.50.1 Detailed Description

The class declaration and inline and templated functions for MCMCAdaptor2Ds.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2018-2019

10.51 MCMCAdaptorBase.cpp File Reference

The class definition and template Specializations for MCMCAdaptorBase.

```
#include "Mappel/MCMCAdaptorBase.h"
```

Namespaces

- [mappel](#)

10.51.1 Detailed Description

The class definition and template Specializations for MCMCAdaptorBase.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2014-2018

10.52 MCMCAdaptorBase.h File Reference

The class declaration and inline and templated functions for MCMCAdaptorBase.

```
#include "Mappel/util.h"
```

Classes

- class [mappel::MCMCAdaptorBase](#)

Namespaces

- [mappel](#)

10.52.1 Detailed Description

The class declaration and inline and templated functions for MCMCAdaptorBase.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2018

10.53 MLEstimator.h File Reference

Class declaration and inline and templated functions for MLEstimator.

```
#include "Mappel/PointEmitterModel.h"
#include "Mappel/MAPEstimator.h"
```

Classes

- class [mappel::MLEstimator](#)
A Mixin class to configure a for MLE estimation (null prior).

Namespaces

- [mappel](#)
- [mappel::methods](#)
Templated functions for operating on a [PointEmitterModel](#).
- [mappel::methods::objective](#)
- [mappel::methods::objective::debug](#)

Functions

- `template<class Model >`
`ReturnIfSubclassT< double, Model, MLEstimator > mappel::methods::objective::llh (const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s)`
- `template<class Model >`
`ReturnIfSubclassT< double, Model, MLEstimator > mappel::methods::objective::rllh (const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s)`
- `template<class Model >`
`ReturnIfSubclassT< ParamT< Model >, Model, MLEstimator > mappel::methods::objective::grad (const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s)`
- `template<class Model >`
`ReturnIfSubclassT< void, Model, MLEstimator > mappel::methods::objective::grad2 (const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s, ParamT< Model > &grad, ParamT< Model > &grad2)`
- `template<class Model >`
`ReturnIfSubclassT< void, Model, MLEstimator > mappel::methods::objective::hessian (const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s, ParamT< Model > &grad, MatT &hess)`
- `template<class Model >`
`ReturnIfSubclassT< VecT, Model, MLEstimator > mappel::methods::objective::debug::llh_components (const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s)`
- `template<class Model >`
`ReturnIfSubclassT< VecT, Model, MLEstimator > mappel::methods::objective::debug::rllh_components (const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s)`
- `template<class Model >`
`ReturnIfSubclassT< MatT, Model, MLEstimator > mappel::methods::objective::debug::grad_components (const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s)`
- `template<class Model >`
`ReturnIfSubclassT< CubeT, Model, MLEstimator > mappel::methods::objective::debug::hessian_components (const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s)`

10.53.1 Detailed Description

Class declaration and inline and templated functions for MLEstimator.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2017

10.54 model_methods.h File Reference

```
#include "Mappel/mcmc_data.h"
#include "Mappel/estimator.h"
#include "Mappel/mcmc.h"
#include "Mappel/openmp_methods.h"
#include "Mappel/model_methods_impl.h"
#include "Mappel/estimator_impl.h"
```

Namespaces

- [mappel](#)
- [mappel::methods](#)
 - Templated functions for operating on a [PointEmitterModel](#).*
- [mappel::methods::objective](#)
- [mappel::methods::objective::debug](#)
- [mappel::methods::debug](#)

Functions

- `template<class Model >`
`ImageT< Model > mappel::methods::model_image (const Model &model, const ParamT< Model > &theta)`
- `template<class Model, class rng_t >`
`ModelDataT< Model > mappel::methods::simulate_image (const Model &model, const ParamT< Model > &theta)`
- `template<class Model, class rng_t >`
`ModelDataT< Model > mappel::methods::simulate_image (const Model &model, const ParamT< Model > &theta, rng_t &rng)`
- `template<class Model >`
`ModelDataT< Model > mappel::methods::simulate_image (const Model &model, const StencilT< Model > &s)`
- `template<class Model >`
`ModelDataT< Model > mappel::methods::simulate_image_from_model (const Model &model, const ImageT< Model > &model_im)`

- `template<class Model >`
`double mappel::methods::objective::llh (const Model &model, const ModelDataT< Model > &data_im, const ParamT< Model > &theta)`
- `template<class Model >`
`double mappel::methods::objective::rllh (const Model &model, const ModelDataT< Model > &data_im, const ParamT< Model > &theta)`
- `template<class Model >`
`ParamT< Model > mappel::methods::objective::grad (const Model &model, const ModelDataT< Model > &data_im, const ParamT< Model > &theta)`
- `template<class Model >`
`ParamT< Model > mappel::methods::objective::grad2 (const Model &model, const ModelDataT< Model > &data_im, const ParamT< Model > &theta)`
- `template<class Model >`
`void mappel::methods::objective::grad2 (const Model &model, const ModelDataT< Model > &data_im, const ParamT< Model > &theta, ParamT< Model > &grad_val, ParamT< Model > &grad2_val)`
- `template<class Model >`
`MatT mappel::methods::objective::hessian (const Model &model, const ModelDataT< Model > &data_im, const ParamT< Model > &theta)`
- `template<class Model >`
`MatT mappel::methods::objective::hessian (const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s)`
- `template<class Model >`
`void mappel::methods::objective::hessian (const Model &model, const ModelDataT< Model > &data_im, const ParamT< Model > &theta, ParamT< Model > &grad, MatT &hess)`
- `template<class Model >`
`void mappel::methods::objective::hessian (const Model &model, const ModelDataT< Model > &data_im, const ParamT< Model > &theta, MatT &hess)`
- `template<class Model >`
`MatT mappel::methods::objective::negative_definite_hessian (const Model &model, const ModelDataT< Model > &data_im, const ParamT< Model > &theta)`
- `template<class Model >`
`MatT mappel::methods::objective::negative_definite_hessian (const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s)`
- `template<class Model >`
`void mappel::methods::objective::negative_definite_hessian (const Model &model, const ModelDataT< Model > &data_im, const ParamT< Model > &theta, ParamT< Model > &grad, MatT &hess)`
- `template<class Model >`
`void mappel::methods::objective::negative_definite_hessian (const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s, ParamT< Model > &grad, MatT &hess)`
- `template<class Model >`
`VecT mappel::methods::objective::debug::llh_components (const Model &model, const ModelDataT< Model > &data_im, const ParamT< Model > &theta)`
- `template<class Model >`
`VecT mappel::methods::objective::debug::rllh_components (const Model &model, const ModelDataT< Model > &data_im, const ParamT< Model > &theta)`
- `template<class Model >`
`MatT mappel::methods::objective::debug::grad_components (const Model &model, const ModelDataT< Model > &data_im, const ParamT< Model > &theta)`
- `template<class Model >`
`CubeT mappel::methods::objective::debug::hessian_components (const Model &model, const ModelDataT< Model > &data_im, const ParamT< Model > &theta)`
- `template<class Model >`
`void mappel::methods::aposteriori_objective (const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s, double &rllh, ParamT< Model > &grad, MatT &hess)`

- template<class Model >
void [mappel::methods::aposteriori_objective](#) (const Model &model, const ModelDataT< Model > &data_im, const ParamT< Model > &theta, double &rllh, ParamT< Model > &grad, MatT &hess)
- template<class Model >
void [mappel::methods::prior_objective](#) (const Model &model, const ParamT< Model > &theta, double &rllh, ParamT< Model > &grad, MatT &hess)
- template<class Model >
void [mappel::methods::likelihood_objective](#) (const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s, double &rllh, ParamT< Model > &grad, MatT &hess)
- template<class Model >
void [mappel::methods::likelihood_objective](#) (const Model &model, const ModelDataT< Model > &data_im, const ParamT< Model > &theta, double &rllh, ParamT< Model > &grad, MatT &hess)
- template<class Model >
ParamT< Model > [mappel::methods::cr_lower_bound](#) (const Model &model, const typename Model::Stencil &s)
Calculate the Cramer-Rao lower bound at the given parameters.
- template<class Model >
ParamT< Model > [mappel::methods::cr_lower_bound](#) (const Model &model, const ParamT< Model > &theta)
- template<class Model >
MatT [mappel::methods::expected_information](#) (const Model &model, const ParamT< Model > &theta)
- template<class Model >
MatT [mappel::methods::observed_information](#) (const Model &model, const ModelDataT< Model > &data, const ParamT< Model > &theta_mle)
- template<class Model >
MatT [mappel::methods::observed_information](#) (const Model &model, const ModelDataT< Model > &data, const StencilT< Model > &theta_mle)
- template<class Model >
void [mappel::methods::estimate_max](#) (const Model &model, const ModelDataT< Model > &data, const std::string &method, estimator::MLEData &mle)
- template<class Model >
void [mappel::methods::estimate_max](#) (const Model &model, const ModelDataT< Model > &data, const std::string &method, const ParamT< Model > &theta_init, estimator::MLEData &mle)
- template<class Model >
void [mappel::methods::estimate_max](#) (const Model &model, const ModelDataT< Model > &data, const std::string &method, estimator::MLEData &mle, StatsT &stats)
- template<class Model >
void [mappel::methods::estimate_max](#) (const Model &model, const ModelDataT< Model > &data, const std::string &method, const ParamT< Model > &theta_init, estimator::MLEData &mle, StatsT &stats)
- template<class Model >
double [mappel::methods::estimate_profile_likelihood](#) (const Model &model, const ModelDataT< Model > &data, const std::string &method, const IdxVecT &fixed_idx, const ParamT< Model > &fixed_theta_init)
- template<class Model >
double [mappel::methods::estimate_profile_likelihood](#) (const Model &model, const ModelDataT< Model > &data, const std::string &method, const IdxVecT &fixed_idx, const ParamT< Model > &fixed_theta_init, StencilT< Model > &profile_max)
- template<class Model >
double [mappel::methods::estimate_profile_likelihood](#) (const Model &model, const ModelDataT< Model > &data, const std::string &method, const IdxVecT &fixed_idx, const ParamT< Model > &fixed_theta_init, StencilT< Model > &profile_max, StatsT &stats)
- template<class Model >
void [mappel::methods::estimate_profile_likelihood](#) (const Model &model, const ModelDataT< Model > &data, const std::string &method, const ParamT< Model > &theta_init, estimator::ProfileLikelihoodData &profile_data)

- `template<class Model >`
`void mappel::methods::estimate_posterior (const Model &model, const ModelDataT< Model > &data, mcmc::MCMCData &mcmc_est)`
- `template<class Model >`
`void mappel::methods::estimate_posterior (const Model &model, const ModelDataT< Model > &data, const ParamT< Model > &theta_init, mcmc::MCMCData &mcmc_est)`
- `template<class Model >`
`void mappel::methods::error_bounds_expected (const Model &model, const ParamT< Model > &theta_est, double confidence, ParamT< Model > &theta_lb, ParamT< Model > &theta_ub)`
- `template<class Model >`
`void mappel::methods::error_bounds_observed (const Model &model, const estimator::MLEData &mle, double confidence, ParamT< Model > &theta_lb, ParamT< Model > &theta_ub)`
- `template<class Model >`
`void mappel::methods::error_bounds_profile_likelihood (const Model &model, const ModelDataT< Model > &data, estimator::ProfileBoundsData &bounds)`
- `template<class Model >`
`void mappel::methods::error_bounds_profile_likelihood (const Model &model, const ModelDataT< Model > &data, estimator::ProfileBoundsData &bounds, StatsT &stats)`
- `template<class Model >`
`void mappel::methods::error_bounds_posterior_credible (const Model &model, const MatT &sample, double confidence, ParamT< Model > &theta_lb, ParamT< Model > &theta_ub)`
- `template<class Model >`
`void mappel::methods::debug::estimate_max_debug (const Model &model, const ModelDataT< Model > &data, const std::string &method, const ParamT< Model > &theta_init, estimator::MLEDebugData &mle, StatsT &stats)`
- `template<class Model >`
`void mappel::methods::debug::error_bounds_profile_likelihood_debug (const Model &model, const ModelDataT< Model > &data, estimator::ProfileBoundsDebugData &bounds, StatsT &stats)`
- `template<class Model >`
`void mappel::methods::debug::estimate_posterior_debug (const Model &model, const ModelDataT< Model > &data, const ParamT< Model > &theta_init, mcmc::MCMCDebugData &mcmc_debug_sample)`

10.55 model_methods_impl.h File Reference

```
#include "Mappel/numerical.h"
```

Namespaces

- `mappel`
- `mappel::methods`
Templated functions for operating on a [PointEmitterModel](#).
- `mappel::methods::objective`
- `mappel::methods::objective::debug`
- `mappel::methods::debug`

Functions

- template<class Model >
Model::ImageT [mappel::methods::model_image](#) (const Model &model, const ParamT< Model > &theta)
- template<class Model >
ModelDataT< Model > [mappel::methods::simulate_image](#) (const Model &model, const ParamT< Model > &theta)
- template<class Model , class RngT >
ModelDataT< Model > [mappel::methods::simulate_image](#) (const Model &model, const ParamT< Model > &theta, RngT &rng)
- template<class Model >
ModelDataT< Model > [mappel::methods::simulate_image](#) (const Model &model, const StencilT< Model > &s)
- template<class Model >
ModelDataT< Model > [mappel::methods::simulate_image_from_model](#) (const Model &model, const ImageT< Model > &model_im)
- template<class Model >
double [mappel::methods::objective::llh](#) (const Model &model, const ModelDataT< Model > &data_im, const ParamT< Model > &theta)
- template<class Model >
double [mappel::methods::objective::rllh](#) (const Model &model, const ModelDataT< Model > &data_im, const ParamT< Model > &theta)
- template<class Model >
ParamT< Model > [mappel::methods::objective::grad](#) (const Model &model, const ModelDataT< Model > &data_im, const ParamT< Model > &theta)
- template<class Model >
ParamT< Model > [mappel::methods::objective::grad2](#) (const Model &model, const ModelDataT< Model > &data_im, const ParamT< Model > &theta)
- template<class Model >
void [mappel::methods::objective::grad2](#) (const Model &model, const ModelDataT< Model > &data_im, const ParamT< Model > &theta, ParamT< Model > &grad_val, ParamT< Model > &grad2_val)
- template<class Model >
MatT [mappel::methods::objective::hessian](#) (const Model &model, const ModelDataT< Model > &data_im, const ParamT< Model > &theta)
- template<class Model >
MatT [mappel::methods::objective::hessian](#) (const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s)
- template<class Model >
void [mappel::methods::objective::hessian](#) (const Model &model, const ModelDataT< Model > &data_im, const ParamT< Model > &theta, ParamT< Model > &grad, MatT &hess)
- template<class Model >
void [mappel::methods::objective::hessian](#) (const Model &model, const ModelDataT< Model > &data_im, const ParamT< Model > &theta, MatT &hess)
- template<class Model >
MatT [mappel::methods::objective::negative_definite_hessian](#) (const Model &model, const ModelDataT< Model > &data_im, const ParamT< Model > &theta)
- template<class Model >
MatT [mappel::methods::objective::negative_definite_hessian](#) (const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s)
- template<class Model >
void [mappel::methods::objective::negative_definite_hessian](#) (const Model &model, const ModelDataT< Model > &data_im, const ParamT< Model > &theta, ParamT< Model > &grad, MatT &hess)
- template<class Model >
void [mappel::methods::objective::negative_definite_hessian](#) (const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s, ParamT< Model > &grad, MatT &hess)

- `template<class Model >`
`VecT mappel::methods::objective::debug::llh_components` (const Model &model, const ModelDataT< Model > &data_im, const ParamT< Model > &theta)
- `template<class Model >`
`VecT mappel::methods::objective::debug::rllh_components` (const Model &model, const ModelDataT< Model > &data_im, const ParamT< Model > &theta)
- `template<class Model >`
`MatT mappel::methods::objective::debug::grad_components` (const Model &model, const ModelDataT< Model > &data_im, const ParamT< Model > &theta)
- `template<class Model >`
`CubeT mappel::methods::objective::debug::hessian_components` (const Model &model, const ModelDataT< Model > &data_im, const ParamT< Model > &theta)
- `template<class Model >`
`void mappel::methods::aposteriori_objective` (const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s, double &rllh, ParamT< Model > &grad, MatT &hess)
- `template<class Model >`
`void mappel::methods::prior_objective` (const Model &model, const ParamT< Model > &theta, double &rllh, ParamT< Model > &grad, MatT &hess)
- `template<class Model >`
`void mappel::methods::likelihood_objective` (const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s, double &rllh, ParamT< Model > &grad, MatT &hess)
- `template<class Model >`
`void mappel::methods::aposteriori_objective` (const Model &model, const ModelDataT< Model > &data_im, const ParamT< Model > &theta, double &rllh, ParamT< Model > &grad, MatT &hess)
- `template<class Model >`
`void mappel::methods::likelihood_objective` (const Model &model, const ModelDataT< Model > &data_im, const ParamT< Model > &theta, double &rllh, ParamT< Model > &grad, MatT &hess)
- `template<class Model >`
`ParamT< Model > mappel::methods::cr_lower_bound` (const Model &model, const typename Model::Stencil &s)
Calculate the Cramer-Rao lower bound at the given parameters.
- `template<class Model >`
`ParamT< Model > mappel::methods::cr_lower_bound` (const Model &model, const ParamT< Model > &theta)
- `template<class Model >`
`MatT mappel::methods::expected_information` (const Model &model, const ParamT< Model > &theta)
- `template<class Model >`
`MatT mappel::methods::observed_information` (const Model &model, const ModelDataT< Model > &data, const StencilT< Model > &theta_mle)
- `template<class Model >`
`MatT mappel::methods::observed_information` (const Model &model, const ModelDataT< Model > &data, const ParamT< Model > &theta_mle)
- `template<class Model >`
`void mappel::methods::estimate_max` (const Model &model, const ModelDataT< Model > &data, const std::string &method, estimator::MLEData &mle)
- `template<class Model >`
`void mappel::methods::estimate_max` (const Model &model, const ModelDataT< Model > &data, const std::string &method, const ParamT< Model > &theta_init, estimator::MLEData &mle)
- `template<class Model >`
`void mappel::methods::estimate_max` (const Model &model, const ModelDataT< Model > &data, const std::string &method, estimator::MLEData &mle, StatsT &stats)
- `template<class Model >`
`void mappel::methods::estimate_max` (const Model &model, const ModelDataT< Model > &data, const std::string &method, const ParamT< Model > &theta_init, estimator::MLEData &mle, StatsT &stats)

- `template<class Model >`
`double mappel::methods::estimate_profile_likelihood (const Model &model, const ModelDataT< Model > &data, const std::string &method, const IdxVecT &fixed_idx, const ParamT< Model > &fixed_theta_init)`
- `template<class Model >`
`double mappel::methods::estimate_profile_likelihood (const Model &model, const ModelDataT< Model > &data, const std::string &method, const IdxVecT &fixed_idx, const ParamT< Model > &fixed_theta_init, StencilT< Model > &profile_max)`
- `template<class Model >`
`double mappel::methods::estimate_profile_likelihood (const Model &model, const ModelDataT< Model > &data, const std::string &method, const IdxVecT &fixed_idx, const ParamT< Model > &fixed_theta_init, StencilT< Model > &profile_max, StatsT &stats)`
- `template<class Model >`
`void mappel::methods::estimate_posterior (const Model &model, const ModelDataT< Model > &data, mcmc::MCMCData &mcmc_est)`
- `template<class Model >`
`void mappel::methods::estimate_posterior (const Model &model, const ModelDataT< Model > &data, const ParamT< Model > &theta_init, mcmc::MCMCData &mcmc_est)`
- `template<class Model >`
`void mappel::methods::error_bounds_expected (const Model &model, const ParamT< Model > &theta_est, double confidence, ParamT< Model > &theta_lb, ParamT< Model > &theta_ub)`
- `template<class Model >`
`void mappel::methods::error_bounds_observed (const Model &model, const estimator::MLEData &mle, double confidence, ParamT< Model > &theta_lb, ParamT< Model > &theta_ub)`
- `template<class Model >`
`void mappel::methods::error_bounds_profile_likelihood (const Model &model, const ModelDataT< Model > &data, estimator::ProfileBoundsData &bounds)`
- `template<class Model >`
`void mappel::methods::error_bounds_profile_likelihood (const Model &model, const ModelDataT< Model > &data, estimator::ProfileBoundsData &bounds, StatsT &stats)`
- `template<class Model >`
`void mappel::methods::error_bounds_posterior_credible (const Model &model, const MatT &sample, double confidence, ParamT< Model > &theta_lb, ParamT< Model > &theta_ub)`
- `template<class Model >`
`void mappel::methods::debug::estimate_max_debug (const Model &model, const ModelDataT< Model > &data, const std::string &method, const ParamT< Model > &theta_init, estimator::MLEDebugData &mle, StatsT &stats)`
- `template<class Model >`
`void mappel::methods::debug::error_bounds_profile_likelihood_debug (const Model &model, const ModelDataT< Model > &data, estimator::ProfileBoundsDebugData &bounds, StatsT &stats)`
- `template<class Model >`
`void mappel::methods::debug::estimate_posterior_debug (const Model &model, const ModelDataT< Model > &data, const ParamT< Model > &theta_init, mcmc::MCMCDebugData &mcmc_debug_sample)`

10.56 numerical.cpp File Reference

Numerical matrix operations.

```
#include <cassert>
#include "Mappel/numerical.h"
```

Namespaces

- [mappel](#)

Functions

- void [mappel::copy_Usym_mat](#) (arma::mat &usym)
- void [mappel::copy_Usym_mat_stack](#) (arma::cube &usym_stack)
- void [mappel::copy_Lsym_mat](#) (arma::mat &lsym)
- void [mappel::cholesky_make_negative_definite](#) (arma::mat &m)
- void [mappel::cholesky_make_positive_definite](#) (arma::mat &m)
- bool [mappel::is_negative_definite](#) (const arma::mat &usym)
- bool [mappel::is_positive_definite](#) (const arma::mat &usym)
- bool [mappel::is_symmetric](#) (const arma::mat &A)
- void [mappel::cholesky_convert_lower_triangular](#) (arma::mat &chol)
- void [mappel::cholesky_convert_full_matrix](#) (arma::mat &chol)
- bool [mappel::cholesky](#) (arma::mat &A)
- bool [mappel::modified_cholesky](#) (arma::mat &A)
- arma::vec [mappel::cholesky_solve](#) (const arma::mat &C, const arma::vec &b)
- double [mappel::norm_sq](#) (const VecT &v)

10.56.1 Detailed Description

Numerical matrix operations.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2015-2019

10.57 numerical.h File Reference

Numerical matrix operations.

```
#include <cmath>
#include <climits>
#include <armadillo>
#include "Mappel/util.h"
```

Namespaces

- [mappel](#)

Functions

- void [mappel::copy_Usym_mat](#) (arma::mat &usym)
- void [mappel::copy_Usym_mat_stack](#) (arma::cube &usym_stack)
- void [mappel::copy_Lsym_mat](#) (arma::mat &lsym)
- void [mappel::cholesky_convert_lower_triangular](#) (arma::mat &chol)
- void [mappel::cholesky_convert_full_matrix](#) (arma::mat &chol)
- void [mappel::cholesky_make_negative_definite](#) (arma::mat &m)
- void [mappel::cholesky_make_positive_definite](#) (arma::mat &m)
- bool [mappel::is_positive_definite](#) (const arma::mat &usym)
- bool [mappel::is_negative_definite](#) (const arma::mat &usym)
- bool [mappel::is_symmetric](#) (const arma::mat &A)
- bool [mappel::cholesky](#) (arma::mat &A)
- bool [mappel::modified_cholesky](#) (arma::mat &A)
- arma::vec [mappel::cholesky_solve](#) (const arma::mat &C, const arma::vec &b)
- template<class FloatT >
FloatT [mappel::clamp](#) (FloatT val, FloatT min_val, FloatT max_val)
- double [mappel::norm_sq](#) (const VecT &v)

10.57.1 Detailed Description

Numerical matrix operations.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2015-2019

10.58 OMPEXceptionCatcher.h File Reference

A lightweight class for managing C++ exception handling strategies for OpenMP methods.

```
#include <exception>
#include <mutex>
#include <functional>
#include <cstdint>
```

Classes

- class [omp_exception_catcher::impl::OMPEXceptionCatcher<_dummy>](#)

Namespaces

- [omp_exception_catcher](#)
- [omp_exception_catcher::impl_](#)

Typedefs

- using [omp_exception_catcher::OMPExceptionCatcher](#) = [impl_::OMPExceptionCatcher](#)<>

Enumerations

- enum [omp_exception_catcher::Strategy](#) { [omp_exception_catcher::Strategy::DoNotTry](#), [omp_exception_catcher::Strategy::Continue](#), [omp_exception_catcher::Strategy::Abort](#), [omp_exception_catcher::Strategy::RethrowFirst](#) }

10.58.1 Detailed Description

A lightweight class for managing C++ exception handling strategies for OpenMP methods.

Author

Mark J. Olah (mjo@cs.unm.edu)

Date

2019

Copyright

See LICENSE file OpenMP code must catch any exceptions that may have been thrown before exiting the OpenMP block. This class acts as lightweight wrapper that allows an arbitrary function or lambda expression to be run safely and efficiently in OMP even if it might throw exceptions. We employ one of 4 possible strategies as determined By the [omp_exception_catcher::Strategies](#) enum.

Strategy's : [omp_exception_catcher::Strategies::DoNotTry](#) – Don't even try, this is a null op to completely disable this class's effect. [omp_exception_catcher::Strategies::Continue](#) – Catch exceptions and keep going [omp_exception_catcher::Strategies::Abort](#) – Catch exceptions and abort [omp_exception_catcher::Strategies::RethrowFirst](#) – Re-throws first exception thrown by any thread.

Example usage: [omp_exception_catcher::OMPExceptionCatcher](#) catcher([omp_exception_catcher::Strategies::Continue](#)); `#pragma omp parallel for for(int n=0; n < N; n++) catcher.run([&]{ my_output(n)=do_my_calculations(args(n)); }) catcher.rethrow();` //Required only if you ever might use [RethrowFirst](#) strategy

10.59 openmp_methods.h File Reference

Namespaces for OpenMP parallelized versions of the mappel::model namespace functions (external methods)

```
#include <omp.h>
#include "Mappel/OMPExcceptionCatcher/OMPExcceptionCatcher.h"
#include "Mappel/util.h"
#include "Mappel/mcmc.h"
```

Namespaces

- [mappel](#)
- [mappel::methods](#)
 - Templated functions for operating on a [PointEmitterModel](#).*
- [mappel::methods::openmp](#)
- [mappel::methods::objective](#)
- [mappel::methods::objective::openmp](#)

Functions

- `template<class Model >`
`void mappel::methods::openmp::sample_prior_stack (const Model &model, ParamVecT< Model > &theta_stack)`
Parallel sampling of the model prior.
- `template<class Model >`
`void mappel::methods::openmp::model_image_stack (const Model &model, const ParamVecT< Model > &theta_stack, ImageStackT< Model > &image_stack)`
Parallel computation of the model image.
- `template<class Model >`
`void mappel::methods::openmp::simulate_image_stack (const Model &model, const ParamVecT< Model > &theta_stack, ImageStackT< Model > &image_stack)`
Parallel simulation of images from one or more theta.
- `template<class Model >`
`void mappel::methods::openmp::cr_lower_bound_stack (const Model &model, const ParamVecT< Model > &theta_stack, ParamVecT< Model > &crib_stack)`
- `template<class Model >`
`void mappel::methods::openmp::expected_information_stack (const Model &model, const ParamVecT< Model > &theta_stack, CubeT &fisherI_stack)`
- `template<class Model >`
`void mappel::methods::openmp::estimate_max_stack (const Model &model, const ModelDataStackT< Model > &data_stack, const std::string &method, estimator::MLEDataStack &mle_data_stack)`
- `template<class Model >`
`void mappel::methods::openmp::estimate_max_stack (const Model &model, const ModelDataStackT< Model > &data_stack, const std::string &method, ParamVecT< Model > &theta_init_stack, estimator::MLEDataStack &mle_data_stack)`
- `template<class Model >`
`void mappel::methods::openmp::estimate_max_stack (const Model &model, const ModelDataStackT< Model > &data_stack, const std::string &method, ParamVecT< Model > &theta_init_stack, estimator::MLEDataStack &mle_data_stack, StatsT &stats)`

- `template<class Model >`
`void mappel::methods::openmp::estimate_profile_likelihood_stack (const Model &model, const ModelDataT< Model > &data, const std::string &method, const ParamVecT< Model > &fixed_theta_init, estimator::Profile< LikelihoodData &est)`
- `template<class Model >`
`void mappel::methods::openmp::estimate_profile_likelihood_stack (const Model &model, const ModelDataT< Model > &data, const std::string &method, const ParamVecT< Model > &fixed_theta_init, estimator::Profile< LikelihoodData &est, StatsT &stats)`
- `template<class Model >`
`void mappel::methods::openmp::estimate_posterior_stack (const Model &model, const ModelDataStackT< Model > &data_stack, const ParamVecT< Model > &theta_init_stack, mcmc::MCMCDataStack &est)`
- `template<class Model >`
`void mappel::methods::openmp::estimate_posterior_stack (const Model &model, const ModelDataStackT< Model > &data_stack, mcmc::MCMCDataStack &est)`
- `template<class Model >`
`void mappel::methods::openmp::error_bounds_expected_stack (const Model &model, const MatT &theta_est_< stack, double confidence, MatT &theta_lb_stack, MatT &theta_ub_stack)`
- `template<class Model >`
`void mappel::methods::openmp::error_bounds_observed_stack (const Model &model, const MatT &theta_est_< stack, CubeT &obsl_stack, double confidence, MatT &theta_lb_stack, MatT &theta_ub_stack)`
- `template<class Model >`
`void mappel::methods::openmp::error_bounds_profile_likelihood_parallel (const Model &model, const Model< DataStackT< Model > &image, estimator::ProfileBoundsData &est, StatsT &stats)`
- `template<class Model >`
`void mappel::methods::openmp::error_bounds_profile_likelihood_parallel (const Model &model, const Model< DataT< Model > &image, estimator::ProfileBoundsData &est)`
- `template<class Model >`
`void mappel::methods::openmp::error_bounds_profile_likelihood_stack (const Model &model, const ModelData< StackT< Model > &image, estimator::ProfileBoundsDataStack &est, StatsT &stats)`
- `template<class Model >`
`void mappel::methods::openmp::error_bounds_profile_likelihood_stack (const Model &model, const ModelData< StackT< Model > &image, estimator::ProfileBoundsDataStack &est)`
- `template<class Model >`
`void mappel::methods::objective::openmp::llh_stack (const Model &model, const ImageT< Model > &image, const ParamVecT< Model > &theta_stack, VecT &llh_stack)`
Parallel log_likelihood calculations for a single image.
- `template<class Model >`
`void mappel::methods::objective::openmp::llh_stack (const Model &model, const ImageStackT< Model > &image_stack, const ParamVecT< Model > &theta_stack, VecT &llh_stack)`
Parallel log_likelihood calculations for a stack of images.
- `template<class Model >`
`void mappel::methods::objective::openmp::rllh_stack (const Model &model, const ImageStackT< Model > &image_stack, const ParamVecT< Model > &theta_stack, VecT &rllh_stack)`
Parallel relative log_likelihood calculations for a stack of images.
- `template<class Model >`
`void mappel::methods::objective::openmp::rllh_stack (const Model &model, const ImageT< Model > &image, const ParamVecT< Model > &theta_stack, VecT &rllh_stack)`
- `template<class Model >`
`void mappel::methods::objective::openmp::grad_stack (const Model &model, const ImageStackT< Model > &image_stack, const ParamVecT< Model > &theta_stack, ParamVecT< Model > &grad_stack)`
Parallel model gradient calculations for a stack of images.

- `template<class Model >`
`void mappel::methods::objective::openmp::hessian_stack (const Model &model, const ImageStackT< Model > &image_stack, const ParamVecT< Model > &theta_stack, CubeT &hessian_stack)`
Parallel model Hessian calculations for a stack of images.
- `template<class Model >`
`void mappel::methods::objective::openmp::negative_definite_hessian_stack (const Model &model, const ImageStackT< Model > &image_stack, const ParamVecT< Model > &theta_stack, CubeT &hessian_stack)`
Parallel model negative_definite Hessian approximation calculations for a stack of images.

10.59.1 Detailed Description

Namespaces for OpenMP parallelized versions of the mappel::model namespace functions (external methods)

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2013-2019 OpenMP computation for stacked Model operations on vector data.

Design Decisions

- OpenMP vectorized versions are implemented as templated external methods in inline namespaces openmp. This allows easy future replacement with other parallelization mechanisms (CUDA, C++11 threads, etc..). Also allows the vectorized versions to directly overload with the non-vectorized base-versions.
- Because we want to integrate as seamlessly as possible with matlab, we use the armadillo package which stores arrays in column major order.
- Therefore in the *_stack operations, if they are to be parallelized, we want the data stored as a nParms X n matrix, i.e. each column is a parameter matrix. Similarly stacks are size X size X n, so that contiguous images sequences are contiguous in memory. This avoids false sharing.

10.60 PointEmitterModel.cpp File Reference

The class definition and template Specializations for PointEmitterModel.

```
#include <cmath>
#include <algorithm>
#include "Mappel/PointEmitterModel.h"
```

Namespaces

- [mappel](#)

10.60.1 Detailed Description

The class definition and template Specializations for PointEmitterModel.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

03-13-2014

10.61 PointEmitterModel.h File Reference

The class declaration and inline and templated functions for PointEmitterModel.

```
#include <iostream>
#include <string>
#include <armadillo>
#include <PriorHessian/CompositeDist.h>
#include <PriorHessian/TruncatedNormalDist.h>
#include <PriorHessian/ScaledSymmetricBetaDist.h>
#include <PriorHessian/TruncatedGammaDist.h>
#include <PriorHessian/TruncatedParetoDist.h>
#include "Mappel/util.h"
#include "Mappel/stencil.h"
#include "Mappel/display.h"
#include "Mappel/rng.h"
```

Classes

- class [mappel::PointEmitterModel](#)
A virtual Base type for point emitter localization models.

Namespaces

- [mappel](#)

Functions

- template<class Model , typename = EnableIfSubclassT<Model,PointEmitterModel>>
std::ostream & [mappel::operator<<](#) (std::ostream &out, const Model &model)

10.61.1 Detailed Description

The class declaration and inline and templated functions for PointEmitterModel.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2014-2019 The base class for all point emitter localization models

10.62 PoissonGaussianNoise2DObjective.cpp File Reference

```
#include "Mappel/PoissonGaussianNoise2DObjective.h"
```

Namespaces

- [mappel](#)

10.63 PoissonGaussianNoise2DObjective.h File Reference

The class declaration and inline and templated functions for [PoissonGaussianNoise2DObjective](#).

```
#include "Mappel/PoissonNoise2D.h"
```

Classes

- class [PoissonGaussianNoise2DObjective< ModelBase >](#)
A Base type for point emitter localization models that use 2d images.

Functions

- `template<class Model >`
`std::enable_if< std::is_base_of< PoissonGaussianNoise2DObjective, Model >::value, typename Model::ImageT >::type model_image (const Model &model, const typename Model::Stencil &s)`
- `template<class Model, class rng_t >`
`std::enable_if< std::is_base_of< PoissonGaussianNoise2DObjective, Model >::value, typename Model::ImageT >::type simulate_image (const Model &model, const typename Model::Stencil &s, rng_t &rng)`
Simulate an image using the PSF model, by generating Poisson noise.
- `template<class Model, class rng_t >`
`std::enable_if< std::is_base_of< PoissonGaussianNoise2DObjective, Model >::value, typename Model::ImageT >::type simulate_image (const Model &model, const typename Model::ImageT &model_im, rng_t &rng)`
- `template<class Model >`
`std::enable_if< std::is_base_of< PoissonGaussianNoise2DObjective, Model >::value >::type model_grad (const Model &model, const typename Model::ImageT &im, const typename Model::Stencil &s, typename Model::ParamT &grad)`
- `template<class Model >`
`std::enable_if< std::is_base_of< PoissonGaussianNoise2DObjective, Model >::value >::type model_grad2 (const Model &model, const typename Model::ImageT &im, const typename Model::Stencil &s, typename Model::ParamT &grad, typename Model::ParamT &grad2)`
- `template<class Model >`
`std::enable_if< std::is_base_of< PoissonGaussianNoise2DObjective, Model >::value >::type model_hessian (const Model &model, const typename Model::ImageT &im, const typename Model::Stencil &s, typename Model::ParamT &grad, typename Model::MatT &hess)`
- `template<class Model >`
`std::enable_if< std::is_base_of< PoissonGaussianNoise2DObjective, Model >::value, double >::type log_likelihood (const Model &model, const typename Model::ImageT &data_im, const typename Model::Stencil &s)`
- `template<class Model >`
`std::enable_if< std::is_base_of< PoissonGaussianNoise2DObjective, Model >::value, double >::type relative_log_likelihood (const Model &model, const typename Model::ImageT &data_im, const typename Model::Stencil &s)`
- `template<class Model >`
`std::enable_if< std::is_base_of< PoissonGaussianNoise2DObjective, Model >::value, typename Model::MatT >::type fisher_information (const Model &model, const typename Model::Stencil &s)`
- `template<class Model >`
`std::enable_if< std::is_base_of< PoissonGaussianNoise2DObjective, Model >::value, std::shared_ptr< Estimator< Model > > >::type make_estimator (const Model &model, std::string ename)`

10.63.1 Detailed Description

The class declaration and inline and templated functions for [PoissonGaussianNoise2DObjective](#).

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

04-2017

10.63.2 Function Documentation

10.63.2.1 `template<class Model > std::enable_if<std::is_base_of<PoissonGaussianNoise2DObjective,Model><←
::value,typename Model::MatT>::type fisher_information (const Model & model, const typename Model::Stencil & s
)`

Definition at line 200 of file PoissonGaussianNoise2DObjective.h.

10.63.2.2 `template<class Model > std::enable_if<std::is_base_of<PoissonGaussianNoise2DObjective,Model><←
::value,double>::type log_likelihood (const Model & model, const typename Model::ImageT & data_im, const typename
Model::Stencil & s)`

Definition at line 172 of file PoissonGaussianNoise2DObjective.h.

References `mappel::methods::objective::llh()`, and `mappel::poisson_log_likelihood()`.

10.63.2.3 `template<class Model > std::enable_if<std::is_base_of<PoissonGaussianNoise2DObjective,Model><←
::value,std::shared_ptr<Estimator<Model> > >::type make_estimator (const Model & model, std::string ename
)`

Definition at line 217 of file PoissonGaussianNoise2DObjective.h.

References `mappel::istarts_with()`.

10.63.2.4 `template<class Model > std::enable_if<std::is_base_of<PoissonGaussianNoise2DObjective,Model>::value><←
::type model_grad (const Model & model, const typename Model::ImageT & im, const typename Model::Stencil & s,
typename Model::ParamT & grad)`

Definition at line 101 of file PoissonGaussianNoise2DObjective.h.

10.63.2.5 `template<class Model > std::enable_if<std::is_base_of<PoissonGaussianNoise2DObjective,Model>::value><←
::type model_grad2 (const Model & model, const typename Model::ImageT & im, const typename Model::Stencil & s,
typename Model::ParamT & grad, typename Model::ParamT & grad2)`

Definition at line 119 of file PoissonGaussianNoise2DObjective.h.

10.63.2.6 `template<class Model > std::enable_if<std::is_base_of<PoissonGaussianNoise2DObjective,Model>::value><←
::type model_hessian (const Model & model, const typename Model::ImageT & im, const typename Model::Stencil & s,
typename Model::ParamT & grad, typename Model::MatT & hess)`

Definition at line 148 of file PoissonGaussianNoise2DObjective.h.

10.63.2.7 `template<class Model > std::enable_if<std::is_base_of<PoissonGaussianNoise2DObjective,Model><←
::value,typename Model::ImageT>::type model_image (const Model & model, const typename Model::Stencil & s
)`

Definition at line 59 of file PoissonGaussianNoise2DObjective.h.

10.63.2.8 `template<class Model > std::enable_if<std::is_base_of<PoissonGaussianNoise2DObjective,Model>::value,double>::type relative_log_likelihood (const Model & model, const typename Model::ImageT & data_im, const typename Model::Stencil & s)`

Definition at line 185 of file PoissonGaussianNoise2DObjective.h.

References `mappel::relative_poisson_log_likelihood()`, and `mappel::methods::objective::rllh()`.

10.63.2.9 `template<class Model , class rng_t > std::enable_if<std::is_base_of<PoissonGaussianNoise2DObjective,Model>::value,typename Model::ImageT>::type simulate_image (const Model & model, const typename Model::Stencil & s, rng_t & rng)`

Simulate an image using the PSF model, by generating Poisson noise.

Parameters

out	<i>image</i>	An image to populate.
in	<i>theta</i>	The parameter values to us
in, out	<i>rng</i>	An initialized random number generator

Definition at line 78 of file PoissonGaussianNoise2DObjective.h.

References `mappel::generate_poisson()`.

10.63.2.10 `template<class Model , class rng_t > std::enable_if<std::is_base_of<PoissonGaussianNoise2DObjective,Model>::value,typename Model::ImageT>::type simulate_image (const Model & model, const typename Model::ImageT & model_im, rng_t & rng)`

Definition at line 89 of file PoissonGaussianNoise2DObjective.h.

References `mappel::generate_poisson()`.

10.64 PoissonNoise1DObjective.cpp File Reference

The class definition and template Specializations for PoissonNoise1DObjective.

```
#include "Mappel/PoissonNoise1DObjective.h"
```

Namespaces

- [mappel](#)

10.64.1 Detailed Description

The class definition and template Specializations for PoissonNoise1DObjective.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2014-2019

10.65 PoissonNoise1DObjective.h File Reference

The class declaration and inline and templated functions for PoissonNoise1DObjective.

```
#include "Mappel/ImageFormat1DBase.h"
#include "Mappel/PoissonNoise2DObjective.h"
#include "Mappel/estimator.h"
```

Classes

- class [mappel::PoissonNoise1DObjective](#)

A base class for 1D objectives with Poisson read noise. This objective function and its subclasses are for models where the only source of noise is the "shot" or "counting" or Poisson noise inherent to a discrete capture of photons given a certain mean rate of incidence on each pixel.

Namespaces

- [mappel](#)
- [mappel::methods](#)

Templated functions for operating on a [PointEmitterModel](#).

- [mappel::methods::likelihood](#)
- [mappel::methods::likelihood::debug](#)

Functions

- `template<class Model , class rng_t >`
`ReturnIfSubclassT< ModelDataT< Model >, Model, PoissonNoise1DObjective > mappel::methods::simulate_↵`
`_image (const Model &model, const StencilT< Model > &s, rng_t &rng)`
Simulate an image at a given theta stencil, by generating Poisson noise Enabled for [PoissonNoise1DObjective](#).
- `template<class Model , class rng_t >`
`ReturnIfSubclassT< ModelDataT< Model >, Model, PoissonNoise1DObjective > mappel::methods::simulate_↵`
`_image_from_model (const Model &model, const ImageT< Model > &model_im, rng_t &rng)`
Simulate an image at a given theta stencil, by generating Poisson noise Enabled for [PoissonNoise1DObjective](#).
- `template<class Model >`
`ReturnIfSubclassT< MatT, Model, PoissonNoise1DObjective > mappel::methods::expected_information (const`
`Model &model, const StencilT< Model > &s)`
Compute the expected information (Fisher information at theta). Note: Expected information is an average quantity and is independent of the data. Enabled for [PoissonNoise1DObjective](#).
- `template<class Model >`
`ReturnIfSubclassT< std::unique_ptr< estimator::Estimator< Model > >, Model, PoissonNoise1DObjective >`
`mappel::methods::make_estimator (Model &model, std::string ename)`
- `template<class Model >`
`ReturnIfSubclassT< double, Model, PoissonNoise1DObjective > mappel::methods::likelihood::llh (const Model`
`&model, const ModelDataT< Model > &data_im, const StencilT< Model > &s)`
- `template<class Model >`
`ReturnIfSubclassT< double, Model, PoissonNoise1DObjective > mappel::methods::likelihood::rllh (const Model`
`&model, const ModelDataT< Model > &data_im, const StencilT< Model > &s)`
- `template<class Model >`
`ReturnIfSubclassT< ParamT< Model >, Model, PoissonNoise1DObjective > mappel::methods::likelihood::grad`
`(const Model &model, const ModelDataT< Model > &im, const StencilT< Model > &s)`
- `template<class Model >`
`ReturnIfSubclassT< void, Model, PoissonNoise1DObjective > mappel::methods::likelihood::grad2 (const Model`
`&model, const ModelDataT< Model > &im, const StencilT< Model > &s, ParamT< Model > &grad_val,`
`ParamT< Model > &grad2_val)`
- `template<class Model >`
`ReturnIfSubclassT< void, Model, PoissonNoise1DObjective > mappel::methods::likelihood::hessian (const`
`Model &model, const ModelDataT< Model > &im, const StencilT< Model > &s, ParamT< Model > &grad_val,`
`MatT &hess_val)`
- `template<class Model >`
`ReturnIfSubclassT< VecT, Model, PoissonNoise1DObjective > mappel::methods::likelihood::debug::llh_↵`
`components (const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s)`
- `template<class Model >`
`ReturnIfSubclassT< VecT, Model, PoissonNoise1DObjective > mappel::methods::likelihood::debug::rllh_↵`
`components (const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s)`
- `template<class Model >`
`ReturnIfSubclassT< MatT, Model, PoissonNoise1DObjective > mappel::methods::likelihood::debug::grad_↵`
`components (const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s)`
- `template<class Model >`
`ReturnIfSubclassT< CubeT, Model, PoissonNoise1DObjective > mappel::methods::likelihood::debug::hessian_↵`
`_components (const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s)`

10.65.1 Detailed Description

The class declaration and inline and templated functions for `PoissonNoise1DObjective`.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2014-2019

10.66 PoissonNoise2DObjective.cpp File Reference

The class definition and template Specializations for PoissonNoise2DObjective.

```
#include "Mappel/PoissonNoise2DObjective.h"
```

Namespaces

- [mappel](#)

10.66.1 Detailed Description

The class definition and template Specializations for PoissonNoise2DObjective.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2014-2019

10.67 PoissonNoise2DObjective.h File Reference

The class declaration and inline and templated functions for PoissonNoise2DObjective.

```
#include "Mappel/ImageFormat2DBase.h"  
#include "Mappel/estimator.h"
```

Classes

- class [mappel::PoissonNoise2DObjective](#)

A base class for 2D objectives with Poisson read noise. This objective function and its subclasses are for models where the only source of noise is the "shot" or "counting" or Poisson noise inherent to a discrete capture of photons given a certain mean rate of incidence on each pixel.

Namespaces

- [mappel](#)
- [mappel::methods](#)
 - *Templated functions for operating on a [PointEmitterModel](#).*
- [mappel::methods::likelihood](#)
- [mappel::methods::likelihood::debug](#)

Functions

- `template<class Model, class rng_t>`
`ReturnIfSubclassT< ImageT< Model >, Model, PoissonNoise2DObjective > mappel::methods::simulate_image`
`(const Model &model, const StencilT< Model > &s, rng_t &rng)`
Simulate an image at a given theta stencil, by generating Poisson noise Enabled for [PoissonNoise2DObjective](#).
- `template<class Model, class rng_t>`
`ReturnIfSubclassT< ImageT< Model >, Model, PoissonNoise2DObjective > mappel::methods::simulate_image_from_model`
`(const Model &model, const ImageT< Model > &model_im, rng_t &rng)`
Simulate an image at a given theta stencil, by generating Poisson noise Enabled for [PoissonNoise2DObjective](#).
- `template<class Model>`
`ReturnIfSubclassT< MatT, Model, PoissonNoise2DObjective > mappel::methods::expected_information`
`(const Model &model, const StencilT< Model > &s)`
Compute the expected information (Fisher information at theta). Note: Expected information is an average quantity and is independent of the data. Enabled for [PoissonNoise2DObjective](#).
- `template<class Model>`
`ReturnIfSubclassT< std::unique_ptr< estimator::Estimator< Model > >, Model, PoissonNoise2DObjective > mappel::methods::make_estimator`
`(Model &model, std::string ename)`
- `template<class Model>`
`ReturnIfSubclassT< double, Model, PoissonNoise2DObjective > mappel::methods::likelihood::llh`
`(const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s)`
- `template<class Model>`
`ReturnIfSubclassT< double, Model, PoissonNoise2DObjective > mappel::methods::likelihood::rllh`
`(const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s)`
- `template<class Model>`
`ReturnIfSubclassT< ParamT< Model >, Model, PoissonNoise2DObjective > mappel::methods::likelihood::grad`
`(const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s)`
- `template<class Model>`
`ReturnIfSubclassT< void, Model, PoissonNoise2DObjective > mappel::methods::likelihood::grad2`
`(const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s, ParamT< Model > &grad_val, ParamT< Model > &grad2_val)`
- `template<class Model>`
`ReturnIfSubclassT< void, Model, PoissonNoise2DObjective > mappel::methods::likelihood::hessian`
`(const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s, ParamT< Model > &grad_val, MatT &hess_val)`
- `template<class Model>`
`ReturnIfSubclassT< VecT, Model, PoissonNoise2DObjective > mappel::methods::likelihood::debug::llh_components`
`(const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s)`
- `template<class Model>`
`ReturnIfSubclassT< VecT, Model, PoissonNoise2DObjective > mappel::methods::likelihood::debug::rllh_components`
`(const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s)`
- `template<class Model>`
`ReturnIfSubclassT< MatT, Model, PoissonNoise2DObjective > mappel::methods::likelihood::debug::grad_components`
`(const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s)`

- `template<class Model >`
`ReturnIfSubclassT< CubeT, Model, PoissonNoise2DObjective > mappel::methods::likelihood::debug::hessian↔`
`_components (const Model &model, const ModelDataT< Model > &data_im, const StencilT< Model > &s)`

10.67.1 Detailed Description

The class declaration and inline and templated functions for PoissonNoise2DObjective.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2014-2019

10.68 README.md File Reference

10.69 README.md File Reference

10.70 rng.cpp File Reference

Global random number generator.

```
#include "Mappel/rng.h"
```

Namespaces

- [mappel](#)

Variables

- `ParallelRngManagerT` [mappel::rng_manager](#)

10.70.1 Detailed Description

Global random number generator.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2014-2019

10.71 rng.h File Reference

Random number generation usign sfmt.

```
#include <random>
#include "Mappel/util.h"
#include <trng/lcg64_shift.hpp>
#include <ParallelRngManager/ParallelRngManager.h>
```

Namespaces

- [mappel](#)

Typedefs

- using [mappel::ParallelRngGeneratorT](#) = trng::lcg64_shift
- using [mappel::ParallelRngManagerT](#) = parallel_rng::ParallelRngManager< ParallelRngGeneratorT >
- using [mappel::RngSeedT](#) = parallel_rng::SeedT
- using [mappel::UniformDistT](#) = std::uniform_real_distribution< double >

Functions

- template<class RngT >
IdxT [mappel::generate_poisson_small](#) (RngT &rng, double mu)
Generates a single Poisson distributed int from distribution with mean mu.
- template<class RngT >
IdxT [mappel::generate_poisson_large](#) (RngT &rng, double mu)
- template<class RngT >
double [mappel::generate_poisson](#) (RngT &rng, double mu)

10.71.1 Detailed Description

Random number generation usign sfmt.

Author

Mark J. Olah (email mjo@cs.unm.edu)

Date

2013-2019

10.72 stencil.cpp File Reference

The stencils for pixel based computations.

```
#include <sstream>
#include <boost/math/special_functions/erf.hpp>
#include <boost/math/distributions/chi_squared.hpp>
#include "Mappel/util.h"
#include "Mappel/stencil.h"
#include "Mappel/display.h"
```

Namespaces

- [mappel](#)

Functions

- double [mappel::normal_quantile_twosided](#) (double confidence)
- double [mappel::normal_quantile_onesided](#) (double confidence)
- double [mappel::chisq_quantile](#) (double confidence, int dof)
- double [mappel::chisq_quantile](#) (double confidence)
- void [mappel::fill_gaussian_stencil](#) (int size, double stencil[], double sigma)
- double [mappel::gaussian_convolution](#) (int x, int y, const MatT &data, const VecT &Xstencil, const VecT &Ystencil)
- void [mappel::estimate_gaussian_2Dmax](#) (const MatT &data, const VecT &Xstencil, const VecT &Ystencil, int max_pos[], double &min_val)
- void [mappel::refine_gaussian_2Dmax](#) (const MatT &data, const VecT &Xstencil, const VecT &Ystencil, int max_pos[], double &min_val)
- double [mappel::gaussian_3D_convolution](#) (int x, int y, int z, const CubeT &data, const VecFieldT &stencils)
- void [mappel::estimate_gaussian_3Dmax](#) (const CubeT &data, const VecFieldT &stencils, int max_pos[], double &min_val)
- void [mappel::refine_gaussian_3Dmax](#) (const CubeT &data, const VecFieldT &stencils, int max_pos[], double &min_val)
- double [mappel::estimate_background](#) (const MatT &im, const MatT &unit_model_im, double min_bg)
- double [mappel::estimate_intensity](#) (const MatT &im, const MatT &unit_model_im, double bg)
- double [mappel::estimate_background](#) (const CubeT &im, const CubeT &unit_model_im)
- double [mappel::estimate_intensity](#) (const CubeT &im, const CubeT &unit_model_im, double bg)

10.72.1 Detailed Description

The stencils for pixel based computations.

General utilities and helpers for Mappel.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2014-2019

10.73 stencil.h File Reference

The stencils for pixel based computations.

```
#include <cmath>
#include <climits>
#include "Mappel/util.h"
#include "Mappel/rng.h"
```

Namespaces

- [mappel](#)

Functions

- double [mappel::gauss_norm](#) (double sigma)
- void [mappel::fill_d_stencil](#) (int size, double stencil[], double theta_x)
- void [mappel::fill_G_stencil](#) (int size, double stencil[], const double dx[], double theta_sigma)
- void [mappel::fill_X_stencil](#) (int size, double stencil[], const double dx[], double theta_sigma)
- void [mappel::fill_DX_stencil](#) (int size, double stencil[], const double Gx[], double theta_sigma)
- void [mappel::fill_DXS_stencil](#) (int size, double stencil[], const double dx[], const double Gx[], double theta_sigma)
- void [mappel::fill_DXS2_stencil](#) (int size, double stencil[], const double dx[], const double Gx[], const double D↔XS[], double theta_sigma)
- void [mappel::fill_DXSX_stencil](#) (int size, double stencil[], const double dx[], const double Gx[], const double DX[], double theta_sigma)
- VecT [mappel::make_d_stencil](#) (int size, double theta_x)
- VecT [mappel::make_G_stencil](#) (int size, const VecT &dx, double theta_sigma)
- VecT [mappel::make_X_stencil](#) (int size, const VecT &dx, double theta_sigma)
- VecT [mappel::make_DX_stencil](#) (int size, const VecT &Gx, double theta_sigma)
- VecT [mappel::make_DXS_stencil](#) (int size, const VecT &dx, const VecT &Gx, double theta_sigma)
- VecT [mappel::make_DXS2_stencil](#) (int size, const VecT &dx, const VecT &Gx, const VecT &DXS, double theta↔_sigma)
- VecT [mappel::make_DXSX_stencil](#) (int size, const VecT &dx, const VecT &Gx, const VecT &DX, double theta↔_sigma)
- void [mappel::fill_gaussian_stencil](#) (int size, double stencil[], double sigma)
- VecT [mappel::make_gaussian_stencil](#) (int size, double sigma)
- void [mappel::estimate_gaussian_2Dmax](#) (const MatT &data, const VecT &Xstencil, const VecT &Ystencil, int max_pos[], double &min_val)
- void [mappel::refine_gaussian_2Dmax](#) (const MatT &data, const VecT &Xstencil, const VecT &Ystencil, int max↔_pos[])
- double [mappel::gaussian_convolution](#) (int x, int y, const MatT &data, const VecT &Xstencil, const VecT &Ystencil)
- void [mappel::estimate_gaussian_3Dmax](#) (const CubeT &data, const VecFieldT &stencils, int max_pos[], double &min_val)
- void [mappel::refine_gaussian_3Dmax](#) (const CubeT &data, const VecFieldT &stencils, int max_pos[])
- double [mappel::gaussian_3D_convolution](#) (int x, int y, int z, const CubeT &data, const VecFieldT &stencils)
- double [mappel::poisson_log_likelihood](#) (double model_val, double data_val)
- double [mappel::relative_poisson_log_likelihood](#) (double model_val, double data_val)
- double [mappel::check_lower_bound_hyperparameter](#) (const char *name, double value, double lower_bound)

- double [mappel::check_positive_hyperparameter](#) (const char *name, double value, double hyperprior_epsilon=1E-6)
- double [mappel::check_unit_hyperparameter](#) (const char *name, double value, double hyperprior_epsilon=1E-6)
- double [mappel::log_prior_beta_const](#) (double beta)
- double [mappel::log_prior_beta2_const](#) (double beta0, double beta1)
- double [mappel::log_prior_gamma_const](#) (double kappa, double mean)
- double [mappel::log_prior_pareto_const](#) (double alpha, double min)
- double [mappel::log_prior_normal_const](#) (double sigma)
- double [mappel::rllh_beta_prior](#) (double beta, double v, double max=1., double min=0.)
- double [mappel::rllh_beta2_prior](#) (double beta0, double beta1, double v, double max=1., double min=0.)
- double [mappel::rllh_gamma_prior](#) (double kappa, double mean, double v)
- double [mappel::rllh_pareto_prior](#) (double alpha, double v)
- double [mappel::rllh_normal_prior](#) (double mu, double sigma)
- double [mappel::beta_prior_grad](#) (double beta, double v, double max=1., double min=0.)
- double [mappel::beta2_prior_grad](#) (double beta0, double beta1, double v, double max=1., double min=0.)
- double [mappel::gamma_prior_grad](#) (double kappa, double mean, double v)
- double [mappel::pareto_prior_grad](#) (double alpha, double v)
- double [mappel::normal_prior_grad](#) (double mu, double sigma)
- double [mappel::beta_prior_grad2](#) (double beta, double v, double max=1., double min=0.)
- double [mappel::beta2_prior_grad2](#) (double beta0, double beta1, double v, double max=1., double min=0.)
- double [mappel::gamma_prior_grad2](#) (double kappa, double v)
- double [mappel::pareto_prior_grad2](#) (double alpha, double v)
- double [mappel::normal_prior_grad](#) (double sigma)
- double [mappel::normal_quantile_twosided](#) (double confidence)
- double [mappel::normal_quantile_onesided](#) (double confidence)
- double [mappel::chisq_quantile](#) (double confidence, int dof)
- double [mappel::chisq_quantile](#) (double confidence)
- double [mappel::rllh_normal_prior](#) (double mu, double sigma, double v)
- double [mappel::normal_prior_grad](#) (double mu, double sigma, double v)
- double [mappel::normal_prior_grad2](#) (double sigma)

10.73.1 Detailed Description

The stencils for pixel based computations.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2014-2019

10.74 util.cpp File Reference

```
#include <sched.h>
#include <cctype>
#include <omp.h>
#include "Mappel/util.h"
```

Namespaces

- [mappel](#)

Functions

- void [mappel::enable_all_cpus](#) ()
- bool [mappel::istarts_with](#) (const char *s, const char *pattern)
- bool [mappel::istarts_with](#) (const std::string &str, const char *pattern)
- const char * [mappel::icontains](#) (const char *s, const char *pattern)
- int [mappel::maxidx](#) (const VecT &v)
- std::ostream & [mappel::operator<<](#) (std::ostream &out, const StatsT &stats)

10.75 util.h File Reference

Common utilities and errors.

```
#include <cstdint>
#include <cmath>
#include <memory>
#include <utility>
#include <string>
#include <map>
#include <sstream>
#include <armadillo>
#include <BacktraceException/BacktraceException.h>
```

Classes

- struct [mappel::ParameterValueError](#)
Parameter value is not valid.
- struct [mappel::ArrayShapeError](#)
Array is not of the right dimensionality.
- struct [mappel::ArraySizeError](#)
Array is not of the right size.
- struct [mappel::ModelBoundsError](#)
Access outside the model bounds is attempted.
- struct [mappel::NumericalError](#)
Expected numerical condition does not hold.
- struct [mappel::LogicalError](#)
Failure of code or algorithm logic.
- struct [mappel::NotImplementedError](#)
Feature not yet implemented.

Namespaces

- [mappel](#)

Typedefs

- using [mappel::BoolT](#) = uint16_t
- using [mappel::BoolVecT](#) = arma::Col< uint16_t >
- using [mappel::IdxT](#) = arma::uword
- using [mappel::IdxVecT](#) = arma::Col< IdxT >
- using [mappel::IdxMatT](#) = arma::Mat< IdxT >
- using [mappel::VecT](#) = arma::vec
- using [mappel::MatT](#) = arma::mat
- using [mappel::CubeT](#) = arma::cube
- using [mappel::VecFieldT](#) = arma::field< VecT >
- using [mappel::StatsT](#) = std::map< std::string, double >
- using [mappel::StringVecT](#) = std::vector< std::string >
- template<class ModelT , class ModelBaseT >
using [mappel::EnableIfSubclassT](#) = typename std::enable_if< std::is_base_of< ModelBaseT, ModelT >::value, void >::type
- template<class ReturnT , class ModelT , class ModelBaseT >
using [mappel::ReturnIfSubclassT](#) = typename std::enable_if< std::is_base_of< ModelBaseT, ModelT >::value, ReturnT >::type
- template<class Model >
using [mappel::ImageCoordT](#) = typename Model::ImageCoordT
- template<class Model >
using [mappel::ImagePixelT](#) = typename Model::ImagePixelT
- template<class Model >
using [mappel::ParamT](#) = typename Model::ParamT
- template<class Model >
using [mappel::ParamVecT](#) = typename Model::ParamVecT
- template<class Model >
using [mappel::ImageT](#) = typename Model::ImageT
- template<class Model >
using [mappel::ModelDataT](#) = typename Model::ModelDataT
- template<class Model >
using [mappel::StencilT](#) = typename Model::Stencil
- template<class Model >
using [mappel::ImageStackT](#) = typename Model::ImageStackT
- template<class Model >
using [mappel::ModelDataStackT](#) = typename Model::ModelDataStackT
- template<class Model >
using [mappel::StencilVecT](#) = typename Model::StencilVecT
- using [mappel::MappelError](#) = backtrace_exception::BacktraceException

Functions

- void `mappel::enable_all_cpus` ()
- bool `mappel::istarts_with` (const char *s, const char *pattern)
- bool `mappel::istarts_with` (const std::string &str, const char *pattern)
- const char * `mappel::icontains` (const char *s, const char *pattern)
- int `mappel::maxidx` (const VecT &v)
- template<typename T >
int `mappel::sgn` (T val)
sign (signum) function: -1/0/1
- template<typename T >
T `mappel::square` (T x)
- double `mappel::restrict_value_range` (double val, double minval, double maxval)
- template<typename T , typename... Args>
std::unique_ptr< T > `mappel::make_unique` (Args &&...args)
- std::ostream & `mappel::operator<<` (std::ostream &out, const StatsT &stats)

10.75.1 Detailed Description

Common utilities and errors.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2014-2019

Index

- ~Estimator
 - mappel::estimator::Estimator, 119
- Abort
 - omp_exception_catcher, 91
- aposteriori_objective
 - mappel::methods, 59
- ArrayShapeError
 - mappel::ArrayShapeError, 92
- ArraySizeError
 - mappel::ArraySizeError, 92
- backtrack
 - mappel::estimator::IterativeMaximizer, 559
 - mappel::estimator::NewtonDiagonalMaximizer, 702
 - mappel::estimator::NewtonMaximizer, 724
 - mappel::estimator::QuasiNewtonMaximizer, 787
 - mappel::estimator::TrustRegionMaximizer, 857
- backtrack_idxes
 - mappel::estimator::IterativeMaximizer::Maximizer↔Data, 598
- backtrack_max_ratio
 - mappel::estimator::IterativeMaximizer, 572
 - mappel::estimator::NewtonDiagonalMaximizer, 716
 - mappel::estimator::NewtonMaximizer, 737
 - mappel::estimator::QuasiNewtonMaximizer, 801
 - mappel::estimator::TrustRegionMaximizer, 871
- backtrack_min_linear_step_ratio
 - mappel::estimator::IterativeMaximizer, 572
 - mappel::estimator::NewtonDiagonalMaximizer, 716
 - mappel::estimator::NewtonMaximizer, 737
 - mappel::estimator::QuasiNewtonMaximizer, 801
 - mappel::estimator::TrustRegionMaximizer, 871
- backtrack_min_ratio
 - mappel::estimator::IterativeMaximizer, 573
 - mappel::estimator::NewtonDiagonalMaximizer, 716
 - mappel::estimator::NewtonMaximizer, 737
 - mappel::estimator::QuasiNewtonMaximizer, 801
 - mappel::estimator::TrustRegionMaximizer, 871
- beta2_prior_grad
 - mappel, 29
- beta2_prior_grad2
 - mappel, 29
- beta_prior_grad
 - mappel, 29
- beta_prior_grad2
 - mappel, 29
- bg
 - mappel::Gauss1DModel::Stencil, 838
 - mappel::Gauss1DsModel::Stencil, 824
 - mappel::Gauss2DModel::Stencil, 828
 - mappel::Gauss2DsModel::Stencil, 832
 - mappel::Gauss2DsxyModel::Stencil, 819
- BoolVecT
 - mappel, 26
- BoolT
 - mappel, 26
- bound_step
 - mappel::estimator::subroutine, 51
- bound_theta
 - mappel::Gauss1DModel, 135
 - mappel::Gauss1DMLE, 163
 - mappel::Gauss1DModel, 190
 - mappel::Gauss1DsMAP, 218
 - mappel::Gauss1DsMLE, 246
 - mappel::Gauss1DsModel, 274
 - mappel::Gauss2DModel, 303
 - mappel::Gauss2DMLE, 333
 - mappel::Gauss2DModel, 362
 - mappel::Gauss2DsMAP, 392
 - mappel::Gauss2DsMLE, 424
 - mappel::Gauss2DsModel, 456
 - mappel::Gauss2DsxyMAP, 486
 - mappel::Gauss2DsxyModel, 513
 - mappel::MAPEstimator, 580
 - mappel::MCMCAdaptor1Ds, 623
 - mappel::MCMCAdaptor1D, 605
 - mappel::MCMCAdaptor2Ds, 659
 - mappel::MCMCAdaptor2D, 641
 - mappel::MLEstimator, 686
 - mappel::PointEmitterModel, 749
- bounded_theta
 - mappel::Gauss1DModel, 135
 - mappel::Gauss1DMLE, 163
 - mappel::Gauss1DModel, 190
 - mappel::Gauss1DsMAP, 218
 - mappel::Gauss1DsMLE, 246
 - mappel::Gauss1DsModel, 274
 - mappel::Gauss2DModel, 303
 - mappel::Gauss2DMLE, 333
 - mappel::Gauss2DModel, 362
 - mappel::Gauss2DsMAP, 392
 - mappel::Gauss2DsMLE, 424
 - mappel::Gauss2DsModel, 456
 - mappel::Gauss2DsxyMAP, 486
 - mappel::Gauss2DsxyModel, 513
 - mappel::MAPEstimator, 580
 - mappel::MCMCAdaptor1Ds, 623
 - mappel::MCMCAdaptor1D, 605
 - mappel::MCMCAdaptor2Ds, 659
 - mappel::MCMCAdaptor2D, 641
 - mappel::MLEstimator, 686
 - mappel::PointEmitterModel, 749

- bounded_theta_stack
 - mappel::Gauss1DMap, 135
 - mappel::Gauss1DMLE, 163
 - mappel::Gauss1DModel, 191
 - mappel::Gauss1DsMap, 218
 - mappel::Gauss1DsMLE, 246
 - mappel::Gauss1DsModel, 274
 - mappel::Gauss2DMap, 303
 - mappel::Gauss2DMLE, 333
 - mappel::Gauss2DModel, 362
 - mappel::Gauss2DsMap, 392
 - mappel::Gauss2DsMLE, 425
 - mappel::Gauss2DsModel, 456
 - mappel::Gauss2DsxyMap, 487
 - mappel::Gauss2DsxyModel, 513
 - mappel::MAPEstimator, 581
 - mappel::MCMCAdaptor1Ds, 623
 - mappel::MCMCAdaptor1D, 605
 - mappel::MCMCAdaptor2Ds, 659
 - mappel::MCMCAdaptor2D, 641
 - mappel::MLEstimator, 687
 - mappel::PointEmitterModel, 750
- bounds_epsilon
 - mappel::Gauss1DMap, 150
 - mappel::Gauss1DMLE, 178
 - mappel::Gauss1DModel, 205
 - mappel::Gauss1DsMap, 233
 - mappel::Gauss1DsMLE, 262
 - mappel::Gauss1DsModel, 290
 - mappel::Gauss2DMap, 318
 - mappel::Gauss2DMLE, 348
 - mappel::Gauss2DModel, 378
 - mappel::Gauss2DsMap, 410
 - mappel::Gauss2DsMLE, 442
 - mappel::Gauss2DsModel, 473
 - mappel::Gauss2DsxyMap, 501
 - mappel::Gauss2DsxyModel, 525
 - mappel::MAPEstimator, 589
 - mappel::MCMCAdaptor1Ds, 633
 - mappel::MCMCAdaptor1D, 615
 - mappel::MCMCAdaptor2Ds, 669
 - mappel::MCMCAdaptor2D, 651
 - mappel::MLEstimator, 695
 - mappel::PointEmitterModel, 758
- CGaussHeuristicEstimator
 - mappel::estimator::CGaussHeuristicEstimator, 94
- CGaussMLE
 - mappel::estimator::CGaussMLE, 106
- candidate
 - mappel::mcmc::MCMCDebugData, 682
- candidate_rllh
 - mappel::mcmc::MCMCDebugData, 682
- cgauss_compute_estimate
 - mappel, 29, 30
- cgauss_compute_estimate_debug
 - mappel, 30
- cgauss_heuristic_compute_estimate
 - mappel, 30, 31
- check_image_shape
 - mappel::Gauss1DMap, 136
 - mappel::Gauss1DMLE, 164
 - mappel::Gauss1DModel, 191
 - mappel::Gauss1DsMap, 218
 - mappel::Gauss1DsMLE, 247
 - mappel::Gauss1DsModel, 275
 - mappel::Gauss2DMap, 303
 - mappel::Gauss2DMLE, 333
 - mappel::Gauss2DModel, 363
 - mappel::Gauss2DsMap, 393
 - mappel::Gauss2DsMLE, 425
 - mappel::Gauss2DsModel, 457
 - mappel::Gauss2DsxyMap, 487
 - mappel::Gauss2DsxyModel, 513
 - mappel::ImageFormat1DBase, 546
 - mappel::ImageFormat2DBase, 553
 - mappel::PoissonNoise1DObjective, 766
 - mappel::PoissonNoise2DObjective, 773
- check_lower_bound_hyperparameter
 - mappel, 31
- check_param_shape
 - mappel::Gauss1DMap, 136
 - mappel::Gauss1DMLE, 164
 - mappel::Gauss1DModel, 191
 - mappel::Gauss1DsMap, 219
 - mappel::Gauss1DsMLE, 247
 - mappel::Gauss1DsModel, 275
 - mappel::Gauss2DMap, 303, 304
 - mappel::Gauss2DMLE, 333, 334
 - mappel::Gauss2DModel, 363
 - mappel::Gauss2DsMap, 393
 - mappel::Gauss2DsMLE, 425
 - mappel::Gauss2DsModel, 457
 - mappel::Gauss2DsxyMap, 487
 - mappel::Gauss2DsxyModel, 513, 514
 - mappel::MAPEstimator, 581
 - mappel::MCMCAdaptor1Ds, 623
 - mappel::MCMCAdaptor1D, 605, 606
 - mappel::MCMCAdaptor2Ds, 660
 - mappel::MCMCAdaptor2D, 641
 - mappel::MLEstimator, 687
 - mappel::PointEmitterModel, 750
- check_positive_hyperparameter
 - mappel, 31
- check_psf_sigma
 - mappel::Gauss1DMap, 136
 - mappel::Gauss1DMLE, 164
 - mappel::Gauss1DModel, 191, 192

- mappel::Gauss1DsMAP, [219](#)
- mappel::Gauss1DsMLE, [247](#)
- mappel::Gauss1DsModel, [275](#)
- mappel::Gauss2DMAP, [304](#)
- mappel::Gauss2DMLE, [334](#)
- mappel::Gauss2DModel, [363](#)
- mappel::Gauss2DsMAP, [393](#)
- mappel::Gauss2DsMLE, [425](#), [426](#)
- mappel::Gauss2DsModel, [457](#)
- mappel::Gauss2DsxyMAP, [487](#), [488](#)
- mappel::Gauss2DsxyModel, [514](#)
- mappel::MAPEstimator, [581](#)
- mappel::MCMCAdaptor1Ds, [624](#)
- mappel::MCMCAdaptor1D, [606](#)
- mappel::MCMCAdaptor2Ds, [660](#)
- mappel::MCMCAdaptor2D, [642](#)
- mappel::MLEstimator, [687](#)
- mappel::PointEmitterModel, [750](#)
- check_size
 - mappel::Gauss1DMAP, [137](#)
 - mappel::Gauss1DMLE, [165](#)
 - mappel::Gauss1DModel, [192](#)
 - mappel::Gauss1DsMAP, [219](#)
 - mappel::Gauss1DsMLE, [248](#)
 - mappel::Gauss1DsModel, [276](#)
 - mappel::Gauss2DMAP, [304](#)
 - mappel::Gauss2DMLE, [334](#)
 - mappel::Gauss2DModel, [364](#)
 - mappel::Gauss2DsMAP, [394](#)
 - mappel::Gauss2DsMLE, [426](#)
 - mappel::Gauss2DsModel, [458](#)
 - mappel::Gauss2DsxyMAP, [488](#)
 - mappel::Gauss2DsxyModel, [514](#)
 - mappel::ImageFormat1DBase, [546](#)
 - mappel::ImageFormat2DBase, [553](#)
 - mappel::PoissonNoise1DObjective, [767](#)
 - mappel::PoissonNoise2DObjective, [774](#)
- check_unit_hyperparameter
 - mappel, [31](#)
- chisq_quantile
 - mappel, [31](#)
- cholesky
 - mappel, [31](#)
- cholesky_convert_full_matrix
 - mappel, [32](#)
- cholesky_convert_lower_triangular
 - mappel, [32](#)
- cholesky_make_negative_definite
 - mappel, [32](#)
- cholesky_make_positive_definite
 - mappel, [32](#)
- cholesky_solve
 - mappel, [32](#)
- clamp
 - mappel, [33](#)
- clear_stats
 - mappel::estimator::CGaussHeuristicEstimator, [94](#)
 - mappel::estimator::CGaussMLE, [107](#)
 - mappel::estimator::Estimator, [119](#)
 - mappel::estimator::HeuristicEstimator, [532](#)
 - mappel::estimator::IterativeMaximizer, [559](#)
 - mappel::estimator::NewtonDiagonalMaximizer, [702](#)
 - mappel::estimator::NewtonMaximizer, [724](#)
 - mappel::estimator::QuasiNewtonMaximizer, [787](#)
 - mappel::estimator::SimulatedAnnealingMaximizer, [807](#)
 - mappel::estimator::ThreadedEstimator, [842](#)
 - mappel::estimator::TrustRegionMaximizer, [857](#)
- ClockT
 - estimator.h, [882](#)
- compute_D_scale
 - mappel::estimator::subroutine, [52](#)
- compute_bound_scaling_vec
 - mappel::estimator::subroutine, [52](#)
- compute_cauchy_point
 - mappel::estimator::subroutine, [52](#)
- compute_derivatives
 - mappel::Gauss1DModel::Stencil, [838](#)
 - mappel::Gauss1DsModel::Stencil, [824](#)
 - mappel::Gauss2DModel::Stencil, [828](#)
 - mappel::Gauss2DsModel::Stencil, [832](#)
 - mappel::Gauss2DsxyModel::Stencil, [819](#)
- compute_estimate
 - mappel::estimator::Estimator, [119](#)
 - mappel::estimator::IterativeMaximizer, [560](#)
 - mappel::estimator::NewtonDiagonalMaximizer, [702](#)
 - mappel::estimator::NewtonMaximizer, [724](#)
 - mappel::estimator::QuasiNewtonMaximizer, [787](#)
 - mappel::estimator::ThreadedEstimator, [842](#)
 - mappel::estimator::TrustRegionMaximizer, [857](#)
- compute_estimate_debug
 - mappel::estimator::CGaussHeuristicEstimator, [94](#)
 - mappel::estimator::Estimator, [120](#)
 - mappel::estimator::HeuristicEstimator, [532](#)
 - mappel::estimator::IterativeMaximizer, [560](#)
 - mappel::estimator::NewtonDiagonalMaximizer, [703](#)
 - mappel::estimator::NewtonMaximizer, [724](#)
 - mappel::estimator::QuasiNewtonMaximizer, [788](#)
 - mappel::estimator::ThreadedEstimator, [843](#)
 - mappel::estimator::TrustRegionMaximizer, [858](#)
- compute_initial_trust_radius
 - mappel::estimator::subroutine, [52](#)
- compute_max_sigma_ratio
 - mappel::Gauss2DsMAP, [394](#)
 - mappel::Gauss2DsMLE, [426](#)
 - mappel::Gauss2DsModel, [458](#)
 - mappel::Gauss2DsxyModel, [514](#)
- compute_posterior_credible

- mappel::mcmc, 54
- compute_profile_bound
 - mappel::estimator::CGaussHeuristicEstimator, 95
 - mappel::estimator::CGaussMLE, 107
 - mappel::estimator::Estimator, 120
 - mappel::estimator::HeuristicEstimator, 533
 - mappel::estimator::IterativeMaximizer, 560
 - mappel::estimator::NewtonDiagonalMaximizer, 703
 - mappel::estimator::NewtonMaximizer, 725
 - mappel::estimator::QuasiNewtonMaximizer, 788
 - mappel::estimator::SimulatedAnnealingMaximizer, 807
 - mappel::estimator::ThreadedEstimator, 843
 - mappel::estimator::TrustRegionMaximizer, 858
- compute_profile_bound_debug
 - mappel::estimator::CGaussHeuristicEstimator, 95
 - mappel::estimator::CGaussMLE, 107
 - mappel::estimator::Estimator, 120
 - mappel::estimator::HeuristicEstimator, 533
 - mappel::estimator::IterativeMaximizer, 561
 - mappel::estimator::NewtonDiagonalMaximizer, 703
 - mappel::estimator::NewtonMaximizer, 725
 - mappel::estimator::QuasiNewtonMaximizer, 788
 - mappel::estimator::SimulatedAnnealingMaximizer, 808
 - mappel::estimator::ThreadedEstimator, 843
 - mappel::estimator::TrustRegionMaximizer, 858
- compute_profile_estimate
 - mappel::estimator::CGaussHeuristicEstimator, 95
 - mappel::estimator::CGaussMLE, 107
 - mappel::estimator::Estimator, 120
 - mappel::estimator::HeuristicEstimator, 533
 - mappel::estimator::IterativeMaximizer, 561
 - mappel::estimator::NewtonDiagonalMaximizer, 704
 - mappel::estimator::NewtonMaximizer, 725
 - mappel::estimator::QuasiNewtonMaximizer, 789
 - mappel::estimator::ThreadedEstimator, 843
 - mappel::estimator::TrustRegionMaximizer, 859
- compute_quadratic_model_value
 - mappel::estimator::subroutine, 53
- compute_scaled_problem
 - mappel::estimator::subroutine, 53
- confidence
 - mappel::estimator::ProfileBoundsData, 778
 - mappel::estimator::ProfileBoundsDataStack, 782
 - mappel::mcmc::MCMCData, 678
 - mappel::mcmc::MCMCDataStack, 680
- Continue
 - omp_exception_catcher, 91
- convergence_min_function_change_ratio
 - mappel::estimator::IterativeMaximizer, 573
 - mappel::estimator::NewtonDiagonalMaximizer, 716
 - mappel::estimator::NewtonMaximizer, 737
 - mappel::estimator::QuasiNewtonMaximizer, 801
- mappel::estimator::TrustRegionMaximizer, 871
- convergence_min_step_size_ratio
 - mappel::estimator::IterativeMaximizer, 573
 - mappel::estimator::NewtonDiagonalMaximizer, 716
 - mappel::estimator::NewtonMaximizer, 737
 - mappel::estimator::QuasiNewtonMaximizer, 801
 - mappel::estimator::TrustRegionMaximizer, 871
- convergence_min_trust_radius
 - mappel::estimator::TrustRegionMaximizer, 872
- convergence_test_grad_ratio
 - mappel::estimator::IterativeMaximizer, 561
 - mappel::estimator::NewtonDiagonalMaximizer, 704
 - mappel::estimator::NewtonMaximizer, 726
 - mappel::estimator::QuasiNewtonMaximizer, 789
 - mappel::estimator::TrustRegionMaximizer, 859
- convergence_test_step_size
 - mappel::estimator::IterativeMaximizer, 562
 - mappel::estimator::NewtonDiagonalMaximizer, 704
 - mappel::estimator::NewtonMaximizer, 726
 - mappel::estimator::QuasiNewtonMaximizer, 789
 - mappel::estimator::TrustRegionMaximizer, 859
- CoordIdxT
 - PoissonGaussianNoise2DObjective, 761
- CoordStackT
 - PoissonGaussianNoise2DObjective, 761
- CoordT
 - PoissonGaussianNoise2DObjective, 761
- copy_Lsym_mat
 - mappel, 33
- copy_Usym_mat
 - mappel, 33
- copy_Usym_mat_stack
 - mappel, 33
- cr_lower_bound
 - mappel::methods, 59
- cr_lower_bound_stack
 - mappel::methods::openmp, 85
- credible_lb
 - mappel::mcmc::MCMCData, 678
 - mappel::mcmc::MCMCDataStack, 680
- credible_ub
 - mappel::mcmc::MCMCData, 678
 - mappel::mcmc::MCMCDataStack, 680
- CubeT
 - mappel, 27
- current_stencil
 - mappel::estimator::IterativeMaximizer::Maximizer←Data, 598
- DXS2
 - mappel::Gauss1DsModel::Stencil, 825
 - mappel::Gauss2DsModel::Stencil, 834
 - mappel::Gauss2DsxyModel::Stencil, 820
- DXSX

- mappel::Gauss1DsModel::Stencil, [825](#)
- mappel::Gauss2DsModel::Stencil, [835](#)
- mappel::Gauss2DsxyModel::Stencil, [820](#)
- DXS
 - mappel::Gauss1DModel::Stencil, [839](#)
 - mappel::Gauss1DsModel::Stencil, [825](#)
 - mappel::Gauss2DModel::Stencil, [829](#)
 - mappel::Gauss2DsModel::Stencil, [834](#)
 - mappel::Gauss2DsxyModel::Stencil, [820](#)
- DYS2
 - mappel::Gauss2DsModel::Stencil, [835](#)
 - mappel::Gauss2DsxyModel::Stencil, [821](#)
- DYSX
 - mappel::Gauss2DsxyModel::Stencil, [821](#)
- DYSY
 - mappel::Gauss2DsModel::Stencil, [835](#)
 - mappel::Gauss2DsxyModel::Stencil, [821](#)
- DYS
 - mappel::Gauss2DModel::Stencil, [830](#)
 - mappel::Gauss2DsModel::Stencil, [835](#)
 - mappel::Gauss2DsxyModel::Stencil, [821](#)
- debug_internal_sum_model_x
 - mappel::Gauss2DMAP, [304](#)
 - mappel::Gauss2DMLE, [334](#)
 - mappel::Gauss2DModel, [364](#)
 - mappel::Gauss2DsMAP, [394](#)
 - mappel::Gauss2DsMLE, [426](#)
 - mappel::Gauss2DsModel, [458](#)
- debug_internal_sum_model_y
 - mappel::Gauss2DMAP, [304](#)
 - mappel::Gauss2DMLE, [334](#)
 - mappel::Gauss2DModel, [364](#)
 - mappel::Gauss2DsMAP, [394](#)
 - mappel::Gauss2DsMLE, [426](#)
 - mappel::Gauss2DsModel, [458](#)
- Default_T_Init
 - mappel::estimator::SimulatedAnnealingMaximizer, [815](#)
- default_alpha_sigma
 - mappel::Gauss1DMAP, [150](#)
 - mappel::Gauss1DMLE, [178](#)
 - mappel::Gauss1DModel, [205](#)
 - mappel::Gauss1DsMAP, [233](#)
 - mappel::Gauss1DsMLE, [262](#)
 - mappel::Gauss1DsModel, [290](#)
 - mappel::Gauss2DMAP, [318](#)
 - mappel::Gauss2DMLE, [348](#)
 - mappel::Gauss2DModel, [378](#)
 - mappel::Gauss2DsMAP, [410](#)
 - mappel::Gauss2DsMLE, [442](#)
 - mappel::Gauss2DsModel, [473](#)
 - mappel::Gauss2DsxyMAP, [501](#)
 - mappel::Gauss2DsxyModel, [525](#)
 - mappel::MAPEstimator, [589](#)
- mappel::MCMCAdaptor1Ds, [633](#)
- mappel::MCMCAdaptor1D, [615](#)
- mappel::MCMCAdaptor2Ds, [669](#)
- mappel::MCMCAdaptor2D, [651](#)
- mappel::MLEstimator, [695](#)
- mappel::PointEmitterModel, [758](#)
- default_beta_pos
 - mappel::Gauss1DMAP, [150](#)
 - mappel::Gauss1DMLE, [178](#)
 - mappel::Gauss1DModel, [205](#)
 - mappel::Gauss1DsMAP, [234](#)
 - mappel::Gauss1DsMLE, [262](#)
 - mappel::Gauss1DsModel, [290](#)
 - mappel::Gauss2DMAP, [319](#)
 - mappel::Gauss2DMLE, [349](#)
 - mappel::Gauss2DModel, [378](#)
 - mappel::Gauss2DsMAP, [410](#)
 - mappel::Gauss2DsMLE, [442](#)
 - mappel::Gauss2DsModel, [473](#)
 - mappel::Gauss2DsxyMAP, [501](#)
 - mappel::Gauss2DsxyModel, [525](#)
 - mappel::MAPEstimator, [589](#)
 - mappel::MCMCAdaptor1Ds, [633](#)
 - mappel::MCMCAdaptor1D, [615](#)
 - mappel::MCMCAdaptor2Ds, [670](#)
 - mappel::MCMCAdaptor2D, [651](#)
 - mappel::MLEstimator, [695](#)
 - mappel::PointEmitterModel, [758](#)
- default_intensity_kappa
 - mappel::Gauss1DMAP, [151](#)
 - mappel::Gauss1DMLE, [179](#)
 - mappel::Gauss1DModel, [205](#)
 - mappel::Gauss1DsMAP, [234](#)
 - mappel::Gauss1DsMLE, [262](#)
 - mappel::Gauss1DsModel, [290](#)
 - mappel::Gauss2DMAP, [319](#)
 - mappel::Gauss2DMLE, [349](#)
 - mappel::Gauss2DModel, [378](#)
 - mappel::Gauss2DsMAP, [410](#)
 - mappel::Gauss2DsMLE, [442](#)
 - mappel::Gauss2DsModel, [473](#)
 - mappel::Gauss2DsxyMAP, [501](#)
 - mappel::Gauss2DsxyModel, [526](#)
 - mappel::MAPEstimator, [589](#)
 - mappel::MCMCAdaptor1Ds, [633](#)
 - mappel::MCMCAdaptor1D, [615](#)
 - mappel::MCMCAdaptor2Ds, [670](#)
 - mappel::MCMCAdaptor2D, [651](#)
 - mappel::MLEstimator, [695](#)
 - mappel::PointEmitterModel, [758](#)
- default_max_l
 - mappel::Gauss1DMAP, [151](#)
 - mappel::Gauss1DMLE, [179](#)
 - mappel::Gauss1DModel, [205](#)

- mappel::Gauss1DsMAP, [234](#)
- mappel::Gauss1DsMLE, [262](#)
- mappel::Gauss1DsModel, [290](#)
- mappel::Gauss2DMAP, [319](#)
- mappel::Gauss2DMLE, [349](#)
- mappel::Gauss2DModel, [378](#)
- mappel::Gauss2DsMAP, [410](#)
- mappel::Gauss2DsMLE, [442](#)
- mappel::Gauss2DsModel, [474](#)
- mappel::Gauss2DsxyMAP, [501](#)
- mappel::Gauss2DsxyModel, [526](#)
- mappel::MAPEstimator, [589](#)
- mappel::MCMCAdaptor1Ds, [633](#)
- mappel::MCMCAdaptor1D, [615](#)
- mappel::MCMCAdaptor2Ds, [670](#)
- mappel::MCMCAdaptor2D, [651](#)
- mappel::MLEstimator, [695](#)
- mappel::PointEmitterModel, [758](#)
- default_mean_l
 - mappel::Gauss1DMAP, [151](#)
 - mappel::Gauss1DMLE, [179](#)
 - mappel::Gauss1DModel, [206](#)
 - mappel::Gauss1DsMAP, [234](#)
 - mappel::Gauss1DsMLE, [262](#)
 - mappel::Gauss1DsModel, [290](#)
 - mappel::Gauss2DMAP, [319](#)
 - mappel::Gauss2DMLE, [349](#)
 - mappel::Gauss2DModel, [378](#)
 - mappel::Gauss2DsMAP, [410](#)
 - mappel::Gauss2DsMLE, [442](#)
 - mappel::Gauss2DsModel, [474](#)
 - mappel::Gauss2DsxyMAP, [502](#)
 - mappel::Gauss2DsxyModel, [526](#)
 - mappel::MAPEstimator, [590](#)
 - mappel::MCMCAdaptor1Ds, [633](#)
 - mappel::MCMCAdaptor1D, [616](#)
 - mappel::MCMCAdaptor2Ds, [670](#)
 - mappel::MCMCAdaptor2D, [651](#)
 - mappel::MLEstimator, [696](#)
 - mappel::PointEmitterModel, [758](#)
- default_pixel_mean_bg
 - mappel::Gauss1DMAP, [151](#)
 - mappel::Gauss1DMLE, [179](#)
 - mappel::Gauss1DModel, [206](#)
 - mappel::Gauss1DsMAP, [234](#)
 - mappel::Gauss1DsMLE, [262](#)
 - mappel::Gauss1DsModel, [290](#)
 - mappel::Gauss2DMAP, [319](#)
 - mappel::Gauss2DMLE, [349](#)
 - mappel::Gauss2DModel, [379](#)
 - mappel::Gauss2DsMAP, [410](#)
 - mappel::Gauss2DsMLE, [443](#)
 - mappel::Gauss2DsModel, [474](#)
 - mappel::Gauss2DsxyMAP, [502](#)
- mappel::Gauss2DsxyModel, [526](#)
- mappel::MAPEstimator, [590](#)
- mappel::MCMCAdaptor1Ds, [633](#)
- mappel::MCMCAdaptor1D, [616](#)
- mappel::MCMCAdaptor2Ds, [670](#)
- mappel::MCMCAdaptor2D, [651](#)
- mappel::MLEstimator, [696](#)
- mappel::PointEmitterModel, [758](#)
- default_sigma_pos
 - mappel::Gauss1DMAP, [151](#)
 - mappel::Gauss1DMLE, [179](#)
 - mappel::Gauss1DModel, [206](#)
 - mappel::Gauss1DsMAP, [234](#)
 - mappel::Gauss1DsMLE, [263](#)
 - mappel::Gauss1DsModel, [291](#)
 - mappel::Gauss2DMAP, [319](#)
 - mappel::Gauss2DMLE, [349](#)
 - mappel::Gauss2DModel, [379](#)
 - mappel::Gauss2DsMAP, [411](#)
 - mappel::Gauss2DsMLE, [443](#)
 - mappel::Gauss2DsModel, [474](#)
 - mappel::Gauss2DsxyMAP, [502](#)
 - mappel::Gauss2DsxyModel, [526](#)
 - mappel::MAPEstimator, [590](#)
 - mappel::MCMCAdaptor1Ds, [634](#)
 - mappel::MCMCAdaptor1D, [616](#)
 - mappel::MCMCAdaptor2Ds, [670](#)
 - mappel::MCMCAdaptor2D, [652](#)
 - mappel::MLEstimator, [696](#)
 - mappel::PointEmitterModel, [759](#)
- DefaultCoolingRate
 - mappel::estimator::SimulatedAnnealingMaximizer, [815](#)
- DefaultIterations
 - mappel::estimator::CGaussMLE, [115](#)
 - mappel::estimator::IterativeMaximizer, [573](#)
 - mappel::estimator::NewtonDiagonalMaximizer, [717](#)
 - mappel::estimator::NewtonMaximizer, [738](#)
 - mappel::estimator::QuasiNewtonMaximizer, [802](#)
 - mappel::estimator::TrustRegionMaximizer, [872](#)
- DefaultMaxSeqLength
 - mappel::estimator::IterativeMaximizer::Maximizer←Data, [598](#)
- DefaultNumIterations
 - mappel::estimator::SimulatedAnnealingMaximizer, [815](#)
- DefaultPriorType
 - mappel::Gauss1DMAP, [151](#)
 - mappel::Gauss1DMLE, [179](#)
 - mappel::Gauss1DModel, [206](#)
 - mappel::Gauss1DsMAP, [235](#)
 - mappel::Gauss1DsMLE, [263](#)
 - mappel::Gauss1DsModel, [291](#)
 - mappel::Gauss2DMAP, [320](#)

- mappel::Gauss2DMLE, 350
- mappel::Gauss2DModel, 379
- mappel::Gauss2DsMAP, 411
- mappel::Gauss2DsMLE, 443
- mappel::Gauss2DsModel, 474
- mappel::Gauss2DsxyMAP, 502
- DefaultSeperableInitEstimator
 - mappel::Gauss1DModel, 152
 - mappel::Gauss1DMLE, 180
 - mappel::Gauss1DModel, 206
 - mappel::Gauss1DsMAP, 235
 - mappel::Gauss1DsMLE, 263
 - mappel::Gauss1DsModel, 291
 - mappel::Gauss2DModel, 320
 - mappel::Gauss2DMLE, 350
 - mappel::Gauss2DModel, 379
 - mappel::Gauss2DsMAP, 411
 - mappel::Gauss2DsMLE, 443
 - mappel::Gauss2DsModel, 474
 - mappel::Gauss2DsxyMAP, 502
 - mappel::Gauss2DsxyModel, 526
 - mappel::MAPEstimator, 590
 - mappel::MCMCAdaptor1Ds, 634
 - mappel::MCMCAdaptor1D, 616
 - mappel::MCMCAdaptor2Ds, 671
 - mappel::MCMCAdaptor2D, 652
 - mappel::MLEstimator, 696
 - mappel::PointEmitterModel, 759
- derivatives_computed
 - mappel::Gauss1DModel::Stencil, 839
 - mappel::Gauss1DsModel::Stencil, 825
 - mappel::Gauss2DModel::Stencil, 829
 - mappel::Gauss2DsModel::Stencil, 834
 - mappel::Gauss2DsxyModel::Stencil, 820
- display.cpp, 876
- display.h, 877
- DoNotTry
 - omp_exception_catcher, 91
- DX
 - mappel::Gauss1DModel::Stencil, 839
 - mappel::Gauss1DsModel::Stencil, 825
 - mappel::Gauss2DModel::Stencil, 829
 - mappel::Gauss2DsModel::Stencil, 834
 - mappel::Gauss2DsxyModel::Stencil, 820
- dx
 - mappel::Gauss1DModel::Stencil, 839
 - mappel::Gauss1DsModel::Stencil, 825
 - mappel::Gauss2DModel::Stencil, 829
 - mappel::Gauss2DsModel::Stencil, 834
 - mappel::Gauss2DsxyModel::Stencil, 820
- DY
 - mappel::Gauss2DModel::Stencil, 830
 - mappel::Gauss2DsModel::Stencil, 835
 - mappel::Gauss2DsxyModel::Stencil, 821
- dy
 - mappel::Gauss2DModel::Stencil, 829
 - mappel::Gauss2DsModel::Stencil, 835
 - mappel::Gauss2DsxyModel::Stencil, 821
- enable_all_cpus
 - mappel, 33
- EnableIfSubclassT
 - mappel, 27
- Error
 - mappel::estimator, 50
- error_bounds_expected
 - mappel::methods, 59
- error_bounds_expected_stack
 - mappel::methods::openmp, 86
- error_bounds_observed
 - mappel::methods, 59
- error_bounds_observed_stack
 - mappel::methods::openmp, 86
- error_bounds_posterior_credible
 - mappel::methods, 60
- error_bounds_profile_likelihood
 - mappel::methods, 60
- error_bounds_profile_likelihood_debug
 - mappel::methods::debug, 67
- error_bounds_profile_likelihood_parallel
 - mappel::methods::openmp, 86
- error_bounds_profile_likelihood_stack
 - mappel::methods::openmp, 86, 87
- estimate_background
 - mappel, 33, 34
- estimate_gaussian_2Dmax
 - mappel, 34
- estimate_gaussian_3Dmax
 - mappel, 34
- estimate_intensity
 - mappel, 34
- estimate_max
 - mappel::estimator::CGaussHeuristicEstimator, 95, 96
 - mappel::estimator::CGaussMLE, 107, 108
 - mappel::estimator::Estimator, 121, 122
 - mappel::estimator::HeuristicEstimator, 533, 534
 - mappel::estimator::IterativeMaximizer, 562, 563
 - mappel::estimator::NewtonDiagonalMaximizer, 704, 705
 - mappel::estimator::NewtonMaximizer, 726, 727
 - mappel::estimator::QuasiNewtonMaximizer, 789, 790
 - mappel::estimator::SimulatedAnnealingMaximizer, 808, 809
 - mappel::estimator::ThreadedEstimator, 844, 845
 - mappel::estimator::TrustRegionMaximizer, 859, 860
 - mappel::methods, 60, 61
- estimate_max_debug

- mappel::estimator::CGaussHeuristicEstimator, 97
- mappel::estimator::CGaussMLE, 109
- mappel::estimator::Estimator, 122, 123
- mappel::estimator::HeuristicEstimator, 535
- mappel::estimator::IterativeMaximizer, 563, 564
- mappel::estimator::NewtonDiagonalMaximizer, 706
- mappel::estimator::NewtonMaximizer, 728
- mappel::estimator::QuasiNewtonMaximizer, 791
- mappel::estimator::SimulatedAnnealingMaximizer, 809, 810
- mappel::estimator::ThreadedEstimator, 845, 846
- mappel::estimator::TrustRegionMaximizer, 861
- mappel::methods::debug, 67
- estimate_max_stack
 - mappel::estimator::CGaussHeuristicEstimator, 98
 - mappel::estimator::CGaussMLE, 110
 - mappel::estimator::Estimator, 123, 124
 - mappel::estimator::HeuristicEstimator, 536
 - mappel::estimator::IterativeMaximizer, 564, 565
 - mappel::estimator::NewtonDiagonalMaximizer, 707
 - mappel::estimator::NewtonMaximizer, 729
 - mappel::estimator::QuasiNewtonMaximizer, 792
 - mappel::estimator::SimulatedAnnealingMaximizer, 810, 811
 - mappel::estimator::ThreadedEstimator, 846, 847
 - mappel::estimator::TrustRegionMaximizer, 862
 - mappel::methods::openmp, 87
- estimate_posterior
 - mappel::methods, 61
- estimate_posterior_debug
 - mappel::methods::debug, 68
- estimate_posterior_stack
 - mappel::methods::openmp, 87, 88
- estimate_profile_bounds
 - mappel::estimator::CGaussHeuristicEstimator, 99
 - mappel::estimator::CGaussMLE, 111
 - mappel::estimator::Estimator, 124
 - mappel::estimator::HeuristicEstimator, 537
 - mappel::estimator::IterativeMaximizer, 565
 - mappel::estimator::NewtonDiagonalMaximizer, 708
 - mappel::estimator::NewtonMaximizer, 730
 - mappel::estimator::QuasiNewtonMaximizer, 793
 - mappel::estimator::SimulatedAnnealingMaximizer, 811
 - mappel::estimator::ThreadedEstimator, 847
 - mappel::estimator::TrustRegionMaximizer, 863
- estimate_profile_bounds_debug
 - mappel::estimator::CGaussHeuristicEstimator, 99
 - mappel::estimator::CGaussMLE, 111
 - mappel::estimator::Estimator, 124
 - mappel::estimator::HeuristicEstimator, 537
 - mappel::estimator::IterativeMaximizer, 566
 - mappel::estimator::NewtonDiagonalMaximizer, 708
 - mappel::estimator::NewtonMaximizer, 730
- mappel::estimator::QuasiNewtonMaximizer, 793
- mappel::estimator::SimulatedAnnealingMaximizer, 812
- mappel::estimator::ThreadedEstimator, 847
- mappel::estimator::TrustRegionMaximizer, 863
- estimate_profile_bounds_parallel
 - mappel::estimator::CGaussHeuristicEstimator, 100
 - mappel::estimator::CGaussMLE, 112
 - mappel::estimator::Estimator, 125
 - mappel::estimator::HeuristicEstimator, 538
 - mappel::estimator::IterativeMaximizer, 566
 - mappel::estimator::NewtonDiagonalMaximizer, 709
 - mappel::estimator::NewtonMaximizer, 730
 - mappel::estimator::QuasiNewtonMaximizer, 794
 - mappel::estimator::SimulatedAnnealingMaximizer, 812
 - mappel::estimator::ThreadedEstimator, 848
 - mappel::estimator::TrustRegionMaximizer, 864
- estimate_profile_bounds_stack
 - mappel::estimator::CGaussHeuristicEstimator, 100
 - mappel::estimator::CGaussMLE, 112
 - mappel::estimator::Estimator, 125
 - mappel::estimator::HeuristicEstimator, 538
 - mappel::estimator::IterativeMaximizer, 566
 - mappel::estimator::NewtonDiagonalMaximizer, 709
 - mappel::estimator::NewtonMaximizer, 730
 - mappel::estimator::QuasiNewtonMaximizer, 794
 - mappel::estimator::SimulatedAnnealingMaximizer, 812
 - mappel::estimator::ThreadedEstimator, 848
 - mappel::estimator::TrustRegionMaximizer, 864
- estimate_profile_likelihood
 - mappel::methods, 61, 62
- estimate_profile_likelihood_stack
 - mappel::methods::openmp, 88
- estimate_profile_max
 - mappel::estimator::CGaussHeuristicEstimator, 101
 - mappel::estimator::CGaussMLE, 113
 - mappel::estimator::Estimator, 125
 - mappel::estimator::HeuristicEstimator, 539
 - mappel::estimator::IterativeMaximizer, 567
 - mappel::estimator::NewtonDiagonalMaximizer, 710
 - mappel::estimator::NewtonMaximizer, 731
 - mappel::estimator::QuasiNewtonMaximizer, 795
 - mappel::estimator::SimulatedAnnealingMaximizer, 813
 - mappel::estimator::ThreadedEstimator, 849
 - mappel::estimator::TrustRegionMaximizer, 865
- estimate_sample_posterior
 - mappel::mcmc, 54
- estimated_idx
 - mappel::estimator::ProfileBoundsData, 778
 - mappel::estimator::ProfileBoundsDataStack, 782
- Estimator

- mappel::estimator::Estimator, 119
- estimator.cpp, 878
- estimator.h, 879
 - ClockT, 882
- estimator_helpers.h, 882
- estimator_impl.h, 883
- estimator_names
 - mappel::Gauss1DMap, 152
 - mappel::Gauss1DMLE, 180
 - mappel::Gauss1DsMAP, 235
 - mappel::Gauss1DsMLE, 263
 - mappel::Gauss2DMap, 320
 - mappel::Gauss2DMLE, 350
 - mappel::Gauss2DsMAP, 411
 - mappel::Gauss2DsMLE, 443
 - mappel::Gauss2DsxyMAP, 502
 - mappel::PoissonNoise1DObjective, 769
 - mappel::PoissonNoise2DObjective, 776
 - PoissonGaussianNoise2DObjective, 762
- estimator_statics.cpp, 884
- eta_bg
 - mappel::Gauss1DMap, 152
 - mappel::Gauss1DMLE, 180
 - mappel::Gauss1DModel, 206
 - mappel::Gauss1DsMAP, 235
 - mappel::Gauss1DsMLE, 263
 - mappel::Gauss1DsModel, 291
 - mappel::Gauss2DMap, 320
 - mappel::Gauss2DMLE, 350
 - mappel::Gauss2DModel, 379
 - mappel::Gauss2DsMAP, 411
 - mappel::Gauss2DsMLE, 443
 - mappel::Gauss2DsModel, 475
 - mappel::Gauss2DsxyMAP, 503
 - mappel::MCMCAdaptor1Ds, 634
 - mappel::MCMCAdaptor1D, 616
 - mappel::MCMCAdaptor2Ds, 671
 - mappel::MCMCAdaptor2D, 652
- eta_l
 - mappel::Gauss1DMap, 152
 - mappel::Gauss1DMLE, 180
 - mappel::Gauss1DModel, 207
 - mappel::Gauss1DsMAP, 235
 - mappel::Gauss1DsMLE, 263
 - mappel::Gauss1DsModel, 291
 - mappel::Gauss2DMap, 320
 - mappel::Gauss2DMLE, 350
 - mappel::Gauss2DModel, 379
 - mappel::Gauss2DsMAP, 411
 - mappel::Gauss2DsMLE, 444
 - mappel::Gauss2DsModel, 475
 - mappel::Gauss2DsxyMAP, 503
 - mappel::MCMCAdaptor1Ds, 634
 - mappel::MCMCAdaptor1D, 616
- mappel::MCMCAdaptor2Ds, 671
 - mappel::MCMCAdaptor2D, 652
- eta_sigma
 - mappel::Gauss1DsMAP, 235
 - mappel::Gauss1DsMLE, 264
 - mappel::Gauss1DsModel, 291
 - mappel::Gauss2DsMAP, 412
 - mappel::Gauss2DsMLE, 444
 - mappel::Gauss2DsModel, 475
 - mappel::MCMCAdaptor1Ds, 634
 - mappel::MCMCAdaptor2Ds, 671
- eta_x
 - mappel::Gauss1DMap, 152
 - mappel::Gauss1DMLE, 180
 - mappel::Gauss1DModel, 207
 - mappel::Gauss1DsMAP, 236
 - mappel::Gauss1DsMLE, 264
 - mappel::Gauss1DsModel, 292
 - mappel::Gauss2DMap, 320
 - mappel::Gauss2DMLE, 350
 - mappel::Gauss2DModel, 380
 - mappel::Gauss2DsMAP, 412
 - mappel::Gauss2DsMLE, 444
 - mappel::Gauss2DsModel, 475
 - mappel::Gauss2DsxyMAP, 503
 - mappel::MCMCAdaptor1Ds, 635
 - mappel::MCMCAdaptor1D, 617
 - mappel::MCMCAdaptor2Ds, 671
 - mappel::MCMCAdaptor2D, 652
- eta_y
 - mappel::Gauss2DMap, 321
 - mappel::Gauss2DMLE, 351
 - mappel::Gauss2DModel, 380
 - mappel::Gauss2DsMAP, 412
 - mappel::Gauss2DsMLE, 444
 - mappel::Gauss2DsModel, 475
 - mappel::MCMCAdaptor2Ds, 672
 - mappel::MCMCAdaptor2D, 653
- exit_counts
 - mappel::estimator::CGaussHeuristicEstimator, 103
 - mappel::estimator::CGaussMLE, 115
 - mappel::estimator::Estimator, 127
 - mappel::estimator::HeuristicEstimator, 541
 - mappel::estimator::IterativeMaximizer, 573
 - mappel::estimator::NewtonDiagonalMaximizer, 717
 - mappel::estimator::NewtonMaximizer, 738
 - mappel::estimator::QuasiNewtonMaximizer, 802
 - mappel::estimator::SimulatedAnnealingMaximizer, 816
 - mappel::estimator::ThreadedEstimator, 851
 - mappel::estimator::TrustRegionMaximizer, 872
- ExitCode
 - mappel::estimator, 50
- expand_max_seq_len

- mappel::estimator::IterativeMaximizer::Maximizer↔
 - Data, 594
- expected_information
 - mappel::methods, 62
- expected_information_stack
 - mappel::methods::openmp, 88
- fill_DX_stencil
 - mappel, 34
- fill_DXS2_stencil
 - mappel, 34
- fill_DXS_stencil
 - mappel, 34
- fill_DXSX_stencil
 - mappel, 35
- fill_G_stencil
 - mappel, 35
- fill_X_stencil
 - mappel, 35
- fill_d_stencil
 - mappel, 34
- fill_gaussian_stencil
 - mappel, 35
- fisher_information
 - PoissonGaussianNoise2DObjective.h, 931
- fixed_idx
 - mappel::estimator::IterativeMaximizer::Maximizer↔
 - Data, 598
- free_idx
 - mappel::estimator::IterativeMaximizer::Maximizer↔
 - Data, 599
- FunctionValue
 - mappel::estimator, 50
- gamma_prior_grad
 - mappel, 35
- gamma_prior_grad2
 - mappel, 35
- Gauss1DMap.cpp, 884
- Gauss1DMap.h, 885
- Gauss1DMap
 - mappel::Gauss1DMap, 135
- Gauss1DMLE.cpp, 886
- Gauss1DMLE.h, 886
- Gauss1DMLE
 - mappel::Gauss1DMLE, 163
- Gauss1DModel
 - mappel::Gauss1DModel, 190
- Gauss1DModel.cpp, 887
- Gauss1DModel.h, 887
- Gauss1DSumModelT
 - mappel::Gauss2DMap, 300
 - mappel::Gauss2DMLE, 330
 - mappel::Gauss2DModel, 360
 - mappel::Gauss2DsMap, 389
- mappel::Gauss2DsMLE, 421
- mappel::Gauss2DsModel, 454
- Gauss1DsMap.cpp, 888
- Gauss1DsMap.h, 889
- Gauss1DsMap
 - mappel::Gauss1DsMap, 217, 218
- Gauss1DsMLE.cpp, 889
- Gauss1DsMLE.h, 890
- Gauss1DsMLE
 - mappel::Gauss1DsMLE, 246
- Gauss1DsModel
 - mappel::Gauss1DsModel, 274
- Gauss1DsModel.cpp, 891
- Gauss1DsModel.h, 891
- Gauss2DMap.cpp, 892
- Gauss2DMap.h, 892
- Gauss2DMap
 - mappel::Gauss2DMap, 302, 303
- Gauss2DMLE.cpp, 893
- Gauss2DMLE.h, 894
- Gauss2DMLE
 - mappel::Gauss2DMLE, 332
- Gauss2DModel
 - mappel::Gauss2DModel, 362
- Gauss2DModel.cpp, 894
- Gauss2DModel.h, 895
- Gauss2DsMap.cpp, 896
- Gauss2DsMap.h, 896
- Gauss2DsMap
 - mappel::Gauss2DsMap, 391, 392
- Gauss2DsMLE.cpp, 897
- Gauss2DsMLE.h, 898
- Gauss2DsMLE
 - mappel::Gauss2DsMLE, 424
- Gauss2DsModel
 - mappel::Gauss2DsModel, 456
- Gauss2DsModel.cpp, 898
- Gauss2DsModel.h, 899
- Gauss2DsxyMAP.h, 900
- Gauss2DsxyMAP
 - mappel::Gauss2DsxyMAP, 486
- Gauss2DsxyModel
 - mappel::Gauss2DsxyModel, 513
- Gauss2DsxyModel.h, 901
- gauss_norm
 - mappel, 35
- gaussian_3D_convolution
 - mappel, 35
- gaussian_convolution
 - mappel, 36
- generate_poisson
 - mappel, 36
- generate_poisson_large
 - mappel, 36

- generate_poisson_small
 - mappel, 36
- get_backtrack_idx
 - mappel::estimator::IterativeMaximizer::Maximizer←Data, 594
- get_debug_stats
 - mappel::estimator::CGaussHeuristicEstimator, 101
 - mappel::estimator::CGaussMLE, 113
 - mappel::estimator::Estimator, 125
 - mappel::estimator::HeuristicEstimator, 539
 - mappel::estimator::IterativeMaximizer, 567
 - mappel::estimator::NewtonDiagonalMaximizer, 710
 - mappel::estimator::NewtonMaximizer, 731
 - mappel::estimator::QuasiNewtonMaximizer, 795
 - mappel::estimator::SimulatedAnnealingMaximizer, 813
 - mappel::estimator::ThreadedEstimator, 849
 - mappel::estimator::TrustRegionMaximizer, 865
- get_exit_counts
 - mappel::estimator::CGaussHeuristicEstimator, 101
 - mappel::estimator::CGaussMLE, 114
 - mappel::estimator::Estimator, 126
 - mappel::estimator::HeuristicEstimator, 540
 - mappel::estimator::IterativeMaximizer, 568
 - mappel::estimator::NewtonDiagonalMaximizer, 711
 - mappel::estimator::NewtonMaximizer, 732
 - mappel::estimator::QuasiNewtonMaximizer, 796
 - mappel::estimator::SimulatedAnnealingMaximizer, 814
 - mappel::estimator::ThreadedEstimator, 850
 - mappel::estimator::TrustRegionMaximizer, 866
- get_hyperparam_index
 - mappel::Gauss1DMAP, 137
 - mappel::Gauss1DMLE, 165
 - mappel::Gauss1DModel, 192
 - mappel::Gauss1DsMAP, 219
 - mappel::Gauss1DsMLE, 248
 - mappel::Gauss1DsModel, 276
 - mappel::Gauss2DMAP, 305
 - mappel::Gauss2DMLE, 335
 - mappel::Gauss2DModel, 364
 - mappel::Gauss2DsMAP, 394
 - mappel::Gauss2DsMLE, 427
 - mappel::Gauss2DsModel, 458
 - mappel::Gauss2DsxyMAP, 488
 - mappel::Gauss2DsxyModel, 515
 - mappel::MAPEstimator, 581
 - mappel::MCMCAdaptor1Ds, 624
 - mappel::MCMCAdaptor1D, 606
 - mappel::MCMCAdaptor2Ds, 660
 - mappel::MCMCAdaptor2D, 642
 - mappel::MLEstimator, 687
 - mappel::PointEmitterModel, 750
- get_hyperparam_names
 - mappel::Gauss1DMAP, 137
 - mappel::Gauss1DMLE, 165
 - mappel::Gauss1DModel, 192
 - mappel::Gauss1DsMAP, 220
 - mappel::Gauss1DsMLE, 248
 - mappel::Gauss1DsModel, 276
 - mappel::Gauss2DMAP, 305
 - mappel::Gauss2DMLE, 335
 - mappel::Gauss2DModel, 364
 - mappel::Gauss2DsMAP, 395
 - mappel::Gauss2DsMLE, 427
 - mappel::Gauss2DsModel, 459
 - mappel::Gauss2DsxyMAP, 488
 - mappel::Gauss2DsxyModel, 515
 - mappel::MAPEstimator, 582
 - mappel::MCMCAdaptor1Ds, 624
 - mappel::MCMCAdaptor1D, 606
 - mappel::MCMCAdaptor2Ds, 661
 - mappel::MCMCAdaptor2D, 642
 - mappel::MLEstimator, 688
 - mappel::PointEmitterModel, 751
- get_hyperparam_value
 - mappel::Gauss1DMAP, 137
 - mappel::Gauss1DMLE, 165
 - mappel::Gauss1DModel, 192
 - mappel::Gauss1DsMAP, 220
 - mappel::Gauss1DsMLE, 248
 - mappel::Gauss1DsModel, 276
 - mappel::Gauss2DMAP, 305
 - mappel::Gauss2DMLE, 335
 - mappel::Gauss2DModel, 364
 - mappel::Gauss2DsMAP, 395
 - mappel::Gauss2DsMLE, 427
 - mappel::Gauss2DsModel, 459
 - mappel::Gauss2DsxyMAP, 488
 - mappel::Gauss2DsxyModel, 515
 - mappel::MAPEstimator, 582
 - mappel::MCMCAdaptor1Ds, 624
 - mappel::MCMCAdaptor1D, 606
 - mappel::MCMCAdaptor2Ds, 661
 - mappel::MCMCAdaptor2D, 642
 - mappel::MLEstimator, 688
 - mappel::PointEmitterModel, 751
- get_hyperparams
 - mappel::Gauss1DMAP, 137
 - mappel::Gauss1DMLE, 165
 - mappel::Gauss1DModel, 192
 - mappel::Gauss1DsMAP, 220
 - mappel::Gauss1DsMLE, 248
 - mappel::Gauss1DsModel, 276
 - mappel::Gauss2DMAP, 305
 - mappel::Gauss2DMLE, 335
 - mappel::Gauss2DModel, 364
 - mappel::Gauss2DsMAP, 395

- mappel::Gauss2DsMLE, [427](#)
- mappel::Gauss2DsModel, [459](#)
- mappel::Gauss2DsxyMAP, [488](#)
- mappel::Gauss2DsxyModel, [515](#)
- mappel::MAPEstimator, [582](#)
- mappel::MCMCAdaptor1Ds, [624](#)
- mappel::MCMCAdaptor1D, [607](#)
- mappel::MCMCAdaptor2Ds, [661](#)
- mappel::MCMCAdaptor2D, [642](#)
- mappel::MLEstimator, [688](#)
- mappel::PointEmitterModel, [751](#)
- get_image_from_stack
 - mappel::Gauss1DMAP, [137](#)
 - mappel::Gauss1DMLE, [165](#)
 - mappel::Gauss1DModel, [193](#)
 - mappel::Gauss1DsMAP, [220](#)
 - mappel::Gauss1DsMLE, [248](#)
 - mappel::Gauss1DsModel, [276](#)
 - mappel::Gauss2DMAP, [305](#)
 - mappel::Gauss2DMLE, [335](#)
 - mappel::Gauss2DModel, [365](#)
 - mappel::Gauss2DsMAP, [395](#)
 - mappel::Gauss2DsMLE, [427](#)
 - mappel::Gauss2DsModel, [459](#)
 - mappel::Gauss2DsxyMAP, [489](#)
 - mappel::Gauss2DsxyModel, [515](#)
 - mappel::ImageFormat1DBase, [546](#)
 - mappel::ImageFormat2DBase, [553](#)
 - mappel::PoissonNoise1DObjective, [767](#)
 - mappel::PoissonNoise2DObjective, [774](#)
- get_lbound
 - mappel::Gauss1DMAP, [137](#)
 - mappel::Gauss1DMLE, [165](#)
 - mappel::Gauss1DModel, [193](#)
 - mappel::Gauss1DsMAP, [220](#)
 - mappel::Gauss1DsMLE, [248](#)
 - mappel::Gauss1DsModel, [276](#)
 - mappel::Gauss2DMAP, [305](#)
 - mappel::Gauss2DMLE, [335](#)
 - mappel::Gauss2DModel, [365](#)
 - mappel::Gauss2DsMAP, [395](#)
 - mappel::Gauss2DsMLE, [427](#)
 - mappel::Gauss2DsModel, [459](#)
 - mappel::Gauss2DsxyMAP, [489](#)
 - mappel::Gauss2DsxyModel, [515](#)
 - mappel::MAPEstimator, [582](#)
 - mappel::MCMCAdaptor1Ds, [625](#)
 - mappel::MCMCAdaptor1D, [607](#)
 - mappel::MCMCAdaptor2Ds, [661](#)
 - mappel::MCMCAdaptor2D, [643](#)
 - mappel::MLEstimator, [688](#)
 - mappel::PointEmitterModel, [751](#)
- get_max_sigma
 - mappel::Gauss1DsMAP, [220](#)
- mappel::Gauss1DsMLE, [249](#)
- mappel::Gauss1DsModel, [277](#)
- mappel::Gauss2DsMAP, [395](#)
- mappel::Gauss2DsMLE, [427](#), [428](#)
- mappel::Gauss2DsModel, [459](#)
- mappel::Gauss2DsxyModel, [515](#), [516](#)
- get_max_sigma_ratio
 - mappel::Gauss2DsMAP, [396](#)
 - mappel::Gauss2DsMLE, [428](#)
 - mappel::Gauss2DsModel, [460](#)
 - mappel::Gauss2DsxyModel, [516](#)
- get_mcmc_num_phases
 - mappel::Gauss1DMAP, [138](#)
 - mappel::Gauss1DMLE, [166](#)
 - mappel::Gauss1DModel, [193](#)
 - mappel::Gauss1DsMAP, [220](#)
 - mappel::Gauss1DsMLE, [249](#)
 - mappel::Gauss1DsModel, [277](#)
 - mappel::Gauss2DMAP, [305](#)
 - mappel::Gauss2DMLE, [335](#)
 - mappel::Gauss2DModel, [365](#)
 - mappel::Gauss2DsMAP, [396](#)
 - mappel::Gauss2DsMLE, [428](#)
 - mappel::Gauss2DsModel, [460](#)
 - mappel::Gauss2DsxyMAP, [489](#)
 - mappel::MCMCAdaptor1Ds, [625](#)
 - mappel::MCMCAdaptor1D, [607](#)
 - mappel::MCMCAdaptor2Ds, [661](#)
 - mappel::MCMCAdaptor2D, [643](#)
 - mappel::MCMCAdaptorBase, [675](#)
- get_mcmc_sigma_scale
 - mappel::Gauss1DMAP, [138](#)
 - mappel::Gauss1DMLE, [166](#)
 - mappel::Gauss1DModel, [193](#)
 - mappel::Gauss1DsMAP, [221](#)
 - mappel::Gauss1DsMLE, [249](#)
 - mappel::Gauss1DsModel, [277](#)
 - mappel::Gauss2DMAP, [306](#)
 - mappel::Gauss2DMLE, [336](#)
 - mappel::Gauss2DModel, [365](#)
 - mappel::Gauss2DsMAP, [396](#)
 - mappel::Gauss2DsMLE, [428](#)
 - mappel::Gauss2DsModel, [460](#)
 - mappel::Gauss2DsxyMAP, [489](#)
 - mappel::MCMCAdaptor1Ds, [625](#)
 - mappel::MCMCAdaptor1D, [607](#)
 - mappel::MCMCAdaptor2Ds, [661](#)
 - mappel::MCMCAdaptor2D, [643](#)
 - mappel::MCMCAdaptorBase, [675](#)
- get_min_sigma
 - mappel::Gauss1DsMAP, [221](#)
 - mappel::Gauss1DsMLE, [249](#)
 - mappel::Gauss1DsModel, [277](#)
 - mappel::Gauss2DsMAP, [396](#)

- mappel::Gauss2DsMLE, 428
- mappel::Gauss2DsModel, 460
- mappel::Gauss2DsxyModel, 516
- get_model
 - mappel::estimator::CGaussHeuristicEstimator, 102
 - mappel::estimator::CGaussMLE, 114
 - mappel::estimator::Estimator, 126
 - mappel::estimator::HeuristicEstimator, 540
 - mappel::estimator::IterativeMaximizer, 568
 - mappel::estimator::NewtonDiagonalMaximizer, 711
 - mappel::estimator::NewtonMaximizer, 732
 - mappel::estimator::QuasiNewtonMaximizer, 796
 - mappel::estimator::SimulatedAnnealingMaximizer, 814
 - mappel::estimator::ThreadedEstimator, 850
 - mappel::estimator::TrustRegionMaximizer, 866
- get_num_hyperparams
 - mappel::Gauss1DMAP, 138
 - mappel::Gauss1DMLE, 166
 - mappel::Gauss1DModel, 193
 - mappel::Gauss1DsMAP, 221
 - mappel::Gauss1DsMLE, 249
 - mappel::Gauss1DsModel, 277
 - mappel::Gauss2DMAP, 306
 - mappel::Gauss2DMLE, 336
 - mappel::Gauss2DModel, 365
 - mappel::Gauss2DsMAP, 396
 - mappel::Gauss2DsMLE, 428
 - mappel::Gauss2DsModel, 460
 - mappel::Gauss2DsxyMAP, 489
 - mappel::Gauss2DsxyModel, 516
 - mappel::MAPEstimator, 582
 - mappel::MCMCAdaptor1Ds, 625
 - mappel::MCMCAdaptor1D, 607
 - mappel::MCMCAdaptor2Ds, 661
 - mappel::MCMCAdaptor2D, 643
 - mappel::MLEstimator, 688
 - mappel::PointEmitterModel, 751
- get_num_params
 - mappel::Gauss1DMAP, 138
 - mappel::Gauss1DMLE, 166
 - mappel::Gauss1DModel, 193
 - mappel::Gauss1DsMAP, 221
 - mappel::Gauss1DsMLE, 249
 - mappel::Gauss1DsModel, 277
 - mappel::Gauss2DMAP, 306
 - mappel::Gauss2DMLE, 336
 - mappel::Gauss2DModel, 365
 - mappel::Gauss2DsMAP, 396
 - mappel::Gauss2DsMLE, 429
 - mappel::Gauss2DsModel, 460
 - mappel::Gauss2DsxyMAP, 489
 - mappel::Gauss2DsxyModel, 516
 - mappel::MAPEstimator, 582
 - mappel::MCMCAdaptor1Ds, 625
 - mappel::MCMCAdaptor1D, 607
 - mappel::MCMCAdaptor2Ds, 662
 - mappel::MCMCAdaptor2D, 643
 - mappel::MLEstimator, 688
 - mappel::PointEmitterModel, 751
- mappel::MCMCAdaptor1Ds, 625
- mappel::MCMCAdaptor1D, 607
- mappel::MCMCAdaptor2Ds, 661
- mappel::MCMCAdaptor2D, 643
- mappel::MLEstimator, 688
- mappel::PointEmitterModel, 751
- get_num_pixels
 - mappel::Gauss1DMAP, 138
 - mappel::Gauss1DMLE, 166
 - mappel::Gauss1DModel, 193
 - mappel::Gauss1DsMAP, 221
 - mappel::Gauss1DsMLE, 249
 - mappel::Gauss1DsModel, 277
 - mappel::Gauss2DMAP, 306
 - mappel::Gauss2DMLE, 336
 - mappel::Gauss2DModel, 365
 - mappel::Gauss2DsMAP, 397
 - mappel::Gauss2DsMLE, 429
 - mappel::Gauss2DsModel, 460
 - mappel::Gauss2DsxyMAP, 489
 - mappel::Gauss2DsxyModel, 516
 - mappel::ImageFormat1DBase, 547
 - mappel::ImageFormat2DBase, 553
 - mappel::PoissonNoise1DObjective, 767
 - mappel::PoissonNoise2DObjective, 774
- get_param_names
 - mappel::Gauss1DMAP, 138
 - mappel::Gauss1DMLE, 166
 - mappel::Gauss1DModel, 194
 - mappel::Gauss1DsMAP, 221
 - mappel::Gauss1DsMLE, 250
 - mappel::Gauss1DsModel, 278
 - mappel::Gauss2DMAP, 306
 - mappel::Gauss2DMLE, 336
 - mappel::Gauss2DModel, 366
 - mappel::Gauss2DsMAP, 397
 - mappel::Gauss2DsMLE, 429
 - mappel::Gauss2DsModel, 461
 - mappel::Gauss2DsxyMAP, 490
 - mappel::Gauss2DsxyModel, 516
 - mappel::MAPEstimator, 582
 - mappel::MCMCAdaptor1Ds, 625
 - mappel::MCMCAdaptor1D, 607
 - mappel::MCMCAdaptor2Ds, 662
 - mappel::MCMCAdaptor2D, 643
 - mappel::MLEstimator, 688
 - mappel::PointEmitterModel, 751
- get_prior
 - mappel::Gauss1DMAP, 138, 139
 - mappel::Gauss1DMLE, 166, 167
 - mappel::Gauss1DModel, 194
 - mappel::Gauss1DsMAP, 221, 222
 - mappel::Gauss1DsMLE, 250
 - mappel::Gauss1DsModel, 278

- mappel::Gauss2DModel, 366
- mappel::Gauss2DsMAP, 397
- mappel::Gauss2DsMLE, 429
- mappel::Gauss2DsModel, 461
- mappel::Gauss2DsxyMAP, 490
- mappel::Gauss2DsxyModel, 517
- mappel::MAPEstimator, 583
- mappel::MCMCAdaptor1Ds, 625, 626
- mappel::MCMCAdaptor1D, 608
- mappel::MCMCAdaptor2Ds, 662
- mappel::MCMCAdaptor2D, 643, 644
- mappel::MLEstimator, 689
- mappel::PointEmitterModel, 752
- get_psf_sigma
 - mappel::Gauss1DModel, 194
 - mappel::Gauss2DModel, 366
 - mappel::Gauss2DsxyMAP, 490
- get_rng_generator
 - mappel::Gauss1DModel, 194
 - mappel::Gauss1DsMAP, 222
 - mappel::Gauss1DsMLE, 250
 - mappel::Gauss1DsModel, 278
 - mappel::Gauss2DModel, 366
 - mappel::Gauss2DsMAP, 397
 - mappel::Gauss2DsMLE, 429
 - mappel::Gauss2DsModel, 461
 - mappel::Gauss2DsxyMAP, 490
 - mappel::Gauss2DsxyModel, 517
 - mappel::MAPEstimator, 583
 - mappel::MCMCAdaptor1Ds, 626
 - mappel::MCMCAdaptor1D, 608
 - mappel::MCMCAdaptor2Ds, 662
 - mappel::MCMCAdaptor2D, 644
 - mappel::MLEstimator, 689
 - mappel::PointEmitterModel, 752
- get_rng_manager
 - mappel::Gauss1DModel, 194
 - mappel::Gauss1DsMAP, 222
 - mappel::Gauss1DsMLE, 250
 - mappel::Gauss1DsModel, 278
 - mappel::Gauss2DModel, 366
 - mappel::Gauss2DsMLE, 429
- mappel::Gauss2DModel, 366
- mappel::Gauss2DsMAP, 397
- mappel::Gauss2DsMLE, 429
- mappel::Gauss2DsModel, 461
- mappel::Gauss2DsxyMAP, 490
- mappel::Gauss2DsxyModel, 517
- mappel::MAPEstimator, 583
- mappel::MCMCAdaptor1Ds, 626
- mappel::MCMCAdaptor1D, 608
- mappel::MCMCAdaptor2Ds, 662
- mappel::MCMCAdaptor2D, 644
- mappel::MLEstimator, 689
- mappel::PointEmitterModel, 752
- get_sequence_len
 - mappel::estimator::IterativeMaximizer::Maximizer←Data, 594
- get_size
 - mappel::Gauss1DModel, 195
 - mappel::Gauss1DsMAP, 222
 - mappel::Gauss1DsMLE, 250
 - mappel::Gauss1DsModel, 278
 - mappel::Gauss2DModel, 367
 - mappel::Gauss2DsMAP, 397, 398
 - mappel::Gauss2DsMLE, 430
 - mappel::Gauss2DsModel, 461
 - mappel::Gauss2DsxyMAP, 491
 - mappel::Gauss2DsxyModel, 517
 - mappel::ImageFormat1DBase, 547
 - mappel::ImageFormat2DBase, 553
 - mappel::PoissonNoise1DObjective, 767
 - mappel::PoissonNoise2DObjective, 774
- get_size_image_stack
 - mappel::Gauss1DModel, 195
 - mappel::Gauss1DsMAP, 222
 - mappel::Gauss1DsMLE, 251
 - mappel::Gauss1DsModel, 279
 - mappel::Gauss2DModel, 367
 - mappel::Gauss2DsMAP, 398
 - mappel::Gauss2DsMLE, 430
 - mappel::Gauss2DsModel, 462
 - mappel::Gauss2DsxyMAP, 491
 - mappel::Gauss2DsxyModel, 517
 - mappel::ImageFormat1DBase, 547
 - mappel::ImageFormat2DBase, 554
 - mappel::PoissonNoise1DObjective, 767
 - mappel::PoissonNoise2DObjective, 774

- get_stats
 - mappel::Gauss1DMP, 140
 - mappel::Gauss1DMLE, 168
 - mappel::Gauss1DModel, 195
 - mappel::Gauss1DsMAP, 222
 - mappel::Gauss1DsMLE, 251
 - mappel::Gauss1DsModel, 279
 - mappel::Gauss2DMP, 308
 - mappel::Gauss2DMLE, 338
 - mappel::Gauss2DModel, 367
 - mappel::Gauss2DsMAP, 398
 - mappel::Gauss2DsMLE, 430
 - mappel::Gauss2DsModel, 462
 - mappel::Gauss2DsxyMAP, 491
 - mappel::Gauss2DsxyModel, 518
 - mappel::ImageFormat1DBase, 547
 - mappel::ImageFormat2DBase, 554
 - mappel::MAPEstimator, 583
 - mappel::MCMCAdaptor1Ds, 626
 - mappel::MCMCAdaptor1D, 608
 - mappel::MCMCAdaptor2Ds, 662
 - mappel::MCMCAdaptor2D, 644
 - mappel::MCMCAdaptorBase, 676
 - mappel::MLEstimator, 689
 - mappel::PointEmitterModel, 752
 - mappel::PoissonNoise1DObjective, 767
 - mappel::PoissonNoise2DObjective, 774
 - mappel::estimator::CGaussHeuristicEstimator, 102
 - mappel::estimator::CGaussMLE, 114
 - mappel::estimator::Estimator, 126
 - mappel::estimator::HeuristicEstimator, 540
 - mappel::estimator::IterativeMaximizer, 568
 - mappel::estimator::NewtonDiagonalMaximizer, 711
 - mappel::estimator::NewtonMaximizer, 732
 - mappel::estimator::QuasiNewtonMaximizer, 796
 - mappel::estimator::SimulatedAnnealingMaximizer, 814
 - mappel::estimator::ThreadedEstimator, 850
 - mappel::estimator::TrustRegionMaximizer, 866
- get_theta_sequence
 - mappel::estimator::IterativeMaximizer::Maximizer↔Data, 594
- get_theta_sequence_rllh
 - mappel::estimator::IterativeMaximizer::Maximizer↔Data, 595
- get_total_backtracks
 - mappel::estimator::IterativeMaximizer, 568
 - mappel::estimator::NewtonDiagonalMaximizer, 711
 - mappel::estimator::NewtonMaximizer, 732
 - mappel::estimator::QuasiNewtonMaximizer, 796
 - mappel::estimator::TrustRegionMaximizer, 866
- get_total_der_evals
 - mappel::estimator::IterativeMaximizer, 569
 - mappel::estimator::NewtonDiagonalMaximizer, 712
 - mappel::estimator::NewtonMaximizer, 733
 - mappel::estimator::QuasiNewtonMaximizer, 797
 - mappel::estimator::TrustRegionMaximizer, 867
- get_total_fun_evals
 - mappel::estimator::IterativeMaximizer, 569
 - mappel::estimator::NewtonDiagonalMaximizer, 712
 - mappel::estimator::NewtonMaximizer, 733
 - mappel::estimator::QuasiNewtonMaximizer, 797
 - mappel::estimator::TrustRegionMaximizer, 867
- get_total_iterations
 - mappel::estimator::IterativeMaximizer, 569
 - mappel::estimator::NewtonDiagonalMaximizer, 712
 - mappel::estimator::NewtonMaximizer, 733
 - mappel::estimator::QuasiNewtonMaximizer, 797
 - mappel::estimator::TrustRegionMaximizer, 867
- get_ubound
 - mappel::Gauss1DMP, 140
 - mappel::Gauss1DMLE, 168
 - mappel::Gauss1DModel, 195
 - mappel::Gauss1DsMAP, 223
 - mappel::Gauss1DsMLE, 251
 - mappel::Gauss1DsModel, 279
 - mappel::Gauss2DMP, 308
 - mappel::Gauss2DMLE, 338
 - mappel::Gauss2DModel, 367
 - mappel::Gauss2DsMAP, 398
 - mappel::Gauss2DsMLE, 430
 - mappel::Gauss2DsModel, 462
 - mappel::Gauss2DsxyMAP, 491
 - mappel::Gauss2DsxyModel, 518
 - mappel::MAPEstimator, 583
 - mappel::MCMCAdaptor1Ds, 626
 - mappel::MCMCAdaptor1D, 608
 - mappel::MCMCAdaptor2Ds, 662
 - mappel::MCMCAdaptor2D, 644
 - mappel::MLEstimator, 689
 - mappel::PointEmitterModel, 752
- global_default_mcmc_sigma_scale
 - mappel::Gauss1DMP, 152
 - mappel::Gauss1DMLE, 180
 - mappel::Gauss1DModel, 207
 - mappel::Gauss1DsMAP, 236
 - mappel::Gauss1DsMLE, 264
 - mappel::Gauss1DsModel, 292
 - mappel::Gauss2DMP, 321
 - mappel::Gauss2DMLE, 351
 - mappel::Gauss2DModel, 380
 - mappel::Gauss2DsMAP, 412
 - mappel::Gauss2DsMLE, 444
 - mappel::Gauss2DsModel, 476
 - mappel::Gauss2DsxyMAP, 503
 - mappel::MCMCAdaptor1Ds, 635
 - mappel::MCMCAdaptor1D, 617
 - mappel::MCMCAdaptor2Ds, 672

- mappel::MCMCAdaptor2D, 653
- mappel::MCMCAdaptorBase, 676
- global_max_mcmc_sigma_scale
 - mappel::Gauss1DMAP, 153
 - mappel::Gauss1DMLE, 181
 - mappel::Gauss1DModel, 207
 - mappel::Gauss1DsMAP, 236
 - mappel::Gauss1DsMLE, 264
 - mappel::Gauss1DsModel, 292
 - mappel::Gauss2DMAP, 321
 - mappel::Gauss2DMLE, 351
 - mappel::Gauss2DModel, 380
 - mappel::Gauss2DsMAP, 412
 - mappel::Gauss2DsMLE, 445
 - mappel::Gauss2DsModel, 476
 - mappel::Gauss2DsxyMAP, 503
 - mappel::MCMCAdaptor1Ds, 635
 - mappel::MCMCAdaptor1D, 617
 - mappel::MCMCAdaptor2Ds, 672
 - mappel::MCMCAdaptor2D, 653
 - mappel::MCMCAdaptorBase, 676
- global_max_psf_sigma
 - mappel::Gauss1DMAP, 153
 - mappel::Gauss1DMLE, 181
 - mappel::Gauss1DModel, 207
 - mappel::Gauss1DsMAP, 236
 - mappel::Gauss1DsMLE, 264
 - mappel::Gauss1DsModel, 292
 - mappel::Gauss2DMAP, 321
 - mappel::Gauss2DMLE, 351
 - mappel::Gauss2DModel, 380
 - mappel::Gauss2DsMAP, 413
 - mappel::Gauss2DsMLE, 445
 - mappel::Gauss2DsModel, 476
 - mappel::Gauss2DsxyMAP, 504
 - mappel::Gauss2DsxyModel, 527
 - mappel::MAPEstimator, 590
 - mappel::MCMCAdaptor1Ds, 635
 - mappel::MCMCAdaptor1D, 617
 - mappel::MCMCAdaptor2Ds, 672
 - mappel::MCMCAdaptor2D, 653
 - mappel::MLEstimator, 696
 - mappel::PointEmitterModel, 759
- global_min_psf_sigma
 - mappel::Gauss1DMAP, 153
 - mappel::Gauss1DMLE, 181
 - mappel::Gauss1DModel, 208
 - mappel::Gauss1DsMAP, 236
 - mappel::Gauss1DsMLE, 265
 - mappel::Gauss1DsModel, 292
 - mappel::Gauss2DMAP, 321
 - mappel::Gauss2DMLE, 351
 - mappel::Gauss2DModel, 381
 - mappel::Gauss2DsMAP, 413
 - mappel::Gauss2DsMLE, 445
 - mappel::Gauss2DsModel, 476
 - mappel::Gauss2DsxyMAP, 504
 - mappel::Gauss2DsxyModel, 527
 - mappel::MAPEstimator, 590
 - mappel::MCMCAdaptor1Ds, 635
 - mappel::MCMCAdaptor1D, 617
 - mappel::MCMCAdaptor2Ds, 672
 - mappel::MCMCAdaptor2D, 653
 - mappel::MLEstimator, 696
 - mappel::PointEmitterModel, 759
- global_min_size
 - mappel::Gauss1DMAP, 153
 - mappel::Gauss1DMLE, 181
 - mappel::Gauss1DModel, 208
 - mappel::Gauss1DsMAP, 237
 - mappel::Gauss1DsMLE, 265
 - mappel::Gauss1DsModel, 293
 - mappel::Gauss2DMAP, 322
 - mappel::Gauss2DMLE, 352
 - mappel::Gauss2DModel, 381
 - mappel::Gauss2DsMAP, 413
 - mappel::Gauss2DsMLE, 445
 - mappel::Gauss2DsModel, 476
 - mappel::Gauss2DsxyMAP, 504
 - mappel::Gauss2DsxyModel, 527
 - mappel::ImageFormat1DBase, 548
 - mappel::ImageFormat2DBase, 555
 - mappel::PoissonNoise1DObjective, 769
 - mappel::PoissonNoise2DObjective, 776
- grad
 - mappel::estimator::IterativeMaximizer::Maximizer←
Data, 599
 - mappel::methods::likelihood, 69
 - mappel::methods::objective, 74

- grad2
 - mappel::methods::likelihood, [69](#)
 - mappel::methods::objective, [74](#), [75](#)
- grad_components
 - mappel::methods::likelihood::debug, [71](#)
 - mappel::methods::objective::debug, [78](#), [79](#)
- grad_stack
 - mappel::methods::objective::openmp, [81](#)
- GradRatio
 - mappel::estimator, [50](#)
- Gx
 - mappel::Gauss1DModel::Stencil, [839](#)
 - mappel::Gauss1DsModel::Stencil, [825](#)
 - mappel::Gauss2DModel::Stencil, [830](#)
 - mappel::Gauss2DsModel::Stencil, [835](#)
 - mappel::Gauss2DsxyModel::Stencil, [821](#)
- Gy
 - mappel::Gauss2DModel::Stencil, [830](#)
 - mappel::Gauss2DsModel::Stencil, [836](#)
 - mappel::Gauss2DsxyModel::Stencil, [821](#)
- has_fixed_parameters
 - mappel::estimator::IterativeMaximizer::Maximizer↔
Data, [595](#)
- has_hyperparam
 - mappel::Gauss1DMap, [140](#)
 - mappel::Gauss1DMLE, [168](#)
 - mappel::Gauss1DModel, [195](#)
 - mappel::Gauss1DsMap, [223](#)
 - mappel::Gauss1DsMLE, [251](#)
 - mappel::Gauss1DsModel, [279](#)
 - mappel::Gauss2DMap, [308](#)
 - mappel::Gauss2DMLE, [338](#)
 - mappel::Gauss2DModel, [367](#)
 - mappel::Gauss2DsMap, [398](#)
 - mappel::Gauss2DsMLE, [430](#)
 - mappel::Gauss2DsModel, [462](#)
 - mappel::Gauss2DsxyMap, [491](#)
 - mappel::Gauss2DsxyModel, [518](#)
 - mappel::MAPEstimator, [583](#)
 - mappel::MCMCAdaptor1Ds, [626](#)
 - mappel::MCMCAdaptor1D, [608](#)
 - mappel::MCMCAdaptor2Ds, [663](#)
 - mappel::MCMCAdaptor2D, [644](#)
 - mappel::MLEstimator, [689](#)
 - mappel::PointEmitterModel, [752](#)
- has_theta_sequence
 - mappel::estimator::IterativeMaximizer::Maximizer↔
Data, [595](#)
- hessian
 - mappel::methods::likelihood, [69](#)
 - mappel::methods::objective, [75](#), [76](#)
- hessian_components
 - mappel::methods::likelihood::debug, [71](#)
- mappel::methods::objective::debug, [79](#)
- hessian_stack
 - mappel::methods::objective::openmp, [81](#)
- HeuristicEstimator
 - mappel::estimator::HeuristicEstimator, [532](#)
- I
 - mappel::Gauss1DModel::Stencil, [838](#)
 - mappel::Gauss1DsModel::Stencil, [824](#)
 - mappel::Gauss2DModel::Stencil, [828](#)
 - mappel::Gauss2DsModel::Stencil, [833](#)
 - mappel::Gauss2DsxyModel::Stencil, [819](#)
- icontains
 - mappel, [36](#)
- IdxMatT
 - mappel, [27](#)
- IdxVecT
 - mappel, [27](#)
- IdxT
 - mappel, [27](#)
- im
 - mappel::estimator::IterativeMaximizer::Maximizer↔
Data, [599](#)
- ImageCoordT
 - mappel, [27](#)
 - mappel::Gauss1DMap, [133](#)
 - mappel::Gauss1DMLE, [161](#)
 - mappel::Gauss1DModel, [188](#)
 - mappel::Gauss1DsMap, [215](#)
 - mappel::Gauss1DsMLE, [244](#)
 - mappel::Gauss1DsModel, [272](#)
 - mappel::Gauss2DMap, [300](#)
 - mappel::Gauss2DMLE, [330](#)
 - mappel::Gauss2DModel, [360](#)
 - mappel::Gauss2DsMap, [389](#)
 - mappel::Gauss2DsMLE, [421](#)
 - mappel::Gauss2DsModel, [454](#)
 - mappel::Gauss2DsxyMap, [484](#)
 - mappel::Gauss2DsxyModel, [511](#)
 - mappel::ImageFormat1DBase, [545](#)
 - mappel::ImageFormat2DBase, [551](#)
 - mappel::PoissonNoise1DObjective, [764](#)
 - mappel::PoissonNoise2DObjective, [771](#)
- ImageFormat1DBase
 - mappel::ImageFormat1DBase, [546](#)
- ImageFormat1DBase.cpp, [902](#)
- ImageFormat1DBase.h, [902](#)
- ImageFormat2DBase
 - mappel::ImageFormat2DBase, [552](#)
- ImageFormat2DBase.cpp, [903](#)
- ImageFormat2DBase.h, [904](#)
- ImagePixelT
 - mappel, [27](#)
 - mappel::Gauss1DMap, [133](#)

- mappel::Gauss1DMLE, [161](#)
- mappel::Gauss1DModel, [188](#)
- mappel::Gauss1DsMAP, [215](#)
- mappel::Gauss1DsMLE, [244](#)
- mappel::Gauss1DsModel, [272](#)
- mappel::Gauss2DMAP, [300](#)
- mappel::Gauss2DMLE, [330](#)
- mappel::Gauss2DModel, [360](#)
- mappel::Gauss2DsMAP, [389](#)
- mappel::Gauss2DsMLE, [422](#)
- mappel::Gauss2DsModel, [454](#)
- mappel::Gauss2DsxyMAP, [484](#)
- mappel::Gauss2DsxyModel, [511](#)
- mappel::ImageFormat1DBase, [545](#)
- mappel::ImageFormat2DBase, [551](#)
- mappel::PoissonNoise1DObjective, [764](#)
- mappel::PoissonNoise2DObjective, [771](#)
- ImageShapeT
 - mappel::Gauss1DMAP, [133](#)
 - mappel::Gauss1DMLE, [161](#)
 - mappel::Gauss1DModel, [188](#)
 - mappel::Gauss1DsMAP, [215](#)
 - mappel::Gauss1DsMLE, [244](#)
 - mappel::Gauss1DsModel, [272](#)
 - mappel::Gauss2DMAP, [300](#)
 - mappel::Gauss2DMLE, [330](#)
 - mappel::Gauss2DModel, [360](#)
 - mappel::Gauss2DsMAP, [389](#)
 - mappel::Gauss2DsMLE, [422](#)
 - mappel::Gauss2DsModel, [454](#)
 - mappel::Gauss2DsxyMAP, [484](#)
 - mappel::Gauss2DsxyModel, [511](#)
 - mappel::ImageFormat1DBase, [545](#)
 - mappel::ImageFormat2DBase, [551](#)
 - mappel::PoissonNoise1DObjective, [764](#)
 - mappel::PoissonNoise2DObjective, [771](#)
- ImageSizeShapeT
 - mappel::Gauss1DMAP, [133](#)
 - mappel::Gauss1DMLE, [161](#)
 - mappel::Gauss1DModel, [188](#)
 - mappel::Gauss1DsMAP, [215](#)
 - mappel::Gauss1DsMLE, [244](#)
 - mappel::Gauss1DsModel, [272](#)
 - mappel::Gauss2DMAP, [300](#)
 - mappel::Gauss2DMLE, [330](#)
 - mappel::Gauss2DModel, [360](#)
 - mappel::Gauss2DsMAP, [390](#)
 - mappel::Gauss2DsMLE, [422](#)
 - mappel::Gauss2DsModel, [454](#)
 - mappel::Gauss2DsxyMAP, [484](#)
 - mappel::Gauss2DsxyModel, [511](#)
 - mappel::ImageFormat1DBase, [545](#)
 - mappel::ImageFormat2DBase, [551](#)
 - mappel::PoissonNoise1DObjective, [765](#)
- mappel::PoissonNoise2DObjective, [772](#)
- ImageSizeVecShapeT
 - mappel::Gauss1DMAP, [133](#)
 - mappel::Gauss1DMLE, [161](#)
 - mappel::Gauss1DModel, [189](#)
 - mappel::Gauss1DsMAP, [216](#)
 - mappel::Gauss1DsMLE, [244](#)
 - mappel::Gauss1DsModel, [273](#)
 - mappel::Gauss2DMAP, [300](#)
 - mappel::Gauss2DMLE, [330](#)
 - mappel::Gauss2DModel, [360](#)
 - mappel::Gauss2DsMAP, [390](#)
 - mappel::Gauss2DsMLE, [422](#)
 - mappel::Gauss2DsModel, [454](#)
 - mappel::Gauss2DsxyMAP, [485](#)
 - mappel::Gauss2DsxyModel, [511](#)
 - mappel::ImageFormat1DBase, [545](#)
 - mappel::ImageFormat2DBase, [551](#)
 - mappel::PoissonNoise1DObjective, [765](#)
 - mappel::PoissonNoise2DObjective, [772](#)
- ImageSizeVecT
 - mappel::Gauss1DMAP, [133](#)
 - mappel::Gauss1DMLE, [161](#)
 - mappel::Gauss1DModel, [189](#)
 - mappel::Gauss1DsMAP, [216](#)
 - mappel::Gauss1DsMLE, [244](#)
 - mappel::Gauss1DsModel, [273](#)
 - mappel::Gauss2DMAP, [301](#)
 - mappel::Gauss2DMLE, [331](#)
 - mappel::Gauss2DModel, [361](#)
 - mappel::Gauss2DsMAP, [390](#)
 - mappel::Gauss2DsMLE, [422](#)
 - mappel::Gauss2DsModel, [455](#)
 - mappel::Gauss2DsxyMAP, [485](#)
 - mappel::Gauss2DsxyModel, [512](#)
 - mappel::ImageFormat1DBase, [545](#)
 - mappel::ImageFormat2DBase, [551](#)
 - mappel::PoissonNoise1DObjective, [765](#)
 - mappel::PoissonNoise2DObjective, [772](#)
- ImageSizeT
 - mappel::Gauss1DMAP, [133](#)
 - mappel::Gauss1DMLE, [161](#)
 - mappel::Gauss1DModel, [189](#)
 - mappel::Gauss1DsMAP, [216](#)
 - mappel::Gauss1DsMLE, [244](#)
 - mappel::Gauss1DsModel, [272](#)
 - mappel::Gauss2DMAP, [300](#)
 - mappel::Gauss2DMLE, [330](#)
 - mappel::Gauss2DModel, [360](#)
 - mappel::Gauss2DsMAP, [390](#)
 - mappel::Gauss2DsMLE, [422](#)
 - mappel::Gauss2DsModel, [454](#)
 - mappel::Gauss2DsxyMAP, [485](#)
 - mappel::Gauss2DsxyModel, [511](#)

- mappel::ImageFormat1DBase, [545](#)
- mappel::ImageFormat2DBase, [551](#)
- mappel::PoissonNoise1DObjective, [765](#)
- mappel::PoissonNoise2DObjective, [772](#)
- ImageStackShapeT
 - mappel::Gauss1DModel, [133](#)
 - mappel::Gauss1DModel, [161](#)
 - mappel::Gauss1DModel, [189](#)
 - mappel::Gauss1DsMAP, [216](#)
 - mappel::Gauss1DsMLE, [244](#)
 - mappel::Gauss1DsModel, [273](#)
 - mappel::Gauss2DModel, [301](#)
 - mappel::Gauss2DModel, [331](#)
 - mappel::Gauss2DModel, [361](#)
 - mappel::Gauss2DsMAP, [390](#)
 - mappel::Gauss2DsMLE, [422](#)
 - mappel::Gauss2DsModel, [455](#)
 - mappel::Gauss2DsxyMAP, [485](#)
 - mappel::Gauss2DsxyModel, [512](#)
 - mappel::ImageFormat1DBase, [545](#)
 - mappel::ImageFormat2DBase, [552](#)
 - mappel::PoissonNoise1DObjective, [765](#)
 - mappel::PoissonNoise2DObjective, [772](#)
- ImageStackT
 - mappel, [27](#)
 - mappel::Gauss1DModel, [134](#)
 - mappel::Gauss1DModel, [162](#)
 - mappel::Gauss1DModel, [189](#)
 - mappel::Gauss1DsMAP, [216](#)
 - mappel::Gauss1DsMLE, [245](#)
 - mappel::Gauss1DsModel, [273](#)
 - mappel::Gauss2DModel, [301](#)
 - mappel::Gauss2DModel, [331](#)
 - mappel::Gauss2DModel, [361](#)
 - mappel::Gauss2DsMAP, [390](#)
 - mappel::Gauss2DsMLE, [423](#)
 - mappel::Gauss2DsModel, [455](#)
 - mappel::Gauss2DsxyMAP, [485](#)
 - mappel::Gauss2DsxyModel, [512](#)
 - mappel::ImageFormat1DBase, [545](#)
 - mappel::ImageFormat2DBase, [552](#)
 - mappel::PoissonNoise1DObjective, [765](#)
 - mappel::PoissonNoise2DObjective, [772](#)
- ImageT
 - mappel, [27](#)
 - mappel::Gauss1DModel, [134](#)
 - mappel::Gauss1DModel, [162](#)
 - mappel::Gauss1DModel, [189](#)
 - mappel::Gauss1DsMAP, [216](#)
 - mappel::Gauss1DsMLE, [245](#)
 - mappel::Gauss1DsModel, [273](#)
 - mappel::Gauss2DModel, [301](#)
 - mappel::Gauss2DModel, [331](#)
 - mappel::Gauss2DModel, [361](#)
- mappel::Gauss2DsMAP, [390](#)
- mappel::Gauss2DsMLE, [423](#)
- mappel::Gauss2DsModel, [455](#)
- mappel::Gauss2DsxyMAP, [485](#)
- mappel::Gauss2DsxyModel, [512](#)
- mappel::ImageFormat1DBase, [546](#)
- mappel::ImageFormat2DBase, [552](#)
- mappel::PoissonNoise1DObjective, [765](#)
- mappel::PoissonNoise2DObjective, [772](#)
- initial_theta_estimate
 - mappel::Gauss1DModel, [140](#)
 - mappel::Gauss1DModel, [168](#)
 - mappel::Gauss1DModel, [195](#), [196](#)
 - mappel::Gauss1DsMAP, [223](#)
 - mappel::Gauss1DsMLE, [251](#)
 - mappel::Gauss1DsModel, [279](#)
 - mappel::Gauss2DModel, [308](#)
 - mappel::Gauss2DModel, [338](#)
 - mappel::Gauss2DModel, [367](#), [368](#)
 - mappel::Gauss2DsMAP, [398](#), [399](#)
 - mappel::Gauss2DsMLE, [430](#), [431](#)
 - mappel::Gauss2DsModel, [462](#), [463](#)
 - mappel::Gauss2DsxyMAP, [491](#), [492](#)
 - mappel::Gauss2DsxyModel, [518](#)
- initialize_arrays
 - mappel::estimator::ProfileBoundsData, [778](#)
 - mappel::estimator::ProfileBoundsDataStack, [781](#)
 - mappel::mcmc::MCMCData, [678](#)
 - mappel::mcmc::MCMCDataStack, [680](#)
 - mappel::mcmc::MCMCDebugData, [682](#)
- Install.md, [905](#)
- is_negative_definite
 - mappel, [36](#)
- is_positive_definite
 - mappel, [37](#)
- is_symmetric
 - mappel, [37](#)
- istarts_with
 - mappel, [37](#)
- IterativeMaximizer
 - mappel::estimator::IterativeMaximizer, [559](#)
- lambda_term_color
 - mappel, [38](#)
- last_backtrack_idx
 - mappel::estimator::IterativeMaximizer, [573](#)
 - mappel::estimator::NewtonDiagonalMaximizer, [717](#)
 - mappel::estimator::NewtonMaximizer, [738](#)
 - mappel::estimator::QuasiNewtonMaximizer, [802](#)
 - mappel::estimator::TrustRegionMaximizer, [872](#)
- lbound
 - mappel::Gauss1DModel, [153](#)
 - mappel::Gauss1DModel, [181](#)
 - mappel::Gauss1DModel, [208](#)

- mappel::Gauss1DsMAP, 237
- mappel::Gauss1DsMLE, 265
- mappel::Gauss1DsModel, 293
- mappel::Gauss2DMAP, 322
- mappel::Gauss2DMLE, 352
- mappel::Gauss2DModel, 381
- mappel::Gauss2DsMAP, 413
- mappel::Gauss2DsMLE, 445
- mappel::Gauss2DsModel, 477
- mappel::Gauss2DsxyMAP, 504
- mappel::Gauss2DsxyModel, 527
- mappel::MAPEstimator, 591
- mappel::MCMCAdaptor1Ds, 635
- mappel::MCMCAdaptor1D, 617
- mappel::MCMCAdaptor2Ds, 672
- mappel::MCMCAdaptor2D, 653
- mappel::MLEstimator, 697
- mappel::PointEmitterModel, 759
- likelihood_objective
 - mappel::methods, 63
- llh
 - mappel::methods::likelihood, 70
 - mappel::methods::objective, 76
- llh_components
 - mappel::methods::likelihood::debug, 72
 - mappel::methods::objective::debug, 79
- llh_stack
 - mappel::methods::objective::openmp, 82
- local_maximize
 - mappel::estimator::IterativeMaximizer, 569
 - mappel::estimator::NewtonDiagonalMaximizer, 712
 - mappel::estimator::NewtonMaximizer, 733
 - mappel::estimator::QuasiNewtonMaximizer, 797
 - mappel::estimator::TrustRegionMaximizer, 867
- local_profile_maximize
 - mappel::estimator::IterativeMaximizer, 569
 - mappel::estimator::NewtonDiagonalMaximizer, 712
 - mappel::estimator::NewtonMaximizer, 733
 - mappel::estimator::QuasiNewtonMaximizer, 797
 - mappel::estimator::TrustRegionMaximizer, 867
- log_likelihood
 - PoissonGaussianNoise2DObjective.h, 931
- log_prior_beta2_const
 - mappel, 38
- log_prior_beta_const
 - mappel, 38
- log_prior_gamma_const
 - mappel, 38
- log_prior_normal_const
 - mappel, 38
- log_prior_pareto_const
 - mappel, 38
- LogicalError
 - mappel::LogicalError, 577
- MAPEstimator
 - mappel::MAPEstimator, 580
- MAPEstimator.h, 905
- MCMCAdaptor1D.cpp, 908
- MCMCAdaptor1D.h, 909
- MCMCAdaptor1Ds
 - mappel::MCMCAdaptor1Ds, 622, 623
- MCMCAdaptor1Ds.cpp, 909
- MCMCAdaptor1Ds.h, 910
- MCMCAdaptor1D
 - mappel::MCMCAdaptor1D, 604, 605
- MCMCAdaptor2D.cpp, 911
- MCMCAdaptor2D.h, 911
- MCMCAdaptor2Ds
 - mappel::MCMCAdaptor2Ds, 659
- MCMCAdaptor2Ds.cpp, 912
- MCMCAdaptor2Ds.h, 912
- MCMCAdaptor2D
 - mappel::MCMCAdaptor2D, 640, 641
- MCMCAdaptorBase
 - mappel::MCMCAdaptorBase, 675
- MCMCAdaptorBase.cpp, 913
- MCMCAdaptorBase.h, 913
- MLEstimator
 - mappel::MLEstimator, 686
- MLEstimator.h, 914
- make_DX_stencil
 - mappel, 38
- make_DXS2_stencil
 - mappel, 38
- make_DXS_stencil
 - mappel, 39
- make_DXSX_stencil
 - mappel, 39
- make_G_stencil
 - mappel, 39
- make_X_stencil
 - mappel, 39
- make_d_stencil
 - mappel, 38
- make_default_prior
 - mappel::Gauss1DMAP, 140
 - mappel::Gauss1DMLE, 168
 - mappel::Gauss1DModel, 196
 - mappel::Gauss1DsMAP, 223
 - mappel::Gauss1DsMLE, 251
 - mappel::Gauss1DsModel, 279
 - mappel::Gauss2DMAP, 309
 - mappel::Gauss2DMLE, 339
 - mappel::Gauss2DModel, 368
 - mappel::Gauss2DsMAP, 399
 - mappel::Gauss2DsMLE, 431
 - mappel::Gauss2DsModel, 463
 - mappel::Gauss2DsxyMAP, 492

- mappel::Gauss2DsxyModel, 518
- make_default_prior_beta_position
 - mappel::Gauss1DMAP, 141
 - mappel::Gauss1DMLE, 169
 - mappel::Gauss1DModel, 196
 - mappel::Gauss1DsMAP, 223
 - mappel::Gauss1DsMLE, 252
 - mappel::Gauss1DsModel, 280
 - mappel::Gauss2DMAP, 309
 - mappel::Gauss2DMLE, 339
 - mappel::Gauss2DModel, 368
 - mappel::Gauss2DsMAP, 399
 - mappel::Gauss2DsMLE, 431
 - mappel::Gauss2DsModel, 463
 - mappel::Gauss2DsxyMAP, 492
- make_default_prior_normal_position
 - mappel::Gauss1DMAP, 141
 - mappel::Gauss1DMLE, 169
 - mappel::Gauss1DModel, 196
 - mappel::Gauss1DsMAP, 224
 - mappel::Gauss1DsMLE, 252
 - mappel::Gauss1DsModel, 280
 - mappel::Gauss2DMAP, 309
 - mappel::Gauss2DMLE, 339
 - mappel::Gauss2DModel, 368
 - mappel::Gauss2DsMAP, 399
 - mappel::Gauss2DsMLE, 431
 - mappel::Gauss2DsModel, 463
 - mappel::Gauss2DsxyMAP, 492
- make_estimator
 - mappel::methods, 63
 - PoissonGaussianNoise2DObjective.h, 931
- make_gaussian_stencil
 - mappel, 39
- make_image
 - mappel::Gauss1DMAP, 141
 - mappel::Gauss1DMLE, 169
 - mappel::Gauss1DModel, 196
 - mappel::Gauss1DsMAP, 224
 - mappel::Gauss1DsMLE, 252
 - mappel::Gauss1DsModel, 280
 - mappel::Gauss2DMAP, 309
 - mappel::Gauss2DMLE, 339
 - mappel::Gauss2DModel, 368
 - mappel::Gauss2DsMAP, 399
 - mappel::Gauss2DsMLE, 432
 - mappel::Gauss2DsModel, 463
 - mappel::Gauss2DsxyMAP, 492
 - mappel::Gauss2DsxyModel, 518
 - mappel::ImageFormat1DBase, 547
 - mappel::ImageFormat2DBase, 554
 - mappel::PoissonNoise1DObjective, 768
 - mappel::PoissonNoise2DObjective, 775
- mappel::Gauss1DMAP, 141
- mappel::Gauss1DMLE, 169
- mappel::Gauss1DModel, 196
- mappel::Gauss1DsMAP, 224
- mappel::Gauss1DsMLE, 252
- mappel::Gauss1DsModel, 280
- mappel::Gauss2DMAP, 309
- mappel::Gauss2DMLE, 339
- mappel::Gauss2DModel, 369
- mappel::Gauss2DsMAP, 400
- mappel::Gauss2DsMLE, 432
- mappel::Gauss2DsModel, 464
- mappel::Gauss2DsxyMAP, 492
- mappel::Gauss2DsxyModel, 518
- mappel::ImageFormat1DBase, 547
- mappel::ImageFormat2DBase, 554
- mappel::PoissonNoise1DObjective, 768
- mappel::PoissonNoise2DObjective, 775
- make_internal_1Dsum_estimator
 - mappel::Gauss2DMAP, 310
 - mappel::Gauss2DMLE, 340
 - mappel::Gauss2DModel, 369
 - mappel::Gauss2DsMAP, 400
 - mappel::Gauss2DsMLE, 432
 - mappel::Gauss2DsModel, 464
- make_param
 - mappel::Gauss1DMAP, 141
 - mappel::Gauss1DMLE, 169
 - mappel::Gauss1DModel, 196, 197
 - mappel::Gauss1DsMAP, 224
 - mappel::Gauss1DsMLE, 252
 - mappel::Gauss1DsModel, 280
 - mappel::Gauss2DMAP, 310
 - mappel::Gauss2DMLE, 340
 - mappel::Gauss2DModel, 369
 - mappel::Gauss2DsMAP, 400
 - mappel::Gauss2DsMLE, 432
 - mappel::Gauss2DsModel, 464
 - mappel::Gauss2DsxyMAP, 493
 - mappel::Gauss2DsxyModel, 519
 - mappel::MAPEstimator, 584
 - mappel::MCMCAdaptor1Ds, 626, 627
 - mappel::MCMCAdaptor1D, 609
 - mappel::MCMCAdaptor2Ds, 663
 - mappel::MCMCAdaptor2D, 644, 645
 - mappel::MLEstimator, 690
 - mappel::PointEmitterModel, 753
- make_param_mat
 - mappel::Gauss1DMAP, 142
 - mappel::Gauss1DMLE, 170
 - mappel::Gauss1DModel, 197
 - mappel::Gauss1DsMAP, 224, 225
 - mappel::Gauss1DsMLE, 253
 - mappel::Gauss1DsModel, 281
- make_image_stack

- mappel::Gauss2DModel, 369
- mappel::Gauss2DsMAP, 400
- mappel::Gauss2DsMLE, 433
- mappel::Gauss2DsModel, 464
- mappel::Gauss2DsxyMAP, 493
- mappel::Gauss2DsxyModel, 519
- mappel::MAPEstimator, 584
- mappel::MCMCAdaptor1Ds, 627
- mappel::MCMCAdaptor1D, 609
- mappel::MCMCAdaptor2Ds, 663
- mappel::MCMCAdaptor2D, 645
- mappel::MLEstimator, 690
- mappel::PointEmitterModel, 753
- make_param_mat_stack
 - mappel::Gauss1DModel, 197
 - mappel::Gauss1DsMAP, 225
 - mappel::Gauss1DsMLE, 253
 - mappel::Gauss1DsModel, 281
 - mappel::Gauss2DModel, 370
 - mappel::Gauss2DsMAP, 401
 - mappel::Gauss2DsMLE, 433
 - mappel::Gauss2DsModel, 465
 - mappel::Gauss2DsxyMAP, 493
 - mappel::Gauss2DsxyModel, 519
 - mappel::MAPEstimator, 584
 - mappel::MCMCAdaptor1Ds, 627
 - mappel::MCMCAdaptor1D, 609
 - mappel::MCMCAdaptor2Ds, 663, 664
 - mappel::MCMCAdaptor2D, 645
 - mappel::MLEstimator, 690
 - mappel::PointEmitterModel, 753
- make_param_stack
 - mappel::Gauss1DModel, 197
 - mappel::Gauss1DsMAP, 225
 - mappel::Gauss1DsMLE, 253
 - mappel::Gauss1DsModel, 281
 - mappel::Gauss2DModel, 370
 - mappel::Gauss2DsMAP, 401
 - mappel::Gauss2DsMLE, 433
 - mappel::Gauss2DsModel, 465
 - mappel::Gauss2DsxyMAP, 493, 494
 - mappel::Gauss2DsxyModel, 519, 520
 - mappel::MAPEstimator, 584, 585
 - mappel::MCMCAdaptor1Ds, 627
- mappel::MCMCAdaptor1D, 609, 610
- mappel::MCMCAdaptor2Ds, 664
- mappel::MCMCAdaptor2D, 645
- mappel::MLEstimator, 690, 691
- mappel::PointEmitterModel, 753, 754
- make_prior_beta_position
 - mappel::Gauss1DModel, 198
 - mappel::Gauss1DsMAP, 225
 - mappel::Gauss1DsMLE, 253
 - mappel::Gauss1DsModel, 281
 - mappel::Gauss2DModel, 370
 - mappel::Gauss2DsMAP, 401
 - mappel::Gauss2DsMLE, 433
 - mappel::Gauss2DsModel, 465
 - mappel::Gauss2DsxyMAP, 494
 - mappel::Gauss2DsxyModel, 520
- make_prior_component_intensity
 - mappel::Gauss1DModel, 198
 - mappel::Gauss1DsMAP, 225
 - mappel::Gauss1DsMLE, 254
 - mappel::Gauss1DsModel, 282
 - mappel::Gauss2DModel, 370
 - mappel::Gauss2DsMAP, 401
 - mappel::Gauss2DsMLE, 434
 - mappel::Gauss2DsModel, 465
 - mappel::Gauss2DsxyMAP, 494
 - mappel::Gauss2DsxyModel, 520
 - mappel::MAPEstimator, 585
 - mappel::MCMCAdaptor1Ds, 628
 - mappel::MCMCAdaptor1D, 610
 - mappel::MCMCAdaptor2Ds, 664
 - mappel::MCMCAdaptor2D, 646
 - mappel::MLEstimator, 691
 - mappel::PointEmitterModel, 754
- make_prior_component_position_beta
 - mappel::Gauss1DModel, 198
 - mappel::Gauss1DsMAP, 226
 - mappel::Gauss1DsMLE, 254
 - mappel::Gauss1DsModel, 282
 - mappel::Gauss2DModel, 371
 - mappel::Gauss2DsMAP, 402
 - mappel::Gauss2DsMLE, 434

- mappel::Gauss2DsModel, [466](#)
- mappel::Gauss2DsxyMAP, [494](#)
- mappel::Gauss2DsxyModel, [520](#)
- mappel::MAPEstimator, [585](#)
- mappel::MCMCAdaptor1Ds, [628](#)
- mappel::MCMCAdaptor1D, [610](#)
- mappel::MCMCAdaptor2Ds, [664](#)
- mappel::MCMCAdaptor2D, [646](#)
- mappel::MLEstimator, [691](#)
- mappel::PointEmitterModel, [754](#)
- make_prior_component_position_normal
 - mappel::Gauss1DMAP, [143](#)
 - mappel::Gauss1DMLE, [171](#)
 - mappel::Gauss1DModel, [198](#)
 - mappel::Gauss1DsMAP, [226](#)
 - mappel::Gauss1DsMLE, [254](#)
 - mappel::Gauss1DsModel, [282](#)
 - mappel::Gauss2DMAP, [312](#)
 - mappel::Gauss2DMLE, [342](#)
 - mappel::Gauss2DModel, [371](#)
 - mappel::Gauss2DsMAP, [402](#)
 - mappel::Gauss2DsMLE, [434](#)
 - mappel::Gauss2DsModel, [466](#)
 - mappel::Gauss2DsxyMAP, [494](#)
 - mappel::Gauss2DsxyModel, [520](#)
 - mappel::MAPEstimator, [585](#)
 - mappel::MCMCAdaptor1Ds, [628](#)
 - mappel::MCMCAdaptor1D, [610](#)
 - mappel::MCMCAdaptor2Ds, [665](#)
 - mappel::MCMCAdaptor2D, [646](#)
 - mappel::MLEstimator, [691](#)
 - mappel::PointEmitterModel, [754](#)
- make_prior_component_sigma
 - mappel::Gauss1DMAP, [143](#)
 - mappel::Gauss1DMLE, [171](#)
 - mappel::Gauss1DModel, [198](#)
 - mappel::Gauss1DsMAP, [226](#)
 - mappel::Gauss1DsMLE, [254](#)
 - mappel::Gauss1DsModel, [282](#)
 - mappel::Gauss2DMAP, [312](#)
 - mappel::Gauss2DMLE, [342](#)
 - mappel::Gauss2DModel, [371](#)
 - mappel::Gauss2DsMAP, [402](#)
 - mappel::Gauss2DsMLE, [434](#)
 - mappel::Gauss2DsModel, [466](#)
 - mappel::Gauss2DsxyMAP, [495](#)
 - mappel::Gauss2DsxyModel, [521](#)
 - mappel::MAPEstimator, [585](#)
 - mappel::MCMCAdaptor1Ds, [628](#)
 - mappel::MCMCAdaptor1D, [610](#)
 - mappel::MCMCAdaptor2Ds, [665](#)
 - mappel::MCMCAdaptor2D, [646](#)
 - mappel::MLEstimator, [691](#)
 - mappel::PointEmitterModel, [754](#)
- make_prior_normal_position
 - mappel::Gauss1DMAP, [144](#)
 - mappel::Gauss1DMLE, [172](#)
 - mappel::Gauss1DModel, [199](#)
 - mappel::Gauss1DsMAP, [226](#)
 - mappel::Gauss1DsMLE, [255](#)
 - mappel::Gauss1DsModel, [283](#)
 - mappel::Gauss2DMAP, [312](#)
 - mappel::Gauss2DMLE, [342](#)
 - mappel::Gauss2DModel, [371](#)
 - mappel::Gauss2DsMAP, [402](#)
 - mappel::Gauss2DsMLE, [435](#)
 - mappel::Gauss2DsModel, [466](#)
 - mappel::Gauss2DsxyMAP, [495](#)
 - mappel::Gauss2DsxyModel, [521](#)
- make_stencil
 - mappel::Gauss1DMAP, [144](#)
 - mappel::Gauss1DMLE, [172](#)
 - mappel::Gauss1DModel, [199](#)
 - mappel::Gauss1DsMAP, [227](#)
 - mappel::Gauss1DsMLE, [255](#)
 - mappel::Gauss1DsModel, [283](#)
 - mappel::Gauss2DMAP, [312](#)
 - mappel::Gauss2DMLE, [342](#)
 - mappel::Gauss2DModel, [371](#)
 - mappel::Gauss2DsMAP, [403](#)
 - mappel::Gauss2DsMLE, [435](#)
 - mappel::Gauss2DsModel, [466](#)
 - mappel::Gauss2DsxyMAP, [495](#)
 - mappel::Gauss2DsxyModel, [521](#)
- make_unique
 - mappel, [39](#)
- mappel, [20](#)
 - beta2_prior_grad, [29](#)
 - beta2_prior_grad2, [29](#)
 - beta_prior_grad, [29](#)
 - beta_prior_grad2, [29](#)
 - BoolVecT, [26](#)
 - BoolT, [26](#)
 - cgauss_compute_estimate, [29](#), [30](#)
 - cgauss_compute_estimate_debug, [30](#)
 - cgauss_heuristic_compute_estimate, [30](#), [31](#)
 - check_lower_bound_hyperparameter, [31](#)
 - check_positive_hyperparameter, [31](#)
 - check_unit_hyperparameter, [31](#)
 - chisq_quantile, [31](#)
 - cholesky, [31](#)
 - cholesky_convert_full_matrix, [32](#)
 - cholesky_convert_lower_triangular, [32](#)
 - cholesky_make_negative_definite, [32](#)
 - cholesky_make_positive_definite, [32](#)
 - cholesky_solve, [32](#)
 - clamp, [33](#)
 - copy_Lsym_mat, [33](#)

copy_Usym_mat, 33
copy_Usym_mat_stack, 33
CubeT, 27
enable_all_cpus, 33
EnableIfSubclassT, 27
estimate_background, 33, 34
estimate_gaussian_2Dmax, 34
estimate_gaussian_3Dmax, 34
estimate_intensity, 34
fill_DX_stencil, 34
fill_DXS2_stencil, 34
fill_DXS_stencil, 34
fill_DXSX_stencil, 35
fill_G_stencil, 35
fill_X_stencil, 35
fill_d_stencil, 34
fill_gaussian_stencil, 35
gamma_prior_grad, 35
gamma_prior_grad2, 35
gauss_norm, 35
gaussian_3D_convolution, 35
gaussian_convolution, 36
generate_poisson, 36
generate_poisson_large, 36
generate_poisson_small, 36
icontains, 36
IdxMatT, 27
IdxVecT, 27
IdxT, 27
ImageCoordT, 27
ImagePixelT, 27
ImageStackT, 27
ImageT, 27
is_negative_definite, 36
is_positive_definite, 37
is_symmetric, 37
istarts_with, 37
lambda_term_color, 38
log_prior_beta2_const, 38
log_prior_beta_const, 38
log_prior_gamma_const, 38
log_prior_normal_const, 38
log_prior_pareto_const, 38
make_DX_stencil, 38
make_DXS2_stencil, 38
make_DXS_stencil, 39
make_DXSX_stencil, 39
make_G_stencil, 39
make_X_stencil, 39
make_d_stencil, 38
make_gaussian_stencil, 39
make_unique, 39
MappelError, 27
MatT, 28
maxidx, 40
ModelDataStackT, 28
ModelDataT, 28
modified_cholesky, 40
norm_sq, 40
normal_prior_grad, 40
normal_prior_grad2, 40
normal_quantile_onesided, 40
normal_quantile_twosided, 41
operator<<, 41
ParallelRngGeneratorT, 28
ParallelRngManagerT, 28
ParamVecT, 28
ParamT, 28
pareto_prior_grad, 42
pareto_prior_grad2, 42
poisson_log_likelihood, 42
print_centered_title, 42
print_image, 42
print_labeled_image, 43
print_text_image, 43
print_vec_row, 43
refine_gaussian_2Dmax, 43
refine_gaussian_3Dmax, 43
relative_poisson_log_likelihood, 44
restrict_value_range, 44
ReturnIfSubclassT, 28
rllh_beta2_prior, 44
rllh_beta_prior, 44
rllh_gamma_prior, 44
rllh_normal_prior, 44
rllh_pareto_prior, 44
rng_manager, 45
RngSeedT, 28
sgn, 44
square, 44
StatsT, 28
StencilVecT, 29
StencilT, 28
StringVecT, 29
TERM_BLACK, 45
TERM_BLUE, 45
TERM_CYAN, 45
TERM_DIM_BLACK, 45
TERM_DIM_BLUE, 45
TERM_DIM_CYAN, 45
TERM_DIM_GREEN, 46
TERM_DIM_MAGENTA, 46
TERM_DIM_RED, 46
TERM_DIM_WHITE, 46
TERM_DIM_YELLOW, 46
TERM_GREEN, 46
TERM_MAGENTA, 46
TERM_RED, 46

- TERM_WHITE, [47](#)
- TERM_YELLOW, [47](#)
- UniformDistT, [29](#)
- VecFieldT, [29](#)
- VecT, [29](#)
- mappel::ArrayShapeError, [91](#)
 - ArrayShapeError, [92](#)
- mappel::ArraySizeError, [92](#)
 - ArraySizeError, [92](#)
- mappel::Gauss1DMAP, [128](#)
 - bound_theta, [135](#)
 - bounded_theta, [135](#)
 - bounded_theta_stack, [135](#)
 - bounds_epsilon, [150](#)
 - check_image_shape, [136](#)
 - check_param_shape, [136](#)
 - check_psf_sigma, [136](#)
 - check_size, [137](#)
 - default_alpha_sigma, [150](#)
 - default_beta_pos, [150](#)
 - default_intensity_kappa, [151](#)
 - default_max_l, [151](#)
 - default_mean_l, [151](#)
 - default_pixel_mean_bg, [151](#)
 - default_sigma_pos, [151](#)
 - DefaultPriorType, [151](#)
 - DefaultSeperableInitEstimator, [152](#)
 - estimator_names, [152](#)
 - eta_bg, [152](#)
 - eta_l, [152](#)
 - eta_x, [152](#)
 - Gauss1DMAP, [135](#)
 - get_hyperparam_index, [137](#)
 - get_hyperparam_names, [137](#)
 - get_hyperparam_value, [137](#)
 - get_hyperparams, [137](#)
 - get_image_from_stack, [137](#)
 - get_lbound, [137](#)
 - get_mcmc_num_phases, [138](#)
 - get_mcmc_sigma_scale, [138](#)
 - get_num_hyperparams, [138](#)
 - get_num_params, [138](#)
 - get_num_pixels, [138](#)
 - get_param_names, [138](#)
 - get_prior, [138](#), [139](#)
 - get_psf_sigma, [139](#)
 - get_rng_generator, [139](#)
 - get_rng_manager, [139](#)
 - get_size, [139](#)
 - get_size_image_stack, [140](#)
 - get_stats, [140](#)
 - get_ubound, [140](#)
 - global_default_mcmc_sigma_scale, [152](#)
 - global_max_mcmc_sigma_scale, [153](#)
 - global_max_psf_sigma, [153](#)
 - global_max_size, [153](#)
 - global_min_psf_sigma, [153](#)
 - global_min_size, [153](#)
 - has_hyperparam, [140](#)
 - ImageCoordT, [133](#)
 - ImagePixelT, [133](#)
 - ImageShapeT, [133](#)
 - ImageSizeShapeT, [133](#)
 - ImageSizeVecShapeT, [133](#)
 - ImageSizeVecT, [133](#)
 - ImageSizeT, [133](#)
 - ImageStackShapeT, [133](#)
 - ImageStackT, [134](#)
 - ImageT, [134](#)
 - initial_theta_estimate, [140](#)
 - lbound, [153](#)
 - make_default_prior, [140](#)
 - make_default_prior_beta_position, [141](#)
 - make_default_prior_normal_position, [141](#)
 - make_image, [141](#)
 - make_image_stack, [141](#)
 - make_param, [141](#)
 - make_param_mat, [142](#)
 - make_param_mat_stack, [142](#)
 - make_param_stack, [142](#)
 - make_prior_beta_position, [142](#)
 - make_prior_component_intensity, [143](#)
 - make_prior_component_position_beta, [143](#)
 - make_prior_component_position_normal, [143](#)
 - make_prior_component_sigma, [143](#)
 - make_prior_normal_position, [144](#)
 - make_stencil, [144](#)
 - ModelDataStackT, [134](#)
 - ModelDataT, [134](#)
 - name, [154](#)
 - num_dim, [154](#)
 - num_hyperparams, [154](#)
 - num_params, [154](#)
 - num_phases, [154](#)
 - operator=, [144](#), [145](#)
 - ParamVecT, [134](#)
 - ParamT, [134](#)
 - pixel_grad, [145](#)
 - pixel_grad2, [145](#)
 - pixel_hess, [145](#)
 - pixel_hess_update, [145](#)
 - pixel_model_value, [145](#)
 - prior, [154](#)
 - prior_types, [155](#)
 - psf_sigma, [155](#)
 - reflected_theta, [146](#)
 - reflected_theta_stack, [146](#)
 - rename_hyperparam, [146](#)

sample_mcmc_candidate, 146
 sample_prior, 146, 147
 set_background_mcmc_sampling, 147
 set_bounds, 147
 set_hyperparam_names, 147
 set_hyperparam_value, 147
 set_hyperparams, 147
 set_image_in_stack, 148
 set_intensity_mcmc_sampling, 148
 set_lbound, 148
 set_mcmc_num_phases, 148
 set_mcmc_sigma_scale, 148
 set_param_names, 148
 set_prior, 149
 set_psf_sigma, 149
 set_rng_seed, 149
 set_size, 149
 set_ubound, 150
 sigma_scale, 155
 size, 155
 StencilVecT, 134
 theta_in_bounds, 150
 theta_stack_in_bounds, 150
 ubound, 156
 mappel::Gauss1DMLE, 156
 bound_theta, 163
 bounded_theta, 163
 bounded_theta_stack, 163
 bounds_epsilon, 178
 check_image_shape, 164
 check_param_shape, 164
 check_psf_sigma, 164
 check_size, 165
 default_alpha_sigma, 178
 default_beta_pos, 178
 default_intensity_kappa, 179
 default_max_l, 179
 default_mean_l, 179
 default_pixel_mean_bg, 179
 default_sigma_pos, 179
 DefaultPriorType, 179
 DefaultSeperableInitEstimator, 180
 estimator_names, 180
 eta_bg, 180
 eta_l, 180
 eta_x, 180
 Gauss1DMLE, 163
 get_hyperparam_index, 165
 get_hyperparam_names, 165
 get_hyperparam_value, 165
 get_hyperparams, 165
 get_image_from_stack, 165
 get_lbound, 165
 get_mcmc_num_phases, 166
 get_mcmc_sigma_scale, 166
 get_num_hyperparams, 166
 get_num_params, 166
 get_num_pixels, 166
 get_param_names, 166
 get_prior, 166, 167
 get_psf_sigma, 167
 get_rng_generator, 167
 get_rng_manager, 167
 get_size, 167
 get_size_image_stack, 168
 get_stats, 168
 get_ubound, 168
 global_default_mcmc_sigma_scale, 180
 global_max_mcmc_sigma_scale, 181
 global_max_psf_sigma, 181
 global_max_size, 181
 global_min_psf_sigma, 181
 global_min_size, 181
 has_hyperparam, 168
 ImageCoordT, 161
 ImagePixelT, 161
 ImageShapeT, 161
 ImageSizeShapeT, 161
 ImageSizeVecShapeT, 161
 ImageSizeVecT, 161
 ImageSizeT, 161
 ImageStackShapeT, 161
 ImageStackT, 162
 ImageT, 162
 initial_theta_estimate, 168
 lbound, 181
 make_default_prior, 168
 make_default_prior_beta_position, 169
 make_default_prior_normal_position, 169
 make_image, 169
 make_image_stack, 169
 make_param, 169
 make_param_mat, 170
 make_param_mat_stack, 170
 make_param_stack, 170
 make_prior_beta_position, 170
 make_prior_component_intensity, 171
 make_prior_component_position_beta, 171
 make_prior_component_position_normal, 171
 make_prior_component_sigma, 171
 make_prior_normal_position, 172
 make_stencil, 172
 ModelDataStackT, 162
 ModelDataT, 162
 name, 182
 num_dim, 182
 num_hyperparams, 182
 num_params, 182

- num_phases, [182](#)
- operator=, [172](#), [173](#)
- ParamVecT, [162](#)
- ParamT, [162](#)
- pixel_grad, [173](#)
- pixel_grad2, [173](#)
- pixel_hess, [173](#)
- pixel_hess_update, [173](#)
- pixel_model_value, [173](#)
- prior, [182](#)
- prior_types, [183](#)
- psf_sigma, [183](#)
- reflected_theta, [174](#)
- reflected_theta_stack, [174](#)
- rename_hyperparam, [174](#)
- sample_mcmc_candidate, [174](#)
- sample_prior, [174](#), [175](#)
- set_background_mcmc_sampling, [175](#)
- set_bounds, [175](#)
- set_hyperparam_names, [175](#)
- set_hyperparam_value, [175](#)
- set_hyperparams, [175](#)
- set_image_in_stack, [176](#)
- set_intensity_mcmc_sampling, [176](#)
- set_lbound, [176](#)
- set_mcmc_num_phases, [176](#)
- set_mcmc_sigma_scale, [176](#)
- set_param_names, [176](#)
- set_prior, [177](#)
- set_psf_sigma, [177](#)
- set_rng_seed, [177](#)
- set_size, [177](#)
- set_ubound, [178](#)
- sigma_scale, [183](#)
- size, [183](#)
- StencilVecT, [162](#)
- theta_in_bounds, [178](#)
- theta_stack_in_bounds, [178](#)
- ubound, [184](#)
- mappel::Gauss1DModel, [184](#)
 - bound_theta, [190](#)
 - bounded_theta, [190](#)
 - bounded_theta_stack, [191](#)
 - bounds_epsilon, [205](#)
 - check_image_shape, [191](#)
 - check_param_shape, [191](#)
 - check_psf_sigma, [191](#), [192](#)
 - check_size, [192](#)
 - default_alpha_sigma, [205](#)
 - default_beta_pos, [205](#)
 - default_intensity_kappa, [205](#)
 - default_max_l, [205](#)
 - default_mean_l, [206](#)
 - default_pixel_mean_bg, [206](#)
 - default_sigma_pos, [206](#)
 - DefaultPriorType, [206](#)
 - DefaultSeperableInitEstimator, [206](#)
 - eta_bg, [206](#)
 - eta_l, [207](#)
 - eta_x, [207](#)
 - Gauss1DModel, [190](#)
 - get_hyperparam_index, [192](#)
 - get_hyperparam_names, [192](#)
 - get_hyperparam_value, [192](#)
 - get_hyperparams, [192](#)
 - get_image_from_stack, [193](#)
 - get_lbound, [193](#)
 - get_mcmc_num_phases, [193](#)
 - get_mcmc_sigma_scale, [193](#)
 - get_num_hyperparams, [193](#)
 - get_num_params, [193](#)
 - get_num_pixels, [193](#)
 - get_param_names, [194](#)
 - get_prior, [194](#)
 - get_psf_sigma, [194](#)
 - get_rng_generator, [194](#)
 - get_rng_manager, [194](#)
 - get_size, [195](#)
 - get_size_image_stack, [195](#)
 - get_stats, [195](#)
 - get_ubound, [195](#)
 - global_default_mcmc_sigma_scale, [207](#)
 - global_max_mcmc_sigma_scale, [207](#)
 - global_max_psf_sigma, [207](#)
 - global_max_size, [208](#)
 - global_min_psf_sigma, [208](#)
 - global_min_size, [208](#)
 - has_hyperparam, [195](#)
 - ImageCoordT, [188](#)
 - ImagePixelT, [188](#)
 - ImageShapeT, [188](#)
 - ImageSizeShapeT, [189](#)
 - ImageSizeVecShapeT, [189](#)
 - ImageSizeVecT, [189](#)
 - ImageSizeT, [189](#)
 - ImageStackShapeT, [189](#)
 - ImageStackT, [189](#)
 - ImageT, [189](#)
 - initial_theta_estimate, [195](#), [196](#)
 - lbound, [208](#)
 - make_default_prior, [196](#)
 - make_default_prior_beta_position, [196](#)
 - make_default_prior_normal_position, [196](#)
 - make_image, [196](#)
 - make_image_stack, [196](#)
 - make_param, [196](#), [197](#)
 - make_param_mat, [197](#)
 - make_param_mat_stack, [197](#)

- make_param_stack, 197
- make_prior_beta_position, 198
- make_prior_component_intensity, 198
- make_prior_component_position_beta, 198
- make_prior_component_position_normal, 198
- make_prior_component_sigma, 198
- make_prior_normal_position, 199
- make_stencil, 199
- num_dim, 208
- num_hyperparams, 209
- num_params, 209
- num_phases, 209
- operator=, 199, 200
- ParamVecT, 190
- ParamT, 190
- pixel_grad, 200
- pixel_grad2, 200
- pixel_hess, 200
- pixel_hess_update, 200
- pixel_model_value, 200
- prior, 209
- prior_types, 209
- psf_sigma, 210
- reflected_theta, 200
- reflected_theta_stack, 201
- rename_hyperparam, 201
- sample_mcmc_candidate, 201
- sample_prior, 201
- set_background_mcmc_sampling, 202
- set_bounds, 202
- set_hyperparam_names, 202
- set_hyperparam_value, 202
- set_hyperparams, 202
- set_image_in_stack, 202
- set_intensity_mcmc_sampling, 203
- set_lbound, 203
- set_mcmc_num_phases, 203
- set_mcmc_sigma_scale, 203
- set_param_names, 203
- set_prior, 203
- set_psf_sigma, 204
- set_rng_seed, 204
- set_size, 204
- set_ubound, 204
- sigma_scale, 210
- size, 210
- StencilVecT, 190
- theta_in_bounds, 204
- theta_stack_in_bounds, 205
- ubound, 210
- mappel::Gauss1DModel::Stencil, 836
 - bg, 838
 - compute_derivatives, 838
 - DXS, 839
 - derivatives_computed, 839
 - DX, 839
 - dx, 839
 - Gx, 839
 - I, 838
 - model, 840
 - operator<<, 839
 - ParamT, 837
 - Stencil, 838
 - theta, 840
 - X, 840
 - x, 838
- mappel::Gauss1DsMAP, 211
 - bound_theta, 218
 - bounded_theta, 218
 - bounded_theta_stack, 218
 - bounds_epsilon, 233
 - check_image_shape, 218
 - check_param_shape, 219
 - check_psf_sigma, 219
 - check_size, 219
 - default_alpha_sigma, 233
 - default_beta_pos, 234
 - default_intensity_kappa, 234
 - default_max_I, 234
 - default_mean_I, 234
 - default_pixel_mean_bg, 234
 - default_sigma_pos, 234
 - DefaultPriorType, 235
 - DefaultSeperableInitEstimator, 235
 - estimator_names, 235
 - eta_bg, 235
 - eta_I, 235
 - eta_sigma, 235
 - eta_x, 236
 - Gauss1DsMAP, 217, 218
 - get_hyperparam_index, 219
 - get_hyperparam_names, 220
 - get_hyperparam_value, 220
 - get_hyperparams, 220
 - get_image_from_stack, 220
 - get_lbound, 220
 - get_max_sigma, 220
 - get_mcmc_num_phases, 220
 - get_mcmc_sigma_scale, 221
 - get_min_sigma, 221
 - get_num_hyperparams, 221
 - get_num_params, 221
 - get_num_pixels, 221
 - get_param_names, 221
 - get_prior, 221, 222
 - get_rng_generator, 222
 - get_rng_manager, 222
 - get_size, 222

get_size_image_stack, 222
get_stats, 222
get_ubound, 223
global_default_mcmc_sigma_scale, 236
global_max_mcmc_sigma_scale, 236
global_max_psf_sigma, 236
global_max_size, 236
global_min_psf_sigma, 236
global_min_size, 237
has_hyperparam, 223
ImageCoordT, 215
ImagePixelT, 215
ImageShapeT, 215
ImageSizeShapeT, 215
ImageSizeVecShapeT, 216
ImageSizeVecT, 216
ImageSizeT, 216
ImageStackShapeT, 216
ImageStackT, 216
ImageT, 216
initial_theta_estimate, 223
lbound, 237
make_default_prior, 223
make_default_prior_beta_position, 223
make_default_prior_normal_position, 224
make_image, 224
make_image_stack, 224
make_param, 224
make_param_mat, 224, 225
make_param_mat_stack, 225
make_param_stack, 225
make_prior_beta_position, 225
make_prior_component_intensity, 225
make_prior_component_position_beta, 226
make_prior_component_position_normal, 226
make_prior_component_sigma, 226
make_prior_normal_position, 226
make_stencil, 227
ModelDataStackT, 216
ModelDataT, 217
name, 237
num_dim, 237
num_hyperparams, 237
num_params, 237
num_phases, 238
operator=, 227
ParamVecT, 217
ParamT, 217
pixel_grad, 228
pixel_grad2, 228
pixel_hess, 228
pixel_hess_update, 228
pixel_model_value, 228
prior, 238

prior_types, 238
reflected_theta, 228
reflected_theta_stack, 229
rename_hyperparam, 229
sample_mcmc_candidate, 229
sample_prior, 229
set_background_mcmc_sampling, 230
set_bounds, 230
set_hyperparam_names, 230
set_hyperparam_value, 230
set_hyperparams, 230
set_image_in_stack, 230
set_intensity_mcmc_sampling, 231
set_lbound, 231
set_max_sigma, 231
set_mcmc_num_phases, 231
set_mcmc_sigma_scale, 231
set_min_sigma, 232
set_param_names, 232
set_prior, 232
set_rng_seed, 232
set_size, 232, 233
set_ubound, 233
sigma_scale, 238
size, 239
StencilVecT, 217
theta_in_bounds, 233
theta_stack_in_bounds, 233
ubound, 239
mappel::Gauss1DsMLE, 239
bound_theta, 246
bounded_theta, 246
bounded_theta_stack, 246
bounds_epsilon, 262
check_image_shape, 247
check_param_shape, 247
check_psf_sigma, 247
check_size, 248
default_alpha_sigma, 262
default_beta_pos, 262
default_intensity_kappa, 262
default_max_l, 262
default_mean_l, 262
default_pixel_mean_bg, 262
default_sigma_pos, 263
DefaultPriorType, 263
DefaultSeperableInitEstimator, 263
estimator_names, 263
eta_bg, 263
eta_l, 263
eta_sigma, 264
eta_x, 264
Gauss1DsMLE, 246
get_hyperparam_index, 248

get_hyperparam_names, 248
get_hyperparam_value, 248
get_hyperparams, 248
get_image_from_stack, 248
get_lbound, 248
get_max_sigma, 249
get_mcmc_num_phases, 249
get_mcmc_sigma_scale, 249
get_min_sigma, 249
get_num_hyperparams, 249
get_num_params, 249
get_num_pixels, 249
get_param_names, 250
get_prior, 250
get_rng_generator, 250
get_rng_manager, 250
get_size, 250
get_size_image_stack, 251
get_stats, 251
get_ubound, 251
global_default_mcmc_sigma_scale, 264
global_max_mcmc_sigma_scale, 264
global_max_psf_sigma, 264
global_max_size, 264
global_min_psf_sigma, 265
global_min_size, 265
has_hyperparam, 251
ImageCoordT, 244
ImagePixelT, 244
ImageShapeT, 244
ImageSizeShapeT, 244
ImageSizeVecShapeT, 244
ImageSizeVecT, 244
ImageSizeT, 244
ImageStackShapeT, 244
ImageStackT, 245
ImageT, 245
initial_theta_estimate, 251
lbound, 265
make_default_prior, 251
make_default_prior_beta_position, 252
make_default_prior_normal_position, 252
make_image, 252
make_image_stack, 252
make_param, 252
make_param_mat, 253
make_param_mat_stack, 253
make_param_stack, 253
make_prior_beta_position, 253
make_prior_component_intensity, 254
make_prior_component_position_beta, 254
make_prior_component_position_normal, 254
make_prior_component_sigma, 254
make_prior_normal_position, 255
make_stencil, 255
ModelDataStackT, 245
ModelDataT, 245
name, 265
num_dim, 265
num_hyperparams, 265
num_params, 266
num_phases, 266
operator=, 255, 256
ParamVecT, 245
ParamT, 245
pixel_grad, 256
pixel_grad2, 256
pixel_hess, 256
pixel_hess_update, 256
pixel_model_value, 256
prior, 266
prior_types, 266
reflected_theta, 257
reflected_theta_stack, 257
rename_hyperparam, 257
sample_mcmc_candidate, 257
sample_prior, 257, 258
set_background_mcmc_sampling, 258
set_bounds, 258
set_hyperparam_names, 258
set_hyperparam_value, 258
set_hyperparams, 258
set_image_in_stack, 259
set_intensity_mcmc_sampling, 259
set_lbound, 259
set_max_sigma, 259
set_mcmc_num_phases, 259
set_mcmc_sigma_scale, 260
set_min_sigma, 260
set_param_names, 260
set_prior, 260
set_rng_seed, 260
set_size, 261
set_ubound, 261
sigma_scale, 267
size, 267
StencilVecT, 245
theta_in_bounds, 261
theta_stack_in_bounds, 261
ubound, 267
mappel::Gauss1DsModel, 268
bound_theta, 274
bounded_theta, 274
bounded_theta_stack, 274
bounds_epsilon, 290
check_image_shape, 275
check_param_shape, 275
check_psf_sigma, 275

check_size, 276
default_alpha_sigma, 290
default_beta_pos, 290
default_intensity_kappa, 290
default_max_l, 290
default_mean_l, 290
default_pixel_mean_bg, 290
default_sigma_pos, 291
DefaultPriorType, 291
DefaultSeperableInitEstimator, 291
eta_bg, 291
eta_l, 291
eta_sigma, 291
eta_x, 292
Gauss1DsModel, 274
get_hyperparam_index, 276
get_hyperparam_names, 276
get_hyperparam_value, 276
get_hyperparams, 276
get_image_from_stack, 276
get_lbound, 276
get_max_sigma, 277
get_mcmc_num_phases, 277
get_mcmc_sigma_scale, 277
get_min_sigma, 277
get_num_hyperparams, 277
get_num_params, 277
get_num_pixels, 277
get_param_names, 278
get_prior, 278
get_rng_generator, 278
get_rng_manager, 278
get_size, 278
get_size_image_stack, 279
get_stats, 279
get_ubound, 279
global_default_mcmc_sigma_scale, 292
global_max_mcmc_sigma_scale, 292
global_max_psf_sigma, 292
global_max_size, 292
global_min_psf_sigma, 292
global_min_size, 293
has_hyperparam, 279
ImageCoordT, 272
ImagePixelT, 272
ImageShapeT, 272
ImageSizeShapeT, 272
ImageSizeVecShapeT, 273
ImageSizeVecT, 273
ImageSizeT, 272
ImageStackShapeT, 273
ImageStackT, 273
ImageT, 273
initial_theta_estimate, 279
lbound, 293
make_default_prior, 279
make_default_prior_beta_position, 280
make_default_prior_normal_position, 280
make_image, 280
make_image_stack, 280
make_param, 280
make_param_mat, 281
make_param_mat_stack, 281
make_param_stack, 281
make_prior_beta_position, 281
make_prior_component_intensity, 282
make_prior_component_position_beta, 282
make_prior_component_position_normal, 282
make_prior_component_sigma, 282
make_prior_normal_position, 283
make_stencil, 283
num_dim, 293
num_hyperparams, 293
num_params, 293
num_phases, 293
operator=, 283, 284
ParamVecT, 273
ParamT, 273
pixel_grad, 284
pixel_grad2, 284
pixel_hess, 284
pixel_hess_update, 284
pixel_model_value, 284
prior, 294
prior_types, 294
reflected_theta, 285
reflected_theta_stack, 285
rename_hyperparam, 285
sample_mcmc_candidate, 285
sample_prior, 285, 286
set_background_mcmc_sampling, 286
set_bounds, 286
set_hyperparam_names, 286
set_hyperparam_value, 286
set_hyperparams, 286
set_image_in_stack, 287
set_intensity_mcmc_sampling, 287
set_lbound, 287
set_max_sigma, 287
set_mcmc_num_phases, 287
set_mcmc_sigma_scale, 288
set_min_sigma, 288
set_param_names, 288
set_prior, 288
set_rng_seed, 288
set_size, 289
set_ubound, 289
sigma_scale, 294

- size, [294](#)
- StencilVecT, [274](#)
- theta_in_bounds, [289](#)
- theta_stack_in_bounds, [289](#)
- ubound, [295](#)
- mappel::Gauss1DsModel::Stencil, [822](#)
 - bg, [824](#)
 - compute_derivatives, [824](#)
 - DXS2, [825](#)
 - DXSX, [825](#)
 - DXS, [825](#)
 - derivatives_computed, [825](#)
 - DX, [825](#)
 - dx, [825](#)
 - Gx, [825](#)
 - l, [824](#)
 - model, [826](#)
 - operator<<, [825](#)
 - ParamT, [823](#)
 - sigma, [824](#)
 - Stencil, [823](#)
 - theta, [826](#)
 - X, [826](#)
 - x, [824](#)
- mappel::Gauss2DMAP, [295](#)
 - bound_theta, [303](#)
 - bounded_theta, [303](#)
 - bounded_theta_stack, [303](#)
 - bounds_epsilon, [318](#)
 - check_image_shape, [303](#)
 - check_param_shape, [303](#), [304](#)
 - check_psf_sigma, [304](#)
 - check_size, [304](#)
 - debug_internal_sum_model_x, [304](#)
 - debug_internal_sum_model_y, [304](#)
 - default_alpha_sigma, [318](#)
 - default_beta_pos, [319](#)
 - default_intensity_kappa, [319](#)
 - default_max_l, [319](#)
 - default_mean_l, [319](#)
 - default_pixel_mean_bg, [319](#)
 - default_sigma_pos, [319](#)
 - DefaultPriorType, [320](#)
 - DefaultSeperableInitEstimator, [320](#)
 - estimator_names, [320](#)
 - eta_bg, [320](#)
 - eta_l, [320](#)
 - eta_x, [320](#)
 - eta_y, [321](#)
 - Gauss1DSumModelT, [300](#)
 - Gauss2DMAP, [302](#), [303](#)
 - get_hyperparam_index, [305](#)
 - get_hyperparam_names, [305](#)
 - get_hyperparam_value, [305](#)
 - get_hyperparams, [305](#)
 - get_image_from_stack, [305](#)
 - get_lbound, [305](#)
 - get_mcmc_num_phases, [305](#)
 - get_mcmc_sigma_scale, [306](#)
 - get_num_hyperparams, [306](#)
 - get_num_params, [306](#)
 - get_num_pixels, [306](#)
 - get_param_names, [306](#)
 - get_prior, [306](#)
 - get_psf_sigma, [307](#)
 - get_rng_generator, [307](#)
 - get_rng_manager, [307](#)
 - get_size, [307](#)
 - get_size_image_stack, [307](#)
 - get_stats, [308](#)
 - get_ubound, [308](#)
 - global_default_mcmc_sigma_scale, [321](#)
 - global_max_mcmc_sigma_scale, [321](#)
 - global_max_psf_sigma, [321](#)
 - global_max_size, [321](#)
 - global_min_psf_sigma, [321](#)
 - global_min_size, [322](#)
 - has_hyperparam, [308](#)
 - ImageCoordT, [300](#)
 - ImagePixelT, [300](#)
 - ImageShapeT, [300](#)
 - ImageSizeShapeT, [300](#)
 - ImageSizeVecShapeT, [300](#)
 - ImageSizeVecT, [301](#)
 - ImageSizeT, [300](#)
 - ImageStackShapeT, [301](#)
 - ImageStackT, [301](#)
 - ImageT, [301](#)
 - initial_theta_estimate, [308](#)
 - lbound, [322](#)
 - make_default_prior, [309](#)
 - make_default_prior_beta_position, [309](#)
 - make_default_prior_normal_position, [309](#)
 - make_image, [309](#)
 - make_image_stack, [309](#)
 - make_internal_1Dsum_estimator, [310](#)
 - make_param, [310](#)
 - make_param_mat, [310](#)
 - make_param_mat_stack, [310](#), [311](#)
 - make_param_stack, [311](#)
 - make_prior_beta_position, [311](#)
 - make_prior_component_intensity, [311](#)
 - make_prior_component_position_beta, [311](#)
 - make_prior_component_position_normal, [312](#)
 - make_prior_component_sigma, [312](#)
 - make_prior_normal_position, [312](#)
 - make_stencil, [312](#)
 - ModelDataStackT, [301](#)

ModelDataT, 301
name, 322
num_dim, 322
num_hyperparams, 322
num_params, 322
num_phases, 323
operator=, 313
ParamVecT, 302
ParamT, 301
pixel_grad, 313
pixel_grad2, 313
pixel_hess, 313
pixel_hess_update, 314
pixel_model_value, 314
prior, 323
prior_types, 323
psf_sigma, 323
reflected_theta, 314
reflected_theta_stack, 314
rename_hyperparam, 314
sample_mcmc_candidate, 314, 315
sample_prior, 315
set_background_mcmc_sampling, 315
set_bounds, 315
set_hyperparam_names, 315
set_hyperparam_value, 316
set_hyperparams, 316
set_image_in_stack, 316
set_intensity_mcmc_sampling, 316
set_lbound, 316
set_mcmc_num_phases, 316
set_mcmc_sigma_scale, 316
set_param_names, 317
set_prior, 317
set_psf_sigma, 317
set_rng_seed, 317
set_size, 317
set_ubound, 317
sigma_scale, 324
size, 324
StencilVecT, 302
theta_in_bounds, 318
theta_stack_in_bounds, 318
ubound, 324
update_internal_1Dsum_estimators, 318
x_model, 325
y_model, 325
mappel::Gauss2DMLE, 325
bound_theta, 333
bounded_theta, 333
bounded_theta_stack, 333
bounds_epsilon, 348
check_image_shape, 333
check_param_shape, 333, 334
check_psf_sigma, 334
check_size, 334
debug_internal_sum_model_x, 334
debug_internal_sum_model_y, 334
default_alpha_sigma, 348
default_beta_pos, 349
default_intensity_kappa, 349
default_max_l, 349
default_mean_l, 349
default_pixel_mean_bg, 349
default_sigma_pos, 349
DefaultPriorType, 350
DefaultSeperableInitEstimator, 350
estimator_names, 350
eta_bg, 350
eta_l, 350
eta_x, 350
eta_y, 351
Gauss1DSumModelT, 330
Gauss2DMLE, 332
get_hyperparam_index, 335
get_hyperparam_names, 335
get_hyperparam_value, 335
get_hyperparams, 335
get_image_from_stack, 335
get_lbound, 335
get_mcmc_num_phases, 335
get_mcmc_sigma_scale, 336
get_num_hyperparams, 336
get_num_params, 336
get_num_pixels, 336
get_param_names, 336
get_prior, 336
get_psf_sigma, 337
get_rng_generator, 337
get_rng_manager, 337
get_size, 337
get_size_image_stack, 337
get_stats, 338
get_ubound, 338
global_default_mcmc_sigma_scale, 351
global_max_mcmc_sigma_scale, 351
global_max_psf_sigma, 351
global_max_size, 351
global_min_psf_sigma, 351
global_min_size, 352
has_hyperparam, 338
ImageCoordT, 330
ImagePixelT, 330
ImageShapeT, 330
ImageSizeShapeT, 330
ImageSizeVecShapeT, 330
ImageSizeVecT, 331
ImageSizeT, 330

ImageStackShapeT, 331
 ImageStackT, 331
 ImageT, 331
 initial_theta_estimate, 338
 lbound, 352
 make_default_prior, 339
 make_default_prior_beta_position, 339
 make_default_prior_normal_position, 339
 make_image, 339
 make_image_stack, 339
 make_internal_1Dsum_estimator, 340
 make_param, 340
 make_param_mat, 340
 make_param_mat_stack, 340, 341
 make_param_stack, 341
 make_prior_beta_position, 341
 make_prior_component_intensity, 341
 make_prior_component_position_beta, 341
 make_prior_component_position_normal, 342
 make_prior_component_sigma, 342
 make_prior_normal_position, 342
 make_stencil, 342
 ModelDataStackT, 331
 ModelDataT, 331
 name, 352
 num_dim, 352
 num_hyperparams, 352
 num_params, 352
 num_phases, 353
 operator=, 343
 ParamVecT, 332
 ParamT, 331
 pixel_grad, 343
 pixel_grad2, 343
 pixel_hess, 343
 pixel_hess_update, 344
 pixel_model_value, 344
 prior, 353
 prior_types, 353
 psf_sigma, 353
 reflected_theta, 344
 reflected_theta_stack, 344
 rename_hyperparam, 344
 sample_mcmc_candidate, 344, 345
 sample_prior, 345
 set_background_mcmc_sampling, 345
 set_bounds, 345
 set_hyperparam_names, 345
 set_hyperparam_value, 346
 set_hyperparams, 346
 set_image_in_stack, 346
 set_intensity_mcmc_sampling, 346
 set_lbound, 346
 set_mcmc_num_phases, 346
 set_mcmc_sigma_scale, 346
 set_param_names, 347
 set_prior, 347
 set_psf_sigma, 347
 set_rng_seed, 347
 set_size, 347
 set_ubound, 347
 sigma_scale, 354
 size, 354
 StencilVecT, 332
 theta_in_bounds, 348
 theta_stack_in_bounds, 348
 ubound, 354
 update_internal_1Dsum_estimators, 348
 x_model, 355
 y_model, 355
 mappel::Gauss2DModel, 355
 bound_theta, 362
 bounded_theta, 362
 bounded_theta_stack, 362
 bounds_epsilon, 378
 check_image_shape, 363
 check_param_shape, 363
 check_psf_sigma, 363
 check_size, 364
 debug_internal_sum_model_x, 364
 debug_internal_sum_model_y, 364
 default_alpha_sigma, 378
 default_beta_pos, 378
 default_intensity_kappa, 378
 default_max_l, 378
 default_mean_l, 378
 default_pixel_mean_bg, 379
 default_sigma_pos, 379
 DefaultPriorType, 379
 DefaultSeperableInitEstimator, 379
 eta_bg, 379
 eta_l, 379
 eta_x, 380
 eta_y, 380
 Gauss1DsumModelT, 360
 Gauss2DModel, 362
 get_hyperparam_index, 364
 get_hyperparam_names, 364
 get_hyperparam_value, 364
 get_hyperparams, 364
 get_image_from_stack, 365
 get_lbound, 365
 get_mcmc_num_phases, 365
 get_mcmc_sigma_scale, 365
 get_num_hyperparams, 365
 get_num_params, 365
 get_num_pixels, 365
 get_param_names, 366

get_prior, 366
get_psf_sigma, 366
get_rng_generator, 366
get_rng_manager, 366
get_size, 367
get_size_image_stack, 367
get_stats, 367
get_ubound, 367
global_default_mcmc_sigma_scale, 380
global_max_mcmc_sigma_scale, 380
global_max_psf_sigma, 380
global_max_size, 380
global_min_psf_sigma, 381
global_min_size, 381
has_hyperparam, 367
ImageCoordT, 360
ImagePixelT, 360
ImageShapeT, 360
ImageSizeShapeT, 360
ImageSizeVecShapeT, 360
ImageSizeVecT, 361
ImageSizeT, 360
ImageStackShapeT, 361
ImageStackT, 361
ImageT, 361
initial_theta_estimate, 367, 368
lbound, 381
make_default_prior, 368
make_default_prior_beta_position, 368
make_default_prior_normal_position, 368
make_image, 368
make_image_stack, 369
make_internal_1Dsum_estimator, 369
make_param, 369
make_param_mat, 369
make_param_mat_stack, 370
make_param_stack, 370
make_prior_beta_position, 370
make_prior_component_intensity, 370
make_prior_component_position_beta, 371
make_prior_component_position_normal, 371
make_prior_component_sigma, 371
make_prior_normal_position, 371
make_stencil, 371
num_dim, 381
num_hyperparams, 381
num_params, 381
num_phases, 382
operator=, 372
ParamVecT, 361
ParamT, 361
pixel_grad, 372
pixel_grad2, 372
pixel_hess, 373
pixel_hess_update, 373
pixel_model_value, 373
prior, 382
prior_types, 382
psf_sigma, 382
reflected_theta, 373
reflected_theta_stack, 373
rename_hyperparam, 373
sample_mcmc_candidate, 374
sample_prior, 374
set_background_mcmc_sampling, 374
set_bounds, 374
set_hyperparam_names, 375
set_hyperparam_value, 375
set_hyperparams, 375
set_image_in_stack, 375
set_intensity_mcmc_sampling, 375
set_lbound, 375
set_mcmc_num_phases, 376
set_mcmc_sigma_scale, 376
set_param_names, 376
set_prior, 376
set_psf_sigma, 376
set_rng_seed, 377
set_size, 377
set_ubound, 377
sigma_scale, 383
size, 383
StencilVecT, 361
theta_in_bounds, 377
theta_stack_in_bounds, 377
ubound, 383
update_internal_1Dsum_estimators, 377
x_model, 384
y_model, 384
mappel::Gauss2DModel::Stencil, 826
bg, 828
compute_derivatives, 828
DXS, 829
DYS, 830
derivatives_computed, 829
DX, 829
dx, 829
DY, 830
dy, 829
Gx, 830
Gy, 830
I, 828
model, 830
operator<<, 829
ParamT, 827
Stencil, 827
theta, 830
X, 830

- x, [828](#)
- Y, [830](#)
- y, [828](#)
- mappel::Gauss2DsMAP, [384](#)
 - bound_theta, [392](#)
 - bounded_theta, [392](#)
 - bounded_theta_stack, [392](#)
 - bounds_epsilon, [410](#)
 - check_image_shape, [393](#)
 - check_param_shape, [393](#)
 - check_psf_sigma, [393](#)
 - check_size, [394](#)
 - compute_max_sigma_ratio, [394](#)
 - debug_internal_sum_model_x, [394](#)
 - debug_internal_sum_model_y, [394](#)
 - default_alpha_sigma, [410](#)
 - default_beta_pos, [410](#)
 - default_intensity_kappa, [410](#)
 - default_max_l, [410](#)
 - default_mean_l, [410](#)
 - default_pixel_mean_bg, [410](#)
 - default_sigma_pos, [411](#)
 - DefaultPriorType, [411](#)
 - DefaultSeperableInitEstimator, [411](#)
 - estimator_names, [411](#)
 - eta_bg, [411](#)
 - eta_l, [411](#)
 - eta_sigma, [412](#)
 - eta_x, [412](#)
 - eta_y, [412](#)
 - Gauss1DSumModelT, [389](#)
 - Gauss2DsMAP, [391](#), [392](#)
 - get_hyperparam_index, [394](#)
 - get_hyperparam_names, [394](#)
 - get_hyperparam_value, [395](#)
 - get_hyperparams, [395](#)
 - get_image_from_stack, [395](#)
 - get_lbound, [395](#)
 - get_max_sigma, [395](#)
 - get_max_sigma_ratio, [396](#)
 - get_mcmc_num_phases, [396](#)
 - get_mcmc_sigma_scale, [396](#)
 - get_min_sigma, [396](#)
 - get_num_hyperparams, [396](#)
 - get_num_params, [396](#)
 - get_num_pixels, [397](#)
 - get_param_names, [397](#)
 - get_prior, [397](#)
 - get_rng_generator, [397](#)
 - get_rng_manager, [397](#)
 - get_size, [397](#), [398](#)
 - get_size_image_stack, [398](#)
 - get_stats, [398](#)
 - get_ubound, [398](#)
 - global_default_mcmc_sigma_scale, [412](#)
 - global_max_mcmc_sigma_scale, [412](#)
 - global_max_psf_sigma, [413](#)
 - global_max_size, [413](#)
 - global_min_psf_sigma, [413](#)
 - global_min_size, [413](#)
 - has_hyperparam, [398](#)
 - ImageCoordT, [389](#)
 - ImagePixelT, [389](#)
 - ImageShapeT, [389](#)
 - ImageSizeShapeT, [390](#)
 - ImageSizeVecShapeT, [390](#)
 - ImageSizeVecT, [390](#)
 - ImageSizeT, [390](#)
 - ImageStackShapeT, [390](#)
 - ImageStackT, [390](#)
 - ImageT, [390](#)
 - initial_theta_estimate, [398](#), [399](#)
 - lbound, [413](#)
 - make_default_prior, [399](#)
 - make_default_prior_beta_position, [399](#)
 - make_default_prior_normal_position, [399](#)
 - make_image, [399](#)
 - make_image_stack, [400](#)
 - make_internal_1Dsum_estimator, [400](#)
 - make_param, [400](#)
 - make_param_mat, [400](#)
 - make_param_mat_stack, [401](#)
 - make_param_stack, [401](#)
 - make_prior_beta_position, [401](#)
 - make_prior_component_intensity, [401](#)
 - make_prior_component_position_beta, [402](#)
 - make_prior_component_position_normal, [402](#)
 - make_prior_component_sigma, [402](#)
 - make_prior_normal_position, [402](#)
 - make_stencil, [403](#)
 - min_sigma, [413](#)
 - ModelDataStackT, [391](#)
 - ModelDataT, [391](#)
 - name, [414](#)
 - num_dim, [414](#)
 - num_hyperparams, [414](#)
 - num_params, [414](#)
 - num_phases, [414](#)
 - operator=, [403](#)
 - ParamVecT, [391](#)
 - ParamT, [391](#)
 - pixel_grad, [404](#)
 - pixel_grad2, [404](#)
 - pixel_hess, [404](#)
 - pixel_hess_update, [404](#)
 - pixel_model_value, [404](#)
 - prior, [415](#)
 - prior_types, [415](#)

- reflected_theta, 405
- reflected_theta_stack, 405
- rename_hyperparam, 405
- sample_mcmc_candidate, 405
- sample_prior, 405, 406
- set_background_mcmc_sampling, 406
- set_bounds, 406
- set_hyperparam_names, 406
- set_hyperparam_value, 406
- set_hyperparams, 406
- set_image_in_stack, 407
- set_intensity_mcmc_sampling, 407
- set_lbound, 407
- set_max_sigma, 407
- set_max_sigma_ratio, 407
- set_mcmc_num_phases, 407
- set_mcmc_sigma_scale, 408
- set_min_sigma, 408
- set_param_names, 408
- set_prior, 408
- set_rng_seed, 408
- set_size, 408
- set_ubound, 409
- sigma_scale, 415
- size, 415
- StencilVecT, 391
- theta_in_bounds, 409
- theta_stack_in_bounds, 409
- ubound, 416
- update_internal_1Dsum_estimators, 409
- x_model, 416
- y_model, 416
- mappel::Gauss2DsMLE, 417
 - bound_theta, 424
 - bounded_theta, 424
 - bounded_theta_stack, 425
 - bounds_epsilon, 442
 - check_image_shape, 425
 - check_param_shape, 425
 - check_psf_sigma, 425, 426
 - check_size, 426
 - compute_max_sigma_ratio, 426
 - debug_internal_sum_model_x, 426
 - debug_internal_sum_model_y, 426
 - default_alpha_sigma, 442
 - default_beta_pos, 442
 - default_intensity_kappa, 442
 - default_max_l, 442
 - default_mean_l, 442
 - default_pixel_mean_bg, 443
 - default_sigma_pos, 443
 - DefaultPriorType, 443
 - DefaultSeperableInitEstimator, 443
 - estimator_names, 443
 - eta_bg, 443
 - eta_l, 444
 - eta_sigma, 444
 - eta_x, 444
 - eta_y, 444
 - Gauss1DSumModelT, 421
 - Gauss2DsMLE, 424
 - get_hyperparam_index, 427
 - get_hyperparam_names, 427
 - get_hyperparam_value, 427
 - get_hyperparams, 427
 - get_image_from_stack, 427
 - get_lbound, 427
 - get_max_sigma, 427, 428
 - get_max_sigma_ratio, 428
 - get_mcmc_num_phases, 428
 - get_mcmc_sigma_scale, 428
 - get_min_sigma, 428
 - get_num_hyperparams, 428
 - get_num_params, 429
 - get_num_pixels, 429
 - get_param_names, 429
 - get_prior, 429
 - get_rng_generator, 429
 - get_rng_manager, 429
 - get_size, 430
 - get_size_image_stack, 430
 - get_stats, 430
 - get_ubound, 430
 - global_default_mcmc_sigma_scale, 444
 - global_max_mcmc_sigma_scale, 445
 - global_max_psf_sigma, 445
 - global_max_size, 445
 - global_min_psf_sigma, 445
 - global_min_size, 445
 - has_hyperparam, 430
 - ImageCoordT, 421
 - ImagePixelT, 422
 - ImageShapeT, 422
 - ImageSizeShapeT, 422
 - ImageSizeVecShapeT, 422
 - ImageSizeVecT, 422
 - ImageSizeT, 422
 - ImageStackShapeT, 422
 - ImageStackT, 423
 - ImageT, 423
 - initial_theta_estimate, 430, 431
 - lbound, 445
 - make_default_prior, 431
 - make_default_prior_beta_position, 431
 - make_default_prior_normal_position, 431
 - make_image, 432
 - make_image_stack, 432
 - make_internal_1Dsum_estimator, 432

make_param, 432
make_param_mat, 433
make_param_mat_stack, 433
make_param_stack, 433
make_prior_beta_position, 433
make_prior_component_intensity, 434
make_prior_component_position_beta, 434
make_prior_component_position_normal, 434
make_prior_component_sigma, 434
make_prior_normal_position, 435
make_stencil, 435
min_sigma, 446
ModelDataStackT, 423
ModelDataT, 423
name, 446
num_dim, 446
num_hyperparams, 446
num_params, 446
num_phases, 446
operator=, 435, 436
ParamVecT, 423
ParamT, 423
pixel_grad, 436
pixel_grad2, 436
pixel_hess, 436
pixel_hess_update, 436
pixel_model_value, 437
prior, 447
prior_types, 447
reflected_theta, 437
reflected_theta_stack, 437
rename_hyperparam, 437
sample_mcmc_candidate, 437, 438
sample_prior, 438
set_background_mcmc_sampling, 438
set_bounds, 438
set_hyperparam_names, 438
set_hyperparam_value, 439
set_hyperparams, 439
set_image_in_stack, 439
set_intensity_mcmc_sampling, 439
set_lbound, 439
set_max_sigma, 439
set_max_sigma_ratio, 439
set_mcmc_num_phases, 440
set_mcmc_sigma_scale, 440
set_min_sigma, 440
set_param_names, 440
set_prior, 440
set_rng_seed, 441
set_size, 441
set_ubound, 441
sigma_scale, 447
size, 447
StencilVecT, 423
theta_in_bounds, 441
theta_stack_in_bounds, 441
ubound, 448
update_internal_1Dsum_estimators, 441
x_model, 448
y_model, 448
mappel::Gauss2DsModel, 449
bound_theta, 456
bounded_theta, 456
bounded_theta_stack, 456
bounds_epsilon, 473
check_image_shape, 457
check_param_shape, 457
check_psf_sigma, 457
check_size, 458
compute_max_sigma_ratio, 458
debug_internal_sum_model_x, 458
debug_internal_sum_model_y, 458
default_alpha_sigma, 473
default_beta_pos, 473
default_intensity_kappa, 473
default_max_l, 474
default_mean_l, 474
default_pixel_mean_bg, 474
default_sigma_pos, 474
DefaultPriorType, 474
DefaultSeperableInitEstimator, 474
eta_bg, 475
eta_l, 475
eta_sigma, 475
eta_x, 475
eta_y, 475
Gauss1DSumModelT, 454
Gauss2DsModel, 456
get_hyperparam_index, 458
get_hyperparam_names, 458
get_hyperparam_value, 459
get_hyperparams, 459
get_image_from_stack, 459
get_lbound, 459
get_max_sigma, 459
get_max_sigma_ratio, 460
get_mcmc_num_phases, 460
get_mcmc_sigma_scale, 460
get_min_sigma, 460
get_num_hyperparams, 460
get_num_params, 460
get_num_pixels, 460
get_param_names, 461
get_prior, 461
get_rng_generator, 461
get_rng_manager, 461
get_size, 461

[get_size_image_stack](#), 462
[get_stats](#), 462
[get_ubound](#), 462
[global_default_mcmc_sigma_scale](#), 476
[global_max_mcmc_sigma_scale](#), 476
[global_max_psf_sigma](#), 476
[global_max_size](#), 476
[global_min_psf_sigma](#), 476
[global_min_size](#), 476
[has_hyperparam](#), 462
[ImageCoordT](#), 454
[ImagePixelT](#), 454
[ImageShapeT](#), 454
[ImageSizeShapeT](#), 454
[ImageSizeVecShapeT](#), 454
[ImageSizeVecT](#), 455
[ImageSizeT](#), 454
[ImageStackShapeT](#), 455
[ImageStackT](#), 455
[ImageT](#), 455
[initial_theta_estimate](#), 462, 463
[lbound](#), 477
[make_default_prior](#), 463
[make_default_prior_beta_position](#), 463
[make_default_prior_normal_position](#), 463
[make_image](#), 463
[make_image_stack](#), 464
[make_internal_1Dsum_estimator](#), 464
[make_param](#), 464
[make_param_mat](#), 464
[make_param_mat_stack](#), 465
[make_param_stack](#), 465
[make_prior_beta_position](#), 465
[make_prior_component_intensity](#), 465
[make_prior_component_position_beta](#), 466
[make_prior_component_position_normal](#), 466
[make_prior_component_sigma](#), 466
[make_prior_normal_position](#), 466
[make_stencil](#), 466
[min_sigma](#), 477
[num_dim](#), 477
[num_hyperparams](#), 477
[num_params](#), 477
[num_phases](#), 478
[operator=](#), 467
[ParamVecT](#), 455
[ParamT](#), 455
[pixel_grad](#), 467
[pixel_grad2](#), 467
[pixel_hess](#), 468
[pixel_hess_update](#), 468
[pixel_model_value](#), 468
[prior](#), 478
[prior_types](#), 478
[reflected_theta](#), 468
[reflected_theta_stack](#), 468
[rename_hyperparam](#), 469
[sample_mcmc_candidate](#), 469
[sample_prior](#), 469
[set_background_mcmc_sampling](#), 469
[set_bounds](#), 470
[set_hyperparam_names](#), 470
[set_hyperparam_value](#), 470
[set_hyperparams](#), 470
[set_image_in_stack](#), 470
[set_intensity_mcmc_sampling](#), 470
[set_lbound](#), 471
[set_max_sigma](#), 471
[set_max_sigma_ratio](#), 471
[set_mcmc_num_phases](#), 471
[set_mcmc_sigma_scale](#), 471
[set_min_sigma](#), 471
[set_param_names](#), 472
[set_prior](#), 472
[set_rng_seed](#), 472
[set_size](#), 472
[set_ubound](#), 472
[sigma_scale](#), 478
[size](#), 479
[StencilVecT](#), 455
[theta_in_bounds](#), 472
[theta_stack_in_bounds](#), 473
[ubound](#), 479
[update_internal_1Dsum_estimators](#), 473
[x_model](#), 479
[y_model](#), 480
[mappel::Gauss2DsModel::Stencil](#), 831
[bg](#), 832
[compute_derivatives](#), 832
[DXS2](#), 834
[DXSX](#), 835
[DXS](#), 834
[DYS2](#), 835
[DYSY](#), 835
[DYS](#), 835
[derivatives_computed](#), 834
[DX](#), 834
[dx](#), 834
[DY](#), 835
[dy](#), 835
[Gx](#), 835
[Gy](#), 836
[I](#), 833
[model](#), 836
[operator<<](#), 834
[ParamT](#), 832
[sigma_ratio](#), 833
[sigmaX](#), 833

- sigmaY, [833](#)
- Stencil, [832](#)
- theta, [836](#)
- X, [836](#)
- x, [833](#)
- Y, [836](#)
- y, [833](#)
- mappel::Gauss2DsxyMAP, [480](#)
 - bound_theta, [486](#)
 - bounded_theta, [486](#)
 - bounded_theta_stack, [487](#)
 - bounds_epsilon, [501](#)
 - check_image_shape, [487](#)
 - check_param_shape, [487](#)
 - check_psf_sigma, [487](#), [488](#)
 - check_size, [488](#)
 - default_alpha_sigma, [501](#)
 - default_beta_pos, [501](#)
 - default_intensity_kappa, [501](#)
 - default_max_l, [501](#)
 - default_mean_l, [502](#)
 - default_pixel_mean_bg, [502](#)
 - default_sigma_pos, [502](#)
 - DefaultPriorType, [502](#)
 - DefaultSeperableInitEstimator, [502](#)
 - estimator_names, [502](#)
 - eta_bg, [503](#)
 - eta_l, [503](#)
 - eta_x, [503](#)
 - Gauss2DsxyMAP, [486](#)
 - get_hyperparam_index, [488](#)
 - get_hyperparam_names, [488](#)
 - get_hyperparam_value, [488](#)
 - get_hyperparams, [488](#)
 - get_image_from_stack, [489](#)
 - get_lbound, [489](#)
 - get_mcmc_num_phases, [489](#)
 - get_mcmc_sigma_scale, [489](#)
 - get_num_hyperparams, [489](#)
 - get_num_params, [489](#)
 - get_num_pixels, [489](#)
 - get_param_names, [490](#)
 - get_prior, [490](#)
 - get_psf_sigma, [490](#)
 - get_rng_generator, [490](#)
 - get_rng_manager, [490](#)
 - get_size, [491](#)
 - get_size_image_stack, [491](#)
 - get_stats, [491](#)
 - get_ubound, [491](#)
 - global_default_mcmc_sigma_scale, [503](#)
 - global_max_mcmc_sigma_scale, [503](#)
 - global_max_psf_sigma, [503](#)
 - global_max_size, [504](#)
 - global_min_psf_sigma, [504](#)
 - global_min_size, [504](#)
 - has_hyperparam, [491](#)
 - ImageCoordT, [484](#)
 - ImagePixelT, [484](#)
 - ImageShapeT, [484](#)
 - ImageSizeShapeT, [484](#)
 - ImageSizeVecShapeT, [485](#)
 - ImageSizeVecT, [485](#)
 - ImageSizeT, [485](#)
 - ImageStackShapeT, [485](#)
 - ImageStackT, [485](#)
 - ImageT, [485](#)
 - initial_theta_estimate, [491](#), [492](#)
 - lbound, [504](#)
 - make_default_prior, [492](#)
 - make_default_prior_beta_position, [492](#)
 - make_default_prior_normal_position, [492](#)
 - make_image, [492](#)
 - make_image_stack, [492](#)
 - make_param, [493](#)
 - make_param_mat, [493](#)
 - make_param_mat_stack, [493](#)
 - make_param_stack, [493](#), [494](#)
 - make_prior_beta_position, [494](#)
 - make_prior_component_intensity, [494](#)
 - make_prior_component_position_beta, [494](#)
 - make_prior_component_position_normal, [494](#)
 - make_prior_component_sigma, [495](#)
 - make_prior_normal_position, [495](#)
 - make_stencil, [495](#)
 - ModelDataStackT, [485](#)
 - ModelDataT, [486](#)
 - name, [504](#)
 - num_dim, [504](#)
 - num_hyperparams, [505](#)
 - num_params, [505](#)
 - num_phases, [505](#)
 - ParamVecT, [486](#)
 - ParamT, [486](#)
 - pixel_grad, [496](#)
 - pixel_grad2, [496](#)
 - pixel_hess, [496](#)
 - pixel_hess_update, [496](#)
 - pixel_model_value, [496](#)
 - prior, [505](#)
 - prior_types, [505](#)
 - psf_sigma, [506](#)
 - reflected_theta, [496](#)
 - reflected_theta_stack, [497](#)
 - rename_hyperparam, [497](#)
 - sample_mcmc_candidate, [497](#)
 - sample_prior, [497](#)
 - set_background_mcmc_sampling, [498](#)

- set_bounds, 498
- set_hyperparam_names, 498
- set_hyperparam_value, 498
- set_hyperparams, 498
- set_image_in_stack, 498
- set_intensity_mcmc_sampling, 499
- set_lbound, 499
- set_mcmc_num_phases, 499
- set_mcmc_sigma_scale, 499
- set_param_names, 499
- set_prior, 499
- set_psf_sigma, 500
- set_rng_seed, 500
- set_size, 500
- set_ubound, 500
- sigma_scale, 506
- size, 506
- StencilVecT, 486
- theta_in_bounds, 500
- theta_stack_in_bounds, 501
- ubound, 506
- mappel::Gauss2DsxyModel, 507
 - bound_theta, 513
 - bounded_theta, 513
 - bounded_theta_stack, 513
 - bounds_epsilon, 525
 - check_image_shape, 513
 - check_param_shape, 513, 514
 - check_psf_sigma, 514
 - check_size, 514
 - compute_max_sigma_ratio, 514
 - default_alpha_sigma, 525
 - default_beta_pos, 525
 - default_intensity_kappa, 526
 - default_max_l, 526
 - default_mean_l, 526
 - default_pixel_mean_bg, 526
 - default_sigma_pos, 526
 - DefaultSeperableInitEstimator, 526
 - Gauss2DsxyModel, 513
 - get_hyperparam_index, 515
 - get_hyperparam_names, 515
 - get_hyperparam_value, 515
 - get_hyperparams, 515
 - get_image_from_stack, 515
 - get_lbound, 515
 - get_max_sigma, 515, 516
 - get_max_sigma_ratio, 516
 - get_min_sigma, 516
 - get_num_hyperparams, 516
 - get_num_params, 516
 - get_num_pixels, 516
 - get_param_names, 516
 - get_prior, 517
 - get_rng_generator, 517
 - get_rng_manager, 517
 - get_size, 517
 - get_size_image_stack, 517
 - get_stats, 518
 - get_ubound, 518
 - global_max_psf_sigma, 527
 - global_max_size, 527
 - global_min_psf_sigma, 527
 - global_min_size, 527
 - has_hyperparam, 518
 - ImageCoordT, 511
 - ImagePixelT, 511
 - ImageShapeT, 511
 - ImageSizeShapeT, 511
 - ImageSizeVecShapeT, 511
 - ImageSizeVecT, 512
 - ImageSizeT, 511
 - ImageStackShapeT, 512
 - ImageStackT, 512
 - ImageT, 512
 - initial_theta_estimate, 518
 - lbound, 527
 - make_default_prior, 518
 - make_image, 518
 - make_image_stack, 518
 - make_param, 519
 - make_param_mat, 519
 - make_param_mat_stack, 519
 - make_param_stack, 519, 520
 - make_prior_beta_position, 520
 - make_prior_component_intensity, 520
 - make_prior_component_position_beta, 520
 - make_prior_component_position_normal, 520
 - make_prior_component_sigma, 521
 - make_prior_normal_position, 521
 - make_stencil, 521
 - mcmc_candidate_eta_sigma, 528
 - mcmc_candidate_eta_y, 528
 - min_sigma, 528
 - num_dim, 528
 - num_hyperparams, 528
 - num_params, 528
 - ParamVecT, 512
 - ParamT, 512
 - pixel_grad, 522
 - pixel_grad2, 522
 - pixel_hess, 522
 - pixel_hess_update, 522
 - pixel_model_value, 522
 - prior, 529
 - reflected_theta, 522
 - reflected_theta_stack, 522
 - rename_hyperparam, 523

- sample_mcmc_candidate, 523
- sample_prior, 523
- set_bounds, 523
- set_hyperparam_names, 523
- set_hyperparam_value, 523
- set_hyperparams, 524
- set_image_in_stack, 524
- set_lbound, 524
- set_max_sigma, 524
- set_max_sigma_ratio, 524
- set_min_sigma, 524
- set_param_names, 524
- set_prior, 524
- set_rng_seed, 524
- set_size, 524
- set_ubound, 525
- size, 529
- StencilVecT, 512
- theta_in_bounds, 525
- theta_stack_in_bounds, 525
- ubound, 530
- update_internal_1D_estimators, 525
- x_model, 530
- y_model, 530
- mappel::Gauss2DsxyModel::Stencil, 817
 - bg, 819
 - compute_derivatives, 819
 - DXS2, 820
 - DXSX, 820
 - DXS, 820
 - DYS2, 821
 - DYSX, 821
 - DYSY, 821
 - DYS, 821
 - derivatives_computed, 820
 - DX, 820
 - dx, 820
 - DY, 821
 - dy, 821
 - Gx, 821
 - Gy, 821
 - l, 819
 - model, 821
 - operator<<, 820
 - ParamT, 818
 - sigmaX, 819
 - sigmaY, 819
 - Stencil, 819
 - theta, 822
 - X, 822
 - x, 819
 - Y, 822
 - y, 820
- mappel::ImageFormat1DBase, 543
 - check_image_shape, 546
 - check_size, 546
 - get_image_from_stack, 546
 - get_num_pixels, 547
 - get_size, 547
 - get_size_image_stack, 547
 - get_stats, 547
 - global_max_size, 548
 - global_min_size, 548
 - ImageCoordT, 545
 - ImageFormat1DBase, 546
 - ImagePixelT, 545
 - ImageShapeT, 545
 - ImageSizeShapeT, 545
 - ImageSizeVecShapeT, 545
 - ImageSizeVecT, 545
 - ImageSizeT, 545
 - ImageStackShapeT, 545
 - ImageStackT, 545
 - ImageT, 546
 - make_image, 547
 - make_image_stack, 547
 - num_dim, 548
 - set_image_in_stack, 548
 - set_size, 548
 - size, 548
- mappel::ImageFormat2DBase, 549
 - check_image_shape, 553
 - check_size, 553
 - get_image_from_stack, 553
 - get_num_pixels, 553
 - get_size, 553
 - get_size_image_stack, 554
 - get_stats, 554
 - global_max_size, 555
 - global_min_size, 555
 - ImageCoordT, 551
 - ImageFormat2DBase, 552
 - ImagePixelT, 551
 - ImageShapeT, 551
 - ImageSizeShapeT, 551
 - ImageSizeVecShapeT, 551
 - ImageSizeVecT, 551
 - ImageSizeT, 551
 - ImageStackShapeT, 552
 - ImageStackT, 552
 - ImageT, 552
 - make_image, 554
 - make_image_stack, 554
 - num_dim, 555
 - operator=, 554
 - set_image_in_stack, 554
 - set_size, 555
 - size, 555

mappel::LogicalError, 577
 LogicalError, 577
mappel::MAPEstimator, 577
 bound_theta, 580
 bounded_theta, 580
 bounded_theta_stack, 581
 bounds_epsilon, 589
 check_param_shape, 581
 check_psf_sigma, 581
 default_alpha_sigma, 589
 default_beta_pos, 589
 default_intensity_kappa, 589
 default_max_l, 589
 default_mean_l, 590
 default_pixel_mean_bg, 590
 default_sigma_pos, 590
 DefaultSeperableInitEstimator, 590
 get_hyperparam_index, 581
 get_hyperparam_names, 582
 get_hyperparam_value, 582
 get_hyperparams, 582
 get_lbound, 582
 get_num_hyperparams, 582
 get_num_params, 582
 get_param_names, 582
 get_prior, 583
 get_rng_generator, 583
 get_rng_manager, 583
 get_stats, 583
 get_ubound, 583
 global_max_psf_sigma, 590
 global_min_psf_sigma, 590
 has_hyperparam, 583
 lbound, 591
 MAPEstimator, 580
 make_param, 584
 make_param_mat, 584
 make_param_mat_stack, 584
 make_param_stack, 584, 585
 make_prior_component_intensity, 585
 make_prior_component_position_beta, 585
 make_prior_component_position_normal, 585
 make_prior_component_sigma, 585
 num_hyperparams, 591
 num_params, 591
 operator=, 586
 ParamVecT, 580
 ParamT, 580
 prior, 591
 reflected_theta, 586
 reflected_theta_stack, 586
 rename_hyperparam, 586
 sample_prior, 586, 587
 set_bounds, 587
 set_hyperparam_names, 587
 set_hyperparam_value, 587
 set_hyperparams, 587
 set_lbound, 587
 set_param_names, 588
 set_prior, 588
 set_rng_seed, 588
 set_ubound, 588
 theta_in_bounds, 588
 theta_stack_in_bounds, 589
 ubound, 591
mappel::MCMCAdaptor1Ds, 619
 bound_theta, 623
 bounded_theta, 623
 bounded_theta_stack, 623
 bounds_epsilon, 633
 check_param_shape, 623
 check_psf_sigma, 624
 default_alpha_sigma, 633
 default_beta_pos, 633
 default_intensity_kappa, 633
 default_max_l, 633
 default_mean_l, 633
 default_pixel_mean_bg, 633
 default_sigma_pos, 634
 DefaultSeperableInitEstimator, 634
 eta_bg, 634
 eta_l, 634
 eta_sigma, 634
 eta_x, 635
 get_hyperparam_index, 624
 get_hyperparam_names, 624
 get_hyperparam_value, 624
 get_hyperparams, 624
 get_lbound, 625
 get_mcmc_num_phases, 625
 get_mcmc_sigma_scale, 625
 get_num_hyperparams, 625
 get_num_params, 625
 get_param_names, 625
 get_prior, 625, 626
 get_rng_generator, 626
 get_rng_manager, 626
 get_stats, 626
 get_ubound, 626
 global_default_mcmc_sigma_scale, 635
 global_max_mcmc_sigma_scale, 635
 global_max_psf_sigma, 635
 global_min_psf_sigma, 635
 has_hyperparam, 626
 lbound, 635
 MCMCAdaptor1Ds, 622, 623
 make_param, 626, 627
 make_param_mat, 627

make_param_mat_stack, 627
make_param_stack, 627
make_prior_component_intensity, 628
make_prior_component_position_beta, 628
make_prior_component_position_normal, 628
make_prior_component_sigma, 628
num_hyperparams, 636
num_params, 636
num_phases, 636
operator=, 628, 629
ParamVecT, 622
ParamT, 622
prior, 636
reflected_theta, 629
reflected_theta_stack, 629
rename_hyperparam, 629
sample_mcmc_candidate, 629
sample_prior, 630
set_background_mcmc_sampling, 630
set_bounds, 630
set_hyperparam_names, 630
set_hyperparam_value, 630
set_hyperparams, 631
set_intensity_mcmc_sampling, 631
set_lbound, 631
set_mcmc_num_phases, 631
set_mcmc_sigma_scale, 631
set_param_names, 631
set_prior, 632
set_rng_seed, 632
set_ubound, 632
sigma_scale, 636
theta_in_bounds, 632
theta_stack_in_bounds, 632
ubound, 637
mappel::MCMCAdaptor1D, 601
bound_theta, 605
bounded_theta, 605
bounded_theta_stack, 605
bounds_epsilon, 615
check_param_shape, 605, 606
check_psf_sigma, 606
default_alpha_sigma, 615
default_beta_pos, 615
default_intensity_kappa, 615
default_max_l, 615
default_mean_l, 616
default_pixel_mean_bg, 616
default_sigma_pos, 616
DefaultSeperableInitEstimator, 616
eta_bg, 616
eta_l, 616
eta_x, 617
get_hyperparam_index, 606
get_hyperparam_names, 606
get_hyperparam_value, 606
get_hyperparams, 607
get_lbound, 607
get_mcmc_num_phases, 607
get_mcmc_sigma_scale, 607
get_num_hyperparams, 607
get_num_params, 607
get_param_names, 607
get_prior, 608
get_rng_generator, 608
get_rng_manager, 608
get_stats, 608
get_ubound, 608
global_default_mcmc_sigma_scale, 617
global_max_mcmc_sigma_scale, 617
global_max_psf_sigma, 617
global_min_psf_sigma, 617
has_hyperparam, 608
lbound, 617
MCMCAdaptor1D, 604, 605
make_param, 609
make_param_mat, 609
make_param_mat_stack, 609
make_param_stack, 609, 610
make_prior_component_intensity, 610
make_prior_component_position_beta, 610
make_prior_component_position_normal, 610
make_prior_component_sigma, 610
num_hyperparams, 618
num_params, 618
num_phases, 618
operator=, 611
ParamVecT, 604
ParamT, 604
prior, 618
reflected_theta, 611
reflected_theta_stack, 611
rename_hyperparam, 611
sample_mcmc_candidate, 611, 612
sample_prior, 612
set_background_mcmc_sampling, 612
set_bounds, 612
set_hyperparam_names, 612
set_hyperparam_value, 613
set_hyperparams, 613
set_intensity_mcmc_sampling, 613
set_lbound, 613
set_mcmc_num_phases, 613
set_mcmc_sigma_scale, 613
set_param_names, 614
set_prior, 614
set_rng_seed, 614
set_ubound, 614

- sigma_scale, 618
- theta_in_bounds, 614
- theta_stack_in_bounds, 615
- ubound, 619
- mappel::MCMCAdaptor2Ds, 655
 - bound_theta, 659
 - bounded_theta, 659
 - bounded_theta_stack, 659
 - bounds_epsilon, 669
 - check_param_shape, 660
 - check_psf_sigma, 660
 - default_alpha_sigma, 669
 - default_beta_pos, 670
 - default_intensity_kappa, 670
 - default_max_l, 670
 - default_mean_l, 670
 - default_pixel_mean_bg, 670
 - default_sigma_pos, 670
 - DefaultSeperableInitEstimator, 671
 - eta_bg, 671
 - eta_l, 671
 - eta_sigma, 671
 - eta_x, 671
 - eta_y, 672
 - get_hyperparam_index, 660
 - get_hyperparam_names, 660
 - get_hyperparam_value, 661
 - get_hyperparams, 661
 - get_lbound, 661
 - get_mcmc_num_phases, 661
 - get_mcmc_sigma_scale, 661
 - get_num_hyperparams, 661
 - get_num_params, 661
 - get_param_names, 662
 - get_prior, 662
 - get_rng_generator, 662
 - get_rng_manager, 662
 - get_stats, 662
 - get_ubound, 662
 - global_default_mcmc_sigma_scale, 672
 - global_max_mcmc_sigma_scale, 672
 - global_max_psf_sigma, 672
 - global_min_psf_sigma, 672
 - has_hyperparam, 663
 - lbound, 672
 - MCMCAdaptor2Ds, 659
 - make_param, 663
 - make_param_mat, 663
 - make_param_mat_stack, 663, 664
 - make_param_stack, 664
 - make_prior_component_intensity, 664
 - make_prior_component_position_beta, 664
 - make_prior_component_position_normal, 665
 - make_prior_component_sigma, 665
 - num_hyperparams, 673
 - num_params, 673
 - num_phases, 673
 - operator=, 665
 - ParamVecT, 658
 - ParamT, 658
 - prior, 673
 - reflected_theta, 665
 - reflected_theta_stack, 666
 - rename_hyperparam, 666
 - sample_mcmc_candidate, 666
 - sample_prior, 666
 - set_background_mcmc_sampling, 667
 - set_bounds, 667
 - set_hyperparam_names, 667
 - set_hyperparam_value, 667
 - set_hyperparams, 667
 - set_intensity_mcmc_sampling, 667
 - set_lbound, 668
 - set_mcmc_num_phases, 668
 - set_mcmc_sigma_scale, 668
 - set_param_names, 668
 - set_prior, 668
 - set_rng_seed, 669
 - set_ubound, 669
 - sigma_scale, 673
 - theta_in_bounds, 669
 - theta_stack_in_bounds, 669
 - ubound, 674
- mappel::MCMCAdaptor2D, 637
 - bound_theta, 641
 - bounded_theta, 641
 - bounded_theta_stack, 641
 - bounds_epsilon, 651
 - check_param_shape, 641
 - check_psf_sigma, 642
 - default_alpha_sigma, 651
 - default_beta_pos, 651
 - default_intensity_kappa, 651
 - default_max_l, 651
 - default_mean_l, 651
 - default_pixel_mean_bg, 651
 - default_sigma_pos, 652
 - DefaultSeperableInitEstimator, 652
 - eta_bg, 652
 - eta_l, 652
 - eta_x, 652
 - eta_y, 653
 - get_hyperparam_index, 642
 - get_hyperparam_names, 642
 - get_hyperparam_value, 642
 - get_hyperparams, 642
 - get_lbound, 643
 - get_mcmc_num_phases, 643

[get_mcmc_sigma_scale](#), 643
[get_num_hyperparams](#), 643
[get_num_params](#), 643
[get_param_names](#), 643
[get_prior](#), 643, 644
[get_rng_generator](#), 644
[get_rng_manager](#), 644
[get_stats](#), 644
[get_ubound](#), 644
[global_default_mcmc_sigma_scale](#), 653
[global_max_mcmc_sigma_scale](#), 653
[global_max_psf_sigma](#), 653
[global_min_psf_sigma](#), 653
[has_hyperparam](#), 644
[lbound](#), 653
[MCMCAdaptor2D](#), 640, 641
[make_param](#), 644, 645
[make_param_mat](#), 645
[make_param_mat_stack](#), 645
[make_param_stack](#), 645
[make_prior_component_intensity](#), 646
[make_prior_component_position_beta](#), 646
[make_prior_component_position_normal](#), 646
[make_prior_component_sigma](#), 646
[num_hyperparams](#), 654
[num_params](#), 654
[num_phases](#), 654
[operator=](#), 646, 647
[ParamVecT](#), 640
[ParamT](#), 640
[prior](#), 654
[reflected_theta](#), 647
[reflected_theta_stack](#), 647
[rename_hyperparam](#), 647
[sample_mcmc_candidate](#), 647
[sample_prior](#), 648
[set_background_mcmc_sampling](#), 648
[set_bounds](#), 648
[set_hyperparam_names](#), 648
[set_hyperparam_value](#), 648
[set_hyperparams](#), 649
[set_intensity_mcmc_sampling](#), 649
[set_lbound](#), 649
[set_mcmc_num_phases](#), 649
[set_mcmc_sigma_scale](#), 649
[set_param_names](#), 649
[set_prior](#), 650
[set_rng_seed](#), 650
[set_ubound](#), 650
[sigma_scale](#), 654
[theta_in_bounds](#), 650
[theta_stack_in_bounds](#), 650
[ubound](#), 655
[mappel::MCMCAdaptorBase](#), 674
[get_mcmc_num_phases](#), 675
[get_mcmc_sigma_scale](#), 675
[get_stats](#), 676
[global_default_mcmc_sigma_scale](#), 676
[global_max_mcmc_sigma_scale](#), 676
[MCMCAdaptorBase](#), 675
[num_phases](#), 676
[set_mcmc_num_phases](#), 676
[set_mcmc_sigma_scale](#), 676
[sigma_scale](#), 677
[mappel::MLEstimator](#), 683
[bound_theta](#), 686
[bounded_theta](#), 686
[bounded_theta_stack](#), 687
[bounds_epsilon](#), 695
[check_param_shape](#), 687
[check_psf_sigma](#), 687
[default_alpha_sigma](#), 695
[default_beta_pos](#), 695
[default_intensity_kappa](#), 695
[default_max_l](#), 695
[default_mean_l](#), 696
[default_pixel_mean_bg](#), 696
[default_sigma_pos](#), 696
[DefaultSeperableInitEstimator](#), 696
[get_hyperparam_index](#), 687
[get_hyperparam_names](#), 688
[get_hyperparam_value](#), 688
[get_hyperparams](#), 688
[get_lbound](#), 688
[get_num_hyperparams](#), 688
[get_num_params](#), 688
[get_param_names](#), 688
[get_prior](#), 689
[get_rng_generator](#), 689
[get_rng_manager](#), 689
[get_stats](#), 689
[get_ubound](#), 689
[global_max_psf_sigma](#), 696
[global_min_psf_sigma](#), 696
[has_hyperparam](#), 689
[lbound](#), 697
[MLEstimator](#), 686
[make_param](#), 690
[make_param_mat](#), 690
[make_param_mat_stack](#), 690
[make_param_stack](#), 690, 691
[make_prior_component_intensity](#), 691
[make_prior_component_position_beta](#), 691
[make_prior_component_position_normal](#), 691
[make_prior_component_sigma](#), 691
[num_hyperparams](#), 697
[num_params](#), 697
[operator=](#), 692

- ParamVecT, 686
- ParamT, 686
- prior, 697
- reflected_theta, 692
- reflected_theta_stack, 692
- rename_hyperparam, 692
- sample_prior, 692, 693
- set_bounds, 693
- set_hyperparam_names, 693
- set_hyperparam_value, 693
- set_hyperparams, 693
- set_lbound, 693
- set_param_names, 694
- set_prior, 694
- set_rng_seed, 694
- set_ubound, 694
- theta_in_bounds, 694
- theta_stack_in_bounds, 695
- ubound, 697
- mappel::ModelBoundsError, 698
 - ModelBoundsError, 698
- mappel::NotImplementedError, 741
 - NotImplementedError, 742
- mappel::NumericalError, 742
 - NumericalError, 742
- mappel::ParameterValueError, 745
 - ParameterValueError, 745
- mappel::PointEmitterModel, 746
 - bound_theta, 749
 - bounded_theta, 749
 - bounded_theta_stack, 750
 - bounds_epsilon, 758
 - check_param_shape, 750
 - check_psf_sigma, 750
 - default_alpha_sigma, 758
 - default_beta_pos, 758
 - default_intensity_kappa, 758
 - default_max_l, 758
 - default_mean_l, 758
 - default_pixel_mean_bg, 758
 - default_sigma_pos, 759
 - DefaultSeperableInitEstimator, 759
 - get_hyperparam_index, 750
 - get_hyperparam_names, 751
 - get_hyperparam_value, 751
 - get_hyperparams, 751
 - get_lbound, 751
 - get_num_hyperparams, 751
 - get_num_params, 751
 - get_param_names, 751
 - get_prior, 752
 - get_rng_generator, 752
 - get_rng_manager, 752
 - get_stats, 752
 - get_ubound, 752
 - global_max_psf_sigma, 759
 - global_min_psf_sigma, 759
 - has_hyperparam, 752
 - lbound, 759
 - make_param, 753
 - make_param_mat, 753
 - make_param_mat_stack, 753
 - make_param_stack, 753, 754
 - make_prior_component_intensity, 754
 - make_prior_component_position_beta, 754
 - make_prior_component_position_normal, 754
 - make_prior_component_sigma, 754
 - num_hyperparams, 759
 - num_params, 760
 - operator=, 755
 - ParamVecT, 749
 - ParamT, 749
 - PointEmitterModel, 749
 - prior, 760
 - reflected_theta, 755
 - reflected_theta_stack, 755
 - rename_hyperparam, 755
 - sample_prior, 755, 756
 - set_bounds, 756
 - set_hyperparam_names, 756
 - set_hyperparam_value, 756
 - set_hyperparams, 756
 - set_lbound, 756
 - set_param_names, 756
 - set_prior, 757
 - set_rng_seed, 757
 - set_ubound, 757
 - theta_in_bounds, 757
 - theta_stack_in_bounds, 757
 - ubound, 760
- mappel::PoissonNoise1DObjective, 763
 - check_image_shape, 766
 - check_size, 767
 - estimator_names, 769
 - get_image_from_stack, 767
 - get_num_pixels, 767
 - get_size, 767
 - get_size_image_stack, 767
 - get_stats, 767
 - global_max_size, 769
 - global_min_size, 769
 - ImageCoordT, 764
 - ImagePixelT, 764
 - ImageShapeT, 764
 - ImageSizeShapeT, 765
 - ImageSizeVecShapeT, 765
 - ImageSizeVecT, 765
 - ImageSizeT, 765

- ImageStackShapeT, 765
- ImageStackT, 765
- ImageT, 765
- make_image, 768
- make_image_stack, 768
- ModelDataStackT, 766
- ModelDataT, 766
- num_dim, 769
- operator=, 768
- PoissonNoise1DObjective, 766
- set_image_in_stack, 768
- set_size, 768
- size, 769
- mappel::PoissonNoise2DObjective, 770
 - check_image_shape, 773
 - check_size, 774
 - estimator_names, 776
 - get_image_from_stack, 774
 - get_num_pixels, 774
 - get_size, 774
 - get_size_image_stack, 774
 - get_stats, 774
 - global_max_size, 776
 - global_min_size, 776
 - ImageCoordT, 771
 - ImagePixelT, 771
 - ImageShapeT, 771
 - ImageSizeShapeT, 772
 - ImageSizeVecShapeT, 772
 - ImageSizeVecT, 772
 - ImageSizeT, 772
 - ImageStackShapeT, 772
 - ImageStackT, 772
 - ImageT, 772
 - make_image, 775
 - make_image_stack, 775
 - ModelDataStackT, 773
 - ModelDataT, 773
 - num_dim, 776
 - operator=, 775
 - PoissonNoise2DObjective, 773
 - set_image_in_stack, 775
 - set_size, 775
 - size, 776
- mappel::estimator, 47
 - Error, 50
 - ExitCode, 50
 - FunctionValue, 50
 - GradRatio, 50
 - MaxBacktracks, 50
 - MaxIter, 50
 - ModelImprovement, 50
 - operator<, 50
 - StepSize, 50
 - Success, 50
 - TrustRegionRadius, 50
 - Unassigned, 50
- mappel::estimator::CGaussHeuristicEstimator
 - CGaussHeuristicEstimator, 94
 - clear_stats, 94
 - compute_estimate_debug, 94
 - compute_profile_bound, 95
 - compute_profile_bound_debug, 95
 - compute_profile_estimate, 95
 - estimate_max, 95, 96
 - estimate_max_debug, 97
 - estimate_max_stack, 98
 - estimate_profile_bounds, 99
 - estimate_profile_bounds_debug, 99
 - estimate_profile_bounds_parallel, 100
 - estimate_profile_bounds_stack, 100
 - estimate_profile_max, 101
 - exit_counts, 103
 - get_debug_stats, 101
 - get_exit_counts, 101
 - get_model, 102
 - get_stats, 102
 - max_threads, 103
 - model, 103
 - mtx, 103
 - name, 102
 - num_estimations, 104
 - num_threads, 104
 - record_exit_code, 102
 - record_walltime, 102
 - total_walltime, 104
- mappel::estimator::CGaussHeuristicEstimator< Model >, 93
- mappel::estimator::CGaussMLE< Model >, 105
- mappel::estimator::CGaussMLE
 - CGaussMLE, 106
 - clear_stats, 107
 - compute_profile_bound, 107
 - compute_profile_bound_debug, 107
 - compute_profile_estimate, 107
 - DefaultIterations, 115
 - estimate_max, 107, 108
 - estimate_max_debug, 109
 - estimate_max_stack, 110
 - estimate_profile_bounds, 111
 - estimate_profile_bounds_debug, 111
 - estimate_profile_bounds_parallel, 112
 - estimate_profile_bounds_stack, 112
 - estimate_profile_max, 113
 - exit_counts, 115
 - get_debug_stats, 113
 - get_exit_counts, 114
 - get_model, 114

- get_stats, 114
- max_threads, 115
- model, 116
- mtx, 116
- name, 114
- num_estimations, 116
- num_threads, 116
- record_exit_code, 114
- record_walltime, 115
- total_walltime, 117
- mappel::estimator::Estimator
 - ~Estimator, 119
 - clear_stats, 119
 - compute_estimate, 119
 - compute_estimate_debug, 120
 - compute_profile_bound, 120
 - compute_profile_bound_debug, 120
 - compute_profile_estimate, 120
 - estimate_max, 121, 122
 - estimate_max_debug, 122, 123
 - estimate_max_stack, 123, 124
 - estimate_profile_bounds, 124
 - estimate_profile_bounds_debug, 124
 - estimate_profile_bounds_parallel, 125
 - estimate_profile_bounds_stack, 125
 - estimate_profile_max, 125
 - Estimator, 119
 - exit_counts, 127
 - get_debug_stats, 125
 - get_exit_counts, 126
 - get_model, 126
 - get_stats, 126
 - model, 127
 - name, 126
 - num_estimations, 128
 - operator<<, 127
 - record_exit_code, 126
 - record_walltime, 127
 - total_walltime, 128
- mappel::estimator::Estimator< Model >, 117
- mappel::estimator::HeuristicEstimator
 - clear_stats, 532
 - compute_estimate_debug, 532
 - compute_profile_bound, 533
 - compute_profile_bound_debug, 533
 - compute_profile_estimate, 533
 - estimate_max, 533, 534
 - estimate_max_debug, 535
 - estimate_max_stack, 536
 - estimate_profile_bounds, 537
 - estimate_profile_bounds_debug, 537
 - estimate_profile_bounds_parallel, 538
 - estimate_profile_bounds_stack, 538
 - estimate_profile_max, 539
 - exit_counts, 541
 - get_debug_stats, 539
 - get_exit_counts, 540
 - get_model, 540
 - get_stats, 540
 - HeuristicEstimator, 532
 - max_threads, 541
 - model, 541
 - mtx, 542
 - name, 540
 - num_estimations, 542
 - num_threads, 542
 - record_exit_code, 540
 - record_walltime, 541
 - total_walltime, 542
- mappel::estimator::HeuristicEstimator< Model >, 530
- mappel::estimator::IterativeMaximizer
 - backtrack, 559
 - backtrack_max_ratio, 572
 - backtrack_min_linear_step_ratio, 572
 - backtrack_min_ratio, 573
 - clear_stats, 559
 - compute_estimate, 560
 - compute_estimate_debug, 560
 - compute_profile_bound, 560
 - compute_profile_bound_debug, 561
 - compute_profile_estimate, 561
 - convergence_min_function_change_ratio, 573
 - convergence_min_step_size_ratio, 573
 - convergence_test_grad_ratio, 561
 - convergence_test_step_size, 562
 - DefaultIterations, 573
 - estimate_max, 562, 563
 - estimate_max_debug, 563, 564
 - estimate_max_stack, 564, 565
 - estimate_profile_bounds, 565
 - estimate_profile_bounds_debug, 566
 - estimate_profile_bounds_parallel, 566
 - estimate_profile_bounds_stack, 566
 - estimate_profile_max, 567
 - exit_counts, 573
 - get_debug_stats, 567
 - get_exit_counts, 568
 - get_model, 568
 - get_stats, 568
 - get_total_backtracks, 568
 - get_total_der_evals, 569
 - get_total_fun_evals, 569
 - get_total_iterations, 569
 - IterativeMaximizer, 559
 - last_backtrack_idx, 573
 - local_maximize, 569
 - local_profile_maximize, 569
 - max_backtracks, 574

- max_iterations, 574
- max_threads, 574
- maximize, 570
- mean_backtracks, 570
- mean_der_evals, 571
- mean_fun_evals, 571
- mean_iterations, 571
- min_eigenvalue_correction_delta, 574
- min_profile_bound_residual, 574
- model, 574
- mtx, 575
- name, 571
- num_estimations, 575
- num_threads, 575
- profile_bound_backtrack, 571
- record_exit_code, 571
- record_run_statistics, 571
- record_walltime, 572
- solve_profile_bound, 572
- total_backtracks, 575
- total_der_evals, 576
- total_fun_evals, 576
- total_iterations, 576
- total_walltime, 576
- mappel::estimator::IterativeMaximizer< Model >, 556
- mappel::estimator::IterativeMaximizer< Model >::←
MaximizerData, 592
- mappel::estimator::IterativeMaximizer::MaximizerData
 - backtrack_idx, 598
 - current_stencil, 598
 - DefaultMaxSeqLength, 598
 - expand_max_seq_len, 594
 - fixed_idx, 598
 - free_idx, 599
 - get_backtrack_idx, 594
 - get_sequence_len, 594
 - get_theta_sequence, 594
 - get_theta_sequence_rllh, 595
 - grad, 599
 - has_fixed_parameters, 595
 - has_theta_sequence, 595
 - im, 599
 - max_seq_len, 599
 - MaximizerData, 594
 - nBacktracks, 599
 - nIterations, 599
 - num_fixed_parameters, 595
 - num_params, 600
 - record_backtrack, 595
 - record_iteration, 596
 - restore_stencil, 596
 - rllh, 600
 - s0, 600
 - s1, 600
 - save_stencil, 596
 - saved_stencil, 597
 - saved_theta, 597
 - seq_len, 600
 - seq_rllh, 600
 - set_fixed_parameters, 597
 - set_stencil, 597
 - stencil, 597
 - step, 601
 - theta, 598
 - theta_seq, 601
- mappel::estimator::MLEData, 48, 880
- mappel::estimator::MLEDataStack, 48, 881
- mappel::estimator::MLEDebugData, 48, 880
- mappel::estimator::NewtonDiagonalMaximizer
 - backtrack, 702
 - backtrack_max_ratio, 716
 - backtrack_min_linear_step_ratio, 716
 - backtrack_min_ratio, 716
 - clear_stats, 702
 - compute_estimate, 702
 - compute_estimate_debug, 703
 - compute_profile_bound, 703
 - compute_profile_bound_debug, 703
 - compute_profile_estimate, 704
 - convergence_min_function_change_ratio, 716
 - convergence_min_step_size_ratio, 716
 - convergence_test_grad_ratio, 704
 - convergence_test_step_size, 704
 - DefaultIterations, 717
 - estimate_max, 704, 705
 - estimate_max_debug, 706
 - estimate_max_stack, 707
 - estimate_profile_bounds, 708
 - estimate_profile_bounds_debug, 708
 - estimate_profile_bounds_parallel, 709
 - estimate_profile_bounds_stack, 709
 - estimate_profile_max, 710
 - exit_counts, 717
 - get_debug_stats, 710
 - get_exit_counts, 711
 - get_model, 711
 - get_stats, 711
 - get_total_backtracks, 711
 - get_total_der_evals, 712
 - get_total_fun_evals, 712
 - get_total_iterations, 712
 - last_backtrack_idx, 717
 - local_maximize, 712
 - local_profile_maximize, 712
 - max_backtracks, 717
 - max_iterations, 717
 - max_threads, 717
 - maximize, 713

- MaximizerData, [701](#)
- mean_backtracks, [713](#)
- mean_der_evals, [714](#)
- mean_fun_evals, [714](#)
- mean_iterations, [714](#)
- min_eigenvalue_correction_delta, [718](#)
- min_profile_bound_residual, [718](#)
- model, [718](#)
- mtx, [718](#)
- name, [714](#)
- NewtonDiagonalMaximizer, [702](#)
- num_estimations, [718](#)
- num_threads, [719](#)
- profile_bound_backtrack, [714](#)
- record_exit_code, [714](#)
- record_run_statistics, [715](#)
- record_walltime, [715](#)
- solve_profile_bound, [715](#)
- total_backtracks, [719](#)
- total_der_evals, [719](#)
- total_fun_evals, [719](#)
- total_iterations, [719](#)
- total_walltime, [720](#)
- mappel::estimator::NewtonDiagonalMaximizer< Model >, [699](#)
- mappel::estimator::NewtonMaximizer
 - backtrack, [724](#)
 - backtrack_max_ratio, [737](#)
 - backtrack_min_linear_step_ratio, [737](#)
 - backtrack_min_ratio, [737](#)
 - clear_stats, [724](#)
 - compute_estimate, [724](#)
 - compute_estimate_debug, [724](#)
 - compute_profile_bound, [725](#)
 - compute_profile_bound_debug, [725](#)
 - compute_profile_estimate, [725](#)
 - convergence_min_function_change_ratio, [737](#)
 - convergence_min_step_size_ratio, [737](#)
 - convergence_test_grad_ratio, [726](#)
 - convergence_test_step_size, [726](#)
 - DefaultIterations, [738](#)
 - estimate_max, [726](#), [727](#)
 - estimate_max_debug, [728](#)
 - estimate_max_stack, [729](#)
 - estimate_profile_bounds, [730](#)
 - estimate_profile_bounds_debug, [730](#)
 - estimate_profile_bounds_parallel, [730](#)
 - estimate_profile_bounds_stack, [730](#)
 - estimate_profile_max, [731](#)
 - exit_counts, [738](#)
 - get_debug_stats, [731](#)
 - get_exit_counts, [732](#)
 - get_model, [732](#)
 - get_stats, [732](#)
 - get_total_backtracks, [732](#)
 - get_total_der_evals, [733](#)
 - get_total_fun_evals, [733](#)
 - get_total_iterations, [733](#)
 - last_backtrack_idx, [738](#)
 - local_maximize, [733](#)
 - local_profile_maximize, [733](#)
 - max_backtracks, [738](#)
 - max_iterations, [738](#)
 - max_threads, [738](#)
 - maximize, [734](#)
 - MaximizerData, [723](#)
 - mean_backtracks, [734](#)
 - mean_der_evals, [735](#)
 - mean_fun_evals, [735](#)
 - mean_iterations, [735](#)
 - min_eigenvalue_correction_delta, [739](#)
 - min_profile_bound_residual, [739](#)
 - model, [739](#)
 - mtx, [739](#)
 - name, [735](#)
 - NewtonMaximizer, [723](#)
 - num_estimations, [739](#)
 - num_threads, [740](#)
 - profile_bound_backtrack, [735](#)
 - record_exit_code, [735](#)
 - record_run_statistics, [736](#)
 - record_walltime, [736](#)
 - solve_profile_bound, [736](#)
 - total_backtracks, [740](#)
 - total_der_evals, [740](#)
 - total_fun_evals, [740](#)
 - total_iterations, [740](#)
 - total_walltime, [741](#)
- mappel::estimator::NewtonMaximizer< Model >, [720](#)
- mappel::estimator::ProfileBoundsData, [777](#)
 - confidence, [778](#)
 - estimated_idx, [778](#)
 - initialize_arrays, [778](#)
 - mle, [778](#)
 - Nparams_est, [778](#)
 - profile_lb, [779](#)
 - profile_points_lb, [779](#)
 - profile_points_lb_rllh, [779](#)
 - profile_points_ub, [779](#)
 - profile_points_ub_rllh, [779](#)
 - profile_ub, [780](#)
 - target_rllh_delta, [780](#)
- mappel::estimator::ProfileBoundsDataStack, [780](#)
 - confidence, [782](#)
 - estimated_idx, [782](#)
 - initialize_arrays, [781](#)
 - mle, [782](#)
 - Ndata, [782](#)

- Nparams_est, 782
- profile_lb, 782
- profile_points_lb, 782
- profile_points_lb_rllh, 783
- profile_points_ub, 783
- profile_points_ub_rllh, 783
- profile_ub, 783
- target_rllh_delta, 783
- mappel::estimator::ProfileBoundsDebugData, 49, 881
- mappel::estimator::ProfileLikelihoodData, 49, 881
- mappel::estimator::QuasiNewtonMaximizer
 - backtrack, 787
 - backtrack_max_ratio, 801
 - backtrack_min_linear_step_ratio, 801
 - backtrack_min_ratio, 801
 - clear_stats, 787
 - compute_estimate, 787
 - compute_estimate_debug, 788
 - compute_profile_bound, 788
 - compute_profile_bound_debug, 788
 - compute_profile_estimate, 789
 - convergence_min_function_change_ratio, 801
 - convergence_min_step_size_ratio, 801
 - convergence_test_grad_ratio, 789
 - convergence_test_step_size, 789
 - DefaultIterations, 802
 - estimate_max, 789, 790
 - estimate_max_debug, 791
 - estimate_max_stack, 792
 - estimate_profile_bounds, 793
 - estimate_profile_bounds_debug, 793
 - estimate_profile_bounds_parallel, 794
 - estimate_profile_bounds_stack, 794
 - estimate_profile_max, 795
 - exit_counts, 802
 - get_debug_stats, 795
 - get_exit_counts, 796
 - get_model, 796
 - get_stats, 796
 - get_total_backtracks, 796
 - get_total_der_evals, 797
 - get_total_fun_evals, 797
 - get_total_iterations, 797
 - last_backtrack_idx, 802
 - local_maximize, 797
 - local_profile_maximize, 797
 - max_backtracks, 802
 - max_iterations, 802
 - max_threads, 802
 - maximize, 798
 - MaximizerData, 786
 - mean_backtracks, 798
 - mean_der_evals, 799
 - mean_fun_evals, 799
 - mean_iterations, 799
 - min_eigenvalue_correction_delta, 803
 - min_profile_bound_residual, 803
 - model, 803
 - mtx, 803
 - name, 799
 - num_estimations, 803
 - num_threads, 804
 - profile_bound_backtrack, 799
 - QuasiNewtonMaximizer, 787
 - record_exit_code, 799
 - record_run_statistics, 800
 - record_walltime, 800
 - solve_profile_bound, 800
 - total_backtracks, 804
 - total_der_evals, 804
 - total_fun_evals, 804
 - total_iterations, 804
 - total_walltime, 805
- mappel::estimator::QuasiNewtonMaximizer< Model >, 784
- mappel::estimator::SimulatedAnnealingMaximizer
 - clear_stats, 807
 - compute_profile_bound, 807
 - compute_profile_bound_debug, 808
 - Default_T_Init, 815
 - DefaultCoolingRate, 815
 - DefaultNumIterations, 815
 - estimate_max, 808, 809
 - estimate_max_debug, 809, 810
 - estimate_max_stack, 810, 811
 - estimate_profile_bounds, 811
 - estimate_profile_bounds_debug, 812
 - estimate_profile_bounds_parallel, 812
 - estimate_profile_bounds_stack, 812
 - estimate_profile_max, 813
 - exit_counts, 816
 - get_debug_stats, 813
 - get_exit_counts, 814
 - get_model, 814
 - get_stats, 814
 - max_threads, 816
 - model, 816
 - mtx, 816
 - name, 814
 - num_estimations, 816
 - num_threads, 817
 - record_exit_code, 814
 - record_walltime, 815
 - SimulatedAnnealingMaximizer, 807
 - total_walltime, 817
- mappel::estimator::SimulatedAnnealingMaximizer< Model >, 805
- mappel::estimator::ThreadedEstimator

- clear_stats, 842
- compute_estimate, 842
- compute_estimate_debug, 843
- compute_profile_bound, 843
- compute_profile_bound_debug, 843
- compute_profile_estimate, 843
- estimate_max, 844, 845
- estimate_max_debug, 845, 846
- estimate_max_stack, 846, 847
- estimate_profile_bounds, 847
- estimate_profile_bounds_debug, 847
- estimate_profile_bounds_parallel, 848
- estimate_profile_bounds_stack, 848
- estimate_profile_max, 849
- exit_counts, 851
- get_debug_stats, 849
- get_exit_counts, 850
- get_model, 850
- get_stats, 850
- max_threads, 851
- model, 852
- mtx, 852
- name, 850
- num_estimations, 852
- num_threads, 852
- record_exit_code, 851
- record_walltime, 851
- ThreadedEstimator, 842
- total_walltime, 853
- mappel::estimator::ThreadedEstimator< Model >, 840
- mappel::estimator::TrustRegionMaximizer
 - backtrack, 857
 - backtrack_max_ratio, 871
 - backtrack_min_linear_step_ratio, 871
 - backtrack_min_ratio, 871
 - clear_stats, 857
 - compute_estimate, 857
 - compute_estimate_debug, 858
 - compute_profile_bound, 858
 - compute_profile_bound_debug, 858
 - compute_profile_estimate, 859
 - convergence_min_function_change_ratio, 871
 - convergence_min_step_size_ratio, 871
 - convergence_min_trust_radius, 872
 - convergence_test_grad_ratio, 859
 - convergence_test_step_size, 859
 - DefaultIterations, 872
 - estimate_max, 859, 860
 - estimate_max_debug, 861
 - estimate_max_stack, 862
 - estimate_profile_bounds, 863
 - estimate_profile_bounds_debug, 863
 - estimate_profile_bounds_parallel, 864
 - estimate_profile_bounds_stack, 864
 - estimate_profile_max, 865
 - exit_counts, 872
 - get_debug_stats, 865
 - get_exit_counts, 866
 - get_model, 866
 - get_stats, 866
 - get_total_backtracks, 866
 - get_total_der_evals, 867
 - get_total_fun_evals, 867
 - get_total_iterations, 867
 - last_backtrack_idx, 872
 - local_maximize, 867
 - local_profile_maximize, 867
 - max_backtracks, 872
 - max_iterations, 872
 - max_threads, 873
 - maximize, 868
 - MaximizerData, 856
 - mean_backtracks, 868
 - mean_der_evals, 869
 - mean_fun_evals, 869
 - mean_iterations, 869
 - min_eigenvalue_correction_delta, 873
 - min_profile_bound_residual, 873
 - model, 873
 - mtx, 873
 - name, 869
 - num_estimations, 874
 - num_threads, 874
 - profile_bound_backtrack, 869
 - record_exit_code, 869
 - record_run_statistics, 870
 - record_walltime, 870
 - rho_cauchy_min, 874
 - rho_obj_min, 874
 - rho_obj_opt, 874
 - solve_profile_bound, 870
 - total_backtracks, 875
 - total_der_evals, 875
 - total_fun_evals, 875
 - total_iterations, 875
 - total_walltime, 875
 - trust_radius_decrease, 875
 - trust_radius_decrease_min, 876
 - trust_radius_increase, 876
 - TrustRegionMaximizer, 857
- mappel::estimator::TrustRegionMaximizer< Model >, 853
- mappel::estimator::subroutine, 51
 - bound_step, 51
 - compute_D_scale, 52
 - compute_bound_scaling_vec, 52
 - compute_cauchy_point, 52
 - compute_initial_trust_radius, 52
 - compute_quadratic_model_value, 53

- compute_scaled_problem, 53
- solve_TR_subproblem, 53
- solve_profile_initial_step, 53
- solve_restricted_step_length_newton, 53
- mappel::mcmc, 54
 - compute_posterior_credible, 54
 - estimate_sample_posterior, 54
 - num_oversample, 55
 - sample_posterior, 55
 - sample_posterior_debug, 55
 - thin_sample, 55
- mappel::mcmc::MCMCData, 677
 - confidence, 678
 - credible_lb, 678
 - credible_ub, 678
 - initialize_arrays, 678
 - Nburnin, 678
 - Nsample, 678
 - sample, 678
 - sample_cov, 679
 - sample_mean, 679
 - sample_rllh, 679
 - thin, 679
- mappel::mcmc::MCMCDataStack, 679
 - confidence, 680
 - credible_lb, 680
 - credible_ub, 680
 - initialize_arrays, 680
 - Nburnin, 680
 - Ndata, 681
 - Nsample, 681
 - sample, 681
 - sample_cov, 681
 - sample_mean, 681
 - sample_rllh, 681
 - thin, 681
- mappel::mcmc::MCMCDebugData, 682
 - candidate, 682
 - candidate_rllh, 682
 - initialize_arrays, 682
 - Nsample, 683
 - sample, 683
 - sample_rllh, 683
- mappel::methods, 55
 - aposteriori_objective, 59
 - cr_lower_bound, 59
 - error_bounds_expected, 59
 - error_bounds_observed, 59
 - error_bounds_posterior_credible, 60
 - error_bounds_profile_likelihood, 60
 - estimate_max, 60, 61
 - estimate_posterior, 61
 - estimate_profile_likelihood, 61, 62
 - expected_information, 62
 - likelihood_objective, 63
 - make_estimator, 63
 - model_image, 63, 64
 - observed_information, 64
 - prior_objective, 64
 - simulate_image, 64–66
 - simulate_image_from_model, 66
- mappel::methods::debug, 67
 - error_bounds_profile_likelihood_debug, 67
 - estimate_max_debug, 67
 - estimate_posterior_debug, 68
- mappel::methods::likelihood, 68
 - grad, 69
 - grad2, 69
 - hessian, 69
 - llh, 70
 - rllh, 70
- mappel::methods::likelihood::debug, 71
 - grad_components, 71
 - hessian_components, 71
 - llh_components, 72
 - rllh_components, 72
- mappel::methods::objective, 72
 - grad, 74
 - grad2, 74, 75
 - hessian, 75, 76
 - llh, 76
 - negative_definite_hessian, 76, 77
 - rllh, 77
- mappel::methods::objective::debug, 78
 - grad_components, 78, 79
 - hessian_components, 79
 - llh_components, 79
 - rllh_components, 80
- mappel::methods::objective::openmp, 80
 - grad_stack, 81
 - hessian_stack, 81
 - llh_stack, 82
 - negative_definite_hessian_stack, 83
 - rllh_stack, 83, 84
- mappel::methods::openmp, 84
 - cr_lower_bound_stack, 85
 - error_bounds_expected_stack, 86
 - error_bounds_observed_stack, 86
 - error_bounds_profile_likelihood_parallel, 86
 - error_bounds_profile_likelihood_stack, 86, 87
 - estimate_max_stack, 87
 - estimate_posterior_stack, 87, 88
 - estimate_profile_likelihood_stack, 88
 - expected_information_stack, 88
 - model_image_stack, 88
 - sample_prior_stack, 89
 - simulate_image_stack, 89
- MappelError

- mappel, [27](#)
- MatT
 - mappel, [28](#)
- max_backtracks
 - mappel::estimator::IterativeMaximizer, [574](#)
 - mappel::estimator::NewtonDiagonalMaximizer, [717](#)
 - mappel::estimator::NewtonMaximizer, [738](#)
 - mappel::estimator::QuasiNewtonMaximizer, [802](#)
 - mappel::estimator::TrustRegionMaximizer, [872](#)
- max_iterations
 - mappel::estimator::IterativeMaximizer, [574](#)
 - mappel::estimator::NewtonDiagonalMaximizer, [717](#)
 - mappel::estimator::NewtonMaximizer, [738](#)
 - mappel::estimator::QuasiNewtonMaximizer, [802](#)
 - mappel::estimator::TrustRegionMaximizer, [872](#)
- max_seq_len
 - mappel::estimator::IterativeMaximizer::Maximizer←Data, [599](#)
- max_threads
 - mappel::estimator::CGaussHeuristicEstimator, [103](#)
 - mappel::estimator::CGaussMLE, [115](#)
 - mappel::estimator::HeuristicEstimator, [541](#)
 - mappel::estimator::IterativeMaximizer, [574](#)
 - mappel::estimator::NewtonDiagonalMaximizer, [717](#)
 - mappel::estimator::NewtonMaximizer, [738](#)
 - mappel::estimator::QuasiNewtonMaximizer, [802](#)
 - mappel::estimator::SimulatedAnnealingMaximizer, [816](#)
 - mappel::estimator::ThreadedEstimator, [851](#)
 - mappel::estimator::TrustRegionMaximizer, [873](#)
- MaxBacktracks
 - mappel::estimator, [50](#)
- MaxIter
 - mappel::estimator, [50](#)
- maxidx
 - mappel, [40](#)
- maximize
 - mappel::estimator::IterativeMaximizer, [570](#)
 - mappel::estimator::NewtonDiagonalMaximizer, [713](#)
 - mappel::estimator::NewtonMaximizer, [734](#)
 - mappel::estimator::QuasiNewtonMaximizer, [798](#)
 - mappel::estimator::TrustRegionMaximizer, [868](#)
- MaximizerData
 - mappel::estimator::IterativeMaximizer::Maximizer←Data, [594](#)
 - mappel::estimator::NewtonDiagonalMaximizer, [701](#)
 - mappel::estimator::NewtonMaximizer, [723](#)
 - mappel::estimator::QuasiNewtonMaximizer, [786](#)
 - mappel::estimator::TrustRegionMaximizer, [856](#)
- mcmc.cpp, [906](#)
- mcmc.h, [907](#)
- mcmc_candidate_eta_sigma
 - mappel::Gauss2DsxyModel, [528](#)
- mcmc_candidate_eta_y
 - mappel::Gauss2DsxyModel, [528](#)
- mcmc_data.h, [908](#)
- mean_backtracks
 - mappel::estimator::IterativeMaximizer, [570](#)
 - mappel::estimator::NewtonDiagonalMaximizer, [713](#)
 - mappel::estimator::NewtonMaximizer, [734](#)
 - mappel::estimator::QuasiNewtonMaximizer, [798](#)
 - mappel::estimator::TrustRegionMaximizer, [868](#)
- mean_der_evals
 - mappel::estimator::IterativeMaximizer, [571](#)
 - mappel::estimator::NewtonDiagonalMaximizer, [714](#)
 - mappel::estimator::NewtonMaximizer, [735](#)
 - mappel::estimator::QuasiNewtonMaximizer, [799](#)
 - mappel::estimator::TrustRegionMaximizer, [869](#)
- mean_fun_evals
 - mappel::estimator::IterativeMaximizer, [571](#)
 - mappel::estimator::NewtonDiagonalMaximizer, [714](#)
 - mappel::estimator::NewtonMaximizer, [735](#)
 - mappel::estimator::QuasiNewtonMaximizer, [799](#)
 - mappel::estimator::TrustRegionMaximizer, [869](#)
- mean_iterations
 - mappel::estimator::IterativeMaximizer, [571](#)
 - mappel::estimator::NewtonDiagonalMaximizer, [714](#)
 - mappel::estimator::NewtonMaximizer, [735](#)
 - mappel::estimator::QuasiNewtonMaximizer, [799](#)
 - mappel::estimator::TrustRegionMaximizer, [869](#)
- min_eigenvalue_correction_delta
 - mappel::estimator::IterativeMaximizer, [574](#)
 - mappel::estimator::NewtonDiagonalMaximizer, [718](#)
 - mappel::estimator::NewtonMaximizer, [739](#)
 - mappel::estimator::QuasiNewtonMaximizer, [803](#)
 - mappel::estimator::TrustRegionMaximizer, [873](#)
- min_profile_bound_residual
 - mappel::estimator::IterativeMaximizer, [574](#)
 - mappel::estimator::NewtonDiagonalMaximizer, [718](#)
 - mappel::estimator::NewtonMaximizer, [739](#)
 - mappel::estimator::QuasiNewtonMaximizer, [803](#)
 - mappel::estimator::TrustRegionMaximizer, [873](#)
- min_sigma
 - mappel::Gauss2DsMAP, [413](#)
 - mappel::Gauss2DsMLE, [446](#)
 - mappel::Gauss2DsModel, [477](#)
 - mappel::Gauss2DsxyModel, [528](#)
- mle
 - mappel::estimator::ProfileBoundsData, [778](#)
 - mappel::estimator::ProfileBoundsDataStack, [782](#)
- model
 - mappel::Gauss1DModel::Stencil, [840](#)
 - mappel::Gauss1DsModel::Stencil, [826](#)
 - mappel::Gauss2DModel::Stencil, [830](#)
 - mappel::Gauss2DsModel::Stencil, [836](#)
 - mappel::Gauss2DsxyModel::Stencil, [821](#)
 - mappel::estimator::CGaussHeuristicEstimator, [103](#)
 - mappel::estimator::CGaussMLE, [116](#)

- mappel::estimator::Estimator, 127
- mappel::estimator::HeuristicEstimator, 541
- mappel::estimator::IterativeMaximizer, 574
- mappel::estimator::NewtonDiagonalMaximizer, 718
- mappel::estimator::NewtonMaximizer, 739
- mappel::estimator::QuasiNewtonMaximizer, 803
- mappel::estimator::SimulatedAnnealingMaximizer, 816
- mappel::estimator::ThreadedEstimator, 852
- mappel::estimator::TrustRegionMaximizer, 873
- model_grad
 - PoissonGaussianNoise2DObjective.h, 931
- model_grad2
 - PoissonGaussianNoise2DObjective.h, 931
- model_hessian
 - PoissonGaussianNoise2DObjective.h, 931
- model_image
 - mappel::methods, 63, 64
 - PoissonGaussianNoise2DObjective.h, 931
- model_image_stack
 - mappel::methods::openmp, 88
- model_methods.h, 915
- model_methods_impl.h, 918
- ModelBoundsError
 - mappel::ModelBoundsError, 698
- ModelDataStackT
 - mappel, 28
 - mappel::Gauss1DMAP, 134
 - mappel::Gauss1DMLE, 162
 - mappel::Gauss1DsMAP, 216
 - mappel::Gauss1DsMLE, 245
 - mappel::Gauss2DMAP, 301
 - mappel::Gauss2DMLE, 331
 - mappel::Gauss2DsMAP, 391
 - mappel::Gauss2DsMLE, 423
 - mappel::Gauss2DsxyMAP, 485
 - mappel::PoissonNoise1DObjective, 766
 - mappel::PoissonNoise2DObjective, 773
 - PoissonGaussianNoise2DObjective, 762
- ModelDataT
 - mappel, 28
 - mappel::Gauss1DMAP, 134
 - mappel::Gauss1DMLE, 162
 - mappel::Gauss1DsMAP, 217
 - mappel::Gauss1DsMLE, 245
 - mappel::Gauss2DMAP, 301
 - mappel::Gauss2DMLE, 331
 - mappel::Gauss2DsMAP, 391
 - mappel::Gauss2DsMLE, 423
 - mappel::Gauss2DsxyMAP, 486
 - mappel::PoissonNoise1DObjective, 766
 - mappel::PoissonNoise2DObjective, 773
 - PoissonGaussianNoise2DObjective, 762
- ModelImprovement
 - mappel::estimator, 50
- modified_cholesky
 - mappel, 40
- mtx
 - mappel::estimator::CGaussHeuristicEstimator, 103
 - mappel::estimator::CGaussMLE, 116
 - mappel::estimator::HeuristicEstimator, 542
 - mappel::estimator::IterativeMaximizer, 575
 - mappel::estimator::NewtonDiagonalMaximizer, 718
 - mappel::estimator::NewtonMaximizer, 739
 - mappel::estimator::QuasiNewtonMaximizer, 803
 - mappel::estimator::SimulatedAnnealingMaximizer, 816
 - mappel::estimator::ThreadedEstimator, 852
 - mappel::estimator::TrustRegionMaximizer, 873
- nBacktracks
 - mappel::estimator::IterativeMaximizer::Maximizer↔Data, 599
- nIterations
 - mappel::estimator::IterativeMaximizer::Maximizer↔Data, 599
- name
 - mappel::Gauss1DMAP, 154
 - mappel::Gauss1DMLE, 182
 - mappel::Gauss1DsMAP, 237
 - mappel::Gauss1DsMLE, 265
 - mappel::Gauss2DMAP, 322
 - mappel::Gauss2DMLE, 352
 - mappel::Gauss2DsMAP, 414
 - mappel::Gauss2DsMLE, 446
 - mappel::Gauss2DsxyMAP, 504
 - mappel::estimator::CGaussHeuristicEstimator, 102
 - mappel::estimator::CGaussMLE, 114
 - mappel::estimator::Estimator, 126
 - mappel::estimator::HeuristicEstimator, 540
 - mappel::estimator::IterativeMaximizer, 571
 - mappel::estimator::NewtonDiagonalMaximizer, 714
 - mappel::estimator::NewtonMaximizer, 735
 - mappel::estimator::QuasiNewtonMaximizer, 799
 - mappel::estimator::SimulatedAnnealingMaximizer, 814
 - mappel::estimator::ThreadedEstimator, 850
 - mappel::estimator::TrustRegionMaximizer, 869
- Nburnin
 - mappel::mcmc::MCMCData, 678
 - mappel::mcmc::MCMCDataStack, 680
- Ndata
 - mappel::estimator::ProfileBoundsDataStack, 782
 - mappel::mcmc::MCMCDataStack, 681
- negative_definite_hessian
 - mappel::methods::objective, 76, 77
- negative_definite_hessian_stack
 - mappel::methods::objective::openmp, 83

- NewtonDiagonalMaximizer
 - mappel::estimator::NewtonDiagonalMaximizer, [702](#)
- NewtonMaximizer
 - mappel::estimator::NewtonMaximizer, [723](#)
- norm_sq
 - mappel, [40](#)
- normal_prior_grad
 - mappel, [40](#)
- normal_prior_grad2
 - mappel, [40](#)
- normal_quantile_onesided
 - mappel, [40](#)
- normal_quantile_twosided
 - mappel, [41](#)
- NotImplementedError
 - mappel::NotImplementedError, [742](#)
- Nparams_est
 - mappel::estimator::ProfileBoundsData, [778](#)
 - mappel::estimator::ProfileBoundsDataStack, [782](#)
- Nsample
 - mappel::mcmc::MCMCData, [678](#)
 - mappel::mcmc::MCMCDataStack, [681](#)
 - mappel::mcmc::MCMCDebugData, [683](#)
- num_dim
 - mappel::Gauss1DMAP, [154](#)
 - mappel::Gauss1DMLE, [182](#)
 - mappel::Gauss1DModel, [208](#)
 - mappel::Gauss1DsMAP, [237](#)
 - mappel::Gauss1DsMLE, [265](#)
 - mappel::Gauss1DsModel, [293](#)
 - mappel::Gauss2DMAP, [322](#)
 - mappel::Gauss2DMLE, [352](#)
 - mappel::Gauss2DModel, [381](#)
 - mappel::Gauss2DsMAP, [414](#)
 - mappel::Gauss2DsMLE, [446](#)
 - mappel::Gauss2DsModel, [477](#)
 - mappel::Gauss2DsxyMAP, [504](#)
 - mappel::Gauss2DsxyModel, [528](#)
 - mappel::ImageFormat1DBase, [548](#)
 - mappel::ImageFormat2DBase, [555](#)
 - mappel::PoissonNoise1DObjective, [769](#)
 - mappel::PoissonNoise2DObjective, [776](#)
- num_estimations
 - mappel::estimator::CGaussHeuristicEstimator, [104](#)
 - mappel::estimator::CGaussMLE, [116](#)
 - mappel::estimator::Estimator, [128](#)
 - mappel::estimator::HeuristicEstimator, [542](#)
 - mappel::estimator::IterativeMaximizer, [575](#)
 - mappel::estimator::NewtonDiagonalMaximizer, [718](#)
 - mappel::estimator::NewtonMaximizer, [739](#)
 - mappel::estimator::QuasiNewtonMaximizer, [803](#)
 - mappel::estimator::SimulatedAnnealingMaximizer, [816](#)
 - mappel::estimator::ThreadedEstimator, [852](#)
 - mappel::estimator::TrustRegionMaximizer, [874](#)
- num_fixed_parameters
 - mappel::estimator::IterativeMaximizer::Maximizer↵Data, [595](#)
- num_hyperparams
 - mappel::Gauss1DMAP, [154](#)
 - mappel::Gauss1DMLE, [182](#)
 - mappel::Gauss1DModel, [209](#)
 - mappel::Gauss1DsMAP, [237](#)
 - mappel::Gauss1DsMLE, [265](#)
 - mappel::Gauss1DsModel, [293](#)
 - mappel::Gauss2DMAP, [322](#)
 - mappel::Gauss2DMLE, [352](#)
 - mappel::Gauss2DModel, [381](#)
 - mappel::Gauss2DsMAP, [414](#)
 - mappel::Gauss2DsMLE, [446](#)
 - mappel::Gauss2DsModel, [477](#)
 - mappel::Gauss2DsxyMAP, [505](#)
 - mappel::Gauss2DsxyModel, [528](#)
 - mappel::MAPEstimator, [591](#)
 - mappel::MCMCAdaptor1Ds, [636](#)
 - mappel::MCMCAdaptor1D, [618](#)
 - mappel::MCMCAdaptor2Ds, [673](#)
 - mappel::MCMCAdaptor2D, [654](#)
 - mappel::MLEstimator, [697](#)
 - mappel::PointEmitterModel, [759](#)
- num_oversample
 - mappel::mcmc, [55](#)
- num_params
 - mappel::Gauss1DMAP, [154](#)
 - mappel::Gauss1DMLE, [182](#)
 - mappel::Gauss1DModel, [209](#)
 - mappel::Gauss1DsMAP, [237](#)
 - mappel::Gauss1DsMLE, [266](#)
 - mappel::Gauss1DsModel, [293](#)
 - mappel::Gauss2DMAP, [322](#)
 - mappel::Gauss2DMLE, [352](#)
 - mappel::Gauss2DModel, [381](#)
 - mappel::Gauss2DsMAP, [414](#)
 - mappel::Gauss2DsMLE, [446](#)
 - mappel::Gauss2DsModel, [477](#)
 - mappel::Gauss2DsxyMAP, [505](#)
 - mappel::Gauss2DsxyModel, [528](#)
 - mappel::MAPEstimator, [591](#)
 - mappel::MCMCAdaptor1Ds, [636](#)
 - mappel::MCMCAdaptor1D, [618](#)
 - mappel::MCMCAdaptor2Ds, [673](#)
 - mappel::MCMCAdaptor2D, [654](#)
 - mappel::MLEstimator, [697](#)
 - mappel::PointEmitterModel, [760](#)
 - mappel::estimator::IterativeMaximizer::Maximizer↵Data, [600](#)
- num_phases
 - mappel::Gauss1DMAP, [154](#)

- mappel::Gauss1DMLE, 182
- mappel::Gauss1DModel, 209
- mappel::Gauss1DsMAP, 238
- mappel::Gauss1DsMLE, 266
- mappel::Gauss1DsModel, 293
- mappel::Gauss2DMAP, 323
- mappel::Gauss2DMLE, 353
- mappel::Gauss2DModel, 382
- mappel::Gauss2DsMAP, 414
- mappel::Gauss2DsMLE, 446
- mappel::Gauss2DsModel, 478
- mappel::Gauss2DsxyMAP, 505
- mappel::MCMCAdaptor1Ds, 636
- mappel::MCMCAdaptor1D, 618
- mappel::MCMCAdaptor2Ds, 673
- mappel::MCMCAdaptor2D, 654
- mappel::MCMCAdaptorBase, 676
- num_threads
 - mappel::estimator::CGaussHeuristicEstimator, 104
 - mappel::estimator::CGaussMLE, 116
 - mappel::estimator::HeuristicEstimator, 542
 - mappel::estimator::IterativeMaximizer, 575
 - mappel::estimator::NewtonDiagonalMaximizer, 719
 - mappel::estimator::NewtonMaximizer, 740
 - mappel::estimator::QuasiNewtonMaximizer, 804
 - mappel::estimator::SimulatedAnnealingMaximizer, 817
 - mappel::estimator::ThreadedEstimator, 852
 - mappel::estimator::TrustRegionMaximizer, 874
- numerical.cpp, 921
- numerical.h, 922
- NumericalError
 - mappel::NumericalError, 742
- OMPEXceptionCatcher
 - omp_exception_catcher, 90
 - omp_exception_catcher::impl_::OMPEXceptionCatcher, 743
- OMPEXceptionCatcher.h, 923
- observed_information
 - mappel::methods, 64
- omp_exception_catcher, 90
 - Abort, 91
 - Continue, 91
 - DoNotTry, 91
 - OMPEXceptionCatcher, 90
 - RethrowFirst, 91
 - Strategy, 91
- omp_exception_catcher::impl_, 91
- omp_exception_catcher::impl_::OMPEXceptionCatcher
 - OMPEXceptionCatcher, 743
 - rethrow, 744
 - run, 744
 - setGlobalDefaultStrategy, 744
- omp_exception_catcher::impl_::OMPEXceptionCatcher<_dummy >, 743
- openmp_methods.h, 925
- operator<<
 - mappel, 41
 - mappel::Gauss1DModel::Stencil, 839
 - mappel::Gauss1DsModel::Stencil, 825
 - mappel::Gauss2DModel::Stencil, 829
 - mappel::Gauss2DsModel::Stencil, 834
 - mappel::Gauss2DsxyModel::Stencil, 820
 - mappel::estimator, 50
 - mappel::estimator::Estimator, 127
- operator=
 - mappel::Gauss1DMAP, 144, 145
 - mappel::Gauss1DMLE, 172, 173
 - mappel::Gauss1DModel, 199, 200
 - mappel::Gauss1DsMAP, 227
 - mappel::Gauss1DsMLE, 255, 256
 - mappel::Gauss1DsModel, 283, 284
 - mappel::Gauss2DMAP, 313
 - mappel::Gauss2DMLE, 343
 - mappel::Gauss2DModel, 372
 - mappel::Gauss2DsMAP, 403
 - mappel::Gauss2DsMLE, 435, 436
 - mappel::Gauss2DsModel, 467
 - mappel::ImageFormat2DBase, 554
 - mappel::MAPEstimator, 586
 - mappel::MCMCAdaptor1Ds, 628, 629
 - mappel::MCMCAdaptor1D, 611
 - mappel::MCMCAdaptor2Ds, 665
 - mappel::MCMCAdaptor2D, 646, 647
 - mappel::MLEstimator, 692
 - mappel::PointEmitterModel, 755
 - mappel::PoissonNoise1DObjective, 768
 - mappel::PoissonNoise2DObjective, 775
- ParallelRngGeneratorT
 - mappel, 28
- ParallelRngManagerT
 - mappel, 28
- ParamVecT
 - mappel, 28
 - mappel::Gauss1DMAP, 134
 - mappel::Gauss1DMLE, 162
 - mappel::Gauss1DModel, 190
 - mappel::Gauss1DsMAP, 217
 - mappel::Gauss1DsMLE, 245
 - mappel::Gauss1DsModel, 273
 - mappel::Gauss2DMAP, 302
 - mappel::Gauss2DMLE, 332
 - mappel::Gauss2DModel, 361
 - mappel::Gauss2DsMAP, 391
 - mappel::Gauss2DsMLE, 423
 - mappel::Gauss2DsModel, 455

- mappel::Gauss2DsxyMAP, 486
- mappel::Gauss2DsxyModel, 512
- mappel::MAPEstimator, 580
- mappel::MCMCAdaptor1Ds, 622
- mappel::MCMCAdaptor1D, 604
- mappel::MCMCAdaptor2Ds, 658
- mappel::MCMCAdaptor2D, 640
- mappel::MLEstimator, 686
- mappel::PointEmitterModel, 749
- ParameterValueError
 - mappel::ParameterValueError, 745
- ParamT
 - mappel, 28
 - mappel::Gauss1DMAP, 134
 - mappel::Gauss1DMLE, 162
 - mappel::Gauss1DModel, 190
 - mappel::Gauss1DModel::Stencil, 837
 - mappel::Gauss1DsMAP, 217
 - mappel::Gauss1DsMLE, 245
 - mappel::Gauss1DsModel, 273
 - mappel::Gauss1DsModel::Stencil, 823
 - mappel::Gauss2DMAP, 301
 - mappel::Gauss2DMLE, 331
 - mappel::Gauss2DModel, 361
 - mappel::Gauss2DModel::Stencil, 827
 - mappel::Gauss2DsMAP, 391
 - mappel::Gauss2DsMLE, 423
 - mappel::Gauss2DsModel, 455
 - mappel::Gauss2DsModel::Stencil, 832
 - mappel::Gauss2DsxyMAP, 486
 - mappel::Gauss2DsxyModel, 512
 - mappel::Gauss2DsxyModel::Stencil, 818
 - mappel::MAPEstimator, 580
 - mappel::MCMCAdaptor1Ds, 622
 - mappel::MCMCAdaptor1D, 604
 - mappel::MCMCAdaptor2Ds, 658
 - mappel::MCMCAdaptor2D, 640
 - mappel::MLEstimator, 686
 - mappel::PointEmitterModel, 749
- pareto_prior_grad
 - mappel, 42
- pareto_prior_grad2
 - mappel, 42
- pixel_grad
 - mappel::Gauss1DMAP, 145
 - mappel::Gauss1DMLE, 173
 - mappel::Gauss1DModel, 200
 - mappel::Gauss1DsMAP, 228
 - mappel::Gauss1DsMLE, 256
 - mappel::Gauss1DsModel, 284
 - mappel::Gauss2DMAP, 313
 - mappel::Gauss2DMLE, 343
 - mappel::Gauss2DModel, 372
 - mappel::Gauss2DsMAP, 404
 - mappel::Gauss2DsMLE, 436
 - mappel::Gauss2DsModel, 467
 - mappel::Gauss2DsxyMAP, 496
 - mappel::Gauss2DsxyModel, 522
- pixel_grad2
 - mappel::Gauss1DMAP, 145
 - mappel::Gauss1DMLE, 173
 - mappel::Gauss1DModel, 200
 - mappel::Gauss1DsMAP, 228
 - mappel::Gauss1DsMLE, 256
 - mappel::Gauss1DsModel, 284
 - mappel::Gauss2DMAP, 313
 - mappel::Gauss2DMLE, 343
 - mappel::Gauss2DModel, 372
 - mappel::Gauss2DsMAP, 404
 - mappel::Gauss2DsMLE, 436
 - mappel::Gauss2DsModel, 467
 - mappel::Gauss2DsxyMAP, 496
 - mappel::Gauss2DsxyModel, 522
- pixel_hess
 - mappel::Gauss1DMAP, 145
 - mappel::Gauss1DMLE, 173
 - mappel::Gauss1DModel, 200
 - mappel::Gauss1DsMAP, 228
 - mappel::Gauss1DsMLE, 256
 - mappel::Gauss1DsModel, 284
 - mappel::Gauss2DMAP, 313
 - mappel::Gauss2DMLE, 343
 - mappel::Gauss2DModel, 373
 - mappel::Gauss2DsMAP, 404
 - mappel::Gauss2DsMLE, 436
 - mappel::Gauss2DsModel, 468
 - mappel::Gauss2DsxyMAP, 496
 - mappel::Gauss2DsxyModel, 522
- pixel_hess_update
 - mappel::Gauss1DMAP, 145
 - mappel::Gauss1DMLE, 173
 - mappel::Gauss1DModel, 200
 - mappel::Gauss1DsMAP, 228
 - mappel::Gauss1DsMLE, 256
 - mappel::Gauss1DsModel, 284
 - mappel::Gauss2DMAP, 314
 - mappel::Gauss2DMLE, 344
 - mappel::Gauss2DModel, 373
 - mappel::Gauss2DsMAP, 404
 - mappel::Gauss2DsMLE, 436
 - mappel::Gauss2DsModel, 468
 - mappel::Gauss2DsxyMAP, 496
 - mappel::Gauss2DsxyModel, 522
- pixel_model_value
 - mappel::Gauss1DMAP, 145
 - mappel::Gauss1DMLE, 173
 - mappel::Gauss1DModel, 200
 - mappel::Gauss1DsMAP, 228

- mappel::Gauss1DsMLE, [256](#)
- mappel::Gauss1DsModel, [284](#)
- mappel::Gauss2DMap, [314](#)
- mappel::Gauss2DMLE, [344](#)
- mappel::Gauss2DModel, [373](#)
- mappel::Gauss2DsMap, [404](#)
- mappel::Gauss2DsMLE, [437](#)
- mappel::Gauss2DsModel, [468](#)
- mappel::Gauss2DsxyMap, [496](#)
- mappel::Gauss2DsxyModel, [522](#)
- PointEmitterModel
 - mappel::PointEmitterModel, [749](#)
- PointEmitterModel.cpp, [927](#)
- PointEmitterModel.h, [928](#)
- poisson_log_likelihood
 - mappel, [42](#)
- PoissonGaussianNoise2DObjective
 - CoordIdxT, [761](#)
 - CoordStackT, [761](#)
 - CoordT, [761](#)
 - estimator_names, [762](#)
 - ModelDataStackT, [762](#)
 - ModelDataT, [762](#)
 - PoissonGaussianNoise2DObjective, [762](#)
 - sensor_bg_map, [762](#)
 - sensor_gain_map, [762](#)
- PoissonGaussianNoise2DObjective< ModelBase >, [760](#)
- PoissonGaussianNoise2DObjective.cpp, [929](#)
- PoissonGaussianNoise2DObjective.h, [929](#)
 - fisher_information, [931](#)
 - log_likelihood, [931](#)
 - make_estimator, [931](#)
 - model_grad, [931](#)
 - model_grad2, [931](#)
 - model_hessian, [931](#)
 - model_image, [931](#)
 - relative_log_likelihood, [931](#)
 - simulate_image, [932](#)
- PoissonNoise1DObjective
 - mappel::PoissonNoise1DObjective, [766](#)
- PoissonNoise1DObjective.cpp, [932](#)
- PoissonNoise1DObjective.h, [933](#)
- PoissonNoise2DObjective
 - mappel::PoissonNoise2DObjective, [773](#)
- PoissonNoise2DObjective.cpp, [935](#)
- PoissonNoise2DObjective.h, [935](#)
- print_centered_title
 - mappel, [42](#)
- print_image
 - mappel, [42](#)
- print_labeled_image
 - mappel, [43](#)
- print_text_image
 - mappel, [43](#)
- print_vec_row
 - mappel, [43](#)
- prior
 - mappel::Gauss1DMap, [154](#)
 - mappel::Gauss1DMLE, [182](#)
 - mappel::Gauss1DModel, [209](#)
 - mappel::Gauss1DsMap, [238](#)
 - mappel::Gauss1DsMLE, [266](#)
 - mappel::Gauss1DsModel, [294](#)
 - mappel::Gauss2DMap, [323](#)
 - mappel::Gauss2DMLE, [353](#)
 - mappel::Gauss2DModel, [382](#)
 - mappel::Gauss2DsMap, [415](#)
 - mappel::Gauss2DsMLE, [447](#)
 - mappel::Gauss2DsModel, [478](#)
 - mappel::Gauss2DsxyMap, [505](#)
 - mappel::Gauss2DsxyModel, [529](#)
 - mappel::MAPEstimator, [591](#)
 - mappel::MCMCAdaptor1Ds, [636](#)
 - mappel::MCMCAdaptor1D, [618](#)
 - mappel::MCMCAdaptor2Ds, [673](#)
 - mappel::MCMCAdaptor2D, [654](#)
 - mappel::MLEstimator, [697](#)
 - mappel::PointEmitterModel, [760](#)
- prior_objective
 - mappel::methods, [64](#)
- prior_types
 - mappel::Gauss1DMap, [155](#)
 - mappel::Gauss1DMLE, [183](#)
 - mappel::Gauss1DModel, [209](#)
 - mappel::Gauss1DsMap, [238](#)
 - mappel::Gauss1DsMLE, [266](#)
 - mappel::Gauss1DsModel, [294](#)
 - mappel::Gauss2DMap, [323](#)
 - mappel::Gauss2DMLE, [353](#)
 - mappel::Gauss2DModel, [382](#)
 - mappel::Gauss2DsMap, [415](#)
 - mappel::Gauss2DsMLE, [447](#)
 - mappel::Gauss2DsModel, [478](#)
 - mappel::Gauss2DsxyMap, [505](#)
- profile_bound_backtrack
 - mappel::estimator::IterativeMaximizer, [571](#)
 - mappel::estimator::NewtonDiagonalMaximizer, [714](#)
 - mappel::estimator::NewtonMaximizer, [735](#)
 - mappel::estimator::QuasiNewtonMaximizer, [799](#)
 - mappel::estimator::TrustRegionMaximizer, [869](#)
- profile_lb
 - mappel::estimator::ProfileBoundsData, [779](#)
 - mappel::estimator::ProfileBoundsDataStack, [782](#)
- profile_points_lb
 - mappel::estimator::ProfileBoundsData, [779](#)
 - mappel::estimator::ProfileBoundsDataStack, [782](#)
- profile_points_lb_rllh
 - mappel::estimator::ProfileBoundsData, [779](#)

- mappel::estimator::ProfileBoundsDataStack, 783
- profile_points_ub
 - mappel::estimator::ProfileBoundsData, 779
 - mappel::estimator::ProfileBoundsDataStack, 783
- profile_points_ub_rllh
 - mappel::estimator::ProfileBoundsData, 779
 - mappel::estimator::ProfileBoundsDataStack, 783
- profile_ub
 - mappel::estimator::ProfileBoundsData, 780
 - mappel::estimator::ProfileBoundsDataStack, 783
- psf_sigma
 - mappel::Gauss1DMAP, 155
 - mappel::Gauss1DMLE, 183
 - mappel::Gauss1DModel, 210
 - mappel::Gauss2DMAP, 323
 - mappel::Gauss2DMLE, 353
 - mappel::Gauss2DModel, 382
 - mappel::Gauss2DsxyMAP, 506
- QuasiNewtonMaximizer
 - mappel::estimator::QuasiNewtonMaximizer, 787
- README.md, 937
- record_backtrack
 - mappel::estimator::IterativeMaximizer::Maximizer↔Data, 595
- record_exit_code
 - mappel::estimator::CGaussHeuristicEstimator, 102
 - mappel::estimator::CGaussMLE, 114
 - mappel::estimator::Estimator, 126
 - mappel::estimator::HeuristicEstimator, 540
 - mappel::estimator::IterativeMaximizer, 571
 - mappel::estimator::NewtonDiagonalMaximizer, 714
 - mappel::estimator::NewtonMaximizer, 735
 - mappel::estimator::QuasiNewtonMaximizer, 799
 - mappel::estimator::SimulatedAnnealingMaximizer, 814
 - mappel::estimator::ThreadedEstimator, 851
 - mappel::estimator::TrustRegionMaximizer, 869
- record_iteration
 - mappel::estimator::IterativeMaximizer::Maximizer↔Data, 596
- record_run_statistics
 - mappel::estimator::IterativeMaximizer, 571
 - mappel::estimator::NewtonDiagonalMaximizer, 715
 - mappel::estimator::NewtonMaximizer, 736
 - mappel::estimator::QuasiNewtonMaximizer, 800
 - mappel::estimator::TrustRegionMaximizer, 870
- record_walltime
 - mappel::estimator::CGaussHeuristicEstimator, 102
 - mappel::estimator::CGaussMLE, 115
 - mappel::estimator::Estimator, 127
 - mappel::estimator::HeuristicEstimator, 541
 - mappel::estimator::IterativeMaximizer, 572
 - mappel::estimator::NewtonDiagonalMaximizer, 715
 - mappel::estimator::NewtonMaximizer, 736
 - mappel::estimator::QuasiNewtonMaximizer, 800
 - mappel::estimator::SimulatedAnnealingMaximizer, 815
 - mappel::estimator::ThreadedEstimator, 851
 - mappel::estimator::TrustRegionMaximizer, 870
- refine_gaussian_2Dmax
 - mappel, 43
- refine_gaussian_3Dmax
 - mappel, 43
- reflected_theta
 - mappel::Gauss1DMAP, 146
 - mappel::Gauss1DMLE, 174
 - mappel::Gauss1DModel, 200
 - mappel::Gauss1DsMAP, 228
 - mappel::Gauss1DsMLE, 257
 - mappel::Gauss1DsModel, 285
 - mappel::Gauss2DMAP, 314
 - mappel::Gauss2DMLE, 344
 - mappel::Gauss2DModel, 373
 - mappel::Gauss2DsMAP, 405
 - mappel::Gauss2DsMLE, 437
 - mappel::Gauss2DsModel, 468
 - mappel::Gauss2DsxyMAP, 496
 - mappel::Gauss2DsxyModel, 522
 - mappel::MAPEstimator, 586
 - mappel::MCMCAdaptor1Ds, 629
 - mappel::MCMCAdaptor1D, 611
 - mappel::MCMCAdaptor2Ds, 665
 - mappel::MCMCAdaptor2D, 647
 - mappel::MLEstimator, 692
 - mappel::PointEmitterModel, 755
- reflected_theta_stack
 - mappel::Gauss1DMAP, 146
 - mappel::Gauss1DMLE, 174
 - mappel::Gauss1DModel, 201
 - mappel::Gauss1DsMAP, 229
 - mappel::Gauss1DsMLE, 257
 - mappel::Gauss1DsModel, 285
 - mappel::Gauss2DMAP, 314
 - mappel::Gauss2DMLE, 344
 - mappel::Gauss2DModel, 373
 - mappel::Gauss2DsMAP, 405
 - mappel::Gauss2DsMLE, 437
 - mappel::Gauss2DsModel, 468
 - mappel::Gauss2DsxyMAP, 497
 - mappel::Gauss2DsxyModel, 522
 - mappel::MAPEstimator, 586
 - mappel::MCMCAdaptor1Ds, 629
 - mappel::MCMCAdaptor1D, 611
 - mappel::MCMCAdaptor2Ds, 666
 - mappel::MCMCAdaptor2D, 647
 - mappel::MLEstimator, 692
 - mappel::PointEmitterModel, 755

- relative_log_likelihood
 - PoissonGaussianNoise2DObjective.h, [931](#)
- relative_poisson_log_likelihood
 - mappel, [44](#)
- rename_hyperparam
 - mappel::Gauss1DModel, [146](#)
 - mappel::Gauss1DModel, [174](#)
 - mappel::Gauss1DModel, [201](#)
 - mappel::Gauss1DsMAP, [229](#)
 - mappel::Gauss1DsMLE, [257](#)
 - mappel::Gauss1DsModel, [285](#)
 - mappel::Gauss2DModel, [314](#)
 - mappel::Gauss2DModel, [344](#)
 - mappel::Gauss2DModel, [373](#)
 - mappel::Gauss2DsMAP, [405](#)
 - mappel::Gauss2DsMLE, [437](#)
 - mappel::Gauss2DsModel, [469](#)
 - mappel::Gauss2DsxyMAP, [497](#)
 - mappel::Gauss2DsxyModel, [523](#)
 - mappel::MAPEstimator, [586](#)
 - mappel::MCMCAdaptor1Ds, [629](#)
 - mappel::MCMCAdaptor1D, [611](#)
 - mappel::MCMCAdaptor2Ds, [666](#)
 - mappel::MCMCAdaptor2D, [647](#)
 - mappel::MLEstimator, [692](#)
 - mappel::PointEmitterModel, [755](#)
- restore_stencil
 - mappel::estimator::IterativeMaximizer::Maximizer↔
Data, [596](#)
- restrict_value_range
 - mappel, [44](#)
- rethrow
 - omp_exception_catcher::impl_::OMPEXception↔
Catcher, [744](#)
- RethrowFirst
 - omp_exception_catcher, [91](#)
- ReturnIfSubclassT
 - mappel, [28](#)
- rho_cauchy_min
 - mappel::estimator::TrustRegionMaximizer, [874](#)
- rho_obj_min
 - mappel::estimator::TrustRegionMaximizer, [874](#)
- rho_obj_opt
 - mappel::estimator::TrustRegionMaximizer, [874](#)
- rllh
 - mappel::estimator::IterativeMaximizer::Maximizer↔
Data, [600](#)
 - mappel::methods::likelihood, [70](#)
 - mappel::methods::objective, [77](#)
- rllh_beta2_prior
 - mappel, [44](#)
- rllh_beta_prior
 - mappel, [44](#)
- rllh_components
 - mappel::methods::likelihood::debug, [72](#)
 - mappel::methods::objective::debug, [80](#)
- rllh_gamma_prior
 - mappel, [44](#)
- rllh_normal_prior
 - mappel, [44](#)
- rllh_pareto_prior
 - mappel, [44](#)
- rllh_stack
 - mappel::methods::objective::openmp, [83](#), [84](#)
- rng.cpp, [937](#)
- rng.h, [938](#)
- rng_manager
 - mappel, [45](#)
- RngSeedT
 - mappel, [28](#)
- run
 - omp_exception_catcher::impl_::OMPEXception↔
Catcher, [744](#)
- s0
 - mappel::estimator::IterativeMaximizer::Maximizer↔
Data, [600](#)
- s1
 - mappel::estimator::IterativeMaximizer::Maximizer↔
Data, [600](#)
- sample
 - mappel::mcmc::MCMCData, [678](#)
 - mappel::mcmc::MCMCDataStack, [681](#)
 - mappel::mcmc::MCMCDebugData, [683](#)
- sample_cov
 - mappel::mcmc::MCMCData, [679](#)
 - mappel::mcmc::MCMCDataStack, [681](#)
- sample_mcmc_candidate
 - mappel::Gauss1DModel, [146](#)
 - mappel::Gauss1DModel, [174](#)
 - mappel::Gauss1DModel, [201](#)
 - mappel::Gauss1DsMAP, [229](#)
 - mappel::Gauss1DsMLE, [257](#)
 - mappel::Gauss1DsModel, [285](#)
 - mappel::Gauss2DModel, [314](#), [315](#)
 - mappel::Gauss2DModel, [344](#), [345](#)
 - mappel::Gauss2DModel, [374](#)
 - mappel::Gauss2DsMAP, [405](#)
 - mappel::Gauss2DsMLE, [437](#), [438](#)
 - mappel::Gauss2DsModel, [469](#)
 - mappel::Gauss2DsxyMAP, [497](#)
 - mappel::Gauss2DsxyModel, [523](#)
 - mappel::MCMCAdaptor1Ds, [629](#)
 - mappel::MCMCAdaptor1D, [611](#), [612](#)
 - mappel::MCMCAdaptor2Ds, [666](#)
 - mappel::MCMCAdaptor2D, [647](#)
- sample_mean
 - mappel::mcmc::MCMCData, [679](#)

- mappel::mcmc::MCMCDataStack, 681
- sample_posterior
 - mappel::mcmc, 55
- sample_posterior_debug
 - mappel::mcmc, 55
- sample_prior
 - mappel::Gauss1DMap, 146, 147
 - mappel::Gauss1DMLE, 174, 175
 - mappel::Gauss1DModel, 201
 - mappel::Gauss1DsMAP, 229
 - mappel::Gauss1DsMLE, 257, 258
 - mappel::Gauss1DsModel, 285, 286
 - mappel::Gauss2DMap, 315
 - mappel::Gauss2DMLE, 345
 - mappel::Gauss2DModel, 374
 - mappel::Gauss2DsMAP, 405, 406
 - mappel::Gauss2DsMLE, 438
 - mappel::Gauss2DsModel, 469
 - mappel::Gauss2DsxyMAP, 497
 - mappel::Gauss2DsxyModel, 523
 - mappel::MAPEstimator, 586, 587
 - mappel::MCMCAdaptor1Ds, 630
 - mappel::MCMCAdaptor1D, 612
 - mappel::MCMCAdaptor2Ds, 666
 - mappel::MCMCAdaptor2D, 648
 - mappel::MLEstimator, 692, 693
 - mappel::PointEmitterModel, 755, 756
- sample_prior_stack
 - mappel::methods::openmp, 89
- sample_rllh
 - mappel::mcmc::MCMCData, 679
 - mappel::mcmc::MCMCDataStack, 681
 - mappel::mcmc::MCMCDebugData, 683
- save_stencil
 - mappel::estimator::IterativeMaximizer::Maximizer↵
Data, 596
- saved_stencil
 - mappel::estimator::IterativeMaximizer::Maximizer↵
Data, 597
- saved_theta
 - mappel::estimator::IterativeMaximizer::Maximizer↵
Data, 597
- sensor_bg_map
 - PoissonGaussianNoise2DObjective, 762
- sensor_gain_map
 - PoissonGaussianNoise2DObjective, 762
- seq_len
 - mappel::estimator::IterativeMaximizer::Maximizer↵
Data, 600
- seq_rllh
 - mappel::estimator::IterativeMaximizer::Maximizer↵
Data, 600
- set_background_mcmc_sampling
 - mappel::Gauss1DMap, 147
 - mappel::Gauss1DMLE, 175
 - mappel::Gauss1DModel, 202
 - mappel::Gauss1DsMAP, 230
 - mappel::Gauss1DsMLE, 258
 - mappel::Gauss1DsModel, 286
 - mappel::Gauss2DMap, 315
 - mappel::Gauss2DMLE, 345
 - mappel::Gauss2DModel, 374
 - mappel::Gauss2DsMAP, 406
 - mappel::Gauss2DsMLE, 438
 - mappel::Gauss2DsModel, 470
- set_bounds
 - mappel::Gauss1DMap, 147
 - mappel::Gauss1DMLE, 175
 - mappel::Gauss1DModel, 202
 - mappel::Gauss1DsMAP, 230
 - mappel::Gauss1DsMLE, 258
 - mappel::Gauss1DsModel, 286
 - mappel::Gauss2DMap, 315
 - mappel::Gauss2DMLE, 345
 - mappel::Gauss2DModel, 374
 - mappel::Gauss2DsMAP, 406
 - mappel::Gauss2DsMLE, 438
 - mappel::Gauss2DsModel, 470
 - mappel::Gauss2DsxyMAP, 498
 - mappel::Gauss2DsxyModel, 523
 - mappel::MAPEstimator, 587
 - mappel::MCMCAdaptor1Ds, 630
 - mappel::MCMCAdaptor1D, 612
 - mappel::MCMCAdaptor2Ds, 667
 - mappel::MCMCAdaptor2D, 648
 - mappel::MLEstimator, 693
 - mappel::PointEmitterModel, 756
- set_fixed_parameters
 - mappel::estimator::IterativeMaximizer::Maximizer↵
Data, 597
- set_hyperparam_names
 - mappel::Gauss1DMap, 147
 - mappel::Gauss1DMLE, 175
 - mappel::Gauss1DModel, 202
 - mappel::Gauss1DsMAP, 230
 - mappel::Gauss1DsMLE, 258
 - mappel::Gauss1DsModel, 286
 - mappel::Gauss2DMap, 315
 - mappel::Gauss2DMLE, 345
 - mappel::Gauss2DModel, 375
 - mappel::Gauss2DsMAP, 406
 - mappel::Gauss2DsMLE, 438
 - mappel::Gauss2DsModel, 470

- mappel::Gauss2DsxyMAP, 498
- mappel::Gauss2DsxyModel, 523
- mappel::MAPEstimator, 587
- mappel::MCMCAdaptor1Ds, 630
- mappel::MCMCAdaptor1D, 612
- mappel::MCMCAdaptor2Ds, 667
- mappel::MCMCAdaptor2D, 648
- mappel::MLEstimator, 693
- mappel::PointEmitterModel, 756
- set_hyperparam_value
 - mappel::Gauss1DMAP, 147
 - mappel::Gauss1DMLE, 176
 - mappel::Gauss1DModel, 202
 - mappel::Gauss1DsMAP, 230
 - mappel::Gauss1DsMLE, 258
 - mappel::Gauss1DsModel, 286
 - mappel::Gauss2DMAP, 316
 - mappel::Gauss2DMLE, 346
 - mappel::Gauss2DModel, 375
 - mappel::Gauss2DsMAP, 406
 - mappel::Gauss2DsMLE, 439
 - mappel::Gauss2DsModel, 470
 - mappel::Gauss2DsxyMAP, 498
 - mappel::Gauss2DsxyModel, 524
 - mappel::MAPEstimator, 587
 - mappel::MCMCAdaptor1Ds, 630
 - mappel::MCMCAdaptor1D, 613
 - mappel::MCMCAdaptor2Ds, 667
 - mappel::MCMCAdaptor2D, 648
 - mappel::MLEstimator, 693
 - mappel::PointEmitterModel, 756
- set_hyperparams
 - mappel::Gauss1DMAP, 147
 - mappel::Gauss1DMLE, 176
 - mappel::Gauss1DModel, 202
 - mappel::Gauss1DsMAP, 230
 - mappel::Gauss1DsMLE, 258
 - mappel::Gauss1DsModel, 286
 - mappel::Gauss2DMAP, 316
 - mappel::Gauss2DMLE, 346
 - mappel::Gauss2DModel, 375
 - mappel::Gauss2DsMAP, 406
 - mappel::Gauss2DsMLE, 439
 - mappel::Gauss2DsModel, 470
 - mappel::Gauss2DsxyMAP, 498
 - mappel::Gauss2DsxyModel, 524
 - mappel::MAPEstimator, 587
 - mappel::MCMCAdaptor1Ds, 631
 - mappel::MCMCAdaptor1D, 613
 - mappel::MCMCAdaptor2Ds, 667
 - mappel::MCMCAdaptor2D, 649
- set_image_in_stack
 - mappel::Gauss1DMAP, 148
 - mappel::Gauss1DMLE, 176
 - mappel::Gauss1DModel, 202
 - mappel::Gauss1DsMAP, 230
 - mappel::Gauss1DsMLE, 259
 - mappel::Gauss1DsModel, 287
 - mappel::Gauss2DMAP, 316
 - mappel::Gauss2DMLE, 346
 - mappel::Gauss2DModel, 375
 - mappel::Gauss2DsMAP, 407
 - mappel::Gauss2DsMLE, 439
 - mappel::Gauss2DsModel, 470
 - mappel::Gauss2DsxyMAP, 499
 - mappel::Gauss2DsxyModel, 524
 - mappel::MAPEstimator, 587
 - mappel::MCMCAdaptor1Ds, 631
 - mappel::MCMCAdaptor1D, 613
- mappel::Gauss1DMAP, 148
- mappel::Gauss1DMLE, 176
- mappel::Gauss1DModel, 202
- mappel::Gauss1DsMAP, 230
- mappel::Gauss1DsMLE, 259
- mappel::Gauss1DsModel, 287
- mappel::Gauss2DMAP, 316
- mappel::Gauss2DMLE, 346
- mappel::Gauss2DModel, 375
- mappel::Gauss2DsMAP, 407
- mappel::Gauss2DsMLE, 439
- mappel::Gauss2DsModel, 470
- mappel::Gauss2DsxyMAP, 498
- mappel::Gauss2DsxyModel, 524
- mappel::ImageFormat1DBase, 548
- mappel::ImageFormat2DBase, 554
- mappel::PoissonNoise1DObjective, 768
- mappel::PoissonNoise2DObjective, 775
- set_intensity_mcmc_sampling
 - mappel::Gauss1DMAP, 148
 - mappel::Gauss1DMLE, 176
 - mappel::Gauss1DModel, 203
 - mappel::Gauss1DsMAP, 231
 - mappel::Gauss1DsMLE, 259
 - mappel::Gauss1DsModel, 287
 - mappel::Gauss2DMAP, 316
 - mappel::Gauss2DMLE, 346
 - mappel::Gauss2DModel, 375
 - mappel::Gauss2DsMAP, 407
 - mappel::Gauss2DsMLE, 439
 - mappel::Gauss2DsModel, 470
 - mappel::Gauss2DsxyMAP, 499
 - mappel::MCMCAdaptor1Ds, 631
 - mappel::MCMCAdaptor1D, 613
 - mappel::MCMCAdaptor2Ds, 667
 - mappel::MCMCAdaptor2D, 649
- set_lbound
 - mappel::Gauss1DMAP, 148
 - mappel::Gauss1DMLE, 176
 - mappel::Gauss1DModel, 203
 - mappel::Gauss1DsMAP, 231
 - mappel::Gauss1DsMLE, 259
 - mappel::Gauss1DsModel, 287
 - mappel::Gauss2DMAP, 316
 - mappel::Gauss2DMLE, 346
 - mappel::Gauss2DModel, 375
 - mappel::Gauss2DsMAP, 407
 - mappel::Gauss2DsMLE, 439
 - mappel::Gauss2DsModel, 471
 - mappel::Gauss2DsxyMAP, 499
 - mappel::Gauss2DsxyModel, 524
 - mappel::MAPEstimator, 587
 - mappel::MCMCAdaptor1Ds, 631
 - mappel::MCMCAdaptor1D, 613

- mappel::MCMCAdaptor2Ds, 668
- mappel::MCMCAdaptor2D, 649
- mappel::MLEstimator, 693
- mappel::PointEmitterModel, 756
- set_max_sigma
 - mappel::Gauss1DsMAP, 231
 - mappel::Gauss1DsMLE, 259
 - mappel::Gauss1DsModel, 287
 - mappel::Gauss2DsMAP, 407
 - mappel::Gauss2DsMLE, 439
 - mappel::Gauss2DsModel, 471
 - mappel::Gauss2DsxyModel, 524
- set_max_sigma_ratio
 - mappel::Gauss2DsMAP, 407
 - mappel::Gauss2DsMLE, 439
 - mappel::Gauss2DsModel, 471
 - mappel::Gauss2DsxyModel, 524
- set_mcmc_num_phases
 - mappel::Gauss1DMAP, 148
 - mappel::Gauss1DMLE, 176
 - mappel::Gauss1DModel, 203
 - mappel::Gauss1DsMAP, 231
 - mappel::Gauss1DsMLE, 259
 - mappel::Gauss1DsModel, 287
 - mappel::Gauss2DMAP, 316
 - mappel::Gauss2DMLE, 346
 - mappel::Gauss2DModel, 376
 - mappel::Gauss2DsMAP, 407
 - mappel::Gauss2DsMLE, 440
 - mappel::Gauss2DsModel, 471
 - mappel::Gauss2DsxyMAP, 499
 - mappel::MCMCAdaptor1Ds, 631
 - mappel::MCMCAdaptor1D, 613
 - mappel::MCMCAdaptor2Ds, 668
 - mappel::MCMCAdaptor2D, 649
 - mappel::MCMCAdaptorBase, 676
- set_mcmc_sigma_scale
 - mappel::Gauss1DMAP, 148
 - mappel::Gauss1DMLE, 176
 - mappel::Gauss1DModel, 203
 - mappel::Gauss1DsMAP, 231
 - mappel::Gauss1DsMLE, 260
 - mappel::Gauss1DsModel, 288
 - mappel::Gauss2DMAP, 316
 - mappel::Gauss2DMLE, 346
 - mappel::Gauss2DModel, 376
 - mappel::Gauss2DsMAP, 408
 - mappel::Gauss2DsMLE, 440
 - mappel::Gauss2DsModel, 471
 - mappel::Gauss2DsxyMAP, 499
 - mappel::MCMCAdaptor1Ds, 631
 - mappel::MCMCAdaptor1D, 613
 - mappel::MCMCAdaptor2Ds, 668
 - mappel::MCMCAdaptor2D, 649
- mappel::MCMCAdaptorBase, 676
- set_min_sigma
 - mappel::Gauss1DsMAP, 232
 - mappel::Gauss1DsMLE, 260
 - mappel::Gauss1DsModel, 288
 - mappel::Gauss2DsMAP, 408
 - mappel::Gauss2DsMLE, 440
 - mappel::Gauss2DsModel, 471
 - mappel::Gauss2DsxyModel, 524
- set_param_names
 - mappel::Gauss1DMAP, 148
 - mappel::Gauss1DMLE, 176
 - mappel::Gauss1DModel, 203
 - mappel::Gauss1DsMAP, 232
 - mappel::Gauss1DsMLE, 260
 - mappel::Gauss1DsModel, 288
 - mappel::Gauss2DMAP, 317
 - mappel::Gauss2DMLE, 347
 - mappel::Gauss2DModel, 376
 - mappel::Gauss2DsMAP, 408
 - mappel::Gauss2DsMLE, 440
 - mappel::Gauss2DsModel, 472
 - mappel::Gauss2DsxyMAP, 499
 - mappel::Gauss2DsxyModel, 524
 - mappel::MAPEstimator, 588
 - mappel::MCMCAdaptor1Ds, 631
 - mappel::MCMCAdaptor1D, 614
 - mappel::MCMCAdaptor2Ds, 668
 - mappel::MCMCAdaptor2D, 649
 - mappel::MLEstimator, 694
 - mappel::PointEmitterModel, 756
- set_prior
 - mappel::Gauss1DMAP, 149
 - mappel::Gauss1DMLE, 177
 - mappel::Gauss1DModel, 203
 - mappel::Gauss1DsMAP, 232
 - mappel::Gauss1DsMLE, 260
 - mappel::Gauss1DsModel, 288
 - mappel::Gauss2DMAP, 317
 - mappel::Gauss2DMLE, 347
 - mappel::Gauss2DModel, 376
 - mappel::Gauss2DsMAP, 408
 - mappel::Gauss2DsMLE, 440
 - mappel::Gauss2DsModel, 472
 - mappel::Gauss2DsxyMAP, 499
 - mappel::Gauss2DsxyModel, 524
 - mappel::MAPEstimator, 588
 - mappel::MCMCAdaptor1Ds, 632
 - mappel::MCMCAdaptor1D, 614
 - mappel::MCMCAdaptor2Ds, 668
 - mappel::MCMCAdaptor2D, 650
 - mappel::MLEstimator, 694
 - mappel::PointEmitterModel, 757
- set_psf_sigma

- mappel::Gauss1DMap, 149
- mappel::Gauss1DMLE, 177
- mappel::Gauss1DModel, 204
- mappel::Gauss2DMap, 317
- mappel::Gauss2DMLE, 347
- mappel::Gauss2DModel, 376
- mappel::Gauss2DsxyMap, 500
- set_rng_seed
 - mappel::Gauss1DMap, 149
 - mappel::Gauss1DMLE, 177
 - mappel::Gauss1DModel, 204
 - mappel::Gauss1DsMap, 232
 - mappel::Gauss1DsMLE, 260
 - mappel::Gauss1DsModel, 288
 - mappel::Gauss2DMap, 317
 - mappel::Gauss2DMLE, 347
 - mappel::Gauss2DModel, 377
 - mappel::Gauss2DsMap, 408
 - mappel::Gauss2DsMLE, 441
 - mappel::Gauss2DsModel, 472
 - mappel::Gauss2DsxyMap, 500
 - mappel::Gauss2DsxyModel, 524
 - mappel::MAPEstimator, 588
 - mappel::MCMCAdaptor1Ds, 632
 - mappel::MCMCAdaptor1D, 614
 - mappel::MCMCAdaptor2Ds, 669
 - mappel::MCMCAdaptor2D, 650
 - mappel::MLEstimator, 694
 - mappel::PointEmitterModel, 757
- set_size
 - mappel::Gauss1DMap, 149
 - mappel::Gauss1DMLE, 177
 - mappel::Gauss1DModel, 204
 - mappel::Gauss1DsMap, 232, 233
 - mappel::Gauss1DsMLE, 261
 - mappel::Gauss1DsModel, 289
 - mappel::Gauss2DMap, 317
 - mappel::Gauss2DMLE, 347
 - mappel::Gauss2DModel, 377
 - mappel::Gauss2DsMap, 408
 - mappel::Gauss2DsMLE, 441
 - mappel::Gauss2DsModel, 472
 - mappel::Gauss2DsxyMap, 500
 - mappel::Gauss2DsxyModel, 524
 - mappel::ImageFormat1DBase, 548
 - mappel::ImageFormat2DBase, 555
 - mappel::PoissonNoise1DObjective, 768
 - mappel::PoissonNoise2DObjective, 775
- set_stencil
 - mappel::estimator::IterativeMaximizer::Maximizer↔
Data, 597
- set_ubound
 - mappel::Gauss1DMap, 150
 - mappel::Gauss1DMLE, 178
- mappel::Gauss1DModel, 204
- mappel::Gauss1DsMap, 233
- mappel::Gauss1DsMLE, 261
- mappel::Gauss1DsModel, 289
- mappel::Gauss2DMap, 317
- mappel::Gauss2DMLE, 347
- mappel::Gauss2DModel, 377
- mappel::Gauss2DsMap, 409
- mappel::Gauss2DsMLE, 441
- mappel::Gauss2DsModel, 472
- mappel::Gauss2DsxyMap, 500
- mappel::Gauss2DsxyModel, 525
- mappel::MAPEstimator, 588
- mappel::MCMCAdaptor1Ds, 632
- mappel::MCMCAdaptor1D, 614
- mappel::MCMCAdaptor2Ds, 669
- mappel::MCMCAdaptor2D, 650
- mappel::MLEstimator, 694
- mappel::PointEmitterModel, 757
- setGlobalDefaultStrategy
 - omp_exception_catcher::impl_::OMPEXception↔
Catcher, 744
- sgn
 - mappel, 44
- sigma
 - mappel::Gauss1DsModel::Stencil, 824
- sigma_ratio
 - mappel::Gauss2DsModel::Stencil, 833
- sigma_scale
 - mappel::Gauss1DMap, 155
 - mappel::Gauss1DMLE, 183
 - mappel::Gauss1DModel, 210
 - mappel::Gauss1DsMap, 238
 - mappel::Gauss1DsMLE, 267
 - mappel::Gauss1DsModel, 294
 - mappel::Gauss2DMap, 324
 - mappel::Gauss2DMLE, 354
 - mappel::Gauss2DModel, 383
 - mappel::Gauss2DsMap, 415
 - mappel::Gauss2DsMLE, 447
 - mappel::Gauss2DsModel, 478
 - mappel::Gauss2DsxyMap, 506
 - mappel::MCMCAdaptor1Ds, 636
 - mappel::MCMCAdaptor1D, 618
 - mappel::MCMCAdaptor2Ds, 673
 - mappel::MCMCAdaptor2D, 654
 - mappel::MCMCAdaptorBase, 677
- sigmaX
 - mappel::Gauss2DsModel::Stencil, 833
 - mappel::Gauss2DsxyModel::Stencil, 819
- sigmaY
 - mappel::Gauss2DsModel::Stencil, 833
 - mappel::Gauss2DsxyModel::Stencil, 819
- simulate_image

- mappel::methods, 64–66
 - PoissonGaussianNoise2DObjective.h, 932
- simulate_image_from_model
 - mappel::methods, 66
- simulate_image_stack
 - mappel::methods::openmp, 89
- SimulatedAnnealingMaximizer
 - mappel::estimator::SimulatedAnnealingMaximizer, 807
- size
 - mappel::Gauss1DModel, 155
 - mappel::Gauss1DModel, 183
 - mappel::Gauss1DModel, 210
 - mappel::Gauss1DsMAP, 239
 - mappel::Gauss1DsMLE, 267
 - mappel::Gauss1DsModel, 294
 - mappel::Gauss2DModel, 324
 - mappel::Gauss2DModel, 354
 - mappel::Gauss2DModel, 383
 - mappel::Gauss2DsMAP, 415
 - mappel::Gauss2DsMLE, 447
 - mappel::Gauss2DsModel, 479
 - mappel::Gauss2DsxyMAP, 506
 - mappel::Gauss2DsxyModel, 529
 - mappel::ImageFormat1DBase, 548
 - mappel::ImageFormat2DBase, 555
 - mappel::PoissonNoise1DObjective, 769
 - mappel::PoissonNoise2DObjective, 776
- solve_TR_subproblem
 - mappel::estimator::subroutine, 53
- solve_profile_bound
 - mappel::estimator::IterativeMaximizer, 572
 - mappel::estimator::NewtonDiagonalMaximizer, 715
 - mappel::estimator::NewtonMaximizer, 736
 - mappel::estimator::QuasiNewtonMaximizer, 800
 - mappel::estimator::TrustRegionMaximizer, 870
- solve_profile_initial_step
 - mappel::estimator::subroutine, 53
- solve_restricted_step_length_newton
 - mappel::estimator::subroutine, 53
- square
 - mappel, 44
- StatsT
 - mappel, 28
- Stencil
 - mappel::Gauss1DModel::Stencil, 838
 - mappel::Gauss1DsModel::Stencil, 823
 - mappel::Gauss2DModel::Stencil, 827
 - mappel::Gauss2DsModel::Stencil, 832
 - mappel::Gauss2DsxyModel::Stencil, 819
- stencil
 - mappel::estimator::IterativeMaximizer::Maximizer↔Data, 597
- stencil.cpp, 939
- stencil.h, 940
- StencilVecT
 - mappel, 29
 - mappel::Gauss1DModel, 134
 - mappel::Gauss1DModel, 162
 - mappel::Gauss1DModel, 190
 - mappel::Gauss1DsMAP, 217
 - mappel::Gauss1DsMLE, 245
 - mappel::Gauss1DsModel, 274
 - mappel::Gauss2DModel, 302
 - mappel::Gauss2DModel, 332
 - mappel::Gauss2DModel, 361
 - mappel::Gauss2DsMAP, 391
 - mappel::Gauss2DsMLE, 423
 - mappel::Gauss2DsModel, 455
 - mappel::Gauss2DsxyMAP, 486
 - mappel::Gauss2DsxyModel, 512
- StencilT
 - mappel, 28
- step
 - mappel::estimator::IterativeMaximizer::Maximizer↔Data, 601
- StepSize
 - mappel::estimator, 50
- Strategy
 - omp_exception_catcher, 91
- StringVecT
 - mappel, 29
- Success
 - mappel::estimator, 50
- TERM_BLACK
 - mappel, 45
- TERM_BLUE
 - mappel, 45
- TERM_CYAN
 - mappel, 45
- TERM_DIM_BLACK
 - mappel, 45
- TERM_DIM_BLUE
 - mappel, 45
- TERM_DIM_CYAN
 - mappel, 45
- TERM_DIM_GREEN
 - mappel, 46
- TERM_DIM_MAGENTA
 - mappel, 46
- TERM_DIM_RED
 - mappel, 46
- TERM_DIM_WHITE
 - mappel, 46
- TERM_DIM_YELLOW
 - mappel, 46
- TERM_GREEN

- mappel, 46
- TERM_MAGENTA
 - mappel, 46
- TERM_RED
 - mappel, 46
- TERM_WHITE
 - mappel, 47
- TERM_YELLOW
 - mappel, 47
- target_rllh_delta
 - mappel::estimator::ProfileBoundsData, 780
 - mappel::estimator::ProfileBoundsDataStack, 783
- theta
 - mappel::Gauss1DModel::Stencil, 840
 - mappel::Gauss1DsModel::Stencil, 826
 - mappel::Gauss2DModel::Stencil, 830
 - mappel::Gauss2DsModel::Stencil, 836
 - mappel::Gauss2DsxyModel::Stencil, 822
 - mappel::estimator::IterativeMaximizer::Maximizer←Data, 598
- theta_in_bounds
 - mappel::Gauss1DModel, 150
 - mappel::Gauss1DModel, 178
 - mappel::Gauss1DModel, 204
 - mappel::Gauss1DsModel, 233
 - mappel::Gauss1DsModel, 261
 - mappel::Gauss1DsModel, 289
 - mappel::Gauss2DModel, 318
 - mappel::Gauss2DModel, 348
 - mappel::Gauss2DModel, 377
 - mappel::Gauss2DsModel, 409
 - mappel::Gauss2DsModel, 441
 - mappel::Gauss2DsModel, 472
 - mappel::Gauss2DsxyModel, 500
 - mappel::Gauss2DsxyModel, 525
 - mappel::MAPEstimator, 588
 - mappel::MCMCAdaptor1Ds, 632
 - mappel::MCMCAdaptor1Ds, 614
 - mappel::MCMCAdaptor2Ds, 669
 - mappel::MCMCAdaptor2D, 650
 - mappel::MLEstimator, 694
 - mappel::PointEmitterModel, 757
- theta_seq
 - mappel::estimator::IterativeMaximizer::Maximizer←Data, 601
- theta_stack_in_bounds
 - mappel::Gauss1DModel, 150
 - mappel::Gauss1DModel, 178
 - mappel::Gauss1DModel, 205
 - mappel::Gauss1DsModel, 233
 - mappel::Gauss1DsModel, 261
 - mappel::Gauss1DsModel, 289
 - mappel::Gauss2DModel, 318
 - mappel::Gauss2DModel, 348
- mappel::Gauss2DModel, 377
- mappel::Gauss2DsModel, 409
- mappel::Gauss2DsModel, 441
- mappel::Gauss2DsModel, 473
- mappel::Gauss2DsxyModel, 501
- mappel::Gauss2DsxyModel, 525
- mappel::MAPEstimator, 589
- mappel::MCMCAdaptor1Ds, 632
- mappel::MCMCAdaptor1D, 615
- mappel::MCMCAdaptor2Ds, 669
- mappel::MCMCAdaptor2D, 650
- mappel::MLEstimator, 695
- mappel::PointEmitterModel, 757
- thin
 - mappel::mcmc::MCMCData, 679
 - mappel::mcmc::MCMCDataStack, 681
- thin_sample
 - mappel::mcmc, 55
- ThreadedEstimator
 - mappel::estimator::ThreadedEstimator, 842
- total_backtracks
 - mappel::estimator::IterativeMaximizer, 575
 - mappel::estimator::NewtonDiagonalMaximizer, 719
 - mappel::estimator::NewtonMaximizer, 740
 - mappel::estimator::QuasiNewtonMaximizer, 804
 - mappel::estimator::TrustRegionMaximizer, 875
- total_der_evals
 - mappel::estimator::IterativeMaximizer, 576
 - mappel::estimator::NewtonDiagonalMaximizer, 719
 - mappel::estimator::NewtonMaximizer, 740
 - mappel::estimator::QuasiNewtonMaximizer, 804
 - mappel::estimator::TrustRegionMaximizer, 875
- total_fun_evals
 - mappel::estimator::IterativeMaximizer, 576
 - mappel::estimator::NewtonDiagonalMaximizer, 719
 - mappel::estimator::NewtonMaximizer, 740
 - mappel::estimator::QuasiNewtonMaximizer, 804
 - mappel::estimator::TrustRegionMaximizer, 875
- total_iterations
 - mappel::estimator::IterativeMaximizer, 576
 - mappel::estimator::NewtonDiagonalMaximizer, 719
 - mappel::estimator::NewtonMaximizer, 740
 - mappel::estimator::QuasiNewtonMaximizer, 804
 - mappel::estimator::TrustRegionMaximizer, 875
- total_walltime
 - mappel::estimator::CGaussHeuristicEstimator, 104
 - mappel::estimator::CGaussMLE, 117
 - mappel::estimator::Estimator, 128
 - mappel::estimator::HeuristicEstimator, 542
 - mappel::estimator::IterativeMaximizer, 576
 - mappel::estimator::NewtonDiagonalMaximizer, 720
 - mappel::estimator::NewtonMaximizer, 741
 - mappel::estimator::QuasiNewtonMaximizer, 805

- mappel::estimator::SimulatedAnnealingMaximizer, 817
- mappel::estimator::ThreadedEstimator, 853
- mappel::estimator::TrustRegionMaximizer, 875
- trust_radius_decrease
 - mappel::estimator::TrustRegionMaximizer, 875
- trust_radius_decrease_min
 - mappel::estimator::TrustRegionMaximizer, 876
- trust_radius_increase
 - mappel::estimator::TrustRegionMaximizer, 876
- TrustRegionMaximizer
 - mappel::estimator::TrustRegionMaximizer, 857
- TrustRegionRadius
 - mappel::estimator, 50
- ubound
 - mappel::Gauss1DModel, 156
 - mappel::Gauss1DModel, 184
 - mappel::Gauss1DModel, 210
 - mappel::Gauss1DsModel, 239
 - mappel::Gauss1DsModel, 267
 - mappel::Gauss1DsModel, 295
 - mappel::Gauss2DModel, 324
 - mappel::Gauss2DModel, 354
 - mappel::Gauss2DModel, 383
 - mappel::Gauss2DsModel, 416
 - mappel::Gauss2DsModel, 448
 - mappel::Gauss2DsModel, 479
 - mappel::Gauss2DsModel, 506
 - mappel::Gauss2DsModel, 530
 - mappel::MAPEstimator, 591
 - mappel::MCMCAdaptor1D, 637
 - mappel::MCMCAdaptor1D, 619
 - mappel::MCMCAdaptor2D, 674
 - mappel::MCMCAdaptor2D, 655
 - mappel::MLEstimator, 697
 - mappel::PointEmitterModel, 760
- Unassigned
 - mappel::estimator, 50
- UniformDistT
 - mappel, 29
- update_internal_1D_estimators
 - mappel::Gauss2DsModel, 525
- update_internal_1Dsum_estimators
 - mappel::Gauss2DModel, 318
 - mappel::Gauss2DModel, 348
 - mappel::Gauss2DModel, 377
 - mappel::Gauss2DsModel, 409
 - mappel::Gauss2DsModel, 441
 - mappel::Gauss2DsModel, 473
- util.cpp, 941
- util.h, 942
- VecFieldT
 - mappel, 29
- VecT
 - mappel, 29
- X
 - mappel::Gauss1DModel::Stencil, 840
 - mappel::Gauss1DsModel::Stencil, 826
 - mappel::Gauss2DModel::Stencil, 830
 - mappel::Gauss2DsModel::Stencil, 836
 - mappel::Gauss2DsxyModel::Stencil, 822
- x
 - mappel::Gauss1DModel::Stencil, 838
 - mappel::Gauss1DsModel::Stencil, 824
 - mappel::Gauss2DModel::Stencil, 828
 - mappel::Gauss2DsModel::Stencil, 833
 - mappel::Gauss2DsxyModel::Stencil, 819
- x_model
 - mappel::Gauss2DModel, 325
 - mappel::Gauss2DModel, 355
 - mappel::Gauss2DModel, 384
 - mappel::Gauss2DsModel, 416
 - mappel::Gauss2DsModel, 448
 - mappel::Gauss2DsModel, 479
 - mappel::Gauss2DsxyModel, 530
- Y
 - mappel::Gauss2DModel::Stencil, 830
 - mappel::Gauss2DsModel::Stencil, 836
 - mappel::Gauss2DsxyModel::Stencil, 822
- y
 - mappel::Gauss2DModel::Stencil, 828
 - mappel::Gauss2DsModel::Stencil, 833
 - mappel::Gauss2DsxyModel::Stencil, 820
- y_model
 - mappel::Gauss2DModel, 325
 - mappel::Gauss2DModel, 355
 - mappel::Gauss2DModel, 384
 - mappel::Gauss2DsModel, 416
 - mappel::Gauss2DsModel, 448
 - mappel::Gauss2DsModel, 480
 - mappel::Gauss2DsxyModel, 530