

Parallel RNG Manager

Generated by Doxygen 1.8.11

Contents

1	Main Page	2
2	Namespace Index	5
2.1	Namespace List	5
3	Hierarchical Index	5
3.1	Class Hierarchy	5
4	Class Index	5
4.1	Class List	5
5	File Index	6
5.1	File List	6
6	Namespace Documentation	6
6.1	parallel_rng Namespace Reference	6
6.1.1	Typedef Documentation	6
6.1.2	Function Documentation	7
7	Class Documentation	7
7.1	parallel_rng::ParallelRngManager< RngT, FloatT > Class Template Reference	7
7.1.1	Detailed Description	8
7.1.2	Member Typedef Documentation	8
7.1.3	Constructor & Destructor Documentation	9
7.1.4	Member Function Documentation	9
7.2	parallel_rng::ParallelRngManagerError Class Reference	14
7.2.1	Detailed Description	15
7.2.2	Constructor & Destructor Documentation	15
7.2.3	Member Function Documentation	15
7.2.4	Member Data Documentation	15

8 File Documentation	15
8.1 ParallelRngManager.cpp File Reference	15
8.1.1 Detailed Description	16
8.2 ParallelRngManager.h File Reference	16
8.2.1 Detailed Description	18
8.2.2 Macro Definition Documentation	18
8.3 README.md File Reference	18
Index	19

1 Main Page

Parallel RNG Manager

The `ParallelRngManager` class simplifies the task of initializing and coordinating random number generation for multiple threads in OpenMP and other multi-threaded programming environments without the need for locks or the possibility of false sharing. A single integer value is used to seed a single random number generator that is partitioned into independent parallel random number generator streams.

Using a single random number generator seed makes deterministic testing and debugging of parallel stochastic algorithms practical. Additionally it is important to use a random number generator specifically designed for parallel use, as it is not in general safe to use independent random seeds for each processor if strong randomness properties and guaranteed a-correlation of the streams are arithmetically important considerations.

More generally, a *parallel random number generator* (PRNG) provides a set of N random number generator streams for multi-threaded applications, where each stream is produced from a single underlying random number generator with a single global seed. For certain classes of random number generators, a single stream can efficiently be partitioned into N threads without communication overhead. The `parallel_rng::ParallelRngManager` class functions as an OpenMP-aware manager for the PRNGs from the *Tina's Random Number Generator (TRNG) Library*.

Features

- `ParallelRngManager` is CMake based, and provides `ParallelRngManagerConfig.cmake` files allowing `find_package(ParallelRngManager)` to find the package in either the build or install trees.
- `ParallelRngManager` can automatically configure and install TRNG and alongside itself if it does not exist on the system.
- `ParallelRngManager` is designed to work seamlessly with OpenMP. It automatically manages the number of RNG streams based on hardware concurrency and prevents false sharing.
- A `ParallelRngManager` object manages a single stream and uses OpenMP `get_num_threads()` to allocate the correct number of sub-streams, which are kept on separate cache lines using `aligned_array::AlignedArray<RngT>`.

Documentation

The ParallelRngManager Doxygen documentation can be build with the `OPT_DOC` CMake option and is also available on online:

- [ParallelRngManager HTML Manual](#)
- [ParallelRngManager PDF Manual](#)
- [ParallelRngManager github repository](#)

Installation

The easiest method is to use the default build script, which can be easily customized. The default build directory is `./_build` and the default install directory is `./_install`.

```
$ git clone https://github.com/markjolah/ParallelRngManager.git
$ cd ParallelRngManager
$ ./build.sh
```

If TRNG is not available on the system, it is important to have `CMAKE_INSTALL_PREFIX` set to a valid install directory, even if it is just a local directory, as the autotools build is designed to install into the `CMAKE_INSTALL_PREFIX` and ParallelRngManager is then expecting to find the TRNG library there.

CMake options

The following CMake options control the build.

- `BUILD_SHARED_LIBS` - Build shared libraries
- `BUILD_STATIC_LIBS` - Build static libraries
- `BUILD_TESTING` - Build testing framework
- `OPT_DOC` - Build documentation
- `OPT_INSTALL_TESTING` - Install testing executables in install-tree.
- `OPT_EXPORT_BUILD_TREE` - Configure the package so it is usable from the build tree. Useful for development.
- `OPT_ARMADILLO_INT64` - Use 64-bit integers for Armadillo, BLAS, and LAPACK.

Dependencies

ParallelRngManager is designed to be portable, but relies on several system development and numerical libraries. Currently Travis CI uses the *trusty* image to test ParallelRngManager Standard system dependencies

- `*>=g++-4.9* - A --std=c++11 compliant GCC compiler`
- `*>=CMake-3.9*`
- *OpenMP*
- *Armadillo* - A high-performance array library for C++.
- *googletest* - Required for testing (`BUILD_TESTING=On`)
- *Doxygen* - Required to generate documentation (`OPT_DOC=On`)
 - *graphviz* - Required to generate documentation (`make doc`)
 - *LAPACK* - Required for generate pdf documentenation (`make pdf`)

Tina's Random Number Generator (TRNG)

The ParallelRngManager is a lightweight wrapper around the *Tina's Random Number Generator (TRNG)* library. This rather specialized numerical library is normally not available on most Linux distributions, so for convenience the ParallelRngManager CMake build system will automatically download, configure, build, and install TRNG (`libtrng4.so`) into the `CMAKE_INSTALL_PREFIX` path if it is not already present on the build system. This process uses the `AddExternalAutotoolsDependency.cmake` function from the *UncommonCMakeModules* dependency.

- *TRNG Manual*
- *H. Bauke and S. Mertens. Random Numbers for Large Scale Distributed Monte Carlo Simulations.*

Other dependencies

ParallelRngManager uses these reusable header-only component libraries via `git subrepo`

- *AlignedArray* - Provides `aligned_array::AArray<T>` which is an STL conforming fixed-length array container which guarantees no two elements share a cache line, preventing false sharing in multi-threaded or OpenMP programs. ParallelRngManager stores RNG streams in an `AArray<RngT>` array to prevent false sharing.
- *AnyRng* - Provides `any_rng::AnyRng<result_type>` which is a type-erased STL random number generator type.
- *UncommonCMakeModules* - Provides `FindTRNG.cmake` `FindArmadillo.cmake` and other useful CMake functions like `ExportPackageWizzard.cmake`. ParallelRngManager only uses a small portion of these CMake modules but using a `git subrepo` pulls in the entire repository.

Testing

ParallelRngManager uses `googletest` for C++ unit testing and integrates with CTest. To build tests, enable the `BUILD_TESTING` CMake option and possibly also the `OPT_INSTALL_TESTING` option to install tests along with ParallelRngManager.

Tests can be run with:

```
> make test
```

2 Namespace Index

2.1 Namespace List

Here is a list of all namespaces with brief descriptions:

parallel_rng	6
------------------------------	---

3 Hierarchical Index

3.1 Class Hierarchy

This inheritance list is sorted roughly, but not completely, alphabetically:

<code>std::exception</code>	
parallel_rng::ParallelRngManagerError	14
parallel_rng::ParallelRngManager< RngT, FloatT >	7

4 Class Index

4.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

parallel_rng::ParallelRngManager< RngT, FloatT >	7
parallel_rng::ParallelRngManagerError	14

5 File Index

5.1 File List

Here is a list of all files with brief descriptions:

ParallelRngManager.cpp	
Fast auto rng for parallel openmp code	15
ParallelRngManager.h	
Adapts TRNG parallel RNG to armadillo, maintaining a per-thread RNG	16

6 Namespace Documentation

6.1 parallel_rng Namespace Reference

Classes

- class [ParallelRngManager](#)
- class [ParallelRngManagerError](#)

Typedefs

- using [DefaultParallelRngT](#) = trng::lcg64_shift
Suggested default ParallelRNG type.
- using [SeedT](#) = uint64_t
Use the true random interface to generate a truly random seed.
- using [IdxT](#) = arma::uword

Functions

- [SeedT generate_seed \(\)](#)
- [IdxT openmp_estimate_max_threads \(\)](#)
Use openmp to estimate the maximum number of threads that will be generated.
- template<class RngT = DefaultParallelRngT, class FloatT = double>
[ParallelRngManager](#)< RngT, FloatT > [make_parallel_rng_manager \(\)](#)
- template<class RngT = DefaultParallelRngT, class FloatT = double>
[ParallelRngManager](#)< RngT, FloatT > [make_parallel_rng_manager \(SeedT seed\)](#)

6.1.1 Typedef Documentation

6.1.1.1 using parallel_rng::DefaultParallelRngT = typedef trng::lcg64_shift

Suggested default ParallelRNG type.

lcg64_shift is one of the fastest ParallelRNG types with shifting to correct for poor lower order bit randomness in regular lcg64

Definition at line 58 of file ParallelRngManager.h.

6.1.1.2 using parallel_rng::IdxT = typedef arma::uword

Definition at line 72 of file ParallelRngManager.h.

6.1.1.3 using parallel_rng::SeedT = typedef uint64_t

Use the true random interface to generate a truly random seed.

Definition at line 71 of file ParallelRngManager.h.

6.1.2 Function Documentation

6.1.2.1 SeedT parallel_rng::generate_seed ()

Definition at line 14 of file ParallelRngManager.cpp.

6.1.2.2 template<class RngT = DefaultParallelRngT, class FloatT = double> ParallelRngManager<RngT,FloatT> parallel_rng::make_parallel_rng_manager ()

Definition at line 143 of file ParallelRngManager.h.

6.1.2.3 template<class RngT = DefaultParallelRngT, class FloatT = double> ParallelRngManager<RngT,FloatT> parallel_rng::make_parallel_rng_manager (SeedT seed)

Definition at line 149 of file ParallelRngManager.h.

6.1.2.4 IdxT parallel_rng::openmp_estimate_max_threads ()

Use openmp to estimate the maximum number of threads that will be generated.

Definition at line 20 of file ParallelRngManager.cpp.

7 Class Documentation

7.1 parallel_rng::ParallelRngManager< RngT, FloatT > Class Template Reference

```
#include </home/travis/build/markjolah/ParallelRngManager/include/ParallelRngManager/ParallelRngManager.h>
```

Public Types

- using [VecT](#) = arma::Col< FloatT >
- using [MatT](#) = arma::Mat< FloatT >
- using [NormalDistT](#) = std::normal_distribution< FloatT >
- using [UniformDistT](#) = std::uniform_real_distribution< FloatT >
- using [result_type](#) = typename RngT::result_type

Public Member Functions

- [ParallelRngManager \(\)](#)
- [ParallelRngManager \(SeedT seed\)](#)
- [ParallelRngManager \(SeedT seed, IdxT max_threads\)](#)
- void [seed](#) ([SeedT](#) seed)
- void [reset](#) ()
- void [reset](#) ([SeedT](#) seed)
- void [reset](#) ([SeedT](#) seed, [IdxT](#) max_threads)
- [SeedT](#) [get_init_seed](#) () const
- [SeedT](#) [get_num_threads](#) () const
- [RngT](#) & [generator](#) ()
- [any_rng::AnyRng](#)< [result_type](#) > [generic_generator](#) ()
- [result_type](#) [operator](#)() ()
- [FloatT](#) [randu](#) ()
- [FloatT](#) [randn](#) ()
- [VecT](#) [randu](#) ([IdxT](#) N)
- [VecT](#) [randn](#) ([IdxT](#) N)
- [MatT](#) [randu](#) ([IdxT](#) rows, [IdxT](#) cols)
- [MatT](#) [randn](#) ([IdxT](#) rows, [IdxT](#) cols)
- [template](#)<[class](#) [Weights](#) = [VecT](#), [class](#) [IdxT](#) = [IdxT](#)>
[IdxT](#) [resample_dist](#) (const [Weights](#) &weights)
- [template](#)<[class](#) [Weights](#) = [VecT](#), [class](#) [IdxT](#) = [IdxT](#)>
[arma::Col](#)< [IdxT](#) > [resample_dist](#) (const [Weights](#) &weights, [IdxT](#) N)

7.1.1 Detailed Description

```
template<class RngT = DefaultParallelRngT, class FloatT = double>
class parallel_rng::ParallelRngManager< RngT, FloatT >
```

Definition at line 80 of file `ParallelRngManager.h`.

7.1.2 Member Typedef Documentation

7.1.2.1 `template<class RngT = DefaultParallelRngT, class FloatT = double> using parallel_rng::ParallelRngManager< RngT, FloatT >::MatT = arma::Mat<FloatT>`

Definition at line 84 of file `ParallelRngManager.h`.

7.1.2.2 `template<class RngT = DefaultParallelRngT, class FloatT = double> using parallel_rng::ParallelRngManager< RngT, FloatT >::NormalDistT = std::normal_distribution<FloatT>`

Definition at line 85 of file `ParallelRngManager.h`.

7.1.2.3 `template<class RngT = DefaultParallelRngT, class FloatT = double> using parallel_rng::ParallelRngManager< RngT, FloatT >::result_type = typename RngT::result_type`

Definition at line 87 of file `ParallelRngManager.h`.

7.1.2.4 `template<class RngT = DefaultParallelRngT, class FloatT = double> using parallel_rng::ParallelRngManager< RngT, FloatT >::UniformDistT = std::uniform_real_distribution<FloatT>`

Definition at line 86 of file ParallelRngManager.h.

7.1.2.5 `template<class RngT = DefaultParallelRngT, class FloatT = double> using parallel_rng::ParallelRngManager< RngT, FloatT >::VecT = arma::Col<FloatT>`

Definition at line 83 of file ParallelRngManager.h.

7.1.3 Constructor & Destructor Documentation

7.1.3.1 `template<class RngT, class FloatT > parallel_rng::ParallelRngManager< RngT, FloatT >::ParallelRngManager ()`

Definition at line 157 of file ParallelRngManager.h.

7.1.3.2 `template<class RngT, class FloatT > parallel_rng::ParallelRngManager< RngT, FloatT >::ParallelRngManager (SeedT seed)`

Definition at line 162 of file ParallelRngManager.h.

7.1.3.3 `template<class RngT, class FloatT > parallel_rng::ParallelRngManager< RngT, FloatT >::ParallelRngManager (SeedT seed, IdxT max_threads)`

Definition at line 167 of file ParallelRngManager.h.


7.1.4 Member Function Documentation

7.1.4.1 `template<class RngT, class FloatT > RngT & parallel_rng::ParallelRngManager< RngT, FloatT >::generator ()`

Definition at line 235 of file ParallelRngManager.h.

Referenced by `parallel_rng::ParallelRngManager< RngT, FloatT >::operator()()`, and `parallel_rng::ParallelRngManager< RngT, FloatT >::resample_dist()`.

Here is the caller graph for this function:

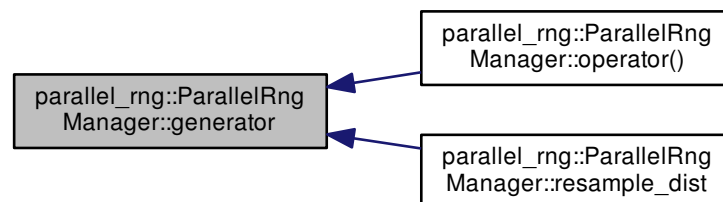

7.1.4.2 `template<class RngT , class FloatT > any_rng::AnyRng< typename ParallelRngManager< RngT, FloatT >::result_type > parallel_rng::ParallelRngManager< RngT, FloatT >::generic_generator ()`

Definition at line 243 of file ParallelRngManager.h.

7.1.4.3 `template<class RngT , class FloatT > SeedT parallel_rng::ParallelRngManager< RngT, FloatT >::get_init_seed () const`

Definition at line 223 of file ParallelRngManager.h.

7.1.4.4 `template<class RngT , class FloatT > SeedT parallel_rng::ParallelRngManager< RngT, FloatT >::get_num_threads () const`

Definition at line 229 of file ParallelRngManager.h.

7.1.4.5 `template<class RngT , class FloatT > ParallelRngManager< RngT, FloatT >::result_type parallel_rng::ParallelRngManager< RngT, FloatT >::operator() ()`

Random 64-bit integer

Definition at line 252 of file ParallelRngManager.h.

References `parallel_rng::ParallelRngManager< RngT, FloatT >::generator()`.

Here is the call graph for this function:



7.1.4.6 `template<class RngT , class FloatT > FloatT parallel_rng::ParallelRngManager< RngT, FloatT >::randn () [inline]`

Random standard normal variate

Definition at line 268 of file ParallelRngManager.h.

7.1.4.7 `template<class RngT , class FloatT > ParallelRngManager< RngT, FloatT >::VecT parallel_rng::ParallelRngManager< RngT, FloatT >::randn (IdxT N)`

Vector of standard normal variate

Definition at line 290 of file ParallelRngManager.h.

7.1.4.8 `template<class RngT , class FloatT > ParallelRngManager< RngT, FloatT >::MatT
parallel_rng::ParallelRngManager< RngT, FloatT >::randn (IdxT rows, IdxT cols)`

Matrix of standard normal variate

Definition at line 316 of file `ParallelRngManager.h`.

7.1.4.9 `template<class RngT , class FloatT > FloatT parallel_rng::ParallelRngManager< RngT, FloatT >::randu ()`

Random `FloatT` uniform on $[0,1)$

Definition at line 259 of file `ParallelRngManager.h`.

7.1.4.10 `template<class RngT , class FloatT > ParallelRngManager< RngT, FloatT >::VecT
parallel_rng::ParallelRngManager< RngT, FloatT >::randu (IdxT N)`

Vector of Random `FloatT` uniform on $[0,1)$

Definition at line 277 of file `ParallelRngManager.h`.

7.1.4.11 `template<class RngT , class FloatT > ParallelRngManager< RngT, FloatT >::MatT
parallel_rng::ParallelRngManager< RngT, FloatT >::randu (IdxT rows, IdxT cols)`

Matrix of Random `FloatT` uniform on $[0,1)$

Definition at line 303 of file `ParallelRngManager.h`.

7.1.4.12 `template<class RngT , class FloatT > template<class Weights , class IdxT > IdxT parallel_↵
_rng::ParallelRngManager< RngT, FloatT >::resample_dist (const Weights & weights
)`

Definition at line 329 of file `ParallelRngManager.h`.

References `parallel_rng::ParallelRngManager< RngT, FloatT >::generator()`.

Here is the call graph for this function:



7.1.4.13 `template<class RngT , class FloatT > template<class Weights , class IdxT > arma::Col< IdxT >
parallel_rng::ParallelRngManager< RngT, FloatT >::resample_dist (const Weights & weights, IdxT N)`

Definition at line 338 of file ParallelRngManager.h.

References `parallel_rng::ParallelRngManager< RngT, FloatT >::generator()`.

Here is the call graph for this function:




7.1.4.14 `template<class RngT , class FloatT > void parallel_rng::ParallelRngManager< RngT, FloatT >::reset ()`

Definition at line 196 of file ParallelRngManager.h.

Referenced by `parallel_rng::ParallelRngManager< RngT, FloatT >::reset()`, and `parallel_rng::ParallelRngManager< RngT, FloatT >::seed()`.

Here is the caller graph for this function:

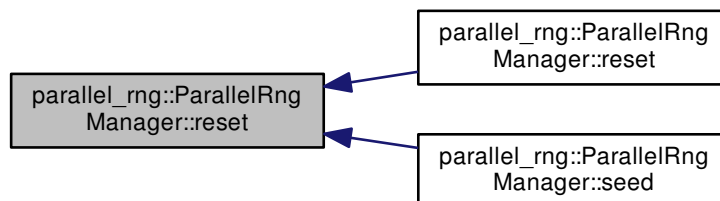

7.1.4.15 `template<class RngT , class FloatT > void parallel_rng::ParallelRngManager< RngT, FloatT >::reset (SeedT seed)`

Definition at line 202 of file ParallelRngManager.h.

References `parallel_rng::ParallelRngManager< RngT, FloatT >::reset()`.

Here is the call graph for this function:



7.1.4.16 `template<class RngT , class FloatT > void parallel_rng::ParallelRngManager< RngT, FloatT >::reset (SeedT seed, IdxT max_threads)`

Definition at line 208 of file ParallelRngManager.h.

7.1.4.17 `template<class RngT , class FloatT > void parallel_rng::ParallelRngManager< RngT, FloatT >::seed (SeedT seed)`

Definition at line 186 of file ParallelRngManager.h.

References `parallel_rng::ParallelRngManager< RngT, FloatT >::reset()`.

Here is the call graph for this function:




The documentation for this class was generated from the following file:

- [ParallelRngManager.h](#)


7.2 parallel_rng::ParallelRngManagerError Class Reference

```
#include </home/travis/build/markjolah/ParallelRngManager/include/ParallelRngManager/ParallelRngManager.h>
```

Inheritance diagram for parallel_rng::ParallelRngManagerError:

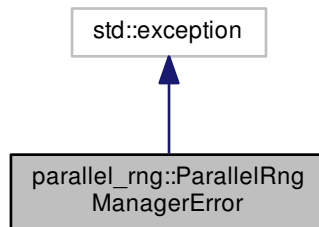

Collaboration diagram for parallel_rng::ParallelRngManagerError:

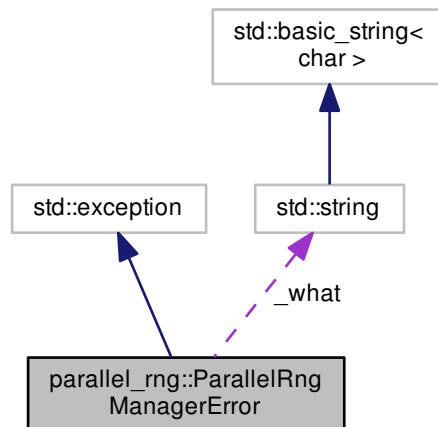

Public Member Functions

- [ParallelRngManagerError](#) (std::string [what](#))
- const char * [what](#) () const noexcept override

Protected Attributes

- `std::string _what`

7.2.1 Detailed Description

Definition at line 60 of file `ParallelRngManager.h`.

7.2.2 Constructor & Destructor Documentation

7.2.2.1 `parallel_rng::ParallelRngManagerError::ParallelRngManagerError (std::string what)` `[inline]`

Definition at line 65 of file `ParallelRngManager.h`.

7.2.3 Member Function Documentation

7.2.3.1 `const char* parallel_rng::ParallelRngManagerError::what () const` `[inline]`, `[override]`, `[noexcept]`

Definition at line 66 of file `ParallelRngManager.h`.

7.2.4 Member Data Documentation

7.2.4.1 `std::string parallel_rng::ParallelRngManagerError::_what` `[protected]`

Definition at line 63 of file `ParallelRngManager.h`.

The documentation for this class was generated from the following file:

- [ParallelRngManager.h](#)


8 File Documentation

8.1 ParallelRngManager.cpp File Reference

Fast auto rng for parallel openmp code.

```
#include <random>
#include <thread>
#include "omp.h"
#include "ParallelRngManager/ParallelRngManager.h"
```

Include dependency graph for `ParallelRngManager.cpp`:

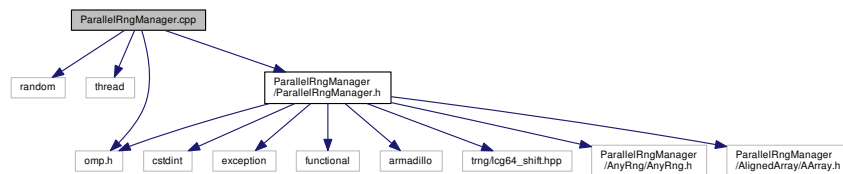

Namespaces

- [parallel_rng](#)

Functions

- SeedT [parallel_rng::generate_seed\(\)](#)
- IdxT [parallel_rng::openmp_estimate_max_threads\(\)](#)
Use openmp to estimate the maximum number of threads that will be generated.

8.1.1 Detailed Description

Fast auto rng for parallel openmp code.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date


2016-2017

8.2 ParallelRngManager.h File Reference


Adapts TRNG parallel RNG to armadillo, maintaining a per-thread RNG.

```
#include <cstdint>
#include <exception>
#include <functional>
#include <omp.h>
#include <armadillo>
#include <trng/lcg64_shift.hpp>
#include "ParallelRngManager/AnyRng/AnyRng.h"
#include "ParallelRngManager/AlignedArray/AArray.h"
```

Include dependency graph for ParallelRngManager.h:

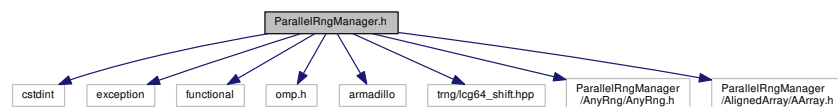

This graph shows which files directly or indirectly include this file:

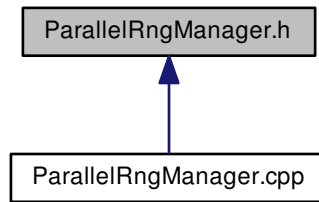

Classes

- class [parallel_rng::ParallelRngManagerError](#)
- class [parallel_rng::ParallelRngManager< RngT, FloatT >](#)

Namespaces

- [parallel_rng](#)

Macros

- `#define` [DEBUG_ASSERT\(...\)](#)
- `#define` [ASSERT_SETUP\(...\)](#)

Typedefs

- using [parallel_rng::DefaultParallelRngT](#) = `trng::lcg64_shift`
Suggested default ParallelRNG type.
- using [parallel_rng::SeedT](#) = `uint64_t`
Use the true random interface to generate a truly random seed.
- using [parallel_rng::IdxT](#) = `arma::uword`

Functions

- SeedT [parallel_rng::generate_seed](#) ()
- IdxT [parallel_rng::openmp_estimate_max_threads](#) ()
Use openmp to estimate the maximum number of threads that will be generated.
- `template<class RngT = DefaultParallelRngT, class FloatT = double>`
`ParallelRngManager< RngT, FloatT >` [parallel_rng::make_parallel_rng_manager](#) ()
- `template<class RngT = DefaultParallelRngT, class FloatT = double>`
`ParallelRngManager< RngT, FloatT >` [parallel_rng::make_parallel_rng_manager](#) (SeedT seed)

8.2.1 Detailed Description

Adapts TRNG parallel RNG to armadillo, maintaining a per-thread RNG.

Author

Mark J. Olah (mjo@cs.unm DOT edu)

Date

2016-2017

8.2.2 Macro Definition Documentation

8.2.2.1 `#define ASSERT_SETUP(...)`

Definition at line 45 of file ParallelRngManager.h.

8.2.2.2 `#define DEBUG_ASSERT(...)`

Definition at line 40 of file ParallelRngManager.h.

8.3 README.md File Reference

Index

- [_what](#)
 - [parallel_rng::ParallelRngManagerError](#), [15](#)
- [ASSERT_SETUP](#)
 - [ParallelRngManager.h](#), [18](#)
- [DEBUG_ASSERT](#)
 - [ParallelRngManager.h](#), [18](#)
- [DefaultParallelRngT](#)
 - [parallel_rng](#), [6](#)
- [generate_seed](#)
 - [parallel_rng](#), [7](#)
- [generator](#)
 - [parallel_rng::ParallelRngManager](#), [9](#)
- [generic_generator](#)
 - [parallel_rng::ParallelRngManager](#), [9](#)
- [get_init_seed](#)
 - [parallel_rng::ParallelRngManager](#), [10](#)
- [get_num_threads](#)
 - [parallel_rng::ParallelRngManager](#), [10](#)
- [IdxT](#)
 - [parallel_rng](#), [6](#)
- [make_parallel_rng_manager](#)
 - [parallel_rng](#), [7](#)
- [MatT](#)
 - [parallel_rng::ParallelRngManager](#), [8](#)
- [NormalDistT](#)
 - [parallel_rng::ParallelRngManager](#), [8](#)
- [openmp_estimate_max_threads](#)
 - [parallel_rng](#), [7](#)
- [operator\(\)](#)
 - [parallel_rng::ParallelRngManager](#), [10](#)
- [parallel_rng](#), [6](#)
 - [DefaultParallelRngT](#), [6](#)
 - [generate_seed](#), [7](#)
 - [IdxT](#), [6](#)
 - [make_parallel_rng_manager](#), [7](#)
 - [openmp_estimate_max_threads](#), [7](#)
 - [SeedT](#), [7](#)
- [parallel_rng::ParallelRngManager](#)
 - [generator](#), [9](#)
 - [generic_generator](#), [9](#)
 - [get_init_seed](#), [10](#)
 - [get_num_threads](#), [10](#)
 - [MatT](#), [8](#)
 - [NormalDistT](#), [8](#)
 - [operator\(\)](#), [10](#)
 - [ParallelRngManager](#), [9](#)
 - [randn](#), [10](#)
 - [randu](#), [11](#)
 - [resample_dist](#), [11](#)
 - [reset](#), [12](#), [13](#)
 - [result_type](#), [8](#)
 - [seed](#), [13](#)
 - [UniformDistT](#), [8](#)
 - [VecT](#), [9](#)
- [parallel_rng::ParallelRngManager< RngT, FloatT >](#), [7](#)
- [parallel_rng::ParallelRngManagerError](#), [14](#)
 - [_what](#), [15](#)
 - [ParallelRngManagerError](#), [15](#)
 - [what](#), [15](#)
- [ParallelRngManager](#)
 - [parallel_rng::ParallelRngManager](#), [9](#)
- [ParallelRngManager.cpp](#), [15](#)
- [ParallelRngManager.h](#), [16](#)
 - [ASSERT_SETUP](#), [18](#)
 - [DEBUG_ASSERT](#), [18](#)
- [ParallelRngManagerError](#)
 - [parallel_rng::ParallelRngManagerError](#), [15](#)
- [README.md](#), [18](#)
- [randn](#)
 - [parallel_rng::ParallelRngManager](#), [10](#)
- [randu](#)
 - [parallel_rng::ParallelRngManager](#), [11](#)
- [resample_dist](#)
 - [parallel_rng::ParallelRngManager](#), [11](#)
- [reset](#)
 - [parallel_rng::ParallelRngManager](#), [12](#), [13](#)
- [result_type](#)
 - [parallel_rng::ParallelRngManager](#), [8](#)
- [seed](#)
 - [parallel_rng::ParallelRngManager](#), [13](#)
- [SeedT](#)
 - [parallel_rng](#), [7](#)
- [UniformDistT](#)
 - [parallel_rng::ParallelRngManager](#), [8](#)
- [VecT](#)
 - [parallel_rng::ParallelRngManager](#), [9](#)
- [what](#)
 - [parallel_rng::ParallelRngManagerError](#), [15](#)