


```
prior_hessian::Composite  
Dist::ComponentDistAdaptor  
< Dist, meta::EnableIfSubclassT  
< Dist, MultivariateDist > >  
::append_params
```

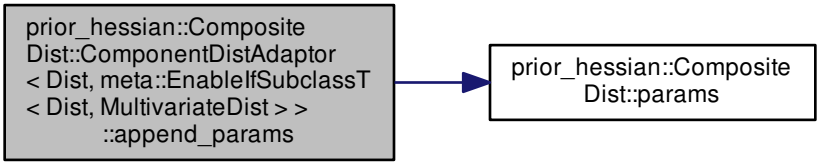

A diagram illustrating a transformation of a C++ template signature. On the left, a gray box contains a complex signature: `prior_hessian::Composite`, `Dist::ComponentDistAdaptor`, `< Dist, meta::EnableIfSubclassT`, `< Dist, MultivariateDist > >`, and `::append_params`. A blue arrow points from this box to a white box on the right. The white box contains a simplified signature: `prior_hessian::Composite` and `Dist::params`.

```
prior_hessian::Composite  
Dist::params
```