TIP-ON BLUMOTION for TANDEMBOX



- The **TIP-ON** mechanical opening support system combined with soft-close **BLUMOTION**
- Four-dimensional front adjustment
- Extensive trigger range
- Synchronised feather-light glide
- Synchronisation for internal cabinet widths LW of 238 mm and wider

Order information

1 Cabinet profiles left/right



Version	TIP-ON BLUMOTION	
Nominal length NL (mm)	Dynamic carrying capacity (kg) 30	65
270	578.2701M	
300	578.3001M	
350	578.3501M	
400	578.4001M	
450	578.4501M	576.4501M
500	578.5001M	576.5001M
550	578.5501M	576.5501M
600	578.6001M	576.6001M
650		576.6501M

6 TIP-ON BLUMOTION set



Nominal length NL (mm)	Unit	Cabinet profile (kg)	Weight (kg)[1]	Part no.
270–300	S0	30	≤ 10	T60B3030
	S1		> 10–20	T60B3130
350–600	L1		≤ 20[2]	T60B3330
	L3		15–30[2]	T60B3530
450–650	L5	65	> 30–65[3]	T60B3560

Consisting of:
- **6a** 1 x **TIP-ON BLUMOTION** unit left/right
- **6b** 1 x **TIP-ON BLUMOTION** latch left/right
- **6e** 2 x **TIP-ON BLUMOTION** synchronisation adapter

[1] Recommended weight ranges (total weight of the pull-out) for an optimum opening and closing function
[2] Can only be combined with a 30 kg cabinet profile
[3] Recommendation: only use in combination with 65 kg cabinet profile

Internal cabinet width LW ≥ 287 mm

6f TIP-ON BLUMOTION synchronisation linkage[1]



Version	Colour	Part no.
Round	Grey	T60.1125W

Cutting **6f** Internal cabinet width LW – 240 mm

[1] In combination with 6e 2 x T60.000D
For cutting to size
Suitable up to internal cabinet width LW 1365 mm
To optimise the function and increase the trigger range, we generally recommend using synchronisation

Internal cabinet width LW 238–286 mm


6g TIP-ON BLUMOTION synchronisation[1]



Version	Colour	Part no.
Square	RAL 7035 light grey	T60.300D

Cutting **6g** Internal cabinet width LW – 214 mm

[1] For cutting to size

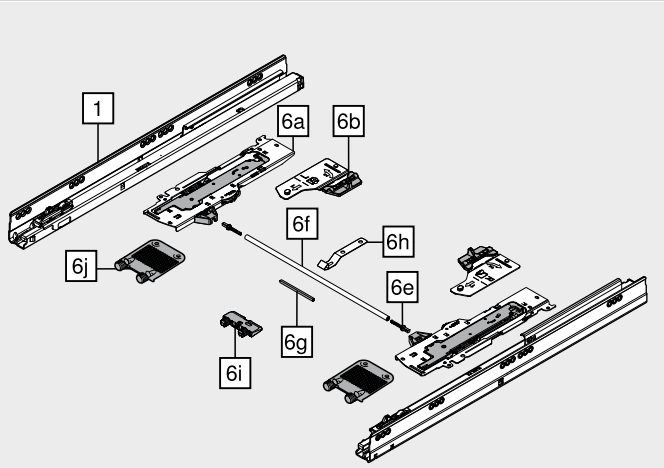

Accessories

6e TIP-ON BLUMOTION synchronisation adapter[1]



Version	Colour		Part no.
Symmetrical	RAL 7035 light grey	2 x	T60.000D

[1] Internal cabinet width LW ≥ 287 mm

6h TIP-ON BLUMOTION synchronisation linkage fixing[1]



Cabinet width KB (mm)	Material	Part no.
≥ 750	Steel	T60B000H

[1] For pull-outs over a cabinet bottom or cross member
Prevents the **TIP-ON BLUMOTION** synchronisation linkage from sagging

6i Base support bracket[1]



Cabinet width KB (mm)	Colour	Part no.
≥ 750	RAL 7037 dust grey	Z96.2011

[1] For pull-outs over a cabinet bottom or cross member
For supporting the pull-out base

6j Front/base stabiliser



Material	Colour		Part no.
Nylon	RAL 7037 dust grey	2 x	Z96.10E1

– Front gap template for MERIVOBOX | TANDEMBOX



Front gap FS (mm)	Colour	Part no.
2.5	Orange	65.5627