Table of Contents

iMotions Lab > iMotions Exports > Export Metrics: Signal Processing (R Notebook)

Export: R Processed GSR Files 2

Confidential © 2023 Redistribution is not permitted without written permission from iMotions

Export: R Processed GSR Files

There are 3 different files you can look to for R-Processed GSR data. The 3 different files fall under the GSR Summary Exports category. Please refer to here (Section: Outputs - Exported files) for how to access the GSR R-processed file from iMotions desktop.

1. GSR Peak Metrics
2. Moment To Moment Statistics
3. GSR Peak Table

1. GSR Peak Metrics


This file has one row for each respondent and each stimulus / scene / scene fragment / annotation / annotation instance within the study. Each row contains information about how many peaks were experienced by this respondent during that stimulus / scene / scene fragment / annotation / annotation instance.

First, what is scene fragment and annotation instance?


For some stimulus type (E.g., WebSite, Screen Recording), it is possible to create a scene with multiple fragments. For all stimulus types, you can create an annotation with multiple instances. A detailed instruction on how to create scene and annotation are *here (scene creation)* and *here (annotation creation)*.

Example: Scene with 3 scene fragments:

Confidential © 2023 Redistribution is not permitted without written permission from iMotions

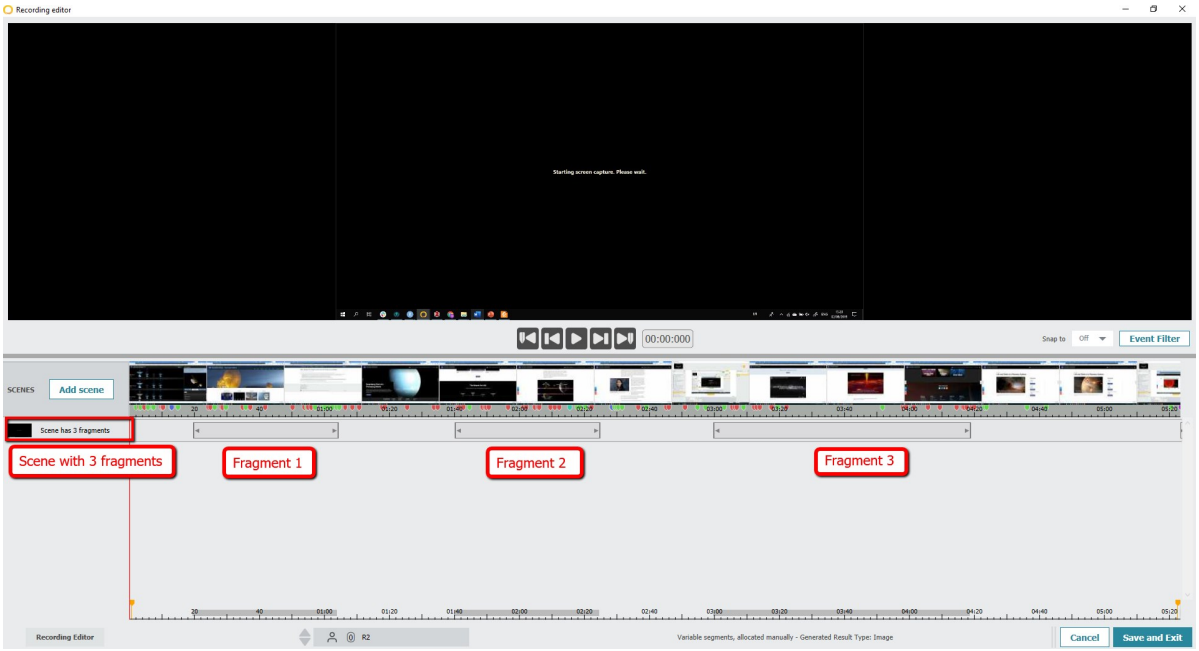

Example: Annotation with 3 annotation instances:

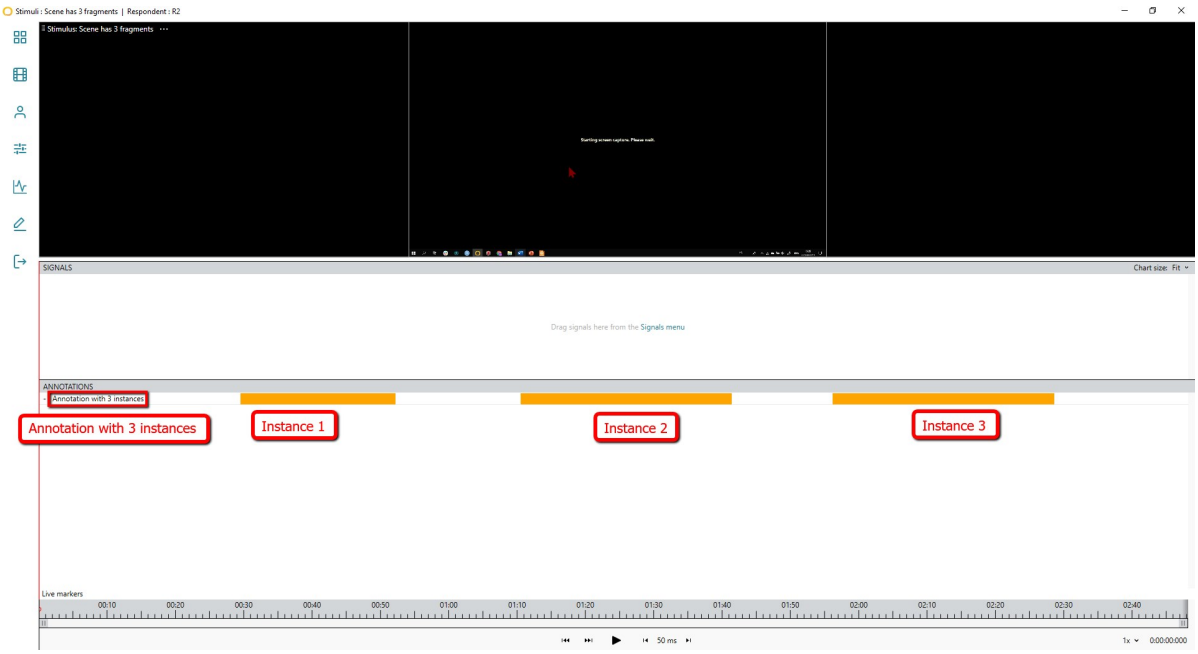

Descriptions on the exported file:

You can find informaiton on the data such as unit, descriptions, which device it was from, information on the algorithms from the METADATA part on the top of the file.

Confidential © 2023 Redistribution is not permitted without written permission from iMotions

Header	Explanation
Study Name	The name of the study
Respondent Name	The respondent who experienced these peaks
Gender	The gender of the respondent who experienced these peaks
Age	The age of the respondent who experienced these peaks
Group	The group variables of the respondent you specified when creating the study
Type	Type of the stimulus during which these GSR peaks were experienced: Stimulus, Scene, Scene (Fragment), Annotation, Annotation (Instance)
Label	The given name of the stimulus, scene and annotation
Start (ms)	The start time (in ms) of the certain stimulus type relative to the start of the study
Duration (ms)	The duration (in ms) of the certain stimulus type
Signal Duration (ms)	The duration (in ms) of the actual recorded signal without gaps (if there are gaps longer than 4 seconds)
Parent Stimulus	The name of the stimulus where the scene was created from; the name of the stimulus/scene where the annotation was created from
Has Peaks	Whether or not the respondent had any peaks (1) or none at all (0) during this certain stimulus type
Peak Count	How many peaks the respondent had during this certain stimulus type
Peaks Per Minute	The number of peaks the respondent had total during this certain stimulus type divided by the Signal Duration (ms), expressed as peaks/min
Average Peak Amplitude (microSiemens)	The average amplitude of detected peaks the respondent had during this certain stimulus type

2. Moment To Moment Statistics

Confidential © 2023 Redistribution is not permitted without written permission from iMotions

The file shows the number of peaks moment by moment during a given stimulus or scene for each respondent. A separate file is created for each stimulus / scene. The information in here is most similar to the graph data shown in the aggregated peak data within iMotions.

Note: The number of peaks moment by moment has been counted by breaking the data into bins with a certain length and overlap. Please refer to *here* for more description on the algorithm. However, the overlap of bins are not shown in the export file.

Header	Explanation
Respondent	Respondent name
Device	Name of the sensor used to collect the GSR data
Flow Name	User-defined name of the algorithm used to compute the GSR peak
First Bin (eg 1[0-5s])	Whether or not a peak occurred for this respondent in this bin (1 for yes, 0 for no)
Next Bin ...	The remaining bins will also be listed with whether or not a peak occurred for this respondent in this bin

3. GSR Peak Table

This file lists every peak that was detected in the entire study, across both stimulus / scenes and respondents. Each row as the information about a single peak. This is useful for aggregation of peak information across groups, stimuli, etc.

You can find informaiton on the data such as unit, descriptions from the METADATA part on the top of the file.

Header	Explanation
Study Name	The name of the study
Respondent Name	The respondent who experienced this peak

Confidential © 2023 Redistribution is not permitted without written permission from iMotions

Respondent Gender	The gender of the respondent who experienced this peak
Respondent Age	The age of the respondent who experienced this peak
Respondent Group	The group variables of the respondent you specified when creating the study
Stimulus Label	Name of the stimulus during which this peak was experienced
Stimulus Start	The start time (in ms) of the certain stimulus type relative to the start of the study
Stimulus Duration	The duration (in ms) of the certain stimulus type
Peak Index	Peak index, counting from the start of the study
Peak Index by Stimulus	Peak index, counting from the start of the stimulus
Peak Onset Time	Onset time of the peak, i.e. the time where the 'Phasic Signal' went above the selected onset threshold (relative to the start of the study)
Peak Time	Time of the peak, i.e. the time where the maximum value of the 'GSR Interpolated' signal was reached (relative to the start of the study)
Peak Offset Time	Offset time of the peak, i.e. the time where the 'Phasic Signal' went below the selected offset threshold (relative to the start of the study)
Peak Amplitude	Amplitude of the peak, i.e. the difference between the maximum value of the 'GSR Interpolated' signal during the peak and its value at the onset.
Device	Name of the sensor used to collect the GSR data
Flow Name	User-defined name of the algorithm used to compute the GSR peak
M2M Bin	Time bin into which each peak fell (relative to stimulus start). Note that, based on the selected length and overlap of bins, a peak may belong to multiple bins
Scene Names (defined by user)	If enabled, indicates when Scene 'Scene Name' was active on its parent stimulus (indicated as number "1")
Annotation Names (defined by user)	If enabled, indicates when Annotation 'Annotation Name' was active (indicated as number "1")

Powered by Document360

Confidential © 2023 Redistribution is not permitted without written permission from iMotions

Confidential © 2023 Redistribution is not permitted without written permission from iMotions