Table of Contents

iMotions Lab > Analysis > Analysis (General)

Scene Editor 2

Confidential © 2023 Redistribution is not permitted without written permission from iMotions

Scene Editor


This Help Center article explains how to use the Scene editor.

The Scene editor is a mini video editing tool, that allows you to create 'image scenes', 'video scenes' and 'website scenes' in preparation of the analysis. 'Video scenes' are a way to isolate a part of a longer video recording ('cutting a scene'), while 'Image scenes' and 'website scenes' are an alternative method for gaze mapping onto, respectively, an image (image scenes) or full page screen capture (website scenes) (see also: Gaze mapping).

About the Scene editor

The Scene editor is a available at the Study level of the iMotions software, and can be accessed in two different ways; from the Recorded data page in the Respondent menu, or by selecting a stimulus in the Stimulus bar (i.e., images, videos, websites). The advantage of the latter, is that the Scene editor can already be accessed *before* the start of the data collection, while the former way of accessing the Scene editor only becomes available as soon as you have recorded (or post-imported) data *for at least one respondent*

If you wish to access the Scene editor for a given stimulus (because you have not yet collected data), this is done in the following way.

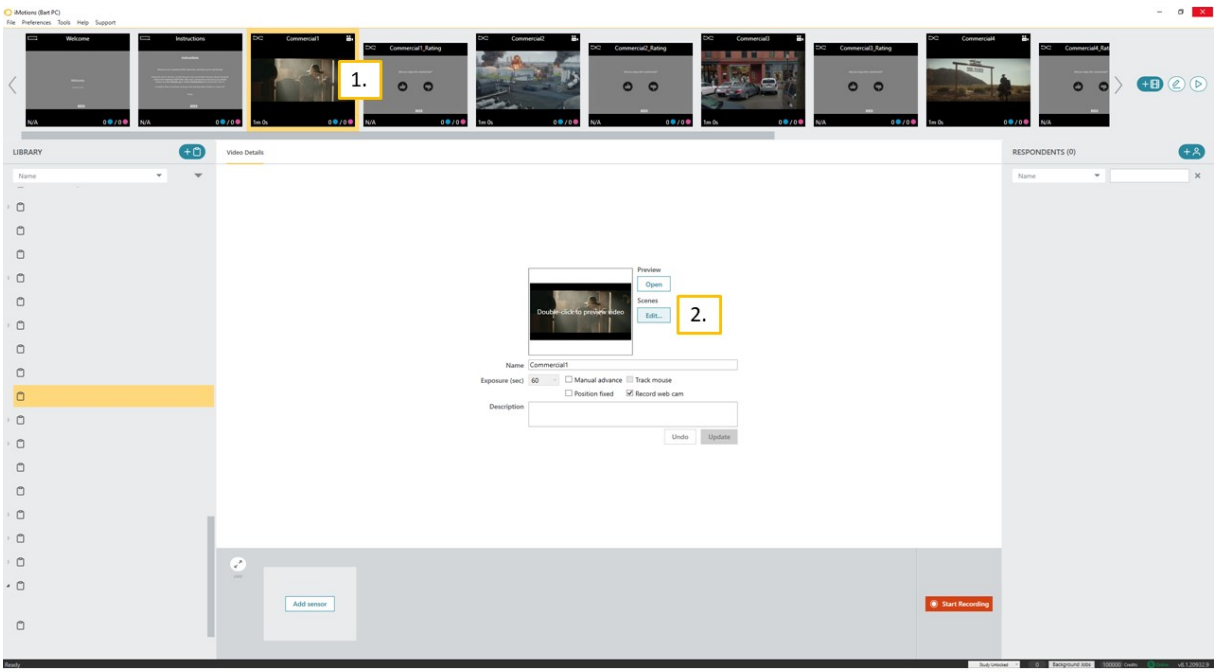


How to access the Scene editor for individual stimuli

Confidential © 2023 Redistribution is not permitted without written permission from iMotions

Access the scene editor for a given stimulus (only available for images, videos and websites):

1. Click on a stimulus in the Stimulus bar
2. In the section 'Scenes', click 'Edit'

Alternatively, if you wish to access the scene editor from the 'Recorded data' page, this is done like this.

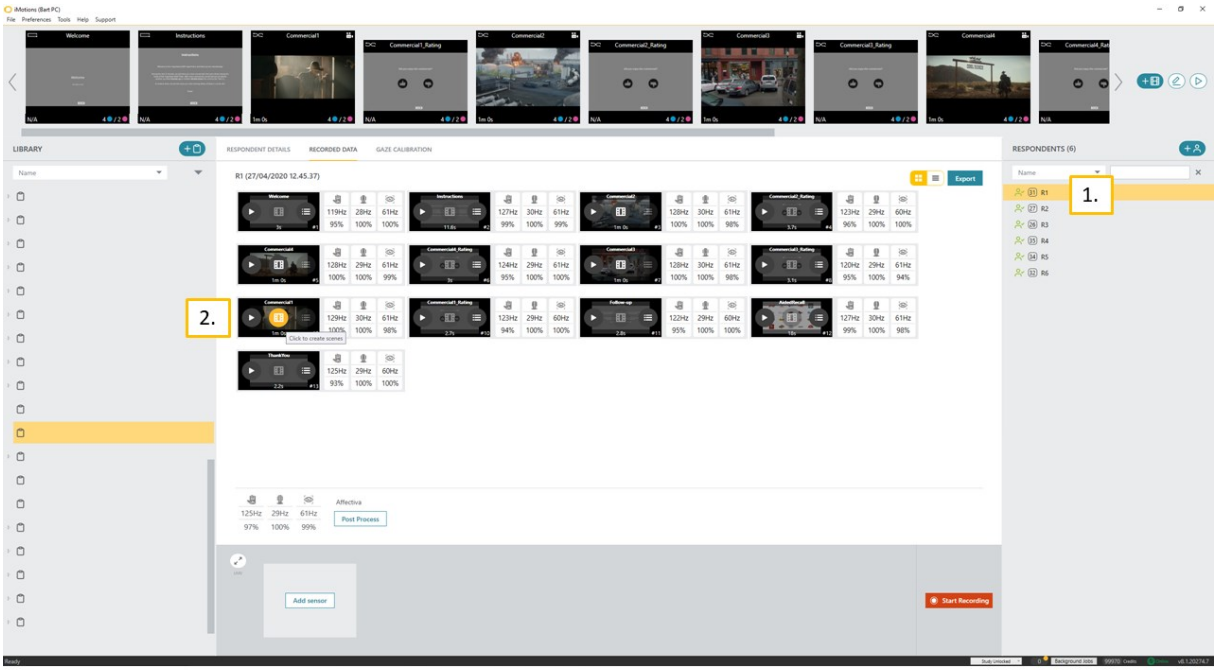

How to access the Scene editor from the Recorded data page


Access the scene editor from the Recorded data page:

1. Click on the name of a respondent in the Respondent list (with collected data)
2. Click on the 'Movie' button for a given stimulus.


These Scene editor(s), however, are not identical. Moreover, the Scene editor(s) also look slightly different for images, videos, websites, screen recordings, scene recordings, and the capabilities of the Scene editor(s) differ depending on the stimulus type.

Confidential © 2023 Redistribution is not permitted without written permission from iMotions

Images

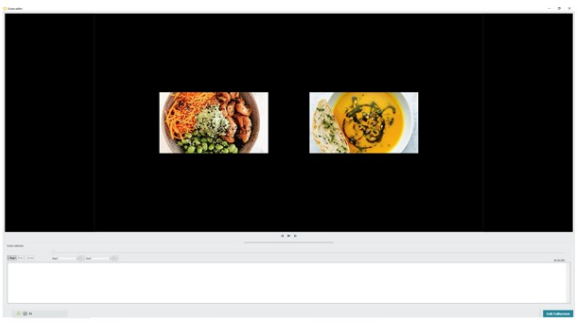


Before
data collection

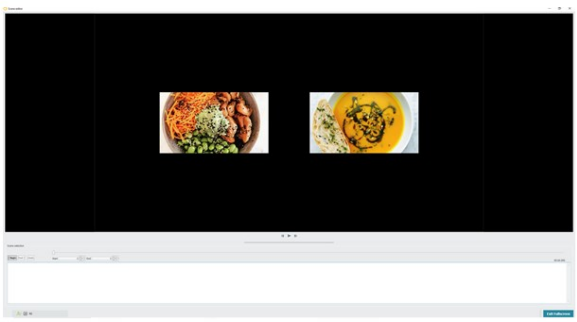


After
data collection

Nearly identical Scene editors for images. For images, you can only generate 'image scenes'.

Videos

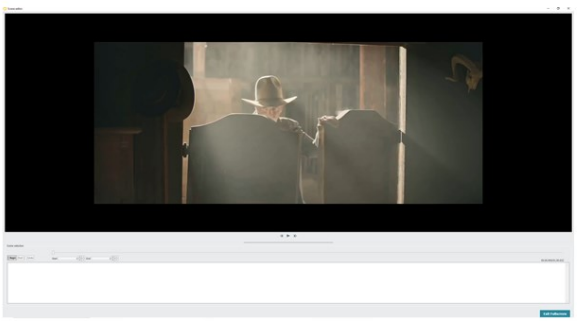

Before
data collection

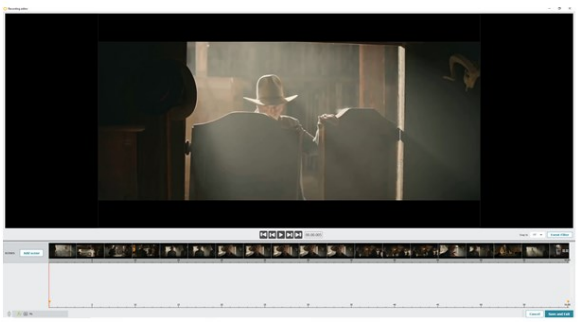


After
data collection


Different Scene editors for videos. Before data collection, it is only possible to generate 'image scenes'. After data collection, it is possible to generate 'image scenes' and 'video scenes'.

Confidential © 2023 Redistribution is not permitted without written permission from iMotions

Websites

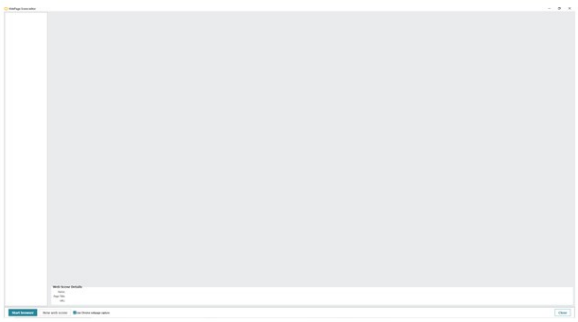

Before
data collection

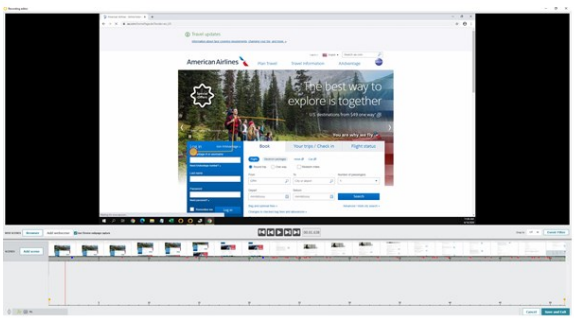


After
data collection

Different Scene editors for websites. Before data collection, it is only possible to generate 'website scenes'. After data collection, it is possible to generate 'image scenes', 'video scenes' and 'website scenes'.

Screen recordings

Not available


Before
data collection

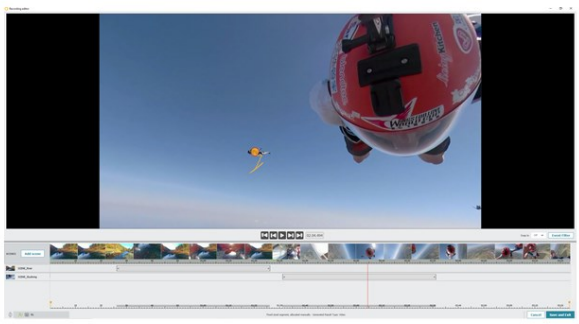

After
data collection

Only one Scene editor for Screen recordings. It is possible to generate 'image scenes' and 'video scenes'.

Confidential © 2023 Redistribution is not permitted without written permission from iMotions

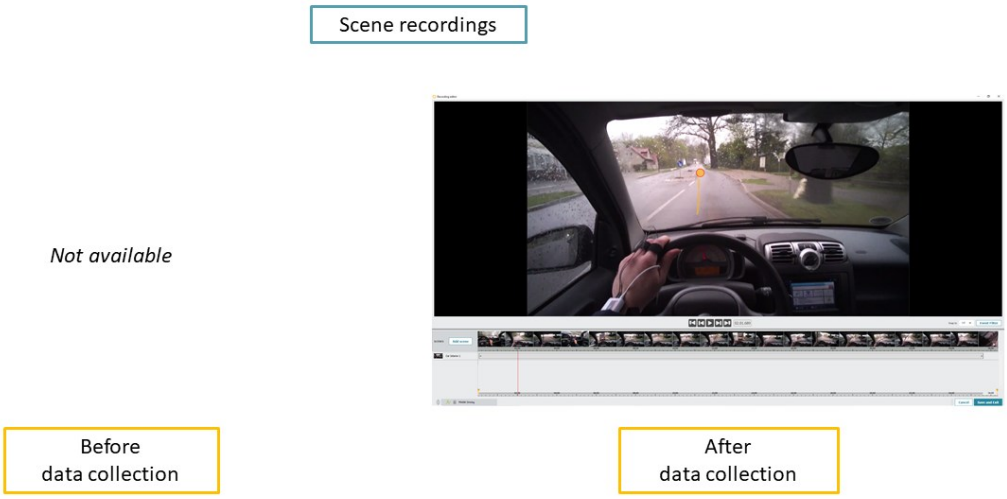

Only one Scene editor for Scene recordings (e.g., eye tracking glasses recordings). It is only possible to generate 'image scenes'.


Indeed, depending on (1) how the Scene editor(s) are accessed and (2) the type of stimulus, it will be possible to generate 'Image scenes', 'Video scenes' and/or 'Website scenes'.


Video scenes

'Video scenes' save a part of the recording *as a video*. This can be done for videos, websites, and screen recordings, but only from the Scene editor that is accessible *after* having collected data.

It is done in the same way for the different stimulus types.

Confidential © 2023 Redistribution is not permitted without written permission from iMotions

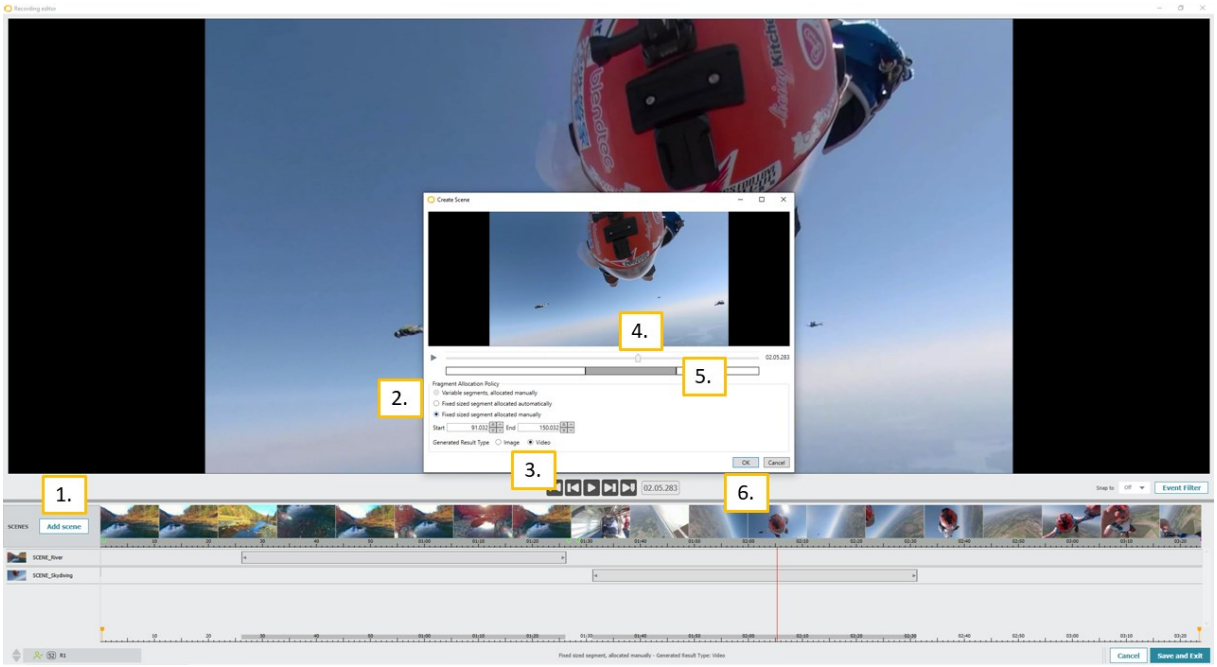

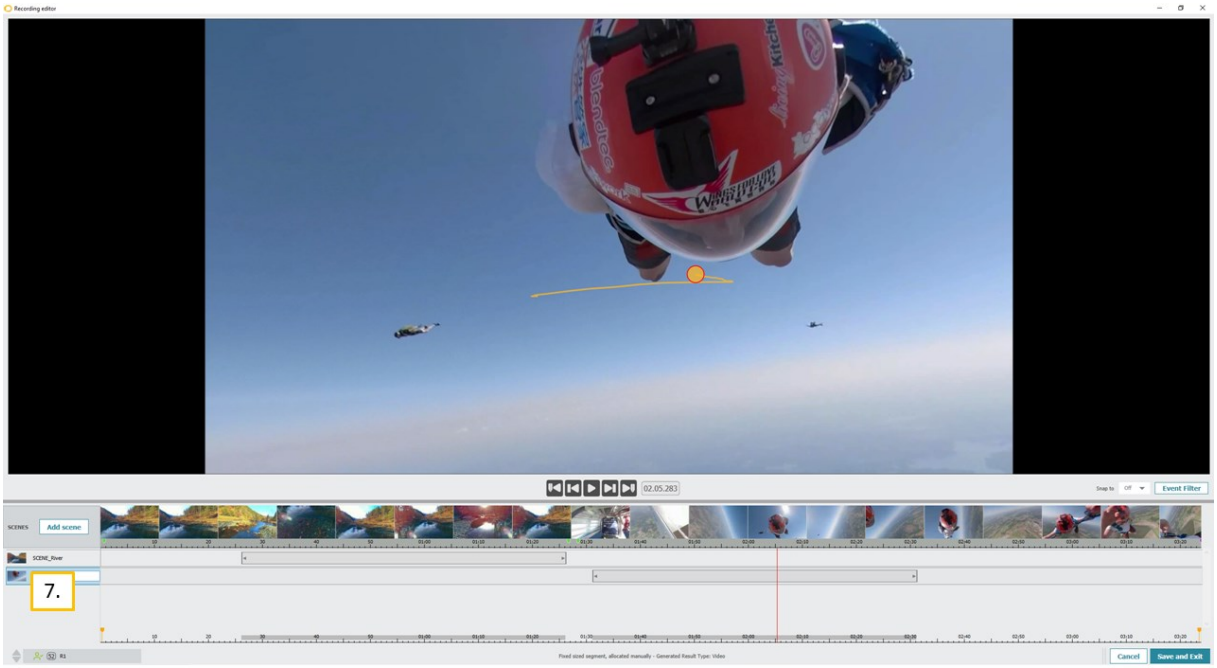

How to generate a video scene

Generate a video scene:

1. Click 'Add scene'
2. Choose a Fragment allocation policy. For 'video scenes', you must either choose option 2 ('Fixed sized segments allocated automatically') or option 3 ('Fixed sized segments allocated manually')
3. It is now possible to tick 'Video' for generating a 'video scene'
4. Finally, use the sliding bar to navigate through the video
5. Define a time-window for the 'video scene' by dragging the borders of the grey bar below the video navigator.

Confidential © 2023 Redistribution is not permitted without written permission from iMotions


6. Click 'Ok'
7. Rename the video scene

If you chose option 2 for the Fragment allocation policy, the 'video scene' is now immediately defined for all respondents, and it is not longer possible to change the time interval of the 'video scene' ('Fixed sized segments allocated automatically'). If you chose option 3, the 'video scene' is at this point only defined for one respondent. Hence, you should now navigate to the other respondents and set the time intervals for all respondents individually (by drawing on the timeline). Note that, in this case, it is not possible to alter the duration of the 'video scene' across respondents ('Fixed sized segment'), but it is possible to move around the time interval ('allocated manually').

Image scenes

Image scenes save a part of the recording *as an image*, retaining only one frame of the recording. This can be done for images, videos, websites, screen recordings and scene recordings, in one of two possible ways (depending on the specific Scene editor).

For images and videos (*before* data collection), 'image scenes' are generated in the following way.

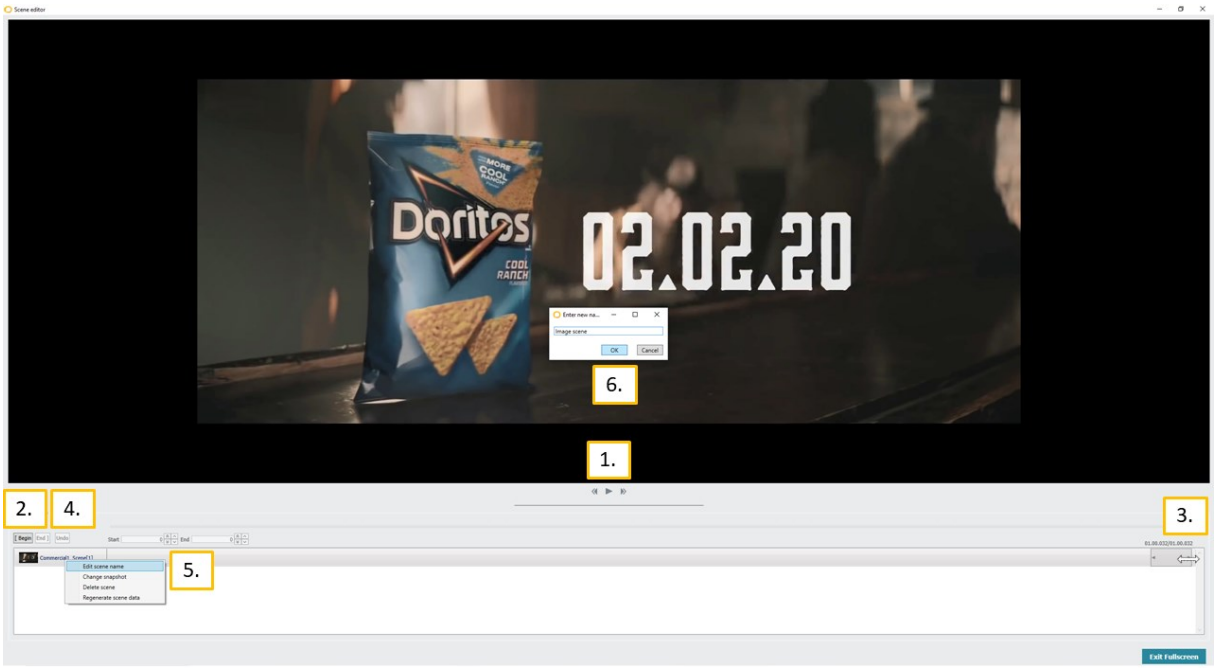

How to generate an image scene (images, videos before data collection)

Generate an image scene (images, videos *before* data collection):

1. Use the play, seek forward and seek backward buttons to find the start time for the 'image scene'


Confidential © 2023 Redistribution is not permitted without written permission from iMotions


2. Click '[Begin'
3. Drag the border of the scene interval to set the end time
4. Click 'End]'
5. Right-click on the scene interval and click 'Edit scene name'
6. Type a name, and click 'Ok'
7. *For videos*, right-click on the scene interval and click 'Change snapshot'

Note that, once defined, the duration and start/end times of these 'image scenes' cannot longer be changed, and that they immediately apply to all respondents; corresponding to the Fragment allocation policy 'Fixed sized segments allocated automatically'.

For videos (*after* data collection), websites, screen recordings and scene recordings, 'image scenes' are generated in a slightly different way.

Confidential © 2023 Redistribution is not permitted without written permission from iMotions

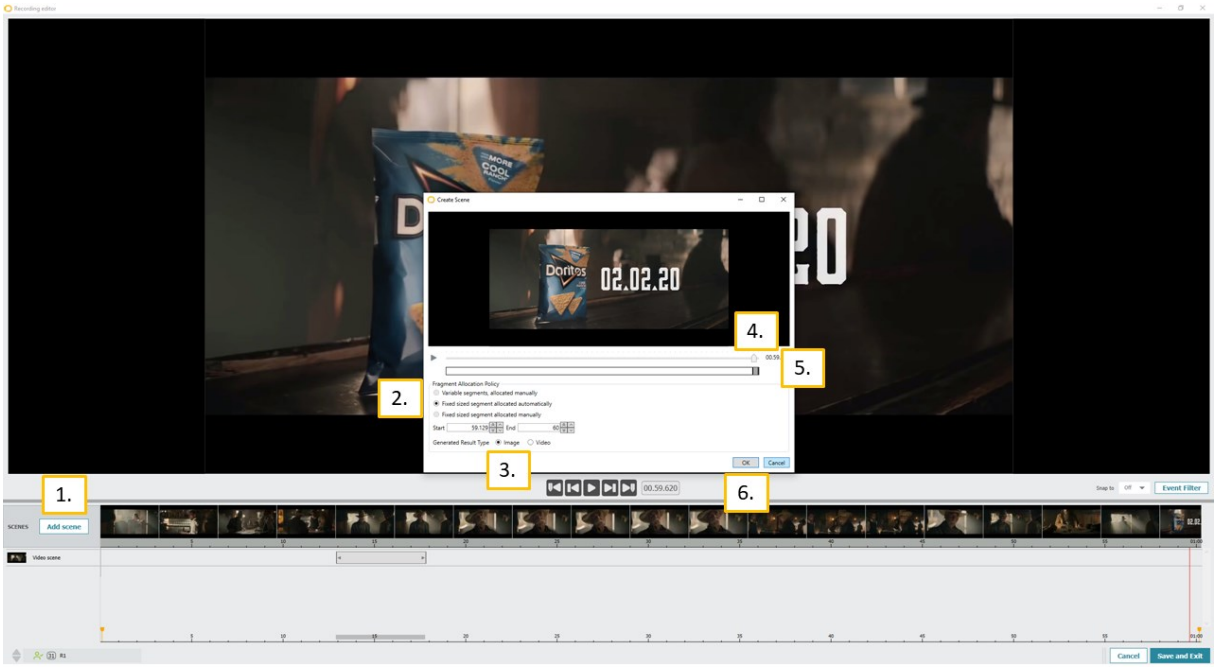

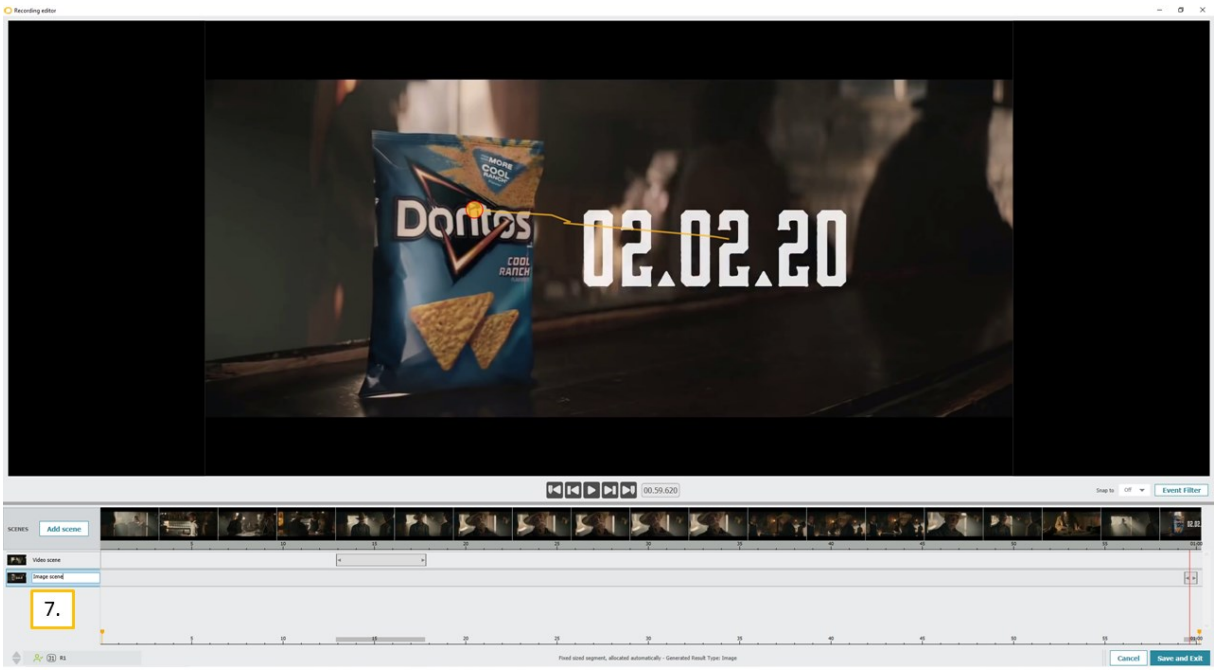

How to generate an image scene (videos after data collection, websites, screen recordings and scene recordings)

Generate an image scene (videos *after* data collection, websites, screen recordings and scene recordings):

1. Click 'Add scene'
2. Choose a fragment allocation policy
3. Make sure the option 'Image' is ticked (and not 'Video')
4. Use the sliding bar to navigate through the video
5. Define a time-window by dragging the borders of the grey bar below the video navigator. Note that, if you chose the option 'Variable segments

Confidential © 2023 Redistribution is not permitted without written permission from iMotions

allocated manually', you should skip this step.

6. Click 'Ok'
7. Rename the image scene
8. Choose a snapshot for the image scene


If you chose the option 'Variable segments allocated manually', at this point, the 'image scene' is not yet fully defined. You should now navigate from respondent to respondent and set the time intervals for every respondents individually. In contrast, if you chose the option 'Fixed sized segments allocated automatically' the 'image scene' is immediately fully defined for all respondents, and the duration and start/end times cannot longer be changed. Finally, if you chose the option 'Fixed sized segments allocated manually', at this point, the 'image scene' is fully defined for one respondent, but not yet for all other respondents. You should now navigate from respondent to respondent and set the time intervals for every respondent individually. The duration of the time interval cannot longer be changed ('Fixed sized segment'), but you can move around the time interval ('allocated manually').


Website scenes

Website scenes, finally, are only available for website recordings. Website scenes first generate a full page screen capture of the website page(s), and then save the part of the recording where respondents visited the website page(s) *as part of the full page screen capture.* 'Website scene' could thus be understood as an alternative method for gaze mapping in the case of website recordings (see also: Gaze mapping).


These 'website scenes' can already be generated *before* having collected data, or *after* collecting data. If you define the 'website scenes' in advance, the full page screen capture will already be generated and saved together with the URL of the website page(s) before collecting data. Later, the URL of the website page(s) will then be used to automatically segment the part of the recording where the respondent visited the respective website page(s). Defining the 'website scenes' in advance, is done in the following way.

Confidential © 2023 Redistribution is not permitted without written permission from iMotions

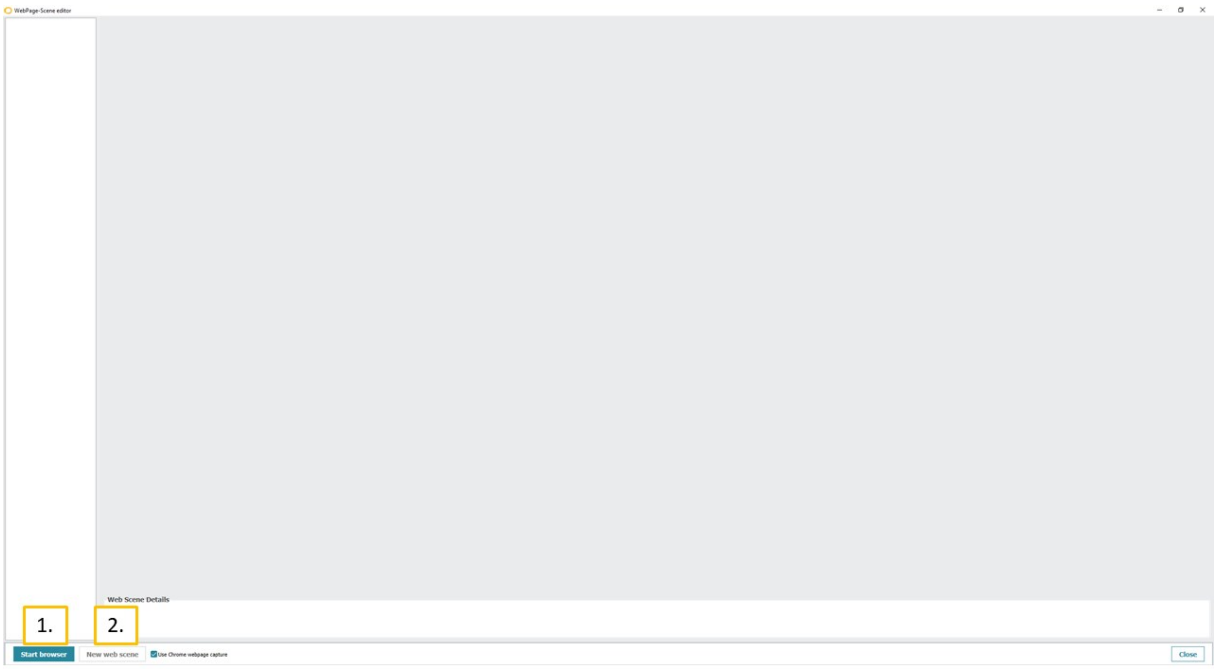

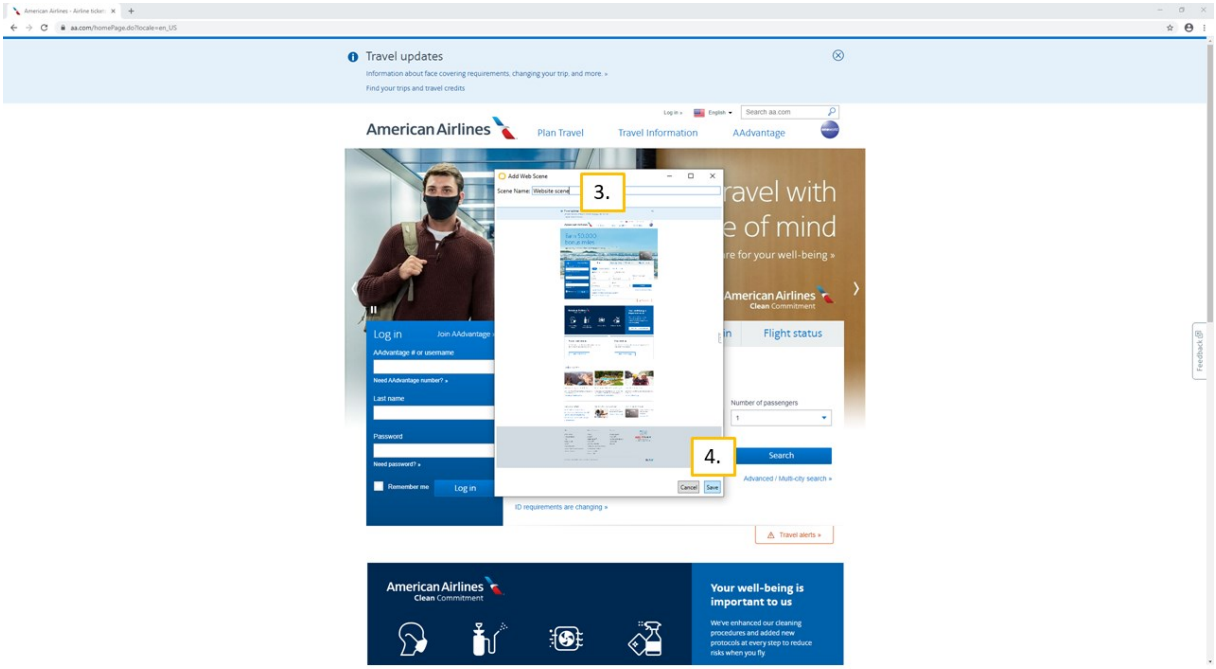

Confidential © 2023 Redistribution is not permitted without written permission from iMotions

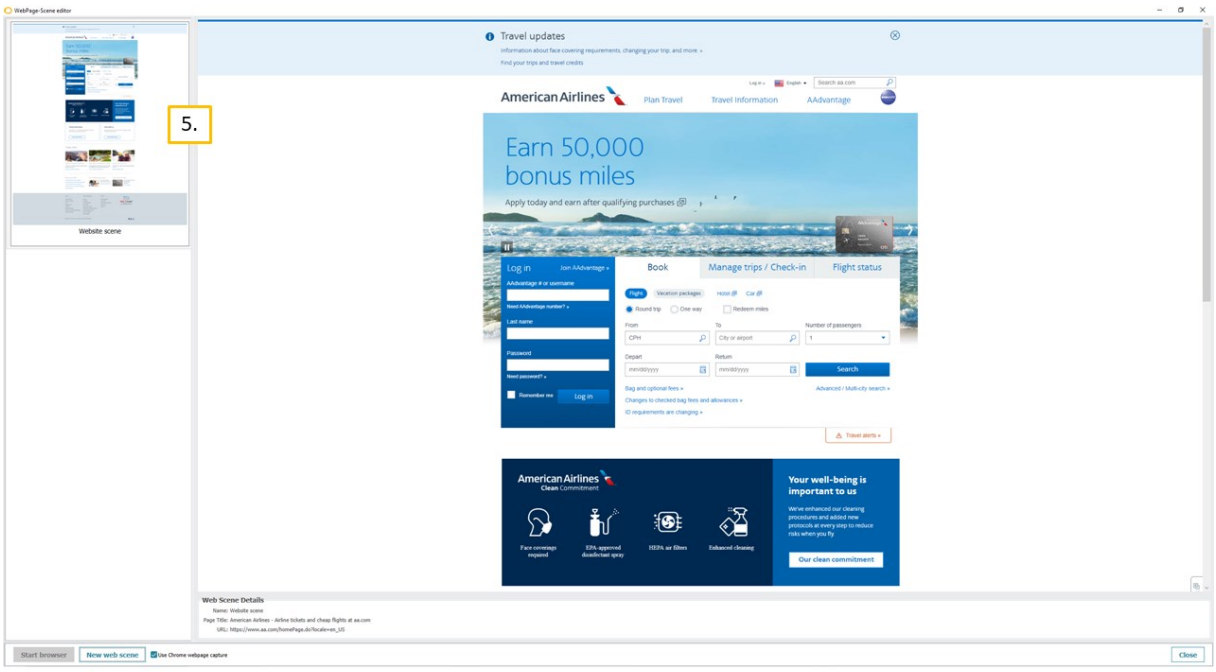


How to generate a website scene (before data collection)

Generate a website scene *before* data collection:

1. Click 'Start browser'
2. Return to the Scene editor and click 'New web scene'
3. Name the website scene
4. Review the full page screen capture and click 'Save'

Also if you define the 'website scenes' *after* having collected data, you can benefit from the URL of the website page(s) for generating the full page screen captures and time intervals.

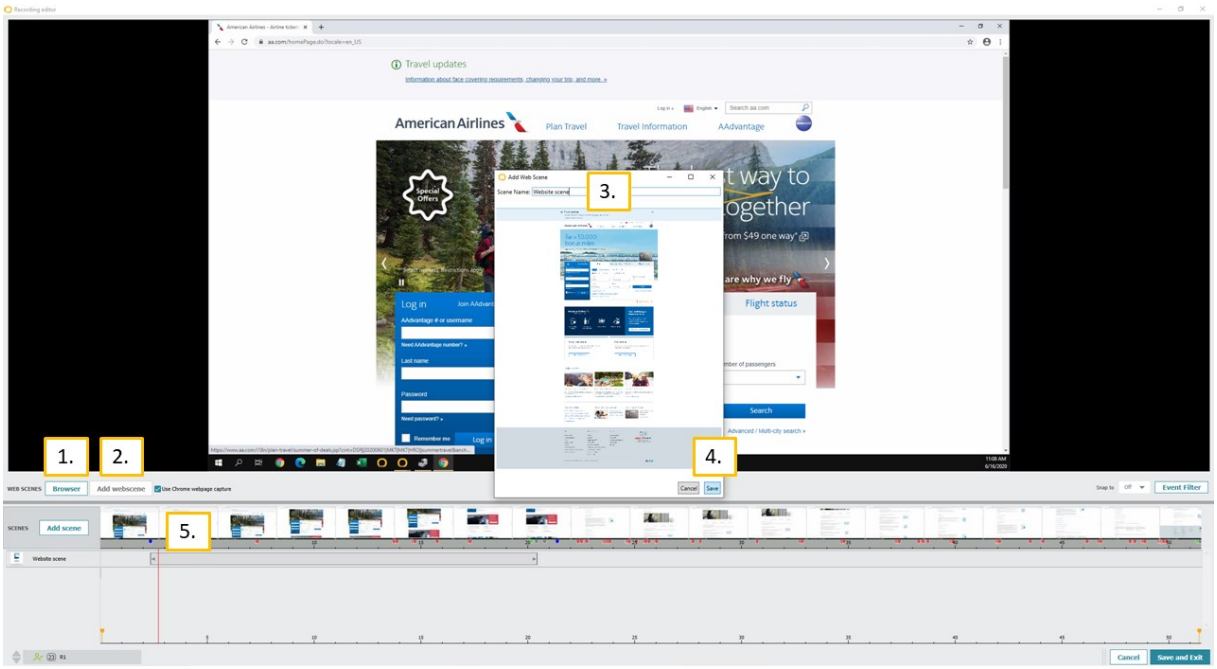

Confidential © 2023 Redistribution is not permitted without written permission from iMotions


How to generate a website scene

Generate a website scene:

1. Display the 'Page ready' events, by clicking 'Event filter'
2. In the pop-up window, click 'Filter'
3. Select the 'Page ready' events
4. Move the cursor to a time immediately after a first 'Page ready' event
5. Click 'Browser' to launch the website page
6. Return to the scene editor, and click 'Add web scene'.
7. Name the website scene
8. Review the full page screen capture and click 'Save'
9. *(Repeat steps 4 to 8 for every website page)*

What's next? (Replay, aggregate replay, heatmaps, etc.)


After generating 'video scenes', 'image scenes' and 'website scenes', these scenes are saved as separate slides in the Stimulus bar, which means that, from this point onward, the scenes are treated as regular images and videos.

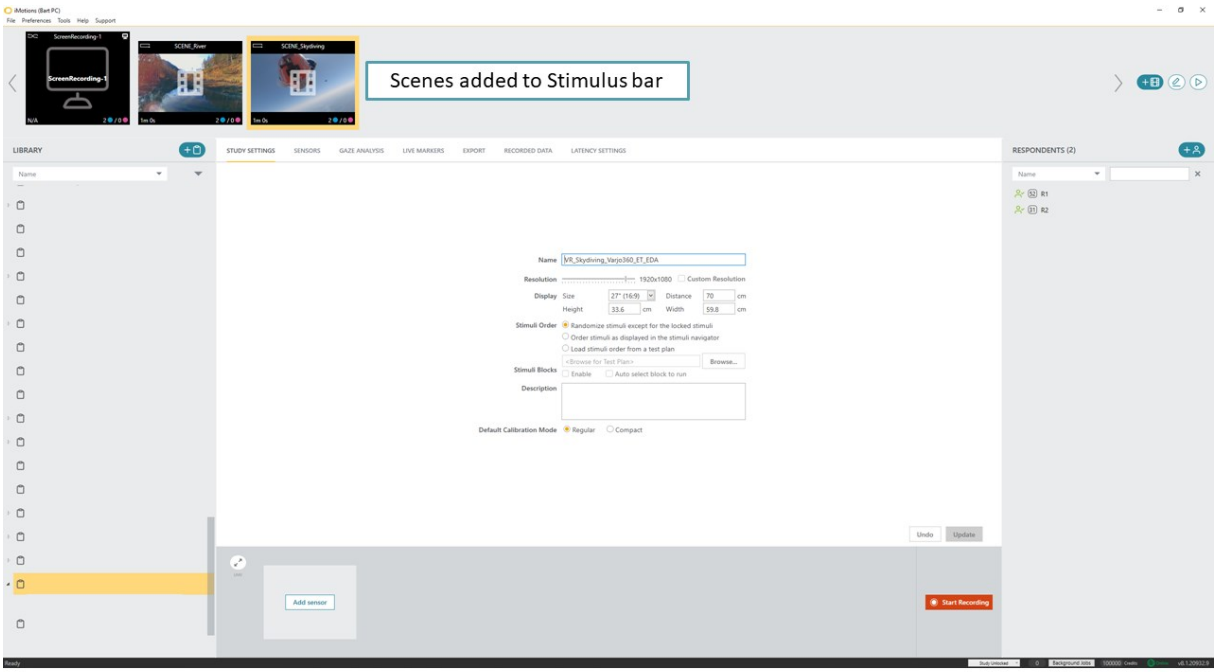


Image, video, and website scenes are treated as separate 'stimuli' in the Stimulus bar

Confidential © 2023 Redistribution is not permitted without written permission from iMotions

In other words, it is now possible to replay the sensor data associated to these scenes in the Replay (see also: Replay) and Aggregate replay editors (see also: Aggregate replay). It is also possible to generate Scan-paths (see also: Scan-paths) and Heatmaps (see also: Heatmaps), or to obtain object-related eye tracking statistics using Static AOIs (see also: Static AOIs) and Moving AOIs (see also: Moving AOIs).

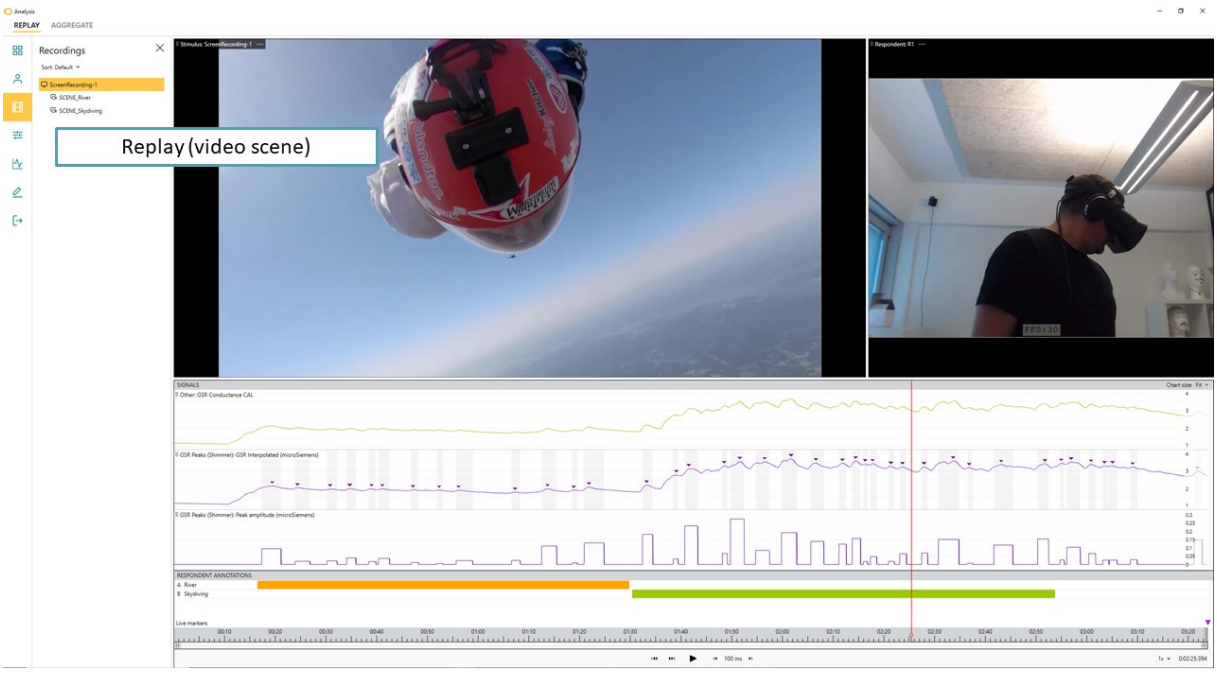

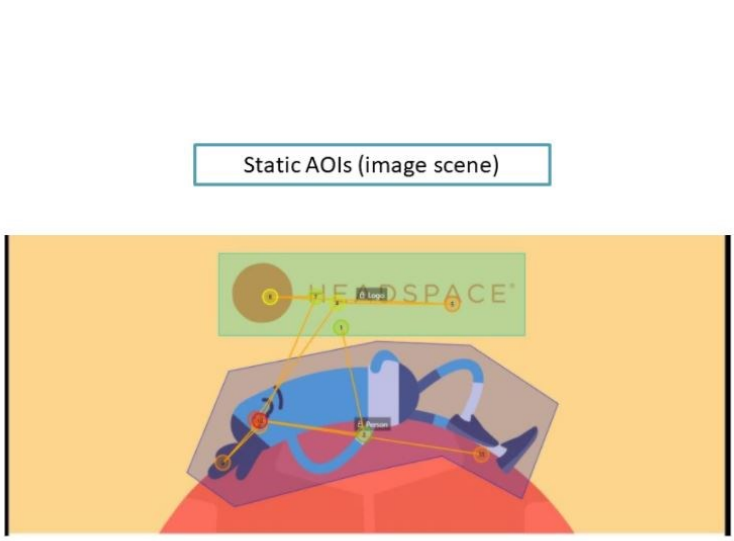



Replay scenes, generate heatmaps, draw static AOIs, etc.


Confidential © 2023 Redistribution is not permitted without written permission from iMotions

Good to know (features)

A few more features are good to be aware of when operating the Scene editor.

Fragment allocation policy

As part of generating 'video scenes' and 'image scenes', you often need to choose a Fragment allocation policy. The options are (1) variable segments allocated manually, (2) fixed sized segments allocated automatically, and (3) fixed sized segments allocated manually.

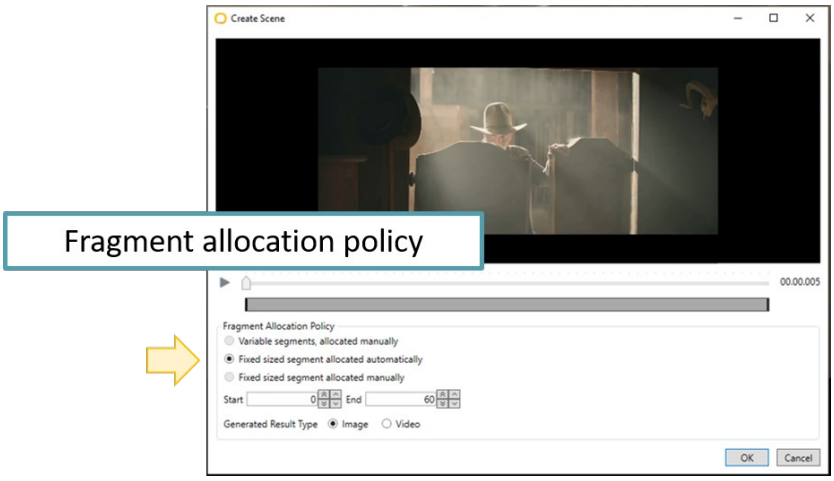

Fragment allocation policy

The first option, 'variable segments allocated manually', allows you to cut 'image scenes' that have a different duration and different start/end times ('variable segments') across respondents. That also means that you need to manually define the time intervals for all respondents ('allocated manually'). This option is only available for website recordings and screen recordings, and only for defining 'image scenes'; not 'video scenes' or 'website scenes'.


In contrast, the second option, 'fixed sized segments allocated automatically', allows you to indicate that the scenes have the exact same duration and start/end times ('fixed sized segments') across respondents. In this case, you only need to define the time interval once, after which the same time interval immediately applies to all respondents ('allocated automatically'). This option is available for videos, websites, screen recordings and scene recordings, and both for defining 'image scenes' and 'video scenes'; not for 'website scenes'. This is also the default solution for 'image scenes' generated from images.

Confidential © 2023 Redistribution is not permitted without written permission from iMotions

The third option, 'fixed sized segments allocated manually', allows you to cut 'image scenes' and 'video scenes' that have the same duration across respondents ('fixed sized segments'), but not the same start/end times. That means that you need to manually define the time intervals for all respondents ('allocated manually'), however, in the process of doing so, the exact duration of the time interval will remain constant. This option is only available for websites, screen recordings and scene recordings, and both for defining 'image scenes' and 'video scenes'; not for 'website scenes'.

Move intervals, change start/end times

Depending on the Fragment allocation policy, it may or may not be possible to change the scene intervals. If it is possible, this is done by grasping the scene interval and/or the borders of the time interval.

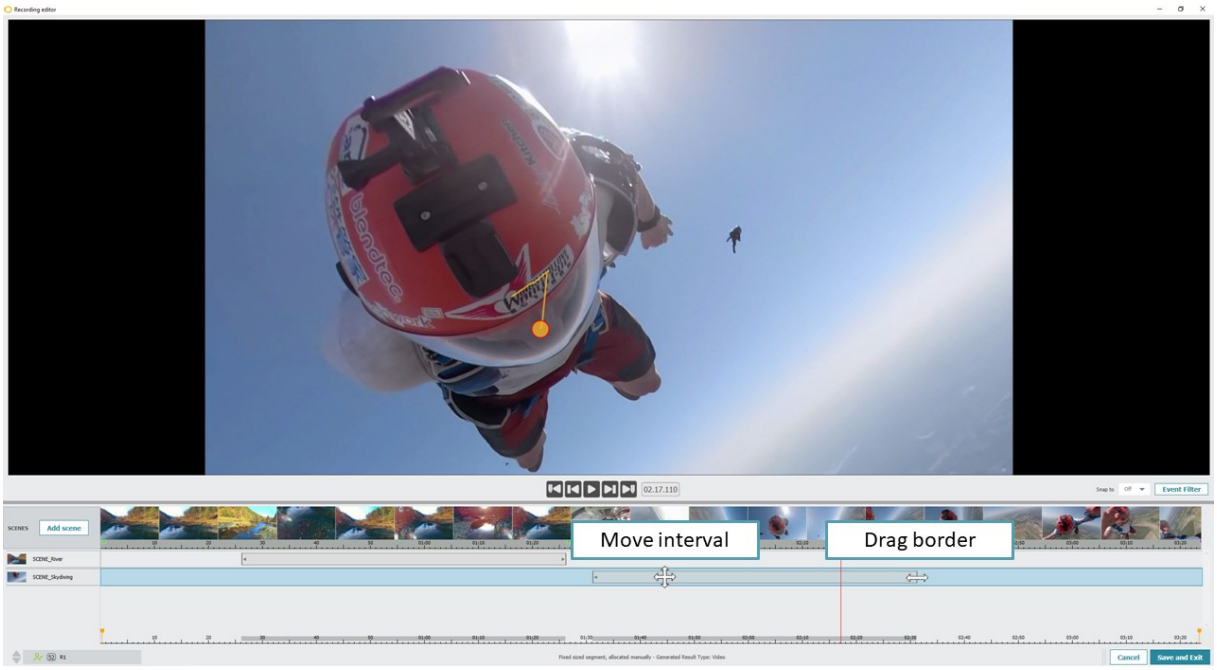


How to move scene intervals in time, or change start/end times

Rename

For most stimulus types, renaming the 'image scenes', 'video scenes' and 'website scenes' can be done by clicking on the name of the scene, after which you can immediately start typing a different name.

Confidential © 2023 Redistribution is not permitted without written permission from iMotions

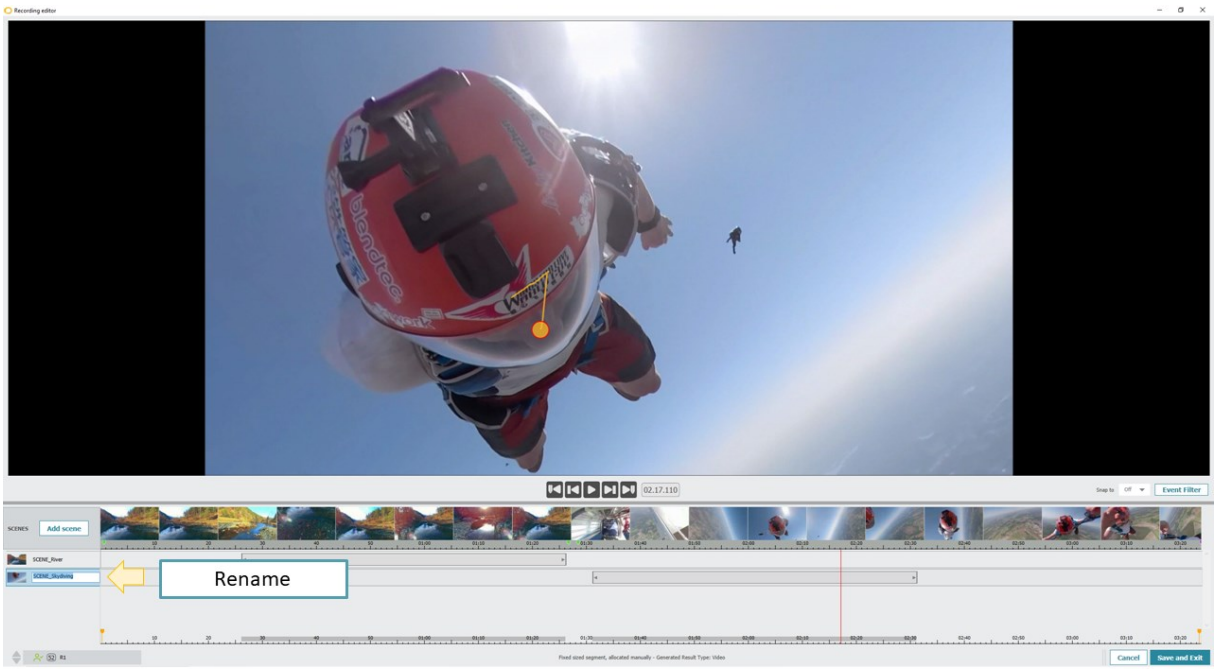

How to rename scenes

For images, renaming the 'image scenes' is done slightly differently; by double-clicking on the name of the scene, and then, changing the name of the image scene in the pop-up window.




How to rename scenes (in the case of images)

For 'website scenes', it is not possible to rename the website scene from within the Scene editor accessed *before* data collection. However, you may rename the website scene later, from within the Scene editor accessed *after* data collection.


Set snapshot

Confidential © 2023 Redistribution is not permitted without written permission from iMotions

Especially if you use 'image scenes' as an alternative method for gaze mapping (see also: Gaze mapping), it is important to know how to select a snapshot; changing the snapshot can also be done for 'video scenes', but here, it merely changes how the video scene is displayed in the Stimulus bar. This is done in the following way.

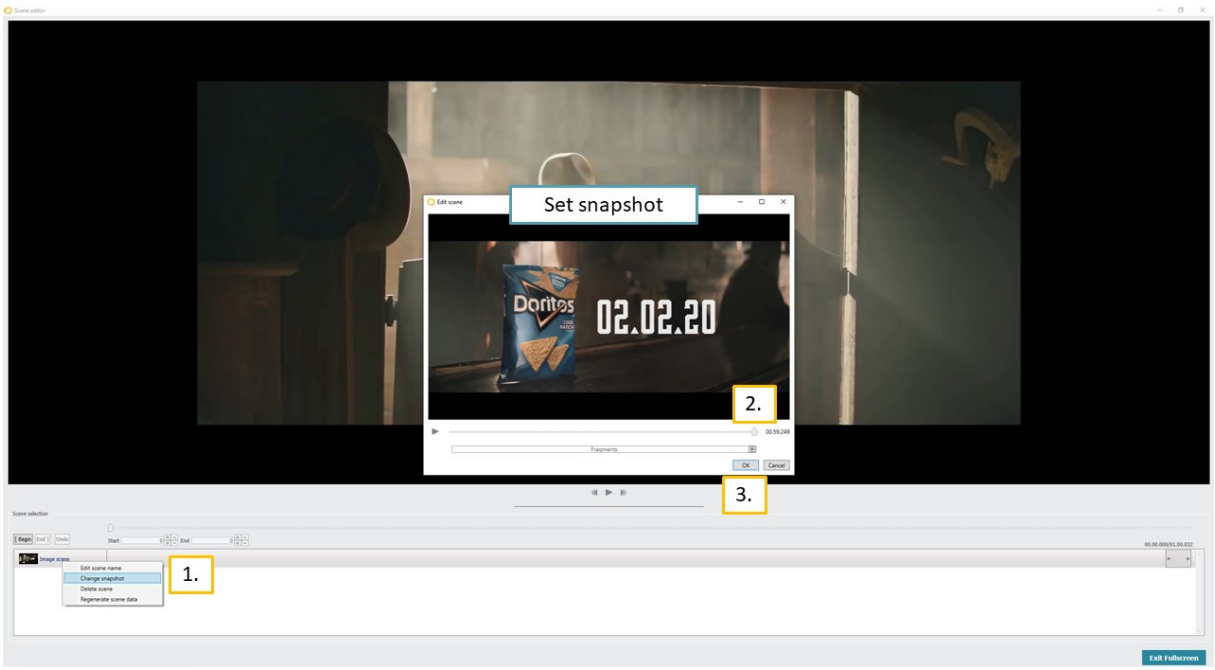

How to set a snapshot (in the case of image scenes)

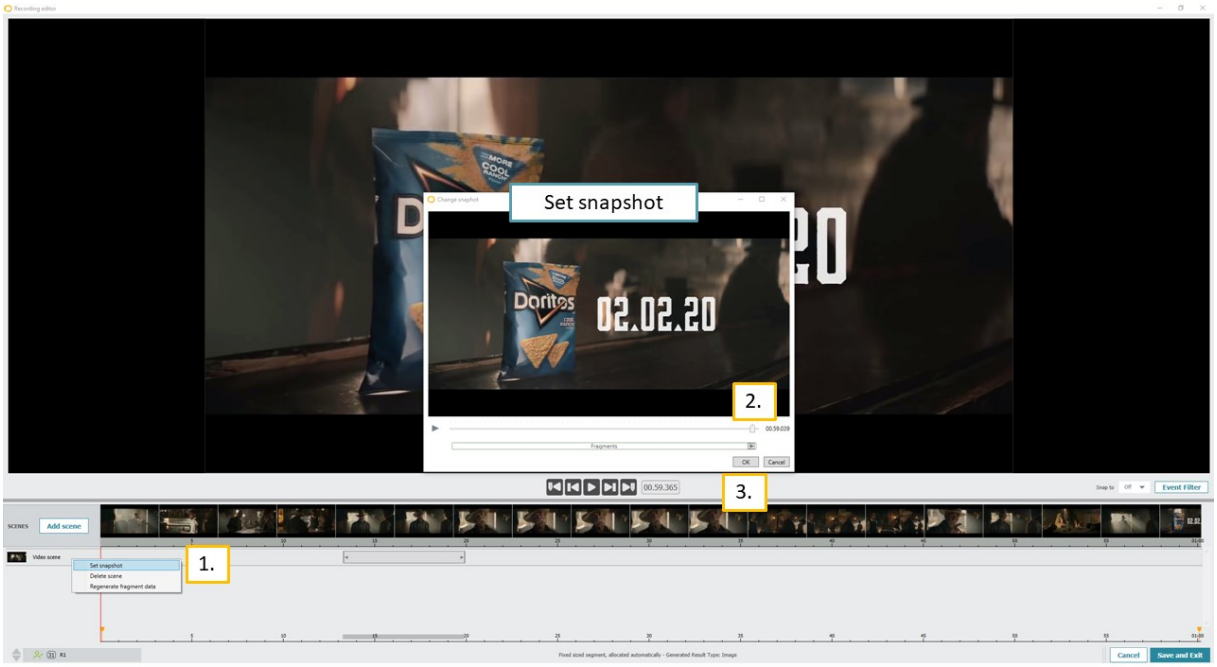


How to set a snapshot (in the case of video scenes)

Event filter

Confidential © 2023 Redistribution is not permitted without written permission from iMotions

The Scene editors for videos (*after* data collection), websites (*after* data collection), screen recordings and scene recordings also have an 'Event filter'. This 'Event filter' allow you to visualize the relevant website (e.g., Page ready) and mouse events (e.g., clicks, scrolls).

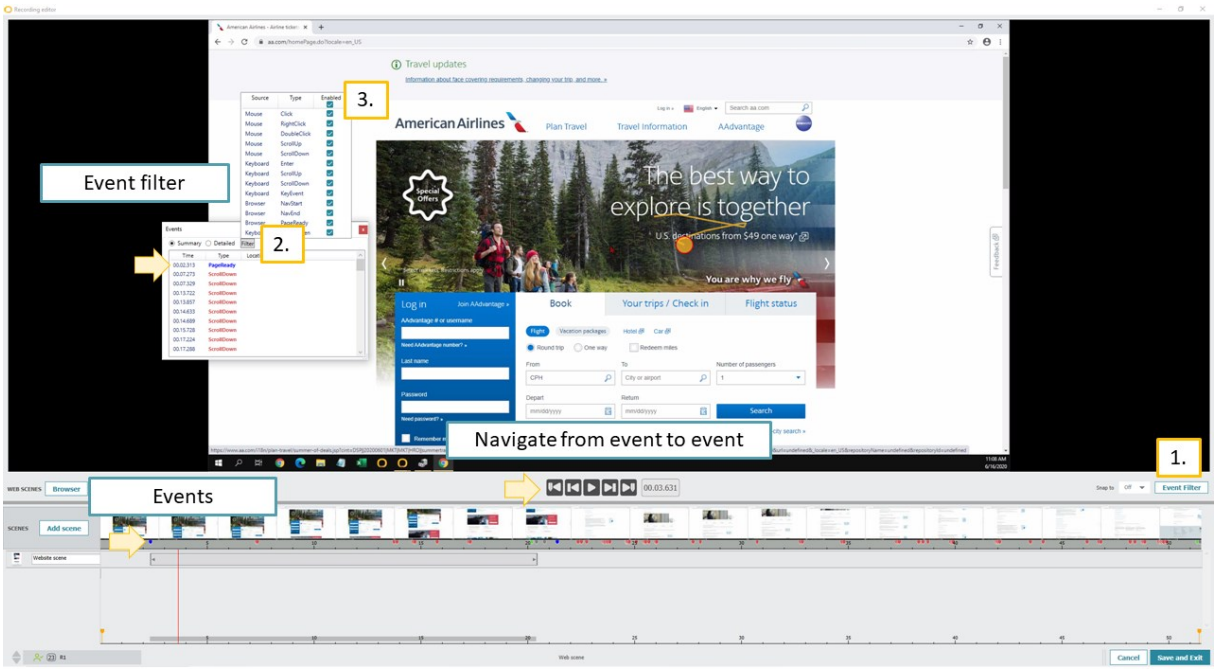


How to display website and mouse events

It is also possible to navigate from event to event on the timeline using the 'Jump to next/previous event' buttons. Note, however, that these button always consider *all* events (regardless of the Event filter). Live markers are not part of the Events in the Scene editor.

Delete


'Video scenes', 'image scenes' and 'website scenes' can be deleted by right-clicking the scene in the Stimulus bar, after which you can choose to 'delete' the scene.

Confidential © 2023 Redistribution is not permitted without written permission from iMotions

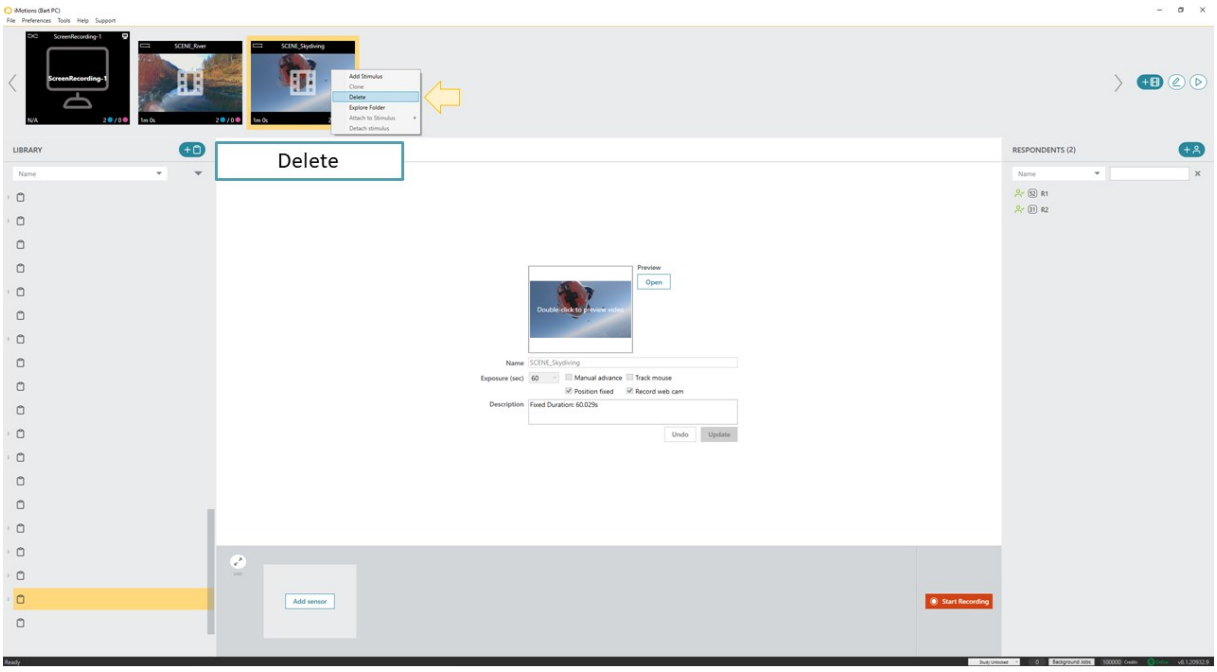

How to delete a scene from the Stimulus bar

For most stimuli, it is also possible to delete the scenes from within the Scene editor. This is done by right-clicking the name of the scene, and then, clicking 'delete scene'.

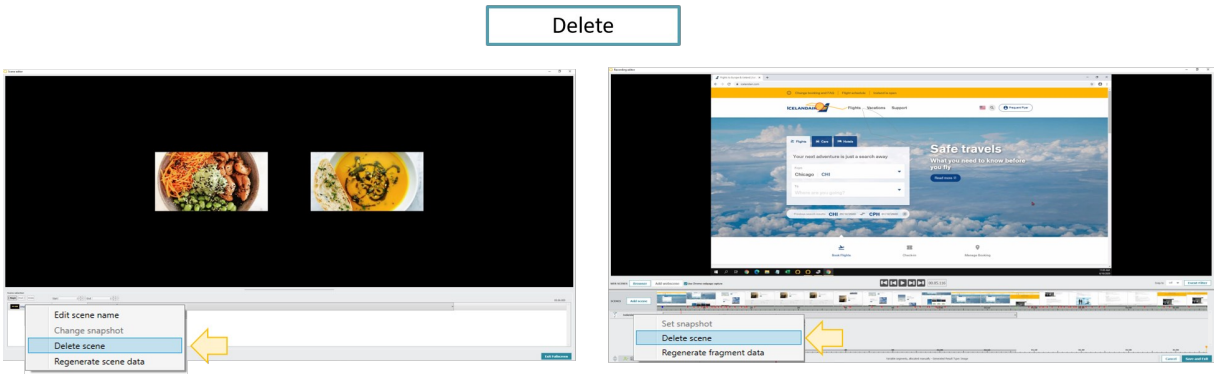


How to delete a scene from within the Scene editor

For 'website scenes', it is not possible to delete the website scene from within the Scene editor accessed *before* data collection. However, you may delete the website scene from the Stimulus bar, or later, from within the Scene editor accessed *after* data collection.

Export


Export scenes as part of sensor data export files (.csv)

Confidential © 2023 Redistribution is not permitted without written permission from iMotions

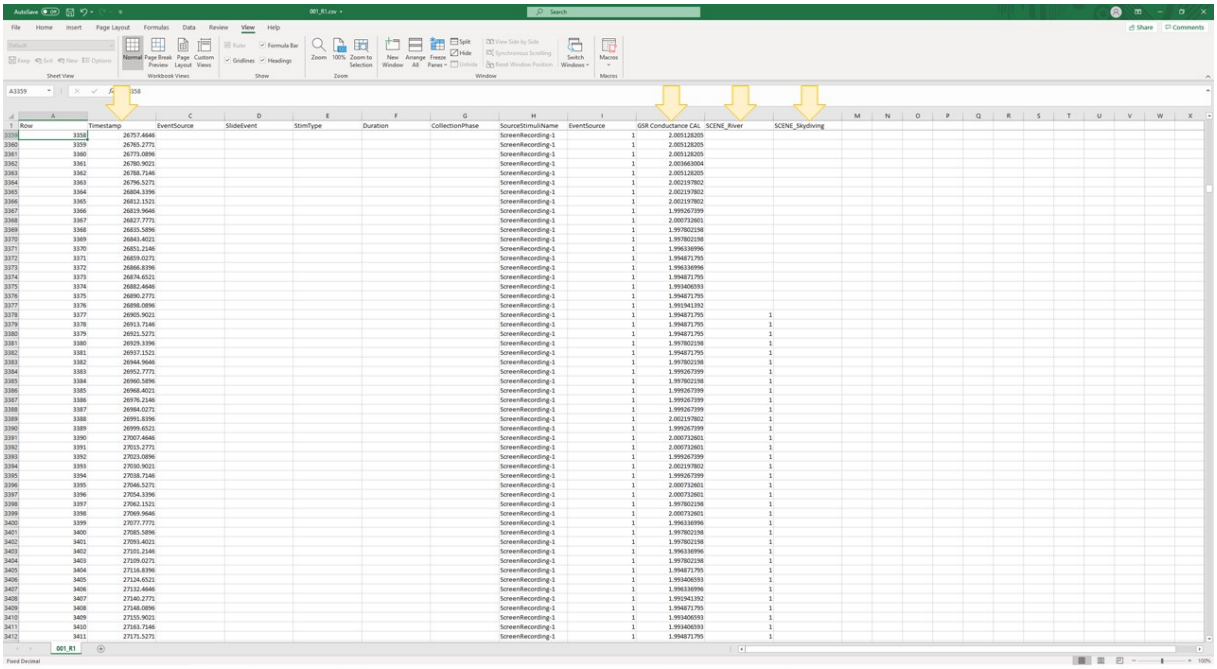

Example of scenes in a sensor data export file (.csv)

Export scenes as part of R-processed export files (.txt)

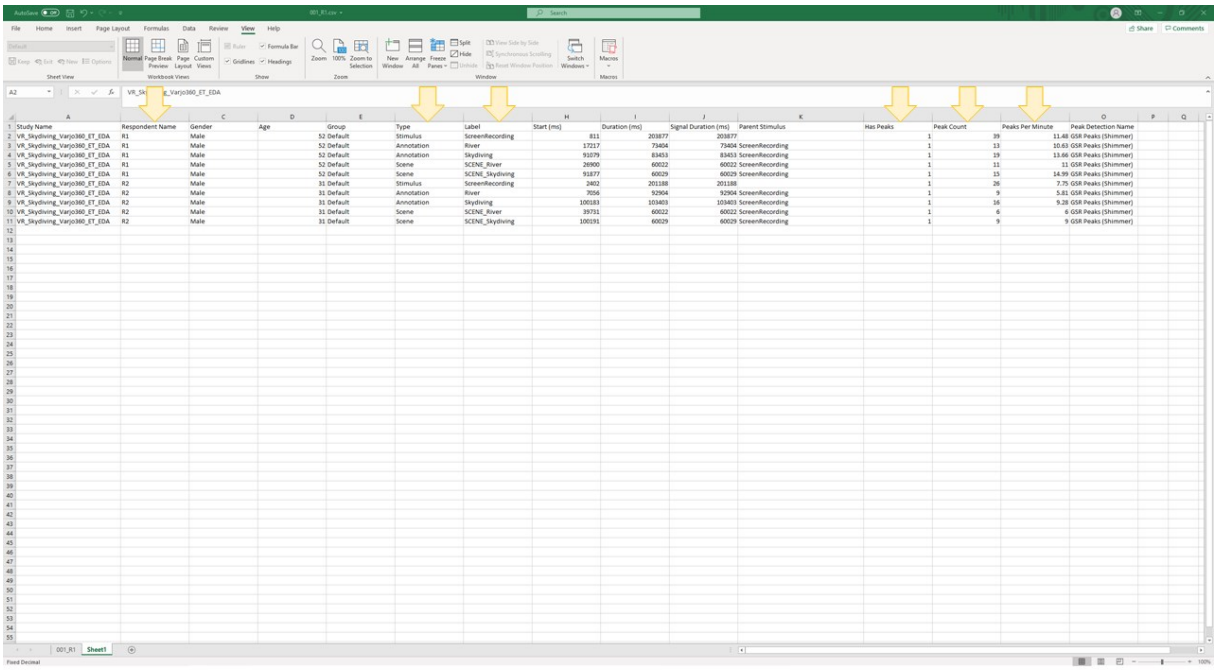

Example of scenes in an R-processed export file (.txt)

Export scenes as images or videos (.png, .wmv, .mp4)

Confidential © 2023 Redistribution is not permitted without written permission from iMotions



Example of a scene exported as image

Powered by Document360

Confidential © 2023 Redistribution is not permitted without written permission from iMotions

Confidential © 2023 Redistribution is not permitted without written permission from iMotions