GREEEN tallgrass prairie restoration: RLQ analyses (Lux Arbor)

Markus Bauer

2025-09-08

Contents

Preparation **1**
Checks . . . 2
Finalize preparation . . . 3

Statistics **3**
Descriptive analyses . . . 3
Ordinations . . . 4
RLQ analyses . . . 4
Global test . . . 4
Traits by environment crossed table . . . 4
RLQ Plots . . . 5
Fourth-corner analysis . . . 9
Plot . . . 12

Save **13**

Session info **13**

Technichal University of Munich, TUM School of Life Sciences, Chair of Restoration Ecology, Emil-Ramann-Straße 6, 85354 Freising, Germany

*markus1.bauer@tum.de

ORCiD ID: 0000-0001-5372-4174 Google Scholar GitHub: markus1bauer GitHub: TUM-Restoration-Ecology

Preparation

```
library(here)
library(tidyverse)
library(ade4)
```

Packages

```
sites <- read_csv(
  here("data", "processed", "data_processed_sites.csv"),
  col_names = TRUE, na = c("na", "NA", ""), col_types =
    cols(
    .default = "?",
    seeding_time = "f"
```

```r
  )) %>%
  arrange(id_plot_year) %>%
  filter(
    site == "Lux Arbor",
    richness_type == "seeded_richness",
    treatment_id %in% c("1", "2", "3", "4")
  ) %>%
  mutate(
    treatment = str_c(seeding_time, herbicide, seeded_pool, sep = "_"),
    treatment = factor(treatment)
  ) %>%
  filter(treatment != "unseeded_0_0") %>%
  select(
    id_plot_year, year, treatment, water_cap, cover_non_seeded,
    cover_seeded_grass
    )

traits <- read_csv(
  here("data", "processed", "data_processed_traits.csv"),
  col_names = TRUE, na = c("na", "NA", ""), col_types = cols(.default = "?")
  ) %>%
  filter(seeded == "1", family != "Poaceae") %>%
  select(accepted_name, sla, height, seedmass) %>%
  mutate(seedmass = log(seedmass)) %>%
  drop_na()

species <- read_csv(
  here("data", "processed", "data_processed_species.csv"),
  col_names = TRUE, na = c("na", "NA", ""), col_types = cols(.default = "?")
  ) %>%
  filter(plot_size %in% c("1", "25")) %>%
  mutate(abundance = 1) %>%
  select(id_plot_year, accepted_name, abundance) %>%
  semi_join(sites, by = "id_plot_year") %>%
  semi_join(traits, by = "accepted_name") %>%
  arrange(id_plot_year)
```

Load data

Checks

```r
species %>%
  group_by(id_plot_year) %>%
  count()
```

Seeded species richness

```
## # A tibble: 104 x 2
## # Groups:   id_plot_year [104]
##    id_plot_year     n
##    <chr>        <int>
##  1 Lux_12_2015     10
##  2 Lux_12_2016     10
##  3 Lux_12_2017     10
```

```
##  4 Lux_12_2018      9
##  5 Lux_12_2019      8
##  6 Lux_12_2025      4
##  7 Lux_17_2015      3
##  8 Lux_17_2016      5
##  9 Lux_17_2017      9
## 10 Lux_17_2018      8
## # i 94 more rows
```

```
traits %>% anti_join(species, by = "accepted_name")
```

Check non-occuring seeded species

```
## # A tibble: 6 x 4
##   accepted_name                   sla height seedmass
##   <chr>                         <dbl>  <dbl>    <dbl>
## 1 Dalea purpurea                 191.  0.91     -6.07
## 2 Liatris cylindracea            110.  0.564    -5.73
## 3 Lupinus perennis               167.  0.326    -3.84
## 4 Silphium terebinthinaceum      171.  0.716    -4.53
## 5 Solidago juncea                130.  0.783    -7.79
## 6 Symphyotrichum oolentangiense  143.  0.362    -8.68
```

Finalize preparation

```
traits <- traits %>%
  semi_join(species, by = "accepted_name") %>%
  column_to_rownames(var = "accepted_name")

sites <- sites %>%
  semi_join(species, by = "id_plot_year") %>%
  column_to_rownames(var = "id_plot_year")

species <- species %>%
  pivot_wider(
    names_from = "accepted_name", values_from = "abundance", values_fill = 0
    ) %>%
  column_to_rownames(var = "id_plot_year")
```

Statistics

Descriptive analyses

```
sites %>%
  group_by(year) %>%
  count()
```

```
## # A tibble: 6 x 2
## # Groups:   year [6]
##    year     n
##   <dbl> <int>
## 1  2015    14
## 2  2016    18
```

```
## 3  2017    18
## 4  2018    18
## 5  2019    18
## 6  2025    18
```

Ordinations

```
dudi_l <- dudi.coa(species, scannf = FALSE)
dudi_r <- dudi.hillsmith(
  sites,
  row.w = dudi_l$lw,
  scannf = FALSE
  )
dudi_q <- dudi.pca(
  traits,
  row.w = dudi_l$cw,
  scannf = FALSE
  )
```

RLQ analyses

```
m_rlq <- rlq(
  dudiR = dudi_r,
  dudiL = dudi_l,
  dudiQ = dudi_q,
  scannf = FALSE
  )
```

Global test

```
randtest(m_rlq, nrepet = 999, modeltype = 6)
```

```
## class: krandtest lightkrandtest
## Monte-Carlo tests
## Call: randtest.rlq(xtest = m_rlq, nrepet = 999, modeltype = 6)
##
## Number of tests:   2
##
## Adjustment method for multiple comparisons:   none
## Permutation number:   999
##      Test       Obs   Std.Obs   Alter Pvalue
## 1 Model 2 0.1291485 15.521417 greater  0.001
## 2 Model 4 0.1291485  2.142517 greater  0.033
```

Traits by environment crossed table

```
m_rlq$tab
```

```
##                              sla      height    seedmass
## year               -0.0553359388 -0.09100603 -0.20077237
## treat.fall_0_33    -0.0352059036  0.06892163  0.03075780
## treat.spring_0_33  -0.0007545037 -0.09902116  0.01473937
## treat.spring_1_33   0.0469446306 -0.01186907 -0.05222636
```

```
## water_cap          -0.0212619477  0.01978769  0.05335722
## cover_non_seeded    0.0171048445  0.05755098  0.13280700
## cover_seeded_grass -0.0577130707 -0.08164154 -0.18825188
```

RLQ Plots

```
plot(m_rlq)
```

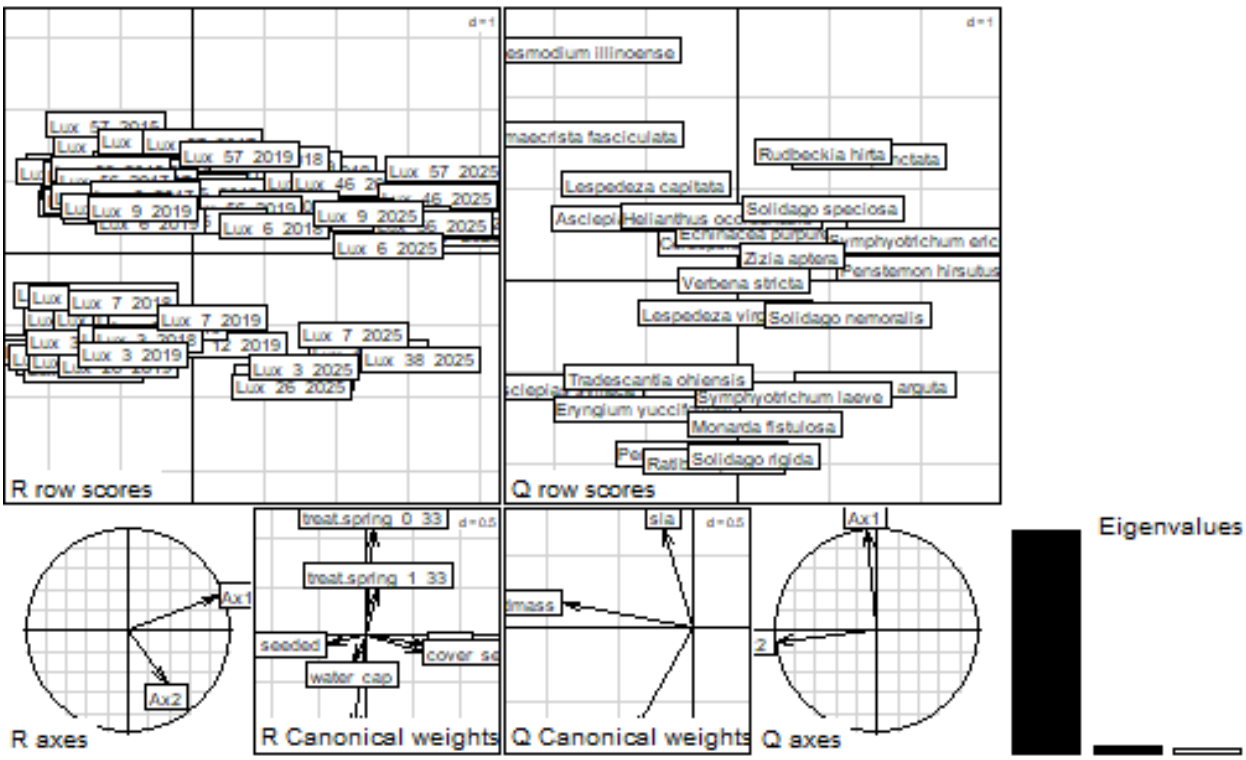


```
s.label(m_rlq$lR)
```

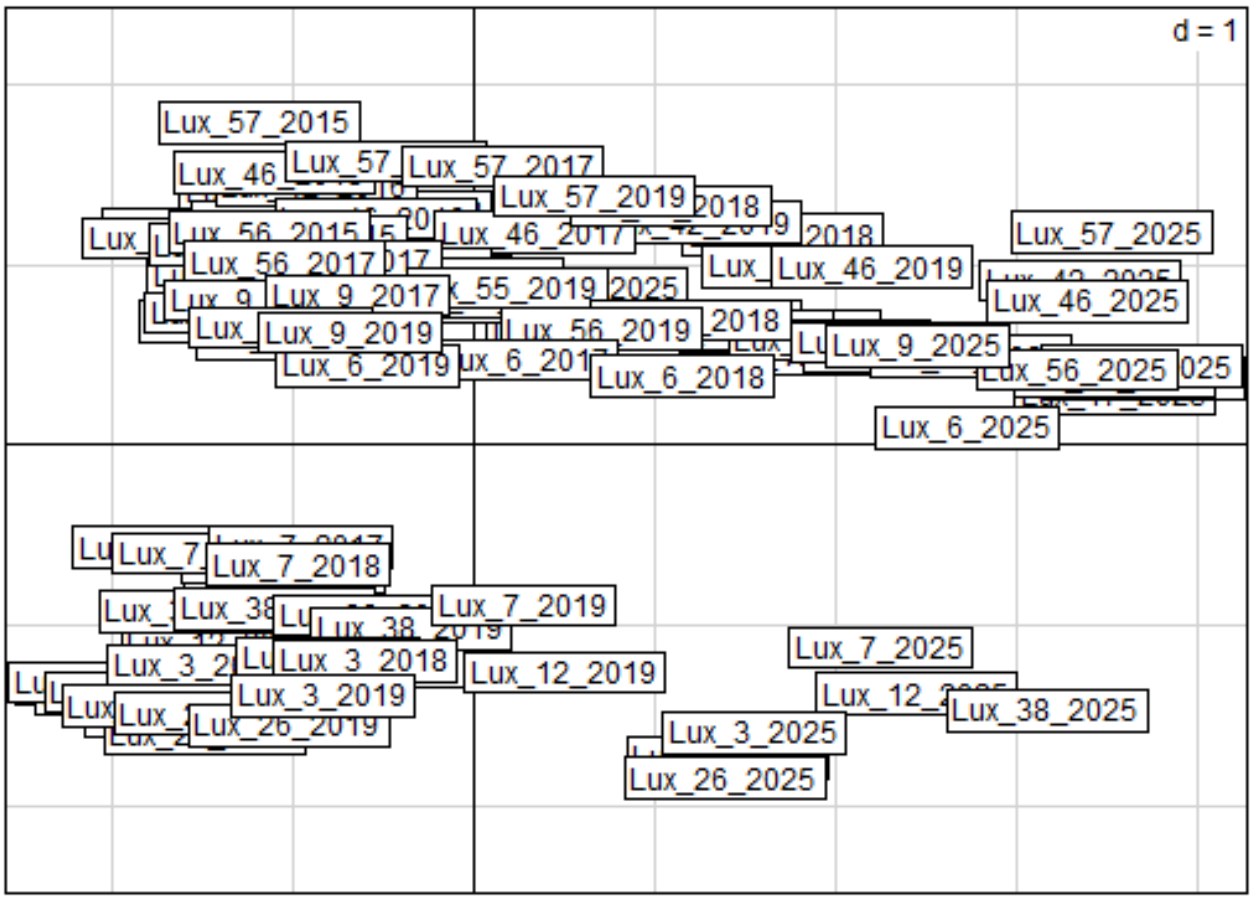


```
s.label(m_rlq$lQ)
```

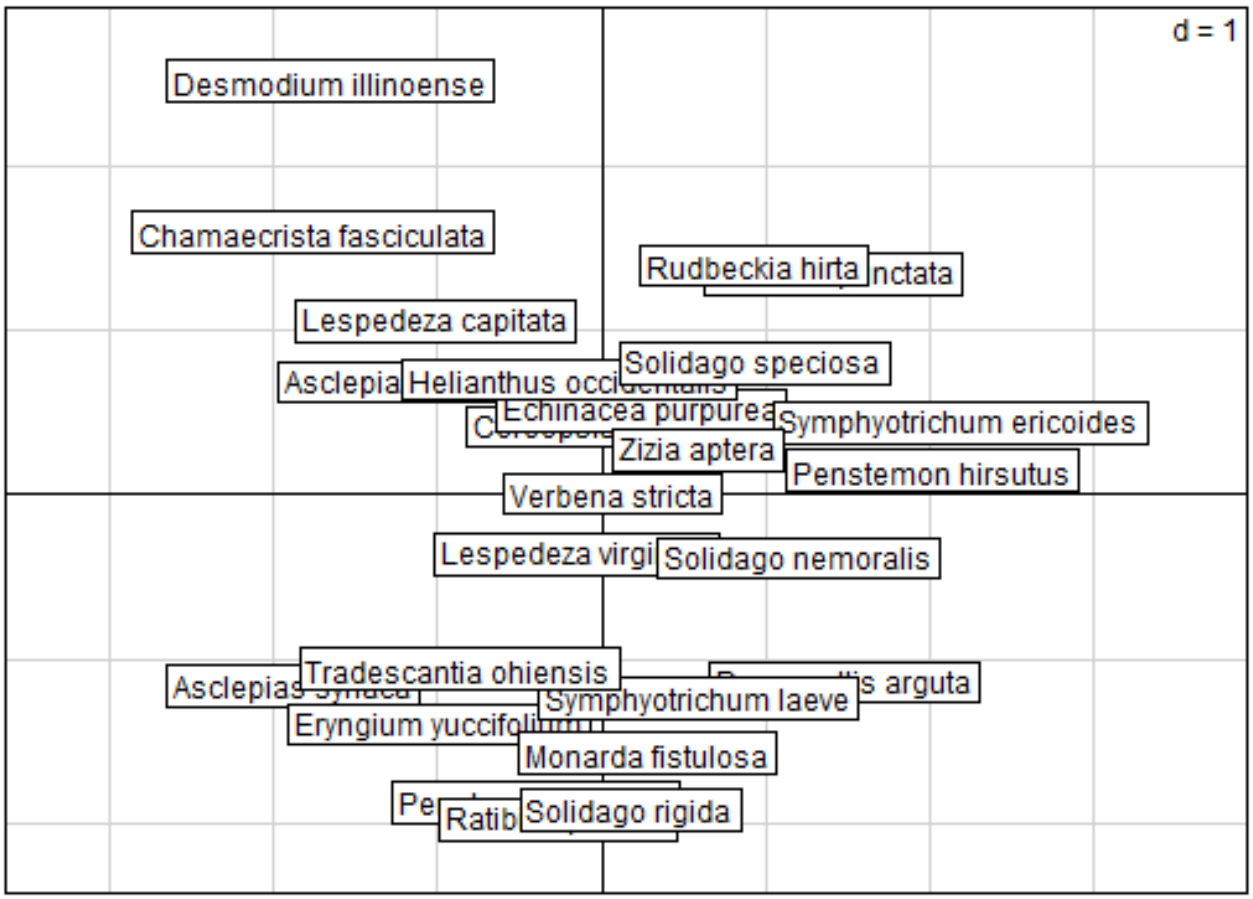


```
s.arrow(m_rlq$l1)
```

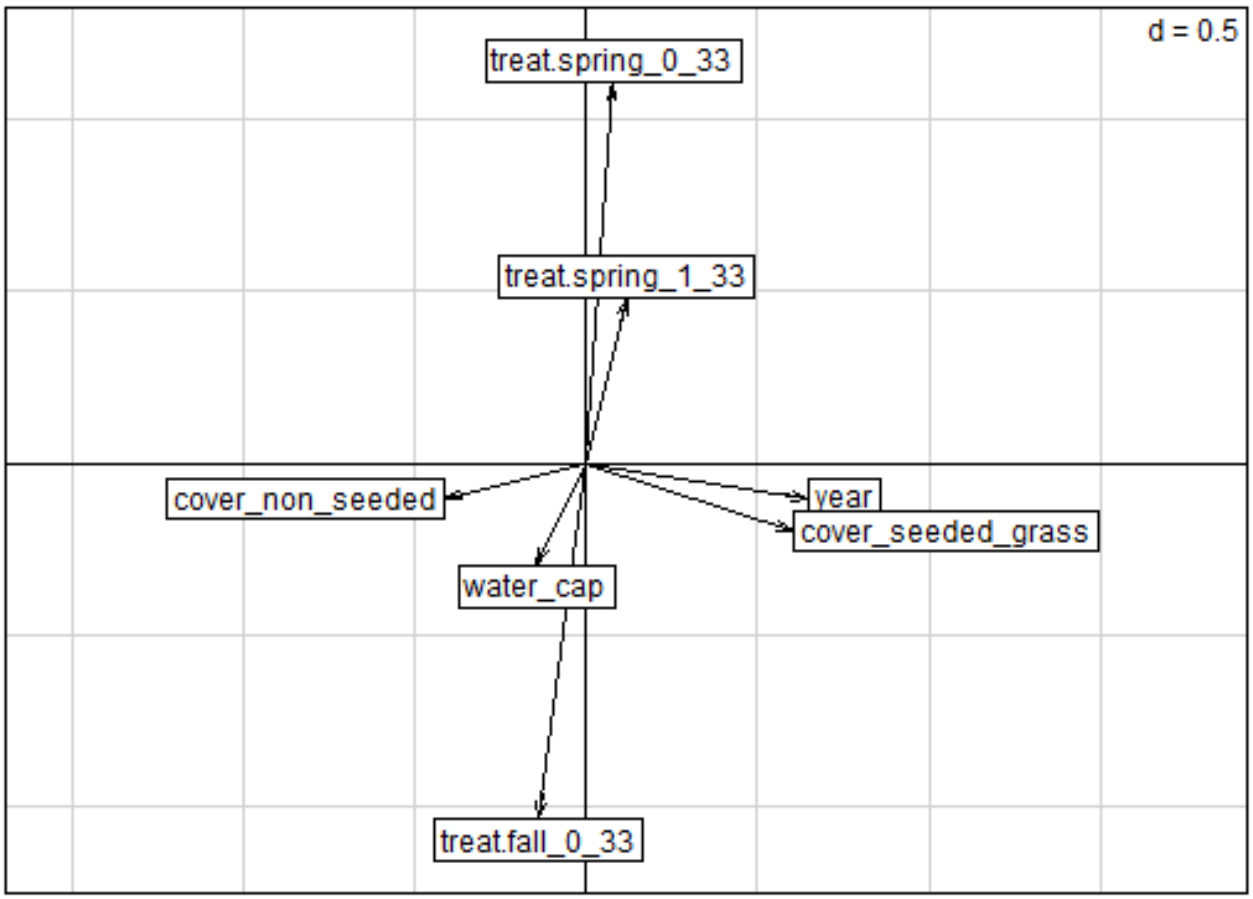


```
s.arrow(m_rlq$c1)
```

Fourth-corner analysis

```
m_4th <- fourthcorner(
  tabR = sites,
  tabL = species,
  tabQ = traits,
  modeltype = 6,
  p.adjust.method.G = "none",
  p.adjust.method.D = "none",
  nrepet = 49999
)
m_4th # non-adjusted p-values
```

```
## Fourth-corner Statistics
## ------------------------
## Permutation method  Comb. 2 and 4  ( 49999  permutations)
##
## Adjustment method for multiple comparisons:   none
## call:  fourthcorner(tabR = sites, tabL = species, tabQ = traits, modeltype = 6,      nrepet = 49999,
##
## ---
##
##                              Test   Stat         Obs     Std.Obs     Alter
## 1                     year / sla      r -0.05533594 -0.81630671 two-sided
## 2          treat.fall_0_33 / sla Homog.  0.46291643  3.85608990      less
```

```
## 3        treat.spring_0_33 / sla Homog.  0.21197951 -0.90067972      less
## 4        treat.spring_1_33 / sla Homog.  0.32387176  0.20036266      less
## 5                water_cap / sla      r -0.02126195 -0.52236039 two-sided
## 6         cover_non_seeded / sla      r  0.01710484  0.26753054 two-sided
## 7       cover_seeded_grass / sla      r -0.05771307 -0.83275284 two-sided
## 8                  year / height      r -0.09100603 -1.37141941 two-sided
## 9       treat.fall_0_33 / height Homog.  0.51498516  6.27097027      less
## 10    treat.spring_0_33 / height Homog.  0.20343729 -1.86484458      less
## 11    treat.spring_1_33 / height Homog.  0.27701487 -1.75689842      less
## 12            water_cap / height      r  0.01978769  0.45129051 two-sided
## 13     cover_non_seeded / height      r  0.05755098  0.99857703 two-sided
## 14   cover_seeded_grass / height      r -0.08164154 -1.21855313 two-sided
## 15               year / seedmass      r -0.20077237 -3.02481348 two-sided
## 16    treat.fall_0_33 / seedmass Homog.  0.39136392  2.26967122      less
## 17  treat.spring_0_33 / seedmass Homog.  0.24952784  0.05502066      less
## 18  treat.spring_1_33 / seedmass Homog.  0.35777631  1.97964036      less
## 19          water_cap / seedmass      r  0.05335722  1.26979798 two-sided
## 20   cover_non_seeded / seedmass      r  0.13280700  2.34173533 two-sided
## 21 cover_seeded_grass / seedmass      r -0.18825188 -2.84292551 two-sided
##     Pvalue
## 1  0.43138
## 2  0.99994
## 3    0.197
## 4  0.58494
## 5  0.61204
## 6  0.79906
## 7   0.4226
## 8  0.17556
## 9        1
## 10 0.03902   *
## 11  0.0384   *
## 12 0.66074
## 13 0.33158
## 14  0.2311
## 15 0.00082 ***
## 16  0.9887
## 17 0.50528
## 18 0.97824
## 19 0.21014
## 20 0.01382   *
## 21 0.00218  **
##
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
```

```r
m_4th_adj <- p.adjust.4thcorner(
  m_4th,
  p.adjust.method.G = "fdr",
  p.adjust.method.D = "fdr",
  p.adjust.D = "global"
)
m_4th_adj
```

```
## Fourth-corner Statistics
## ------------------------
```

```
## Permutation method  Comb. 2 and 4  ( 49999  permutations)
##
## Adjustment method for multiple comparisons:   fdr
## call:  fourthcorner(tabR = sites, tabL = species, tabQ = traits, modeltype = 6,      nrepet = 49999,
##
## ---
##
##                              Test   Stat         Obs     Std.Obs     Alter
## 1                      year / sla      r -0.05533594 -0.81630671 two-sided
## 2          treat.fall_0_33 / sla Homog.  0.46291643  3.85608990      less
## 3        treat.spring_0_33 / sla Homog.  0.21197951 -0.90067972      less
## 4        treat.spring_1_33 / sla Homog.  0.32387176  0.20036266      less
## 5                water_cap / sla      r -0.02126195 -0.52236039 two-sided
## 6         cover_non_seeded / sla      r  0.01710484  0.26753054 two-sided
## 7       cover_seeded_grass / sla      r -0.05771307 -0.83275284 two-sided
## 8                  year / height      r -0.09100603 -1.37141941 two-sided
## 9       treat.fall_0_33 / height Homog.  0.51498516  6.27097027      less
## 10    treat.spring_0_33 / height Homog.  0.20343729 -1.86484458      less
## 11    treat.spring_1_33 / height Homog.  0.27701487 -1.75689842      less
## 12            water_cap / height      r  0.01978769  0.45129051 two-sided
## 13     cover_non_seeded / height      r  0.05755098  0.99857703 two-sided
## 14   cover_seeded_grass / height      r -0.08164154 -1.21855313 two-sided
## 15               year / seedmass      r -0.20077237 -3.02481348 two-sided
## 16    treat.fall_0_33 / seedmass Homog.  0.39136392  2.26967122      less
## 17  treat.spring_0_33 / seedmass Homog.  0.24952784  0.05502066      less
## 18  treat.spring_1_33 / seedmass Homog.  0.35777631  1.97964036      less
## 19          water_cap / seedmass      r  0.05335722  1.26979798 two-sided
## 20   cover_non_seeded / seedmass      r  0.13280700  2.34173533 two-sided
## 21 cover_seeded_grass / seedmass      r -0.18825188 -2.84292551 two-sided
##     Pvalue        Pvalue.adj
## 1  0.43138          0.754915
## 2  0.99994                 1
## 3    0.197 0.539233333333333
## 4  0.58494          0.856856
## 5  0.61204          0.856856
## 6  0.79906 0.987074117647059
## 7   0.4226          0.754915
## 8  0.17556 0.539233333333333
## 9        1                 1
## 10 0.03902          0.163884
## 11  0.0384          0.163884
## 12 0.66074        0.86722125
## 13 0.33158          0.696318
## 14  0.2311 0.539233333333333
## 15 0.00082           0.01722 *
## 16  0.9887                 1
## 17 0.50528 0.816221538461538
## 18 0.97824                 1
## 19 0.21014 0.539233333333333
## 20 0.01382           0.09674 .
## 21 0.00218           0.02289 *
##
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
```

Plot

```r
plot(m_4th_adj, alpha = 0.05, stat = "D2")
```

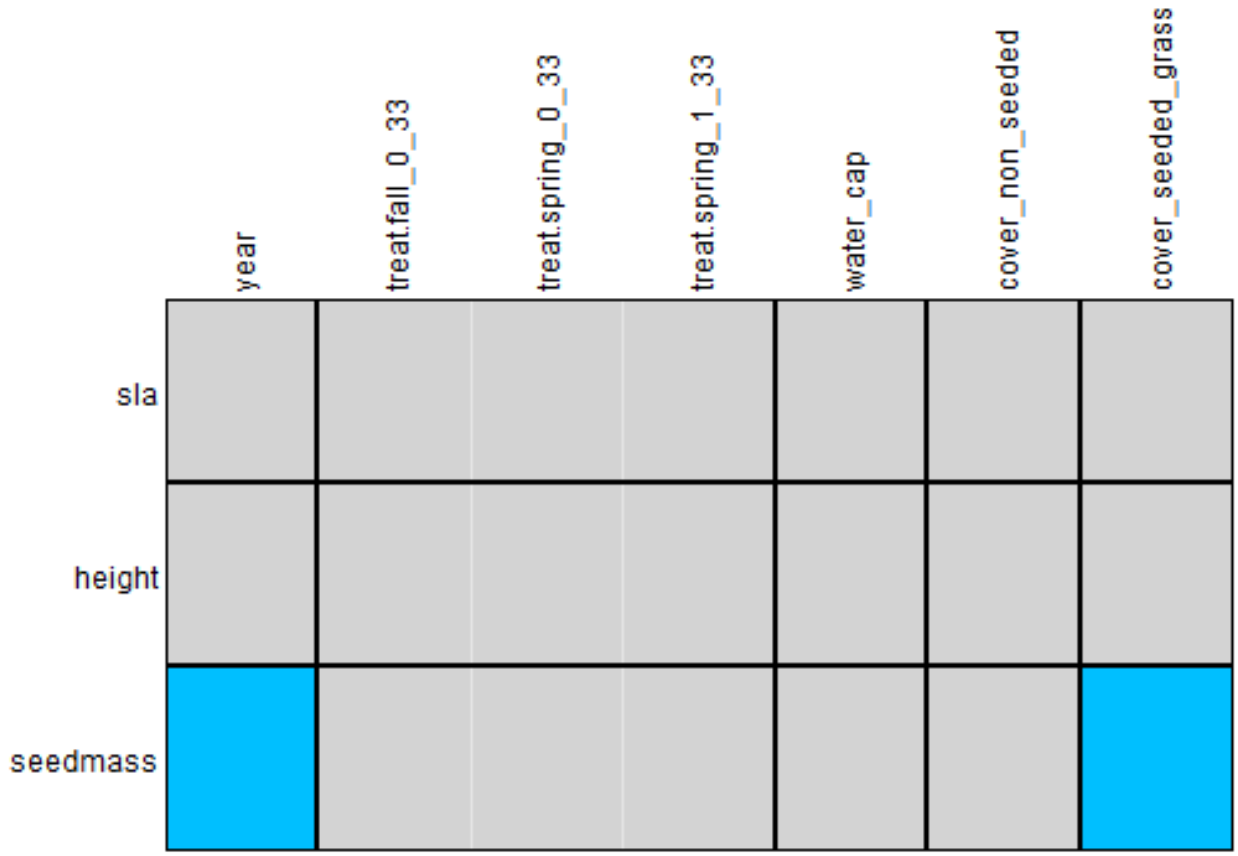


```r
plot(m_4th_adj,
  x.rlq = m_rlq,
  alpha = 0.05,
  stat = "D2",
  type = "biplot"
)
```

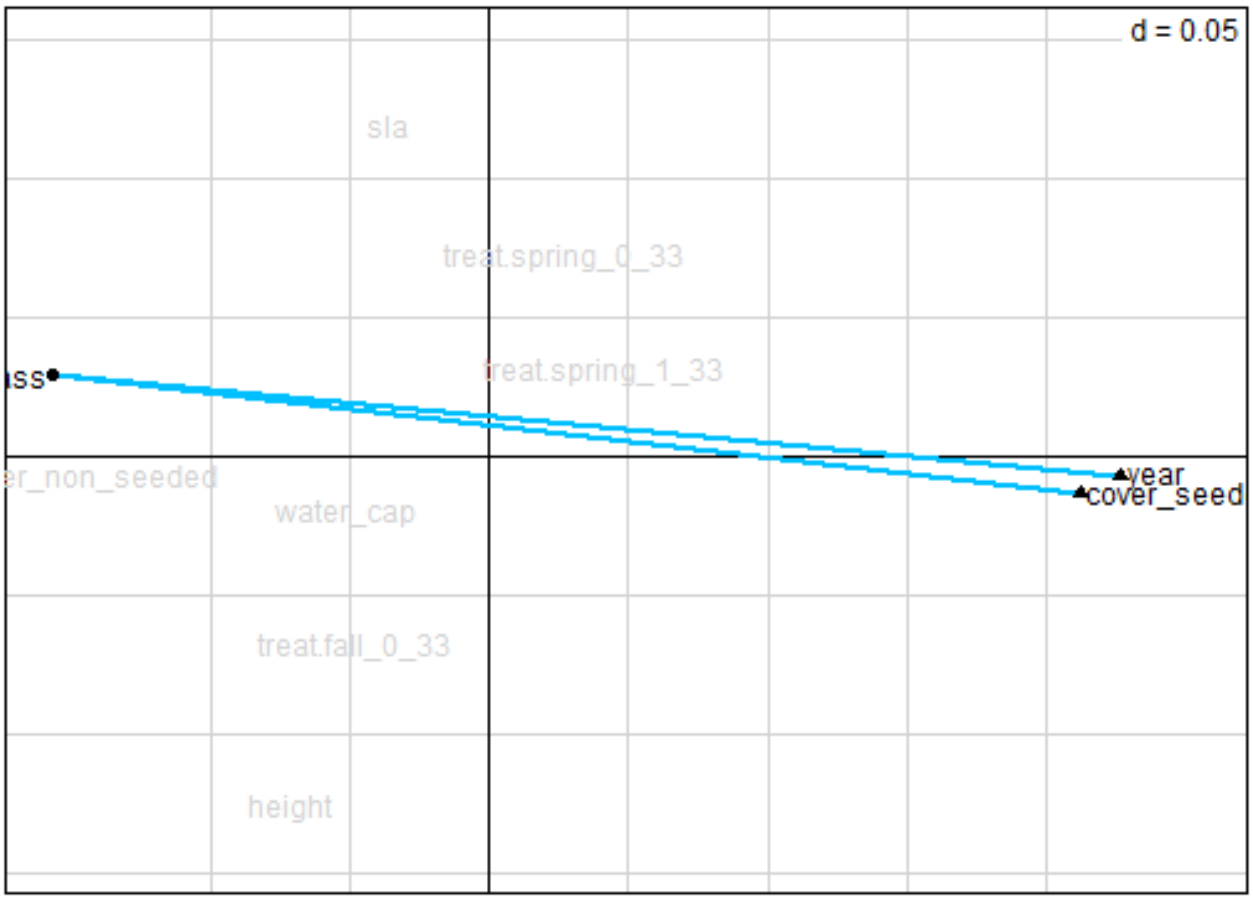

Save

Session info

```
## R version 4.5.1 (2025-06-13 ucrt)
## Platform: x86_64-w64-mingw32/x64
## Running under: Windows 11 x64 (build 26100)
##
## Matrix products: default
##   LAPACK version 3.12.1
##
## locale:
## [1] LC_COLLATE=German_Germany.utf8  LC_CTYPE=German_Germany.utf8
## [3] LC_MONETARY=German_Germany.utf8 LC_NUMERIC=C
## [5] LC_TIME=German_Germany.utf8
##
## time zone: America/New_York
## tzcode source: internal
##
## attached base packages:
## [1] stats     graphics  grDevices utils     datasets  methods   base
##
## other attached packages:
##  [1] ade4_1.7-23     lubridate_1.9.4 forcats_1.0.0   stringr_1.5.1
```

```
##  [5] dplyr_1.1.4     purrr_1.1.0     readr_2.1.5     tidyr_1.3.1
##  [9] tibble_3.3.0    ggplot2_3.5.2   tidyverse_2.0.0 here_1.0.1
## [13] tinytex_0.57
##
## loaded via a namespace (and not attached):
##  [1] bit_4.6.0          gtable_0.3.6       crayon_1.5.3       compiler_4.5.1
##  [5] Rcpp_1.1.0         tidyselect_1.2.1   parallel_4.5.1     scales_1.4.0
##  [9] yaml_2.3.10        fastmap_1.2.0      R6_2.6.1           generics_0.1.4
## [13] knitr_1.50         MASS_7.3-65        rprojroot_2.0.4    pillar_1.11.0
## [17] RColorBrewer_1.1-3 tzdb_0.5.0         rlang_1.1.6        utf8_1.2.6
## [21] stringi_1.8.7      xfun_0.52          bit64_4.6.0-1      timechange_0.3.0
## [25] cli_3.6.5          withr_3.0.2        magrittr_2.0.3     digest_0.6.37
## [29] grid_4.5.1         vroom_1.6.5        rstudioapi_0.17.1  hms_1.1.3
## [33] lifecycle_1.0.4    vctrs_0.6.5        evaluate_1.0.4     glue_1.8.0
## [37] farver_2.1.2       rmarkdown_2.29     tools_4.5.1        pkgconfig_2.0.3
## [41] htmltools_0.5.8.1
```