

# A Test of integrating bookdown with Travis CI

Markus Meister

2020-03-06



# Contents

<b>1</b>	<b>Prerequisites</b>	<b>5</b>
<b>2</b>	<b>Equations</b>	<b>7</b>
2.1	Inline equations . . . . .	7
2.2	Display equations . . . . .	7
2.3	Equation labels . . . . .	7
2.4	Equation numbering . . . . .	8
2.5	Multi-line equation with multiple labels . . . . .	9
<b>3</b>	<b>Python</b>	<b>11</b>
3.1	A normal R code chunk . . . . .	11
3.2	Modify an R variable . . . . .	11
3.3	A Python chunk . . . . .	11
3.4	Modify a Python variable . . . . .	12
3.5	Python graphics . . . . .	12



# Chapter 1

## Prerequisites

```
# connect to python  
library(reticulate)  
matplotlib <- import("matplotlib")  
matplotlib$use("Agg", force = TRUE) # backend that doesn't expect a display
```



## Chapter 2

# Equations

### 2.1 Inline equations

...are enclosed by simple `$` `$`, like this:

```
\tilde h(\omega) = \int_{-\infty}^{\infty} e^{i\omega t'} h(t') \, dt', $
```

which produces this output:  $\tilde{h}(\omega) = \int_{-\infty}^{\infty} e^{i\omega t'} h(t') dt'$ .

### 2.2 Display equations

...without numbers can be enclosed by double `$$` `$$`, like this:

```
$$\tilde h(\omega) = \int_{-\infty}^{\infty} e^{i\omega t'} h(t') \, dt', .$$
```

which produces

$$\tilde{h}(\omega) = \int_{-\infty}^{\infty} e^{i\omega t'} h(t') dt'.$$

### 2.3 Equation labels

To label an equation with `name` use the format `(\#eq:name)`. To cite that equation use the format `\@ref{eq:name}`

The equation label has to appear after the body of the equation code, like this:

```
\begin{equation}
  \tilde h(\omega) = \int_{-\infty}^{\infty} e^{i\omega t'} h(t') \, dt'
  (\#eq:binom)
\end{equation}
```

$$\tilde{h}(\omega) = \int_{-\infty}^{\infty} e^{i\omega t'} h(t') dt' \quad (2.1)$$

```
\begin{equation}
f\left(k\right)=\binom{n}{k}p^k\left(1-p\right)^{n-k} (\#eq:binom2)
\end{equation}
```

$$f(k) = \binom{n}{k} p^k (1-p)^{n-k} \quad (2.2)$$

Then you can cite the equation, like this: (2.1).

Changed this 5:11PM.

## 2.4 Equation numbering

There is some weirdness about how equation numbering is handled in the PDF versus the HTML versions of the book.

In the PDF output equations are numbered by default. Every line of an equation will get numbered except if it

1. is inside `$$` `$$`.
2. has `\notag` at the end of line, before the `\\`.
3. is in an `{equation*}` or `{align*}` environment where there are no labels
4. is in a `{split}` environment with a single label

But in the HTML output an equation is unnumbered by default, except if it contains an explicit equation label. For more details see [here](#).

So, to make sure we get the same numbering in PDF and HTML we should do this:

**An unnumbered display equation** should be enclosed with `$$` `$$` or in environments `{equation*}` or `{align*}`.

**A numbered display equation** should include a single label.

Here are some examples:

This equation will get a number in PDF but not in HTML, **which is a mistake!**

$$\tilde{h}(\omega) = \int_{-\infty}^{\infty} e^{i\omega t'} h(t') dt' \quad (2.3)$$

This gets no number in PDF or HTML:



$$\tilde{h}(\omega) = \int_{-\infty}^{\infty} e^{i\omega t'} h(t') dt'$$

And this gets a number in both PDF and HTML:

$$\tilde{h}(\omega) = \int_{-\infty}^{\infty} e^{i\omega t'} h(t') dt' \quad (2.4)$$

## 2.5 Multi-line equation with multiple labels

Here is a long equation stretching over several lines, first with a single number

$$\begin{aligned} \text{Var}(\hat{\beta}) &= \text{Var}((X'X)^{-1}X'y) \\ &= (X'X)^{-1}X'\text{Var}(y)((X'X)^{-1}X')' \\ &= (X'X)^{-1}X'\text{Var}(y)X(X'X)^{-1} \\ &= (X'X)^{-1}X'\sigma^2IX(X'X)^{-1} \\ &= (X'X)^{-1}\sigma^2 \end{aligned} \quad (2.5)$$

...then with multiple numbers

$$\begin{aligned} \text{Var}(\hat{\beta}) &= \text{Var}((X'X)^{-1}X'y) \\ &= (X'X)^{-1}X'\text{Var}(y)((X'X)^{-1}X')' & (2.6) \\ &= (X'X)^{-1}X'\text{Var}(y)X(X'X)^{-1} & (2.7) \\ &= (X'X)^{-1}X'\sigma^2IX(X'X)^{-1} & (2.8) \\ &= (X'X)^{-1}\sigma^2 & (2.9) \end{aligned}$$

I wrote some grep routines that produce automatic equation labels, for example in the study guide which contains several hundred equations. Every one of those has a label, even though we rarely cite those labels.



## Chapter 3

# Python

### 3.1 A normal R code chunk

```
x = 42
print(x)

## [1] 42
```

### 3.2 Modify an R variable

In the following chunk, the value of `x` on the right hand side is 42, which was defined in the previous chunk.

```
x = x + 12
print(x)

## [1] 54
```

### 3.3 A Python chunk

This works fine and as expected.

```
print('Python version = ', sys.version)

## Python version = 3.5.2 (default, Nov 12 2018, 13:43:14)
## [GCC 5.4.0 20160609]

x = 42 * 2
print(x)

## 84
```

The value of `x` in the Python session is 84. It is not the same `x` as the one in R.

### 3.4 Modify a Python variable

```
x = x + 18  
print(x)
```

```
## 102
```

Retrieve the value of `x` from the Python session again:

```
py$x
```

```
## [1] 102
```

Assign to a variable in the Python session from R:

```
py$y = 1:5
```

See the value of `y` in the Python session:


```
print(y)
```

```
## [1, 2, 3, 4, 5]
```

### 3.5 Python graphics

You can draw plots using the **matplotlib** package in Python.

```
import matplotlib.pyplot as plt  
plt.plot([0, 2, 1, 4])  
plt.show()
```

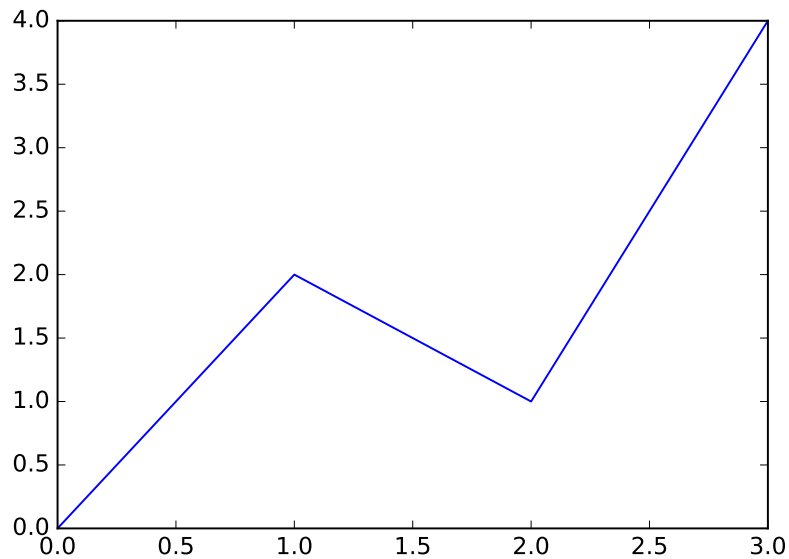

But doing the same with a figure caption fails to build on Travis CI (as of 3/4/2020):

```
```{python testfig1, echo=FALSE, out.width='33%', fig.align='center', fig.cap = 'A figure from Python code'}
plt.plot([0, 2, 1, 4])
plt.show()
```
```




Figure 3.1: A figure from Python code

The error log from Travis CI is

```
label: testfig1 (with options)
1321List of 5
1322 $ echo      : chr "FALSE"
1323 $ out.width: chr "33%"
1324 $ fig.align: chr "center"
1325 $ fig.cap  : chr "A figure from Python code"
1326 $ engine   : chr "python"
```

1327

1328 Quitting from lines 260-262 (bookdown-demo.Rmd)

1329 Error in if (options\$fig.num > 1L && options\$fig.show == "asis") options\$fig.cur :

1330 missing value where TRUE/FALSE needed

Using an R chunk to insert a figure with caption works fine:

```
```{r testfig2, echo=FALSE, out.width='33%', fig.align='center', fig.cap='A figure from  
knitr::include_graphics('img/testfig1.pdf')  
```
```




Figure 3.2: A figure from a PDF file.