

ABHI TAK HUM JO COMPONENT USE KARTE
THE .. IT WAS LIKE
<CARD/>

BUT HERE WE ARE DOING
<CARD> .. </CARD>

MEANS AB HUM USER CREATED COMPONENT
KO PROPER TAG KI TARAH KAAM KARNA SEEKH
RAHE HEIN

WO EK NON ENDING TAG NAHI HAI...
YEH AB INPUT TAG JAISA NAHI DIKHTA
BALKI DIV TAG JAISA DIKHTA HAI

```
import './App.css'
import Card from './components/card'

function App() {

  return (
    <div>
      <Card name = "bansal ji">
        <h1>hello learner</h1>
        <p>you should focus</p>
      </Card>
      <Card name = "adit">
      </div>
    )
  }

  export default App
```

```
understanding_react > props_as_children > s
import React from 'react'

const Card = (props) => {
  return (
    <div className='card'>
      <p> hello {props.name}</p>
      {props.children}
    </div>
  )
}

export default Card
```

hello bansal ji

hello learner

you should focus

#REMEMBER

#prop.children jab bhi use Karen ... TOH DIV KE ANDER USE KAREIN YAA AKELA USE KAREIN

```
{props.children}
```

```
<div className='hello'>{props.children}</div>
```

KYUNKI PROPS.CHILDREN TOH KHUD EK TAG HAI TOH USKO SIRF DIV KE ANDER HI RAKHNA HAI....

TALKING ABOUT CSS


AAP CSS KAHI BHI APPLY KAR SAKTE HEIN , WHETHER IN CARD OR IN APP AGAR CARD KE ANDER CSS LAGANI HAI ... TOH EK DIV KE ANDER PROPS. CHILD LIKH DO AUR USS DIV KI CSS BANADO

AGAR APP M EIN LAGANI HAI TAB TOH JO BHI PARA YAA H1 BANAYA HAI USSI MEIN DEDO

##


AGAR MAIEN EK CLOSING TAG NA BANAKE EK SIMPLE SINGULAR WALA TAG BANAYA AUR FIR USKE ANDER CHILDREN = "" KAR DIYA AUR PHIR ISKO CARD.JSX MEIN PROPS.CHILDREN LIKH DIYA TOH WO BHI CHAL PADEGA ERROR NAHI DEGA

HOW USESTATE AND PROPS AS CHILDREN ARE USED TOGETHER

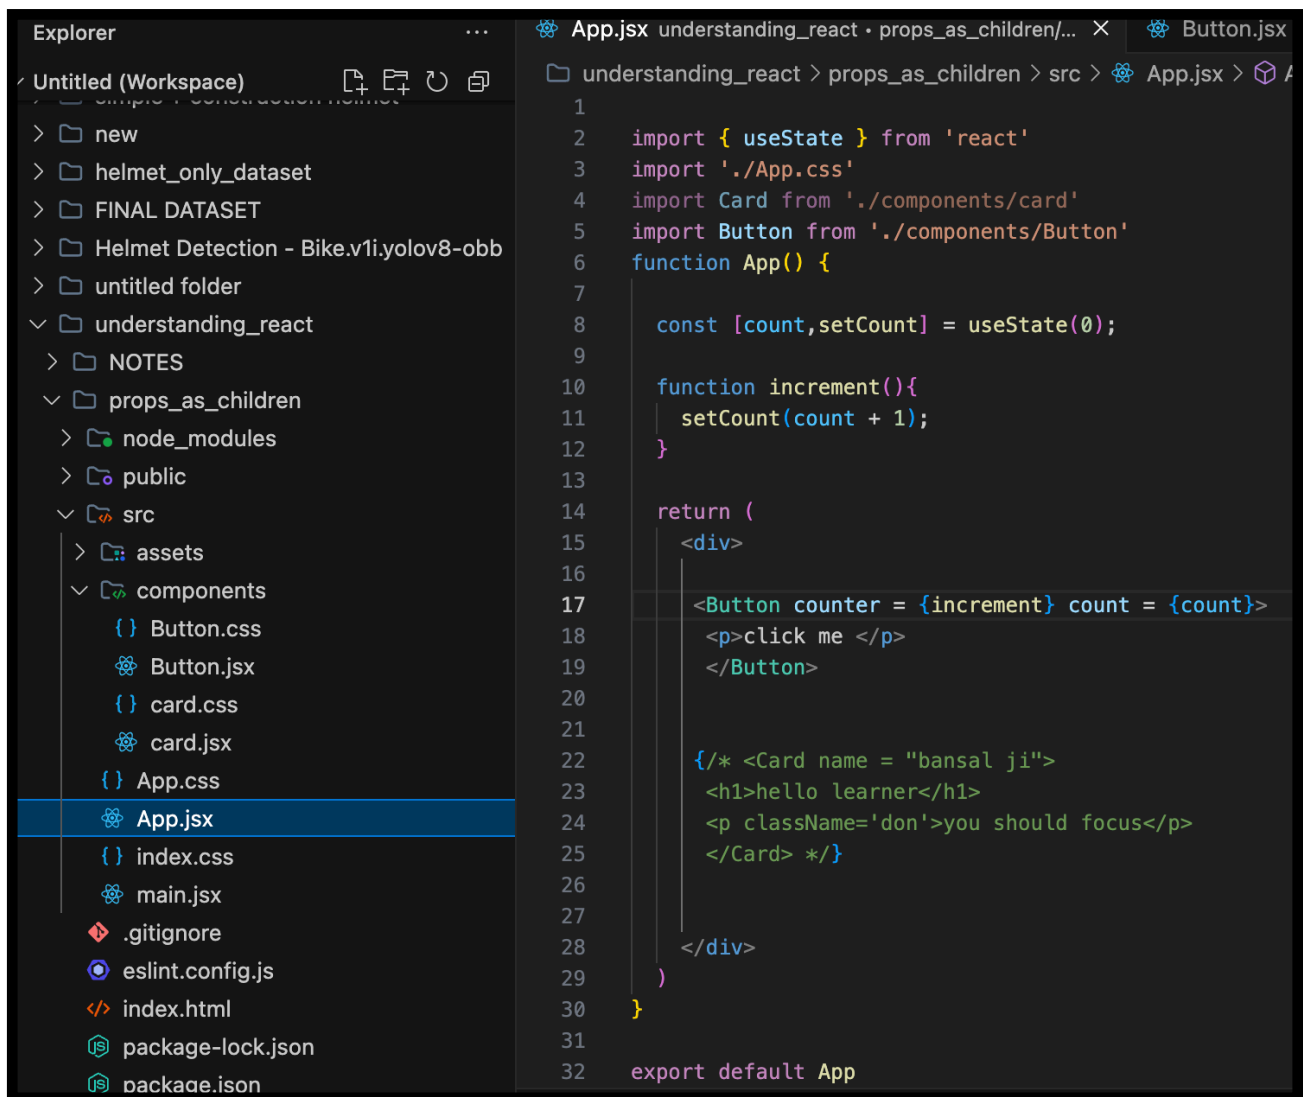

This screenshot shows the VS Code editor with the Explorer sidebar on the left and the App.jsx file open in the main editor. The Explorer sidebar shows a project structure with folders like 'new', 'helmet_only_dataset', 'FINAL DATASET', 'Helmet Detection - Bike.v1i.yolov8-obbb', 'untitled folder', 'understanding_react', 'NOTES', 'props_as_children', 'node_modules', 'public', and 'src'. The 'src' folder is expanded, showing subfolders 'assets' and 'components', and files like 'App.css', 'App.jsx', 'index.css', 'main.jsx', '.gitignore', 'eslint.config.js', 'index.html', 'package-lock.json', and 'package.json'. The 'App.jsx' file is selected. The main editor shows the code for App.jsx, which imports useState from 'react', imports './App.css', and imports Card from './components/card' and Button from './components/Button'. The App function uses useState to create a count state and an increment function. It returns a JSX element with a Button and a Card component. The Button has a counter prop set to the increment function and a count prop set to the count state. The Card has a name prop set to 'bansal ji' and a className prop set to 'don'. The Card contains a heading 'hello learner' and a paragraph 'you should focus'.

```
1
2 import { useState } from 'react'
3 import './App.css'
4 import Card from './components/card'
5 import Button from './components/Button'
6 function App() {
7
8     const [count, setCount] = useState(0);
9
10    function increment(){
11        setCount(count + 1);
12    }
13
14    return (
15        <div>
16
17            <Button counter = {increment} count = {count}>
18                <p>click me </p>
19            </Button>
20
21            <Card name = "bansal ji">
22                <h1>hello learner</h1>
23                <p className='don'>you should focus</p>
24            </Card> </>
25
26        </div>
27    )
28
29 }
30
31
32 export default App
```

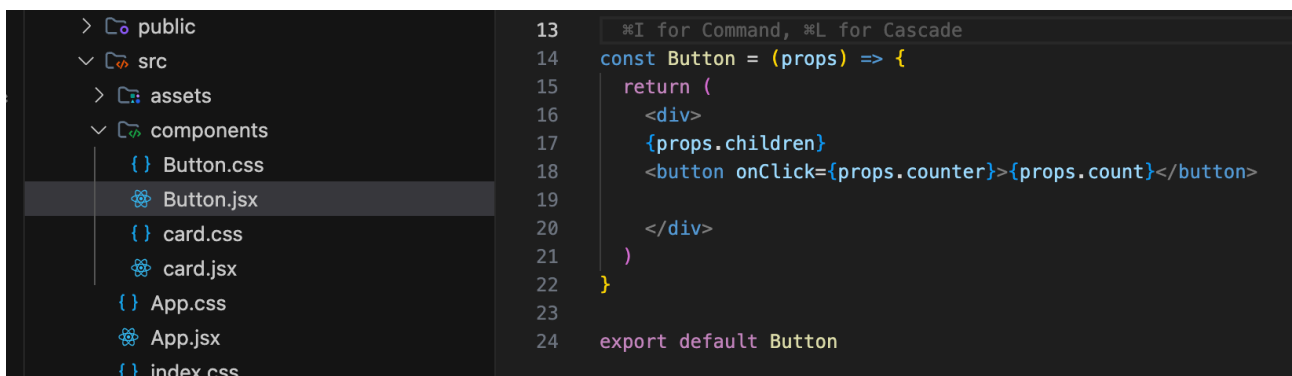

This screenshot shows the VS Code editor with the Explorer sidebar on the left and the Button.jsx file open in the main editor. The Explorer sidebar shows the same project structure as the previous screenshot, but the 'Button.jsx' file is selected. The main editor shows the code for Button.jsx, which defines a Button component that takes props and returns a JSX element. The Button component has a single prop 'children' and a 'counter' prop. It returns a JSX element with a button that has an onClick prop set to the counter prop and a 'count' prop. The button contains the children prop.

```
13 *I for Command, *L for Cascade
14 const Button = (props) => {
15     return (
16         <div>
17             {props.children}
18             <button onClick={props.counter}>{props.count}</button>
19
20         </div>
21     )
22 }
23
24 export default Button
```

THODA EHE DHYAAN RAKHO KI PROSP CH
FUNCTION LAYI TE N NORMAL LAYI ...
DIFFERENT DOUBLE QUOTES TE BRACKETS NE
..... FUNCTION LAYI {} USE HO REHA

