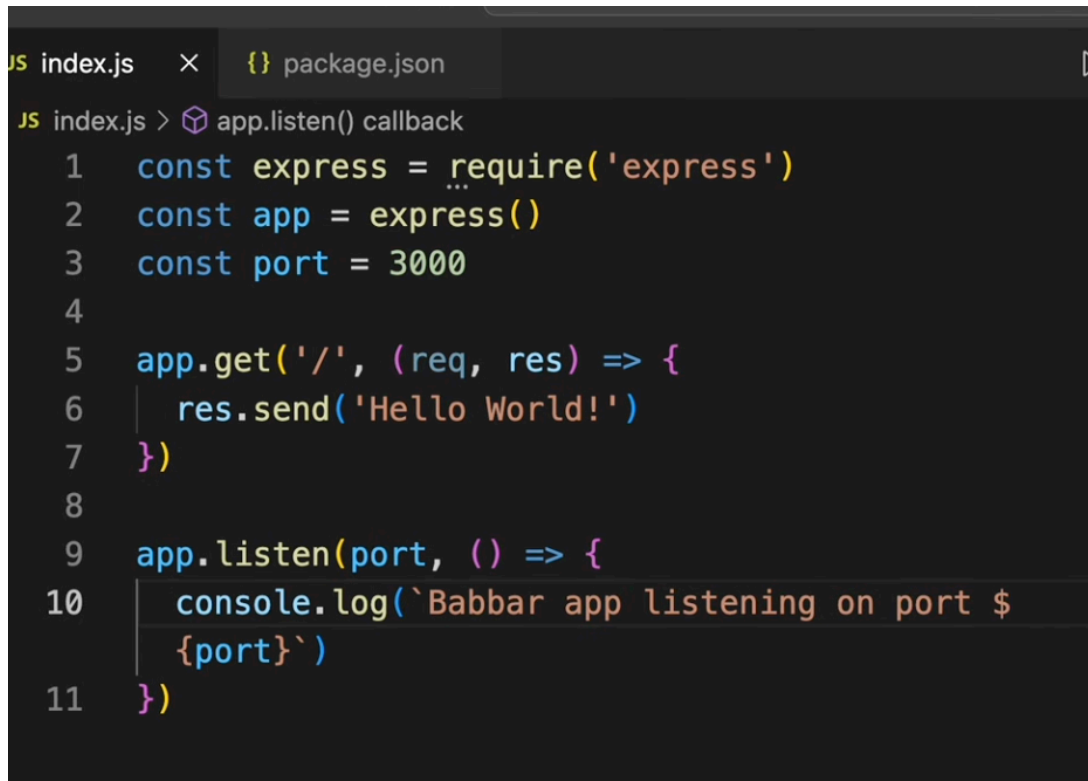


NODEMON == RESTART AUTOMATICALLY WHEN CHANGES ARE MADE IN AN APPLICATION.

BASIC BACKEND APP..


A screenshot of a code editor with a dark theme. The editor has two tabs at the top: 'index.js' and 'package.json'. The 'index.js' tab is active, showing a JavaScript file. The code is as follows:

```
1  const express = require('express')
2  const app = express()
3  const port = 3000
4
5  app.get('/', (req, res) => {
6    res.send('Hello World!')
7  })
8
9  app.listen(port, () => {
10    console.log(`Babbar app listening on port $
    {port}`)
11  })
```

JO AAKHIR LINE HAI YEH TOH NORMAL HAE CODE MEIN LIKHNI HOTI HAI , LISTENING TO PORT .

JO APP .GET WALI HAI , MATLAB AGAR , URL MEIN / WALA PATH HIT KIYA TOH HELLO WORLD KA RESPONSE JAYEGA .

Requests:-

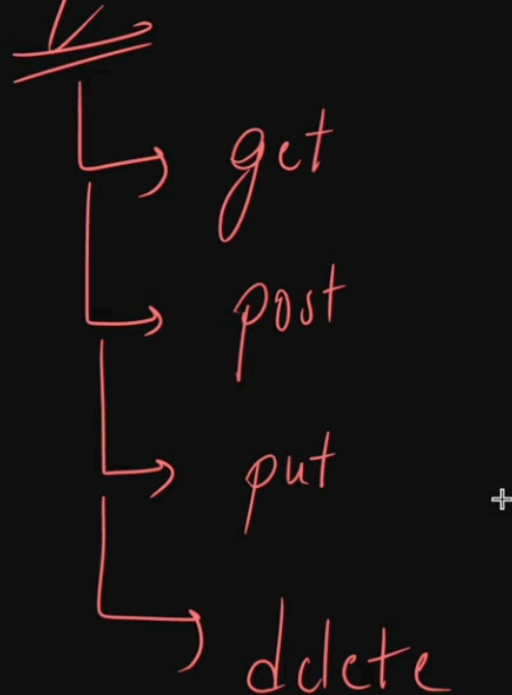

```
app.get('/users', (req, res) => {  
  // Return all users  
});  
  
app.post('/users', (req, res) => {  
  // Create a new user  
});  
  
app.put('/users/:id', (req, res) => {  
  // Update user with given ID  
});  
  
app.delete('/users/:id', (req, res) => {  
  // Delete user with given ID  
});
```

EK ROUTE KE UPAR CHAARO TAREEKE KI EK HI REQUEST HO SAKTI HEIN .

NOT ONLY STRINGS BUT OTHER THINGS CAN ALSO BE USED .

<code>res.download()</code>	Prompt a file to be downloaded.
<code>res.end()</code>	End the response process.
<code>res.json()</code>	Send a JSON response.
<code>res.jsonp()</code>	Send a JSON response with JSONP support.
<code>res.redirect()</code>	Redirect a request.
<code>res.render()</code>	Render a view template.
<code>res.send()</code>	Send a response of various types.
<code>res.sendFile()</code>	Send a file as an octet stream.
<code>res.sendStatus()</code>	Set the response status code and send its string representation as the response body.
