

# Lab 14: RNA-Seq analysis mini-project

Marriane Allahwerdi (A16902759)

Today we will complete an RNASeq analysis from counts to pathways.

We will work with data on differential analysis of lung fibroblasts in response to loss of the developmental transcription factor HOXA1.

## Data Import

```
library(DESeq2)
```

```
Loading required package: S4Vectors
```

```
Loading required package: stats4
```

```
Loading required package: BiocGenerics
```

```
Attaching package: 'BiocGenerics'
```

```
The following objects are masked from 'package:stats':
```

```
IQR, mad, sd, var, xtabs
```

```
The following objects are masked from 'package:base':
```

```
anyDuplicated, aperm, append, as.data.frame, basename, cbind,  
colnames, dirname, do.call, duplicated, eval, evalq, Filter, Find,  
get, grep, grepl, intersect, is.unsorted, lapply, Map, mapply,  
match, mget, order, paste, pmax, pmax.int, pmin, pmin.int,  
Position, rank, rbind, Reduce, rownames, sapply, saveRDS, setdiff,  
table, tapply, union, unique, unsplit, which.max, which.min
```

Attaching package: 'S4Vectors'

The following object is masked from 'package:utils':

findMatches

The following objects are masked from 'package:base':

expand.grid, I, unname

Loading required package: IRanges

Loading required package: GenomicRanges

Loading required package: GenomeInfoDb

Loading required package: SummarizedExperiment

Loading required package: MatrixGenerics

Loading required package: matrixStats

Attaching package: 'MatrixGenerics'

The following objects are masked from 'package:matrixStats':

colAlls, colAnyNAs, colAnys, colAvgsPerRowSet, colCollapse,  
colCounts, colCummaxs, colCummins, colCumprods, colCumsums,  
colDiffs, colIQRDiffs, colIQRs, colLogSumExps, colMadDiffs,  
colMads, colMaxs, colMeans2, colMedians, colMins, colOrderStats,  
colProds, colQuantiles, colRanges, colRanks, colSdDiffs, colSds,  
colSums2, colTabulates, colVarDiffs, colVars, colWeightedMads,  
colWeightedMeans, colWeightedMedians, colWeightedSds,  
colWeightedVars, rowAlls, rowAnyNAs, rowAnys, rowAvgsPerColSet,  
rowCollapse, rowCounts, rowCummaxs, rowCummins, rowCumprods,  
rowCumsums, rowDiffs, rowIQRDiffs, rowIQRs, rowLogSumExps,  
rowMadDiffs, rowMads, rowMaxs, rowMeans2, rowMedians, rowMins,

```
rowOrderStats, rowProds, rowQuantiles, rowRanges, rowRanks,  
rowSdDiffs, rowSds, rowSums2, rowTabulates, rowVarDiffs, rowVars,  
rowWeightedMads, rowWeightedMeans, rowWeightedMedians,  
rowWeightedSds, rowWeightedVars
```

Loading required package: Biobase

Welcome to Bioconductor

Vignettes contain introductory material; view with  
'browseVignettes()'. To cite Bioconductor, see  
'citation("Biobase")', and for packages 'citation("pkgname")'.

Attaching package: 'Biobase'

The following object is masked from 'package:MatrixGenerics':

```
rowMedians
```

The following objects are masked from 'package:matrixStats':

```
anyMissing, rowMedians
```

```
metaFile <- "GSE37704_metadata.csv"  
countFile <- "GSE37704_featurecounts.csv"  
  
metadata = read.csv(metaFile, row.names=1)  
head(metadata)
```

```
              condition  
SRR493366 control_sirna  
SRR493367 control_sirna  
SRR493368 control_sirna  
SRR493369      hoxa1_kd  
SRR493370      hoxa1_kd  
SRR493371      hoxa1_kd
```

```
metadata <- read.csv("GSE37704_metadata.csv")
metadata$id
```

```
[1] "SRR493366" "SRR493367" "SRR493368" "SRR493369" "SRR493370" "SRR493371"
```

```
countData = read.csv(countFile, row.names=1)
head(countData)
```

	length	SRR493366	SRR493367	SRR493368	SRR493369	SRR493370
ENSG00000186092	918	0	0	0	0	0
ENSG00000279928	718	0	0	0	0	0
ENSG00000279457	1982	23	28	29	29	28
ENSG00000278566	939	0	0	0	0	0
ENSG00000273547	939	0	0	0	0	0
ENSG00000187634	3214	124	123	205	207	212
	SRR493371					
ENSG00000186092	0					
ENSG00000279928	0					
ENSG00000279457	46					
ENSG00000278566	0					
ENSG00000273547	0					
ENSG00000187634	258					

```
colnames(counts)
```

```
NULL
```

We need to remove the first “length column from our counts.

```
# Note we need to remove the odd first $length col
countData <- countData[,-1]
colnames(countData) == metadata$id
```

```
[1] TRUE TRUE TRUE TRUE TRUE TRUE
```

```
to.keep <- rowSums(countData) != 0
countData <- countData[to.keep,]
```

Q. How many genes do we have left?

```
nrow(countData)
```

```
[1] 15975
```

## DESeq Import

```
library(DESeq2)
```

## DESeq setup

```
dds <- DESeqDataSetFromMatrix(countData = countData,  
                              colData = metadata,  
                              design = ~condition)
```

Warning in DESeqDataSet(se, design = design, ignoreRank): some variables in design formula are characters, converting to factors

## DESeq analysis

```
dds <- DESeq(dds)
```

estimating size factors

estimating dispersions

gene-wise dispersion estimates

mean-dispersion relationship

final dispersion estimates

fitting model and testing

```
res <- results(dds)
```

```
head(res)
```

log2 fold change (MLE): condition hoxa1 kd vs control sirna

Wald test p-value: condition hoxa1 kd vs control sirna

DataFrame with 6 rows and 6 columns

	baseMean	log2FoldChange	lfcSE	stat	pvalue
	<numeric>	<numeric>	<numeric>	<numeric>	<numeric>
ENSG00000279457	29.9136	0.1792571	0.3248216	0.551863	5.81042e-01
ENSG00000187634	183.2296	0.4264571	0.1402658	3.040350	2.36304e-03
ENSG00000188976	1651.1881	-0.6927205	0.0548465	-12.630158	1.43989e-36
ENSG00000187961	209.6379	0.7297556	0.1318599	5.534326	3.12428e-08
ENSG00000187583	47.2551	0.0405765	0.2718928	0.149237	8.81366e-01
ENSG00000187642	11.9798	0.5428105	0.5215599	1.040744	2.97994e-01
	padj				
	<numeric>				
ENSG00000279457	6.86555e-01				
ENSG00000187634	5.15718e-03				
ENSG00000188976	1.76549e-35				
ENSG00000187961	1.13413e-07				
ENSG00000187583	9.19031e-01				
ENSG00000187642	4.03379e-01				


## Result visualization

```
mycols <- rep("gray", nrow(res))

mycols[ abs(res$log2FoldChange) > 2 ] <- "red"

inds <- (res$padj < 0.01) & (abs(res$log2FoldChange) > 2)
mycols[ inds ] <- "blue"

plot(res$log2FoldChange, -log10(res$padj), col=mycols,
      xlab="Log2(FoldChange)", ylab="-Log10(P-value)")
```

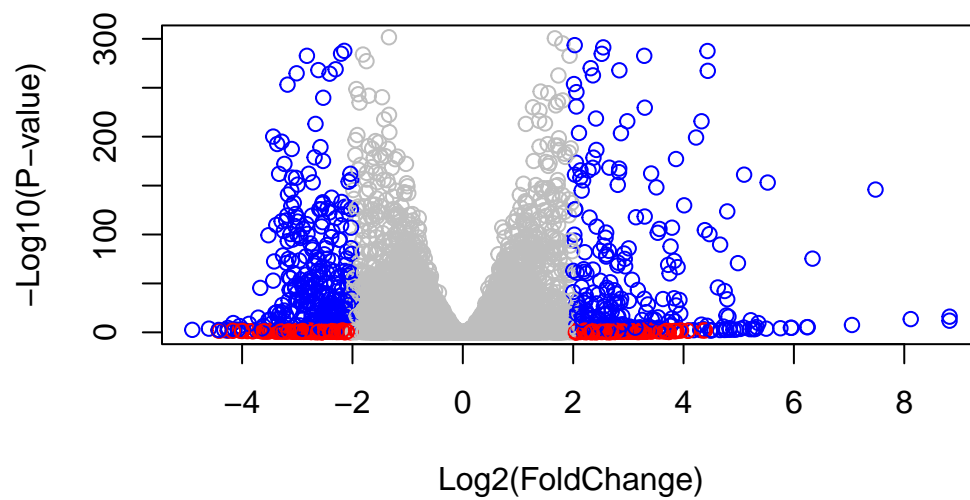

## Add Annotation

```
library(AnnotationDbi)
library(org.Hs.eg.db)
```

```
columns(org.Hs.eg.db)
```

```
[1] "ACCNUM"      "ALIAS"       "ENSEMBL"     "ENSEMBLPROT" "ENSEMBLTRANS"
[6] "ENTREZID"    "ENZYME"      "EVIDENCE"    "EVIDENCEALL"  "GENENAME"
[11] "GENETYPE"    "GO"          "GOALL"       "IPI"          "MAP"
[16] "OMIM"        "ONTOLOGY"    "ONTOLOGYALL" "PATH"         "PFAM"
[21] "PMID"        "PROSITE"     "REFSEQ"      "SYMBOL"       "UCSCKG"
[26] "UNIPROT"
```

```
res$symbol <- mapIds(org.Hs.eg.db,
                     keys=rownames(res),
                     keytype = "ENSEMBL",
                     column = "SYMBOL")
```

'select()' returned 1:many mapping between keys and columns

```
res$entrez = mapIds(org.Hs.eg.db,  
                    keys=row.names(res),  
                    keytype="ENSEMBL",  
                    column="ENTREZID",  
                    multiVals="first")
```

'select()' returned 1:many mapping between keys and columns

```
res$name = mapIds(org.Hs.eg.db,  
                  keys=row.names(res),  
                  keytype="ENSEMBL",  
                  column="GENENAME",  
                  multiVals="first")
```

'select()' returned 1:many mapping between keys and columns

## Pathway Analysis

```
library(pathview)
```

```
#####  
Pathview is an open source software package distributed under GNU General  
Public License version 3 (GPLv3). Details of GPLv3 is available at  
http://www.gnu.org/licenses/gpl-3.0.html. Particullary, users are required to  
formally cite the original Pathview paper (not just mention it) in publications  
or products. For details, do citation("pathview") within R.
```

The pathview downloads and uses KEGG data. Non-academic uses may require a KEGG  
license agreement (details at <http://www.kegg.jp/kegg/legal.html>).

```
#####
```

```
library(gage)
```



```
library(gageData)

data(kegg.sets.hs)
data(sigmet.idx.hs)

head(kegg.sets.hs, 1)
```

```
$`hsa00232 Caffeine metabolism`
[1] "10"    "1544" "1548" "1549" "1553" "7498" "9"
```

```
foldchanges = res$log2FoldChange
names(foldchanges) = res$entrez
head(foldchanges)
```

```
      <NA>      148398      26155      339451      84069      84808
0.17925708 0.42645712 -0.69272046 0.72975561 0.04057653 0.54281049
```

```
keggres = gage(foldchanges, gsets=kegg.sets.hs)
```

```
nrow(countData)
```

```
[1] 15975
```

```
nrow(res)
```

```
[1] 15975
```

```
attributes(keggres)
```

```
$names
[1] "greater" "less"    "stats"
```

```
head(keggres$less, 4)
```

	p.geomean	stat.mean
hsa04110 Cell cycle	8.995727e-06	-4.378644
hsa03030 DNA replication	9.424076e-05	-3.951803
hsa05130 Pathogenic Escherichia coli infection	1.405864e-04	-3.765330
hsa03013 RNA transport	1.246882e-03	-3.059466

	p.val	q.val
hsa04110 Cell cycle	8.995727e-06	0.001889103
hsa03030 DNA replication	9.424076e-05	0.009841047
hsa05130 Pathogenic Escherichia coli infection	1.405864e-04	0.009841047
hsa03013 RNA transport	1.246882e-03	0.065461279

	set.size	exp1
hsa04110 Cell cycle	121	8.995727e-06
hsa03030 DNA replication	36	9.424076e-05
hsa05130 Pathogenic Escherichia coli infection	53	1.405864e-04
hsa03013 RNA transport	144	1.246882e-03

Generate Pathway Figures

```
pathview(gene.data=foldchanges, pathway.id="hsa04110")
```

'select()' returned 1:1 mapping between keys and columns

Info: Working in directory /Users/marriane/Desktop/Class 14

Info: Writing image file hsa04110.pathview.png

```
pathview(gene.data=foldchanges, pathway.id="hsa04110", kegg.native=FALSE)
```

'select()' returned 1:1 mapping between keys and columns

Warning: reconcile groups sharing member nodes!

```

      [,1] [,2]
[1,] "9"  "300"
[2,] "9"  "306"

```

Info: Working in directory /Users/marriane/Desktop/Class 14

Info: Writing image file hsa04110.pathview.pdf

```
keggrespathways <- rownames(keggres$greater)[1:5]

# Extract the 8 character long IDs part of each string
keggresids = substr(keggrespathways, start=1, stop=8)
keggresids
```

```
[1] "hsa04060" "hsa05323" "hsa05146" "hsa05332" "hsa04640"
```

```
pathview(gene.data=foldchanges, pathway.id=keggresids, species="hsa")
```

```
'select()' returned 1:1 mapping between keys and columns
```

```
Info: Working in directory /Users/marriane/Desktop/Class 14
```

```
Info: Writing image file hsa04060.pathview.png
```

```
'select()' returned 1:1 mapping between keys and columns
```

```
Info: Working in directory /Users/marriane/Desktop/Class 14
```

```
Info: Writing image file hsa05323.pathview.png
```

```
'select()' returned 1:1 mapping between keys and columns
```

```
Info: Working in directory /Users/marriane/Desktop/Class 14
```

```
Info: Writing image file hsa05146.pathview.png
```

```
'select()' returned 1:1 mapping between keys and columns
```


```
Info: Working in directory /Users/marriane/Desktop/Class 14
```

```
Info: Writing image file hsa05332.pathview.png
```

```
'select()' returned 1:1 mapping between keys and columns
```

```
Info: Working in directory /Users/marriane/Desktop/Class 14
```

Info: Writing image file hsa04640.pathview.png

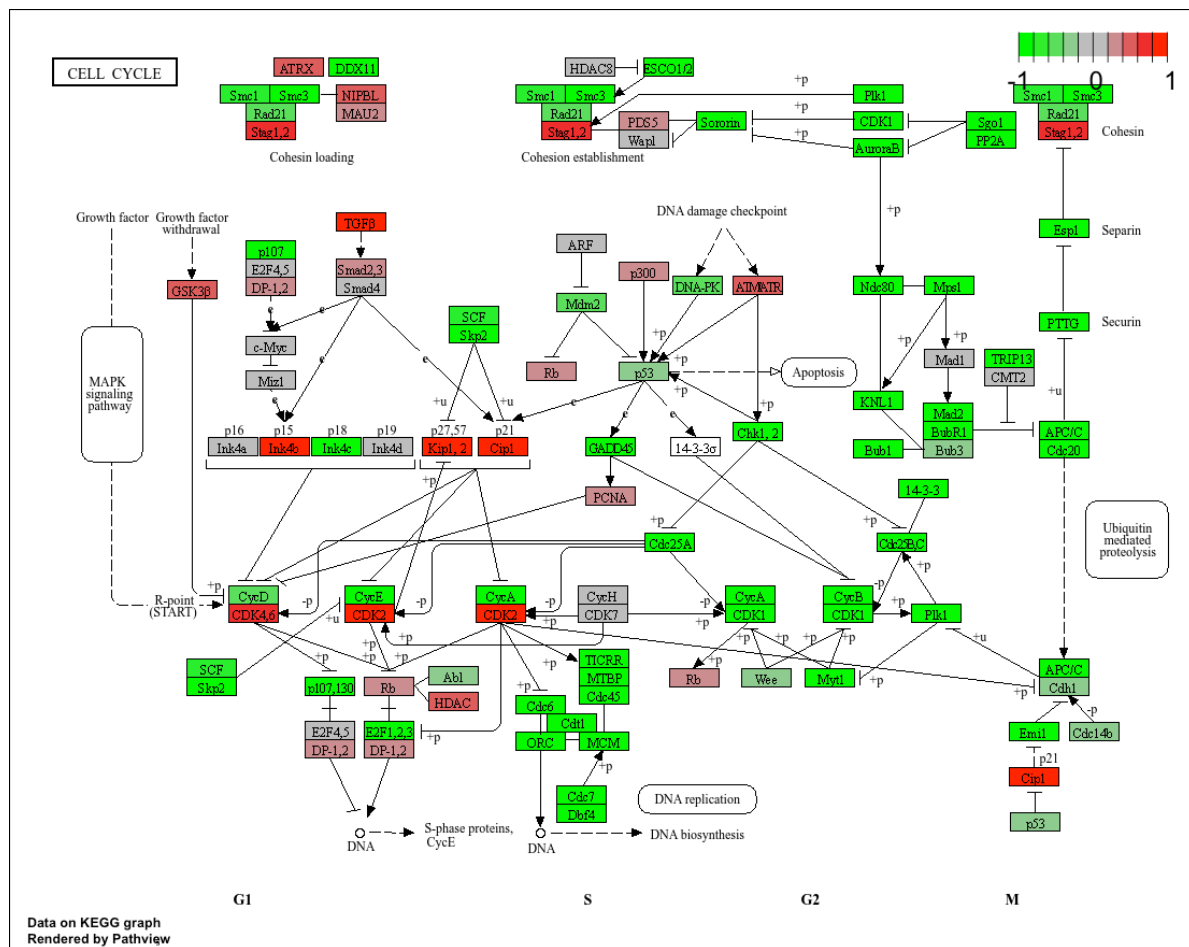

```
pathview(gene.data=foldchanges, pathway.id="hsa04110", kegg.native=FALSE)
```

'select()' returned 1:1 mapping between keys and columns

Warning: reconcile groups sharing member nodes!

```
[,1] [,2]
[1,] "9"  "300"
[2,] "9"  "306"
```

Info: Working in directory /Users/marriane/Desktop/Class 14

Info: Writing image file hsa04110.pathview.pdf

```
keggrespathways <- rownames(keggres$greater)[1:5]
```

```
keggresids = substr(keggrespathways, start=1, stop=8)  
keggresids
```

```
[1] "hsa04060" "hsa05323" "hsa05146" "hsa05332" "hsa04640"
```

```
pathview(gene.data=foldchanges, pathway.id=keggresids, species="hsa")
```

'select()' returned 1:1 mapping between keys and columns

Info: Working in directory /Users/marriane/Desktop/Class 14

Info: Writing image file hsa04060.pathview.png

'select()' returned 1:1 mapping between keys and columns

Info: Working in directory /Users/marriane/Desktop/Class 14

Info: Writing image file hsa05323.pathview.png

'select()' returned 1:1 mapping between keys and columns

Info: Working in directory /Users/marriane/Desktop/Class 14

Info: Writing image file hsa05146.pathview.png

'select()' returned 1:1 mapping between keys and columns

Info: Working in directory /Users/marriane/Desktop/Class 14

Info: Writing image file hsa05332.pathview.png

'select()' returned 1:1 mapping between keys and columns

Info: Working in directory /Users/marriane/Desktop/Class 14

Info: Writing image file hsa04640.pathview.png

## Reactome Setup

```
data(go.sets.hs)
data(go.subs.hs)

# Focus on Biological Process subset of GO
gobpsets = go.sets.hs[go.subs.hs$BP]

gobpres = gage(foldchanges, gsets=gobpsets, same.dir=TRUE)

lapply(gobpres, head)
```

\$greater

	p.geomean	stat.mean	p.val
G0:0007156 homophilic cell adhesion	8.519724e-05	3.824205	8.519724e-05
G0:0002009 morphogenesis of an epithelium	1.396681e-04	3.653886	1.396681e-04
G0:0048729 tissue morphogenesis	1.432451e-04	3.643242	1.432451e-04
G0:0007610 behavior	1.925222e-04	3.565432	1.925222e-04
G0:0060562 epithelial tube morphogenesis	5.932837e-04	3.261376	5.932837e-04
G0:0035295 tube development	5.953254e-04	3.253665	5.953254e-04
	q.val	set.size	expl
G0:0007156 homophilic cell adhesion	0.1951953	113	8.519724e-05
G0:0002009 morphogenesis of an epithelium	0.1951953	339	1.396681e-04
G0:0048729 tissue morphogenesis	0.1951953	424	1.432451e-04
G0:0007610 behavior	0.1967577	426	1.925222e-04
G0:0060562 epithelial tube morphogenesis	0.3565320	257	5.932837e-04
G0:0035295 tube development	0.3565320	391	5.953254e-04

\$less

	p.geomean	stat.mean	p.val
G0:0048285 organelle fission	1.536227e-15	-8.063910	1.536227e-15
G0:0000280 nuclear division	4.286961e-15	-7.939217	4.286961e-15
G0:0007067 mitosis	4.286961e-15	-7.939217	4.286961e-15
G0:0000087 M phase of mitotic cell cycle	1.169934e-14	-7.797496	1.169934e-14
G0:0007059 chromosome segregation	2.028624e-11	-6.878340	2.028624e-11
G0:0000236 mitotic prometaphase	1.729553e-10	-6.695966	1.729553e-10
	q.val	set.size	expl
G0:0048285 organelle fission	5.841698e-12	376	1.536227e-15
G0:0000280 nuclear division	5.841698e-12	352	4.286961e-15
G0:0007067 mitosis	5.841698e-12	352	4.286961e-15
G0:0000087 M phase of mitotic cell cycle	1.195672e-11	362	1.169934e-14

G0:0007059	chromosome segregation	1.658603e-08	142	2.028624e-11
G0:0000236	mitotic prometaphase	1.178402e-07	84	1.729553e-10

\$stats


	stat.mean	exp1
G0:0007156 homophilic cell adhesion	3.824205	3.824205
G0:0002009 morphogenesis of an epithelium	3.653886	3.653886
G0:0048729 tissue morphogenesis	3.643242	3.643242
G0:0007610 behavior	3.565432	3.565432
G0:0060562 epithelial tube morphogenesis	3.261376	3.261376
G0:0035295 tube development	3.253665	3.253665

```
sig_genes <- res[res$padj <= 0.05 & !is.na(res$padj), "symbol"]
print(paste("Total number of significant genes:", length(sig_genes)))
```

```
[1] "Total number of significant genes: 8147"
```

```
write.table(sig_genes, file="significant_genes.txt", row.names=FALSE, col.names=FALSE, quote=
```

```
to.rm <- rowSums(countData) == 0
```

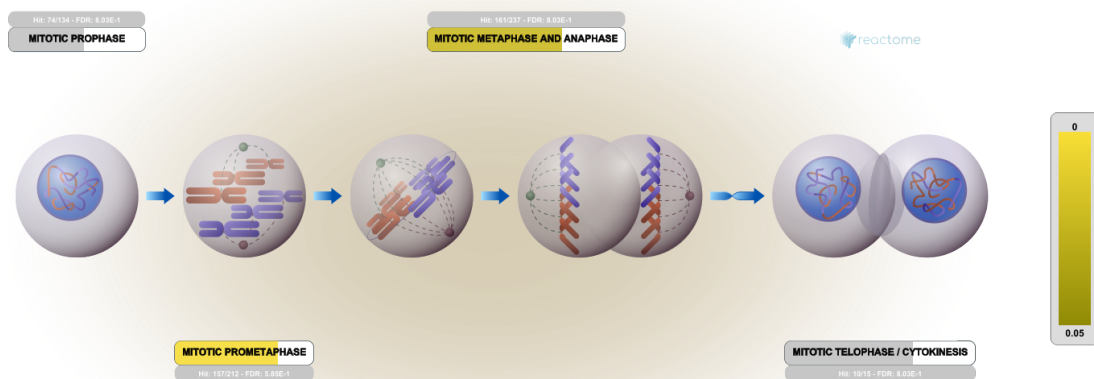

## Save Results

```
write.csv(res, file="myresults.csv")
```