

TP final de Regresión Avanzada

Martín Ceriotti

Quarto

Quarto enables you to weave together content and executable code into a finished document. To learn more about Quarto see <https://quarto.org>.

Running Code

When you click the **Render** button a document will be generated that includes both content and the output of embedded code. You can embed code like this:



```
criterios <- function(m) {  
  SCE <- deviance(m)  
  n <- length(residuals(m))  
  p <- length(coefficients(m))  
  cme <- SCE/(n-p)  
  r2aj <- summary(m)$adj.r.squared  
  tibble(CME = cme, R2Aj = r2aj, AIC = AIC(m), BIC = BIC(m))  
}  
  
map_dfr(list(mod_aic, mod_baic, mod_propio), criterios) %>%  
  mutate_all(round, 2) %>%  
  mutate(Modelo = c("Mod AIC", "Mod BAIC", "Modelo Propio")) %>%  
  dplyr::select(Modelo, CME, "$R_{aj}^2$" = R2Aj, AIC, BIC) %>%  
  kable(escape = FALSE, caption = "Comparación de métricas de ajuste") %>%  
  kable_styling(full_width = F, latex_options = "hold_position") %>%  
  row_spec(1, background = "#A9F5A9")
```

Tabla 1: Comparación de métricas de ajuste

Modelo	CME	R_{aj}^2	AIC	BIC
--------	-----	------------	-----	-----

Mod AIC	339165.3	0.33	100059.3	100214.9
Mod BAIC	340028.6	0.33	100070.6	100192.4
Modelo Propio	379610.7	0.25	100767.0	100814.4

```
plot(mod_aic, 1)
plot(mod_aic, 2)
```

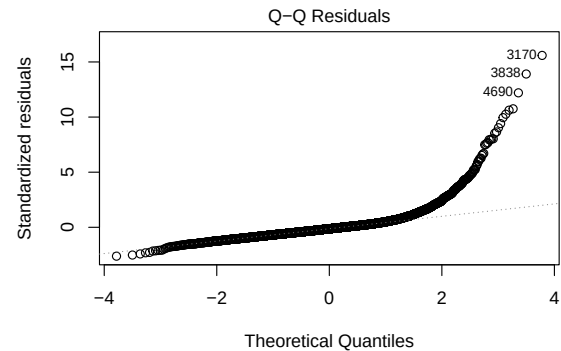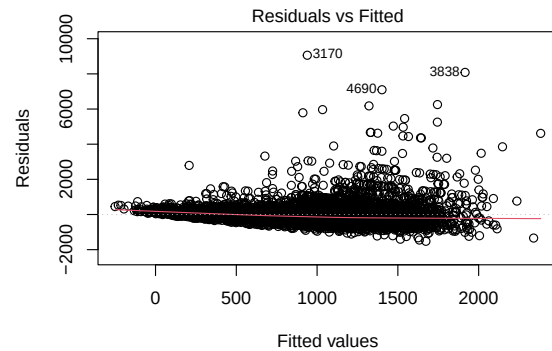

lm(ingreso_ocup ~ formal + horas_trabajo + educ_cat + region + edad + sem(ingreso_ocup ~ formal + horas_trabajo + educ_cat + region + edad + se

You can add options to executable code like this

The `echo: false` option disables the printing of code (only output is displayed).