



✓ **¡Felicitaciones! ¡Aprobaste!**

Próximo artículo



1 / 1  
puntos

1.

What is the "cache" used for in our implementation of forward propagation and backward propagation?

- ☐ It is used to cache the intermediate values of the cost function during training.
- ☐ We use it to pass variables computed during backward propagation to the corresponding forward propagation step. It contains useful values for forward propagation to compute activations.
- ☐ It is used to keep track of the hyperparameters that we are searching over, to speed up computation.
- ☒ We use it to pass variables computed during forward propagation to the corresponding backward propagation step. It contains useful values for backward propagation to compute derivatives.



**Correcto**

Correct, the "cache" records values from the forward propagation units and sends it to the backward propagation units because it is needed to compute the chain rule derivatives.



1 / 1  
puntos

2.

Among the following, which ones are "hyperparameters"? (Check all that apply.)



bias vectors  $b^{[l]}$



**Deseleccionado es lo correcto**



number of layers  $L$  in the neural network



**Correcto**



size of the hidden layers  $n^{[l]}$



**Correcto**

☐ activation values  $a^{[l]}$

## Key concepts on Deep Neural Networks

10/10 points (100 %)

Deseleccionado es lo correcto  
Cuestionario, 10 questions

☐ weight matrices  $W^{[l]}$



Deseleccionado es lo correcto

☐ number of iterations



Correcto

☐ learning rate  $\alpha$



Correcto

1 / 1  
puntos

3.

Which of the following statements is true?

☒ The deeper layers of a neural network are typically computing more complex features of the input than the earlier layers.



Correcto

☐ The earlier layers of a neural network are typically computing more complex features of the input than the deeper layers.

1 / 1  
puntos

4.

Vectorization allows you to compute forward propagation in an  $L$ -layer neural network without an explicit for-loop (or any other explicit iterative loop) over the layers  $l=1, 2, \dots, L$ . True/False?

☐ True

☒ False



Correcto

Forward propagation propagates the input through the layers, although for shallow networks we may just write all the lines ( $a^{[2]} = g^{[2]}(z^{[2]})$ ,  $z^{[2]} = W^{[2]}a^{[1]} + b^{[2]}$ , ...) in a deeper network, we cannot avoid a for loop iterating over the layers: ( $a^{[l]} = g^{[l]}(z^{[l]})$ ,  $z^{[l]} = W^{[l]}a^{[l-1]} + b^{[l]}$ , ...).

1 / 1  
puntos

5. **Key concepts on Deep Neural Networks** 10/10 points (100 %)

Consider a fully connected neural network with 4 input layers, as follows: layer\_dims = [n<sub>x</sub>, 4, 3, 2, 1]. So layer 1 has four hidden units, layer 2 has 3 hidden units and so on. Which of the following for-loops will allow you to initialize the parameters for the model?

- ☐

```
1 for(i in range(1, len(layer_dims)/2)):
2   parameter['W' + str(i)] = np.random.randn(layers[i], layers[i-1])) * 0.01
3   parameter['b' + str(i)] = np.random.randn(layers[i], 1) * 0.01
```
- ☐

```
1 for(i in range(1, len(layer_dims)/2)):
2   parameter['W' + str(i)] = np.random.randn(layers[i], layers[i-1])) * 0.01
3   parameter['b' + str(i)] = np.random.randn(layers[i-1], 1) * 0.01
```
- ☐


```
1 for(i in range(1, len(layer_dims))):
2   parameter['W' + str(i)] = np.random.randn(layers[i-1], layers[i])) * 0.01
3   parameter['b' + str(i)] = np.random.randn(layers[i], 1) * 0.01
```
- ☒

```
1 for(i in range(1, len(layer_dims))):
2   parameter['W' + str(i)] = np.random.randn(layers[i], layers[i-1])) * 0.01
3   parameter['b' + str(i)] = np.random.randn(layers[i], 1) * 0.01
```

Correcto

✓ 1 / 1 puntos

6. Consider the following neural network.

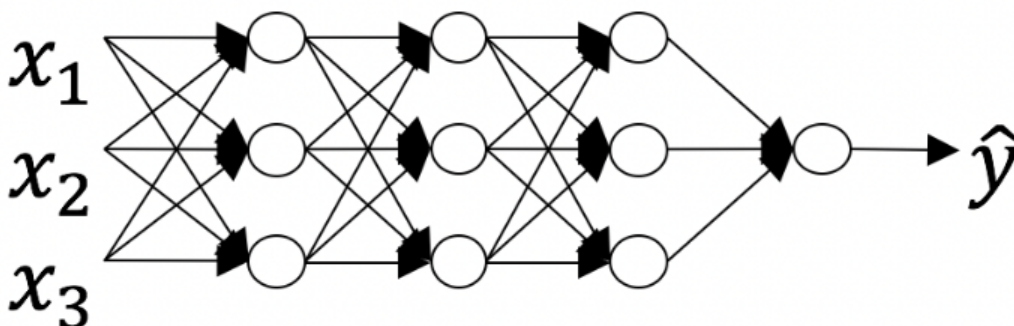

How many layers does this network have?

- ☒ The number of layers  $L$  is 4. The number of hidden layers is 3.

Correcto

Yes. As seen in lecture, the number of layers is counted as the number of hidden layers + 1.

The input and output layers are not counted as hidden layers.

## Key concepts on Deep Neural Networks

10/10 points (100 %)

Cuestionario, 10 questions

- ☐ The number of layers  $L$  is 3. The number of hidden layers is 3.
- ☐ The number of layers  $L$  is 4. The number of hidden layers is 4.
- ☐ The number of layers  $L$  is 5. The number of hidden layers is 4.
- 



1 / 1  
puntos

7.

During forward propagation, in the forward function for a layer  $l$  you need to know what is the activation function in a layer (Sigmoid, tanh, ReLU, etc.). During backpropagation, the corresponding backward function also needs to know what is the activation function for layer  $l$ , since the gradient depends on it. True/False?

☒ True

**Correcto**

Yes, as you've seen in the week 3 each activation has a different derivative. Thus, during backpropagation you need to know which activation was used in the forward propagation to be able to compute the correct derivative.

☐ False

---



1 / 1  
puntos

8.

There are certain functions with the following properties:

(i) To compute the function using a shallow network circuit, you will need a large network (where we measure size by the number of logic gates in the network), but (ii) To compute it using a deep network circuit, you need only an exponentially smaller network. True/False?

☒ True

**Correcto**

☐ False

---




1 / 1  
puntos

9.

Consider the following 2 hidden layer neural network:

## Key concepts on Deep Neural Networks

10/10 points (100 %)

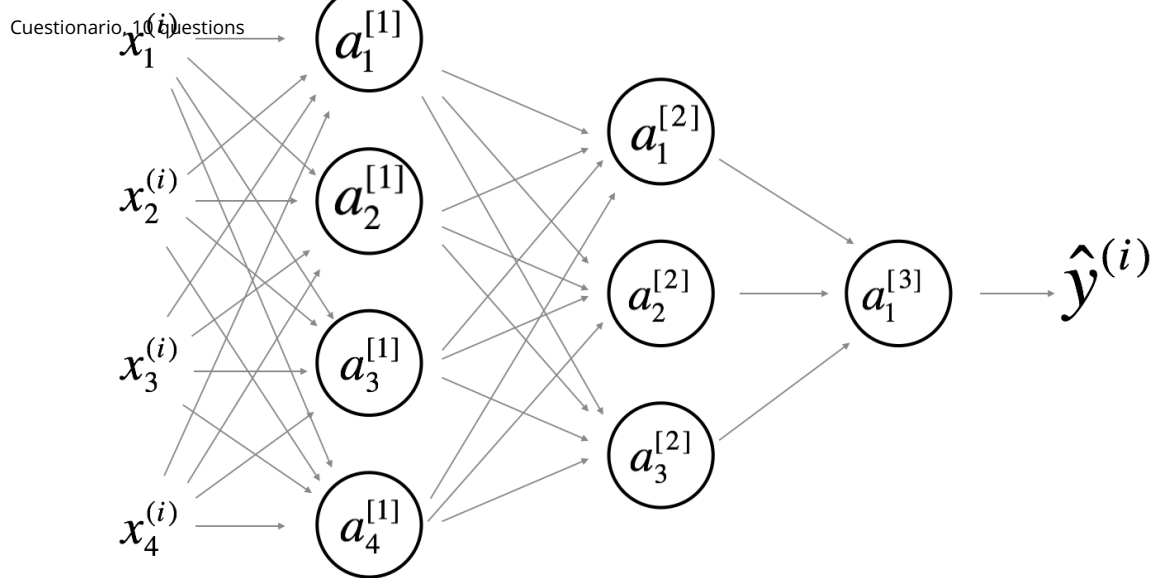

Which of the following statements are True? (Check all that apply).

☐  $W^{[1]}$  will have shape (4, 4)



**Correcto**

Yes. More generally, the shape of  $W^{[l]}$  is  $(n^{[l]}, n^{[l-1]})$ .

☐  $b^{[1]}$  will have shape (4, 1)



**Correcto**

Yes. More generally, the shape of  $b^{[l]}$  is  $(n^{[l]}, 1)$ .

☐  $W^{[1]}$  will have shape (3, 4)



**Deseleccionado es lo correcto**

☐  $b^{[1]}$  will have shape (3, 1)



**Deseleccionado es lo correcto**

☐  $W^{[2]}$  will have shape (3, 4)



**Correcto**

Yes. More generally, the shape of  $W^{[l]}$  is  $(n^{[l]}, n^{[l-1]})$ .

☐  $b^{[2]}$  will have shape (1, 1)



**Deseleccionado es lo correcto**

☐  $W^{[2]}$  will have shape (3, 1)



Deseleccionado es lo correcto

## Key concepts on Deep Neural Networks

10/10 points (100 %)

Cuestionario 10 questions



$W^{[2]}$  will have shape (3, 1)

Correcto

Yes. More generally, the shape of  $b^{[l]}$  is  $(n^{[l]}, 1)$ .



$W^{[3]}$  will have shape (3, 1)

Deseleccionado es lo correcto



$b^{[3]}$  will have shape (1, 1)

Correcto

Yes. More generally, the shape of  $b^{[l]}$  is  $(n^{[l]}, 1)$ .



$W^{[3]}$  will have shape (1, 3)

Correcto

Yes. More generally, the shape of  $W^{[l]}$  is  $(n^{[l]}, n^{[l-1]})$ .



$b^{[3]}$  will have shape (3, 1)

Deseleccionado es lo correcto



1 / 1  
puntos

10.

Whereas the previous question used a specific network, in the general case what is the dimension of  $W^{[l]}$ , the weight matrix associated with layer  $l$ ?



$W^{[l]}$  has shape  $(n^{[l-1]}, n^{[l]})$



$W^{[l]}$  has shape  $(n^{[l+1]}, n^{[l]})$



$W^{[l]}$  has shape  $(n^{[l]}, n^{[l-1]})$

Correcto

True



$W^{[l]}$  has shape  $(n^{[l]}, n^{[l+1]})$

