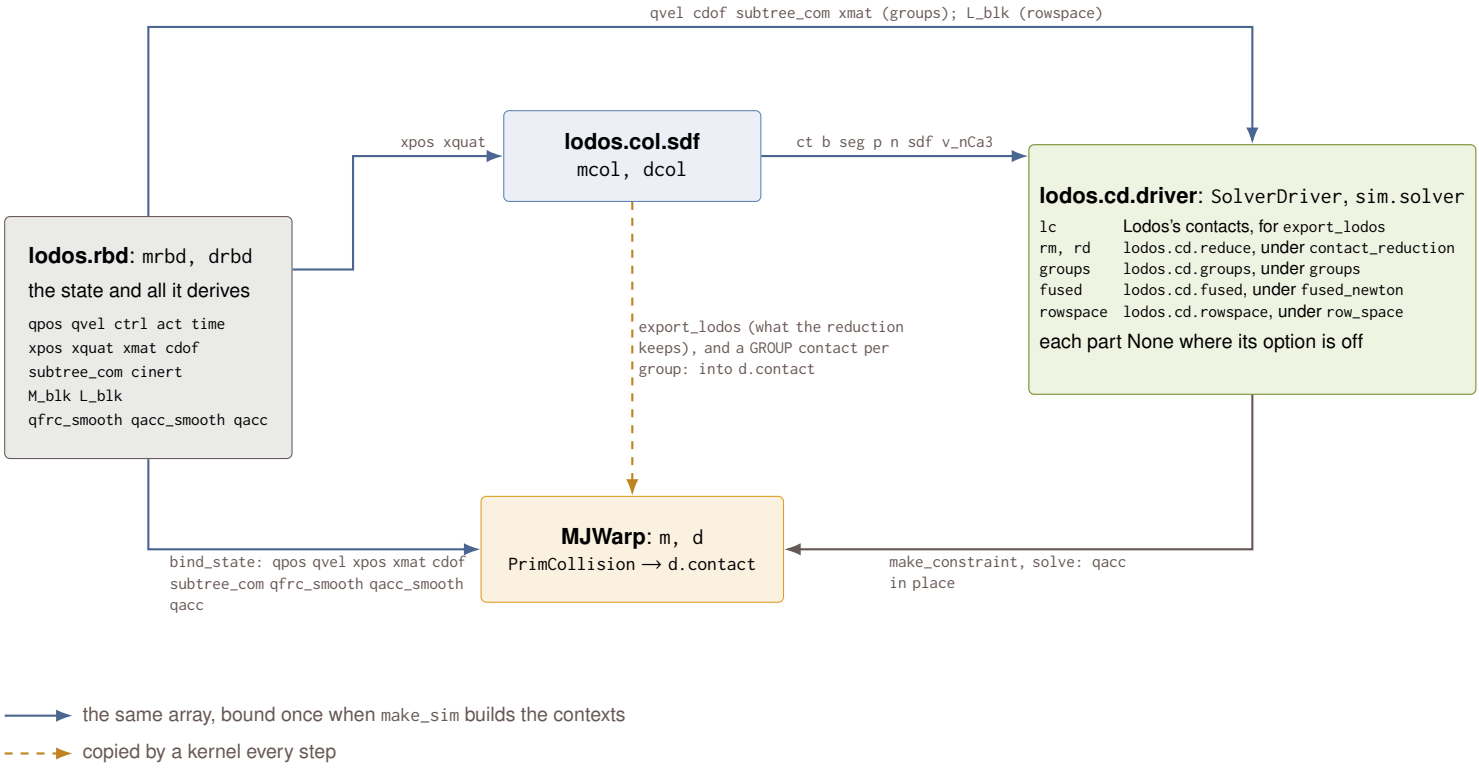
qvel cdof subtree_com xmat (groups); L_blk (rowspace)
xpos xquat
lodos.col.sdf
mcol, dcol
ct b seg p n sdf v_nCa3
lodos.rbd: mrbd, drbd
the state and all it derives
qpos qvel ctrl act time
xpos xquat xmat cdof
subtree_com cinert
M_blk L_blk
qfrc_smooth qacc_smooth qacc
lodos.cd.driver: SolverDriver, sim.solver
lc Lodos's contacts, for export_lodos
rm, rd lodos.cd.reduce, under contact_reduction
groups lodos.cd.groups, under groups
fused lodos.cd.fused, under fused_newton
rowspace lodos.cd.rowspace, under row_space
each part None where its option is off
export_lodos (what the reduction keeps), and a GROUP contact per group: into d.contact
MJWarp: m, d
PrimCollision → d.contact
bind_state: qpos qvel xpos xmat cdof subtree_com qfrc_smooth qacc_smooth qacc
make_constraint, solve: qacc in place
the same array, bound once when make_sim builds the contexts
copied by a kernel every step