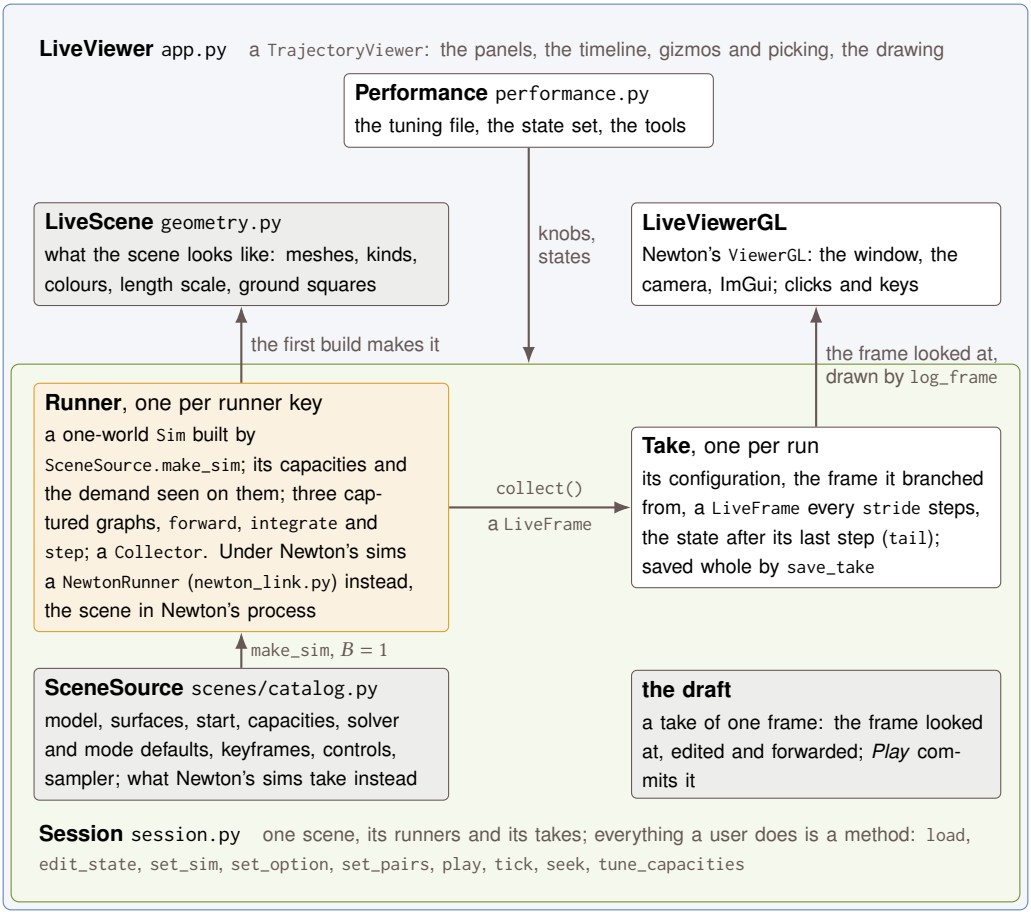

LiveViewer app.py a TrajectoryViewer: the panels, the timeline, gizmos and picking, the drawing
Performance performance.py
the tuning file, the state set, the tools
knobs, states
LiveScene geometry.py
what the scene looks like: meshes, kinds, colours, length scale, ground squares
LiveViewerGL
Newton's ViewerGL: the window, the camera, ImGui; clicks and keys
the first build makes it
the frame looked at, drawn by log_frame
Runner, one per runner key
a one-world Sim built by SceneSource.make_sim; its capacities and the demand seen on them; three captured graphs, forward, integrate and step; a Collector. Under Newton's sims a NewtonRunner (newton_link.py) instead, the scene in Newton's process
collect()
a LiveFrame
Take, one per run
its configuration, the frame it branched from, a LiveFrame every stride steps, the state after its last step (tail); saved whole by save_take
make_sim, $B = 1$
SceneSource scenes/catalog.py
model, surfaces, start, capacities, solver and mode defaults, keyframes, controls, sampler; what Newton's sims take instead
the draft
a take of one frame: the frame looked at, edited and forwarded; *Play* commits it
Session session.py one scene, its runners and its takes; everything a user does is a method: load, edit_state, set_sim, set_option, set_pairs, play, tick, seek, tune_capacities