
SECURITY NINJA GERMANY



SECURITY NINJA GERMANY

Servus Ninjas!

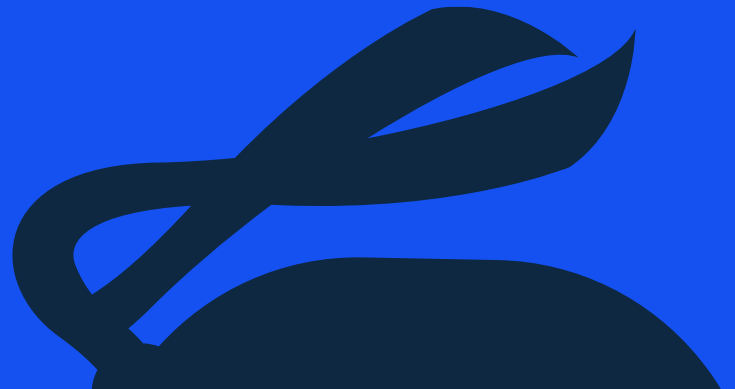

SECURITY NINJA GERMANY

Normalize Once Detect Everywhere

Inside Microsoft Sentinel’s ASIM



Yours truly




Session

Jannis Langthaler

Cyber Security Architect

glueckkanja AG

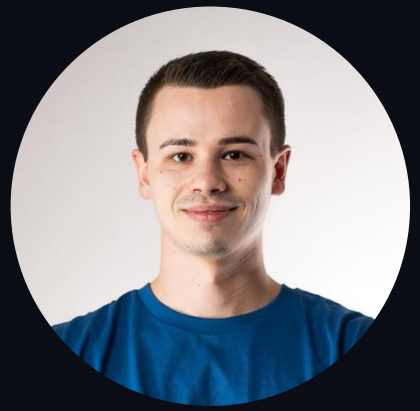

Session

Marvin Rose

Cyber Security Architect

glueckkanja AG

Session

1. Some ASIM theory
2. Then some ASIM praxis
3. And then even more ASIM
4. Tired of ASIM yet?

#SecNinjas

Thank you to our Sponsors!

Host Partner

Microsoft

Gold

glueck kanja

water IT Security & Defense

robopack

PROACT

Silver

WORKSIMPLE EINFACH ARBEITEN

semperis


Bronze

ugurlabs

IC CONSULT

Snacks & Networking Partner

SCE

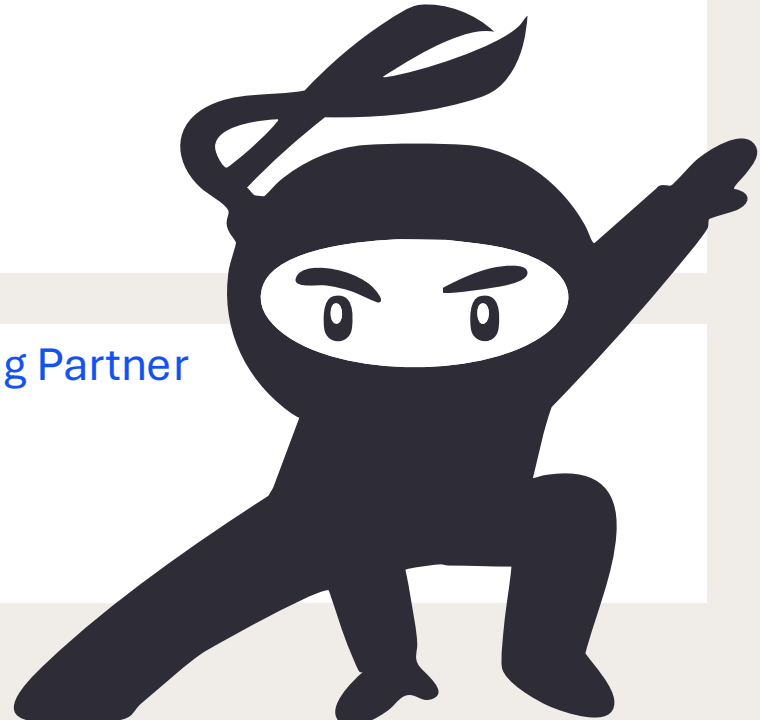

SECURITY NINJA GERMANY

You did everything right

You implemented Sentinel and connected every source on your log-priority list.

- ✓ Firewalls (internal and external)
- ✓ DNS
- ✓ Identity (Entra ID)
- ✓ Endpoint (EDR)
- ✓ Cloud audit logs

...

The one and only log priorization list

Log Source	Ingestion Volume	IoC Matching	Threat Hunting	Detections	Primary Storage Tier	Overlap with
Security Alerts[3]	Low	-	-	+++	Analytics	MDXDR[X]
Sign-in Logs[7]	High[E]	+[8]	++	+++	Analytics	MDA[X], MDE[X], MDI[X]
Control Plane[10]	Medium[E]	+	++	+++	Analytics	MDA[X]
Management & DevOps[9]	High[F]	++[8]	++	++	Analytics	MDA[X], DfC[X]
UEBA	Medium	+	++	+	Analytics	MDXDR[X]
Proxy	High	++[2]	+	+	Data lake + KQL Jobs	MDE[X,6]
NIDS/NSM	Medium	+[2]	+	+	Analytics	DfC[X]
Collaboration[5]	Medium	+[2]	+	++	Analytics	MDA[X], MDO[X]
DNS	High	++[2]	+[2]	+	Data lake + KQL Jobs	MDI[X], DfC[X], MDE[X]
Firewall	High	+[2]	+	++	Data lake + KQL Jobs	
EDR Custom Event Collection	Medium[4]	++[1]	+++	+++	Analytics	MDE[X]
EDR/XDR[!]	High	++[1,2]	+++	++	Data lake	MDXDR[R]

High

Priority

Low



courtesy of this guy

1 – File hash values (MD5, SHA1, SHA256)
2 – C2 Ips, domain names, URLs
3 – From XDR, Defender for Cloud, Firewall, IDS, etc.
4 – Highly depending on your Sysmon configuration
5 – E-Mail, File Sharing, Chat
6 – Only for TLD not for full URLs
7 – All IdPs and Systems (Entra ID, AD, VPN, Security Log, etc.)
8 – VPN Providers, known bad actors, data center IP ranges
9 – Azure Activity[F], AWS Cloud Trail, VMware, DevOps, etc.
10 – Entra ID Audit Logs[E], etc.
E – Cost can be reduced by E5 benefits
F – Free data sources available in Microsoft Sentinel
R – Fully replaced
X – Overlap, separate ingestion can hold value
Windows, Antivirus and Linux Logs are replaced by MDE (EDR) Logs
! - This priority requires that you have an EDR/XDR solution with log access

SECURITY NINJA GERMANY

Full picture.
All-round visibility.
Job done … right?

SECURITY NINJA GERMANY

BUT

Then, at 3:14 AM, an alert fires.

3:14 AM: impossible travel

admin@contoso.com signed in from two countries within minutes.

After some investigation you determine the account was compromised.

The question you now have to answer:

“When did the account do what, while it was compromised?









SECURITY NINJA GERMANY

One concept, four field names

A source IP address is called something different in every table, so correlating across them takes hours.

Source	Field for source IP
SigninLogs (Entra ID)	IPAddress
CommonSecurityLog (CEF)	SourceIP
Firewall Vendor A (custom table)	src
Firewall Vendor B (custom table)	c-ip

The query from hell: one incident, five tables, by hand

SECURITY NINJA GERMANY

```
SigninLogs
| where TimeGenerated > ago(7d)
| extend Ip = IPAddress
| union (CommonSecurityLog
    | where DeviceVendor == "PaloAlto"
    | extend Ip = SourceIP, User = suser)
| union (CommonSecurityLog
    | where DeviceVendor == "Fortinet"
    | extend Ip = SourceIP, User = tostring(parse_json(AdditionalExtensions).user))
| union (FirewallVendorA_CL | extend Ip = src_s, User = user_s)
| union (FirewallVendorB_CL | extend Ip = ["c-ip"], User = cs_username_s)
| where Ip == "203.0.113.42"
| project TimeGenerated, Ip, User, ...
// ... 40 more lines of per-vendor field mapping ...
```

3 hours of work. Still missed events.

And this was just for the IP

Remember the table? You have many more logs to check...

SECURITY NINJA GERMANY

So, you ask yourself: “Isn’t there a better way?”

Yes: ASIM, the Advanced Security Information Model.

SECURITY NINJA GERMANY

So what is ASIM?

- ASIM is a data model for Microsoft Sentinel
- Utilizes parsing and normalization
- Based on “robustness principle”: **Be strict in what you send, be flexible in what you accept**

ASIM at a glance

A normalization layer between source telemetry and Microsoft Sentinel content

QUERY-TIME PARSERS: KQL USER-DEFINED FUNCTIONS

Source tables

AzureActivity, SigninLogs, Syslog...

Source-specific parsers

Extract fields and map each source to the fitting ASIM schema

Unifying parsers

Call the source parsers and combine their results

Example: _Im_Dns()

Reusable content

KQL queries, Analytics rules, and workbooks

Standardized, versioned schemas define the output format

Common fields
EventType, EventStartTime

Schema-specific
DNS: DnsQuery

Entity fields
Device: Hostname

ASIM builds on two concepts

pars·ing

/ˈpɑːr.sɪŋ/ noun

1 Extracting individual values out of an unstructured text field.

“client 10.0.0.5#53: query: contoso.com” → SrcIpAddr, DnsQuery

2 The basis for ASIM - or any schema

From KQL: parse, extract, split

nor·mal·i·za·tion

/ˌnɔː.mə.laɪˈzeɪ.ʃən/ noun

1 Mapping different field names and values onto one common schema.

IPAddress, SourceIP, src, c-ip → SrcIpAddr

2 The reason one query works across every connected source.

From ASIM schemas: Dns, Authentication, NetworkSession

Each information gets its own column

Readability accelerates investigation.

Before

"2024-01-15 client 10.0.0.5#53: query: contoso.com"

After

SrcIpAddr = "10.0.0.5"

DnsQuery = "contoso.com"

SECURITY NINJA GERMANY

One field name, every source

Different field names and values map onto one common schema.

Source	Original field	ASIM field
SigninLogs (Entra ID)	IPAddress	SrcIpAddr
CommonSecurityLog (CEF)	SourceIP	SrcIpAddr
Firewall Vendor A	src	SrcIpAddr
Firewall Vendor B	c-ip	SrcIpAddr

A parser is just a KQL function

SECURITY NINJA GERMANY

```
Syslog
// 1. Filter: keep only the relevant records
| where ProcessName == "named" and SyslogMessage has "client"
// 2. Parse: extract the values you need
| parse SyslogMessage with * "client " SrcIpAddr:string
    "#" SrcPortNumber:int ": query: " DnsQuery:string
// 3. Prepare fields: rename & enrich
| extend EventVendor = "ISC", EventSchema = "Dns"

Filter  →  Parse  →  Prepare fields
```

Key takeaways

SECURITY NINJA GERMANY

Parsing plus normalization ends fragmentation

- ASIM Parsers are just KQL functions, with clear naming conventions
- Performance rules matter, since there are multiple layers of parsers
- Full reference: learn.microsoft.com/azure/sentinel/isv/normalization-develop-parsers

SECURITY NINJA GERMANY

But how does it work?

We got you.



Schemas

SECURITY NINJA GERMANY

12 schemas + 1 new one

Every log category get's a schema.

1. Agent Event
2. Alert Event
3. Audit Event
4. Authentication Event
5. DHCP Activity
6. DNS Activity
7. File Activity
8. Network Session
9. Process Event
10. Registry Event
11. User Management
12. Web Session
13. Email Event (new)

SECURITY NINJA GERMANY

Schema fields

There are some rules for fields.

- Each schema has its own fields and ASIM common fields that all schemas share
- Mandatory fields ensure key information is present in each entry
- Alias fields help with correlation
- Naturally, it’s recommended to fill as many optional fields as possible
- Some fields may only contain pre-defined values

Schemas

Common fields with specific guidelines

The following list mentions fields that have specific guidelines for Audit Events:

Expand table

Field	Class	Type	Description
EventType	Mandatory	Enumerated	Describes the operation audited by the event using a normalized value. Use EventSubType to provide further details, which the normalized value does not convey, and Operation. to store the operation as reported by the reporting device. For Audit Event records, the allowed values are: - `Set` - `Read` - `Create` - `Delete` - `Execute` - `Install` - `Clear` - `Enable` - `Disable` - `Initialize` - `Start` - `Stop` - `Other` Audit events represent a large variety of operations, and the `Other` value enables mapping operations that have no corresponding `EventType`. However, the use of `Other` limits the usability of the event and should be avoided if possible.
EventSubType	Optional	String	Provides further details, which the normalized value in EventType does not convey.
EventSchema	Mandatory	Enumerated	The name of the schema documented here is `AuditEvent`.
EventSchemaVersion	Mandatory	SchemaVersion (String)	The version of the schema. The version of the schema documented here is `1.0.0`.

All common fields

Fields that appear in the table are common to all ASIM schemas. Any of guidelines specified in this document overrides the general guidelines for the field. For example, a field might be optional in general, but mandatory for a specific schema. For more information on each field, see the ASIM Common Fields article.

Expand table

Class	Fields
Mandatory	- EventCount - EventStartTime - EventEndTime - EventType - EventResult - EventProduct - EventVendor - EventSchema - EventSchemaVersion - Dvc
Recommended	- EventResultDetails - EventSeverity - EventUid - DvcIpAddr - DvcHostname - DvcDomain - DvcDomainType - DvcFQDN - DvcId - DvcIdType - DvcAction
Optional	- EventMessage - EventSubType - EventOriginalUid - EventOriginalType - EventOriginalSubType - EventOriginalResultDetails - EventOriginalSeverity

Audit fields

Expand table

Field	Class	Type	Description
Operation	Mandatory	String	The operation audited as reported by the reporting device.
Object	Mandatory	String	The name of the object on which the operation identified by EventType is performed.
ObjectId	Optional	String	The ID of the object on which the operation identified by EventType is performed.
ObjectType	Conditional	Enumerated	The type of Object. Allowed values are: - `Cloud Resource` - `Configuration Atom` - `Policy Rule` - `Event Log` - `Scheduled Task` - `Service` - `Directory Service Object` - `Other`
OriginalObjectType	Optional	String	The type of Object as reported by the reporting system
OldValue	Optional	String	The old value of Object prior to the operation, if applicable.
NewValue	Recommended	String	The new value of Object after the operation was performed, if applicable.
Value	Alias		Alias to NewValue
ValueType	Conditional	Enumerated	The type of the old and new values. Allowed values are - Other

Unifying parsers

SECURITY NINJA GERMANY

Bringing different parsers together

- Microsoft provides a unifying parser for each schema
- These union() (get it?) all source-specific parsers
- This way you can query ALL logs from a schema
- Present in all Sentinel instances by default
- Offer parameters for output filtering – otherwise they are slooooooooooooooow

```
1  _Im_AuditEvent
```

Results | Query history | Getting started

Export | Show empty columns | 4014 items | Search | 00:45.733 | Low


TimeGenerated	Type	Operation	SrcIpAddr	EventOriginalUid	ActorSessionId	Ev
Sep 20, 2026 6:00:...	ASimAuditEventLogs	WiFi Client Disconnected	10.100.4.20			4(
Sep 20, 2026 6:01:...	ASimAuditEventLogs	WiFi Client Disconnected	10.100.15.147			4(
Sep 20, 2026 6:02:...	ASimAuditEventLogs	WiFi Client Disconnected	10.100.15.147			4(
Sep 20, 2026 6:12:...	ASimAuditEventLogs	WiFi Client Disconnected	10.100.15.147			4(
Sep 20, 2026 6:00:...	OfficeActivity	Remove-StoreMailbox	2603:10a6:d10:1c7::17	37a01edb-731d-470f-94...		
Sep 20, 2026 2:12:...	AzureActivity	MICROSOFT.SECURITYINSIGHTS/INCIDENTS/COMME...	20.73.106.2	61bf8715-df4b-af9f-e1d...	80b1be93-c176-4463-b...	A
Sep 20, 2026 2:12:...	AzureActivity	MICROSOFT.SECURITYINSIGHTS/INCIDENTS/COMME...	20.73.106.2	6b455a29-91c5-694e-b...	80b1be93-c176-4463-b...	A

Source-specific parsers

SECURITY NINJA GERMANY

Your lowest tier of parser

- These parse the raw logs into ASIM
- Often part of Content Hub solutions
- Otherwise you create your own

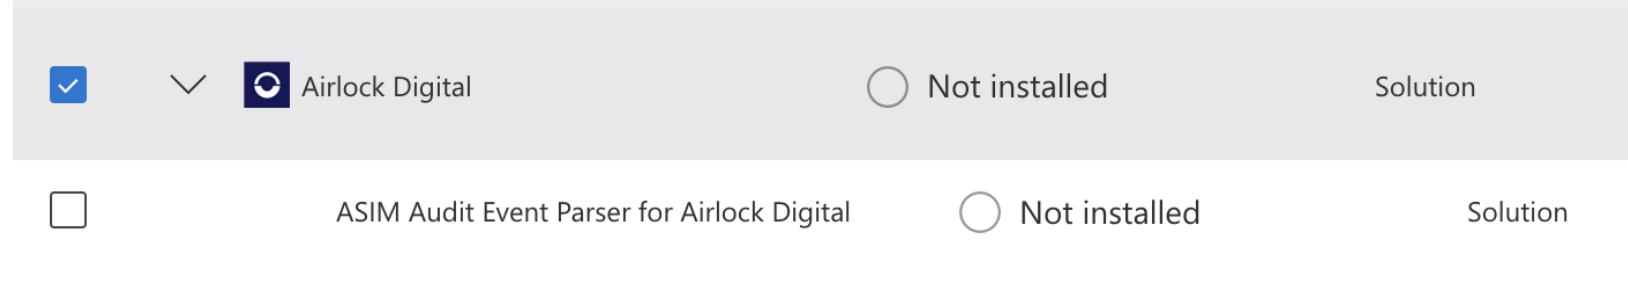

Parser naming

SECURITY NINJA GERMANY

Each parser type has its own naming convention.

Docs about this are a mess…

Also: underscore as prefix means read only / private

Prefix	Purpose
_Im_<Schema>	built-in unifying parser
Im_<Schema>Custom	reserved for custom unifying parser
im<Schema>	self-deployed unifying parser (workspace-deployed)
_Im_<Schema>_<Source>V<Version>	vendor-provided source-specific parser (Microsoft = vendor as well)
vim<Schema><Vendor><Product>	self-developed source-specific parser with parameters
ASim<Schema><Vendor><Product>	self-developed source-specific parser without parameters

Parser naming

SECURITY NINJA GERMANY

Some examples

Prefix	Purpose
_Im_AuditEvent	built-in unifying parser
Im_AuditEventCustom	reserved for custom unifying parser
imAuditEvent	self-deployed unifying parser
_Im_AuditEvent_PaloAltoV01	vendor-provided source-specific parser
vimAuditEventPaloAltoPanOS	self-developed source-specific parser with parameters
ASimAuditEventPaloAltoPanOS	self-developed source-specific parser without parameters

How to actually start using ASIM

You thought the docs would be clear?

ASIM sits between raw logs and queries



Raw logs

Firewalls, DNS, Entra ID, EDR

Parsing

Values out of text fields

Normalization

Field names onto one schema


Unified schema

SrcIpAddr, ActorUsername, EventResult

One query

Same fields, every source


1. Understand Parser Hierarchy

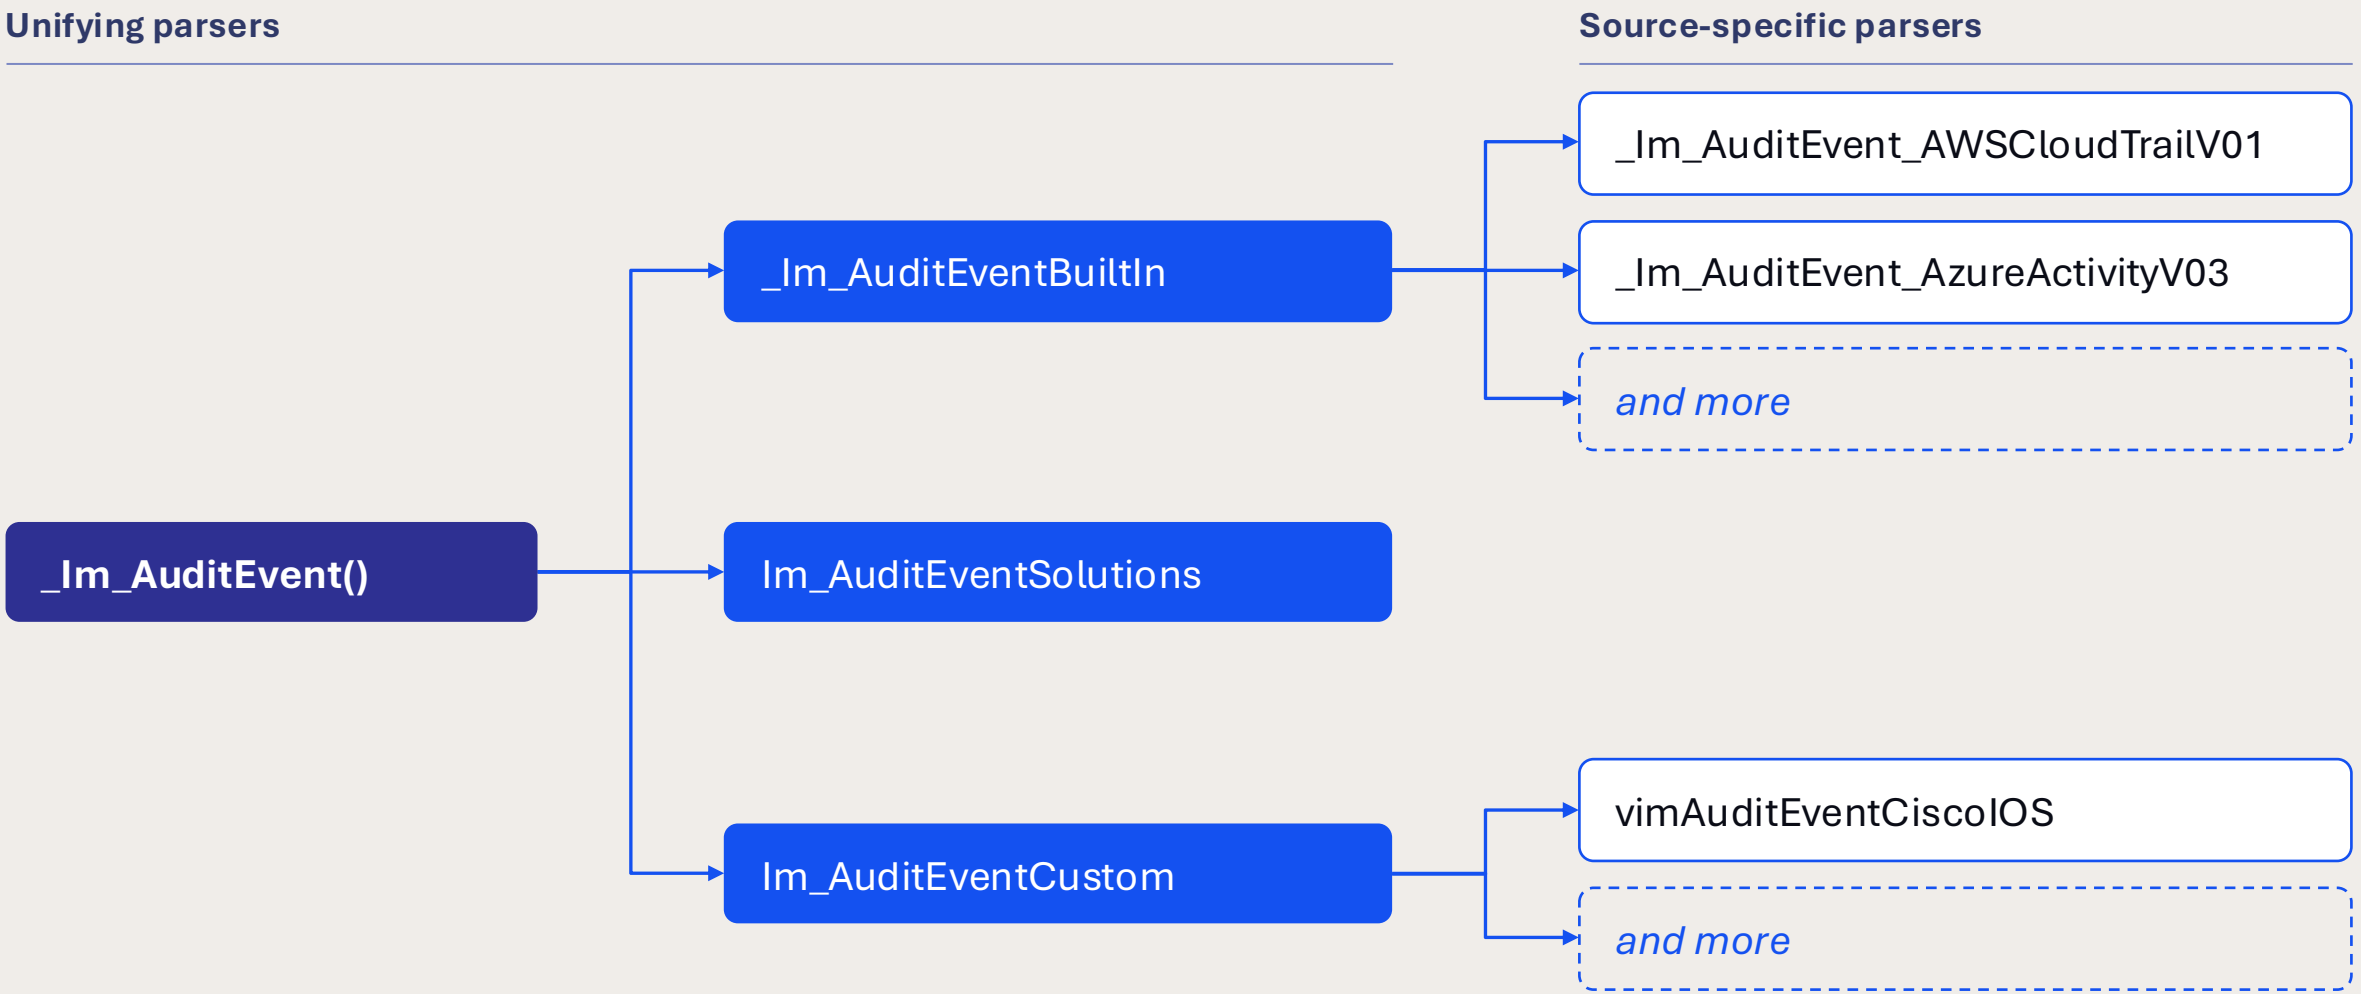

How to actually start using ASIM


SECURITY NINJA GERMANY

2. Ingest your data

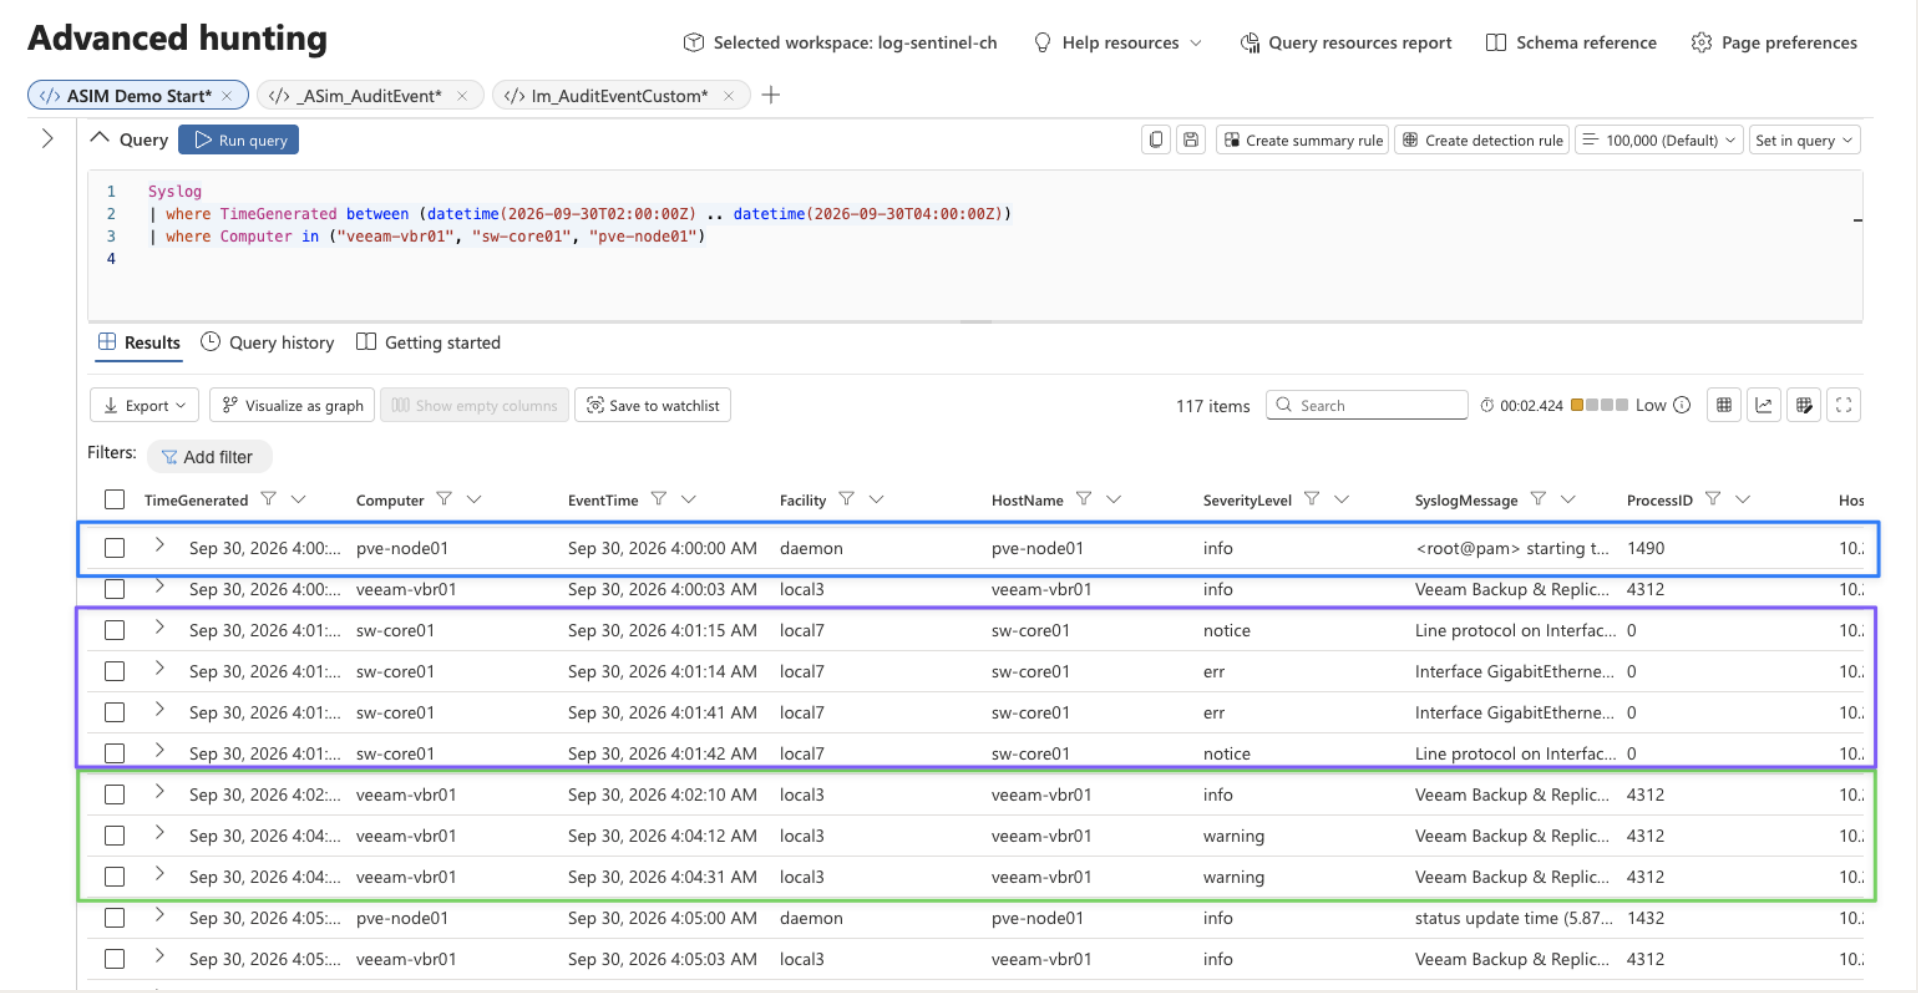

3. Deploy custom unifying parsers


https://github.com/Azure/Azure-Sentinel/tree/master/ASIM/deploy/EmptyCustomUnifyingParsers

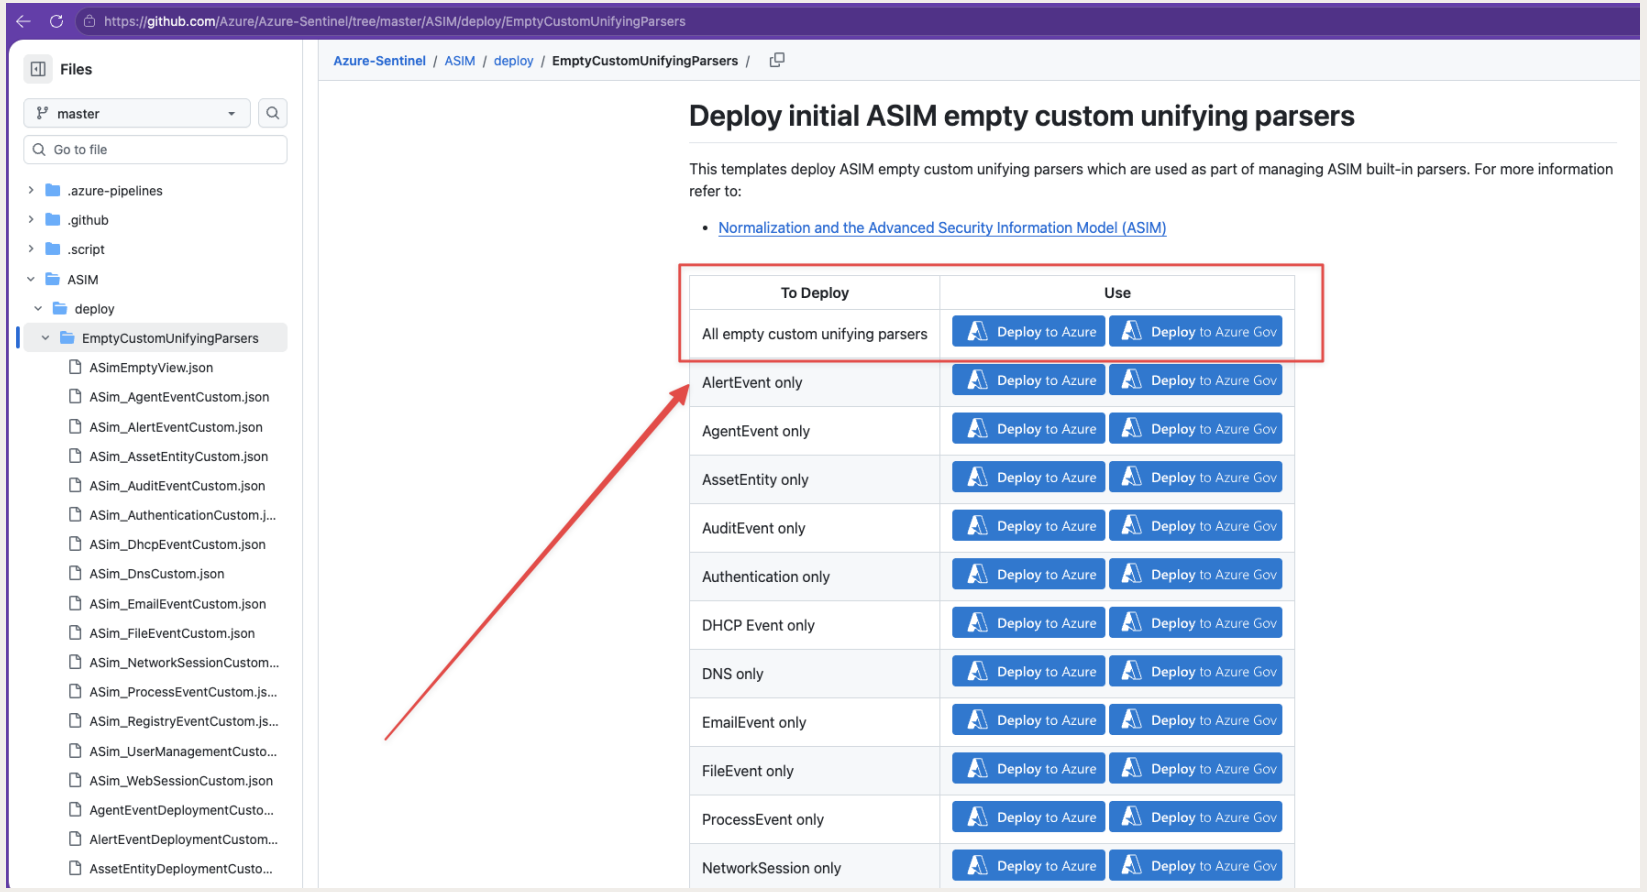

SECURITY NINJA GERMANY

4. Deploy parser watchlists

https://github.com/Azure/Azure-Sentinel/tree/master/ASIM/deploy/Watchlists

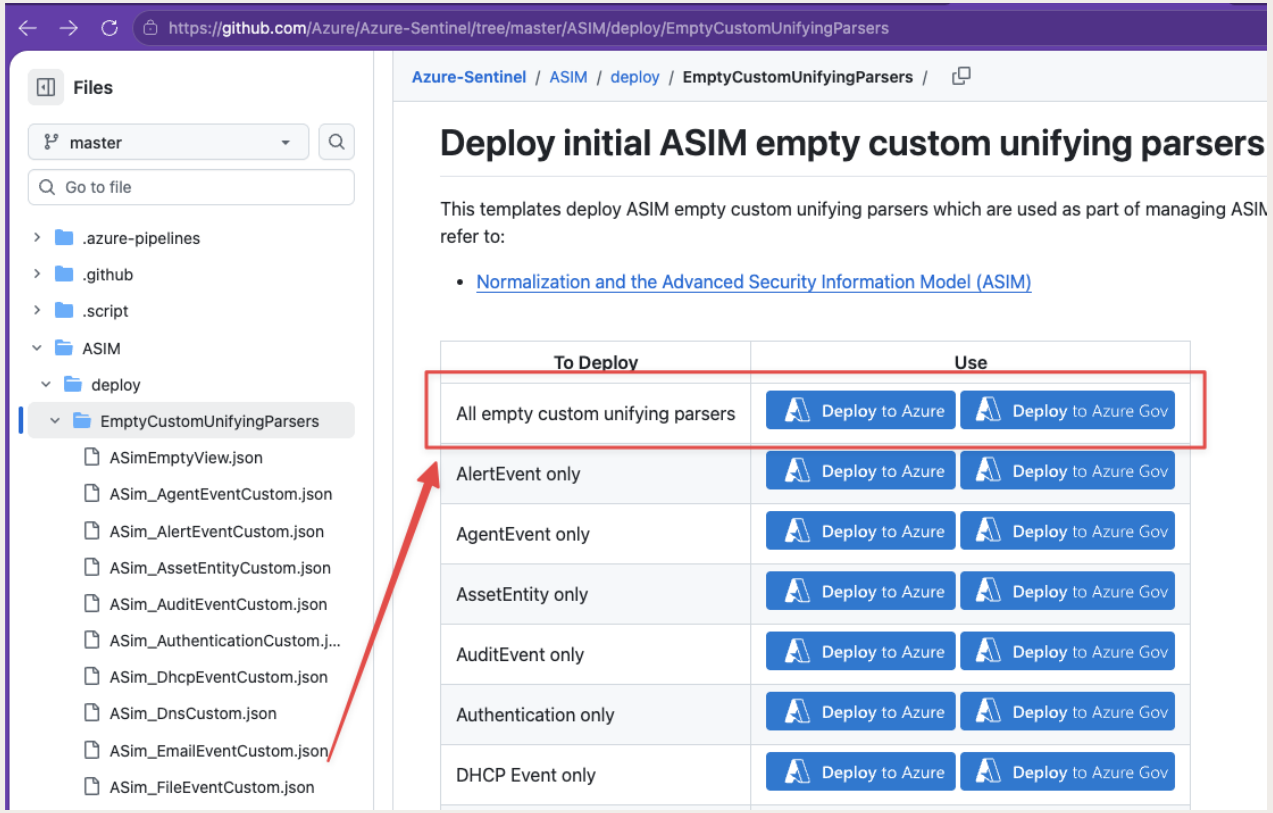

Function | Run query

```
// Function name : vimA
Syslog
| where not(disable
| where (isnull(sta
| where ProcessName
| where array_lengt
| extend IsCmdLog =
| extend
    ActorUsername =
    Cmd = trim(' ',
    ConfigSource =
    SrcIpAddr = ext
| extend
    Operation = iff
    EventType = cas
        not(IsCmdLo
        Cmd startsw
        Cmd == 'shu
        Cmd == 'no
        Cmd startsw
        Cmd startsw
        Cmd startsw
        'Set'
    ),
    EventSubType =
    Object = case(
        not(IsCmdLo
        Cmd startsw
        Cmd matches
        Cmd matches
        Cmd startsw
        'running-co
    ),
    ObjectType = if
    OldValue = '',
    EventResult = '
    EventOriginalTy
| extend NewValue =
| where (array_leng
    and (array_leng
    and (array_leng
    and (array_leng
```

Query | Run query | Create summary rule | Create detection rule | 100,000 (Default) | Set in query

```
1  vimAuditEventCiscoIOS(starttime=datetime(2026-09-30T02:00:00Z), endtime=datetime(2026-09-30T04:00:00Z))
```

Results | Query history | Getting started

Export | Link to incident | Take actions | Visualize as graph | Show empty columns | Save to watchlist | 1 of 19 selected | Search | 00:00.753 | Low

TimeGenerated	Type	ActorUsername	SrcIpAddr	Operation	EventType	EventSubType	Object
Sep 30, 2026 4:44:...	Syslog	mkeller		no vlan 30	Delete		vlan 30

TimeGenerated	Sep 30, 2026 4:44:04 AM
Type	Syslog
ActorUsername	mkeller
Operation	no vlan 30
EventType	Delete
Object	vlan 30
ObjectType	Configuration Atom
EventResult	Success
EventOriginalType	%PARSER-5-CFGLOG_LOGGEDCMD
DvcHostname	sw-core01
EventCount	1
EventEndTime	Sep 30, 2026 4:44:03 AM
EventSchema	AuditEvent
EventSchemaVersion	1.0.0
EventUid	50ef8d39-bd08-11f1-a04d-7ced8d42d7a3
EventOriginalSeverity	notice
EventSeverity	Informational
DvcIpAddr	10.20.1.2
Dvc	sw-core01
ActorUsernameType	Simple
TargetHostname	sw-core01
TargetIpAddr	10.20.1.2
Dst	sw-core01
User	mkeller
EventVendor	Cisco
EventProduct	IOS

SECURITY NINJA

e as function

tion name *
nAuditEventCiscoIOS

Function name : vimAuditEventCiscoIOS
Schema : ASIM Audit Event (AuditEvent 1.0.0)
Source : Cisco IOS via Syslog table
Description : Cisco IOS / IOS-XE configuration audit events (archive logging %PARSER-5-CFGLOG_LOGGEDCMD and SYS-5-CONFIG_I). The %FAC-SEV-MNEMONIC tag is in ProcessName.

cy category *
stom ASIM Parsers

Save as computer group

ction parameters


e	Name	Default value
atetime	starttime	datetime(null)
atetime	endtime	datetime(null)
ynamic	srcipaddr_has_any_prefix	dynamic([])
ynamic	operation_has_any	dynamic([])
ynamic	actorusername_has_any	dynamic([])
ynamic	eventtype_in	dynamic([])
tring	eventresult	'*'
ynamic	object_has_any	dynamic([])
ynamic	newvalue_has_any	dynamic([])
ool	disabled	false
ool	pack	false
elect type	Type name	Type default value

Save | Cancel

SECURITY NINJA GERMANY

6. Add your parsers to the custom unifying parser


And make sure you add all the parameters (even *disabled*)
https://learn.microsoft.com/en-us/azure/sentinel/normalization-manage-parsers#add-a-custom-parser-to-a-built-in-unifying-parser

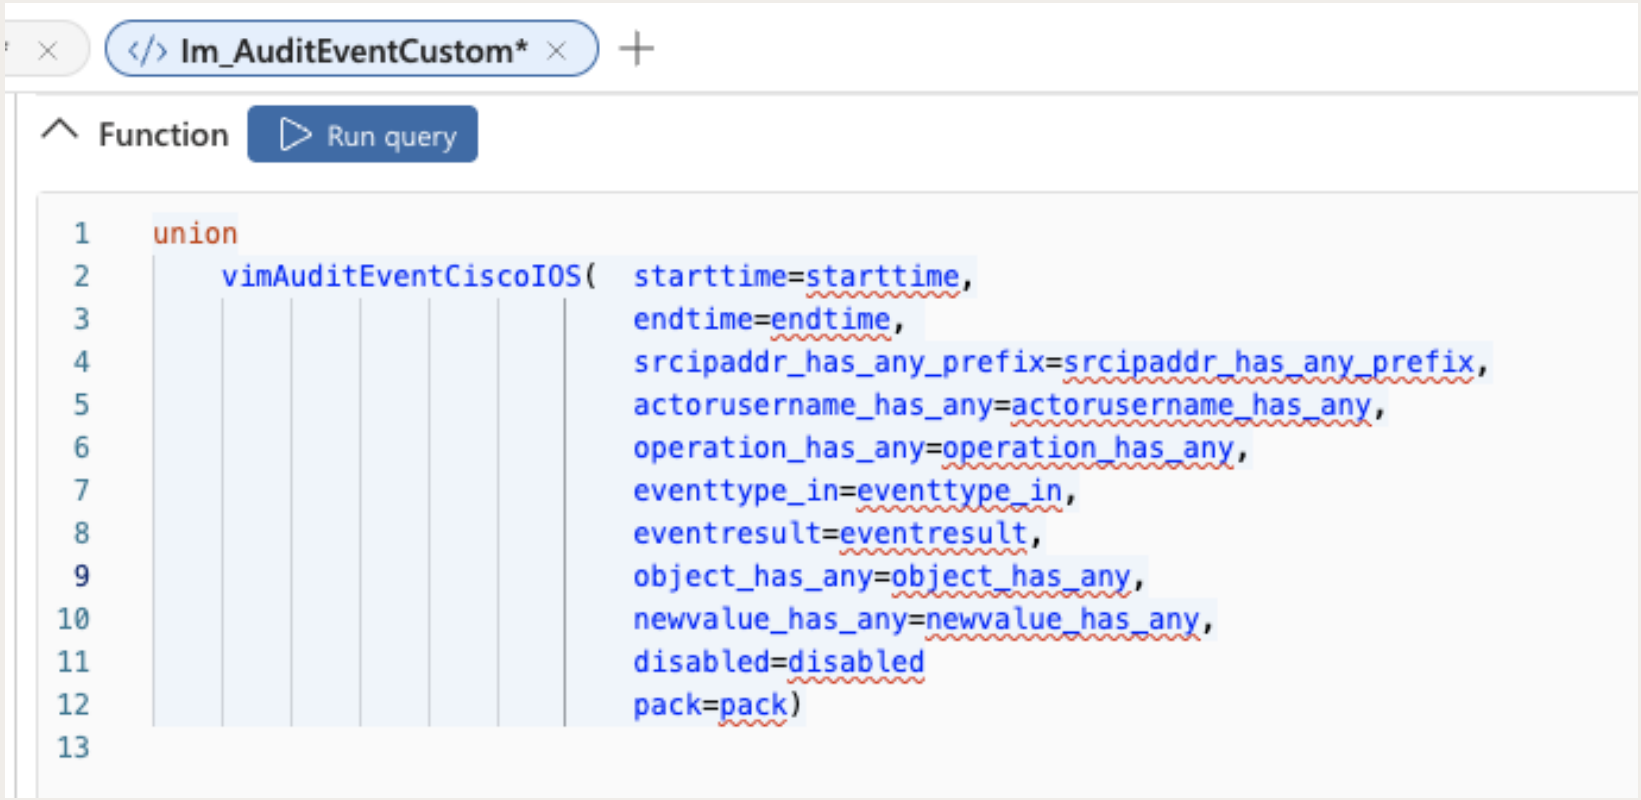

How to actually start using ASIM

7. (Optional) Add your source mappings to the watchlist


```
31  Syslog
32  | where not(disabled)
33  | where (isnull(starttime) or TimeGenerated >= starttime) and (isnull(endtime) or TimeGenerated <= endtime)
34  | where Computer in (_ASIM_GetSourceBySourceType('CiscoIOS'))
35  | where ProcessName in ('%PARSER-5-CFGLOG_LOGGEDCMD', '%SYS-5-CONFIG_I')
36  | where array_length(actorusername_has_any) == 0 or SyslogMessage has_any (actorusername_has_any)
37  | extend IsCmdLog = ProcessName == '%PARSER-5-CFGLOG_LOGGEDCMD'
38  | extend
```

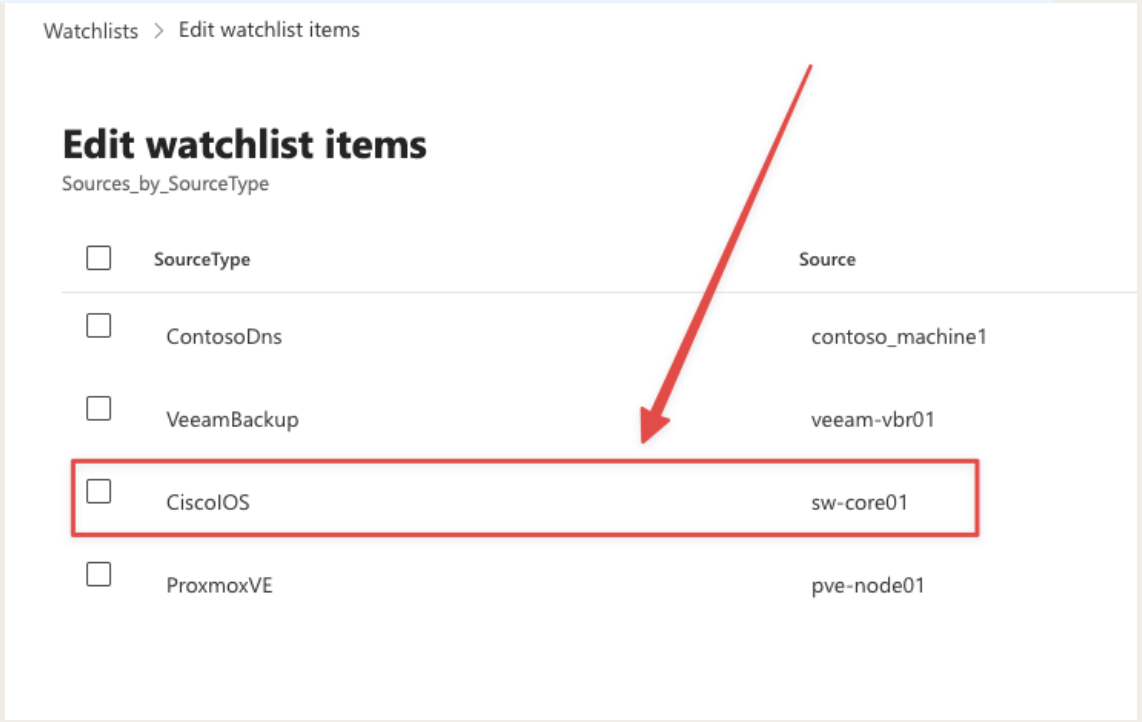

How to actually start using ASIM

SECURITY NINJA GERMANY

And you're done! Congrats!

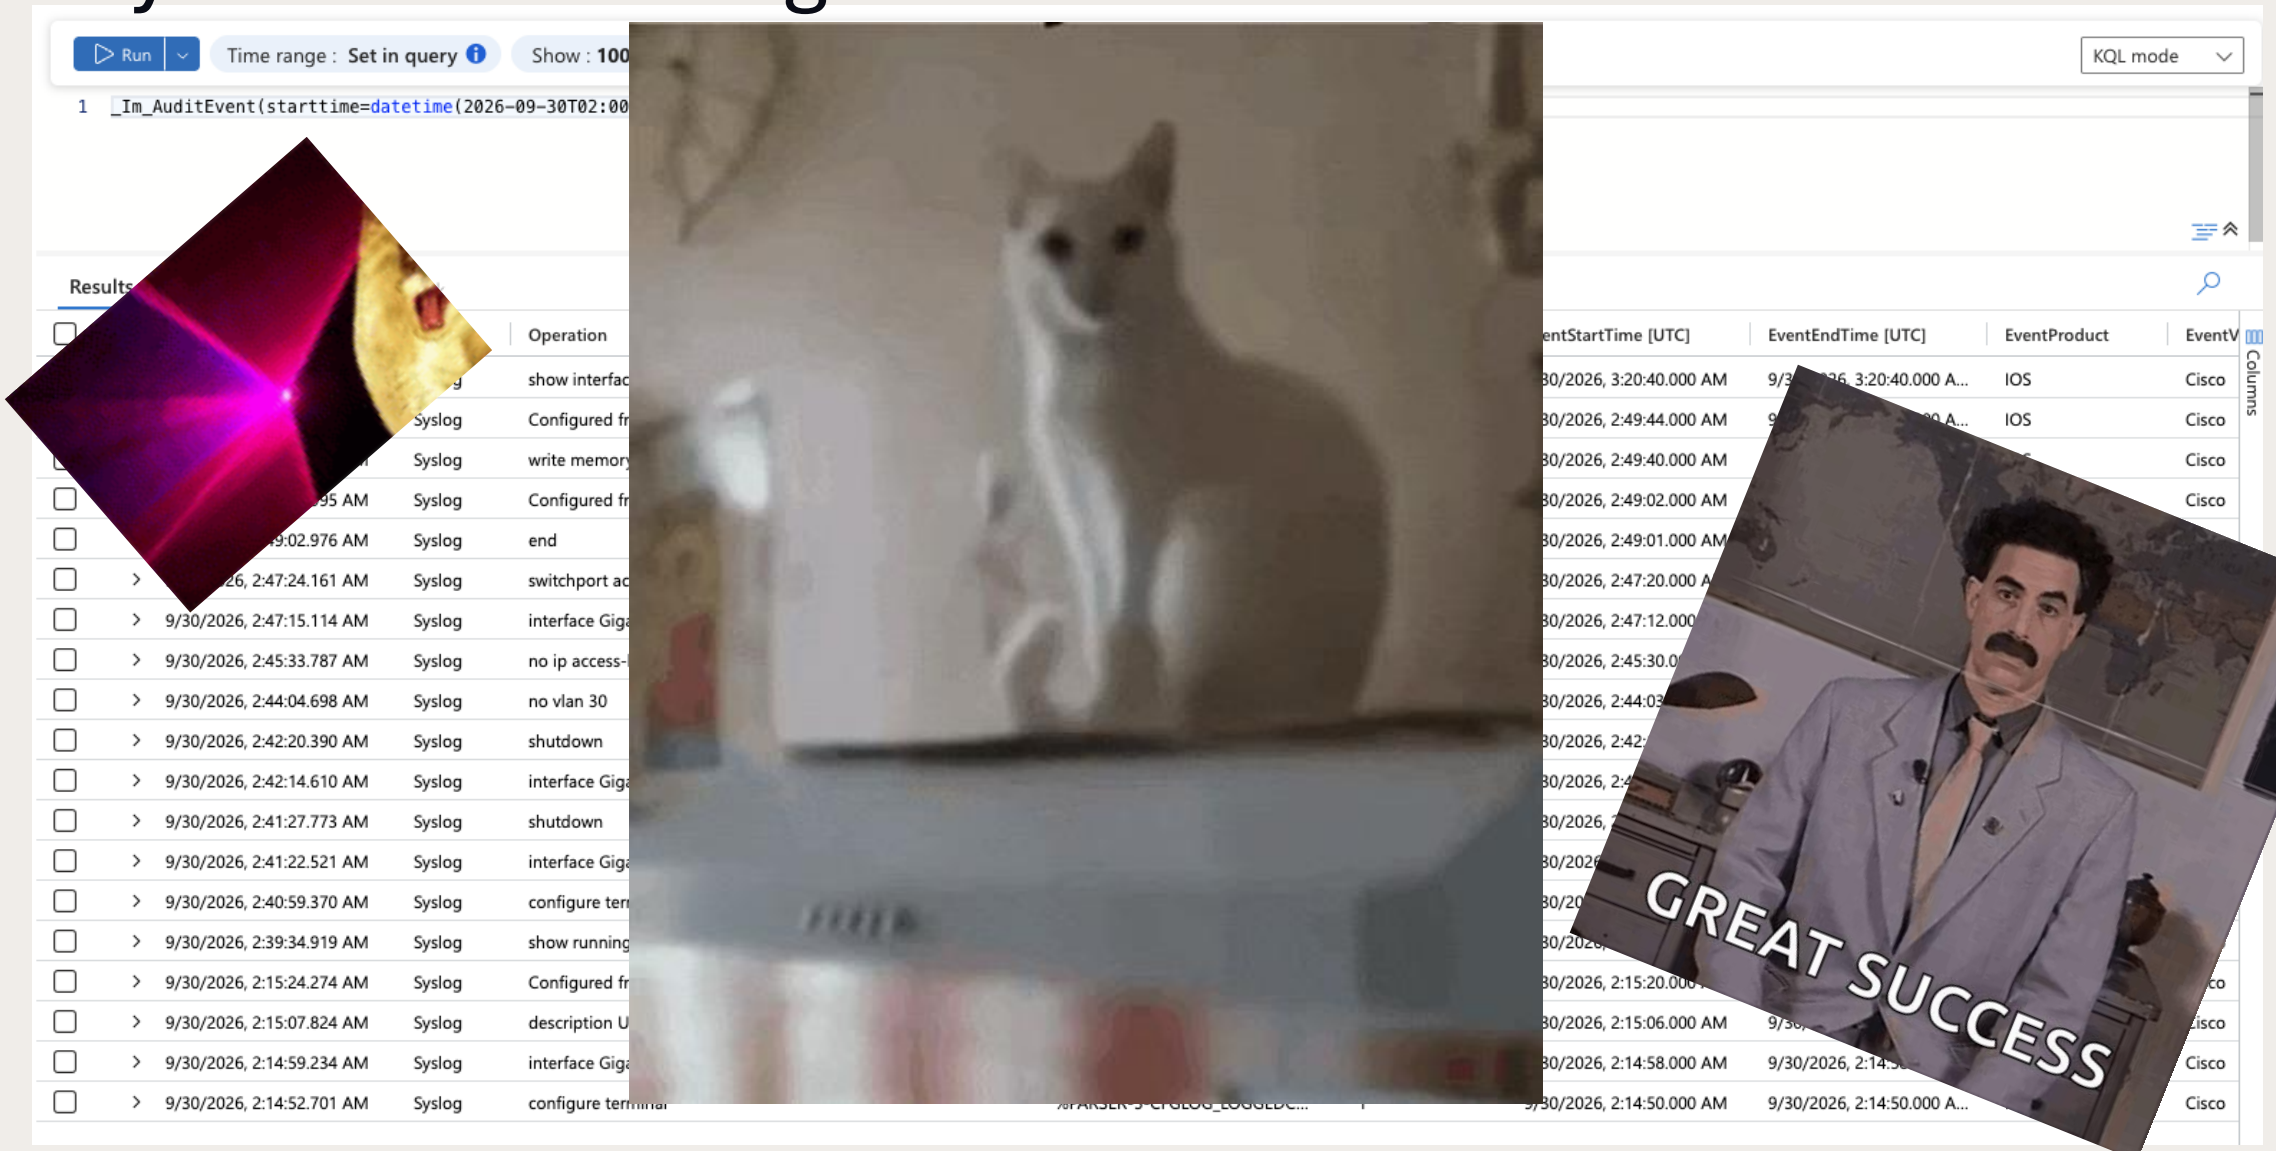

SECURITY NINJA GERMANY

How to write good parsers

Otherwise you better be patient



KQL and ASIM performance cheat sheet

SECURITY NINJA GERMANY

Filter operators

- == is the fastest
- has / has_cs / startswith are also fast
- contains / endswith / simple regex: avoid unless needed
- complex regex is even slower
- search “…” and where * has “…”: never
- Never filter by time in a parser

Parsing operators

- split > parse_csv > parse-kv > parse > extract_all > extract > parse_json > parse_xml
- extract wins for a single value; chaining several extracts is slower than one parse
- JSON/XML: for a few fields use parse / extract instead of parse_json / parse_xml
- Pre-filter before parsing

Union alternatives

- union is easy but very inefficient
- Same-schema variants: use iff / case, not tabular union
- Or a series of extract_all / parse, which return null on no match
- If union is required: pre-filter on native fields, keep filters mutually exclusive
- Never pivot; avoid pack / bag_unpack

Custom parser rules, from Microsoft Learn

Keep parsing record-local

- Read only from the declared source table: no join, watchlist lookup or externaldata
- One source record stays zero or one normalized record, never many; don’t split them up
- No mv-expand / mv-apply
- No summarize / distinct / arg_min / arg_max to correlate, dedupe or aggregate
- datatable + lookup only for static, query-local 1:1 mappings
- If a field needs one of these, fix the source shape or leave it unmapped

Filtering and time rules

- Never filter by time: the calling query already applies the range
- Filter on physical fields before parsing
- Prefer ==, *has*, *startswith* over *contains* / *matches regex*
- Apply optional filter parameters only when the caller set them (utilize empty default values for parameters)
- Separate parsers only for events on different schemas; same-schema variants use iff / case

SECURITY NINJA GERMANY

Our ASIM tips

- use parameters for performant (!) queries
- use GH Copilot Skill (or fork it for your own purposes)
- Clone existing parsers instead of starting from scratch
- Use Microsoft’s parser validation tool

Output of GH Copilot skill

No demo, it will take time. For my Ubiquiti infrastructure it took about 15 minutes.

Skill will create ASIM functions, deploy and/or push to GitHub and test functions and create an overview

Summary: ASIM NetworkSession Parser — Ubiquiti UniFi Network

Vendor/Product: Ubiquiti / UniFi Network (UDM Pro) | **Schema:** NetworkSession v0.2.7
Source: `Ubiquiti_CL` (raw CEF-over-syslog in `Message` column), workspace `la-sentinel-core-prod`

Coverage: 11 CEF event classes — threat detection/firewall blocks (201, 203), WiFi/wired connect/disconnect/roam (400–404), VPN/Teleport connect/disconnect (520–523) — all normalized as network connectivity sessions.

Deliverables (in session workspace, not yet committed to repo):

File	Purpose
ASimNetworkSessionUbiquitiUniFiNetwork.kql	Parameterless parser
vimNetworkSessionUbiquitiUniFiNetwork.kql	Parameterized parser (9 filter params)
deploy_UbiquitiUniFiNetworkSession.json	ARM template used for deployment

Validation: Schema ✅ zero errors · Data ✅ zero errors · Filters ✅ all pass except `eventresult` (accepted exception — field is always `"Success"`, no failure signal exists in source data).

Deployment: ✅ Live in `la-sentinel-core-prod` (rg-sentinel-core-prod), both functions confirmed returning real data via test queries.

Not done: GitHub PR packaging (you chose deploy-only). Let me know if you want that later.

Phishing link
jk, Marvin's GH

https://learn.microsoft.com/en-us/azure/sentinel/normalization-create-parsers-ai-agent
https://github.com/marvin-rse/asim-unifi-networksession-parser

ASIM known issues

It’s not all sunshine and roses.

But mostly!

ASIM known issues

No data lake support

- Use KQL Jobs and write custom parsers for your custom logs
- When you query data lake directly, you can’t use ASIM at all (yet, Microsoft pls)

Performance at scale

- Unfiltered queries over long time ranges are slow
- Use time ranges + filters, avoid generic Im parsers

The ingestion_time() function isn't supported

- Often needed to account for ingestion delay - not usable in ASIM
- Keep in mind when using ASIM in Analytic Rules

Misleading informational message

- "Query had errors" can appear even with 0 real errors, just 0 results
- If a downstream parser fails

Finishing our story

What happened with the admin user?

```
let T0 = datetime(2026-10-12T03:10:00Z);
let T1 = datetime(2026-10-12T03:19:00Z);
let Me = dynamic(["admin@contoso.com", @"CONTOSO\admin"]);
union isfuzzy=true
```

Results | Chart | Add bookmark

EventStartTime [UTC]	Schema	EventProduct	Identity	EventType	Activity	Object	EventResult	SrcIpAddr	SrcGeoCountry
10/12/2026, 3:11:47.205 AM	Authentication	Entra ID	admin@contoso.com	Logon	Sign-in activity	Office 365 SharePoint Online	Success	93.218.47.112	Germany
10/12/2026, 3:14:22.418 AM	Authentication	Entra ID	admin@contoso.com	Logon	Sign-in activity	Microsoft Office 365 Portal	Success	197.210.76.133	Nigeria
10/12/2026, 3:14:32.018 AM	Authentication	Entra ID	admin@contoso.com	Logon	Sign-in activity	Azure Portal	Failure	197.210.76.133	Nigeria
10/12/2026, 3:15:00.618 AM	NetworkSession	Fortinet FortiGate	admin@contoso.com	NetworkSession	SSL VPN login denied by geo restriction	vpn.contoso.com:443	Failure	197.210.76.133	Nigeria
10/12/2026, 3:15:14.818 AM	NetworkSession	Fortinet FortiGate	admin@contoso.com	NetworkSession	SSL VPN tunnel up	vpn.contoso.com:443	Success	45.138.157.92	Netherlands
10/12/2026, 3:15:15.518 AM	Authentication	Fortinet FortiGate	admin@contoso.com	Logon	tunnel-up	VPN-GW01	Success	45.138.157.92	Netherlands
10/12/2026, 3:15:36.718 AM	Authentication	Entra ID	admin@contoso.com	Logon	Sign-in activity	Azure Portal	Failure	195.243.142.86	Germany
10/12/2026, 3:15:44.118 AM	Authentication	Entra ID	admin@contoso.com	Logon	Sign-in activity	Azure Portal	Failure	195.243.142.86	Germany
10/12/2026, 3:15:51.318 AM	Authentication	Entra ID	admin@contoso.com	Logon	Sign-in activity	Azure Portal	Failure	195.243.142.86	Germany
10/12/2026, 3:16:07.018 AM	Authentication	Entra ID	admin@contoso.com	Logon	Sign-in activity	Azure Portal	Success	195.243.142.86	Germany
10/12/2026, 3:16:37.618 AM	NetworkSession	PAN-OS	admin@contoso.com	NetworkSession	RDP session established from VPN pool to backup server	SRV-VEEAM01:3389	Success	10.212.134.207	
10/12/2026, 3:16:40.018 AM	Authentication	Windows	CONTOSO\admin	Logon	4624	SRV-VEEAM01	Success	10.212.134.207	
10/12/2026, 3:17:02.818 AM	AuditEvent	Veeam Backup & Replication	CONTOSO\admin	Other	User logged in	Backup server	Success	10.212.134.207	
10/12/2026, 3:17:09.218 AM	AuditEvent	Veeam Backup & Replication	CONTOSO\admin	Delete	Delete backup job	Daily-Backup-FileServer	Success	10.212.134.207	
10/12/2026, 3:17:16.518 AM	AuditEvent	Veeam Backup & Replication	CONTOSO\admin	Delete	Delete backup job	Daily-Backup-SQL	Success	10.212.134.207	
10/12/2026, 3:17:25.918 AM	AuditEvent	Veeam Backup & Replication	CONTOSO\admin	Delete	Delete backup job	Weekly-Backup-VMware	Success	10.212.134.207	
10/12/2026, 3:17:39.618 AM	AuditEvent	Veeam Backup & Replication	CONTOSO\admin	Delete	Delete backup	REPO-01	Success	10.212.134.207	



Questions?




Jannis Langthaler

linkedin.com/in/jlangthaler

github.com/JLangthaler

langthaler.blog

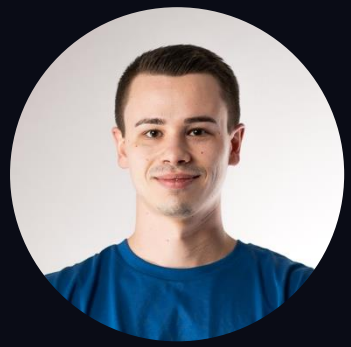

Marvin Rose

linkedin.com/in/marvin-rse/

github.com/marvin-rse

Next sessions

TIME	SESSION	SPEAKER	Room
14:45	From Tenant Sprawl to Tenant Control: AI and Modern Governance in Microsoft Entra	Klaus Bierschenk	Hive
14:45	One Toolbox, No Coffee Breaks: Attacking and Defending with AI	Gianni Castaldi & Tom Rolvers	Washington

Thank You, Ninjas!



See you next Year!

