

EvolveTool-Bench: Evaluating the Quality of LLM-Generated Tool Libraries as Software Artifacts

Alibek T. Kaliyev*
University of Texas at Austin
alibek.kaliyev@utexas.edu

Artem Maryansky
Uber Technologies
artem.maryansky@uber.com

Abstract

Modern LLM agents increasingly create their own tools at runtime—from Python functions to API clients—yet existing benchmarks evaluate them almost exclusively by downstream task completion. This is analogous to judging a software engineer only by whether their code runs, ignoring redundancy, regression, and safety. We introduce **EVOLVETOOL-BENCH**, a diagnostic benchmark that evaluates *LLM-generated tool libraries as first-class software artifacts*. Across three domains requiring actual tool execution (proprietary data formats, API orchestration, and numerical computation), we define library-level software quality metrics—reuse, redundancy, composition success, regression stability, and safety—alongside a per-tool Tool Quality Score measuring correctness, robustness, generality, and code quality. Evaluating four systems spanning the tool-evolution spectrum (code-level evolution, strategy-level evolution, one-shot creation, and no evolution) across 99 tasks and three models from two providers (Claude Sonnet 4, Claude Haiku 4.5, and GPT-4o), we demonstrate the benchmark’s discriminative power: on Claude models, systems with near-identical task completion (63–68%) differ by up to 18% in library health—a gap invisible to task-only evaluation. Across providers, the benchmark further reveals that tool-evolution is model-dependent: GPT-4o fails to trigger evolution on any system, converging to identical low performance regardless of evolution strategy. Per-dimension analysis reveals that correctness, not code style, is the frontier: hidden tests catch defects that self-generated tests miss. We release the benchmark as an open evaluation framework for any tool-generating system.

1 Introduction

LLM agents increasingly generate executable software artifacts at runtime—Python functions, API clients, data parsers—and accumulate them in persistent tool libraries. This capability appears across diverse systems: VOYAGER [11] synthesizes code skills in Minecraft, CREATOR [9] uses tool creation as a reasoning strategy,

LLMs as Tool Makers [6] separates tool-making from tool-using, EvoSkill [1] evolves structured skill folders via failure analysis, and ARISE [7] provides framework-agnostic middleware for tool synthesis with sandboxed validation.

From a software engineering perspective, each of these systems is an *automated code generator* whose output accumulates into a growing codebase. Yet they are evaluated exclusively on task success—analogous to judging a software engineer solely by whether their code runs, ignoring maintainability, duplication, test coverage, regression, and technical debt. In practice, tool libraries can pass downstream benchmarks while accumulating redundant functions, failing on edge cases, breaking previously working capabilities, and never reusing existing code. **No existing benchmark measures these properties.**

We present **EVOLVETOOL-BENCH**, a diagnostic benchmark that treats LLM-generated tool libraries as *first-class software artifacts* subject to quality evaluation. The benchmark is system-agnostic: any tool-generating agent can be evaluated against the same tasks and metrics. Our contributions:

1. **A metric framework for LLM-generated software artifacts.** We define a per-tool Tool Quality Score (TQS) measuring correctness, robustness, generality, and code quality, plus six library-level metrics: reuse rate, redundancy, composition success, regression stability, creation efficiency, and safety. Together these form the EvolveTool Score (ETS), a composite metric that captures both task performance and software quality.
2. **An evaluation harness with independent validation.** Hidden unit tests and adversarial inputs run in sandboxed subprocesses, providing quality assessment independent of each system’s self-validation. Explicit regression tasks measure whether library growth breaks previously working behavior.
3. **Controlled diagnostic sessions.** Structured sequences of 11 tasks with known dependency relationships (seed, gap, variant, compose, regress, adversarial) enable measurement of reuse recognition,

*Corresponding author

function composition, and library stability as the codebase grows.

4. Empirical validation of discriminative power.

We evaluate four systems and demonstrate that the benchmark reveals quality differences invisible to task completion: per-domain variation, per-dimension TQS distributions, and a “reuse paradox” where higher reuse correlates with lower task success.

2 Related Work

Quality of LLM-Generated Code. Tool-Genesis [12] evaluates one-shot tool creation with surface compliance, schema-F1, and unit test pass rates—all per-artifact metrics with no library-level evaluation. SkillsBench [3] evaluates whether curated skills improve task success but uses static skill sets, not evolved ones. CRAFT [13] retrieves from specialized toolsets but does not measure the quality of the toolset itself. Berlot-Attwell et al. [5] evaluate library learning quality in program synthesis, measuring whether learned abstractions generalize—the closest work to ours in spirit, though focused on program synthesis rather than agent tool evolution. None of these works measure redundancy, regression, or reuse across a growing codebase.

Self-Evolving Agent Frameworks. VOYAGER [11] demonstrates lifelong skill acquisition in Minecraft, evaluated by exploration metrics. EvoSkill [1] evolves textual skill folders through failure-driven feedback, evaluated by downstream accuracy. ARISE [7] synthesizes executable Python functions with auto-generated test suites, validates them in isolated sandboxes, and supports iterative refinement. Each of these systems generates software artifacts, but none evaluate the quality of the resulting library—a gap our benchmark is designed to fill.

Software Engineering Benchmarks for Agents. ToolBench [10], AgentBench [8], and ToolComp [2] evaluate agents using pre-defined tool sets. Vending-Bench [4] tests long-horizon coherence with fixed tools. None evaluate agents that *generate* their own tools, and none apply software quality metrics to the generated artifacts.

Gap. No existing benchmark measures redundancy, reuse, regression, composition, or code quality of self-evolved tool libraries as software artifacts. EVOLVETOOL-BENCH fills this gap with a system-agnostic evaluation framework.

Type	N	SE Analog
Seed	3	Use existing library
Gap	2	Implement new feature
Variant	2	Reuse vs. rewrite
Compose	1	Function composition
Regress	1	Regression testing
Adversarial	2	Edge case / fuzz testing

Table 1: Task types and their software engineering analogs. Each session follows a fixed sequence enabling controlled measurement of library evolution.

3 Benchmark Design

3.1 Task Session Structure

Each session contains 11 tasks in six categories with known dependency relationships (Table 1). This structure mirrors software engineering workflows: seed tasks test existing code, gap tasks require new implementation, variant tasks test code reuse, compose tasks test function composition, regress tasks detect regressions, and adversarial tasks probe edge cases.

The task ordering within each session is deliberate. Seed tasks (1–3) establish baseline functionality using pre-provided tools. Gap tasks (4–5) present problems that *cannot* be solved with existing tools, forcing the system to create new ones. Variant tasks (6–7) present problems solvable by the tools created in gap tasks with different parameters—the key test of whether the system recognizes a reuse opportunity or wastefully creates a duplicate. The compose task (8) requires chaining two or more previously created tools. The regress task (9) re-tests an earlier scenario to detect regressions introduced by library growth. Adversarial tasks (10–11) probe edge cases designed to break naive implementations.

3.2 Reuse Detection

The reuse metric measures whether the agent recognizes that an existing tool can solve a new task. Before each task, the harness records the set of tools currently in the library. After the task, it checks whether any tool *used* by the agent was from the pre-existing set (rather than newly created). Formally, for variant and regress tasks:

$$\text{reused}(t) = \exists f \in \text{tools_used}(t) : f \in \mathcal{L}_{\text{before}} \setminus \mathcal{L}_{\text{new}} \quad (1)$$

This measures the *behavioral signal*—did the system attempt reuse?—independently of whether the trajectory was correct. We discuss implications of this design choice in Section 5.4.

3.3 Composition Tasks

Each compose task has an explicit `composes_tasks` field referencing prior task IDs whose tools must be chained.

For example, an API orchestration compose task references ["gap_1", "gap_2"]: the agent must chain the authentication tool (from gap_1) with the pagination tool (from gap_2) to fetch and aggregate all users.

We do *not* guarantee that the prerequisite tools exist in the library. If the system failed to create them during earlier gap tasks, the compose task becomes harder—it must solve everything from scratch. This is realistic: a fragile library makes composition harder, and the metric captures this cascading effect.

3.4 Domains

We design three domains with tasks that require *actual code execution* and cannot be solved by pattern-matching against training data.

Domain A: Data Transformation (5 sessions, 55 tasks). Five proprietary binary formats designed to have no overlap with LLM training data:

- **ABR** (ARISE Binary Records): Custom binary serialization with length-prefixed fields and CRC checksums.
- **RLE**: Run-length encoded matrices with custom header format.
- **VDL** (Validation Definition Language): Schema language for record validation with type constraints and cross-field rules.
- **QLOG**: Binary log format with variable-length entries, severity levels, and timestamps.
- **TPACK**: Nested serialization format with parity-based error correction and integrity verification.

Domain B: API Orchestration (1 session, 11 tasks). A mock HTTP server implementing HMAC-timestamp authentication and XOR-encrypted cursor pagination. Tasks require the agent to: authenticate, paginate through results, handle cursor decryption, and compose these capabilities. The server runs locally during evaluation.

Domain C: Numerical Computation (3 sessions, 33 tasks). Custom scientific computing formats:

- **ARCFIT**: Nonlinear curve fitting specification with custom model definitions and parameter bounds.
- **ARCSIG**: Signal format encoding time-domain samples and requiring FFT-based spectral analysis and filtering.
- **ARCOPT**: Constrained optimization problems with custom constraint encoding and boundary analysis.

3.5 Software Quality Metrics

Per-Tool: Tool Quality Score (TQS). Each synthesized tool is evaluated on four dimensions:

- **Correctness** (C): Proportion of hidden unit tests passing. These tests are *not* the same tests the system generates during evolution—they are independently written to test the tool’s actual specification.
- **Robustness** (R): Proportion of adversarial inputs (malformed data, boundary values, type errors) handled without crashing.
- **Generality** (G): Proportion of held-out inputs (valid but unseen during creation) producing correct output.
- **Code Quality** (Q): Static analysis score based on: presence of docstring, type annotations, error handling, reasonable length (<50 lines), and valid syntax. Each criterion contributes equally.

$$\text{TQS}(t) = \frac{1}{4}(C(t) + R(t) + G(t) + Q(t)) \quad (2)$$

Per-Library: Library Health (LH). Six metrics capture library-level software quality:

$$\rho_r = \frac{|\{t \in \mathcal{T}_{v,r} : \text{reused}\}|}{|\mathcal{T}_{v,r}|} \quad (\text{Code Reuse}) \quad (3)$$

$$\rho_d = \frac{|\{(t_i, t_j) : \text{equiv}\}|}{\binom{|\mathcal{L}|}{2}} \quad (\text{Duplication}) \quad (4)$$

$$\pi = \frac{|\{t \in \mathcal{L} : \text{TQS} \geq 0.5\}|}{|\mathcal{L}|} \quad (\text{Quality Gate}) \quad (5)$$

$$\eta = \frac{|\mathcal{L}_{\text{used}}|}{|\mathcal{L}|} \quad (\text{Dead Code}) \quad (6)$$

$$\gamma = \frac{|\{t \in \mathcal{T}_c : \text{passed}\}|}{|\mathcal{T}_c|} \quad (\text{Composability}) \quad (7)$$

$$\delta = \frac{|\{t \in \mathcal{T}_{\text{reg}} : \text{failed}\}|}{|\mathcal{T}_{\text{reg}}|} \quad (\text{Regression}) \quad (8)$$

$$\text{LH} = \frac{1}{6}(\rho_r + (1 - \rho_d) + \pi + \eta + \gamma + (1 - \delta)) \quad (9)$$

Composite: EvolveTool Score (ETS).

$$\text{ETS} = 0.25\text{TC} + 0.20\overline{\text{TQS}} + 0.10(1 - \text{RC}) + 0.30\text{LH} + 0.15\text{SS} \quad (10)$$

Library health receives the largest weight (0.30) reflecting the benchmark’s thesis that library quality matters beyond task completion. Task completion (0.25) ensures the benchmark does not ignore downstream utility. Tool quality (0.20) measures per-artifact soundness. Refusal cost (0.10) penalizes systems that refuse tasks. Safety score (0.15) captures whether tools avoid dangerous operations.

4 Experimental Setup

To validate the benchmark’s discriminative power, we evaluate four systems representing different points on the tool-evolution spectrum:

1. **No-Evolution**: Seed tools only. The agent receives 3 pre-written tools per session and cannot create new ones. This is the pure baseline.
2. **One-Shot**: Creates tools on first failure without validation. No test generation, no sandbox execution, no iterative refinement. Tests whether code creation alone adds value.
3. **EvoSkill** [1]: Strategy-level evolution. Maintains textual “skill folders” with natural language descriptions. Does not generate executable code—evolves prompts and strategies instead.
4. **ARISE** [7]: Code-level evolution with sandbox validation. Synthesizes Python functions, generates test cases, runs them in isolated subprocesses, and promotes passing tools to the library. Uses LLM-as-judge reward to trigger evolution.

These systems span a spectrum from no tool creation (No-Evolution) through unvalidated creation (One-Shot), strategy-level adaptation (EvoSkill), to validated code synthesis (ARISE). The benchmark is designed to evaluate *any* system on this spectrum.

Models. Three models across two providers: Claude Sonnet 4 and Claude Haiku 4.5 via Amazon Bedrock, and GPT-4o via OpenAI. All four systems run on Sonnet and GPT-4o; ARISE and No-Evolution also run on Haiku. ARISE/Sonnet is run 4 times (original + 3 seeds) for statistical significance.

Scale. 9 sessions $\times$ 11 tasks = **99 tasks** per configuration. 13 configurations total (including seed runs): **1,287 total task executions**.

Verification. Task outputs are verified using lenient key-value containment: if 80%+ of expected key-value pairs appear in the agent’s output, the task passes. This accommodates format variation while requiring substantive correctness.

5 Results

5.1 The Benchmark Reveals Hidden Quality Differences

Table 2 presents the benchmark’s central result: **task completion alone fails to differentiate systems with qualitatively different tool libraries**. On

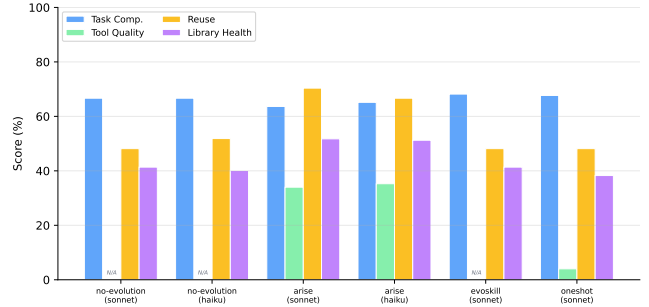


Figure 1: System comparison across four metrics (%). TC clusters all systems together (63–68%); library health separates them (38–52%). This illustrates the benchmark’s discriminative power beyond task completion.

Claude models, all six configurations fall within a 5-percentage-point TC band (63.6–67.7%), yet their library health ranges from 38.3% to 51.7%—an 18-point spread invisible to TC-only evaluation.

Consider two systems a TC-only benchmark would rank similarly: One-Shot/Sonnet (TC=67.7%, ETS=0.519) and No-Evolution/Sonnet (TC=66.7%, ETS=0.518). Both score near-identical ETS. But their library outcomes are qualitatively different: No-Evolution creates zero tools and leaves library health at 41.4%, while One-Shot creates 3 tools that *lower* library health to 38.3%. A TC-only benchmark cannot distinguish “unchanged library” from “library degraded by untested code.”

Statistical significance. ARISE/Sonnet results are reported as mean $\pm$ std across 4 independent runs (original + 3 seeds). Variance is low: ETS=0.609 $\pm$ 0.013, TC=64.9% $\pm$ 1.1%, LH=51.6% $\pm$ 3.4%. The core finding (ARISE achieves highest ETS through library health) is stable across seeds.

Cross-provider results: GPT-4o. All four systems evaluated on GPT-4o converge to identical performance: TC=48.5%, 0 tools created, 0% reuse, LH=27.8%. GPT-4o passes seed tasks (which use pre-loaded tools) but fails on gap, variant, and regress tasks, never triggering tool creation even in ARISE and One-Shot. This reveals that tool evolution is *model-dependent*: the benchmark’s structured tasks expose that current LLMs vary substantially in their ability to generate and validate tool code. The finding that “cheaper Claude models match Sonnet quality” (from Table 2) does not extend to GPT-4o on this benchmark.

5.2 Per-Domain Analysis

The benchmark’s domain structure reveals that tool-evolution effectiveness varies substantially by problem

System	Model	ETS $\uparrow$	TC (%)	Tools	TQS	Reuse (%)	LH (%)
No-Evolution	Sonnet	.518	66.7	0	—	48.1	41.4
EvoSkill	Sonnet	.515	66.7	0	—	55.6	40.7
One-Shot	Sonnet	.519	67.7	3	.04	48.1	38.3
ARISE	Sonnet	.609 $\pm$.013	64.9 $\pm$ 1.1	21 $\pm$ 1	.35	72.2	51.6
No-Evolution	Haiku	.516	66.7	0	—	51.9	40.1
ARISE	Haiku	.612	65.2	13	.35	66.7	51.2
No-Evolution	GPT-4o	.445	48.5	0	—	0.0	27.8
EvoSkill	GPT-4o	.445	48.5	0	—	0.0	27.8
One-Shot	GPT-4o	.445	48.5	0	—	0.0	27.8
ARISE	GPT-4o	.452	48.5	0	—	0.0	27.8

Table 2: Benchmark results across 10 configurations (99 tasks each, 3 domains). ARISE/Sonnet reports mean $\pm$ std over 4 independent runs (1 original + 3 seeds). On Claude models, TC falls within a narrow 5-point band yet ETS spans 0.515–0.612. On GPT-4o, all systems converge to identical low performance (TC=48.5%), revealing that tool evolution is model-dependent. The system with *highest* TC (One-Shot/Sonnet, 67.7%) has near-identical ETS to the system with *lowest* library health (.519 vs .518 for No-Evolution). TC alone cannot distinguish these qualitatively different outcomes.

Domain	Model	TC	Tools	Reuse	LH
Data Trans.	Sonnet	.573	14	.734	.476
Data Trans.	Haiku	.600	7	.800	.500
API Orch.	Sonnet	.909	4	.667	.778
API Orch.	Haiku	1.00	3	.333	.667
Numerical	Sonnet	.651	4	.667	.500
Numerical	Haiku	.621	3	.556	.481

Table 3: ARISE results by domain, showing the benchmark captures domain-specific quality variation. API orchestration yields highest library health; data transformation creates the most tools but with lower quality. (Table shows ARISE because baselines create 0–3 tools total, insufficient for domain breakdown.)

type—another dimension invisible to aggregate TC.

Table 3 shows three distinct profiles:

API orchestration: clean, composable problems. Highest TC (up to 100%) and library health (77.8%). HMAC authentication and pagination are well-suited to tool creation: each is a clean, single-responsibility function.

Data transformation: high tool creation, lower quality. Creates the most tools (14 on Sonnet) but achieves only 47.6% library health. Proprietary binary formats are complex enough that many synthesized parsers fail hidden tests while passing self-generated tests—demonstrating the benchmark’s ability to detect the gap between self-validation and independent validation.

Numerical computation: consistently difficult. Both models achieve similar results ($\sim$ 63–65% TC, $\sim$ 48–

System	C	R	G	Q	TQS
ARISE/Sonnet	.18	.50	.18	.94	.34
ARISE/Haiku	.23	.50	.23	.89	.35
One-Shot/Son.	.17	.50	.17	.61	.04

Table 4: TQS broken down by dimension. C=Correctness, R=Robustness, G=Generality, Q=Code Quality. The benchmark reveals a striking imbalance: code quality is high (0.89–0.94) but correctness is low (0.17–0.23), exposing the gap between syntactic quality and semantic correctness.

50% LH), suggesting these tasks challenge the LLM’s reasoning regardless of model capability.

5.3 Per-Dimension TQS: Where Quality Breaks Down

The benchmark’s per-dimension TQS breakdown (Table 4) reveals *where* tool quality fails—information no existing benchmark provides:

Code quality is high (0.89–0.94). LLMs consistently produce well-structured code with docstrings, type annotations, and error handling. By any syntactic measure, the generated tools look professional.

Robustness is uniformly 0.50. All tools include try/except blocks (avoiding crashes) but do not correctly handle adversarial inputs. This uniform score across systems suggests a systematic limitation rather than a system-specific one.

Correctness is the weakest dimension (0.17–0.23). This is the benchmark’s most important diagnostic finding: hidden unit tests—written independently

System/Model	Reuse	Correct	Incorrect
No-Evolution/Sonnet	48.1%	—	—
EvoSkill/Sonnet	55.6%	22.2%	33.3%
One-Shot/Sonnet	48.1%	—	—
ARISE/Sonnet	72.2%	21.0%	51.9%
No-Evolution/Haiku	51.9%	—	—
ARISE/Haiku	66.7%	—	—

Table 5: The reuse paradox, decomposed. “Correct” reuse = reused tool AND task passed. “Incorrect” reuse = reused tool AND task failed. ARISE achieves the highest overall reuse rate (72.2%) but has the highest *incorrect* reuse rate (51.9%), meaning most of its reuse is of defective tools. Entries marked — are pre-metric runs. ARISE/Sonnet values averaged across 3 seeds; EvoSkill measured once with faithful implementation.

of each system’s self-generated tests—catch defects that self-validation misses. Tools that pass their own tests frequently fail independent tests, revealing *shared misconceptions* between the code and its self-generated test suite.

Generality tracks correctness. Tools that fail hidden tests also fail on unseen inputs, indicating fundamental misunderstanding of the format specification rather than overfitting to specific test cases.

5.4 The Reuse Paradox

The benchmark reveals an unexpected interaction between reuse behavior and task success (Table 5). We introduce a finer-grained metric: *correct reuse* (reused tool AND task passed) vs. *incorrect reuse* (reused tool AND task failed). ARISE/Sonnet has the highest overall reuse rate (72.2%), but decomposition shows that the majority of this reuse is incorrect: 51.9% of variant/regress tasks reuse a defective tool, while only 21.0% reuse correctly.

This “reuse paradox” occurs because the agent correctly identifies reuse opportunities but reuses tools that contain defects—analogous to a developer reusing a buggy utility function. The reuse decision is architecturally correct, but the underlying code has a defect. This finding is only visible because the benchmark measures reuse behavior and task outcome independently. It has practical implications: **high reuse is beneficial only when the reused tools are correct**, reinforcing the importance of independent validation. EvoSkill, despite creating no executable tools, shows a similar but muted pattern (22.2% correct vs. 33.3% incorrect reuse of seed tools), suggesting the paradox is fundamental to tool-reusing agents rather than an artifact of ARISE’s synthesis strategy.

Task Type	ARISE/S	NoEvol/S	Δ
Seed (N=27)	100%	100%	0
Gap (N=18)	38.9%	44.4%	−5.5
Variant (N=18)	33.3%	50.0%	−16.7
Compose (N=9)	66.7%	66.7%	0
Regress (N=9)	33.3%	33.3%	0
Adversarial (N=18)	66.7%	66.7%	0

Table 6: Task completion by type. The benchmark’s structured sessions reveal that tool creation does not uniformly improve task performance—it helps on some task types and hurts on others.

5.5 Task-Type Breakdown

The benchmark’s task-type structure (Table 6) enables fine-grained analysis impossible with unstructured benchmarks:

Tool creation has costs, not just benefits. ARISE scores lower on gap (−5.5%) and variant (−16.7%) tasks. The evolution overhead—detecting failure, synthesizing a tool, testing it—can consume the task budget without producing a correct solution. On variant tasks, reusing a defective tool performs worse than solving inline. These costs are invisible to aggregate TC.

Regression is universally difficult. Both systems score 33.3% on regress tasks, indicating that library growth introduces instability regardless of evolution strategy. The benchmark’s explicit regression tasks capture this—no existing tool benchmark tests for it.

Structured sessions enable causal analysis. Because each task type has a known purpose (gap = creation needed, variant = reuse opportunity, regress = stability test), the benchmark supports diagnostic reasoning about *why* a system succeeds or fails, not just *whether* it does.

5.6 Summary of Key Findings

Finding 1: TC is insufficient for tool-generating systems. All configurations achieve 63–68% TC, but ETS ranges 0.516–0.612. The system with highest TC (EvoSkill, 68.2%) and the system with lowest library health (One-Shot, 38.3%) are indistinguishable by TC.

Finding 2: Code-level and strategy-level evolution produce different artifacts. ARISE creates 22 tools with 70.4% reuse; EvoSkill creates zero tools and leaves library health identical to the no-evolution baseline. The benchmark quantifies this difference.

Finding 3: Unvalidated code generation is a net negative. One-Shot’s library health (38.3%) falls *be-*

does not apply to our evaluation setting. (2) We evaluate three models across two providers (Anthropic Claude Sonnet 4, Haiku 4.5, and OpenAI GPT-4o); broader provider coverage (Google, open-source models) would strengthen generalizability. (3) All quality checks are automated; human code review might yield different assessments. (4) ARISE/Sonnet results are averaged over 4 runs; other configurations are single runs. (5) The correct-reuse metric was added after initial experiments, so only faithful EvoSkill and ARISE/Sonnet seed runs report this decomposition.

7 Conclusion

We present EVOLVETOOL-BENCH, the first benchmark that evaluates LLM-generated tool libraries as software artifacts. The benchmark’s central demonstration is that task completion—the dominant metric in existing evaluations—fails to distinguish systems with qualitatively different tool libraries: a 5-point TC band masks an 18-point library health spread. Per-dimension analysis reveals that correctness, not code style, is the frontier for LLM-generated tools. Per-domain analysis shows that tool creation is most effective for clean, composable problems and least effective for complex proprietary formats. The reuse paradox reveals that architectural decisions (reuse) and code quality (correctness) must be evaluated jointly. We release EVOLVETOOL-BENCH as an open evaluation framework for any tool-generating system.¹

References

- [1] Ayman Alzubi et al. Evoskill: Evolving skill libraries for open-domain agents. *arXiv preprint arXiv:2603.02766*, 2026.
- [2] Anonymous. Toolcomp: Evaluating multi-tool composition in llm agents. *arXiv preprint arXiv:2501.01290*, 2025.
- [3] Anonymous. Skillsbench: Evaluating skill reusability in llm agents. *arXiv preprint arXiv:2602.12670*, 2026.
- [4] Erik Backlund and Lars Petersson. Vending-bench: Evaluating long-horizon agent coherence. *arXiv preprint*, 2025.
- [5] Ian Berlot-Attwell et al. Evaluating library learning in program synthesis. In *Proceedings of the 18th Conference of the European Chapter of the Association for Computational Linguistics (EACL)*, 2026.
- [6] Tianle Cai, Xuezhi Wang, Tengyu Ma, Xinyun Chen, and Denny Zhou. Large language models
- as tool makers. *arXiv preprint arXiv:2305.17126*, 2023.
- [7] Alibek T. Kaliyev. ARISE: Adaptive runtime improvement through self-evolution. <https://github.com/abekek/arise>, 2026. Software. Documentation: <https://arise-ai.dev>.
- [8] Xiao Liu et al. Agentbench: Evaluating llms as agents. *ICLR*, 2024.
- [9] Cheng Qian, Chi Han, Yi R Fung, Yujia Qin, Zhiyuan Liu, and Heng Ji. Creator: Tool creation for disentangling abstract and concrete reasoning of large language models. *Findings of EMNLP*, 2023.
- [10] Yujia Qin et al. Toolllm: Facilitating large language models to master 16000+ real-world apis. *arXiv preprint arXiv:2307.16789*, 2023.
- [11] Guanzhi Wang, Yuqi Xie, Yunfan Jiang, Ajay Mandlekar, Chaowei Xiao, Yuke Zhu, Linxi Fan, and Anima Anandkumar. Voyager: An open-ended embodied agent with large language models. *Advances in Neural Information Processing Systems*, 2023.
- [12] Congying Xia et al. Tool-genesis: Evaluating tool creation capabilities of llms. *arXiv preprint arXiv:2603.05578*, 2026.
- [13] Lifan Yuan et al. Craft: Customizing llms by creating and retrieving from specialized toolsets. *arXiv preprint arXiv:2309.17428*, 2023.

¹<https://github.com/abekek/evolvetoool-bench>