

# FINAL EXAM

EMPLID

--	--	--	--	--	--	--	--

CSCI 135

NAME: FIRST LAST

--

**1** (18%)

(3%) **i** What is the difference between passing by value and passing by reference to a function?

(3%) **ii** How does a function return a dynamic array?

(3%) **iii** Explain the difference between the current size and the capacity of an array.

(3%) **iv** Explain the purpose of the `::` operator?

(3%) **v** What is a constructor function, and what is special about its name?

(3%) **vi** Why is it important to use the **delete** operator on a pointer to a dynamic object, before setting its value to **nullptr**?

## 2 (12%)

(6%) i What is the output of the following code snippet? Show your work and put answer in the box:

```
string message = "Hello! ";
string* p = &message;
*p = "Hi! ";
message = "Salut! " + *p;
cout << *p << endl;
```

(6%) ii Given the following code snippet:

```
int arr[10] = { -3, 54, 23, 69, 88, 666, 31, 25, -69, 12 };
int* ptr = arr;
```

Write the code snippet that uses pointer arithmetic (not array notation) to output the value of `arr[3]`, and write the value in the box:

## 3 (10%)

Write a recursive function that adds up all integers from 0 to the positive integer `n`.

Hint: if `n` is 0, the function returns 0; otherwise, it returns `n` plus the sum of integers from 0 to `(n - 1)`.

```
int add_up(int n) {
```

**4** (8%) Write a function that returns a dynamic array, of size `n`, composed of sequential odd integers starting from 1: 1, 3, 5, 7, etc...

```
int* odd_array(int n) {
```

**5** (8%) Write a function that returns `false` if a string has no letters or digits, `true` if it does. You may use either recursion or iteration. Use `string` library functions: `bool isalpha()` and `bool isdigit()`.

```
bool not_alpha_num(string& s) {
```

**6 (10%)** Write a function that implements a standard algorithm for removing an element from an unordered vector of unique integers. Your function does not need to preserve the order of elements in the vector.

```
void delete(vector<int>& my_vector, int n) {
```

**7 (10%)** Write a function that finds the sums of the values in each of the rows of a two-dimensional array: one sum per row. Return a one-dimensional array of sums. This array must be dynamic, so that it persists beyond the lifetime of your function. Finish the `main()` function by cleaning up memory.

```
const int COLUMNS = 4;
```

```
int* find_sums(int values[][COLUMNS], int number_of_rows) {
```

```
int main() {
```

```
    int two_d_array[3][COLUMNS] = {{ 2, 1, 4, 9 }, { 1, 0, 2, 7 }, { 7, 3, 6, 1 }};
```

```
    int* sums = find_sums(two_d_array, 3); //sum values in each of the three rows
```

```
    cout << sums[0] << " " << sums[1] << " " << sums[2] << endl;
```

## 8 (16%)

(4%) **i** Define a simple data-only `class SecretCode` (with only public data members and no member functions — the book would call it a `struct`).

A secret code has an `int key` and a `string message`.

(8%) **ii** Write a function that returns an encrypted message by "shifting" each character by the `key`: adding the `key` to the ASCII code of that character. To do that you will have to cast `char` as `int` and back as `char`. See the review sheet for casting / type conversion.

```
string encrypt(SecretCode sc)
{
```

(4%) **iii** Write a `main()` function that reads a message and a key from the user input, calls your function, and displays the encrypted message.

```
int main()
{
```

## 9 (20%)

(8%) **i** Implement a class `Circle`. Provide a constructor to construct a circle with a given radius, member functions `get_perimeter()` and `get_area()` that compute the perimeter and area, and a member function `void increase_radius(double delta)` that resizes the circle by adding a value to the radius.

(12%) **ii** Write individual one line commands to accomplish the following (2 points each):

- 1 Create a local circle object of radius 4;
- 2 Increase its radius by 5;
- 3 Print out its perimeter and its area;
- 4 Create another circle object, but this time in the dynamic memory;
- 5 Deallocate this object's memory;
- 6 Take care of the dangling pointer.

## Variable and Constant Definitions

Type	Name	Initial value
int	cans_per_pack	6;
const double	CAN VOLUME	0.335;

## Type Conversion: Explicit Cast

```
char c = 'A'; // 'A' is ASCII code 65
int x = (int)c; // explicit cast to int; x is now 65
x = x + 5; // x is 70
char d = (char)a; // explicit cast to char;
// d now has the ASCII value 70, which is 'F'
```

## Mathematical Operations

```
#include <cmath>
pow(x, y)    Raising to a power  $x^y$ 
sqrt(x)      Square root  $\sqrt{x}$ 
log10(x)     Decimal log  $\log_{10}(x)$ 
abs(x)       Absolute value  $|x|$ 
sin(x)       } Sine, cosine, tangent of  $x$  ( $x$  in radians)
cos(x)       }
tan(x)       }
```

## Selected Operators and Their Precedence

(See Appendix B for the complete list.)

[]	Array element access
++ -- !	Increment, decrement, Boolean <i>not</i>
* / %	Multiplication, division, remainder
+ -	Addition, subtraction
< <= > >=	Comparisons
= !=	Equal, not equal
&&	Boolean <i>and</i>
	Boolean <i>or</i>
=	Assignment

## Loop Statements

```
while (balance < TARGET)
{
    year++;
    balance = balance * (1 + rate / 100);
}
```

Executed while condition is true

```
for (int i = 0; i < 10; i++)
{
    cout << i << endl;
}
```

```
do
{
    cout << "Enter a positive integer: ";
    cin >> input;
}
while (input <= 0);
```

Loop body executed at least once

## Conditional Statement

```
if (floor >= 13)
{
    actual_floor = floor - 1;
}
else if (floor >= 0)
{
    actual_floor = floor;
}
else
{
    cout << "Floor negative" << endl;
}
```

Executed when condition is true

Second condition (optional)

Executed when all conditions are false (optional)

## String Operations

```
#include <string>
string s = "Hello";
int n = s.length(); // 5
string t = s.substr(1, 3); // "ell"
string c = s.substr(2, 1); // "l"
char ch = s[2]; // 'l'
for (int i = 0; i < s.length(); i++)
{
    string c = s.substr(i, 1);
    or char ch = s[i];
    Process c or ch
}
```

## Function Definitions

```
double cube_volume(double side_length)
{
    double vol = side_length * side_length * side_length;
    return vol;
}
```

Exits function and returns result.

```
void deposit(double& balance, double amount)
{
    balance = balance + amount;
}
```

Reference parameter

Modifies supplied argument

## Arrays

```
int numbers[5];
int squares[] = { 0, 1, 4, 9, 16 };
int magic_square[4][4] =
{
    { 16, 3, 2, 13 },
    { 5, 10, 11, 8 },
    { 9, 6, 7, 12 },
    { 4, 15, 14, 1 }
};

for (int i = 0; i < size; i++)
{
    Process numbers[i]
}
```

## Vectors

```
#include<vector> Element type Initial values (C++ 11)
vector<int> values = { 0, 1, 4, 9, 16 };

vector<string> names; Initially empty

names.push_back("Ann"); Add elements to the end
names.push_back("Cindy"); // names.size() is now 2


names.pop_back(); // Removes last element

names[0] = "Beth"; // Use [] for element access
```

## Pointers

```
int n = 10;
int* p = &n; // p set to address of n
*p = 11; // n is now 11
```

```
int a[5] = { 0, 1, 4, 9, 16 };
p = a; // p points to start of a
*p = 11; // a[0] is now 11
p++; // p points to a[1]
p[2] = 11; // a[3] is now 11
```

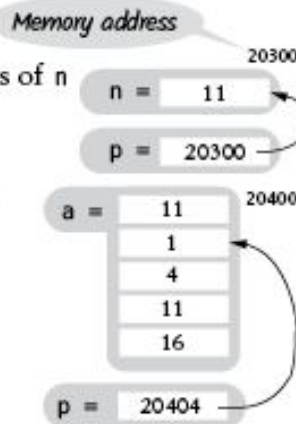

## Input and Output

```
#include <iostream>
cin >> x; // x can be int, double, string
cout << x;
```

```
while (cin >> x) { Process x }
if (cin.fail()) // Previous input failed
```

```
#include <fstream>
string filename = ...;
ifstream in(filename);
ofstream out("output.txt");
string line; getline(in, line);
char ch; in.get(ch);
```

```
void increment_print() {
    static int s_value = 0; //static duration
    s_value++;
    cout << s_value << '\n';
} //s_value is not destroyed, but goes out of scope

int main() {
    increment_print(); //1
    increment_print(); //2
}
```

```
class Item {
private:
    int m_id;
    static int s_id_counter;
public:
    Item() {
        m_id = s_id_counter++;
    }
    int get_id() const {
        return m_id;
    }
};

int Item::s_id_counter = 1;

int main() { //
    Item first;
    Item second;
    cout << first.get_id(); //1
    cout << second.get_id(); //2
}
```

## Static Variables

### Static Data Members

## Range-based for Loop

```
An array, vector, or other container (C++ 11)
for (int v : values)
{
    cout << v << endl;
}
```

## Output Manipulators

```
#include <iomanip>
```

endl	Output new line
fixed	Fixed format for floating-point
setprecision(n)	Number of digits after decimal point for fixed format
setw(n)	Field width for the next item
left	Left alignment (use for strings)
right	Right alignment (default)
setfill(ch)	Fill character (default: space)

## Enumerations, Switch Statement

```
enum Color { RED, GREEN, BLUE };
Color my_color = RED;
```

```
switch (my_color) {
    case RED :
        cout << "red"; break;
    case GREEN:
        cout << "green"; break;
    case BLUE :
        cout << "blue"; break;
}
```

## Class Definition

```
class BankAccount
{
public:
    BankAccount(double amount); Constructor declaration
    void deposit(double amount); Member function declaration
    double get_balance() const; Accessor member function
    ...
private: Data member
    double balance;
};

void BankAccount::deposit(double amount) Member function definition
{
    balance = balance + amount;
}
```

## Inheritance

```
Derived class Base class
class CheckingAccount : public BankAccount
{
public:
    void deposit(double amount); Member function overrides base class
private:
    int transactions; Added data member in derived class
};

void CheckingAccount::deposit(double amount)
{
    BankAccount::deposit(amount); Calls base class member function
    transactions++;
}
```