
Stack Overflow is a question and answer site for professional and enthusiast programmers. It's 100% free.

Take the 2-minute tour

Neo4j Isof: command not found at db server startup



add a comment

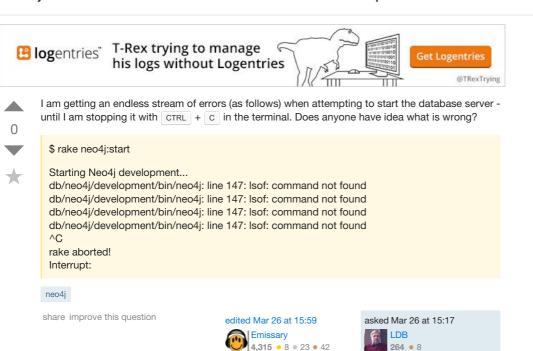

active oldest voi

I solved this after I added /usr/sbin to the PATH. Here it is: levi\$ echo \$PATH /Users/levi/.rbenv/shims:/usr/local/bin:/usr/bin:/usr/sbin/:/Applications/Sublime

0

Text.app/Contents/SharedSupport/bin


add a comment

share improve this answer

answered Mar 26 at 16:24

264 . 8

Your Answer

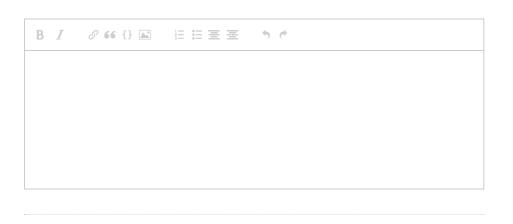

asked 4 months ago

viewed 118 times

active 4 months ago

Blog

Why Stack Overflow is a Good Workplace for Women

Related

- Neo4j StartService FAILED 1053 after copying Beer DB example
- Problems restarting Neo4j 1.8.1
- Neo4J web console has stats for my embedded data, but cannot query it
- 2 Error Updating Nodes in Neo4J via Rest
- Installation error with Neo4j enterprise edition 2.0.0
- Neo4J 2.01 Browser unresponsive
- O Cannot start a neo4j cluster with 3 instances on different machines
- Neo4j -can't start the db in dev JVMs error
- Neo4j browser interface stops working or reconnecting
- neo4j starts then immediately stops

Hot Network Questions

U For loop formatting

- Why don't decoupling/bypass capacitors need resistors to perform their function, like regular filters?
- A short, brutal riddle
- Approximation of Borel sets by a countable collection of majorants
- Religion After the Discovery of a Multiverse

more hot questions

Sign up or log in

8	Sign up using Google
f	Sign up using Facebook
≡	Sign up using Stack Exchange

Post as a guest

Name	
Email	
required, but never shown	

Post Your Answer

By posting your answer, you agree to the privacy policy and terms of service.

Not the answer you're looking for? Browse other questions tagged neo4j or ask your own question.

a question feed

