



PGW TOKENIZED PAYMENT VERSION 2 (NON-BETA)

API Specification

Product Integration
V1.2

Table of Contents

Product Overview	4
User Journey	4
Without Agreement Journey	4
With Agreement Journey	4
API Call flow	6
Token Management	6
Tokenized Without Agreement	6
Tokenized With Agreement	7
API Base URLs	9
Response Codes	9
Authentication APIs	10
Grant Token API	10
Request Parameters	10
Success Response Parameters	10
Error Response Parameters	11
Sample Request	11
Sample Success Response	11
Sample Error Response	11
Refresh Token	11
Request Parameters	11
Success Response Parameters	12
Error Response Parameters	12
Sample Request	12
Sample Success Response	12
Sample Error Response	12
With Agreement Payment APIs	12
Create Agreement	13
Request Parameters	13
Success Response Parameters	13
Error Response Parameters	13
Sample Request	14
Sample Success Response	14
Sample Error Response	14
Execute Agreement	14
Request Parameters	14
Success Response Parameters	15
Error Response Parameters	15
Sample Request	15
Sample Success Response	15
Sample Error Response	15
Cancel Agreement	16
Request Parameters	16
Success Response Parameters	16
Error Response Parameters	16
Sample Request	16
Sample Success Response	17
Sample Error Response	17
Create Payment with Agreement	17
Request Parameters	17
Success Response Parameters	18
Error Response Parameters	18
Sample Request	18

Sample Success Response	19
Sample Error Response	19
Execute Payment with Agreement	19
Request Parameters	19
Success Response Parameters	20
Error Response Parameters.....	20
Sample Request.....	20
Sample Success Response	20
Sample Error Response	21
Without Agreement Payment APIs	21
Create Payment	21
Request Parameters	21
Success Response Parameters	22
Error Response Parameters.....	22
Sample Request.....	22
Sample Success Response	23
Sample Error Response	23
Execute Payment	23
Request Parameters	23
Success Response Parameters	24
Error Response Parameters.....	24
Sample Request.....	24
Sample Success Response	24
Sample Error Response	25
Query and Search APIs	25
Query Agreement	25
Request Parameters	25
Success Response Parameters	25
Error Response Parameters.....	25
Sample Request.....	26
Sample Success Response	26
Sample Error Response	26
Query Payment	26
Request Parameters	26
Success Response Parameters	26
Error Response Parameters.....	27
Sample Request.....	27
Sample Success Response	27
Sample Error Response	28
Search Transaction.....	28
Request Parameters	28
Success Response Parameters	28
Error Response Parameters.....	29
Sample Request.....	29
Sample Success Response	29
Sample Error Response	29
Refund and Status APIs	29
Refund	29
Request Parameters	29
Success Response Parameters	30
Error Response Parameters.....	30
Sample Request.....	30
Sample Success Response	31

Sample Error Response31

Refund Status.....31

Request Parameters31

Success Response Parameters31

Error Response Parameters.....32

Sample Request.....32

Sample Success Response32

Sample Error Response32

Product Overview


bKash's Tokenized Checkout offers customers a more seamless and convenient payment experience. Through this feature, customers can create a payment agreement on merchant websites or mobile apps, allowing future transactions to be completed using only their bKash wallet PIN. This eliminates the need to re-enter account details for each payment.

To enable this functionality, the merchant system must securely store these agreements against individual user accounts. This approach ensures faster and more efficient transactions, benefiting both merchants and customers.

Tokenized Checkout represents the next generation of bKash’s “Checkout” feature, designed to simplify and accelerate the payment process. Once a valid Agreement ID is in place, customers can complete payments by simply entering their bKash PIN making the experience quick, secure, and user-friendly.

User Journey

Without Agreement Journey

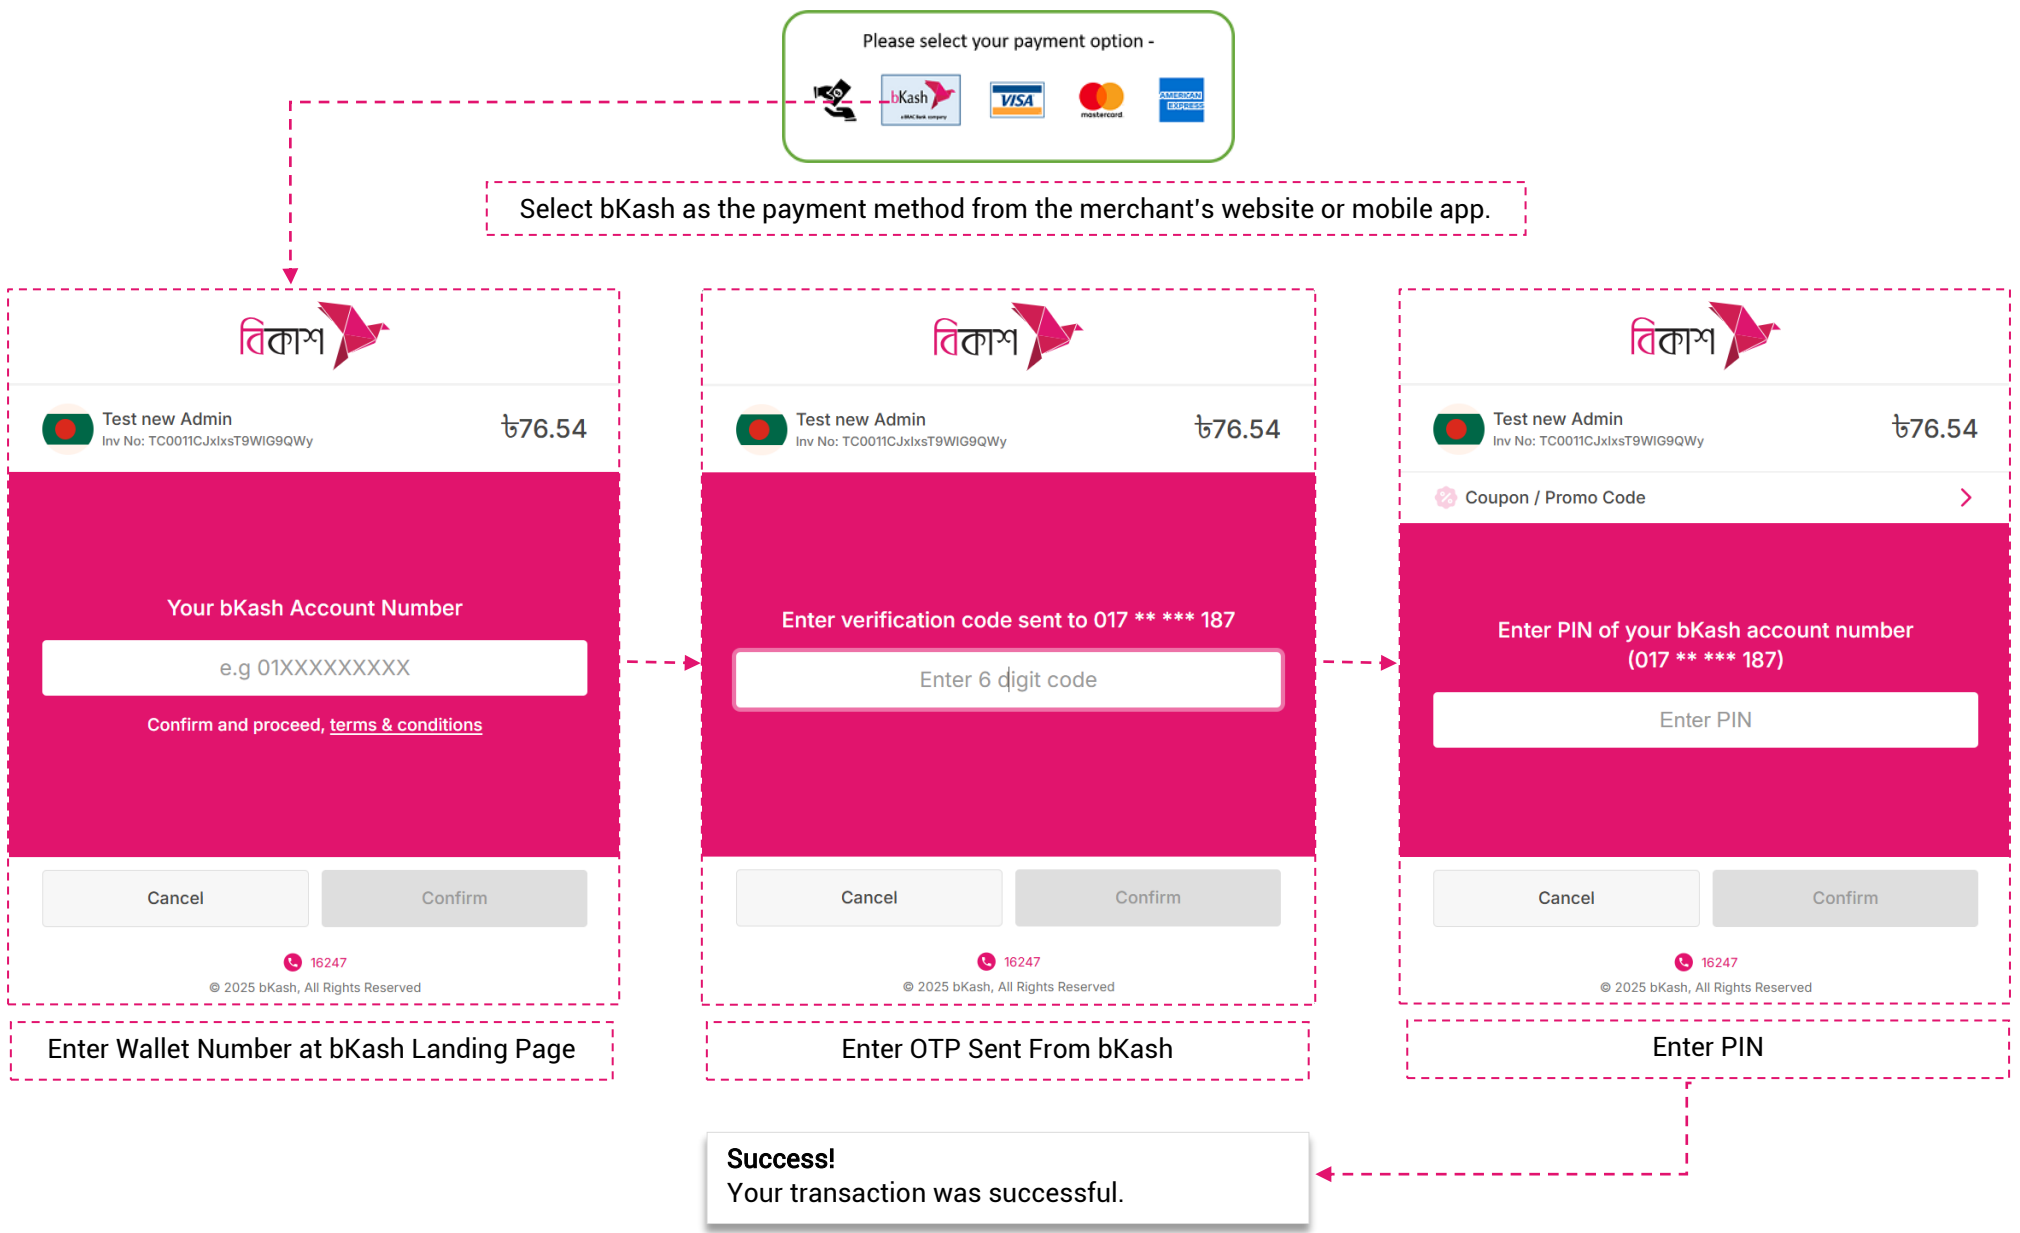

With Agreement Journey

The customer must be logged in to the merchant’s website or mobile app. To create an agreement, they should select the “Add bKash” button (or a similar option) within the merchant platform.

Agreement Creation and Account Binding:

Log in

Email

joe@email.com

Password

Enter your Password

[forgot password?](#)

Login

Don't have an account? [Register here.](#)

Payment methods



Add credit or debit card



Add bKash



Add Nagad



Use Grameenphone billing

[More payment settings](#)

Merchant Login Page for Customer

Account Binding or Agreement Creation Page



Test new Admin

Your bKash Account Number

e.g 01XXXXXXX

Confirm and proceed, [terms & conditions](#)

Cancel

Confirm

16247

© 2025 bKash, All Rights Reserved

Enter Wallet Number at bKash Landing Page



Test new Admin

Enter verification code sent to 017 ** ** 187

Enter 6 digit code

Cancel

Confirm

16247

© 2025 bKash, All Rights Reserved

Enter OTP Sent From bKash



Verification Successful

Redirecting to [Merchant Website](#) in 2s

16247

© 2025 bKash, All Rights Reserved

Wallet Verification Successful

Payment with Saved Agreement:



Saved Wallet
017XXXXX760

On the payment method page, the customer will be able to see the saved agreement



Test new Admin

Inv No: TC0001CUAmK4kpP4E8yVb

৳32.91

Coupon / Promo Code

Enter PIN of your bKash account number
(017 ** ** 187)

Enter PIN

Cancel

Confirm

16247

© 2025 bKash, All Rights Reserved

Enter PIN



Verification Successful

Redirecting to [Merchant Website](#) in 1s

16247

© 2025 bKash, All Rights Reserved


PIN Verification Successful

Success!
Your transaction was successful.

API Call flow

Token Management

Token creation and refresh activities are initiated by the merchant system and do not have customer involvement. The following flow describes the token life cycle -

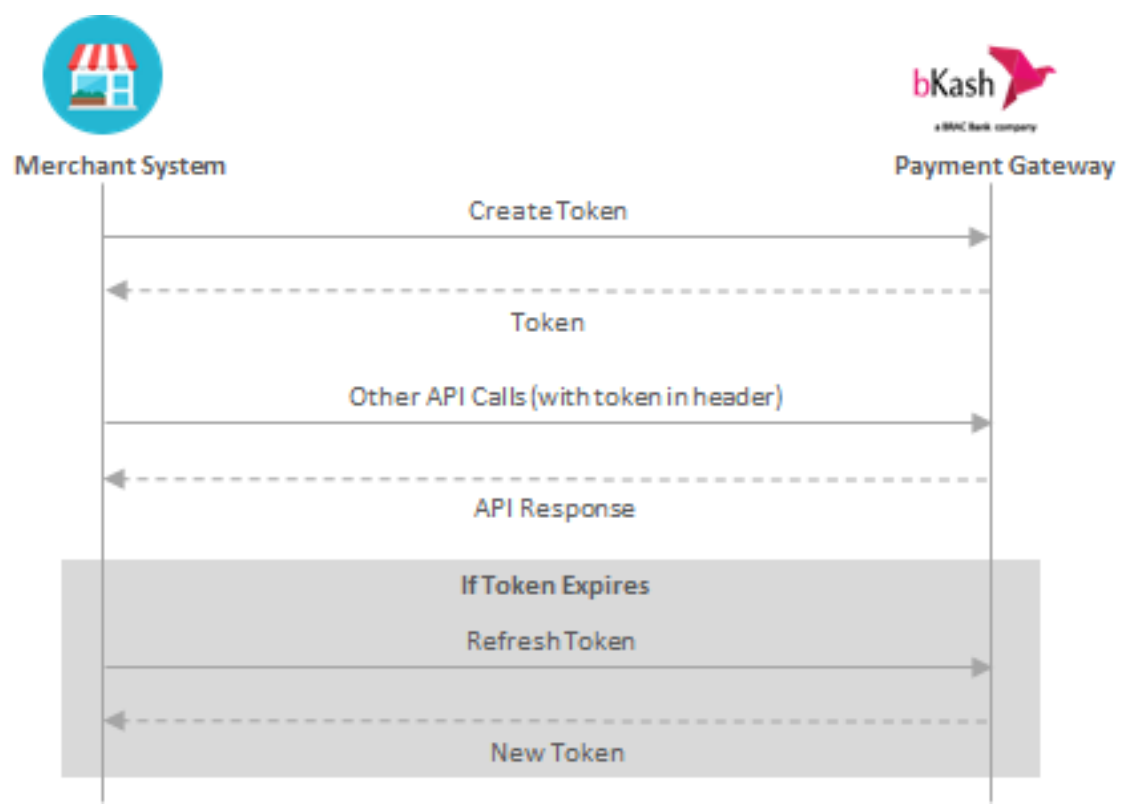

Token Management Steps

- Before accessing any bKash payment APIs, call the Grant Token API to get authorization token. By default, the token lifetime is 3600 seconds.
- Use this token value in the "Authorization" header for accessing future API calls.
- Before the end of the current token lifetime (at the 50th/55th minute), call the Refresh Token API to get a new token against your existing token. You will have to use the new token for subsequent other API calls. **Do not call this API more than two times within an hour. If you exceed this limit, the API will return an error, and you will be blocked for one hour.**

Tokenized Without Agreement

bKash checkout product provides a basic way to perform payment. Merchants can integrate this checkout feature in their website or mobile application and accept payment from their customers. In order to complete payment, a customer needs to provide his bKash wallet number, bKash wallet PIN and OTP (which is sent to his registered mobile number at bKash through SMS).

System Interaction

Before invoking any bKash API, ensure that you have valid authorization tokens. For details on token generation and management please refer to the **Token Management** Steps.

The following steps outline the system-level interactions along with corresponding customer actions:


- 1. Customer Initiates Payment**
When the customer clicks the **"Payment with bKash"** button (or a similar action), call the **Create Payment API**.
- 2. Redirect to bKash Payment Page**
If the API returns a successful response, load the bKashURL provided in the response. This URL directs the customer to the bKash payment interface.
- 3. Customer Provides Wallet Information**
On the bKash page, the customer will sequentially enter:
 - Wallet number
 - 6-digit OTP
 - PIN
- 4. Callback Handling**
Upon successful validation of the customer’s credentials:
 - bKash will call the successCallbackURL provided in the Create Payment API request.
 - For failed or canceled transactions, bKash will call the failureCallbackURL or cancelledCallbackURL, respectively.
- 5. Execute Payment**
On receiving a successful callback, invoke the **Execute Payment API** to finalize the transaction.
- 6. Payment Completion**
If the Execute Payment API returns a success response, the payment is considered complete.
- 7. Handling Pending Payments**
If no response is received from the Execute Payment API:
 - Call the **Query Payment API** to check the payment status.
 - If the status is "Initiated", retry the payment process starting from the Create Payment API.

- If the status is "Completed", proceed to confirm the success to the customer.

8. **Timeout Configuration**

Implement a default timeout of **30 seconds** for all bKash API calls.

System Interaction Flow

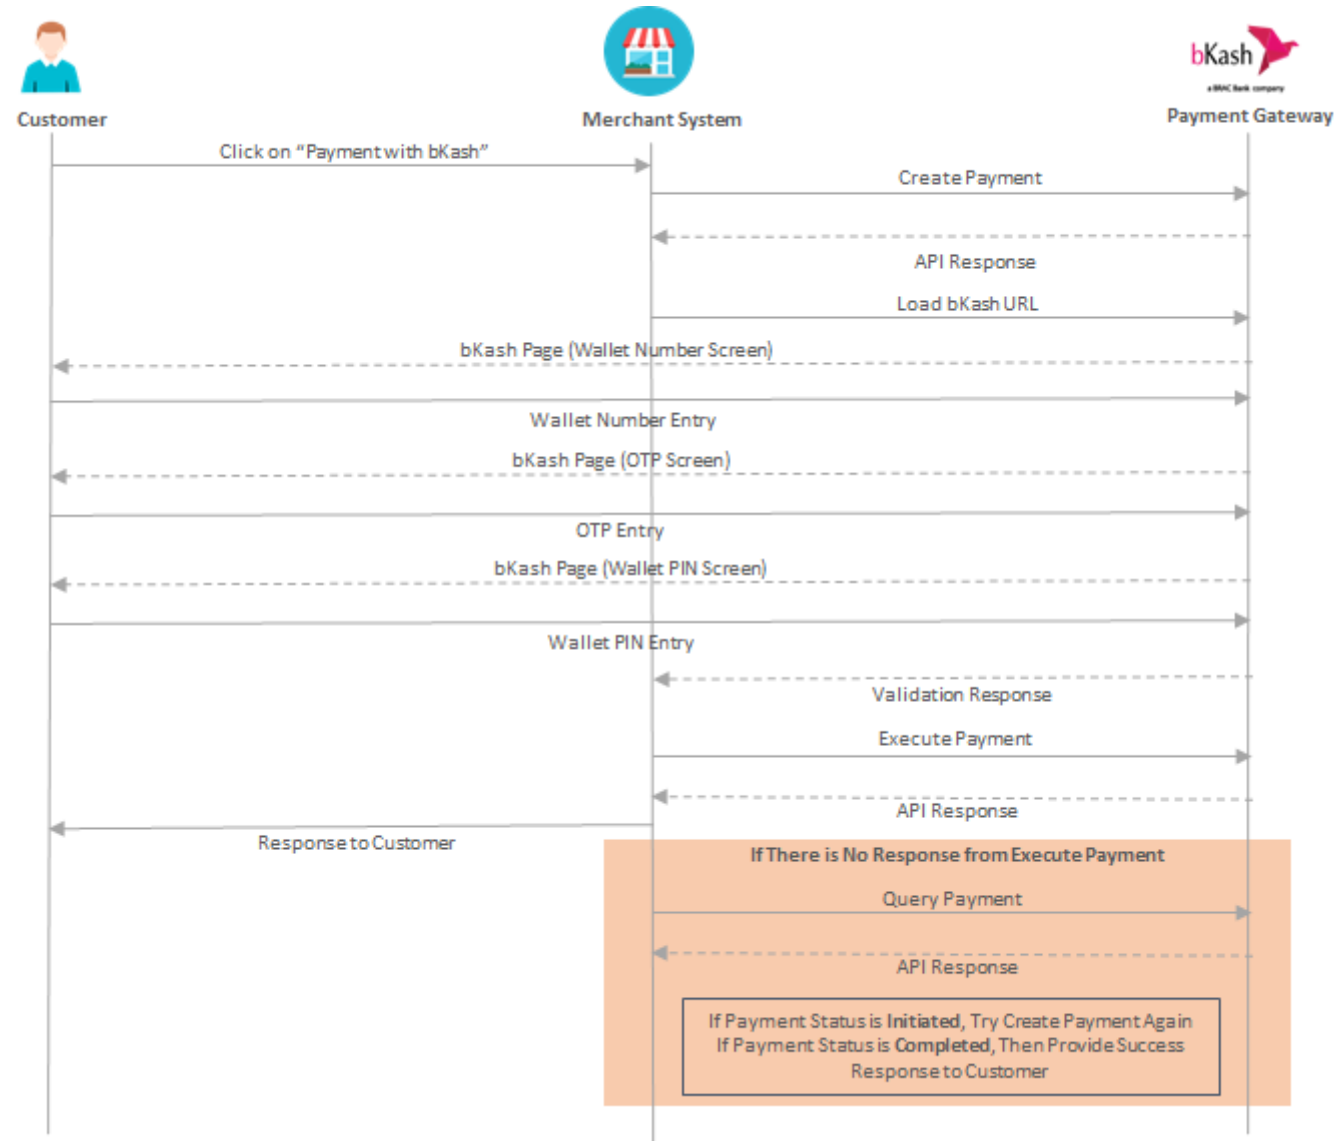

Tokenized With Agreement

bKash's tokenized checkout provides the customers a more convenient way of payment. Using this product, the customers can create an agreement in merchant websites/apps that for further payment using bKash, they will only use bKash wallet PIN. In this case the merchant system needs to store these agreements against different user accounts. This provides a faster and convenient payment opportunity for both the merchant and the customer.

System Interaction

Before invoking any bKash API, ensure that you have valid authorization tokens. For details on token generation and management please refer to the **Token Management Steps**.

The following steps outline the system-level interactions along with corresponding customer actions:

1. **Agreement Creation Flow**

- Customer Initiates Agreement**
When the customer clicks the "Add bKash Account" button (or a similar action), call the **Create Agreement API**.
- Redirect to bKash Agreement Page**
If the API returns a successful response, load the bKashURL provided in the response. This URL will direct the customer to the bKash interface for agreement creation.
- Customer Provides Wallet Information**
On the bKash page, the customer will enter:
 - Wallet number
 - 6-digit OTP
- Callback Handling**
Upon successful validation:
 - bKash will call the successCallbackURL provided in the Create Agreement API request.
 - For failed or canceled attempts, bKash will call the failureCallbackURL or cancelledCallbackURL, respectively.
- Execute Agreement**
On receiving a successful callback, invoke the **Execute Agreement API** to finalize the agreement.
- Agreement Completion**
If the Execute Agreement API returns a success response, the agreement creation is complete.

2. Payment Flow

1. Customer Initiates Payment

When the customer clicks the **"Payment with bKash"** button (or a similar action), call the **Create Payment with Agreement API**.

2. Redirect to bKash Payment Page

If the API returns a successful response, load the bKashURL provided in the response. This URL will direct the customer to the bKash payment interface.

3. Customer Provides Wallet PIN

On the bKash page, the customer will enter their wallet **PIN** to proceed with the payment.

4. Callback Handling

Upon successful validation:

- bKash will call the successCallbackURL provided in the Create Payment API request.
- For failed or canceled transactions, bKash will call the failureCallbackURL or cancelledCallbackURL, respectively.

5. Execute Payment with Agreement

On receiving a successful callback, invoke the **Execute Payment with Agreement API** to complete the transaction.

6. Payment Completion

If the Execute Payment API returns a success response, the payment is considered complete.

7. Handling Pending Payments


If no response is received from the Execute Payment API:

- Call the **Query Payment API** to check the payment status.
- If the status is "Initiated", retry the process starting from the Create Payment API.
- If the status is "Completed", confirm the success to the customer.

Timeout Configuration

- Implement a default timeout of **30 seconds** for all bKash API calls.

System Interaction Flow

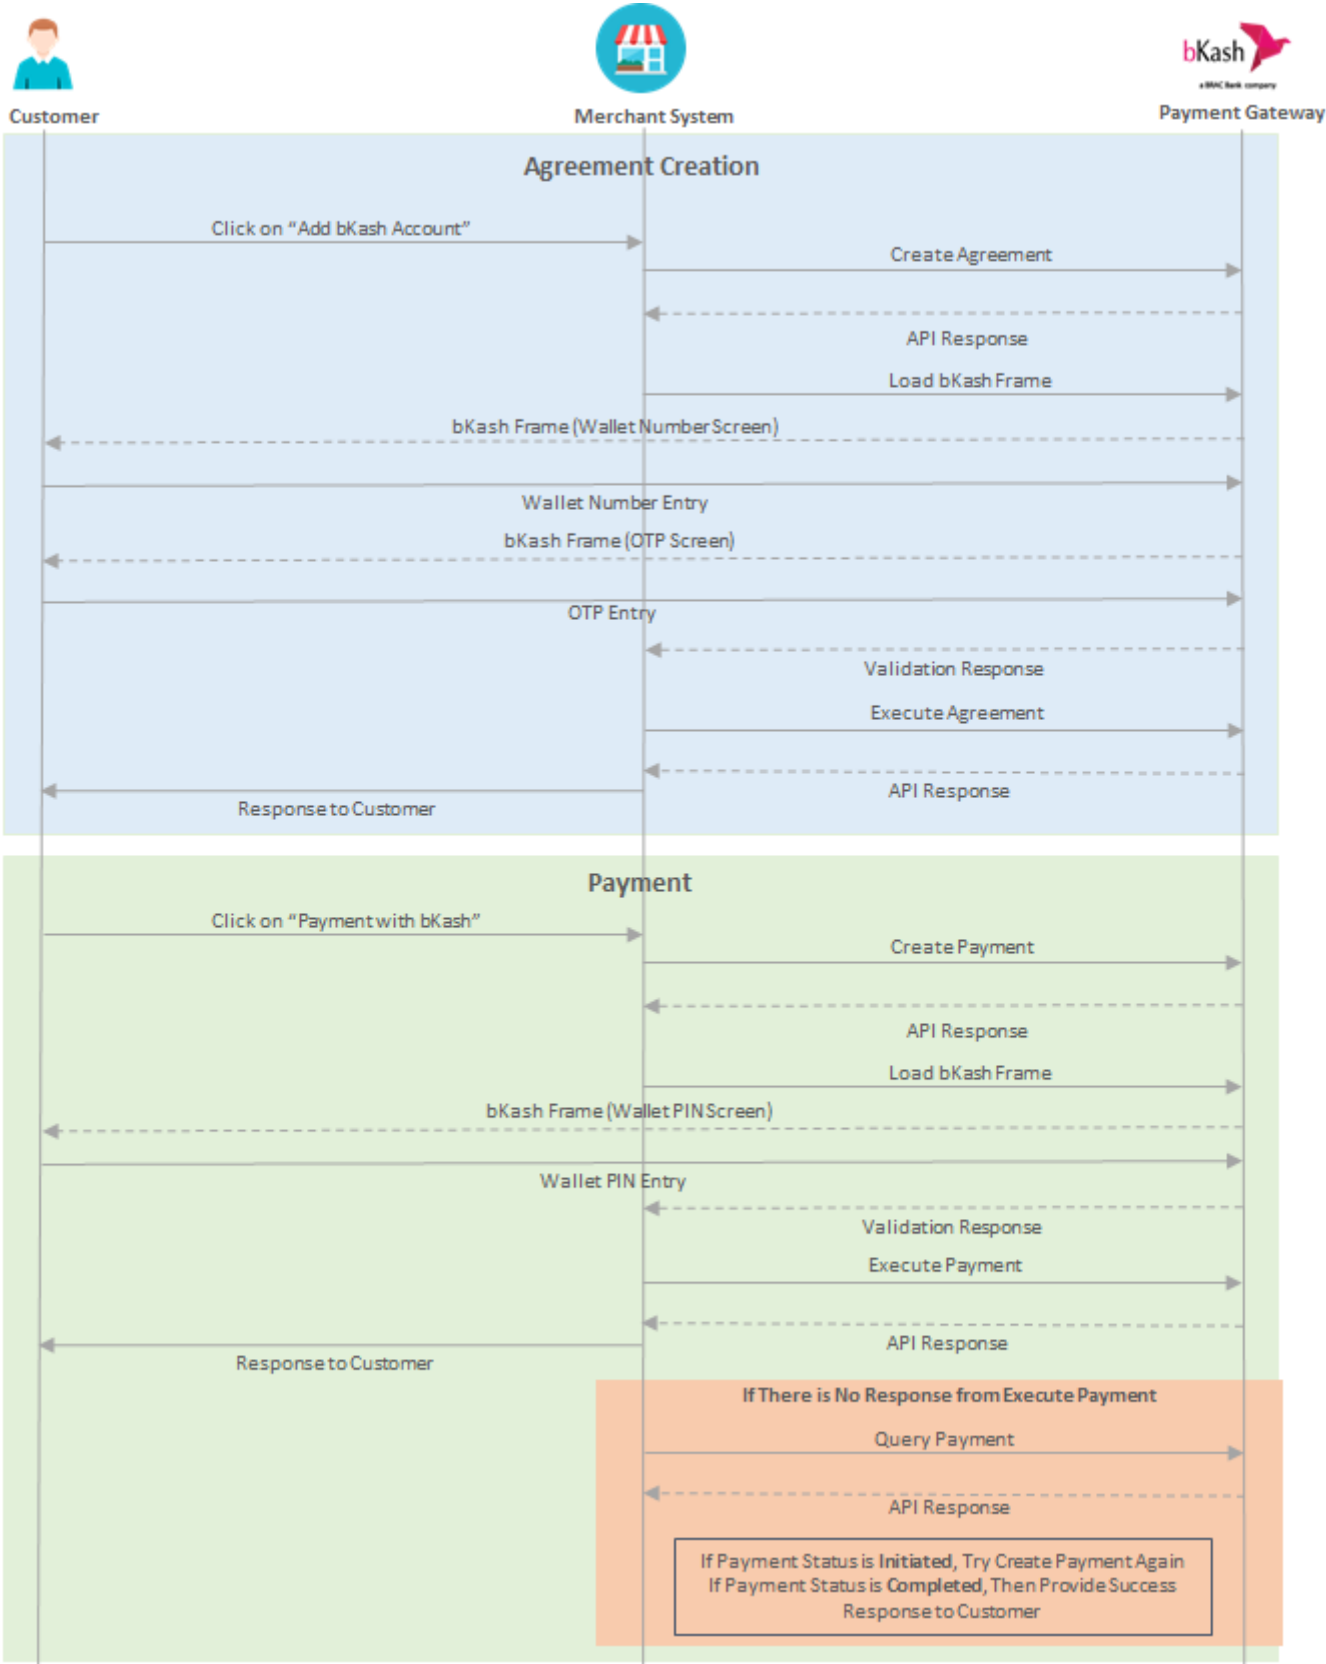

API Base URLs

- Sandbox - <https://tokenized.sandbox.bka.sh/v2/>
- Production - <https://tokenized.pay.bka.sh/v2/>

Response Codes

Some common response codes exist in the system. Each API may return common response codes. In addition to common response codes, each API contains some unique response codes. This section describes common response codes in the PGW system.

Note: Merchants should display error or success messages based on the **message** parameter, not the error code. The mapping between error codes and messages may change over time. Always present the error message received from the bKash API to the customer using a proper UI/alert. Any modification to the message content is not recommended.

Response Code	Description
0000	Successful
2002	Invalid Payment ID
2003	Process failed
2004	Invalid firstPaymentDate
2005	Invalid frequency
2006	Invalid amount
2007	Invalid currency
2008	Invalid intent
2009	Invalid Wallet
2010	Invalid OTP
2011	Invalid PIN
2012	Invalid Receiver MSISDN
2013	Resend Limit Exceeded
2014	Wrong PIN
2015	Wrong PIN count exceeded
2016	Wrong verification code
2017	Wrong verification limit exceeded
2018	OTP verification time expired
2019	PIN verification time expired
2020	Exception Occurred
2021	Invalid Mandate ID
2022	The mandate does not exist
2023	Insufficient Balance
2024	Exception occurred
2025	Invalid request body
2026	The reversal amount cannot be greater than the original transaction amount
2027	The mandate corresponding to the payer reference number already exists and cannot be created again
2028	Reverse failed because the transaction serial number does not exist
2029	Duplicate for all transactions
2030	Invalid mandate request type
2031	Invalid merchant invoice number
2032	Invalid transfer type
2033	Transaction not found
2034	The transaction cannot be reversed because the original transaction has been reversed
2035	Reverse failed because the initiator has no permission to reverse the transaction
2036	The direct debit mandate is not in Active state
2037	The account of the debit party is in a state which prohibits execution of this transaction
2038	Debit party identity tag prohibits execution of this transaction
2039	The account of the credit party is in a state which prohibits execution of this transaction
2040	Credit party identity tag prohibits execution of this transaction
2041	Credit party identity is in a state which does not support the current service
2042	Reverse failed because the initiator has no permission to reverse the transaction.
2043	The security credential of the subscriber is incorrect.
2044	Identity has not subscribed to a product that contains the expected service or the identity is not in Active status.
2045	The MSISDN of the customer does not exist.
2046	Identity has not subscribed to a product that contains requested service.
2047	TLV Data Format Error
2048	Invalid Payer Reference
2049	Invalid Merchant Callback URL
2050	Agreement already exists between payer and merchant
2051	Invalid Agreement ID
2052	Agreement is in incomplete state

2053	Agreement has already been cancelled
2054	Agreement execution pre-requisite hasn't been met
2055	Invalid Agreement State
2056	Invalid Payment State
2057	Not a bKash Account
2058	Not a Customer Wallet
2059	Multiple OTP request for a single session denied
2060	Payment execution pre-requisite hasn't been met
2061	This action can only be performed by the agreement or payment initiator party
2062	The payment has already been completed
2063	Mode is not valid as per request data
2064	This product mode currently unavailable
2065	Mandatory field missing
2066	Agreement is not shared with another merchant
2067	Invalid permission
2068	Transaction has already been completed
2069	Transaction has already been cancelled
2116	The agreement execution has already been completed
2117	The payment execution has already been completed
2118	The Platform value is invalid
2119	The authorized payment has already been processed
503	System is undergoing maintenance. Please try again later

Authentication APIs

API authentication is a crucial aspect of API security. It is the process of verifying the identity of a user or device before allowing them access to an API’s protected resources.

Grant Token API

Grant Token API provides an access token as a response. This token can be used to access other bKash APIs as authorization parameter. Once the token gets expired, new token can be generated through Refresh Token API.

Function	Grant Token
HTTP Keyword	POST
Request URL	<i>{{base_url}}/tokenized-checkout/auth/grant-token</i>

Request Parameters

Parameter	Description	Data Type	Mandatory
Header			
Content-Type	Select application/json .	String	No
Accept	Select application/json .	String	No
username	Merchant username provided from bKash.	String	Yes
password	Merchant password provided from bKash.	String	Yes
Body			
app_key	Application key provided from bKash.	String	Yes
app_secret	Application secret provided from bKash.	String	Yes

Success Response Parameters

Parameter	Description	Data Type
Body		
expires_in	Expiration time. The default value is 3600 , in seconds.	String
id_token	Generated application authorization token.	String
refresh_token	Updated token value, which will be expired after 30 days.	String

token_type	Type of a token to be granted. The default value is Bearer .	String
------------	---	--------

Error Response Parameters

Parameter	Description	Data Type
Body		
externalCode	Unique code assigned to an occurred error.	String
errorMessageEn	Message associated with an error, which describes the error cause.	String

Sample Request

```
POST tokenized-checkout/auth/grant-token HTTP/1.1
Host: {base_URL}
Content-Type: application/json
Accept: application/json
username: username
password: password
{
  "app_key": "test_app_key",
  "app_secret": "test_app_secret"
}
```

Sample Success Response

```
HTTP/1.1 200 OK
Content-Type: application/json
{
  "id_token": "token",
  "token_type": "Bearer",
  "expires_in": 3600,
  "refresh_token": "refresh_token"
}
```

Sample Error Response

```
{
  "externalCode": "9999",
  "errorMessageEn": "App key does not exist"
}
```

Refresh Token

This API provides a new access token against the existing token. This new token can be used in subsequent bKash API calls.

Function	Refresh Token
HTTP Keyword	POST
Request URL	{{base_url}}/tokenized-checkout/auth/refresh-token

Request Parameters

Parameter	Description	Data Type	Mandatory
Header			
Content-Type	Select application/json .	String	No
Accept	Select application/json .	String	No
username	Merchant name.	String	Yes
password	Merchant password.	String	Yes

Body			
app_key	Application key.	String	Yes
app_secret	Application secret.	String	Yes
refresh_token	Refreshed token.	String	Yes

Success Response Parameters

Parameter	Description	Data Type
Body		
expires_in	Expiration time. The default value is 3600 , in seconds.	String
id_token	Generated application authorization token.	String
refresh_token	Updated token value, which will be expired after 30 days.	String
token_type	Type of a token to be granted. The default value is Bearer .	String

Error Response Parameters

Parameter	Description	Data Type
Body		
externalCode	Unique code assigned to an occurred error.	String
errorMessageEn	Message associated with an error, which describes the error cause.	String

Sample Request

```
POST /tokenized-checkout/auth/refresh-token HTTP/1.1
Host: {base_URL}
Content-Type: application/json
Accept: application/json
username: username
password: password
{
  "app_key": "test_app_key",
  "app_secret": "test_app_secret",
  "refresh_token": "test_refresh_token"
}
```

Sample Success Response

```
HTTP/1.1 200 OK
Content-Type: application/json
{
  "id_token": "token",
  "token_type": "Bearer",
  "expires_in": 3600,
  "refresh_token": "refresh_token"
}
```

Sample Error Response

```
{
  "externalCode": "9999",
  "errorMessageEn": "App key does not exist"
}
```

With Agreement Payment APIs

To initiate agreement or query agreement, the merchant needs to consume the APIs listed below.

Create Agreement

Function	Creating Agreement
HTTP Keyword	POST
Request URL	{{base_url}}/tokenized-checkout/agreement/create

Request Parameters

Parameter	Description	Data Type	Mandatory
Header			
X-App-Key	Application ID provided by bKash.	String	Yes
Authorization	Authentication application credential used when a third-party application calls an API. This parameter requires the token generated by calling the API described in Grant Token API .	String	Yes
Body			
payerReference	Reference information passed with a payment request. If a wallet ID needs to be passed, it is preset on the page for entering the wallet ID of the bKash.	String	Yes
callbackURL	Basic URL of the merchant platform for generating callback URLs for successful, failed, or canceled transactions. The Card Payment calls these URLs based on the transaction result.	String	Yes

Success Response Parameters

Parameter	Description	Data Type
Body		
paymentId	Payment ID generated by the bKash for a request, which can be used to trace payment and other payment-related APIs.	String
agreementId	Agreement ID generated against the agreement creation request. This agreementID will have to be stored at the merchant end.	String
agreementCreateTime	Agreement creation time. The format is as follows: ****-"yyyy-MM-dd'T'HH:mm:ss'GMT'Z"	String
agreementStatus	Status of an initiated agreement. After a agreement request is created, the value of this parameter is Initiated .	String
bKashURL	The URL of bKash where the customer should be forwarded to enter his wallet number, OTP and wallet PIN.	String
callbackURL	Basic URL of the merchant platform for the bKash to generate callback URLs for successful, failed, or canceled transactions. The bKash sends the transaction verification result using these URLs based on the transaction result.	String
successCallbackURL	Callback URL for successful transactions. After a transaction is successful, the bKash notifies a merchant of the transaction result using this URL.	String
failureCallbackURL	Callback URL for failed transactions. After a transaction fails, the bKash notifies a merchant of the transaction result using this URL.	String
cancelledCallbackURL	Callback URL for canceled transactions. After a transaction is canceled, the bKash notifies a merchant of the transaction result using this URL.	String
signature	A unique value for validation.	String

Error Response Parameters

Parameter	Description	Data Type
Body		
externalCode	Unique code assigned to an occurred error.	String

errorMessageEn	Message associated with an error, which describes the error cause.	String
----------------	--	--------

Sample Request

```
POST /tokenized-checkout/agreement/create HTTP/1.1
Host: {base_URL}
Content-Type: application/json
Accept: application/json
authorization: id_token
x-app-key: x-app-key
{
  "payerReference": "01723888888",
  "callbackURL": "yourdomain.com"
}
```

Sample Success Response

```
HTTP/1.1 200 OK
Content-Type: application/json
{
  "paymentId": "TR0000PND6S4N1755677150050",
  "agreementId": "TestnewAdminUKCJDT51755677150051",
  "bkashURL": "https://sandbox.payment.bkash.com/?paymentId=TR0000PND6S4N1755677150050&hash=DPEqMdyoCga0*urQ-39e*xP9wzqvqc.BrbFI3ykZU9gvNpzXr7soCkM!vnQewsPdB07ukD)*Gk1BwEa5DUI_8qg1XWMYvqDdeTbP1755677150051&mode=0000&apiVersion=v2/",
  "callbackURL": "https://www.google.com/",
  "successCallbackURL": "https://www.google.com/?agreementId=TestnewAdminUKCJDT51755677150051&status=success&signature=UYFVqBY5Lr",
  "failureCallbackURL": "https://www.google.com/?agreementId=TestnewAdminUKCJDT51755677150051&status=failure&signature=UYFVqBY5Lr",
  "cancelledCallbackURL": "https://www.google.com/?agreementId=TestnewAdminUKCJDT51755677150051&status=cancel&signature=UYFVqBY5Lr",
  "payerReference": "sfsfsf",
  "agreementStatus": "Initiated",
  "agreementCreateTime": "2025-08-20T14:05:50:050 GMT+0600",
  "signature": "UYFVqBY5Lr"
}
```

Sample Error Response

```
{
  "externalCode": "2049",
  "errorMessageEn": "Invalid Merchant Callback URL",
}
```

Execute Agreement

Function	Execute Agreement
HTTP Keyword	POST
Request URL	{{base_url}}/tokenized-checkout/agreement/execute

Request Parameters

Parameter	Description	Data Type	Mandatory
Header			
X-App-Key	Application ID provided by bKash.	String	Yes
Authorization	Authentication application credential used when a third-party application calls an API. This parameter requires the token generated by calling the API described in Grant Token API .	String	Yes
Body			

agreementId	Agreement ID returned in the response of Create Agreement API.	String	Yes
-------------	--	--------	-----

Success Response Parameters

Parameter	Description	Data Type
Body		
paymentId	bKash generated payment ID for this payment creation request. This payment ID can be used later to track down the payment and in other payment related APIs. - A payment ID will expire after 24 hours if not used to execute payment, as a result, whenever a merchant tries to reuse a payment ID after 24 hours he will get an error that “The session of this payment has timed out”. - A payment ID is valid for one execution only. After the customer enters the PIN and the merchant calls the execute API with that payment ID and got a successful or failed response, they cannot use it again for execution. - Merchants will be able to use the PaymentID only for query and search purposes.	String
agreementId	Agreement ID generated against the agreement creation request. This agreementID will have to be stored at the merchant end.	String
payerReference	The payer reference value that was provided during the create payment API call.	String
agreementExecuteTime	The time when the agreement was executed. Format is** *- "yyyy-MM-dd'T'HH:mm:ss 'GMT'Z".	String
agreementStatus	Final status of the agreement. For a successful agreement creation, this status should be "Completed" .	String
payerType	For customer payment it will return “Customer” and for agent & merchant payment it will return “Agent” & “Merchant” accordingly to identify the wallet type.	String
payerAccount	bKash wallet number of the Customer/Agent who performed the payment.	String

Error Response Parameters

Parameter	Description	Data Type
Body		
externalCode	Unique code assigned to an occurred error.	String
errorMessageEn	Message associated with an error, which describes the error cause.	String

Sample Request

```
POST /tokenized-checkout/agreement/execute HTTP/1.1
Host: {base_URL}
Accept: application/json
authorization: id_token
x-app-key: x-app-key

{
  "agreementId": "TR00110N1565154754797"
}
```

Sample Success Response

```
HTTP/1.1 200 OK
Content-Type: application/json
{
  "paymentId": "TR0000bTEkgnF1744872467743",
  "agreementId": "TestnewAdminBVSII11744872467743",
  "agreementStatus": "Completed",
  "agreementExecuteTime": "2025-04-17T12:50:15:787 GMT+0600",
  "payerReference": "ABCDE42432",
  "payerAccount": "01832892832",
  "payerType": "Customer"
}
```

Sample Error Response

```
{
```



```
"externalCode": "error_code",
"errorMessageEn": "error_message",
}
```

Cancel Agreement

Function	Cancel Agreement
HTTP Keyword	POST
Request URL	{{base_url}}/tokenized-checkout/agreement/cancel

Request Parameters

Parameter	Description	Data Type	Mandatory
Header			
X-App-Key	Application ID provided by bKash.	String	Yes
Authorization	Authentication application credential used when a third-party application calls an API. This parameter requires the token generated by calling the API described in Grant Token API .	String	Yes
Body			
agreementId	Agreement ID returned in the response of Create Agreement API.	String	Yes

Success Response Parameters

Parameter	Description	Data Type
Body		
paymentId	bKash generated payment ID for this payment creation request. This payment ID can be used later to track down the payment and in other payment related APIs. - A payment ID will expire after 24 hours if not used to execute payment, as a result, whenever a merchant tries to reuse a payment ID after 24 hours he will get an error that “The session of this payment has timed out”. - A payment ID is valid for one execution only. After the customer enters the PIN and the merchant calls the execute API with that payment ID and got a successful or failed response, they cannot use it again for execution. - Merchants will be able to use the PaymentID only for query and search purposes.	String
agreementId	Agreement ID generated against the agreement creation request. This agreementID will have to be stored at the merchant end.	String
payerReference	The payer reference value that was provided during the create payment API call.	String
agreementVoidTime	The time when the agreement was executed. Format is** *- "yyyy-MM-dd'T'HH:mm:ss 'GMT'Z".	String
agreementStatus	Final status of the agreement. For a successful agreement creation, this status should be "Cancelled" .	String

Error Response Parameters

Parameter	Description	Data Type
Body		
externalCode	Unique code assigned to an occurred error.	String
errorMessageEn	Message associated with an error, which describes the error cause.	String

Sample Request

```
POST /tokenized-checkout/agreement/cancel HTTP/1.1
Host: {base_URL}
Accept: application/json
authorization: id_token
x-app-key: x-app-key
```

```
{
  "agreementId": "TR00110N1565154754797"
}
```

Sample Success Response

```
HTTP/1.1 200 OK
Content-Type: application/json
{
  "paymentId": "TR0000rN5ORaW1755679225619",
  "agreementId": "TestnewAdminPXJ6TYX1755679225619",
  "payerReference": "test",
  "agreementVoidTime": "2025-08-20T14:41:05:993 GMT+0600",
  "agreementStatus": "Cancelled"
}
```

Sample Error Response

```
{
  "externalCode": "error_code",
  "errorMessageEn": "error_message",
}
```

Create Payment with Agreement

Function	Create Payment with Agreement
HTTP Keyword	POST
Request URL	{{base_url}}/tokenized-checkout/payment-with-agreement/create

Request Parameters

Parameter	Description	Data Type	Mandatory
Header			
X-App-Key	Application ID provided by bKash.	String	Yes
Authorization	Authentication application credential used when a third-party application calls an API. This parameter requires the token generated by calling the API described in Grant Token API .	String	Yes
Body			
agreementId	Agreement ID generated against the agreement creation request. This agreementID will have to be stored at the merchant end.	String	Yes
payerReference	Reference information passed with a payment request. If a wallet ID needs to be passed, it is preset on the page for entering the wallet ID of the bKash.	String	Yes
callbackURL	Basic URL of the merchant platform for generating callback URLs for successful, failed, or canceled transactions. The Card Payment calls these URLs based on the transaction result.	String	Yes
amount	Payment amount.	String	Yes
currency	Currency of the preceding amount. Currently, the value can only be BDT .	String	Yes
intent	Payment intent. For checkout, the value is sale .	String	Yes
merchantInvoiceNumber	Unique invoice number used at merchant side for this specific payment.	String	Yes
subMerchantName	This parameter is needed for aggregators and system integrators only. Aggregator merchant can pass their sub merchant name, which will be reflected in the transaction SMS to the customer instead of mother (Aggregator) wallet name.	String	No

merchantAssociationInfo	This parameter is needed for aggregators and system integrators only. The data to be used here should be in TLV format and the format is as follows - Tag - 2 digits from the beginning. Supported tags are MI (Merchant Identifier), MW (Merchant Wallet Number) and RF (Payment Reference). Length - 2 digits after tag. Value - Remaining number of digits equal to length after length value. Example of such TLV data is - MI05MID54RF09123456789. Note: Max length is 255 characters. Special characters**"<", ">" and "&"** are not allowed.	String	No
--------------------------------	--	--------	----

Success Response Parameters

Parameter	Description	Data Type
Body		
paymentId	Payment ID generated by the bKash for a request, which can be used to trace payment and other payment-related APIs.	String
agreementId	Agreement ID generated against the agreement creation request. This agreementID will have to be stored at the merchant end.	String
paymentCreateTime	Payment creation time. The format is as follows: ****-"yyyy-MM-dd'T'HH:mm:ss'GMT'Z"	String
transactionStatus	Status of an initiated transaction. After a payment request is created, the value of this parameter is Initiated .	String
amount	Payment amount.	String
currency	Transaction currency.	String
intent	Payment intent. For checkout, the value is sale .	String
merchantInvoiceNumber	Unique invoice number used at merchant side for this specific payment.	String
bkashURL	The URL of bKash where the customer should be forwarded to enter his wallet number, OTP and wallet PIN.	String
callbackURL	Basic URL of the merchant platform for the bKash to generate callback URLs for successful, failed, or canceled transactions. The bKash sends the transaction verification result using these URLs based on the transaction result.	String
successCallbackURL	Callback URL for successful transactions. After a transaction is successful, the bKash notifies a merchant of the transaction result using this URL.	String
failureCallbackURL	Callback URL for failed transactions. After a transaction fails, the bKash notifies a merchant of the transaction result using this URL.	String
cancelledCallbackURL	Callback URL for canceled transactions. After a transaction is canceled, the bKash notifies a merchant of the transaction result using this URL.	String
signature	A unique value for validation.	String

Error Response Parameters

Parameter	Description	Data Type	Mandatory
Body			
externalCode	Unique code assigned to an occurred error.	String	Yes
errorMessageEn	Message associated with an error, which describes the error cause.	String	Yes

Sample Request

```
POST /tokenized-checkout/payment-with-agreement/create HTTP/1.1
Host: {base_URL}
Accept: application/json
authorization: id_token
x-app-key: x-app-key
```

```
{
  "agreementId": "{{agreementID}}",
  "payerReference": "01832784273",
  "callbackURL": "https://google.com",
  "amount": "2",
  "currency": "BDT",
  "intent": "sale",
  "merchantInvoiceNumber": "test001",
  "subMerchantName": "ABCD Merchant"
}
```

Sample Success Response

```
HTTP/1.1 200 OK
Content-Type: application/json
{
  "paymentId": "TR0001kmtRhw51744875958729",
  "bkashURL":
"https://sandbox.payment.bkash.com/?paymentId=TR0001kmtRhw51744875958729&hash=7dnD5(GiwtqGnS(vYly9o1GGufln.i6xtR-Z9z.VBZYlGa.aGrjC7fVy3jZ_iOVm6FrQJUmXldFes3RRsQFjdY6zELQWW*Tz)biM1744875958729&mode=0001&apiVersion=v2/",
  "callbackURL": "https://google.com",
  "successCallbackURL":
"https://google.com?paymentID=TR0001kmtRhw51744875958729&status=success&signature=StfXhdP1Ei&agreementId=TestnewAdminJF14T201744875750281",
  "failureCallbackURL":
"https://google.com?paymentID=TR0001kmtRhw51744875958729&status=failure&signature=StfXhdP1Ei&agreementId=TestnewAdminJF14T201744875750281",
  "cancelledCallbackURL":
"https://google.com?paymentID=TR0001kmtRhw51744875958729&status=cancel&signature=StfXhdP1Ei&agreementId=TestnewAdminJF14T201744875750281",
  "amount": "2",
  "intent": "sale",
  "currency": "BDT",
  "agreementId": "TestnewAdminJF14T201744875750281",
  "paymentCreateTime": "2025-04-17T13:45:58:729 GMT+0600",
  "transactionStatus": "Initiated",
  "merchantInvoiceNumber": "test001",
  "signature": "StfXhdP1Ei"
}
```

Sample Error Response

```
{
  "externalCode": "error_code",
  "errorMessageEn": "error_message",
}
```

Execute Payment with Agreement

Function	Execute Payment with Agreement
HTTP Keyword	POST
Request URL	{{base_url}}/tokenized-checkout/payment-with-agreement/execute

Request Parameters

Parameter	Description	Data Type	Mandatory
Header			
X-App-Key	Application ID provided by bKash.	String	Yes
Authorization	Authentication application credential used when a third-party application calls an API.	String	Yes

	This parameter requires the token generated by calling the API described in Grant Token API .		
Body			
paymentId	Payment ID returned in the response of Create Payment API.	String	Yes
agreementId	Agreement ID returned in the response of Create Agreement API.	String	Yes

Success Response Parameters

Parameter	Description	Data Type
Body		
paymentId	bKash generated payment ID for this payment creation request. This payment ID can be used later to track down the payment and in other payment related APIs. - A payment ID will expire after 24 hours if not used to execute payment, as a result, whenever a merchant tries to reuse a payment ID after 24 hours he will get an error that “The session of this payment has timed out”. - A payment ID is valid for one execution only. After the customer enters the PIN and the merchant calls the execute API with that payment ID and got a successful or failed response, they cannot use it again for execution. - Merchants will be able to use the PaymentID only for query and search purposes.	String
agreementId	Agreement ID generated against the agreement creation request. This agreementID will have to be stored at the merchant end.	String
payerAccount	Payer Account of the customer who performed the payment.	String
payerReference	The payer reference value that was provided during the create payment API call.	String
paymentExecuteTime	The time when the payment was executed. Format is** *- "yyyy-MM-dd'T'HH:mm:ss 'GMT'Z".	String
trxId	A transaction ID created after the successful completion of this payment request. This ID can be used later to get the details of this transaction.	String
transactionStatus	Final status of the transaction. For a successful payment, this status should be " Completed ".	String
payerType	For customer payment it will return “Customer” and for agent & merchant payment it will return “Agent” & “Merchant” accordingly to identify the wallet type.	String
amount	Amount of the payment transaction.	String
currency	Currency of the mentioned amount. Currently only "BDT" value is supported.	String
intent	Intent for the payment transaction. For checkout, the value will be "sale".	String
merchantInvoiceNumber	Unique invoice number used at merchant side for this specific payment.	String
subMerchantName	This parameter is needed for aggregators and system integrators only. Aggregator merchant can pass their sub merchant name, which will be reflected in the transaction SMS to the customer instead of mother (Aggregator) wallet name.	String
maxRefundableAmount	Maximum refundable amount for multiple partial refund.	String

Error Response Parameters

Parameter	Description	Data Type
Body		
externalCode	Unique code assigned to an occurred error.	String
errorMessageEn	Message associated with an error, which describes the error cause.	String

Sample Request

```

POST /tokenized-checkout/payment-with-agreement/execute HTTP/1.1
Host: {base_URL}
Accept: application/json
authorization: id_token
x-app-key: x-app-key

{
  "paymentId": "TR00110N1565154754797",
  "agreementId": "TestnewAdmin0959D6H1755687244886"
}
```

Sample Success Response

```

HTTP/1.1 200 OK
```

```
Content-Type: application/json
{
  "paymentId": "TR00012pyspzd1755687285579",
  "trxId": "CHK80NA7N0",
  "transactionStatus": "Completed",
  "amount": "2",
  "currency": "BDT",
  "intent": "authorization",
  "paymentExecuteTime": "2025-08-20T16:55:05:210 GMT+0600",
  "merchantInvoiceNumber": "test001",
  "subMerchantName": "Test",
  "payerType": "Customer",
  "agreementId": "TestnewAdmin0959D6H1755687244886",
  "payerReference": "sfsfsf",
  "payerAccount": "01843743734",
  "maxRefundableAmount": "2"
}
```

Sample Error Response

```
{
  "externalCode": "error_code",
  "errorMessageEn": "error_message",
}
```

Without Agreement Payment APIs

To initiate payment or query payment, the merchant needs to consume the APIs listed below.

Create Payment

Function	Creating Payment
HTTP Keyword	POST
Request URL	{{base_url}}/tokenized-checkout/payment/create

Request Parameters

Parameter	Description	Data Type	Mandatory
Header			
X-App-Key	Application ID provided by bKash.	String	Yes
Authorization	Authentication application credential used when a third-party application calls an API. This parameter requires the token generated by calling the API described in Grant Token API .	String	Yes
Body			
payerReference	Reference information passed with a payment request. If a wallet ID needs to be passed, it is preset on the page for entering the wallet ID of the bKash.	String	Yes
callbackURL	Basic URL of the merchant platform for generating callback URLs for successful, failed, or canceled transactions. The Card Payment calls these URLs based on the transaction result.	String	Yes
amount	Payment amount.	String	Yes
currency	Currency of the preceding amount. Currently, the value can only be BDT .	String	Yes
intent	Payment intent. For checkout, the value is sale .	String	Yes
merchantInvoiceNumber	Unique invoice number used at merchant side for this specific payment.	String	Yes
subMerchantName	This parameter is needed for aggregators and system integrators	String	No

	only. Aggregator merchant can pass their sub merchant name, which will be reflected in the transaction SMS to the customer instead of mother (Aggregator) wallet name.		
merchantAssociationInfo	This parameter is needed for aggregators and system integrators only. The data to be used here should be in TLV format and the format is as follows - Tag - 2 digits from the beginning. Supported tags are MI (Merchant Identifier), MW (Merchant Wallet Number) and RF (Payment Reference). Length - 2 digits after tag. Value - Remaining number of digits equal to length after length value. Example of such TLV data is - MI05MID54RF09123456789. Note: Max length is 255 characters. Special characters**"<", ">" and "&"** are not allowed.	String	No

Success Response Parameters

Parameter	Description	Data Type
Body		
paymentId	Payment ID generated by the bKash for a request, which can be used to trace payment and other payment-related APIs.	String
paymentCreateTime	Payment creation time. The format is as follows: ****-"yyyy-MM-dd'T'HH:mm:ss'GMT'Z"	String
transactionStatus	Status of an initiated transaction. After a payment request is created, the value of this parameter is Initiated .	String
amount	Payment amount.	String
currency	Transaction currency.	String
intent	Payment intent. For checkout, the value is sale .	String
merchantInvoiceNumber	Unique invoice number used at merchant side for this specific payment.	String
bKashURL	The URL of bKash where the customer should be forwarded to enter his wallet number, OTP and wallet PIN.	String
callbackURL	Basic URL of the merchant platform for the bKash to generate callback URLs for successful, failed, or canceled transactions. The bKash sends the transaction verification result using these URLs based on the transaction result.	String
successCallbackURL	Callback URL for successful transactions. After a transaction is successful, the bKash notifies a merchant of the transaction result using this URL.	String
failureCallbackURL	Callback URL for failed transactions. After a transaction fails, the bKash notifies a merchant of the transaction result using this URL.	String
cancelledCallbackURL	Callback URL for canceled transactions. After a transaction is canceled, the bKash notifies a merchant of the transaction result using this URL.	String
signature	A unique value for validation.	String

Error Response Parameters

Parameter	Description	Data Type
Body		
externalCode	Unique code assigned to an occurred error.	String
errorMessageEn	Message associated with an error, which describes the error cause.	String

Sample Request

```
POST /tokenized-checkout/payment/create HTTP/1.1
Host: {base_URL}
Content-Type: application/json
Accept: application/json
```



```
authorization: id_token
x-app-key: x-app-key
{
  "payerReference": "01893289323",
  "callbackURL": "https://google.com",
  "amount": "2",
  "currency": "BDT",
  "intent": "sale",
  "merchantInvoiceNumber": "test001",
  "subMerchantName": "Test"
}
```

Sample Success Response

```
HTTP/1.1 200 OK
Content-Type: application/json
{
  "paymentId": "TR0011SLImBqE1744870673866",
  "bkashURL": "https://sandbox.payment.bkash.com/?paymentId=TR0011SLImBqE1744870673866&hash=26Z_IGvb6hHcODHeUs-gCiR-1uzjlFcffW(ts7udkK7zjtCZLJhhC4X3-ra4iKenWMiE6ePhafHKuvug1FfZQLZxcxfcqBXE!Ikd1744870673866&mode=0011&apiVersion=v2/",
  "callbackURL": "https://google.com",
  "successCallbackURL":
"https://google.com?paymentID=TR0011SLImBqE1744870673866&status=success&signature=701VKqrts6",
  "failureCallbackURL":
"https://google.com?paymentID=TR0011SLImBqE1744870673866&status=failure&signature=701VKqrts6",
  "cancelledCallbackURL":
"https://google.com?paymentID=TR0011SLImBqE1744870673866&status=cancel&signature=701VKqrts6",
  "amount": "2",
  "intent": "sale",
  "currency": "BDT",
  "paymentCreateTime": "2025-04-17T12:17:53:866 GMT+0600",
  "transactionStatus": "Initiated",
  "merchantInvoiceNumber": "test001",
  "signature": "701VKqrts6"
}
```

Sample Error Response

```
{
  "externalCode": "error_code",
  "errorMessageEn": "error_message",
}
```

Execute Payment

Function	Execute Payment
HTTP Keyword	POST
Request URL	{{base_url}}/tokenized-checkout/payment/execute

Request Parameters

Parameter	Description	Data Type	Mandatory
Header			
X-App-Key	Application ID provided by bKash.	String	Yes
Authorization	Authentication application credential used when a third-party application calls an API. This parameter requires the token generated by calling the API described in Grant Token API .	String	Yes
Body			
paymentId	PaymentID returned in the response of Create Payment API.	String	Yes

Success Response Parameters

Parameter	Description	Data Type
Body		
paymentId	bKash generated payment ID for this payment creation request. This payment ID can be used later to track down the payment and in other payment related APIs. - A payment ID will expire after 24 hours if not used to execute payment, as a result, whenever a merchant tries to reuse a payment ID after 24 hours he will get an error that “The session of this payment has timed out”. - A payment ID is valid for one execution only. After the customer enters the PIN and the merchant calls the execute API with that payment ID and got a successful or failed response, they cannot use it again for execution. - Merchants will be able to use the PaymentID only for query and search purposes.	String
payerAccount	Payer Account of the customer who performed the payment.	String
payerReference	The payer reference value that was provided during the create payment API call.	String
paymentExecuteTime	The time when the payment was executed. Format is** *- "yyyy-MM-dd'T'HH:mm:ss 'GMT'Z".	String
trxId	A transaction ID created after the successful completion of this payment request. This ID can be used later to get the details of this transaction.	String
transactionStatus	Final status of the transaction. For a successful payment, this status should be " Completed ".	String
payerType	For customer payment it will return “Customer” and for agent & merchant payment it will return “Agent” & “Merchant” accordingly to identify the wallet type.	String
amount	Amount of the payment transaction.	String
currency	Currency of the mentioned amount. Currently only "BDT" value is supported.	String
intent	Intent for the payment transaction. For checkout, the value will be "sale".	String
merchantInvoiceNumber	Unique invoice number used at merchant side for this specific payment.	String
subMerchantName	This parameter is needed for aggregators and system integrators only. Aggregator merchant can pass their sub merchant name, which will be reflected in the transaction SMS to the customer instead of mother (Aggregator) wallet name.	String
maxRefundableAmount	Maximum refundable amount for multiple partial refund.	String

Error Response Parameters

Parameter	Description	Data Type
Body		
externalCode	Unique code assigned to an occurred error.	String
errorMessageEn	Message associated with an error, which describes the error cause.	String

Sample Request

```
POST /tokenized-checkout/payment/execute HTTP/1.1
Host: {base_URL}
Accept: application/json
authorization: id_token
x-app-key: x-app-key

{
  "paymentId": "TR0011ON1565154754797"
}
```

Sample Success Response

```
HTTP/1.1 200 OK
Content-Type: application/json
{
  "paymentId": "TR0011SLImBqE1744870673866",
  "trxId": "CDH00MS55A",
  "transactionStatus": "Completed",
  "amount": "2",
  "currency": "BDT",
  "intent": "sale",
  "paymentExecuteTime": "2025-04-17T12:18:29:411 GMT+0600",
  "merchantInvoiceNumber": "test001",
  "subMerchantName": "Test",
}
```

```
{
  "payerType": "Customer",
  "payerReference": "018298923832",
  "payerAccount": "018298923832",
  "maxRefundableAmount": "2"
}
```

Sample Error Response

```
{
  "externalCode": "error_code",
  "errorMessageEn": "error_message"
}
```

Query and Search APIs

Query Agreement

Function	Query Agreement
HTTP Keyword	POST
Request URL	{{base_url}}/tokenized-checkout/query/agreement

Request Parameters

Parameter	Description	Data Type	Mandatory
Header			
X-APP-Key	Application ID provided by bKash.	String	Yes
Authorization	Authentication application secret used when a third-party application calls an API. This parameter requires the token generated by calling the API described in Grant Token API .	String	Yes
Body			
agreementId	Agreement ID returned in the response of Create Agreement API.	String	Yes

Success Response Parameters

Parameter	Description	Data Type
Body		
paymentId	Payment ID generated by the bKash for a request, which can be used to trace payment and other payment-related APIs.	String
payerReference	Reference information passed with a payment request. If a wallet ID needs to be passed, it is preset on the page for entering the wallet ID of the bKash.	String
agreementId	Agreement ID returned in the response of Create Agreement API.	String
agreementCreateTime	Agreement creation time. The format is as follows: ****-"yyyy-MM-dd'T'HH:mm:ss'GMT'Z"	String
agreementExecuteTime	Execute time. The format is as follows: ****-"yyyy-MM-dd'T'HH:mm:ss'GMT'Z"	String
agreementStatus	Final status of an agreement. For successful payment, the value of this parameter is Completed . For details about the mapping between other states.	String
payerAccount	Type of payer like Customer/Agent/Merchant	String
verificationStatus	Current status of wallet user verification. If user's verification is not performed or in progress, then the value will be "Incomplete". If user has entered wallet number, OTP, PIN and finished verification, then the value will be Complete .	String
payerType	Refund amount of an original order.	String

Error Response Parameters

Parameter	Description	Data Type
-----------	-------------	-----------

Body		
externalCode	Unique code assigned to an occurred error.	String
errorMessageEn	Message associated with an error, which describes the error cause.	String

Sample Request

```
POST /tokenized-checkout/query/agreement HTTP/1.1
Host: {base_URL}
Accept: application/json
authorization: id_token
x-app-key: x-app-key
{
  "agreementId": "169560664800030001"
}
```

Sample Success Response

```
HTTP/1.1 200 OK
Content-Type: application/json
{
  "paymentId": "TR0000gmoCSJ01744879828071",
  "verificationStatus": "Complete",
  "payerReference": "ABCDE42432",
  "agreementId": "TestnewAdminZR770QZ1744879828071",
  "agreementStatus": "Completed",
  "agreementCreateTime": "2025-04-17T14:50:28:071 GMT+0600",
  "agreementExecuteTime": "2025-04-17T14:50:59:775 GMT+0600",
  "payerAccount": "01783782382",
  "payerType": "Customer"
}
```

Sample Error Response

```
{
  "externalCode": "error_code",
  "errorMessageEn": "error_message"
}
```

Query Payment

Function	Query Payment
HTTP Keyword	POST
Request URL	{{base_url}}/tokenized-checkout/query/payment

Request Parameters

Parameter	Description	Data Type	Mandatory
Header			
X-APP-Key	Application ID provided by bKash.	String	Yes
Authorization	Authentication application secret used when a third-party application calls an API. This parameter requires the token generated by calling the API described in Grant Token API .	String	Yes
Body			
paymentId	ID provided in the response of the payment creation API of the bKash.	String	Yes

Success Response Parameters

Parameter	Description	Data Type
Body		
paymentId	Payment ID generated by the bKash for a request, which can be used to trace payment and other payment-related APIs.	String
payerReference	Reference information passed with a payment request. If a wallet ID needs to be passed, it is preset on the page for entering the wallet ID of the bKash.	String
paymentCreateTime	Payment creation time. The format is as follows: ****-"yyyy-MM-dd'T'HH:mm:ss'GMT'Z"	String
paymentExecuteTime	Payment time. The format is as follows: ****-"yyyy-MM-dd'T'HH:mm:ss'GMT'Z"	String
trxId	ID of a transaction created after a payment request is successfully completed.	String
transactionStatus	Final status of a transaction. For successful payment, the value of this parameter is Completed . For details about the mapping between other states.	String
amount	Payment amount.	String
currency	Transaction currency.	String
intent	Payment intent. For checkout, the value is sale .	String
merchantInvoice	Unique invoice number used at merchant side for this specific payment.	String
verificationStatus	Current status of wallet user verification. If user's verification is not performed or in progress, then the value will be "Incomplete". If user has entered wallet number, OTP, PIN and finished verification, then the value will be "Complete".	String
payerType	Refund amount of an original order.	String
serviceFee	Service Fee that will be deducted upfront from the merchant.	String
creditedAmount	The value that will be credited to the merchant wallet after deducting the service fee.	String
subMerchantName	This parameter is needed for aggregators and system integrators only. Aggregator merchant can pass their sub merchant name, which will be reflected in the transaction SMS to the customer instead of mother (Aggregator) wallet name.	String
maxRefundableAmount	Maximum refundable amount for multiple partial refund.	String

Error Response Parameters

Parameter	Description	Data Type
Body		
externalCode	Unique code assigned to an occurred error.	String
errorMessageEn	Message associated with an error, which describes the error cause.	String

Sample Request

```
POST /tokenized-checkout/query/payment HTTP/1.1
Host: {base_URL}
Accept: application/json
authorization: id_token
x-app-key: x-app-key
{
  "paymentId": "169560664800030001"
}
```

Sample Success Response

```
HTTP/1.1 200 OK
Content-Type: application/json
{
  "paymentId": "TR0011SLImBqE1744870673866",
  "verificationStatus": "Complete",
  "payerReference": "01771699187",
  "trxId": "CDH00MS55A",
  "paymentCreateTime": "2025-04-17T12:17:53:866 GMT+0600",
  "paymentExecuteTime": "2025-04-17T12:18:29:411 GMT+0600",
}
```

```
{
  "amount": "2.00",
  "currency": "BDT",
  "intent": "sale",
  "merchantInvoice": "test001",
  "transactionStatus": "Completed",
  "serviceFee": "0.00",
  "subMerchantName": "Test",
  "payerType": "Customer",
  "maxRefundableAmount": "2.00"
}
```

Sample Error Response

```
{
  "externalCode": "error_code",
  "errorMessageEn": "error_message"
}
```

Search Transaction

Function	Query Payment
HTTP Keyword	POST
Request URL	{{base_url}}/tokenized-checkout/general/search-transaction

Request Parameters

Parameter	Description	Data Type	Mandatory
Header			
X-APP-Key	Application ID provided by bKash.	String	Yes
Authorization	Authentication application secret used when a third-party application calls an API. This parameter requires the token generated by calling the API described in Grant Token API .	String	Yes
Body			
trxId	ID provided in the response of the payment creation API of the bKash.	String	Yes

Success Response Parameters

Parameter	Description	Data Type
Body		
transactionType	Transaction type will be returned.	String
initiationTime	Payment creation time. The format is as follows: ****-"yyyy-MM-dd'T'HH:mm:ss'GMT'Z"	String
completedTime	Payment time. The format is as follows: ****-"yyyy-MM-dd'T'HH:mm:ss'GMT'Z"	String
trxId	ID of a transaction created after a payment request is successfully completed.	String
transactionStatus	Final status of a transaction. For successful payment, the value of this parameter is Completed . For details about the mapping between other states.	String
amount	Payment amount.	String
currency	Transaction currency.	String
payerAccount	Payer like Customer/Agent/Merchant wallet number.	String
payerType	Refund amount of an original order.	String
serviceFee	Service Fee that will be deducted upfront from the merchant.	String
organizationAccount	Receiver merchant wallet number	String

maxRefundableAmount	Maximum refundable amount for multiple partial refund.	String
---------------------	--	--------

Error Response Parameters

Parameter	Description	Data Type
Body		
externalCode	Unique code assigned to an occurred error.	String
errorMessageEn	Message associated with an error, which describes the error cause.	String

Sample Request

```
POST /tokenized-checkout/general/search-transaction HTTP/1.1
Host: {base_URL}
Accept: application/json
authorization: id_token
x-app-key: x-app-key
{
  "paymentId": "169560664800030001"
}
```

Sample Success Response

```
HTTP/1.1 200 OK
Content-Type: application/json
{
  "trxId": "CDH00MS55A",
  "initiationTime": "2025-04-17T12:18:28:000 GMT+0600",
  "completedTime": "2025-04-17T12:18:29:000 GMT+0600",
  "transactionType": "bKash Tokenized Checkout via API",
  "payerAccount": "01780618907",
  "transactionStatus": "Completed",
  "amount": "2.00",
  "currency": "BDT",
  "organizationAccount": "01770618567",
  "serviceFee": "0.00",
  "payerType": "Customer",
  "maxRefundableAmount": "2"
}
```

Sample Error Response

```
{
  "externalCode": "error_code",
  "errorMessageEn": "error_message"
}
```

Refund and Status APIs

The V2 Refund API supports multiple partial refunds. Merchants can initiate up to 10 partial refunds against the same transaction ID, within the maximum refundable amount. Refunds can be initiated within 60 days from the transaction date.

Refund

Function	Refund
HTTP Keyword	POST
Request URL	{{base_url}}/tokenized-checkout/refund/payment/transaction

Request Parameters

Parameter	Description	Data Type	Mandatory
-----------	-------------	-----------	-----------

Header			
X-APP-Key	Application ID registered by a third-party system in the API Fabric.	String	Yes
Authorization	Authentication application secret used when a third-party application calls an API. This parameter requires the token generated by calling the API described in Grant Token API .	String	Yes
Body			
paymentId	ID provided in the response of the payment creation API of the bKash.	String	Yes
refundAmount	Refund amount. The value can contain a maximum of two decimal places.	String	Yes
sku	To have a tagging of product information from merchant website.	String	Yes
reason	Refund reason, for example, the product is faulty or not received.	String	Yes
trxId	Refund request ID. The value corresponds to the same payment ID must be unique.	String	Yes

Success Response Parameters

Parameter	Description	Data Type
Body		
completedTime	Refund completion time.	String
refundTransactionStatus	Status of a refund transaction.	String
originalTrxId	Primary transaction ID.	String
refundTrxId	Refund transaction ID.	String
originalTrxAmount	Original transaction amount.	String
refundAmount	Refund amount.	
currency	Payment currency.	String
sku	To have a tagging of product information from merchant website.	String
reason	Refund reason, for example, the product is faulty or not received.	String

Error Response Parameters

Parameter	Description	Data Type
Body		
externalCode	Unique code assigned to an occurred error.	String
errorMessageEn	Message associated with an error, which describes the error cause.	String

Sample Request

```
POST {base_URL}/tokenized-checkout/refund/payment/transaction HTTP/1.1
Host: {base_URL}
Accept: application/json
authorization: id_token
x-app-key: x-app-key
{
  "paymentId": "{{paymentID}}",
  "refundAmount": "1",
  "trxId": "CDH20MS73W",
  "reason": "Wrong Product",
  "sku": "jiwn880"
}
```

Sample Success Response

```
HTTP/1.1 200 OK
Content-Type: application/json
{
  "originalTrxId": "CDH20MS73W",
  "refundTrxId": "CDH00MS740",
  "refundTransactionStatus": "Completed",
  "originalTrxAmount": "2",
  "refundAmount": "1.00",
  "currency": "BDT",
  "completedTime": "2025-04-17T15:05:23:857 GMT+0600",
  "sku": "jiwn880",
  "reason": "Wrong Product"
}
```

Sample Error Response

```
{
  "externalCode": "error_code",
  "errorMessageEn": "error_message"
}
```

Refund Status

Function	Refund Status
HTTP Keyword	POST
Request URL	<i>{{base_url}}/tokenized-checkout/refund/payment/status</i>

Request Parameters

Parameter	Description	Data Type	Mandatory
Header			
X-APP-Key	Application ID registered by a third-party system in the API Fabric.	String	Yes
Authorization	Authentication application secret used when a third-party application calls an API. This parameter requires the token generated by calling the API described in Grant Token API .	String	Yes
Body			
paymentId	ID provided in the response of the payment creation API of the bKash.	String	Yes
trxId	Refund request ID. The value corresponds to the same payment ID must be unique.	String	Yes

Success Response Parameters

Parameter	Description	Data Type
Body		
originalTrxId	Primary transaction ID.	String
originalTrxAmount	Original transaction amount.	String
originalTrxCompletedTime	Primary transaction time	String
refundTransactions	A list of multiple partial refund history. List will contain below information.	String
refundTrxId	The transaction id that it is received for refund API response for any specific request. Id can be different for different refund request for a single transaction id.	String
refundTransactionStatus	For successful refund status will be “Completed”	String

refundAmount	Refund amount for the specific refund request.	String
completedTime	Refund completion time.	String

Error Response Parameters

Parameter	Description	Data Type
Body		
externalCode	Unique code assigned to an occurred error.	String
errorMessageEn	Message associated with an error, which describes the error cause.	String

Sample Request

```
POST {base_URL}/tokenized-checkout/refund/payment/status HTTP/1.1
Host: {base_URL}
Accept: application/json
authorization: id_token
x-app-key: x-app-key
{
  "paymentId": "TR0011HbUAxUx1723522911265",
  "trxId": "CDH20MS73W"
}
```

Sample Success Response

```
HTTP/1.1 200 OK
Content-Type: application/json
{
  "originalTrxId": "CDH20MS73W",
  "originalTrxAmount": "2",
  "originalTrxCompletedTime": "2025-04-17T15:02:11:329 GMT+0600",
  "refundTransactions": [
    {
      "refundTrxId": "CDH00MS740",
      "refundTransactionStatus": "Completed",
      "refundAmount": "1.00",
      "completedTime": "2025-04-17T15:05:23:000"
    },
    {
      "refundTrxId": "CDH70MS74L",
      "refundTransactionStatus": "Completed",
      "refundAmount": "1.00",
      "completedTime": "2025-04-17T15:05:16:000"
    }
  ]
}
```

Sample Error Response

```
{
  "externalCode": "error_code",
  "errorMessageEn": "error_message"
}
```