

```
In [1]: import numpy as np
import matplotlib.pyplot as plt
from scipy import stats
```

## Bayesian estimate of $\mu$ and $\sigma$ .

Let's go through some of the calculations in Gregory's Chapter 9 through a specific example. There are three cases for estimating  $\mu$  discussed in that chapter -- A) known noise  $\sigma$  same for all  $e_i$  (Section 9.2.1), B) known noise  $\sigma_i$  unequal for all  $e_i$  (Section 9.2.2), and C) unknown noise  $\sigma$  same for all  $e_i$  (Section 9.2.3). Also discussed is a Bayesian estimate of  $\sigma$  (Section 9.2.4) for Case C.

Let's implement Cases A and C. Try to implement Case B yourself at home.

```
In [2]: # set a seed so we always get same results
np.random.seed(12345)

mu = 5.0 # parent population mean
sig = 2.0 # parent population standard deviation

n = 10

# sample from Gaussian; compute sample mean, variance, and chi^2
d = np.random.normal(loc=mu, scale=sig, size=n)
smu = np.mean(d)
sigmu = sig/np.sqrt(n)
chi2min = np.sum(((d-smu)/sig)**2)

# print summary
np.set_printoptions(formatter={'float': '{: 0.4f}'.format})
print("          Data = ", d)
print("          MLE mean = %8.4f" % smu)
print("          MLE error on mean = %8.4f" % sigmu)
print("          minimum chi^2 value = %8.4f" % chi2min)
```

```
          Data = [ 4.5906  5.9579  3.9611  3.8885  8.9316  7.7868  5.1
858  5.5635  6.5380
          7.4929]
          MLE mean = 5.9897
          MLE error on mean = 0.6325
          minimum chi^2 value = 6.4402
```

```
In [3]: # upper and lower bounds for mu and sigma priors
muL = 0.0
muH = 10.0
sigL = 0.1
sigH = 6.0

# generate grid of mu and sigma values that extend beyond
# the non-zero prior ranges for plotting purposes
# we will use them throughout this notebook
```

```
mugrid = np.linspace(0, 20, num=1001, endpoint=True)
siggrid = np.linspace(0.1, 10, num=1001, endpoint=True)
```

## Active learning exercise

1. define prior functions:

```
`def priorUniform(mu, mumin=muL, mumax=muH):
```

**your code goes here**

```
return prior`
```

```
`def priorJeffreys(sig, sigmin=sigL, sigmax=sigH):
```

**your code goes here**

```
return prior`
```

2. Plot priors.


```
In [4]: def priorUniform(mu, mumin=muL, mumax=muH):
# uniform prior
prior = np.zeros_like(mu)+1.0/(mumax-mumin)
# make sure to set prior outside range to zero
prior[mu<mumin] = prior[mu>mumax] = 0.0
return prior
```

```
In [5]: def priorJeffreys(sig, sigmin=sigL, sigmax=sigH):
# Jeffreys prior
prior = 1.0/(sig*np.log(sigmax/sigmin))
# make sure to set prior outside range to zero
prior[sig<sigmin] = prior[sig>sigmax] = 0.0
return prior
```

```
In [6]: priormu = priorUniform(mugrid)
priorsig = priorJeffreys(siggrid)
```

```
In [7]: plt.plot(mugrid, priormu, label='$p(\mu|I)$')
plt.plot(siggrid, priorsig, label='$p(\sigma|I)$')
plt.xscale('log')
plt.yscale('log')
plt.xlim([0.05, 15])
plt.xlabel('$\mu$ or $\sigma$')
plt.legend()
```

```
Out[7]: <matplotlib.legend.Legend at 0x119347b80>
```

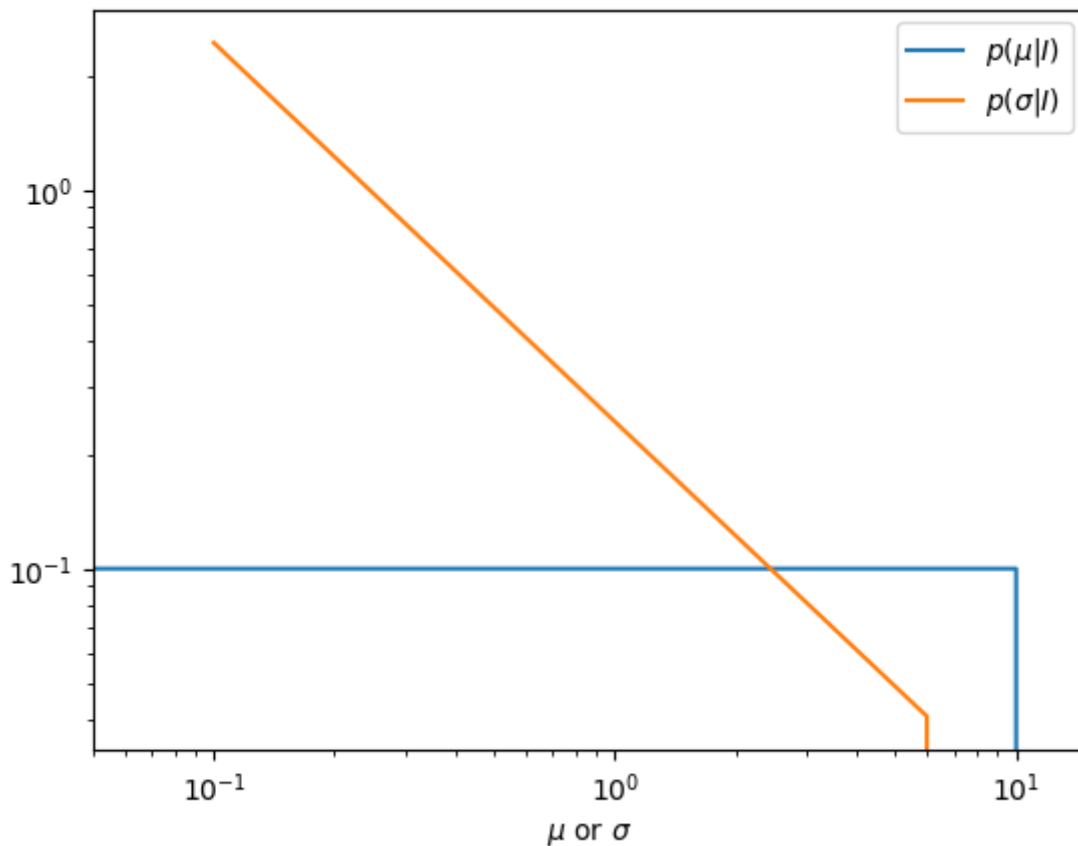

```
In [8]: # check prior normalization
print("    prior(mu) integral = ", np.trapz(priormu, mugrid))
print("prior(sigma) integral = ", np.trapz(priorsig, siggrid))
# If you want to be precise, you can divide the prior values
# by these normalization factors. But it will have only a
# tiny effect.
```

```
prior(mu) integral = 1.001
prior(sigma) integral = 1.0000140305235403
```

## Case A : $e_i = \sigma$ , same for all $i$

The posterior is given by,

$$p(\mu|D, I) = \frac{e^{-Q/(2\sigma^2)}}{\int_{\mu_L}^{\mu_H} e^{-Q/(2\sigma^2)} d\mu} = \frac{\text{NUM}}{\text{DEN}}$$

where

$$Q = \sum_{i=1}^n (d_i - \mu)^2$$

The simplified form is Equation (9.8),

$$p(\mu|D, I) = \frac{\exp\left\{-\frac{(\mu-\bar{d})^2}{2\sigma^2/N}\right\}}{\int_{\mu_L}^{\mu_H} \exp\left\{-\frac{(\mu-\bar{d})^2}{2\sigma^2/N}\right\} d\mu} = \frac{\text{NUM}}{\text{DEN}}$$

where

$$\bar{d} = \frac{1}{N} \sum_{i=1}^N d_i$$

Let's implement both expressions; call them A1 and A2, respectively. Keep in mind that NUM is zero outside the prior range.

## Active learning exercise

For A1:

1. Compute NUM, DEN, and posteriorA1 on `mugrid`
2. Plot posteriorA1 vs mugrid; label true  $\mu$

```
In [9]: NUM = np.zeros_like(mugrid)

# we are computing p(mu), so loop over mugrid values
for i in range(len(mugrid)):
    Q = np.sum((d - mugrid[i])**2)
    NUM[i] = np.exp(-Q/(2*sig*sig))

# make sure you multiply this by the prior
NUM = priormu*NUM


DEN = np.trapz(NUM, mugrid)
posteriorA1 = NUM/DEN
```

```
In [10]: # check normalization; this should come out to exactly 1.0
print(np.trapz(posteriorA1, mugrid))

1.0
```

```
In [11]: plt.plot(mugrid, posteriorA1)
# you can overplot the following to see that the posterior
# is a gaussian.
#plt.plot(mugrid, stats.norm.pdf(mugrid, loc=smu, scale=sigma))
plt.xlim([2,10])
plt.xlabel('$\mu$')
plt.ylabel('$p(\mu|D,I)$')
plt.axvline(x=mu, ls='--', c='#ff7f0e')
plt.text(4.7, 0.5, 'true $\mu=5$', rotation=90, c='#ff7f0e')
```

```
Out[11]: Text(4.7, 0.5, 'true $\mu=5$')
```

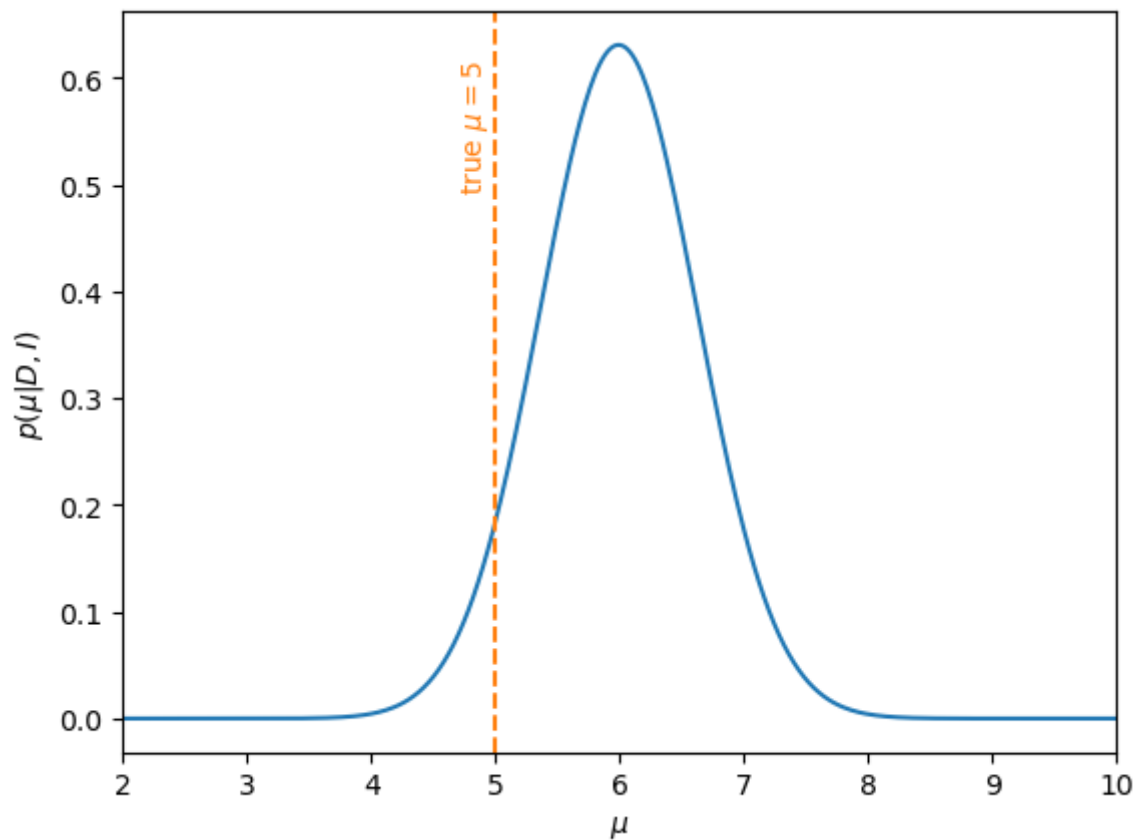

This is the implementation of the second expression, which will of course yield the exact same results.

## Active learning exercise

For A2:

1. Compute NUM, DEN, and posteriorA2 on `mugrid`
2. Plot posteriorA2 vs `mugrid`; overplot posteriorA1; label true  $\mu$


```
In [12]: dbar = d.mean() # = smu
NUM = priormu*np.exp(-n*(mugrid-dbar)**2/(2*sig*sig))
DEN = np.trapz(NUM, mugrid)
posteriorA2 = NUM/DEN
```

```
In [13]: # check normalization
print(np.trapz(posteriorA2, mugrid))

1.0
```

```
In [14]: plt.plot(mugrid, posteriorA2)
plt.xlim([2,10])
plt.xlabel('$\mu$')
plt.ylabel('$p(\mu|D,I)$')
plt.axvline(x=mu, ls='--', c='#ff7f0e')
plt.text(4.7, 0.5, 'true $\mu=5$', rotation=90, c='#ff7f0e')
```

Out[14]: Text(4.7, 0.5, 'true  $\mu=5$ ')

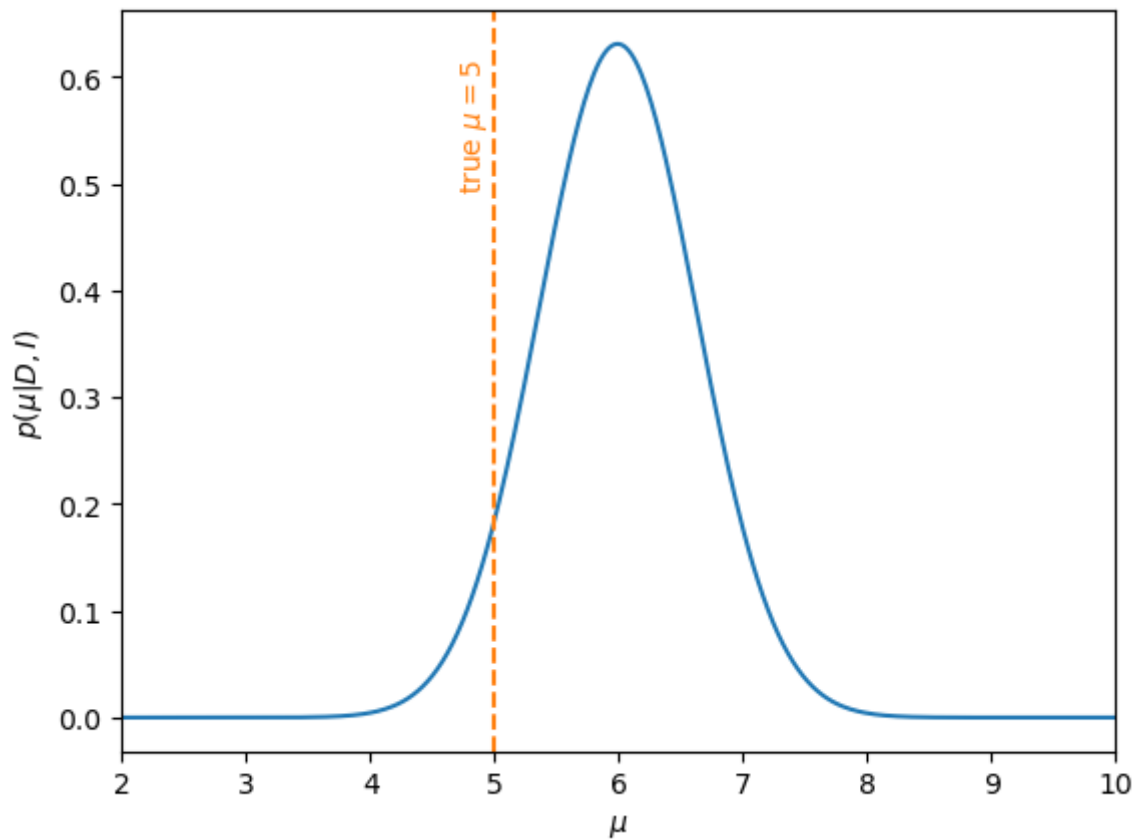

## Case B : $e_i = \sigma_i$ , unequal for all $i$

The posterior is given by,

$$p(\mu|D, I) = \frac{e^{-Q'/2}}{\int_{\mu_L}^{\mu_H} e^{-Q'/2} d\mu}$$

where

$$Q' = \sum_{i=1}^N \left( \frac{d_i - \mu}{\sigma_i} \right)^2$$

The posterior, after simplification, is given by Equation (9.19),

$$p(\mu|D, I) = \frac{\exp \left\{ -\frac{(\mu - \bar{d}_w)^2}{2\sigma_w^2} \right\}}{\int_{\mu_L}^{\mu_H} \exp \left\{ -\frac{(\mu - \bar{d}_w)^2}{2\sigma_w^2} \right\} d\mu} = \frac{\text{NUM}}{\text{DEN}}$$

where

$$\bar{d}_w = \frac{\sum_{i=1}^N w_i d_i}{\sum_{i=1}^N w_i}$$

$$\sigma_w^2 = \frac{1}{\sum_{i=1}^N w_i}$$

and

$$w_i = \frac{1}{\sigma_i^2}$$

SEE IF YOU CAN IMPLEMENT THIS YOURSELF!

## Case C : $e_i = \sigma$ , equal for all $i$ but unknown.

The posterior for  $\mu$  marginalized over  $\sigma$  is given by Equation (9.32),

$$p(\mu|D, I) = \frac{\int_{\sigma_L}^{\sigma_H} \sigma^{-(N+1)} e^{-Q/2\sigma^2} d\sigma}{\int_{\mu_L}^{\mu_H} \int_{\sigma_L}^{\sigma_H} \sigma^{-(N+1)} e^{-Q/2\sigma^2} d\sigma d\mu} = \frac{\text{NUM}}{\text{DEN}}$$

where

$$Q = \sum_{i=1}^N (d_i - \mu)^2$$

Again, keep in mind that NUM is zero outside the prior range.

```
In [15]: NUM = np.zeros_like(mugrid)

# we are computing p(mu), so loop over mugrid values
for i in range(len(mugrid)):
    Q = np.sum((d - mugrid[i])**2)
    integrand = 1/(siggrid**(-(n+1))) * np.exp(-Q/(2*siggrid*siggrid))
    NUM[i] = np.trapz(integrand, siggrid)

NUM = priormu*NUM


DEN = np.trapz(NUM, mugrid)
posteriorC = NUM/DEN
```

```
In [16]: # always check normalization
print(np.trapz(posteriorC, mugrid))

0.9999999999999998
```

```
In [17]: plt.plot(mugrid, posteriorA2, label='Case A')
plt.plot(mugrid, posteriorC, label='Case C')
plt.xlabel('$\mu$')
plt.ylabel('$p(\mu|D,I)$')
plt.legend()
```

```
Out[17]: <matplotlib.legend.Legend at 0x119c6e320>
```

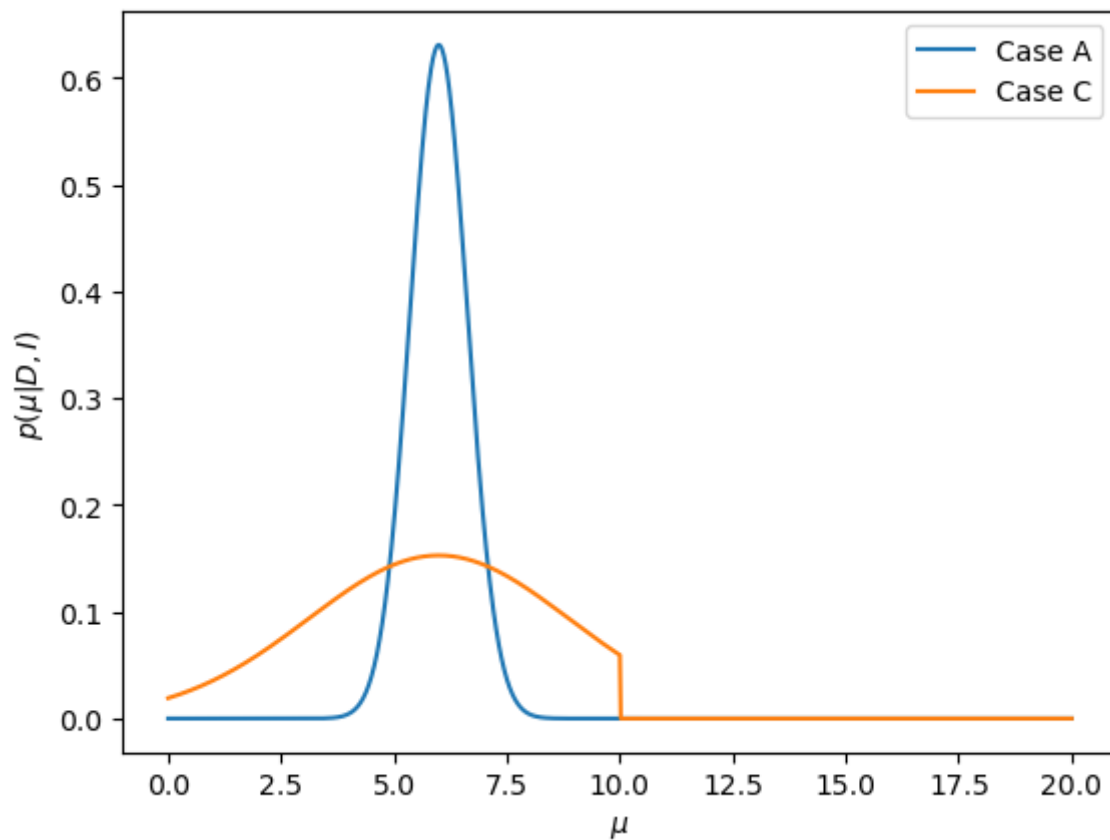

Note the non-negligible effect on the prior here for Case C where we assumed the prior to be nonzero only inside  $\mu = [0, 10]$ . Whether this is reasonable is up to the data analyst.

We can also compute the posterior for  $\sigma$  marginalized over  $\mu$  as in Equation (9.43).

$$p(\sigma|D, I) = \frac{\frac{1}{\sigma^N} e^{-Nr^2/2\sigma^2}}{\int_{\sigma_L}^{\sigma_H} \frac{1}{\sigma^N} e^{-Nr^2/2\sigma^2} d\sigma}$$

where


$$r^2 = \frac{1}{N} \sum_{i=1}^N (d_i - \bar{d})^2$$

```
In [18]: r2 = (1/n)*np.sum((d-dbar)**2)
NUM = priorsig*np.exp(-nr2/(2*siggrid*siggrid))/(siggrid*n)
DEN = np.trapz(NUM, siggrid)
posteriorSig = NUM/DEN
```

```
In [19]: plt.plot(siggrid, posteriorSig)
plt.xlabel('$\sigma$')
plt.ylabel('$p(\sigma|D,I)$')
plt.axvline(x=sig, ls='--', c='#ff7f0e')
plt.text(2.1, 0.8, 'true $\sigma=2$', rotation=90, c='#ff7f0e')
```

```
Out[19]: Text(2.1, 0.8, 'true $\sigma=2$')
```



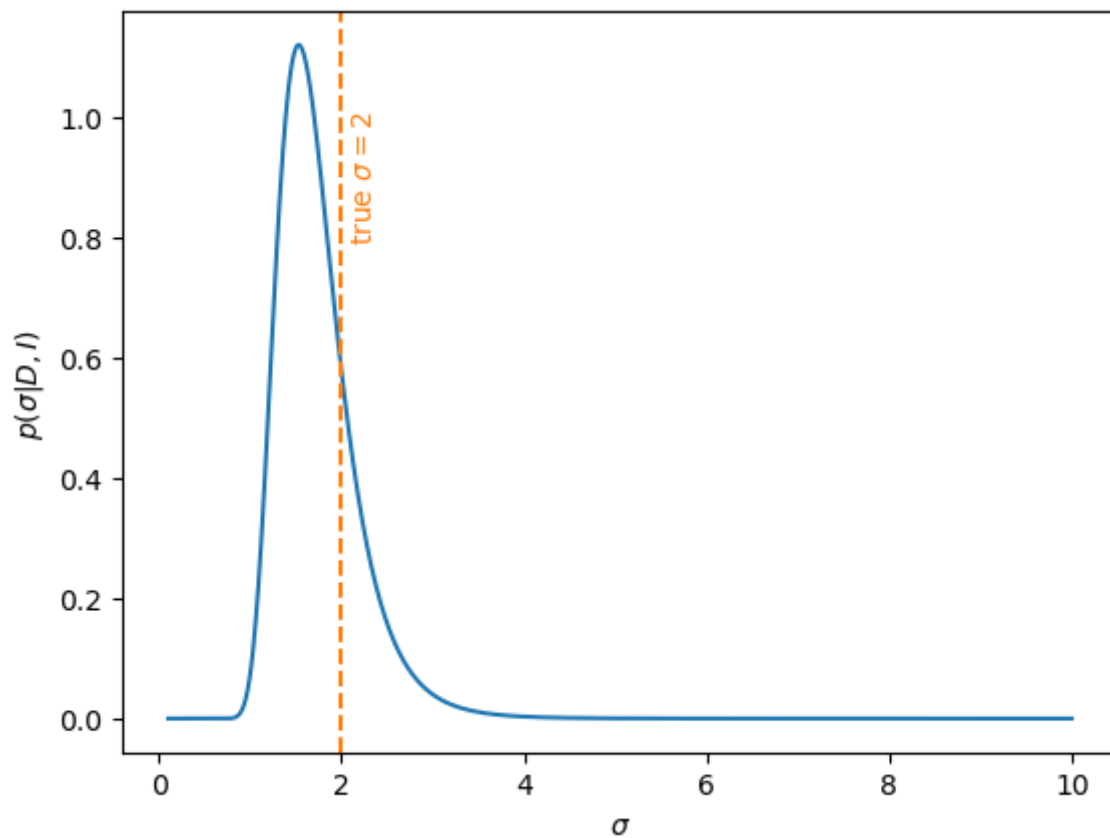

Finally, let's also look at the joint likelihood  $p(D|\mu, \sigma, I)$  ignoring the priors.

```
In [20]: def likelihood(mu, sig, d, n):
          dbar = d.mean()
          r2 = (1/n)*np.sum((d-dbar)**2)
          Q = n*((mu-dbar)**2) + n*r2
          L = (1/sig**n) * np.exp(-Q/(2*sig*sig))
          return L
```


```
In [21]: X, Y = np.meshgrid(mugrid, siggrid)
          like = likelihood(X, Y, d, n)
```

```
In [22]: like.shape
```

```
Out[22]: (1001, 1001)
```

```
In [23]: fig = plt.figure()
          ax = fig.add_subplot()
          ax.contourf(X, Y, like)
          ax.set_xlabel('$\mu$')
          ax.set_ylabel('$\sigma$')
          ax.set_xlim([2, 10])
          ax.set_ylim([0, 4])
```

```
Out[23]: (0.0, 4.0)
```

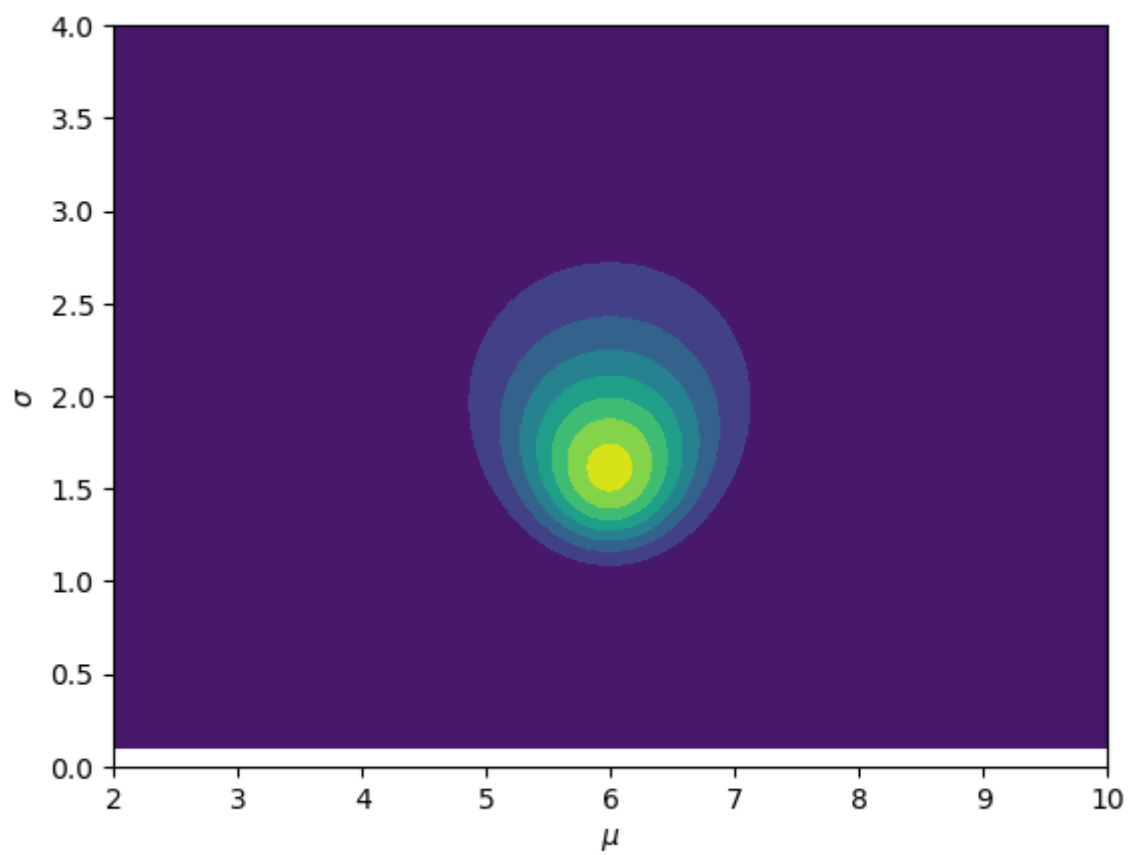

In [ ]: