


Fundamental Quiz

JOB CONNECTOR FULLSTACK WEB DEVELOPMENT

1. What will be the result when this program is executed?

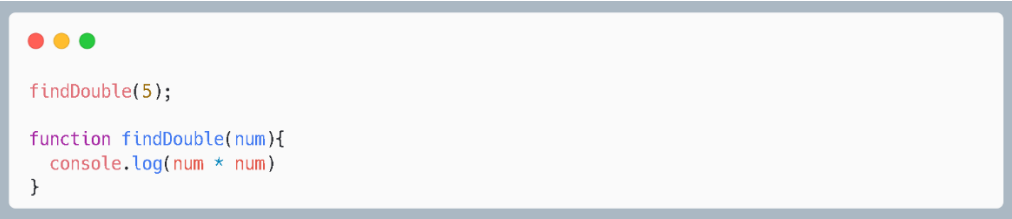


```
findDouble(5);

function findDouble(num){
  console.log(num * num)
}
```

- a. 25
- b. Error, because the function not return anything
- c. Undefined
- d. Error, because the function is called before it is declared

2. What will be the result when this program is executed?

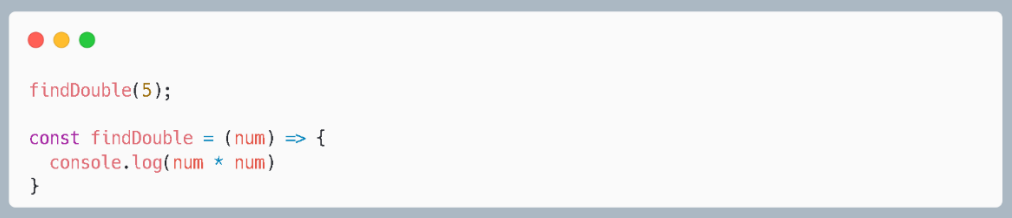

```
findDouble(5);

const findDouble = (num) => {
  console.log(num * num)
}
```

- a. 25
- b. Error, because the function not return anything
- c. Undefined
- d. Error, because the function is called before it is declared

3. What is the result of the code below?

```
const name: string = 'Indivara'
const age: number = 17

if(!name || !umur) console.log('Data not valid')
else if(name && umur > 17) console.log('Verification success!')
else if(name && umur < 17) console.log('Verification failed!')
else console.log('Verification on process!')
```

- a. Data not valid
- b. Verification success!
- c. Verification failed!
- d. Verification on process!

4. What is the final result of “clubs” array?

```
const clubs = ['Persib', 'Persija', 'Persebaya', 'Dewa United']
clubs.splice(2, 0, 'Bali United', 'PSM Makasar')
clubs.shift()
console.log(clubs)
```

- a. [Persib, Persija, Persebaya, Bali United, PSM Makasar]
- b. [Persija, Persebaya, Bali United, PSM Makasar, Dewa United]
- c. [Persib, Persija, Bali United, PSM Makasar, Persebaya]
- d. [Persija, Bali United, PSM Makasar, Persebaya, Dewa United]

5. Observe the code below! What is value of nmbr on second line and nmbr on third line?

```
let nmbr: number | string = '12z'
nmbr = Number(nmbr)
nmbr = String(nmbr)
```

- a. NaN & String
- b. '12' & String
- c. NaN & Number
- d. 12 & Number


6. What is current value of variable result?

```
let result = 'Hello'

if('0' !== 0) result += ', World!'
```

- a. 'Hello'
- b. ', World!'
- c. 'Hello, World!'
- d. TypeError: Assignment to constant variable


7. What is the result of “console.log(temp)”?

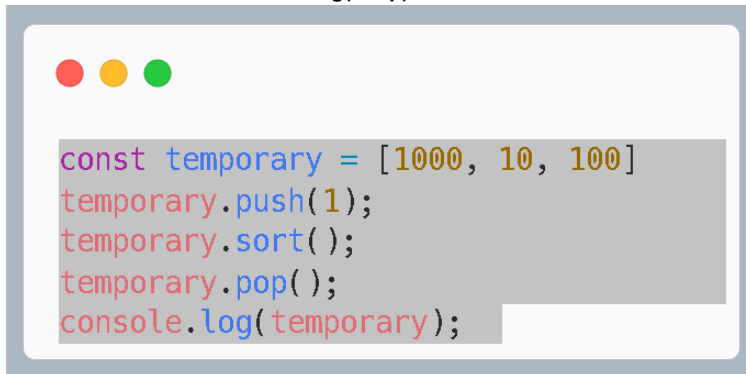

```
const temporary = [1000, 10, 100]
temporary.push(1);
temporary.sort();
temporary.pop();
console.log(temporary);
```

- a. [1000, 10, 100, 1]
- b. [1, 10, 100]
- c. [1000, 10, 100]
- d. [10, 100, 1000]

8. What will happen if the following program is executed?

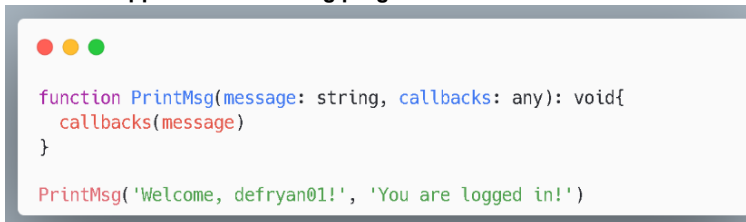

```
function PrintMsg(message: string, callbacks: any): void{
    callbacks(message)
}


PrintMsg('Welcome, defryan01!', 'You are logged in!')
```

- a. Welcome, defryan01!
- b. You are logged in!
- c. TypeError: callback is not a function
- d. ReferenceError: callback is not defined

9. Which of the following is a characteristic of a queue data structure?

- a. First-In, First-Out (FIFO)
- b. Last-In, Last-Out (LIFO)
- c. Sorted Order
- d. Random Access

10. What is the result of “console.log(sentence)”?

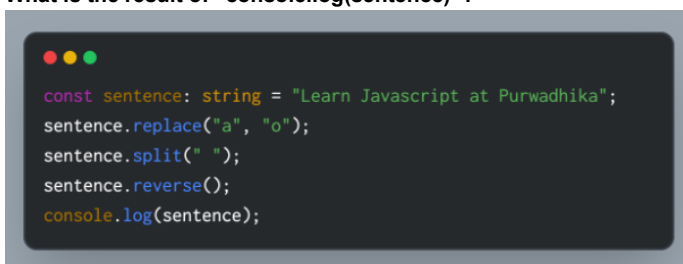

```
const sentence: string = "Learn Javascript at Purwadhika";
sentence.replace("a", "o");
sentence.split(" ");
sentence.reverse();
console.log(sentence);
```

- a. ['Purwadhika', 'at', 'Javascript', 'Leorn']
- b. TypeError: sentence.reverse is not a function
- c. Leorn Jovoscript ot Purwodhiko
- d. Leorn Javascript at Purwadhika

11. What is the primary purpose of using pseudocode in programming?

- a. To write executable code
- b. To document the code for future reference
- c. To test the code for syntax errors
- d. To outline the steps of an algorithm in a simpler language

12. Which of the following value that is NOT a primitive data type in JavaScript/Typescript?

- a. `const greeting = "Hello";`
- b. `let discount = 0.75;`
- c. `var isGraduated = true;`
- d. `const products = ["Indomie Goreng", "Mie Sedap", "Sarimi"];`

13. What does the `var` keyword do in JavaScript?

- a. Declares a function-scoped variable
- b. Declares a variable with constant value
- c. Declares a block-scoped variable
- d. Declares a global variable

14. Which of the following is a benefit of using TypeScript over JavaScript?

- a. Faster development time
- b. Improved type safety
- c. Increased memory usage
- d. Reduced code readability

15. Which of the following is NOT a valid way to declare a variable in JavaScript?

- a. `int point = 1000;`
- b. `const name;`
- c. `let discount = '50%';`
- d. `var examResult = 90;`

16. What is the result of two `console.log` statement below?

```
interface User {  
  name: string;  
  age: number;  
  status?: string;  
}  
  
const user: User = {  
  name: 'andika',  
  age: 19,  
};  
  
console.log(user.name);  
console.log(user.status);
```

- a. andika and ``ReferenceError: properties status is not defined``
- b. andika and undefined
- c. andika and ``TypeError: status is not a properties of an Object user``
- d. andika and null

17. The code, when executed, turns out to be an error. What caused this error?

```
let temp: string[] = "javascript is awesome".split(" ");
for (let i = 0; i < temp.length; i += 1) {
    temp.push(temp[i]);
}
```

- a. Incorrect syntax in the for loop
- b. An infinite loop occurs because of `temp.push(temp[i])`
- c. The condition step in the for loop cannot be `i += 1`
- d. The string in the variable `str` cannot be directly given the `.split(' ')` method

18. What is the purpose of the 'this' keyword in class or object?

- a. To refer to the global object
- b. To refer to the current object
- c. To refer to the parent object
- d. All answers is correct

19. Which of the following is a benefit of using encapsulation in object-oriented programming?

- a. Reduced code readability
- b. Improved data security
- c. Increased code complexity
- d. All answers is correct

20. What is the purpose of the 'super' keyword in class?

- a. To define a new method in the class
- b. To inherit properties from another class
- c. To call the parent class's constructor
- d. To create a new instance of the class